

FCC TEST REPORT  
FOR  
Shenzhen Witstec Technology Co.,LTD  
Wireless communication Zigbee module  
Test Model: WT5169P0-M1

|                                |   |                                                                                                           |
|--------------------------------|---|-----------------------------------------------------------------------------------------------------------|
| Prepared for                   | : | Shenzhen Witstec Technology Co.,LTD                                                                       |
| Address                        | : | 4F, No.4BLD, He Ping Industry Park, Chang Yong RD. Long Hua,<br>Shenzhen, China                           |
| Prepared by                    | : | Shenzhen LCS Compliance Testing Laboratory Ltd.                                                           |
| Address                        | : | 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,<br>Bao'an District, Shenzhen,Guangdong, China |
| Tel                            | : | (+86)755-82591330                                                                                         |
| Fax                            | : | (+86)755-82591332                                                                                         |
| Web                            | : | www.LCS-cert.com                                                                                          |
| Mail                           | : | webmaster@LCS-cert.com                                                                                    |
| Date of receipt of test sample | : | Nov. 10, 2017                                                                                             |
| Number of tested samples       | : | 1                                                                                                         |
| Serial number                  | : | Prototype                                                                                                 |
| Date of Test                   | : | Nov. 10, 2017–Nov. 20, 2017                                                                               |
| Date of Report                 | : | Nov. 20, 2017                                                                                             |

## FCC TEST REPORT

## FCC CFR 47 PART 15 C(15.247): 2017

Report Reference No. .... : LCS170831044AE7

Date of Issue ..... : Nov. 20, 2017

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure ..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □

Applicant's Name..... : Shenzhen Witstec Technology Co.,LTD

Address ..... : 4F, No.4BLD, He Ping Industry Park, Chang Yong RD. Long Hua,  
Shenzhen, China

## Test Specification

Standard ..... : FCC CFR 47 PART 15 C(15.247): 2017

Test Report Form No. .... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

## Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. .... : Wireless communication Zigbee module


Trade Mark ..... : N/A

Test Model ..... : WT5169P0-M1

Ratings ..... : DC 2.0- 3.6V

Result ..... : Positive

Compiled by:



Ada Liang/ File administrators

Supervised by:



Glin Lu/ Technique principal

Approved by:



Gavin Liang/ Manager

## FCC -- TEST REPORT

|                                          |                                    |
|------------------------------------------|------------------------------------|
| Test Report No. : <b>LCS170831044AE7</b> | <u>2017-11-20</u><br>Date of issue |
|------------------------------------------|------------------------------------|

|                          |                                                                                |
|--------------------------|--------------------------------------------------------------------------------|
| Test Model.....          | : WT5169P0-M1                                                                  |
| EUT.....                 | : Wireless communication Zigbee module                                         |
| <b>Applicant.....</b>    | <b>: Shenzhen Witstec Technology Co.,LTD</b>                                   |
| Address.....             | : 4F, No.4BLD, He Ping Industry Park, Chang Yong RD. Long Hua, Shenzhen, China |
| Telephone.....           | : /                                                                            |
| Fax.....                 | : /                                                                            |
| <b>Manufacturer.....</b> | <b>: Shenzhen Witstec Technology Co.,LTD</b>                                   |
| Address.....             | : 4F, No.4BLD, He Ping Industry Park, Chang Yong RD. Long Hua, Shenzhen, China |
| Telephone.....           | : /                                                                            |
| Fax.....                 | : /                                                                            |
| <b>Factory.....</b>      | <b>: Shenzhen Witstec Technology Co.,LTD</b>                                   |
| Address.....             | : 4F, No.4BLD, He Ping Industry Park, Chang Yong RD. Long Hua, Shenzhen, China |
| Telephone.....           | : /                                                                            |
| Fax.....                 | : /                                                                            |

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**Revision History**

| Revision | Issue Date    | Revisions     | Revised By  |
|----------|---------------|---------------|-------------|
| 00       | Nov. 20, 2017 | Initial Issue | Gavin Liang |
|          |               |               |             |
|          |               |               |             |

## Table of Contents

## Page

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                                 | <b>6</b>  |
| 1.1. TEST STANDARDS.....                               | 6         |
| 1.2. TEST DESCRIPTION.....                             | 6         |
| 1.3. TEST FACILITY .....                               | 7         |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....     | 7         |
| <b>2. GENERAL INFORMATION.....</b>                     | <b>8</b>  |
| 2.1. ENVIRONMENTAL CONDITIONS .....                    | 8         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                  | 8         |
| 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY..... | 8         |
| 2.4. EQUIPMENTS USED DURING THE TEST .....             | 9         |
| 2.5. RELATED SUBMITTAL(S) / GRANT (S).....             | 9         |
| 2.6. MODIFICATIONS.....                                | 9         |
| <b>3. TEST CONDITIONS AND RESULTS .....</b>            | <b>10</b> |
| 3.1. CONDUCTED EMISSIONS TEST .....                    | 10        |
| 3.2. RADIATED EMISSIONS AND BAND EDGE .....            | 13        |
| 3.3. MAXIMUM PEAK OUTPUT POWER .....                   | 21        |
| 3.4. POWER SPECTRAL DENSITY .....                      | 22        |
| 3.5. 6dB BANDWIDTH.....                                | 24        |
| 3.6. OUT-OF-BAND EMISSIONS .....                       | 26        |
| 3.7. ANTENNA REQUIREMENT.....                          | 30        |
| <b>4. TEST SETUP PHOTOS OF THE EUT .....</b>           | <b>31</b> |
| <b>5. PHOTOS OF THE EUT.....</b>                       | <b>32</b> |

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03r05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

## 1.2. Test Description

| FCC PART 15.247                 |                                |      |
|---------------------------------|--------------------------------|------|
| FCC Part 15.207                 | AC Power Conducted Emission    | PASS |
| FCC Part 15.247(a)(2)           | 6dB Bandwidth                  | PASS |
| FCC Part 15.247(d)              | Spurious RF Conducted Emission | PASS |
| FCC Part 15.247(b)              | Maximum Conducted Output Power | PASS |
| FCC Part 15.247(e)              | Power Spectral Density         | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions             | PASS |
| FCC Part 15.247(d)              | Band Edge                      | PASS |
| FCC Part 15.203/15.247 (b)      | Antenna Requirement            | PASS |

### 1.3. Test Facility

#### 1.3.1 Address of the test laboratory

Shenzhen LCS Compliance Testing Laboratory Ltd.

1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

There is one 3m semi-anechoic chamber fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS Registration Number. is L4595.

FCC Registration Number. is 254912.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

### 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

| Test Item              |   | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty  | : | 9KHz~30MHz      | 3.10dB      | (1)  |
|                        |   | 30MHz~200MHz    | 2.96dB      | (1)  |
|                        |   | 200MHz~1000MHz  | 3.10dB      | (1)  |
|                        |   | 1GHz~26.5GHz    | 3.80dB      | (1)  |
|                        |   | 26.5GHz~40GHz   | 3.90dB      | (1)  |
| Conduction Uncertainty | : | 150kHz~30MHz    | 1.63dB      | (1)  |
| Power disturbance      | : | 30MHz~300MHz    | 1.60dB      | (1)  |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### 2.2. General Description of EUT

|                       |                                      |
|-----------------------|--------------------------------------|
| Product Name:         | Wireless communication Zigbee module |
| Model/Type reference: | WT5169P0-M1                          |
| Power supply:         | DC 2.8-3.6V                          |
| Test power            | DC 3.6V                              |
| <b>Zigbee</b>         |                                      |
| Modulation:           | OQPSK (DSSS)                         |
| Operation frequency:  | 2405MHz to 2480MHz                   |
| Channel number:       | 16                                   |
| Channel separation:   | 5 MHz                                |
| Antenna type:         | PCB Antenna                          |
| Antenna gain:         | 0dBi                                 |

Note: For more details, please refer to the user's manual of the EUT.

### 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 16 channels provided to the EUT of Zigbee and Channel 11/18/26 were selected for testing.

#### Operation Frequency Zigbee :

| Channel   | Frequency       | Channel   | Frequency       |
|-----------|-----------------|-----------|-----------------|
| <b>11</b> | <b>2405 MHz</b> | 19        | 2445 MHz        |
| 12        | 2410 MHz        | 20        | 2450 MHz        |
| 13        | 2415 MHz        | 21        | 2455 MHz        |
| 14        | 2420 MHz        | 22        | 2460 MHz        |
| 15        | 2425 MHz        | 23        | 2465 MHz        |
| 16        | 2430 MHz        | 24        | 2470 MHz        |
| 17        | 2435 MHz        | 25        | 2475 MHz        |
| <b>18</b> | <b>2440 MHz</b> | <b>26</b> | <b>2480 MHz</b> |

Note: Test performed at the lowest/middle/highest frequencies selected in the list above for EUT supported while working on specified mode.



## 2.4. Equipments Used during the Test

| Item | Equipment                | Manufacturer   | Model No.                        | Serial No.  | Last Cal.  | Next Cal.  |
|------|--------------------------|----------------|----------------------------------|-------------|------------|------------|
| 1    | EMC Receiver             | R&S            | ESCS 30                          | 100174      | 2017-06-18 | 2018-06-17 |
| 2    | Signal analyzer          | Agilent        | E4448A(External mixers to 40GHz) | US44300469  | 2017-07-16 | 2018-06-17 |
| 3    | Spectrum Analyzer        | Agilent        | N9020A                           | MY50510140  | 2017-10-27 | 2018-10-26 |
| 4    | LISN                     | MESS Tec       | NNB-2/16Z                        | 99079       | 2017-06-18 | 2018-06-17 |
| 5    | LISN                     | EMCO           | 3819/2NM                         | 9703-1839   | 2017-06-18 | 2018-06-17 |
| 6    | RF Cable-CON             | UTIFLEX        | 3102-26886-4                     | CB049       | 2017-06-18 | 2018-06-17 |
| 7    | ISN                      | SCHAFFNER      | ISN ST08                         | 21653       | 2017-06-18 | 2018-06-17 |
| 8    | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M                           | 03CH03-HY   | 2017-06-18 | 2018-06-17 |
| 9    | Amplifier                | SCHAFFNER      | COA9231A                         | 18667       | 2017-06-18 | 2018-06-17 |
| 10   | Amplifier                | Agilent        | 8449B                            | 3008A02120  | 2017-06-16 | 2018-06-15 |
| 11   | Amplifier                | MITEQ          | AMF-6F-260400                    | 9121372     | 2017-06-16 | 2018-06-15 |
| 12   | Loop Antenna             | R&S            | HFH2-Z2                          | 860004/001  | 2017-06-18 | 2018-06-17 |
| 13   | By-log Antenna           | SCHWARZBECK    | VULB9163                         | 9163-470    | 2017-06-10 | 2018-06-09 |
| 14   | Horn Antenna             | EMCO           | 3115                             | 6741        | 2017-06-10 | 2018-06-09 |
| 15   | Horn Antenna             | SCHWARZBECK    | BBHA9170                         | BBHA9170154 | 2017-06-10 | 2018-06-09 |
| 16   | RF Cable-R03m            | Jye Bao        | RG142                            | CB021       | 2017-06-18 | 2018-06-17 |
| 17   | RF Cable-HIGH            | SUHNER         | SUCOFLEX 106                     | 03CH03-HY   | 2017-06-18 | 2018-06-17 |
| 18   | Power Sensor             | R&S            | NRV-Z81                          | 100458      | 2017-06-18 | 2018-06-17 |
| 19   | Power Sensor             | R&S            | NRV-Z32                          | 10057       | 2017-06-18 | 2018-06-17 |
| 20   | Power Meter              | R&S            | NRVS                             | 100444      | 2017-06-18 | 2018-06-17 |

The calibration interval was one year

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |


\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

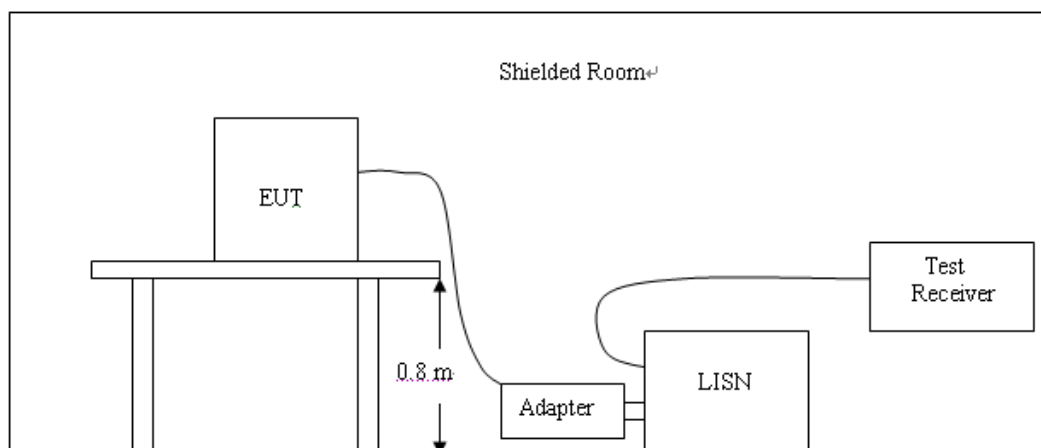

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

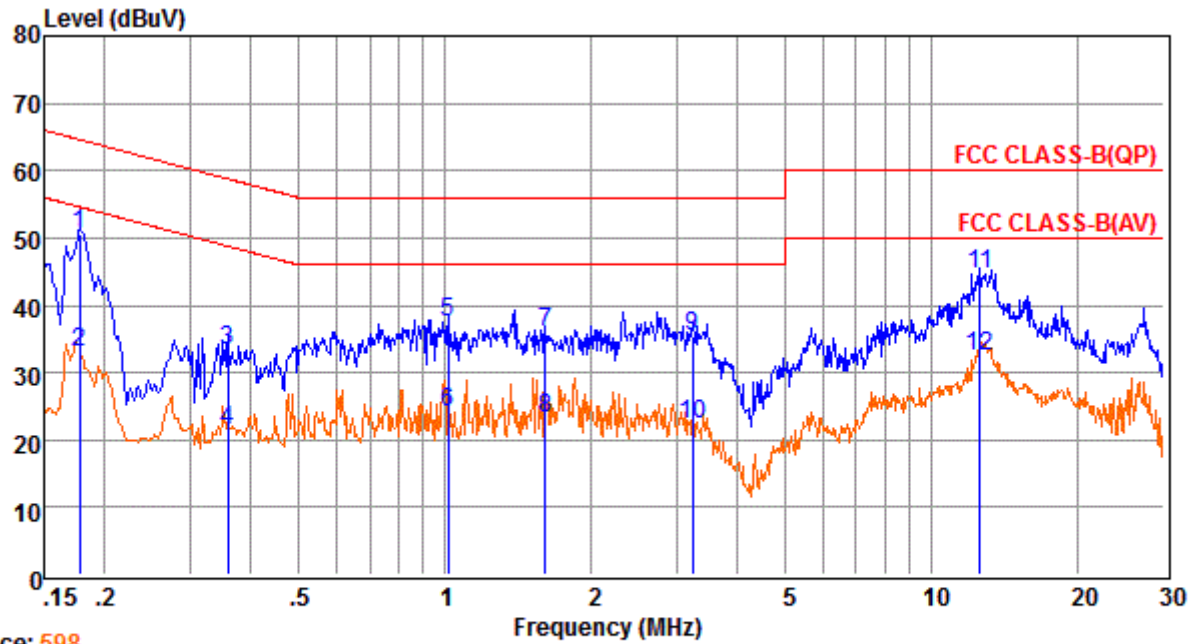
**TEST RESULTS**

Trace: 598

Env. Ins: 24\*/56%  
 EUT: 3  
 M/N:  
 Power Rating: AC 120V/60Hz  
 Test Mode: On  
 Operator: WANGCHANG  
 Memo:  
 Pol: NEUTRAL

|    | Freq  | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz   | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.18  | 30.91   | 9.64    | 0.02   | 10.00   | 50.57    | 64.59 | -14.02 | QP      |
| 2  | 0.18  | 13.38   | 9.63    | 0.02   | 10.00   | 33.03    | 64.59 | -31.56 | Average |
| 3  | 0.36  | 13.63   | 9.61    | 0.03   | 10.00   | 33.27    | 58.78 | -25.51 | QP      |
| 4  | 0.36  | 1.81    | 9.61    | 0.03   | 10.00   | 21.45    | 58.78 | -37.33 | Average |
| 5  | 1.02  | 17.93   | 9.63    | 0.05   | 10.00   | 37.61    | 56.00 | -18.39 | QP      |
| 6  | 1.02  | 4.26    | 9.63    | 0.05   | 10.00   | 23.94    | 56.00 | -32.06 | Average |
| 7  | 1.61  | 16.26   | 9.63    | 0.05   | 10.00   | 35.94    | 56.00 | -20.06 | QP      |
| 8  | 1.61  | 3.47    | 9.63    | 0.05   | 10.00   | 23.15    | 56.00 | -32.85 | Average |
| 9  | 3.22  | 15.83   | 9.65    | 0.06   | 10.00   | 35.54    | 56.00 | -20.46 | QP      |
| 10 | 3.22  | 2.50    | 9.65    | 0.06   | 10.00   | 22.21    | 56.00 | -33.79 | Average |
| 11 | 12.58 | 24.78   | 9.73    | 0.09   | 10.00   | 44.60    | 60.00 | -15.40 | QP      |
| 12 | 12.58 | 12.60   | 9.73    | 0.09   | 10.00   | 32.42    | 60.00 | -27.58 | Average |

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

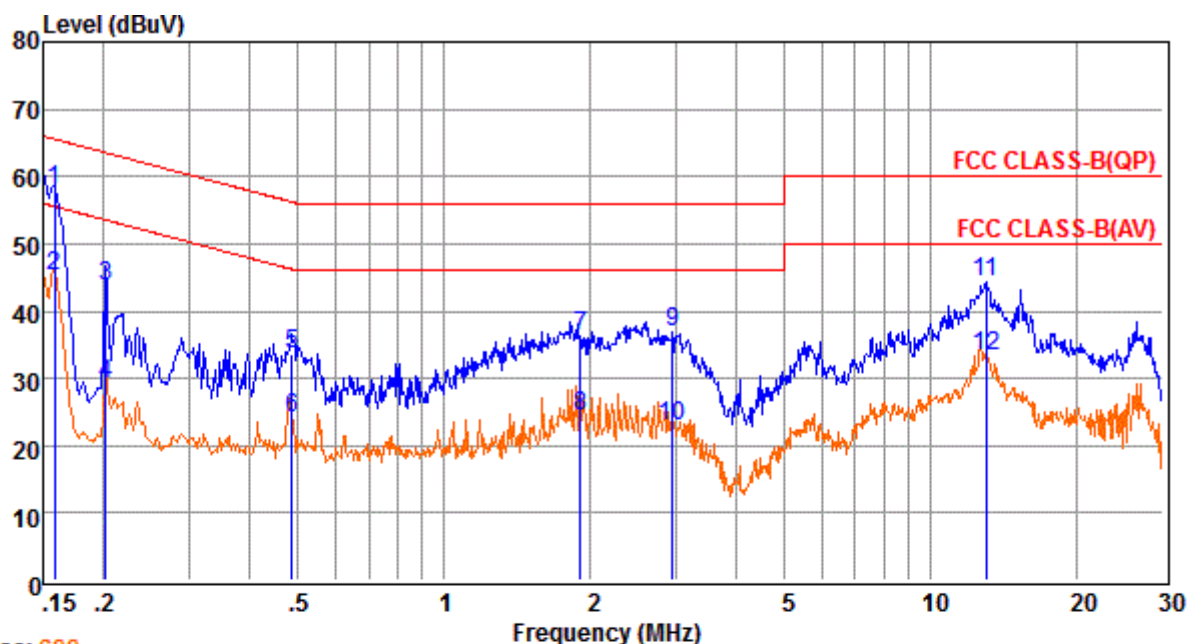

Trace: 600

Env. Ins: 24\*/56%  
 EUT: 3  
 M/N:  
 Power Rating: AC 120V/60Hz  
 Test Mode: On  
 Operator: WANGCHANG  
 Memo:  
 Pol: LINE

|    | Freq  | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz   | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.16  | 38.29   | 9.58    | 0.02   | 10.00   | 57.89    | 65.56 | -7.67  | QP      |
| 2  | 0.16  | 25.59   | 9.58    | 0.02   | 10.00   | 45.19    | 55.55 | -10.36 | Average |
| 3  | 0.20  | 23.98   | 9.63    | 0.02   | 10.00   | 43.63    | 63.54 | -19.91 | QP      |
| 4  | 0.20  | 9.58    | 9.63    | 0.02   | 10.00   | 29.23    | 53.53 | -24.30 | Average |
| 5  | 0.49  | 13.96   | 9.62    | 0.04   | 10.00   | 33.62    | 56.23 | -22.61 | QP      |
| 6  | 0.49  | 4.31    | 9.62    | 0.04   | 10.00   | 23.97    | 46.23 | -22.26 | Average |
| 7  | 1.91  | 16.65   | 9.64    | 0.05   | 10.00   | 36.34    | 56.00 | -19.66 | QP      |
| 8  | 1.91  | 4.81    | 9.64    | 0.05   | 10.00   | 24.50    | 46.00 | -21.50 | Average |
| 9  | 2.95  | 17.03   | 9.64    | 0.06   | 10.00   | 36.73    | 56.00 | -19.27 | QP      |
| 10 | 2.95  | 3.25    | 9.64    | 0.06   | 10.00   | 22.95    | 46.00 | -23.05 | Average |
| 11 | 12.99 | 24.39   | 9.70    | 0.09   | 10.00   | 44.18    | 60.00 | -15.82 | QP      |
| 12 | 12.99 | 13.49   | 9.70    | 0.09   | 10.00   | 33.28    | 50.00 | -16.72 | Average |

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 3.2. Radiated Emissions and Band Edge

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

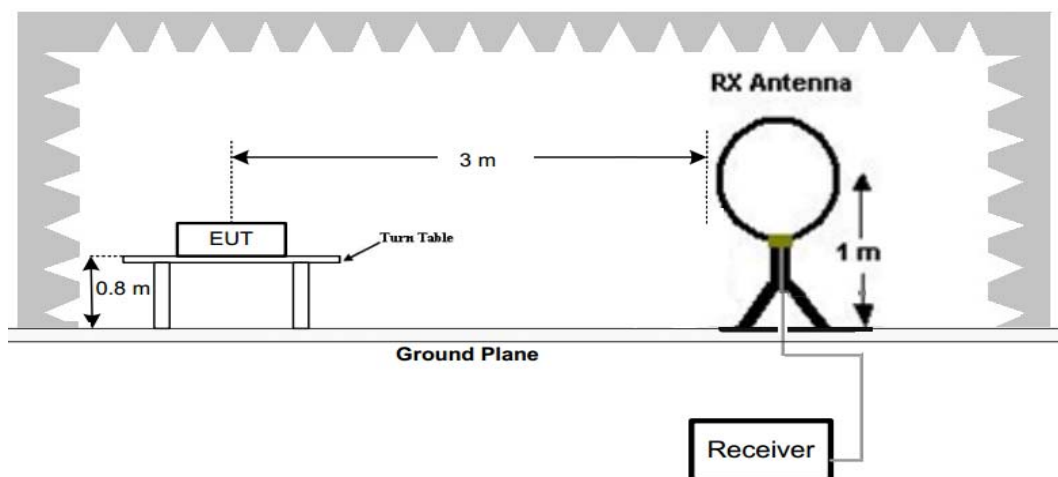

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

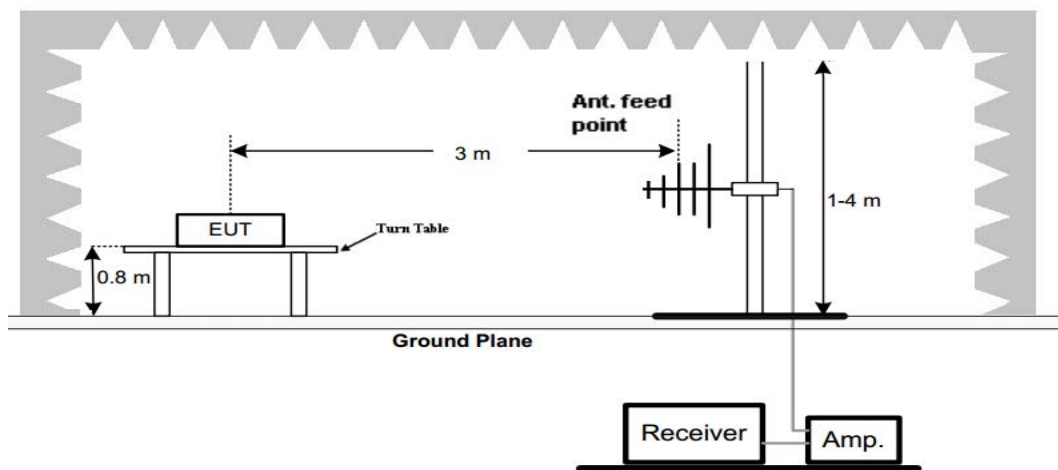

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

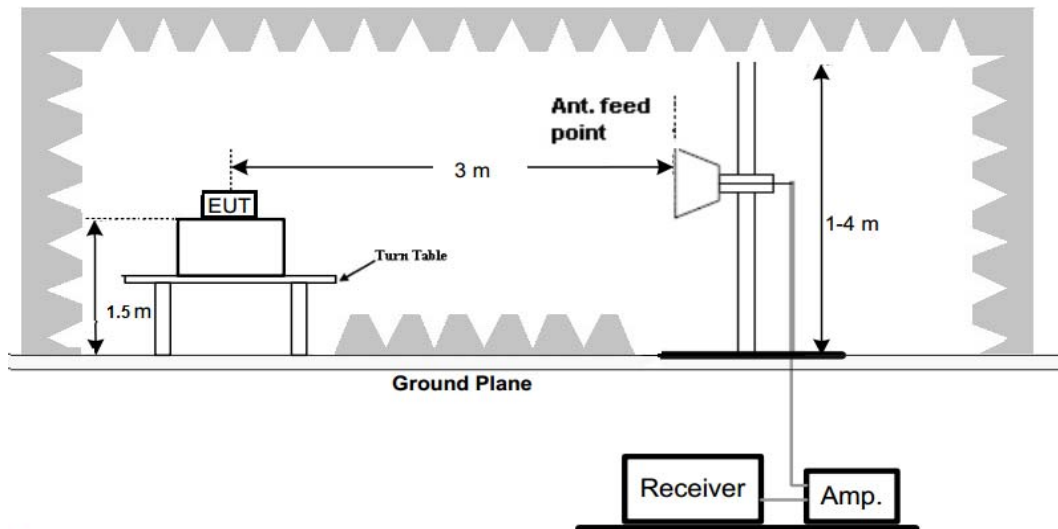

**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

**TEST RESULTS**

Remark:

1. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

## For 30MHz-1GHz

## Horizontal


Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: 0755-82591330 E-mail: webmaster@LCS-cert.com  
 Fax: 0755-82591332 Http: www.LCS-cert.com



Data: 417

File: E:\2017 Test Report\WC.EM6 (417)

Date: 2017-11-18

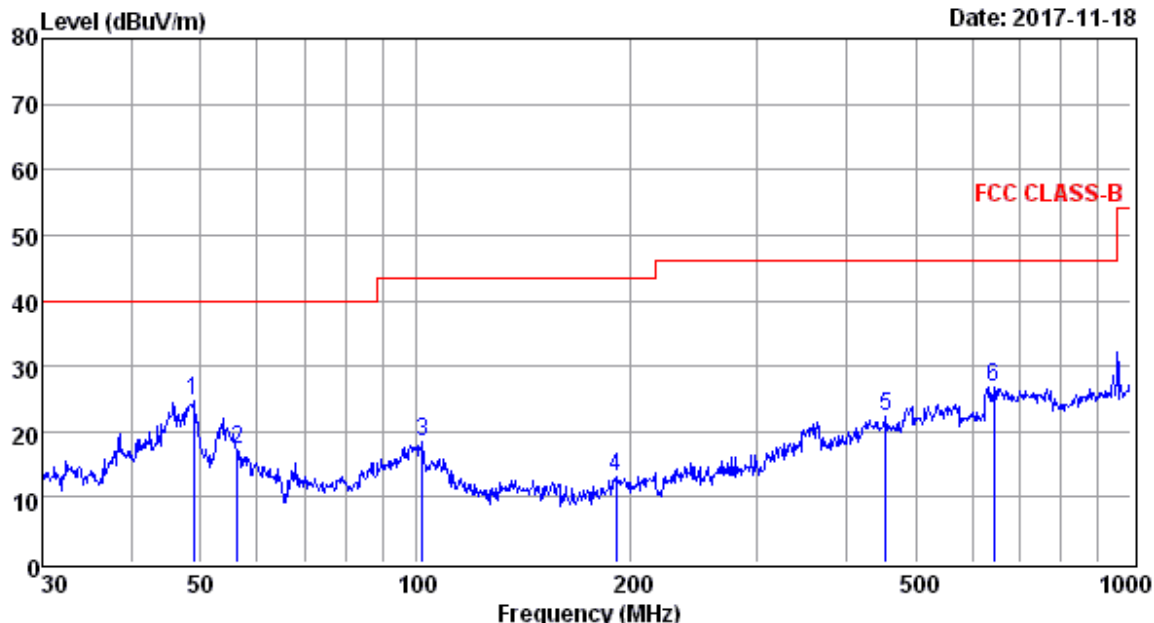

Env./Ins: 24°C/56%  
 EUT:  
 M/N:  
 Power Rating: DC  
 Test Mode: On  
 Operator: WC.WANG  
 Memo:  
 pol: HORIZONTAL

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 48.84  | 11.00   | 0.35   | 13.32  | 24.67    | 40.00  | -15.33 | QP     |
| 2 | 56.20  | 3.80    | 0.47   | 12.94  | 17.21    | 40.00  | -22.79 | QP     |
| 3 | 102.00 | 4.89    | 0.60   | 12.98  | 18.47    | 43.50  | -25.03 | QP     |
| 4 | 190.41 | 1.62    | 0.86   | 10.56  | 13.04    | 43.50  | -30.46 | QP     |
| 5 | 454.31 | 5.40    | 1.39   | 15.58  | 22.37    | 46.00  | -23.63 | QP     |
| 6 | 642.86 | 6.64    | 1.55   | 18.60  | 26.79    | 46.00  | -19.21 | QP     |

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that at 20db blow the official limit are not reported

## Vertical


Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: 0755-82591330 E-mail: webmaster@LCS-cert.com  
 Fax: 0755-82591332 Http: www.LCS-cert.com



Data: 416

File: E:\2017 Test Report\WC.EM6 (417)

Date: 2017-11-18

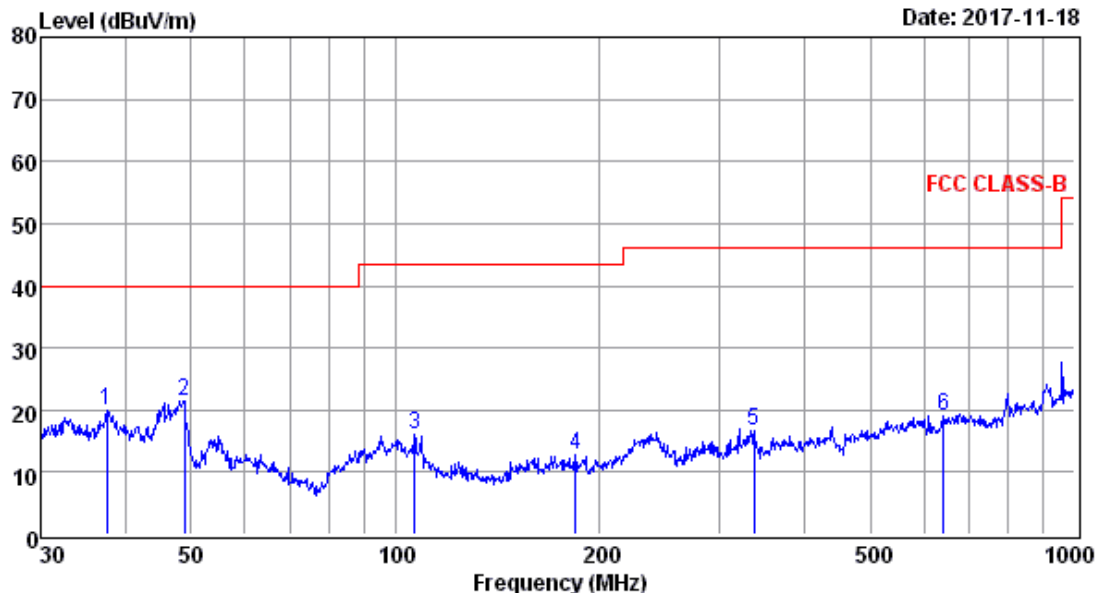

Env./Ins: 24°C/56%  
 EUT:  
 M/N:  
 Power Rating: DC  
 Test Mode: On  
 Operator: WC.WANG  
 Memo:  
 pol: VERTICAL

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 37.55  | 6.69    | 0.38   | 12.95  | 20.02    | 40.00  | -19.98 | QP     |
| 2 | 48.84  | 7.86    | 0.35   | 13.32  | 21.53    | 40.00  | -18.47 | QP     |
| 3 | 106.76 | 2.96    | 0.68   | 12.54  | 16.18    | 43.50  | -27.32 | QP     |
| 4 | 183.84 | 1.99    | 0.70   | 10.02  | 12.71    | 43.50  | -30.79 | QP     |
| 5 | 337.22 | 1.50    | 1.09   | 14.01  | 16.60    | 46.00  | -29.40 | QP     |
| 6 | 640.61 | -1.02   | 1.55   | 18.60  | 19.13    | 46.00  | -26.87 | QP     |

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the official limit are not reported



**For 1GHz to 25GHz**

| Frequency(MHz):    |                               |    | 2405              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 4810.00            | 52.16                         | PK | 74.00             | 21.84          | 47.65                  | 33.49                       | 6.91                    | 35.89                     | 4.51                           |
| 4810.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 5126.50            | 43.28                         | PK | 74.00             | 30.72          | 36.07                  | 34.38                       | 7.10                    | 34.27                     | 7.21                           |
| 5126.50            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 7215.00            | 47.65                         | PK | 74.00             | 26.35          | 36.55                  | 36.95                       | 9.18                    | 35.03                     | 11.10                          |
| 7215.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2405              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 4810.00            | 52.32                         | PK | 74.00             | 21.68          | 47.81                  | 33.49                       | 6.91                    | 35.89                     | 4.51                           |
| 4810.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 5126.50            | 44.71                         | PK | 74.00             | 29.29          | 37.15                  | 34.69                       | 7.23                    | 34.36                     | 7.56                           |
| 5126.50            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 7215.00            | 47.82                         | PK | 74.00             | 26.18          | 36.72                  | 36.95                       | 9.18                    | 35.03                     | 11.10                          |
| 7215.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2440              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 4880.00            | 51.62                         | PK | 74.00             | 22.38          | 45.37                  | 33.60                       | 6.95                    | 34.30                     | 6.25                           |
| 4880.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 5238.75            | 45.11                         | PK | 74.00             | 28.89          | 37.48                  | 34.57                       | 7.16                    | 34.10                     | 7.63                           |
| 5238.75            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 7320.00            | 48.04                         | PK | 74.00             | 25.96          | 36.35                  | 37.46                       | 9.23                    | 35.00                     | 11.69                          |
| 7320.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2440              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 4880.00            | 50.74                         | PK | 74.00             | 23.26          | 44.49                  | 33.60                       | 6.95                    | 34.30                     | 6.25                           |
| 4880.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 5238.75            | 44.52                         | PK | 74.00             | 29.48          | 36.88                  | 34.58                       | 7.16                    | 34.10                     | 7.64                           |
| 5238.75            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 7320.00            | 47.47                         | PK | 74.00             | 26.53          | 35.78                  | 37.46                       | 9.23                    | 35.00                     | 11.69                          |
| 7320.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2480              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 4960.00            | 51.49                         | PK | 74.00             | 22.51          | 46.57                  | 33.84                       | 7.00                    | 35.92                     | 4.92                           |
| 4960.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 5320.50            | 43.28                         | PK | 74.00             | 30.72          | 35.74                  | 34.67                       | 7.22                    | 34.35                     | 7.54                           |
| 5320.50            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 7440.00            | 47.61                         | PK | 74.00             | 26.39          | 35.66                  | 37.64                       | 9.28                    | 34.97                     | 11.95                          |
| 7440.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2480              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 4960.00            | 50.74                         | PK | 74.00             | 23.26          | 45.82                  | 33.84                       | 7.00                    | 35.92                     | 4.92                           |
| 4960.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 5320.50            | 44.06                         | PK | 74.00             | 29.94          | 36.87                  | 34.36                       | 7.10                    | 34.27                     | 7.19                           |
| 5320.50            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 7440.00            | 48.12                         | PK | 74.00             | 25.88          | 36.17                  | 37.64                       | 9.28                    | 34.97                     | 11.95                          |
| 7440.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW 1MHz VBW 3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

**Results of Band Edges Test (Radiated)**

| Frequency(MHz):    |                               |    | 2405              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2405.00            | 99.04                         | PK | --                | --             | 65.65                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2405.00            | 92.45                         | AV | --                | --             | 59.06                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2348.75            | 43.08                         | PK | 74.00             | 30.92          | 10.00                  | 28.52                       | 4.56                    | 0.00                      | 33.08                          |
| 2348.75            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 2390.00            | 48.74                         | PK | 74.00             | 25.26          | 15.42                  | 28.72                       | 4.60                    | 0.00                      | 33.32                          |
| 2390.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 2400.00            | 49.21                         | PK | 74.00             | 24.79          | 15.82                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2400.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2405              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2405.00            | 100.18                        | PK | --                | --             | 66.79                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2405.00            | 92.71                         | AV | --                | --             | 59.32                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2348.75            | 43.64                         | PK | 74                | 30.36          | 10.56                  | 28.52                       | 4.56                    | 0.00                      | 33.08                          |
| 2348.75            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2390.00            | 47.27                         | PK | 74                | 26.73          | 13.95                  | 28.72                       | 4.60                    | 0.00                      | 33.32                          |
| 2390.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2400.00            | 50.02                         | PK | 74                | 23.98          | 16.63                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2400.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2480              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2480.00            | 99.27                         | PK | --                | --             | 65.65                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2480.00            | 91.05                         | AV | --                | --             | 57.43                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2483.50            | 43.69                         | PK | 74                | 30.31          | 10.06                  | 28.93                       | 4.70                    | 0.00                      | 33.63                          |
| 2483.50            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2491.25            | 42.81                         | PK | 74                | 31.19          | 9.15                   | 28.95                       | 4.71                    | 0.00                      | 33.66                          |
| 2491.25            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2500.00            | 43.08                         | PK | 74                | 30.92          | 9.4                    | 28.96                       | 4.72                    | 0.00                      | 33.68                          |
| 2500.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2480              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2480.00            | 100.24                        | PK | --                | --             | 66.62                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2480.00            | 92.02                         | AV | --                | --             | 58.4                   | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2483.50            | 43.48                         | PK | 74                | 30.52          | 9.85                   | 28.93                       | 4.70                    | 0.00                      | 33.63                          |
| 2483.50            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2489.05            | 43.15                         | PK | 74                | 30.85          | 9.49                   | 28.95                       | 4.71                    | 0.00                      | 33.66                          |
| 2489.05            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2500.00            | 42.27                         | PK | 74                | 31.73          | 8.59                   | 28.96                       | 4.72                    | 0.00                      | 33.68                          |
| 2500.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW 1MHz VBW 3MHz Peak detector is for PK value; RBW 1MHz VBW 10Hz Peak detector is for AV value.

### 3.3. Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power meter .

#### Test Configuration



#### Test Results

| Type         | Channel | Output power (dBm) | Limit (dBm) | Result |
|--------------|---------|--------------------|-------------|--------|
| OQPSK (DSSS) | 11      | 6.445              | 30.00       | Pass   |
|              | 18      | 6.839              |             |        |
|              | 26      | 6.180              |             |        |

Note: 1.The test results including the cable lose.

### 3.4. Power Spectral Density


#### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.


#### Test Configuration



#### Test Results

| Type         | Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|--------------|---------|-----------------------------------|------------------|--------|
| OQPSK (DSSS) | 11      | -6.359                            | 8.00             | Pass   |
|              | 18      | -7.039                            |                  |        |
|              | 26      | -8.827                            |                  |        |

Test plot as follows:

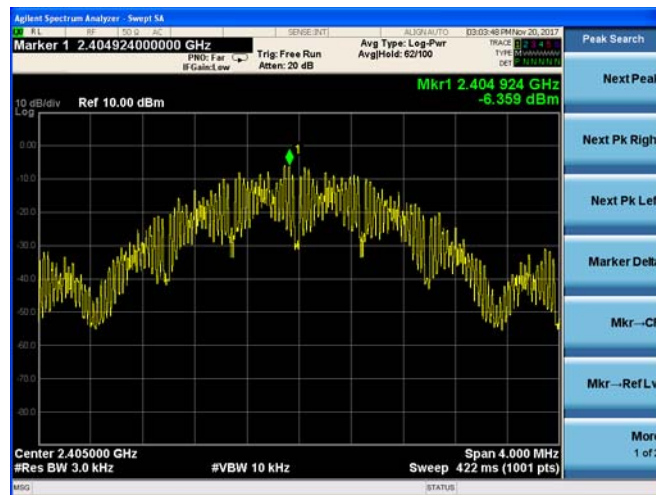

CH11



CH18



CH26

### 3.5. 6dB Bandwidth


#### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### Test Configuration




#### Test Results


| Type         | Channel | 6dB Bandwidth (MHz) | 99% OBW (MHz) | Limit (KHz) | Result |
|--------------|---------|---------------------|---------------|-------------|--------|
| OQPSK (DSSS) | 11      | 1.286               | 2.2020        | ≥500        | Pass   |
|              | 18      | 1.583               | 2.3407        |             |        |
|              | 26      | 1.573               | 2.3760        |             |        |

Test plot as follows:




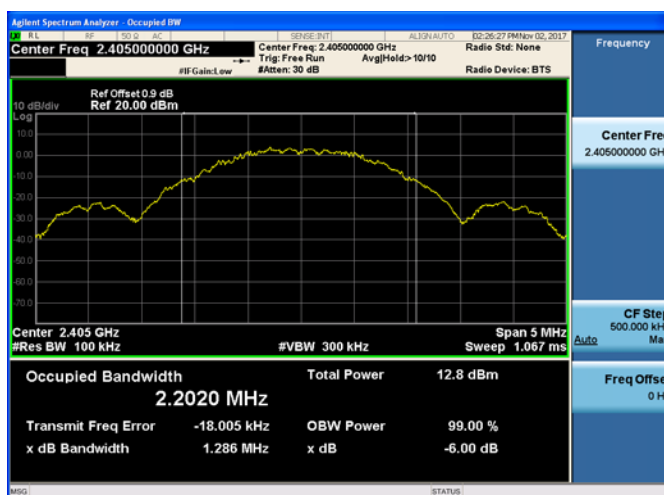

CH11

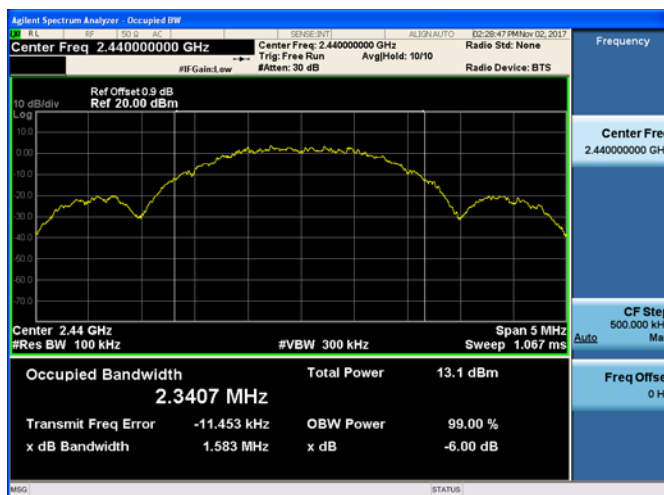

CH18

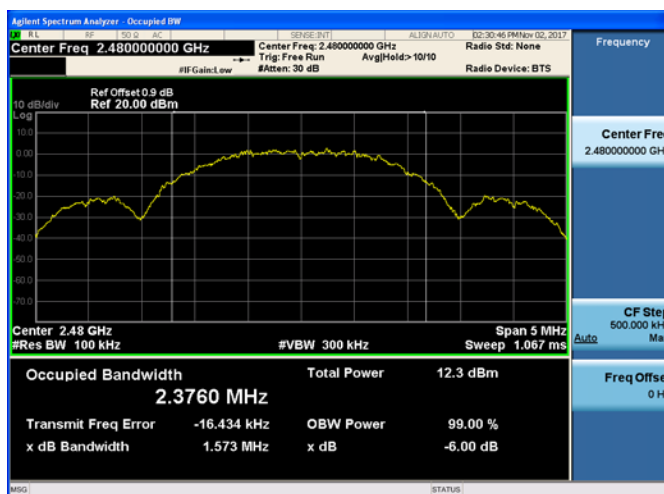

CH26

### 3.6. Out-of-band Emissions


#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.


#### Test Configuration




#### Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


Test plot as follows:

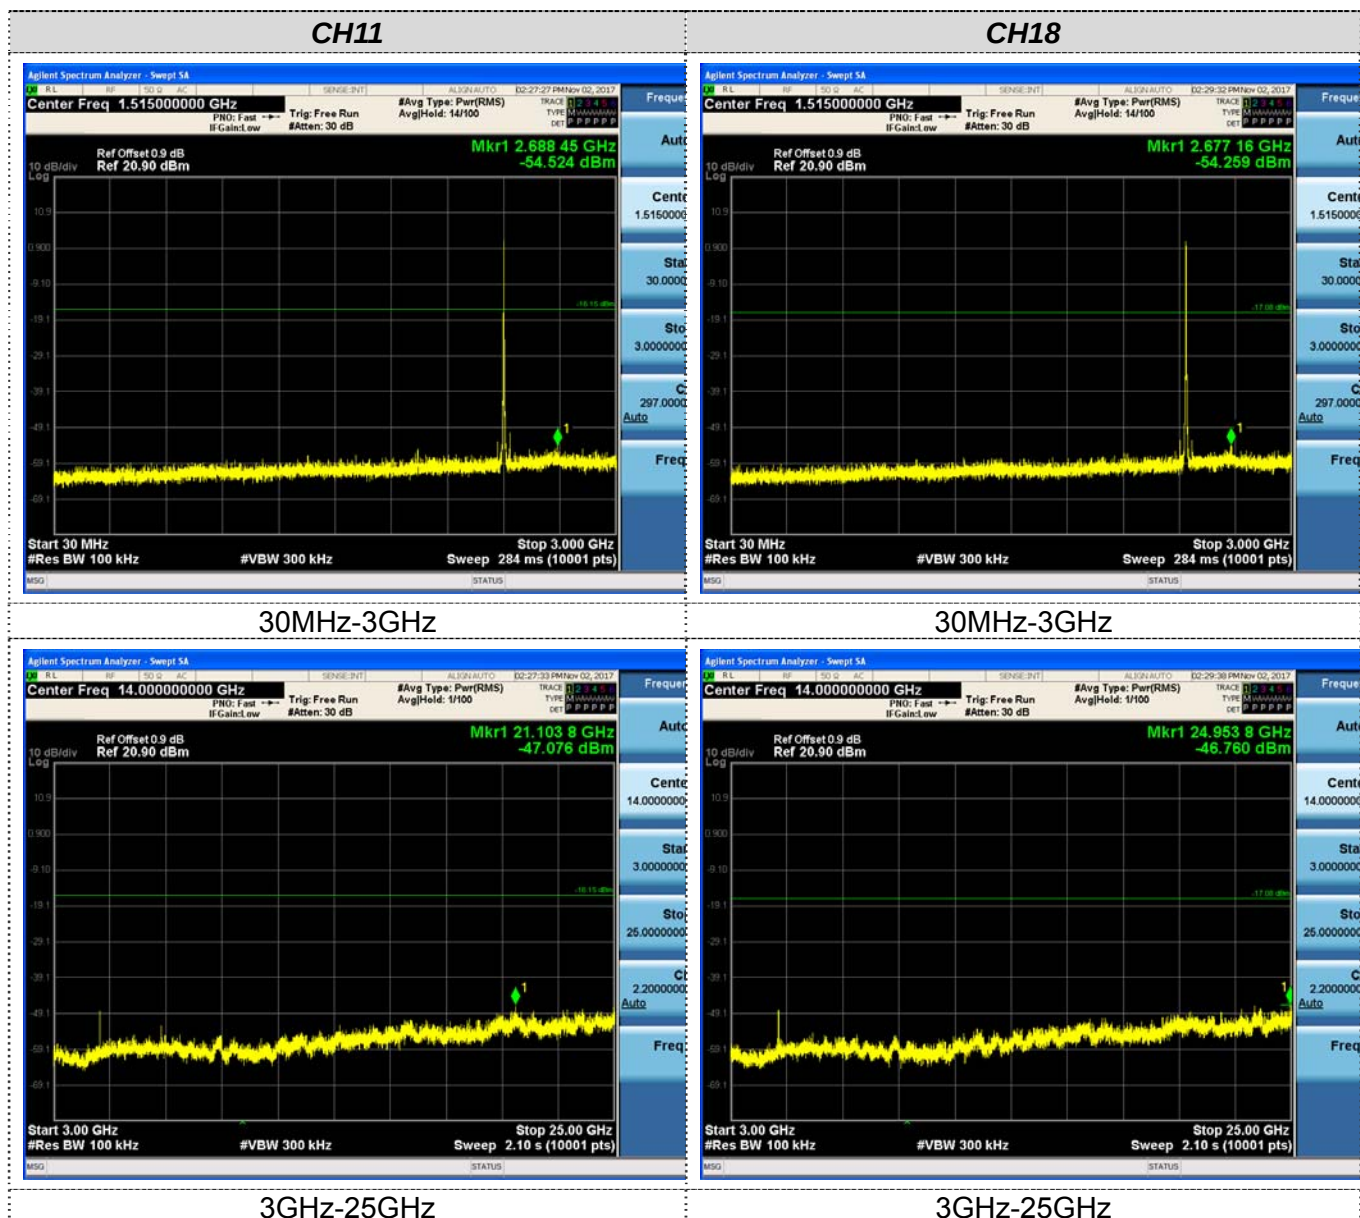

## CH26

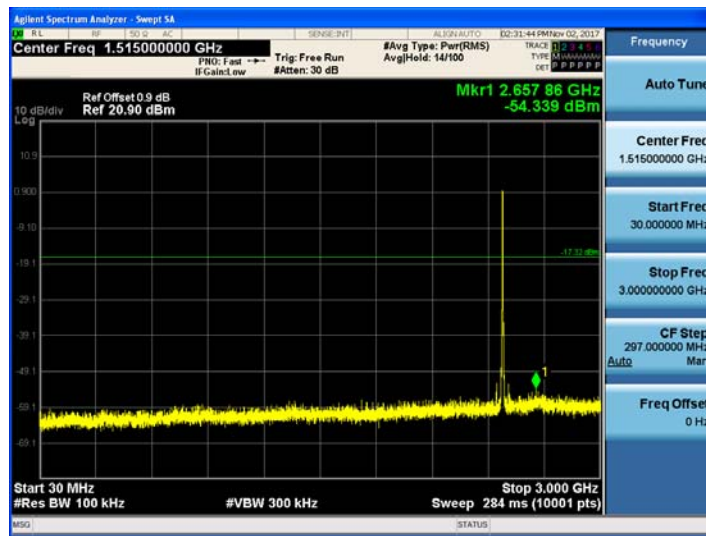

30MHz-3GHz

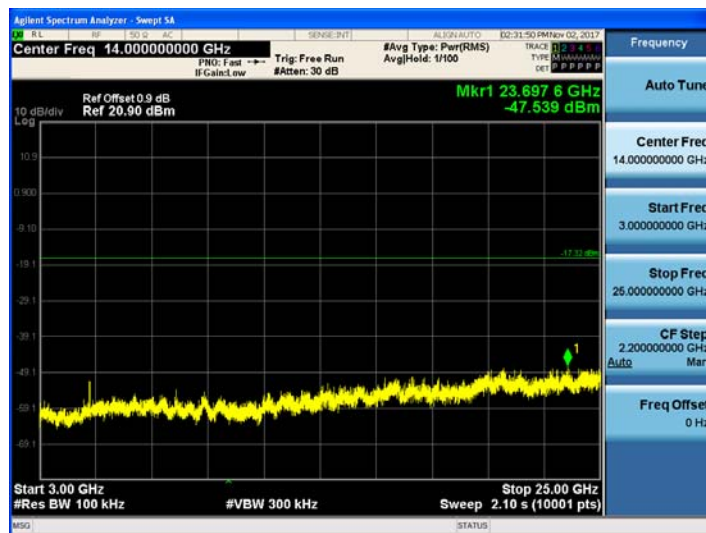

3GHz-25GHz

**Band-edge Measurements for RF Conducted Emissions:**



### 3.7. Antenna Requirement

#### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### Antenna Connected Construction

The maximum gain of antenna was 0dBi.



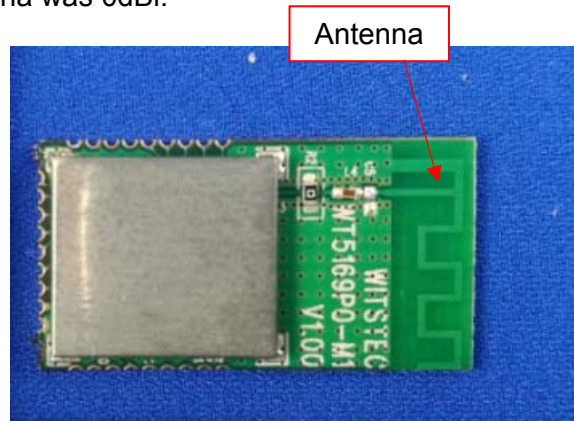




## **4. Test Setup Photos of the EUT**



## 5. Photos of the EUT

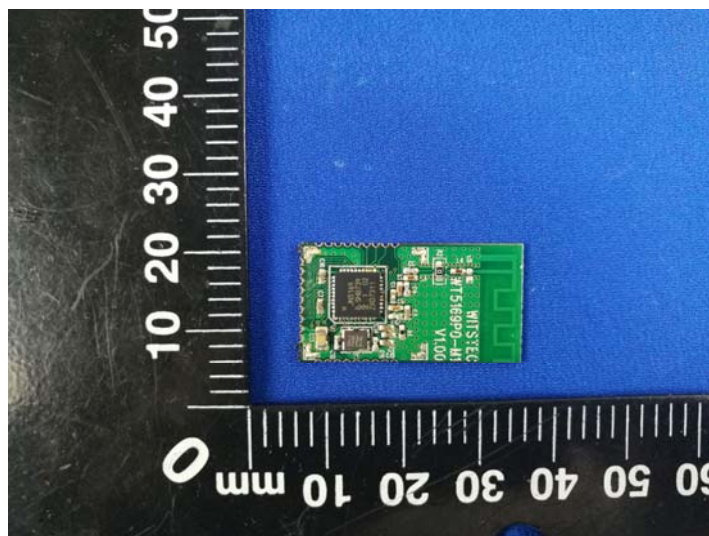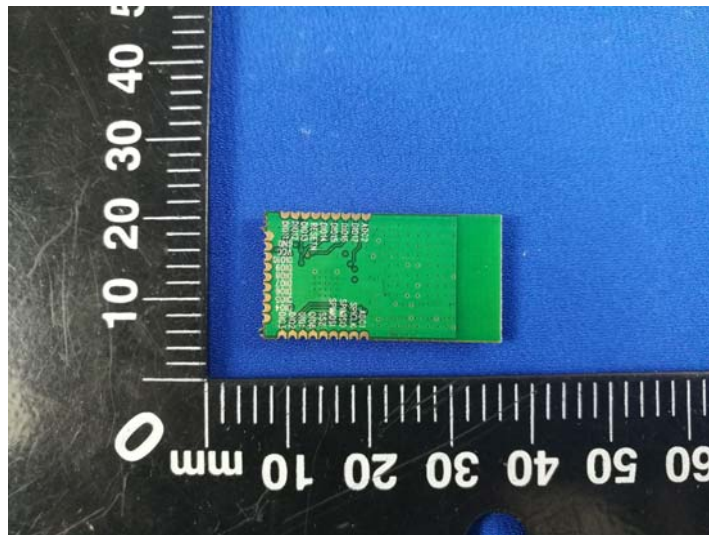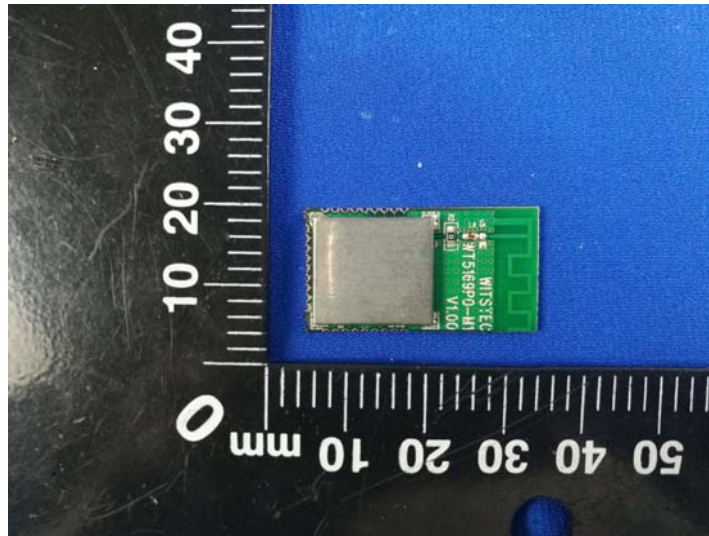

\*\*\*\*\* End of Report \*\*\*\*\*