



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



# TEST REPORT

**Applicant:** IZZO GOLF, INC.

**Address:** 1635 Commons Parkway, Macedon, NY 14502, USA

**FCC ID:** 2AOFL-LCH-MSTR

**Product Name:** Launch Monitor

**Standard(s):** 47 CFR Part 15, Subpart C(15.249)  
ANSI C63.10-2013

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230850482-00A

**Date Of Issue:** 2023/12/1

**Reviewed By:** Calvin Chen

**Title:** RF Engineer

**Approved By:** Sun Zhong

**Title:** Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

**Test Facility**

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

**Declarations**

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                              | <b>4</b>  |
| <b>1. GENERAL INFORMATION .....</b>                                 | <b>5</b>  |
| <b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b> | <b>5</b>  |
| <b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>                   | <b>6</b>  |
| 1.2.1 EUT Operation Condition:.....                                 | 6         |
| 1.2.2 Support Equipment List and Details .....                      | 6         |
| 1.2.3 Support Cable List and Details .....                          | 6         |
| 1.2.4 Block Diagram of Test Setup.....                              | 6         |
| <b>1.3 MEASUREMENT UNCERTAINTY .....</b>                            | <b>7</b>  |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                             | <b>8</b>  |
| <b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>                    | <b>9</b>  |
| <b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>                         | <b>9</b>  |
| 3.1.1 Applicable Standard.....                                      | 9         |
| 3.1.2 EUT Setup.....                                                | 10        |
| 3.1.3 EMI Test Receiver Setup .....                                 | 10        |
| 3.1.4 Test Procedure .....                                          | 11        |
| 3.1.5 Corrected Amplitude & Margin Calculation.....                 | 11        |
| <b>3.2 RADIATED EMISSIONS .....</b>                                 | <b>12</b> |
| 3.2.1 Applicable Standard.....                                      | 12        |
| 3.2.2 EUT Setup.....                                                | 12        |
| 3.2.3 FAR Field Boundary Calculations .....                         | 14        |
| 3.2.4 EMI Test Receiver & Spectrum Analyzer Setup .....             | 14        |
| 3.2.5 Test Procedure .....                                          | 15        |
| 3.2.6 Corrected Amplitude & Margin Calculation.....                 | 15        |
| <b>3.3 20 dB EMISSION BANDWIDTH .....</b>                           | <b>16</b> |
| 3.3.1 Applicable Standard.....                                      | 16        |
| 3.3.2 EUT Setup.....                                                | 16        |
| 3.3.3 Test Procedure .....                                          | 16        |
| <b>3.4 ANTENNA REQUIREMENT.....</b>                                 | <b>17</b> |
| 3.4.1 Applicable Standard.....                                      | 17        |
| 3.4.2 Judgment.....                                                 | 17        |
| <b>4. Test DATA AND RESULTS .....</b>                               | <b>18</b> |
| <b>4.1 AC LINE CONDUCTED EMISSIONS.....</b>                         | <b>18</b> |
| <b>4.2 RADIATION SPURIOUS EMISSIONS .....</b>                       | <b>19</b> |
| <b>4.3 20 dB EMISSION BANDWIDTH: .....</b>                          | <b>30</b> |
| <b>5. RF EXPOSURE EVALUATION .....</b>                              | <b>32</b> |
| <b>5.1.1 APPLICABLE STANDARD.....</b>                               | <b>32</b> |
| <b>6. EUT PHOTOGRAPHS .....</b>                                     | <b>33</b> |
| <b>7. TEST SETUP PHOTOGRAPHS .....</b>                              | <b>34</b> |

## DOCUMENT REVISION HISTORY

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 1.0             | CR230850482-00A | Original Report         | 2023/12/1        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|                             |                    |
|-----------------------------|--------------------|
| <b>EUT Name:</b>            | Launch Monitor     |
| <b>EUT Model:</b>           | Lanuch Master      |
| <b>Operation Frequency:</b> | 24070 MHz          |
| <b>Modulation Type:</b>     | CW                 |
| <b>Rated Input Voltage:</b> | DC 6V From Battery |
| <b>Serial Number:</b>       | 2AJ8-1             |
| <b>EUT Received Date:</b>   | 2023/9/1           |
| <b>EUT Received Status:</b> | Good               |

#### Antenna Information Detail▲:

| Antenna Type                                                                                                                                                                                                                                                                                                                                                                        | input impedance (Ohm) | Frequency Range | Antenna Gain |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------|--------------|
| PCB                                                                                                                                                                                                                                                                                                                                                                                 | 50                    | 24~24.25GHz     | 6dBi         |
| The Method of §15.203 Compliance:<br><input checked="" type="checkbox"/> Antenna was permanently attached to the unit.<br><input type="checkbox"/> Antenna use a unique type of connector to attach to the EUT.<br><input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. |                       |                 |              |

#### Accessory Information:

No Accessory.

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

|                                                                                                        |                                                                                                    |
|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| <b>EUT Operation Mode:</b>                                                                             | The system was configured for testing in Engineering Mode, which was provided by the manufacturer. |
| <b>Equipment Modifications:</b>                                                                        | No                                                                                                 |
| <b>EUT Exercise Software:</b>                                                                          | No                                                                                                 |
| The engineering mode was provided by manufacturer ▲. The maximum power was configured default setting. |                                                                                                    |

### 1.2.2 Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

### 1.2.3 Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-----------|----|
| /                 | /              | /            | /          | /         | /  |

### 1.2.4 Block Diagram of Test Setup

Spurious emissions:

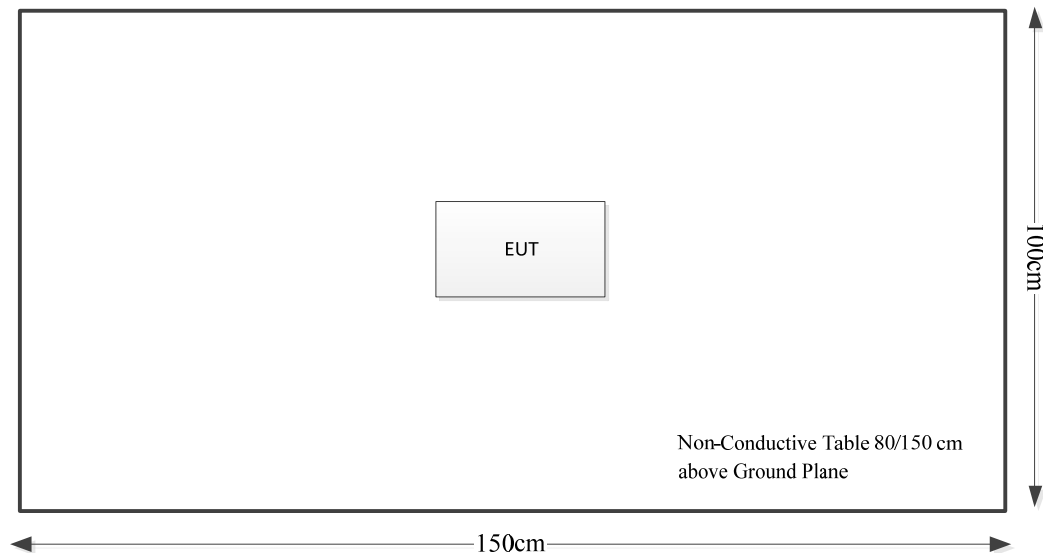

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | $\pm 5\%$                                                                                                                                       |
| Unwanted Emissions, radiated      | 9kHz~30MHz: 4.12 dB,<br>30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB,<br>6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Temperature                       | $\pm 1^{\circ}\text{C}$                                                                                                                         |
| Humidity                          | $\pm 5\%$                                                                                                                                       |
| DC and low frequency voltages     | $\pm 0.4\%$                                                                                                                                     |
| Duty Cycle                        | 1%                                                                                                                                              |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz)                                                                                                                      |

## 2. SUMMARY OF TEST RESULTS

| Standard(s)/Rule(s)      | Description of Test    | Result         |
|--------------------------|------------------------|----------------|
| §15.203                  | Antenna Requirement    | Compliant      |
| §15.207(a)               | Conduction Emissions   | Not Applicable |
| 15.205, §15.209, §15.249 | Radiated Emissions     | Compliant      |
| §15.215 (c)              | 20 dB Bandwidth        | Compliant      |
| §1.1307                  | RF Exposure Evaluation | Compliant      |

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

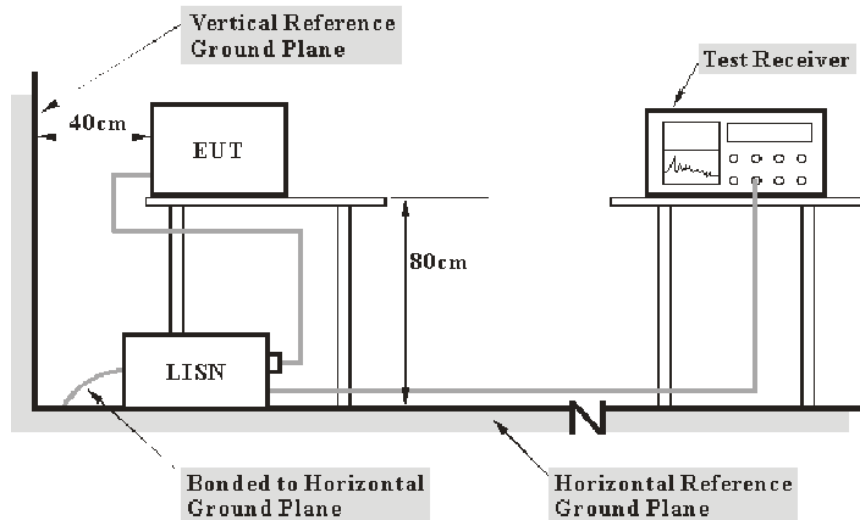

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### 3.1.4 Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiated Emissions

### 3.2.1 Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902–928 MHz           | 50                                               | 500                                            |
| 2400–2483.5 MHz       | 50                                               | 500                                            |
| 5725–5875 MHz         | 50                                               | 500                                            |
| 24.0–24.25 GHz        | 250                                              | 2500                                           |




As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 3.2.2 EUT Setup

9kHz-30MHz:

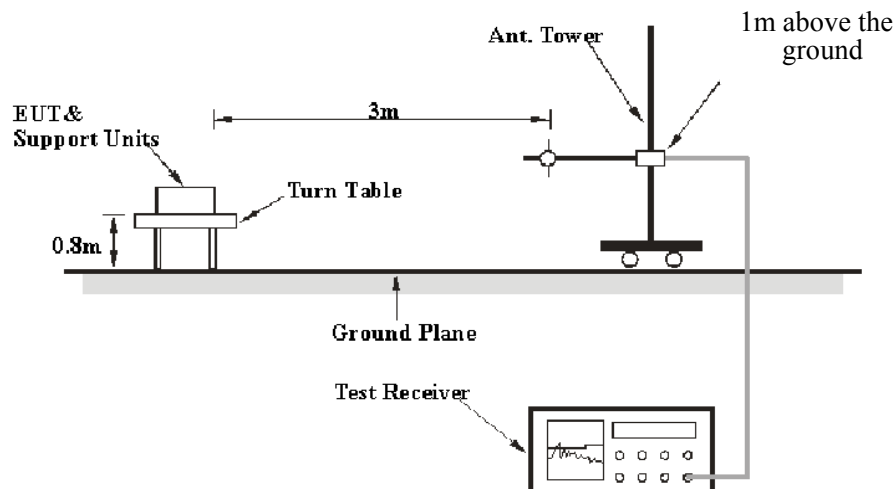

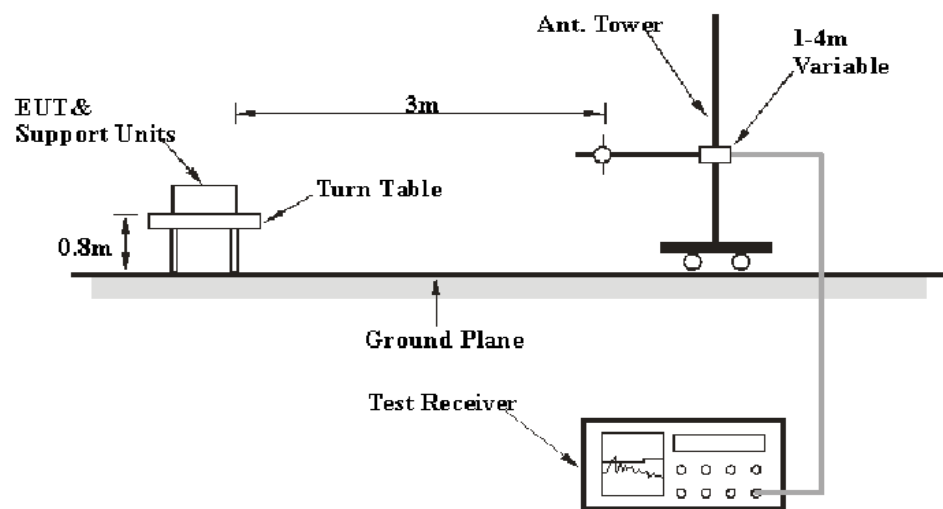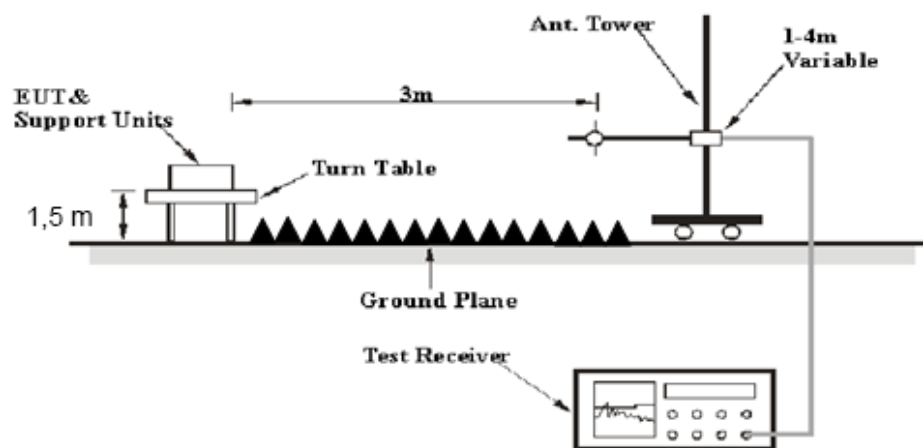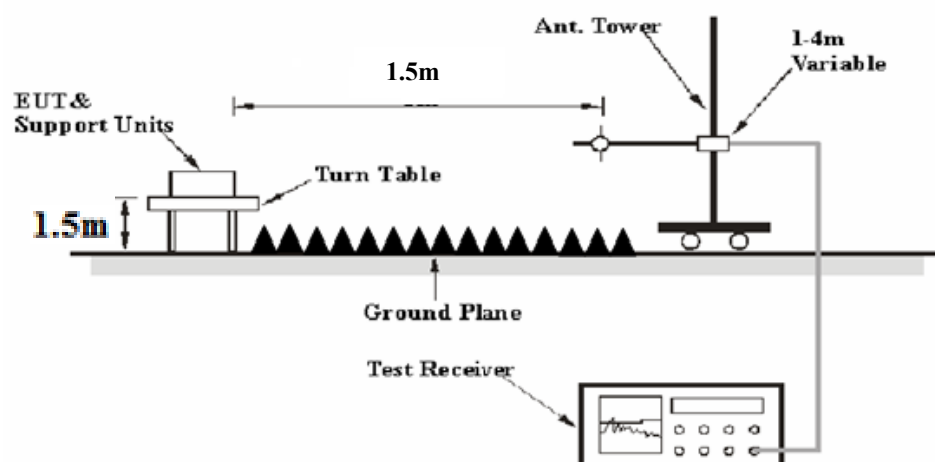**30MHz-1GHz:****1-26.5 GHz:****26.5-40 GHz:**

Above 40GHz:

The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 100 GHz.

The radiated emissions were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.249 limits.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

### 3.2.3 FAR Field Boundary Calculations

The far-field boundary is given in ANSI C63.10-2013:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

$\lambda$  is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-100GHz determine as below:

| Model | Frequency Range (GHz) | Largest Dimension of the Horn Antenna (mm) | Minimum Test Distance $R_m$ (m) |
|-------|-----------------------|--------------------------------------------|---------------------------------|
| M19RH | 40-60                 | 46.3                                       | 0.57                            |
| M12RH | 60-90                 | 30.02                                      | 0.36                            |
| M08RH | 90-140                | 19.7                                       | 0.23                            |

Note: The test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 100 GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

### 3.2.4 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 100 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 9 kHz – 150 kHz   | 300 Hz  | 1 kHz     | 200 Hz  | QP/AV       |
| 150 kHz – 30 MHz  | 10 kHz  | 30 kHz    | 9 kHz   | QP/AV       |
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK          |
|                   | 1MHz    | 10 Hz     | /       | AV          |

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

According to C63.10, the 26.5-40GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB = 6.02 dB.

The 40-90GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$  dB = 9.54 dB.

The 40-90GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 0.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [0.5m]})$  dB = 15.56 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.6 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

For 9kHz-26.5GHz:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For 26.5GHz-100GHz

Factor = Antenna Factor + Cable Loss - Amplifier Gain - Distance extrapolation Factor

For 40GHz-100GHz

Factor = Antenna Factor - Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


### 3.3 20 dB Emission Bandwidth

#### 3.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 3.3.2 EUT Setup

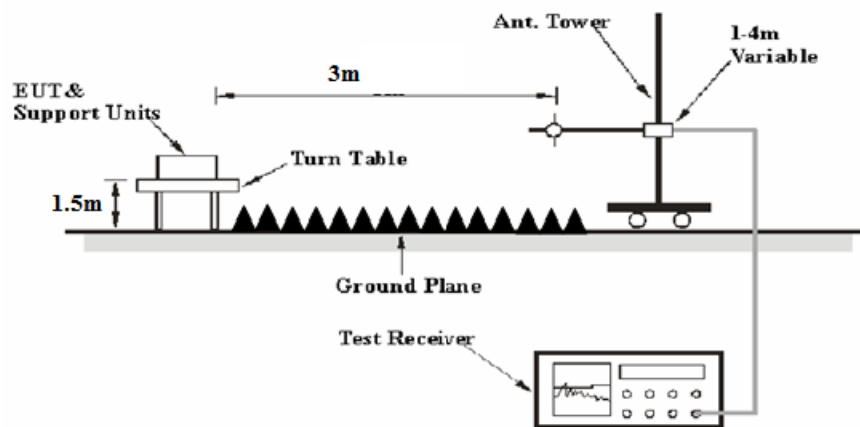

#### 3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, unless otherwise specified by the applicable requirement.
- Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### **3.4 Antenna Requirement**

#### **3.4.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

#### **3.4.2 Judgment**

Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

---

### 4.1 AC Line Conducted Emissions

**Not Applicable**, the device was powered by battery only.

## 4.2 Radiation Spurious Emissions

|                |                     |              |                                                |
|----------------|---------------------|--------------|------------------------------------------------|
| Serial Number: | 2AJ8-1              | Test Date:   | Below 1GHz: 2023/9/12<br>Above 1GHz: 2023/9/22 |
| Test Site:     | 966-2,966-1         | Test Mode:   | Transmitting                                   |
| Tester:        | Carl Xue, coco Tian | Test Result: | Pass                                           |

### Environmental Conditions:

|                      |           |                           |       |                        |           |
|----------------------|-----------|---------------------------|-------|------------------------|-----------|
| Temperature:<br>(°C) | 25.6~26.9 | Relative Humidity:<br>(%) | 61~64 | ATM Pressure:<br>(kPa) | 100~100.4 |
|----------------------|-----------|---------------------------|-------|------------------------|-----------|

### Test Equipment List and Details:

| Manufacturer    | Description          | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|----------------------|-----------------------|---------------|------------------|----------------------|
| Below 1GHz      |                      |                       |               |                  |                      |
| Sunol Sciences  | Antenna              | JB6                   | A082520-5     | 2020/10/19       | 2023/10/18           |
| EMCO            | Passive Loop Antenna | 6512                  | 9706-1209     | 2023/2/15        | 2026/2/14            |
| R&S             | EMI Test Receiver    | ESR3                  | 102724        | 2023/3/31        | 2024/3/30            |
| TIMES MICROWAVE | Coaxial Cable        | LMR-600-UltraFlex     | C-0470-02     | 2023/7/16        | 2024/7/15            |
| TIMES MICROWAVE | Coaxial Cable        | LMR-600-UltraFlex     | C-0780-01     | 2023/7/16        | 2024/7/15            |
| Sonoma          | Amplifier            | 310N                  | 186165        | 2023/7/16        | 2024/7/15            |
| Audix           | Test Software        | E3                    | 201021 (V9)   | N/A              | N/A                  |
| Above 1GHz      |                      |                       |               |                  |                      |
| ETS-Lindgren    | Horn Antenna         | 3115                  | 9912-5985     | 2020/10/13       | 2023/10/12           |
| R&S             | Spectrum Analyzer    | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX      | Coaxial Cable        | UFA210A-1-1200-70U300 | 217423-008    | 2023/8/6         | 2024/8/5             |
| MICRO-COAX      | Coaxial Cable        | UFA210A-1-2362-300300 | 235780-001    | 2023/8/6         | 2024/8/5             |
| Mini            | Pre-amplifier        | ZVA-183-S+            | 5969001149    | 2022/11/9        | 2023/11/8            |
| PASTERNAK       | Horn Antenna         | PE9852/2F-20          | 112002        | 2021/2/5         | 2024/2/4             |
| Quinstar        | Preamplifier         | QLW-18405536-JO       | 15964001005   | 2023/9/15        | 2024/9/14            |
| MICRO-COAX      | Coaxial Cable        | UFB142A-1-2362-200200 | 235772-001    | 2023/8/6         | 2024/8/5             |
| PASTERNAK       | Horn Antenna         | PE9850/2F-20          | 072001        | 2021/2/5         | 2024/2/4             |
| OML             | Harmonic Mixer       | WR19/M19HWD           | U60314-1      | 2020/10/16       | 2023/10/15           |
| OML             | Horn Antenna         | M19RH                 | 11648-03      | 2020/10/16       | 2023/10/15           |
| OML             | Harmonic Mixer       | WR12/M12HWD           | E60119-1      | 2020/10/17       | 2023/10/16           |
| OML             | Horn Antenna         | M12RH                 | E60119-2      | 2020/10/18       | 2023/10/17           |
| OML             | Harmonic Mixer       | WR08/M08HWD           | F60315-1      | 2020/10/22       | 2023/10/21           |
| OML             | Horn Antenna         | M08RH                 | F60315-2      | 2020/10/24       | 2023/10/23           |

|                                                                                                                                                                                                                    |               |    |             |     |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----|-------------|-----|-----|
| Audix                                                                                                                                                                                                              | Test Software | E3 | 201021 (V9) | N/A | N/A |
| <i>* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).</i> |               |    |             |     |     |

**Test Data:**


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

For 9kHz-30MHz, The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.


## 1) 30MHz-1GHz:

Project No.: CR230850482-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note:

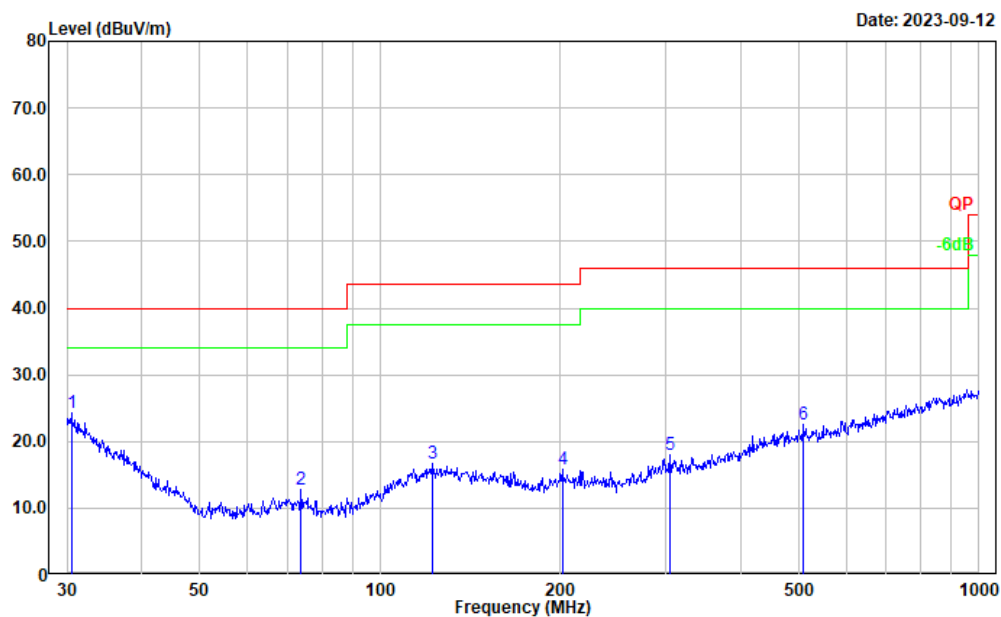

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.531             | 28.25             | -4.00            | 24.25              | 40.00             | 15.75          | Peak     |
| 2   | 73.876             | 29.70             | -16.88           | 12.82              | 40.00             | 27.18          | Peak     |
| 3   | 122.404            | 28.15             | -11.41           | 16.74              | 43.50             | 26.76          | Peak     |
| 4   | 201.393            | 28.16             | -12.25           | 15.91              | 43.50             | 27.59          | Peak     |
| 5   | 304.610            | 28.47             | -10.57           | 17.90              | 46.00             | 28.10          | Peak     |
| 6   | 510.044            | 28.40             | -5.81            | 22.59              | 46.00             | 23.41          | Peak     |

Project No.: CR230850482-RF  
Tester: Carl Xue  
Polarization: vertical  
Note:

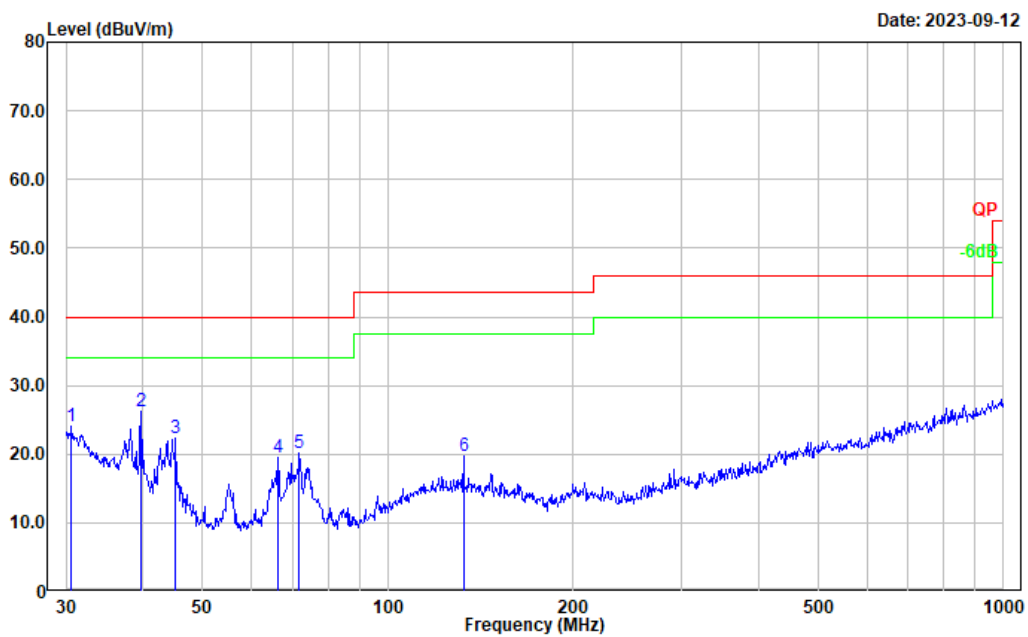

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.638             | 28.05             | -4.09            | 23.96              | 40.00             | 16.04          | Peak     |
| 2   | 39.715             | 37.30             | -11.09           | 26.21              | 40.00             | 13.79          | Peak     |
| 3   | 45.217             | 36.78             | -14.36           | 22.42              | 40.00             | 17.58          | Peak     |
| 4   | 66.266             | 36.31             | -16.84           | 19.47              | 40.00             | 20.53          | Peak     |
| 5   | 71.832             | 36.93             | -16.66           | 20.27              | 40.00             | 19.73          | Peak     |
| 6   | 132.685            | 31.11             | -11.48           | 19.63              | 43.50             | 23.87          | Peak     |


**2) 1-40GHz:**

| Frequency<br>(MHz) | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                    | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low channel        |                   |          |                | 24070            | MHz                |                   |                |
| 24070.000          | 99.45             | PK       | H              | 4.79             | 104.24             | 127.96            | 23.72          |
| 24070.000          | 97.65             | AV       | H              | 4.79             | 102.44             | 107.96            | 5.52           |
| 24070.000          | 91.64             | PK       | V              | 4.79             | 96.43              | 127.96            | 31.53          |
| 24070.000          | 89.82             | AV       | V              | 4.79             | 94.61              | 107.96            | 13.35          |
| 24000.000          | 51.34             | PK       | H              | 4.69             | 56.03              | 74.00             | 17.97          |
| 24000.000          | 38.45             | AV       | H              | 4.69             | 43.14              | 54.00             | 10.86          |
| 24250.000          | 51.08             | PK       | H              | 5.03             | 56.11              | 74.00             | 17.89          |
| 24250.000          | 38.27             | AV       | H              | 5.03             | 43.30              | 54.00             | 10.70          |

**40-100GHz:**


| Frequency<br>(GHz) | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                    | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low channel        |                   |          |                | 24.07            | GHz                |                   |                |
| 48.140             | 49.65             | PK       | H              | 30.52            | 80.17              | 87.96             | 7.79           |
| 48.140             | 36.42             | AV       | H              | 30.52            | 66.94              | 67.96             | 1.02           |
| 48.140             | 48.34             | PK       | V              | 30.52            | 78.86              | 87.96             | 9.10           |
| 48.140             | 35.29             | AV       | V              | 30.52            | 65.81              | 67.96             | 2.15           |
| 88.710             | 44.32             | PK       | H              | 35.41            | 79.73              | 87.96             | 8.23           |
| 88.710             | 31.24             | AV       | H              | 35.41            | 66.65              | 67.96             | 1.31           |
| 88.710             | 43.12             | PK       | V              | 35.41            | 78.53              | 87.96             | 9.43           |
| 88.710             | 30.06             | AV       | V              | 35.41            | 65.47              | 67.96             | 2.49           |
| 96.280             | 45.32             | PK       | H              | 30.32            | 75.64              | 87.96             | 12.32          |
| 96.280             | 32.25             | AV       | H              | 30.32            | 62.57              | 67.96             | 5.39           |
| 96.280             | 44.37             | PK       | V              | 30.32            | 74.69              | 87.96             | 13.27          |
| 96.280             | 31.53             | AV       | V              | 30.32            | 61.85              | 67.96             | 6.11           |

Test plots

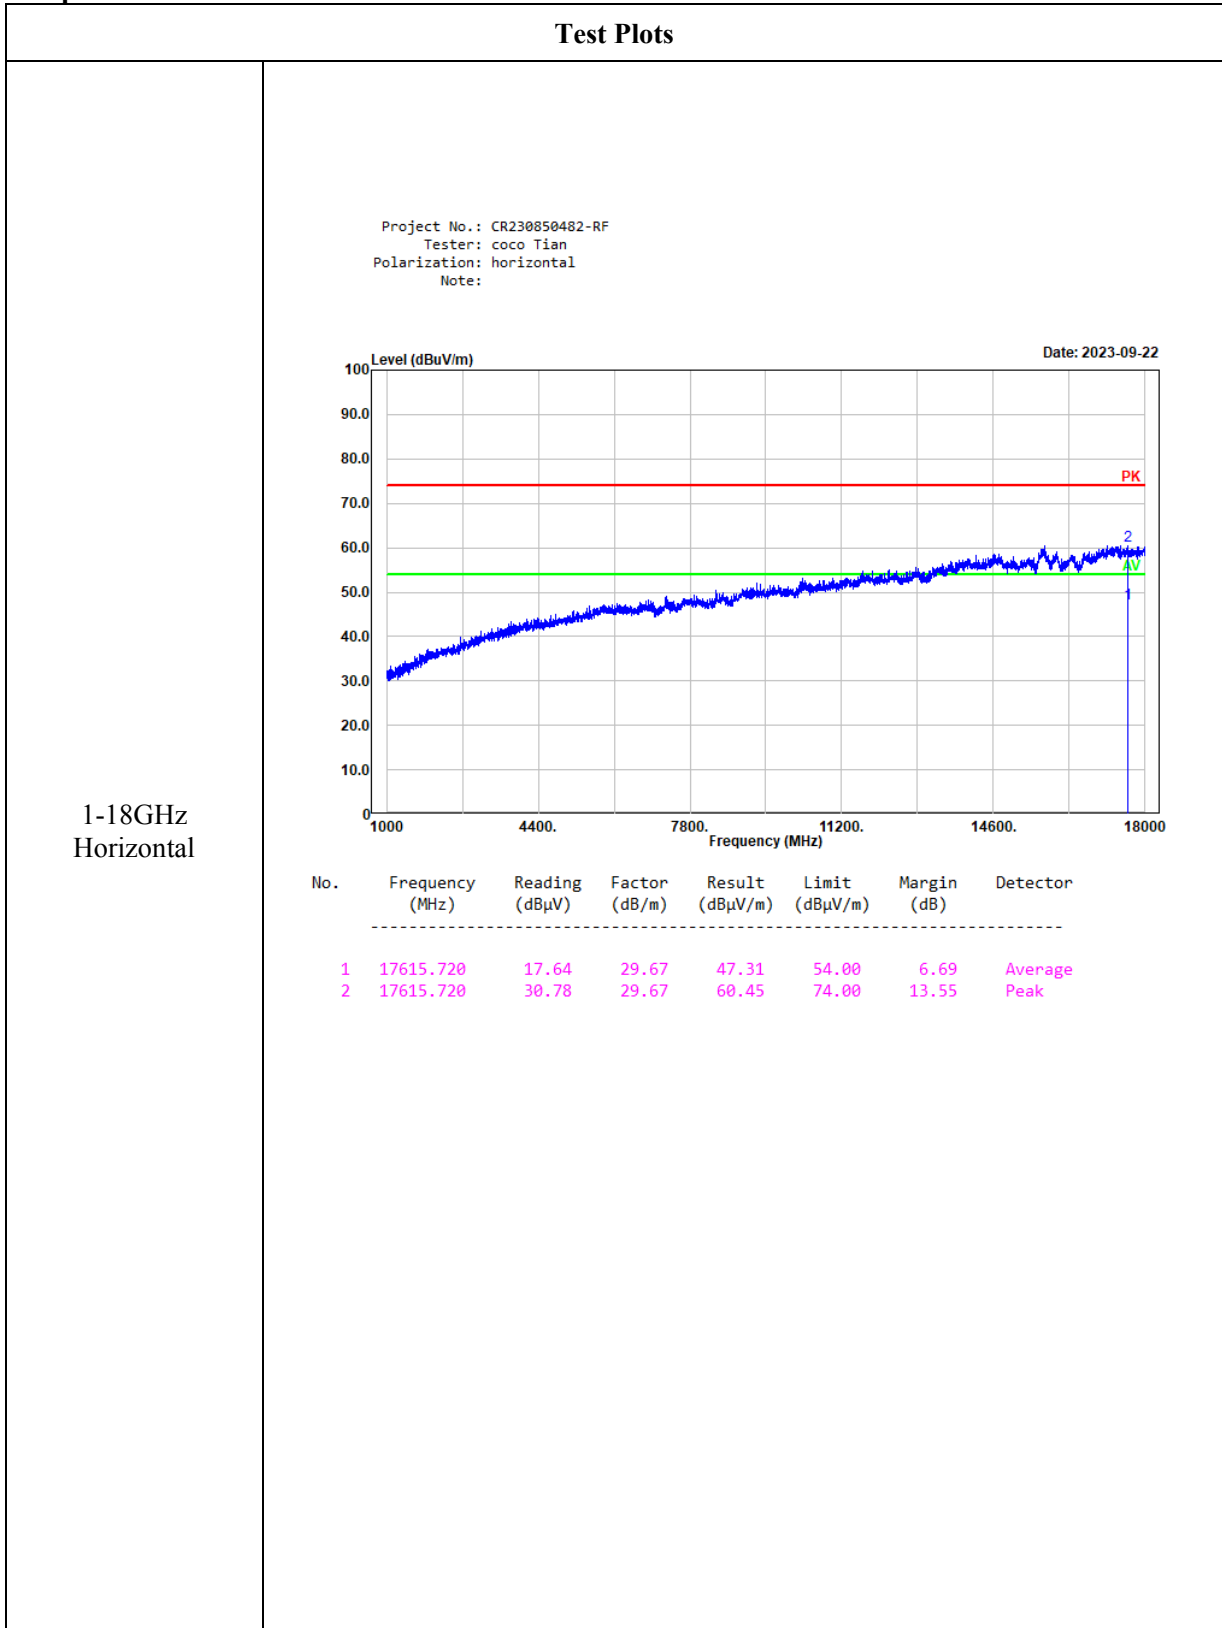

Test Plots

Project No.: CR230850482-RF  
Tester: coco Tian  
Polarization: horizontal  
Note:

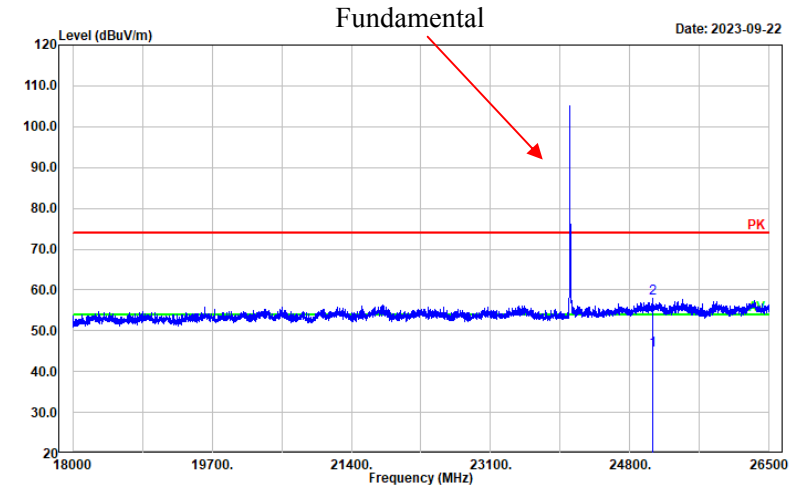


| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 25078.520       | 38.24          | 6.83          | 45.07           | 54.00          | 8.93        | Average  |
| 2   | 25078.520       | 51.20          | 6.83          | 58.03           | 74.00          | 15.97       | Peak     |

18-26.5GHz  
Horizontal

Test Plots


26.5-40GHz  
Horizontal

Project No.: CR230850482-RF  
Tester: coco Tian  
Polarization: horizontal  
Note:

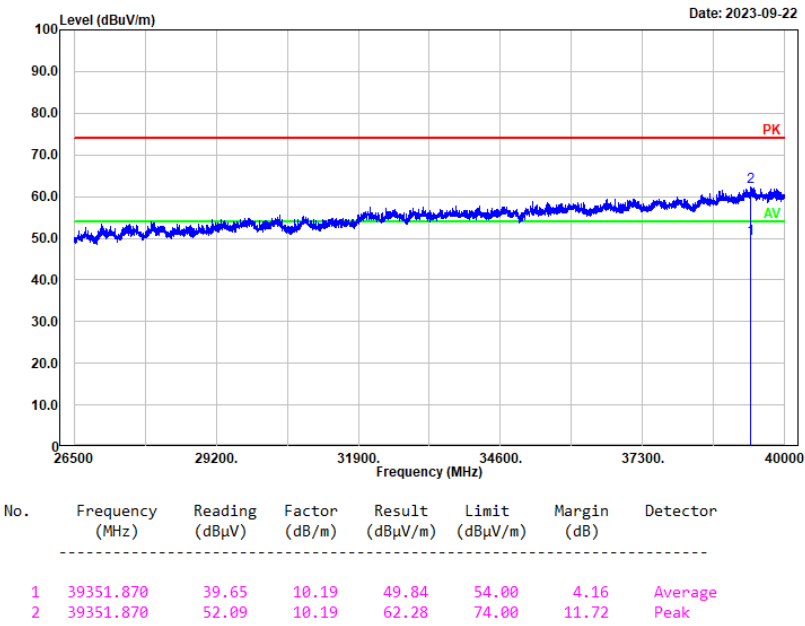


Test Plots

1-18GHz  
Vertical

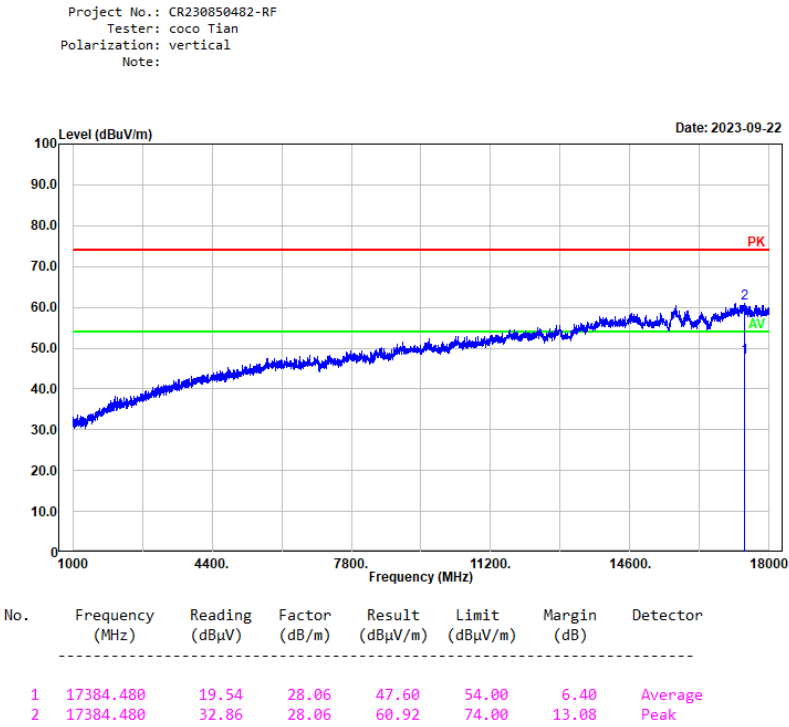

Test Plots

Project No.: CR230850482-RF  
Tester: coco Tian  
Polarization: vertical  
Note:

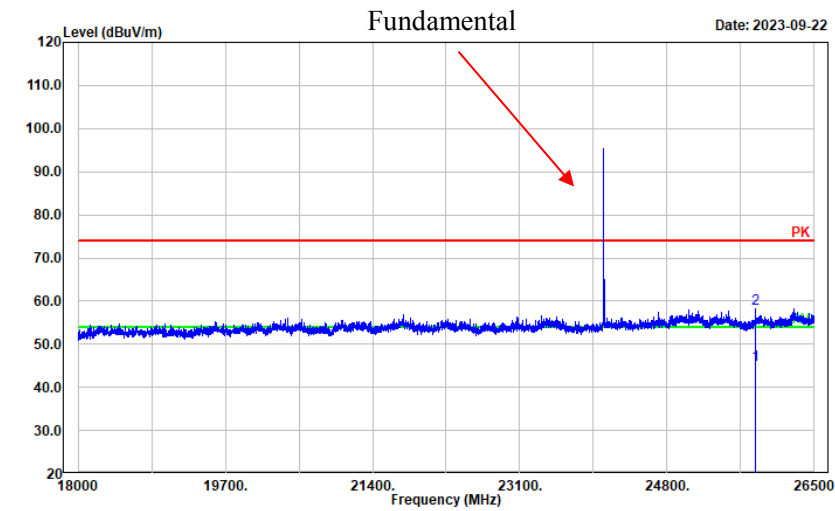


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 25818.160          | 39.01             | 6.30             | 45.31              | 54.00             | 8.69           | Average  |
| 2   | 25818.160          | 51.92             | 6.30             | 58.22              | 74.00             | 15.78          | Peak     |

18-26.5GHz  
Vertical

Test Plots

26.5-40GHz  
Vertical

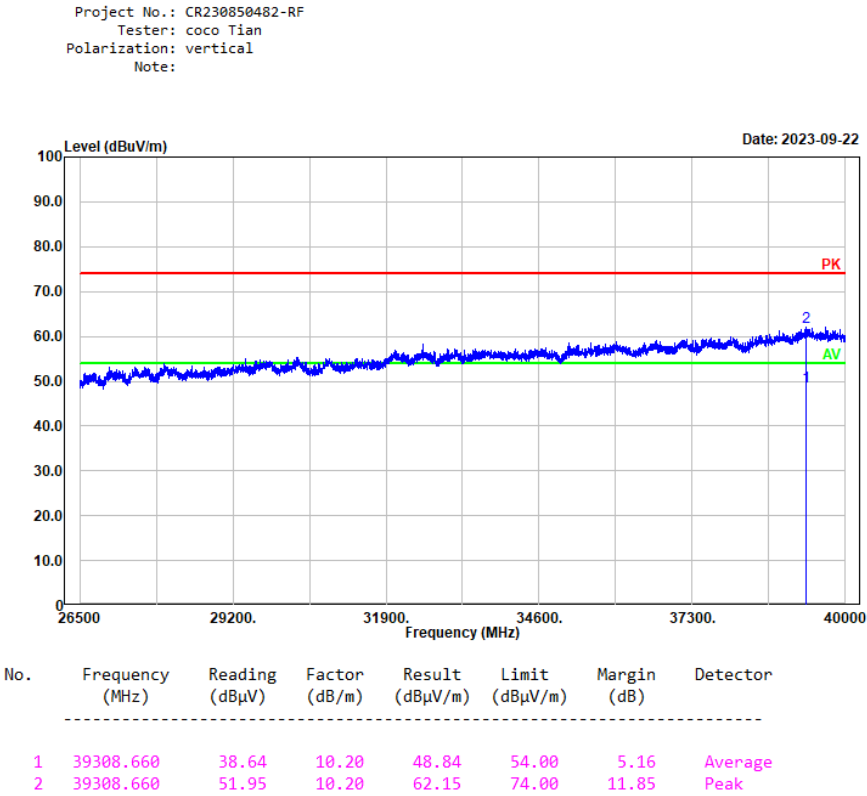

**4.3 20 dB Emission Bandwidth:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2AJ8-1    | Test Date:   | 2023/10/16   |
| Test Site:     | 966-1     | Test Mode:   | Transmitting |
| Tester:        | coco Tian | Test Result: | N/A          |

**Environmental Conditions:**

|                      |      |                           |    |                           |     |
|----------------------|------|---------------------------|----|---------------------------|-----|
| Temperature:<br>(°C) | 25.5 | Relative Humidity:<br>(%) | 65 | ATM<br>Pressure:<br>(kPa) | 101 |
|----------------------|------|---------------------------|----|---------------------------|-----|


**Test Equipment List and Details:**

| Manufacturer | Description       | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-----------------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| PASTERNAK    | Horn Antenna      | PE9852/2F-20          | 112002        | 2021/2/5         | 2024/2/4             |
| Quinstar     | Preamplifier      | QLW-18405536-JO       | 15964001005   | 2023/9/15        | 2024/9/14            |
| MICRO-COAX   | Coaxial Cable     | UFB142A-1-2362-200200 | 235772-001    | 2023/8/6         | 2024/8/5             |

*\* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

| Test Frequency<br>(MHz) | 20 dB Bandwidth<br>(kHz) |
|-------------------------|--------------------------|
| 24070                   | 167.9                    |

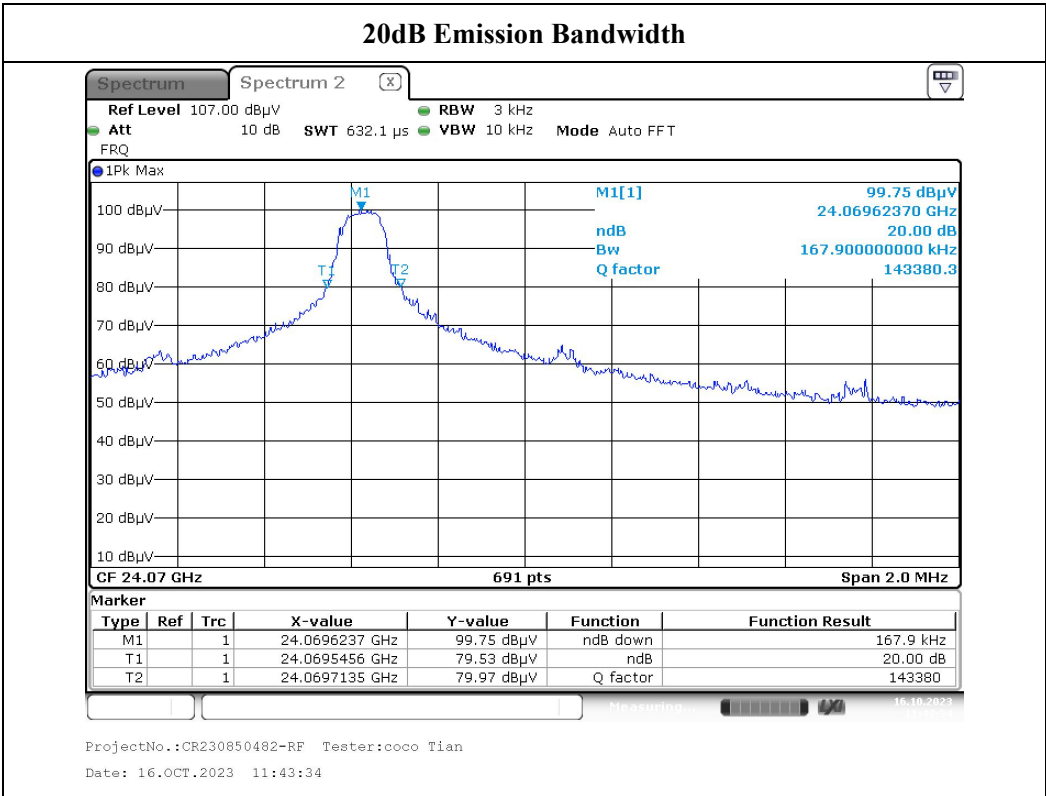

## 5. RF EXPOSURE EVALUATION

### 5.1.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

| RF Source frequency (MHz) | Threshold ERP (watts) |
|---------------------------|-----------------------|
| 0.3-1.34                  | $1,920 R^2$ .         |
| 1.34-30                   | $3,450 R^2/f^2$ .     |
| 30-300                    | $3.83 R^2$ .          |
| 300-1,500                 | $0.0128 R^2 f$ .      |
| 1,500-100,000             | $19.2 R^2$ .          |

### 5.1.2 Measurement Result

| Frequency (MHz) | $\lambda/2\pi$ (mm) | Distance (mm) | Exemption ERP |       | Maximum EIRP (dBm) | ERP (dBm) | MPE-Based Exemption |
|-----------------|---------------------|---------------|---------------|-------|--------------------|-----------|---------------------|
|                 |                     |               | (mW)          | (dBm) |                    |           |                     |
| 24070           | 19.80               | 200           | 768           | 28.85 | 9.04               | 6.89      | Compliant           |

Note:

1. This device maximum E-Field level is 104.24 dB $\mu$ V/m at 3m, so the EIRP power is 9.04 dBm,
2. EIRP(dBm)=Field Strength of Fundamental(dBuV/m)-95.2 (dB),
3. ERP= EIRP(dBm)- 2.15 (dB)

**Result: Compliant.** The device compliant the MPE-Based Exemption at 20cm distances.

## **6. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR230850482-EXP EUT EXTERNAL PHOTOGRAPHS and  
CR230850482-INP EUT INTERNAL PHOTOGRAPHS

## **7. TEST SETUP PHOTOGRAPHS**

Please refer to the attachment CR230850482-00A-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**