



FCC TEST REPORT

Report No: STS1910030W03

Issued for

AEOTEC LIMITED

OFFICE 4 10/F KWAN CHART TOWER NO. 6 TONNOCHY ROAD WANCHAI HK

Product Name:	Z-Stick 7
Brand Name:	Aeotec
Model Name:	ZWA010-A
Series Model:	N/A
FCC ID:	2AOGIZWA010
Test Standard:	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District,Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name: AEOTEC LIMITED
Address: OFFICE 4 10/F KWAN CHART TOWER NO. 6 TONNOCHY ROAD WANCHAI HK

Manufacture's Name: A&R Technologies
Address: 34B Zheng Feng Nan Road, Baoan District, Shenzhen City, Guangdong Province, China

Product Description

Product Name: Z-Stick 7
Brand Name: Aeotec
Model Name: ZWA010-A
Series Model: N/A

Test Standards.....: FCC Part15.249
Test Procedure: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test:
Date of performance of tests...: 08 Nov. 2019 ~ 31 Dec. 2019
Date of Issue: 31 Dec. 2019
Test Result.....: **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 RADIATED EMISSION MEASUREMENT	16
4. BANDWIDTH TEST	33
4.2 TEST SETUP	33
4.3 EUT OPERATION CONDITIONS	33
4.4 TEST RESULTS	34
5. ANTENNA REQUIREMENT	36
5.1 STANDARD REQUIREMENT	36
5.2 EUT ANTENNA	36
APPENDIX- PHOTOS OF TEST SETUP	37

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	31 Dec. 2019	STS1910030W03	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.205	Radiated Band Edge Emission	Pass	
15.249	20dB Bandwidth	Pass	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 6.7\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 4.43\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 5\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Z-Stick 7								
Trade Name	Aeotec								
Model Name	ZWA010-A								
Series Model	N/A								
Model Difference	N/A								
Product Description	The EUT is a Z-Stick 7 <table><tr><td>Operation Frequency:</td><td>908.44MHz, 908.45MHz, 916.045MHz</td></tr><tr><td>Modulation Type:</td><td>FSK (9.6kbps and 40 kbps) GFSK (for 100 kbps)</td></tr><tr><td>Antenna Designation:</td><td>Monopole antenna</td></tr><tr><td>Antenna Gain(Peak):</td><td>4 dBi</td></tr></table> Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	908.44MHz, 908.45MHz, 916.045MHz	Modulation Type:	FSK (9.6kbps and 40 kbps) GFSK (for 100 kbps)	Antenna Designation:	Monopole antenna	Antenna Gain(Peak):	4 dBi
Operation Frequency:	908.44MHz, 908.45MHz, 916.045MHz								
Modulation Type:	FSK (9.6kbps and 40 kbps) GFSK (for 100 kbps)								
Antenna Designation:	Monopole antenna								
Antenna Gain(Peak):	4 dBi								
Channel List	Please refer to the Note 2.								
Power Rating:	Input: 5V · 500mA								
Hardware version number	V1.0								
Software version number	V1.0								

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List	
Channel	Frequency (MHz)
01	908.44
02	908.45
03	916.045

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	Aeotec	ZWA010-A	Monopole	NA	4 dBi	Antenna



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data Rate/Modulation
Mode 1	TX CH01	9.6Kbps/FSK
Mode 2	TX CH02	40Kbps/FSK
Mode 3	TX CH03	100Kbps/GFSK

Note:

(1) All above mode have been measurement, only worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V,50/60Hz is shown in the report

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Spurious Emission Test



Conducted Emission Test



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
E-3	Notebook Adapter	DELL	HA45NM140	N/A	N/A
C-1	DC Cable	N/A	100cm	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.7.29	2020.7.28
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2019.10.9	2020.10.8
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2019.10.12	2020.10.11
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Band Reject Filter (902-928MHz)	COM-MW	ZBSF-902-928	702	2019.10.12	2020.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.7.29	2020.7.28
LISN	R&S	ENV216	101242	2019.10.9	2020.10.8
LISN	EMCO	3810/2NM	23625	2019.10.9	2020.10.8
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2019.10.9	2020.10.8
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.9	2020.10.8
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

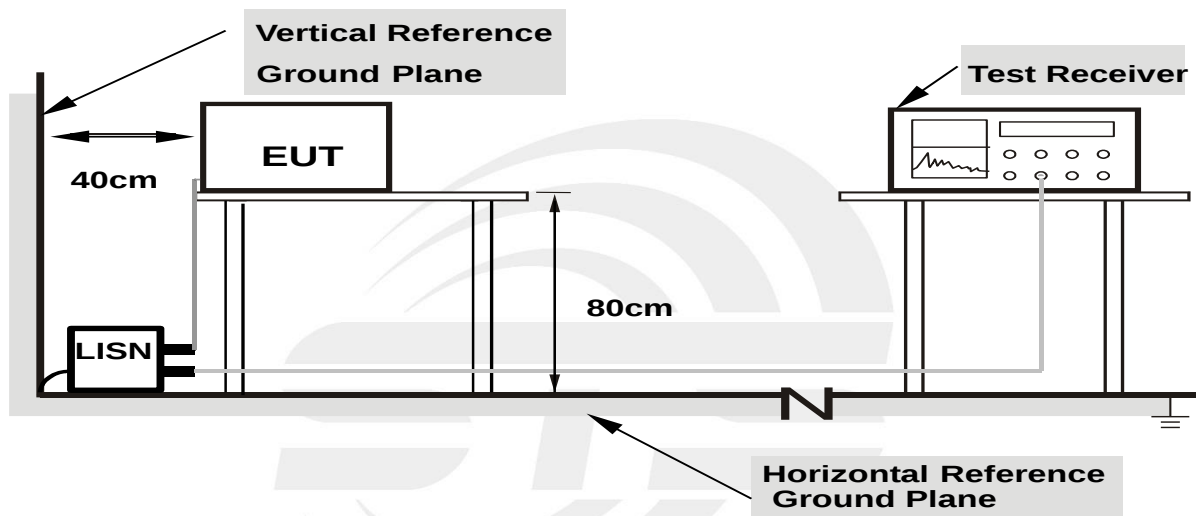

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 EUT OPERATING CONDITIONS


Temperature:	26.4 °C	Relative Humidity:	56%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	35.64	20.59	56.23	66.00	-9.77	QP
2	0.1500	17.07	20.59	37.66	56.00	-18.34	AVG
3	0.4500	20.86	20.16	41.02	56.88	-15.86	QP
4	0.4500	7.14	20.16	27.30	46.88	-19.58	AVG
5	2.1260	14.71	19.96	34.67	56.00	-21.33	QP
6	2.1260	5.76	19.96	25.72	46.00	-20.28	AVG
7	5.3140	11.50	20.38	31.88	60.00	-28.12	QP
8	5.3140	0.30	20.38	20.68	50.00	-29.32	AVG
9	13.8020	15.34	20.72	36.06	60.00	-23.94	QP
10	13.8020	5.37	20.72	26.09	50.00	-23.91	AVG
11	19.4820	15.06	21.38	36.44	60.00	-23.56	QP
12	19.4820	4.85	21.38	26.23	50.00	-23.77	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

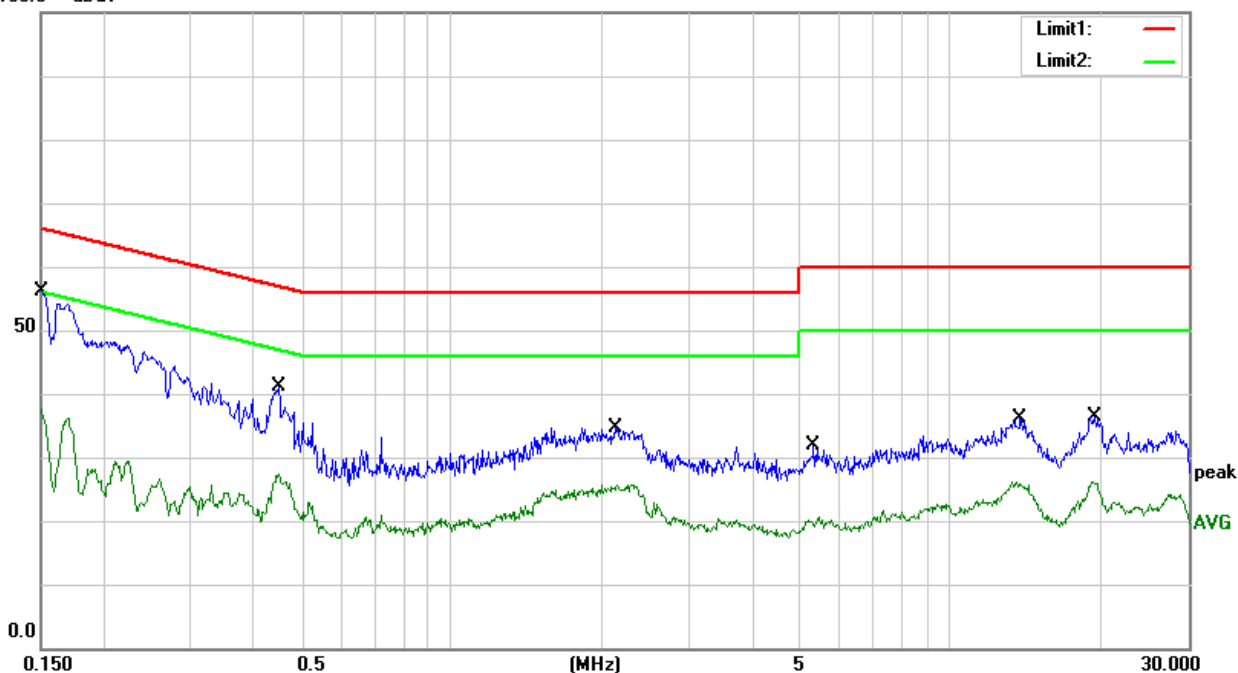




Temperature:	26.4 °C	Relative Humidity:	56%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	37.12	20.59	57.71	65.78	-8.07	QP
2	0.1540	16.99	20.59	37.58	55.78	-18.20	AVG
3	0.3580	18.96	20.11	39.07	58.77	-19.70	QP
4	0.3580	5.39	20.11	25.50	48.77	-23.27	AVG
5	0.8260	12.86	20.11	32.97	56.00	-23.03	QP
6	0.8260	3.87	20.11	23.98	46.00	-22.02	AVG
7	1.5460	16.09	19.69	35.78	56.00	-20.22	QP
8	1.5460	7.13	19.69	26.82	46.00	-19.18	AVG
9	5.9180	8.59	20.34	28.93	60.00	-31.07	QP
10	5.9180	-2.08	20.34	18.26	50.00	-31.74	AVG
11	18.9260	16.34	21.34	37.68	60.00	-22.32	QP
12	18.9260	6.22	21.34	27.56	50.00	-22.44	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor)-Limit

100.0 dBuV

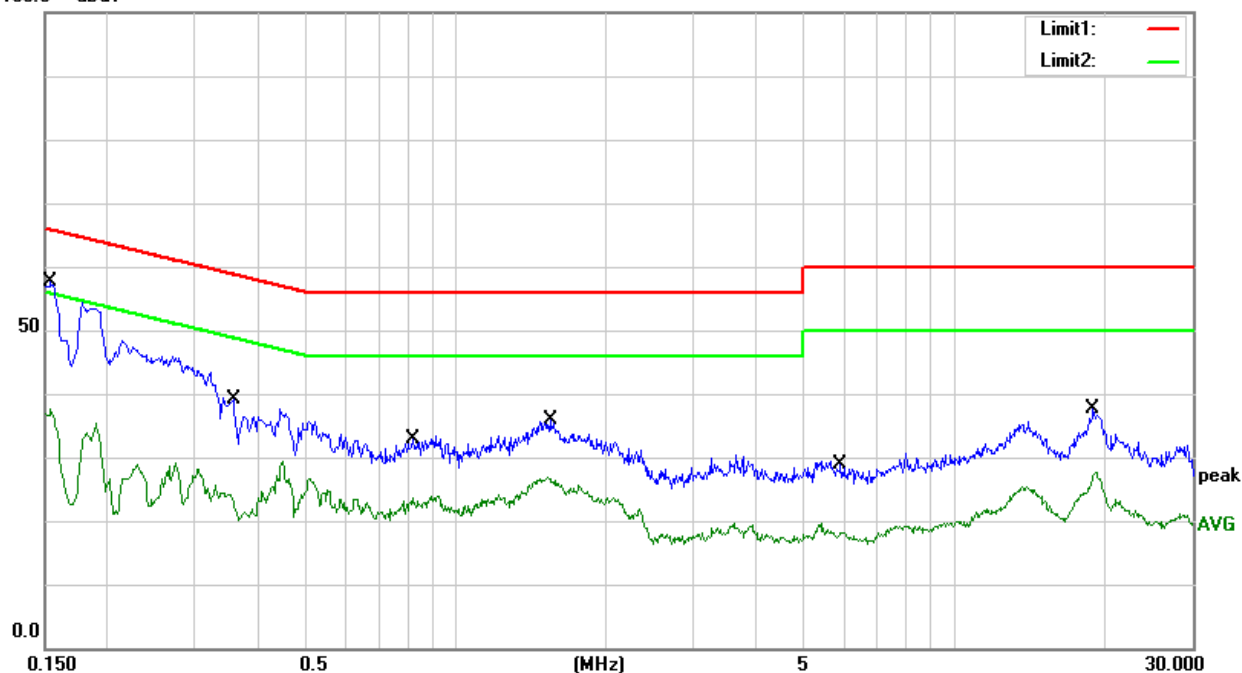



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading complies with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value complies with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axes. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

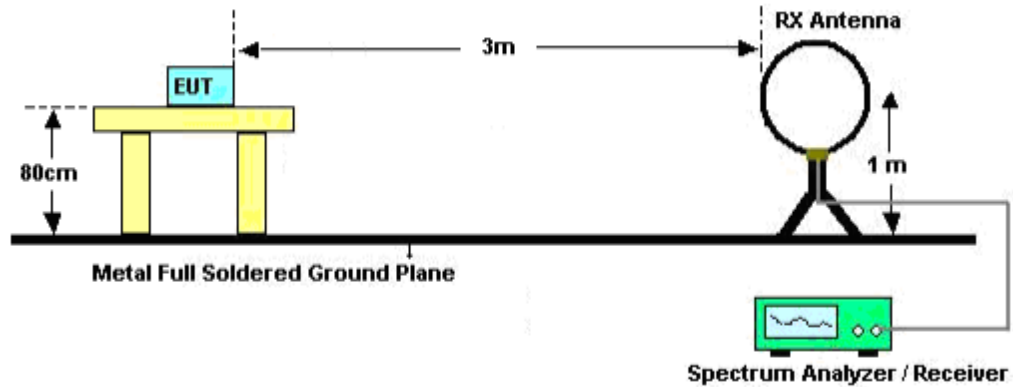

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

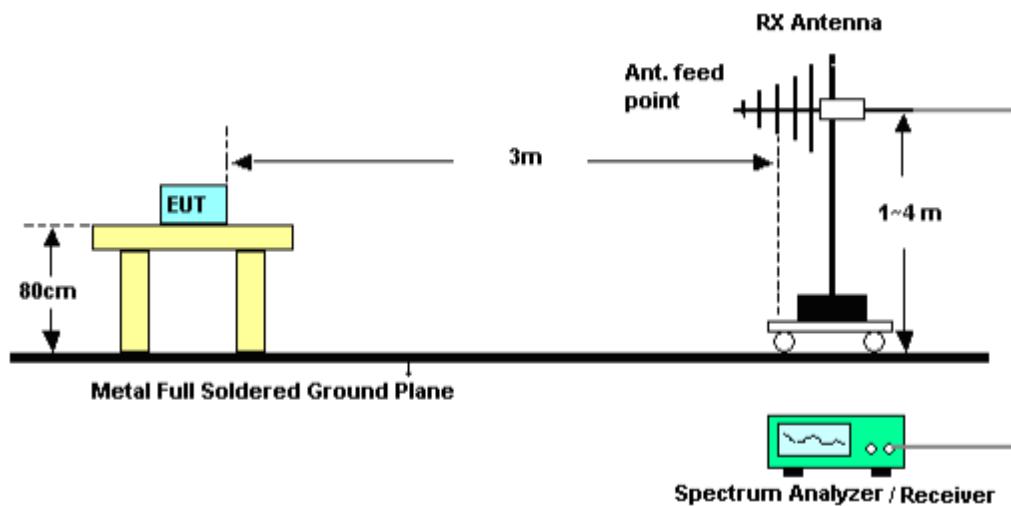

(C) Radiated Emission Test-Up Frequency Above 1GHz

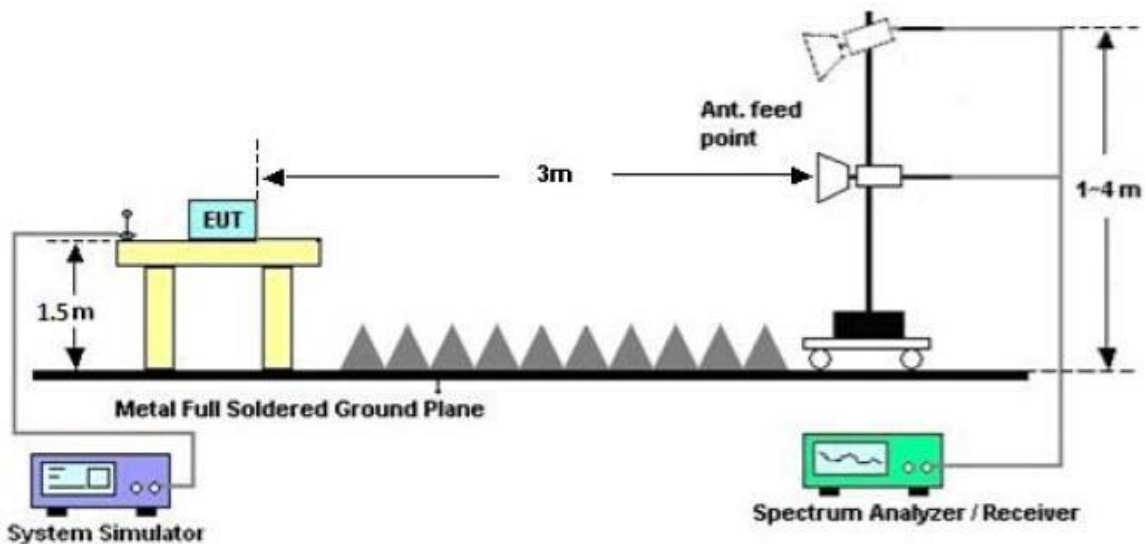



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency	PR	AR	AF	PL	AL	PK L	AV L	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86





3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	26 °C	Relative Humidity:	54%
Test Voltage:	DC5V	Polarization:	---
Test Mode:	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

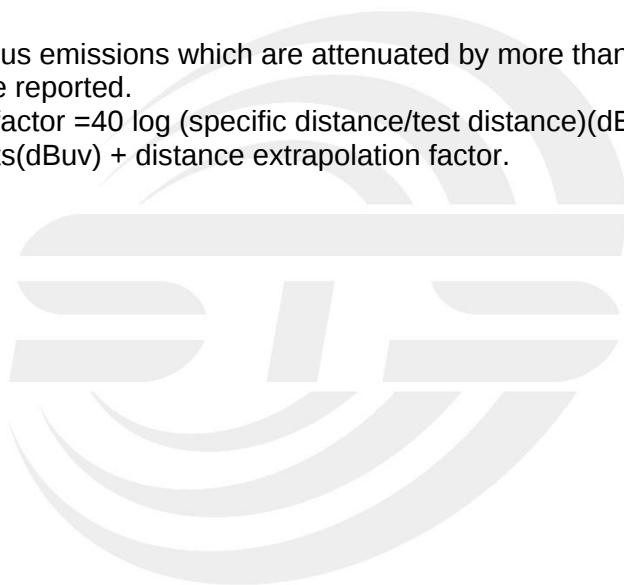



Between 30MHz – 1000 MHz Radiation Spurious


Temperature:	26 °C	Relative Humidity:	54%
Test Voltage:	DC5V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
156.1000	48.03	-18.66	29.37	43.50	-14.13	QP
198.7800	49.78	-21.12	28.66	43.50	-14.84	QP
397.6300	43.43	-11.24	32.19	46.00	-13.81	QP
565.4400	37.68	-5.55	32.13	46.00	-13.87	QP
680.8700	37.27	-4.28	32.99	46.00	-13.01	QP
916.5800	33.35	-0.08	33.27	46.00	-12.73	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit

80.0 dBuV/m

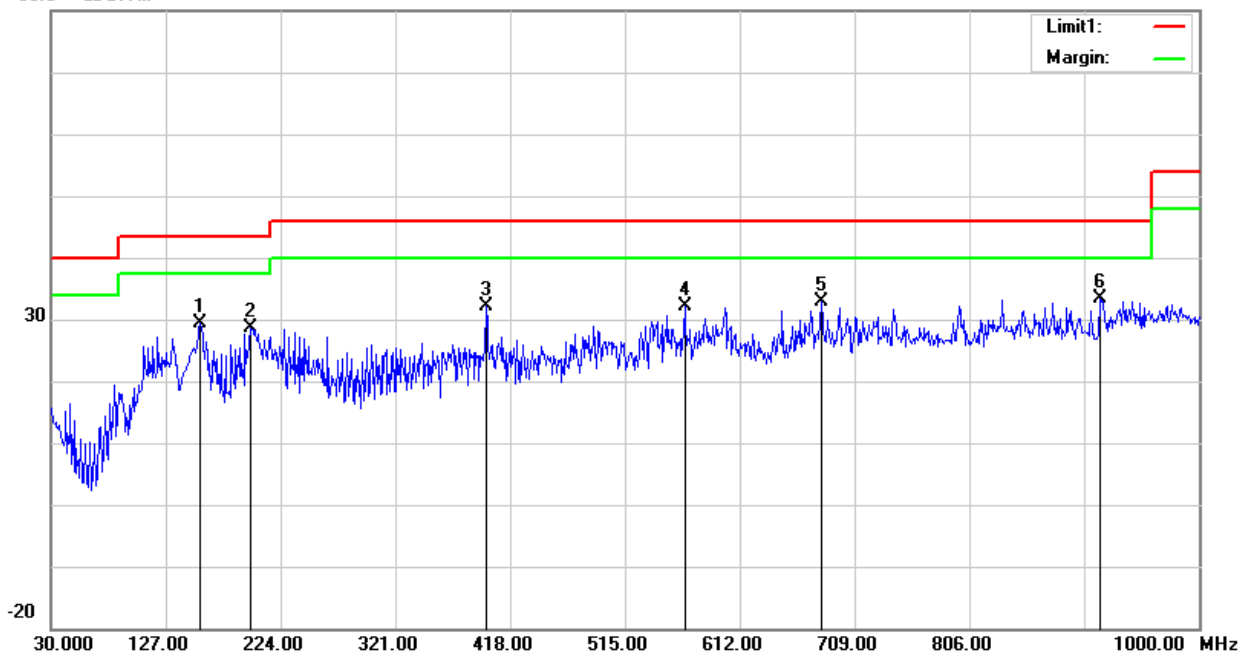




Temperature:	26 °C	Relative Humidity:	54%
Test Voltage:	DC5V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
87.2300	46.06	-21.84	24.22	40.00	-15.78	QP
259.8900	42.51	-14.79	27.72	46.00	-18.28	QP
398.6000	43.04	-11.20	31.84	46.00	-14.16	QP
591.6300	41.40	-5.82	35.58	46.00	-10.42	QP
696.3900	37.45	-4.23	33.22	46.00	-12.78	QP
952.4700	31.59	1.63	33.22	46.00	-12.78	QP

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result = Reading + Factor)–Limit

80.0 dBuV/m

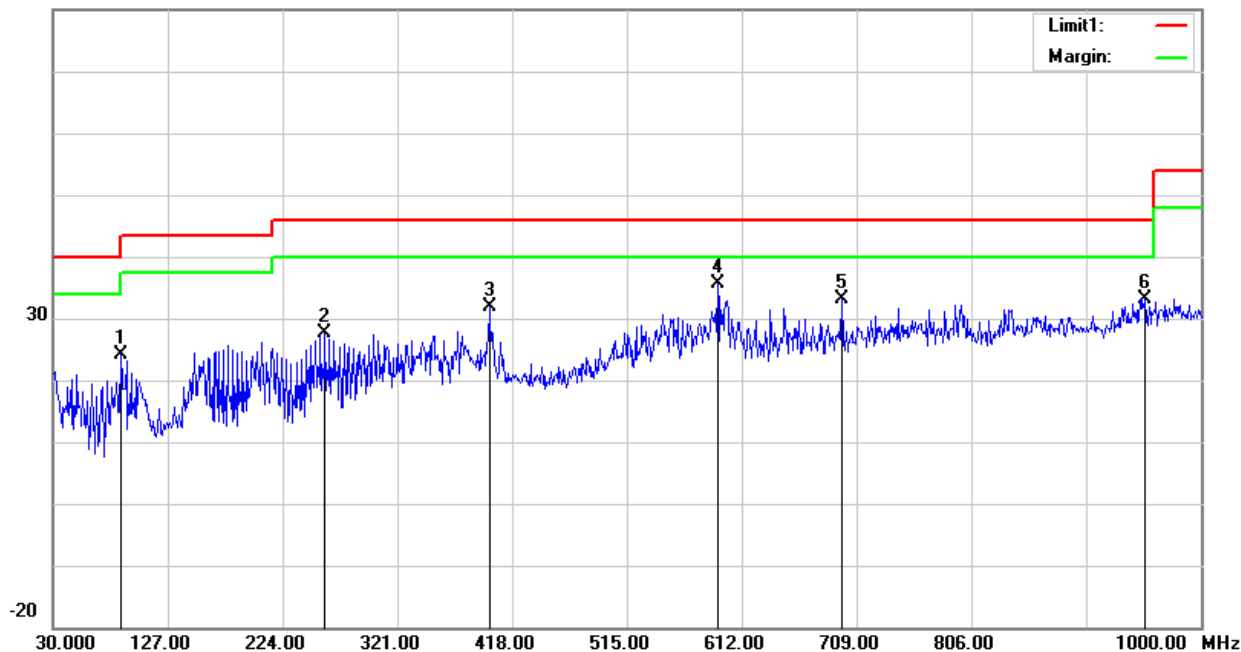

Note: 900MHz main frequency filter is used in the test, so there is no main frequency.



Above 1G Radiation Spurious

FSK-Low
Horizontal

Frequency (MHz)	Peak Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	PK Over Limit (dB)	AV Over Limit (dB)	Min Margin(dB)	ANT
1399	48.22	-0.66	47.56	74.00	54.00	-26.44	-6.44	-6.44	Horizontal
2517.5	44.62	4.02	48.64	74.00	54.00	-25.36	-5.36	-5.36	Horizontal
3197.75	54.24	-12.13	42.11	74.00	54.00	-31.89	-11.89	-11.89	Horizontal
5450	54.13	-4.9	49.23	74.00	54.00	-24.77	-4.77	-4.77	Horizontal
8169.5	48.33	3.25	51.58	74.00	54.00	-22.42	-2.42	-2.42	Horizontal
9580	47.59	4.65	52.24	74.00	54.00	-21.76	-1.76	-1.76	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	PK Over Limit (dB)	AV Over Limit (dB)	Margin(dB)	ANT
1032	48.43	-1.87	46.56	74.00	54.00	-27.44	-7.44	-7.44	Vertical
2197	45.28	4.13	49.41	74.00	54.00	-24.59	-4.59	-4.59	Vertical
3386.75	56.85	-11.77	45.08	74.00	54.00	-28.92	-8.92	-8.92	Vertical
5450	54.59	-4.9	49.69	74.00	54.00	-24.31	-4.31	-4.31	Vertical
7263	49.76	1.63	51.39	74.00	54.00	-22.61	-2.61	-2.61	Vertical
9900.25	46.87	5.16	52.03	74.00	54.00	-21.97	-1.97	-1.97	Vertical

**FSK-Mid**
Horizontal

Frequency (MHz)	Peak Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	PK Over Limit (dB)	AV Over Limit (dB)	Min Margin(dB)	ANT
1816.5	54.26	0.2	54.46	74.00		-19.54			Horizontal
2192.5	45.47	4.18	49.65	74.00	54.00	-24.35	-4.35	-4.35	Horizontal
3329	53.53	-12.08	41.45	74.00	54.00	-32.55	-12.55	-12.55	Horizontal
5450	53.84	-4.9	48.94	74.00	54.00	-25.06	-5.06	-5.06	Horizontal
8260.5	47.40	3.26	50.66	74.00	54.00	-23.34	-3.34	-3.34	Horizontal
9923	46.37	4.92	51.29	74.00	54.00	-22.71	-2.71	-2.71	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	PK Over Limit (dB)	AV Over Limit (dB)	Margin(dB)	ANT
1198.5	50.38	-1.22	49.16	74.00	54.00	-24.84	-4.84	-4.84	Vertical
1993	48.87	1.43	50.30	74.00	54.00	-23.70	-3.70	-3.70	Vertical
3946.75	52.69	-10.47	42.22	74.00	54.00	-31.78	-11.78	-11.78	Vertical
5450	54.68	-4.9	49.78	74.00	54.00	-24.22	-4.22	-4.22	Vertical
8174.75	47.61	3.27	50.88	74.00	54.00	-23.12	-3.12	-3.12	Vertical
9483.75	48.07	4.03	52.10	74.00	54.00	-21.90	-1.90	-1.90	Vertical

**GFSK-High**

Horizontal


Frequency (MHz)	Peak Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	PK Over Limit (dB)	AV Over Limit (dB)	Min Margin(dB)	ANT
1397.5	46.39	-0.67	45.72	74.00	54.00	-28.28	-8.28	-8.28	Horizontal
2217.5	42.04	4.29	46.33	74.00	54.00	-27.67	-7.67	-7.67	Horizontal
3890.75	52.42	-10.77	41.65	74.00	54.00	-32.35	-12.35	-12.35	Horizontal
5495.5	52.61	-5.04	47.57	74.00	54.00	-26.43	-6.43	-6.43	Horizontal
8698	46.13	4.38	50.51	74.00	54.00	-23.49	-3.49	-3.49	Horizontal
9930	47.29	4.85	52.14	74.00	54.00	-21.86	-1.86	-1.86	Horizontal

Vertical

Frequency (MHz)	Peak Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	PK Over Limit (dB)	AV Over Limit (dB)	Margin(dB)	ANT
1199	48.77	-1.21	47.56	74.00	54.00	-26.44	-6.44	-6.44	Vertical
1999	47.92	1.48	49.40	74.00	54.00	-24.60	-4.60	-4.60	Vertical
3192.5	60.79	-12.15	48.64	74.00	54.00	-25.36	-5.36	-5.36	Vertical
5495.5	54.59	-5.04	49.55	74.00	54.00	-24.45	-4.45	-4.45	Vertical
8769.75	46.83	3.73	50.56	74.00	54.00	-23.44	-3.44	-3.44	Vertical
9858.25	46.77	5.12	51.89	74.00	54.00	-22.11	-2.11	-2.11	Vertical



Duty cycle

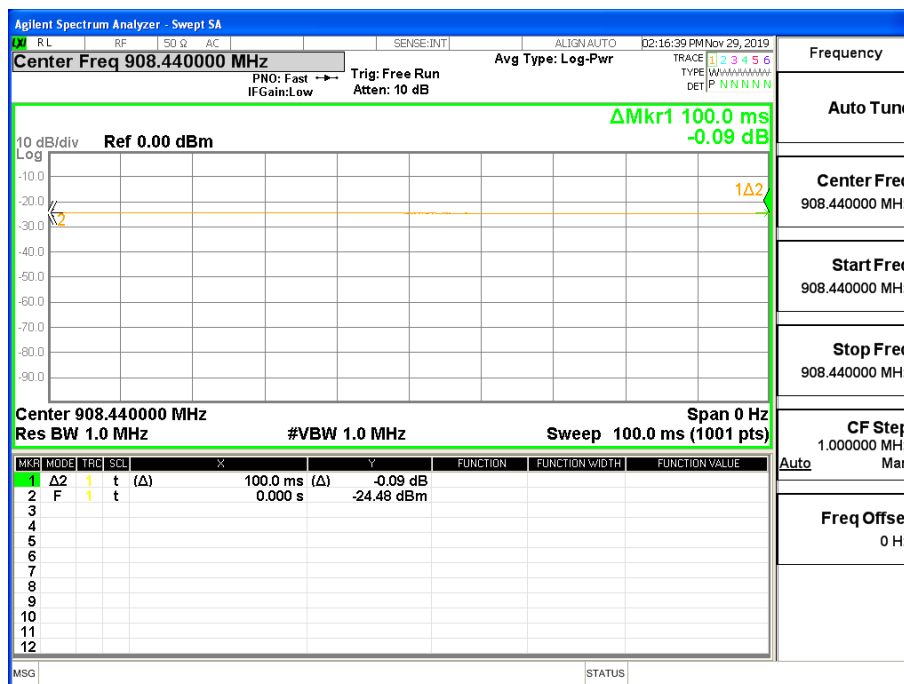


Ton (μs)	Tp (μs)	Duty Factor
100.000	100.000	0.00

Note: Duty Factor=20*LOG10(1/(Ton/Tp))



(Radiation Band edge)

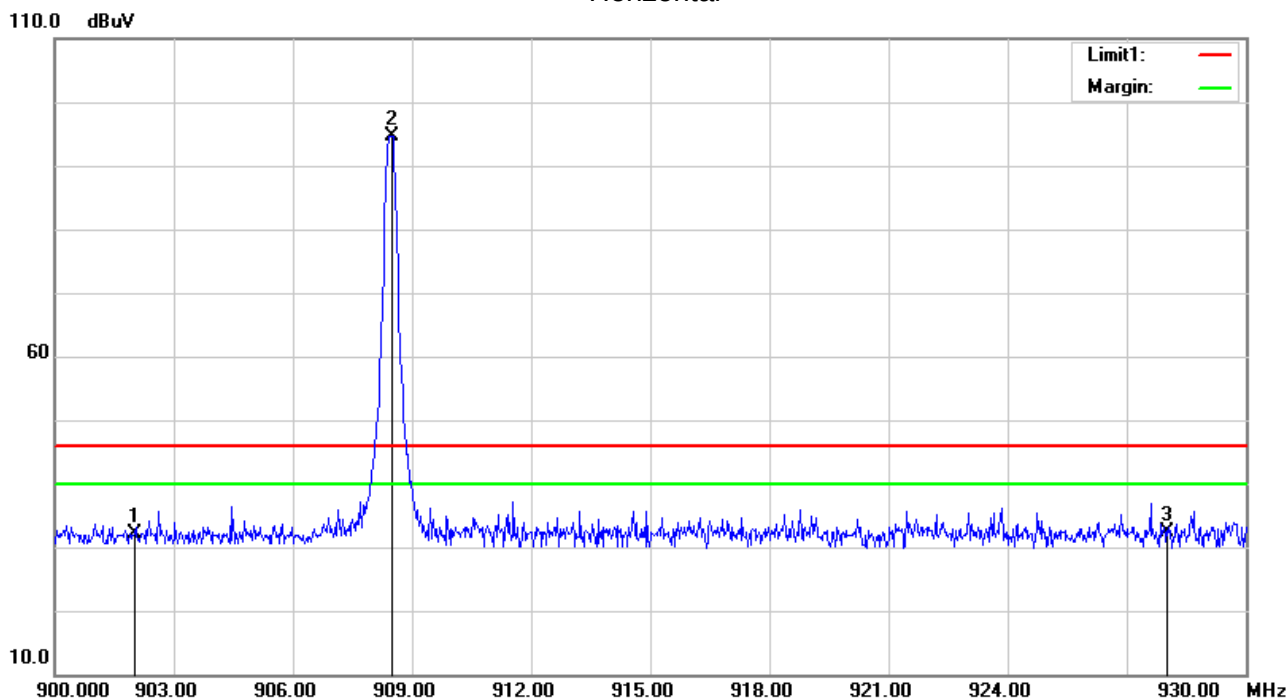FSK-Low
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	902.0000	32.50	-0.40	32.10	46.00	-13.90	peak
3	928.0000	32.04	0.43	32.47	46.00	-13.53	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Duty cycle Factor(dB/m)	Final Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	908.4400	90.78	-0.22	90.56	0	90.56	94.00	-3.44	peak




Vertical

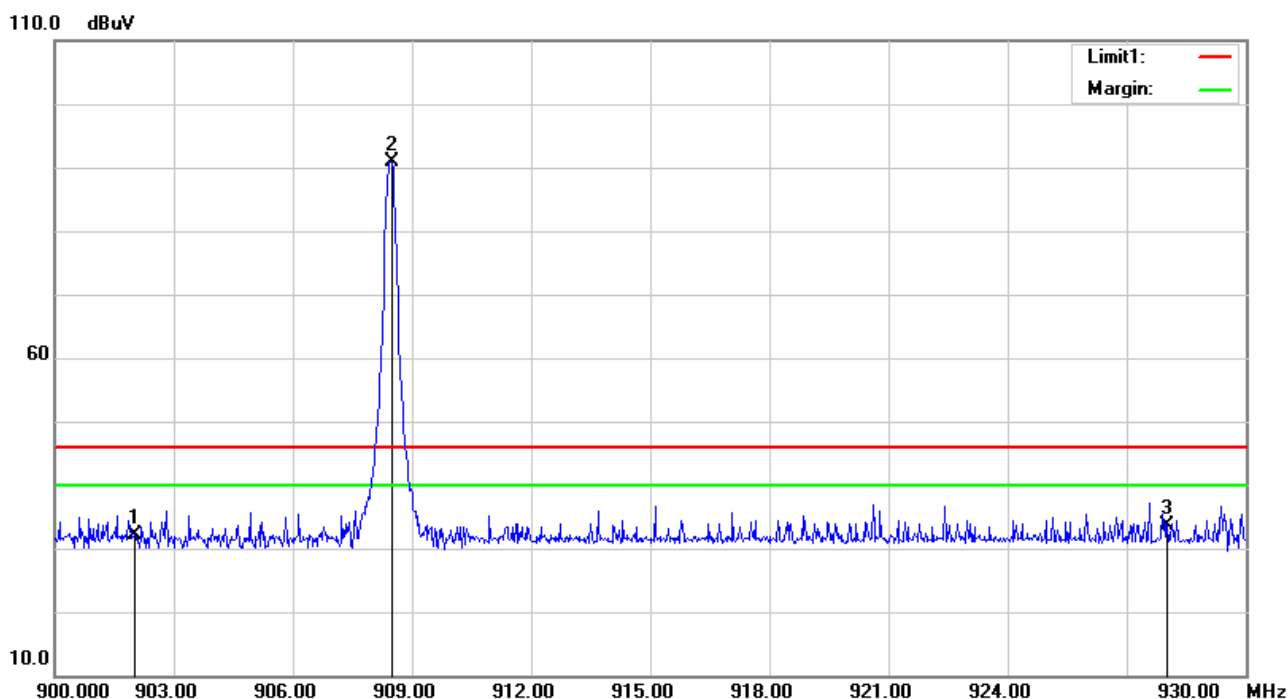

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	902.0000	32.55	-0.40	32.15	46.00	-13.85	peak
3	928.0000	33.19	0.43	33.62	46.00	-12.38	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Result	Duty cycle	Final Results	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
2	908.4400	90.98	-0.22	90.76	0	90.76	94.00	-3.24	peak

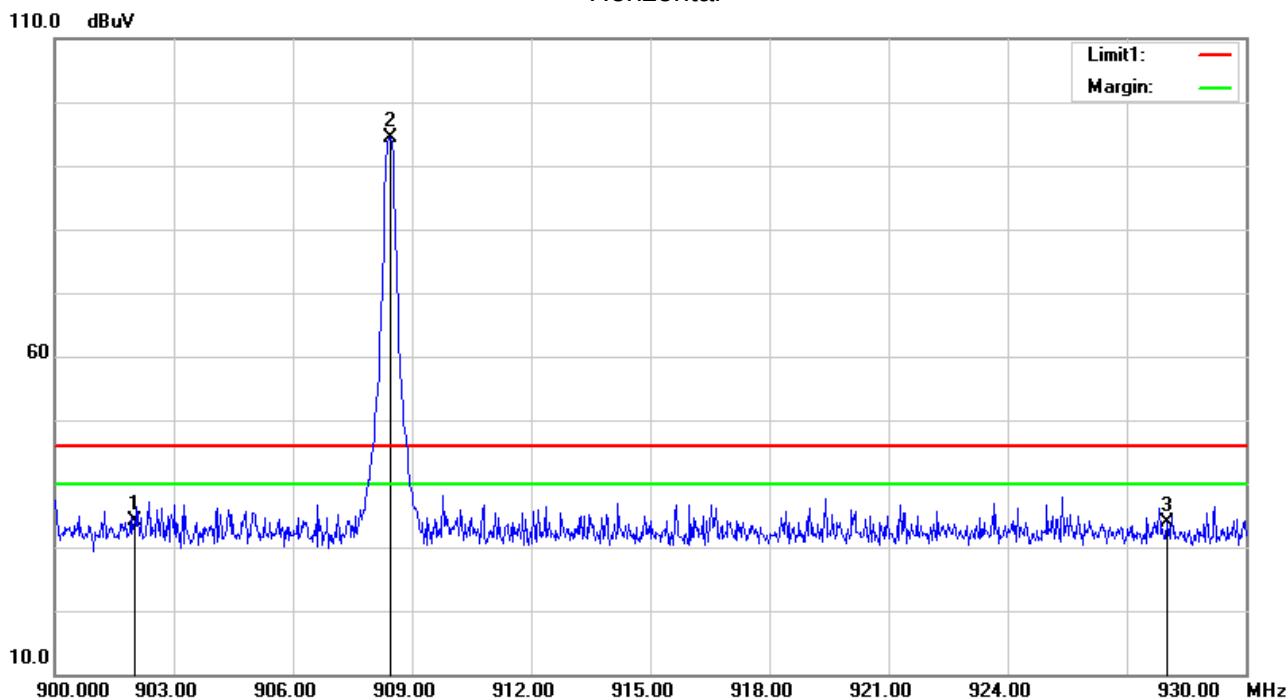**FSK-Mid**
Horizontal


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	902.0000	34.59	-0.40	34.19	46.00	-11.81	peak
3	928.0000	33.48	0.43	33.91	46.00	-12.09	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Result	Duty cycle	Final Results	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
2	908.4500	91.89	-0.22	91.67	0	91.67	94.00	-2.33	peak




Vertical

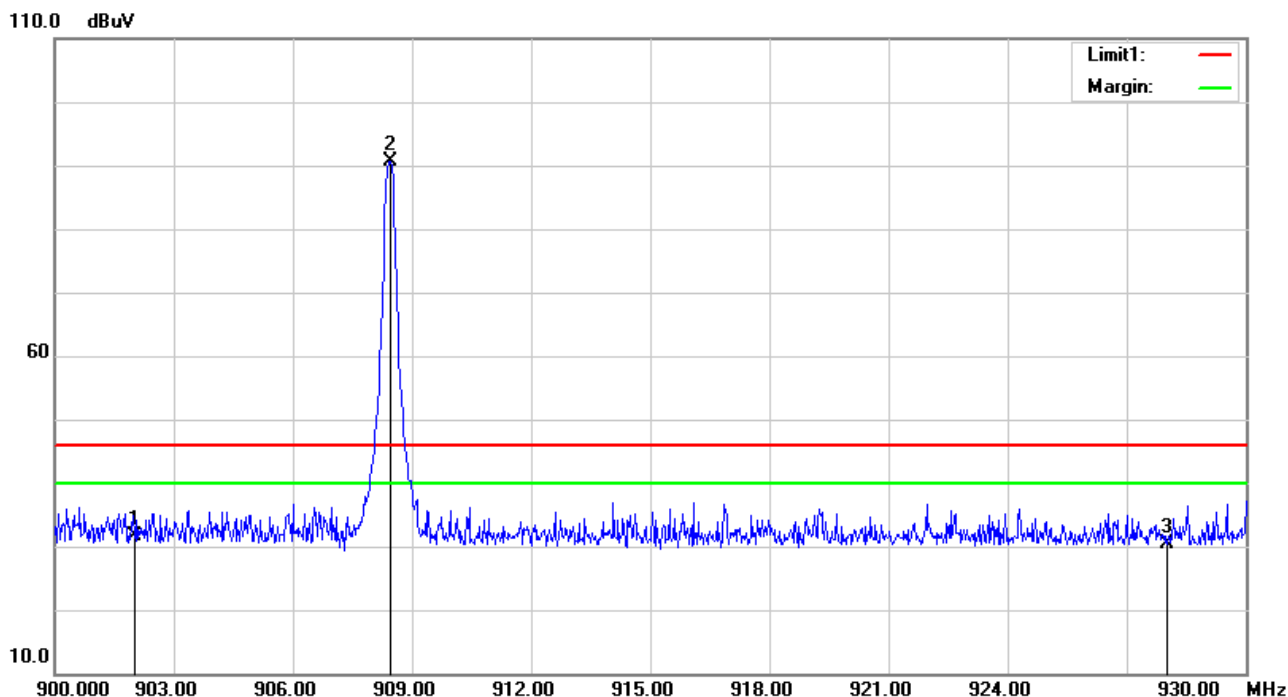

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	902.0000	31.97	-0.40	31.57	46.00	-14.43	peak	
3	928.0000	29.88	0.43	30.31	46.00	-15.69	peak	

Fundamental Frequency

No.	Frequency	Reading	Correct	Result	Duty cycle	Final Results	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
2	908.4500	90.76	-0.22	90.54	0	90.54	94.00	-3.46	peak

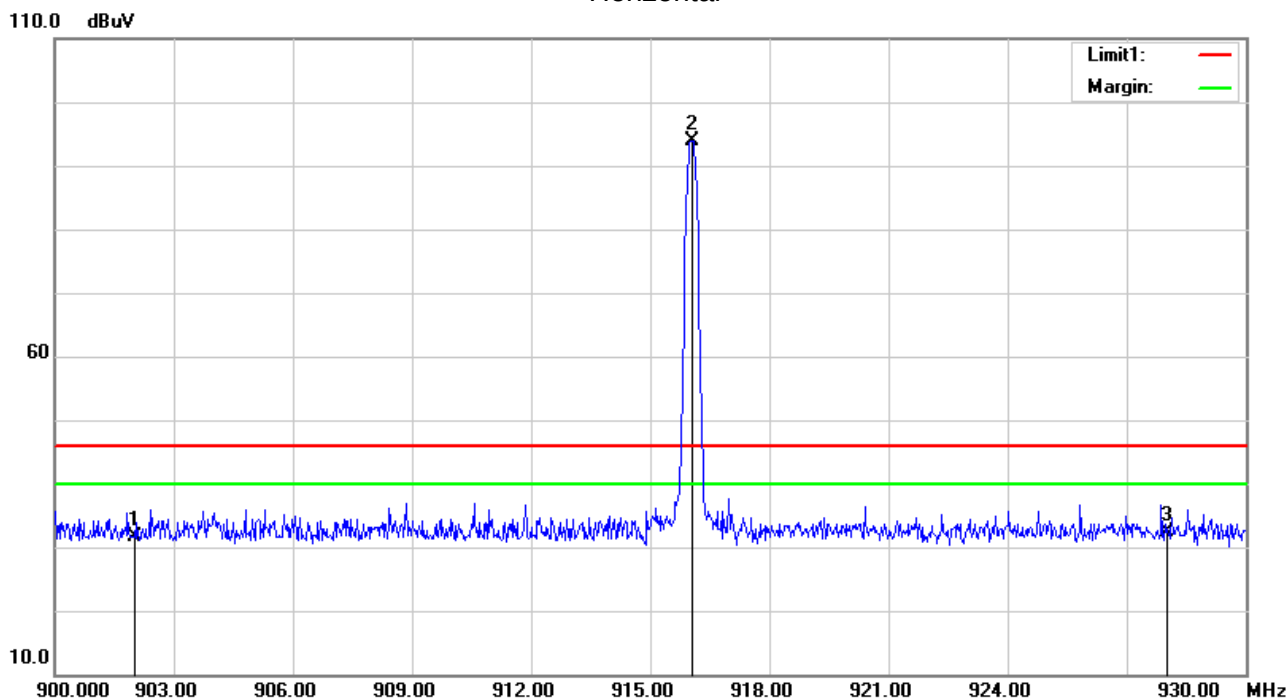**GFSK-High**
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	902.0000	32.03	-0.40	31.63	46.00	-14.37	peak
3	928.0000	31.90	0.43	32.33	46.00	-13.67	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Result	Duty cycle	Final Results	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
2	916.0450	91.90	-0.09	91.81	0	91.81	94.00	-2.19	peak



Vertical

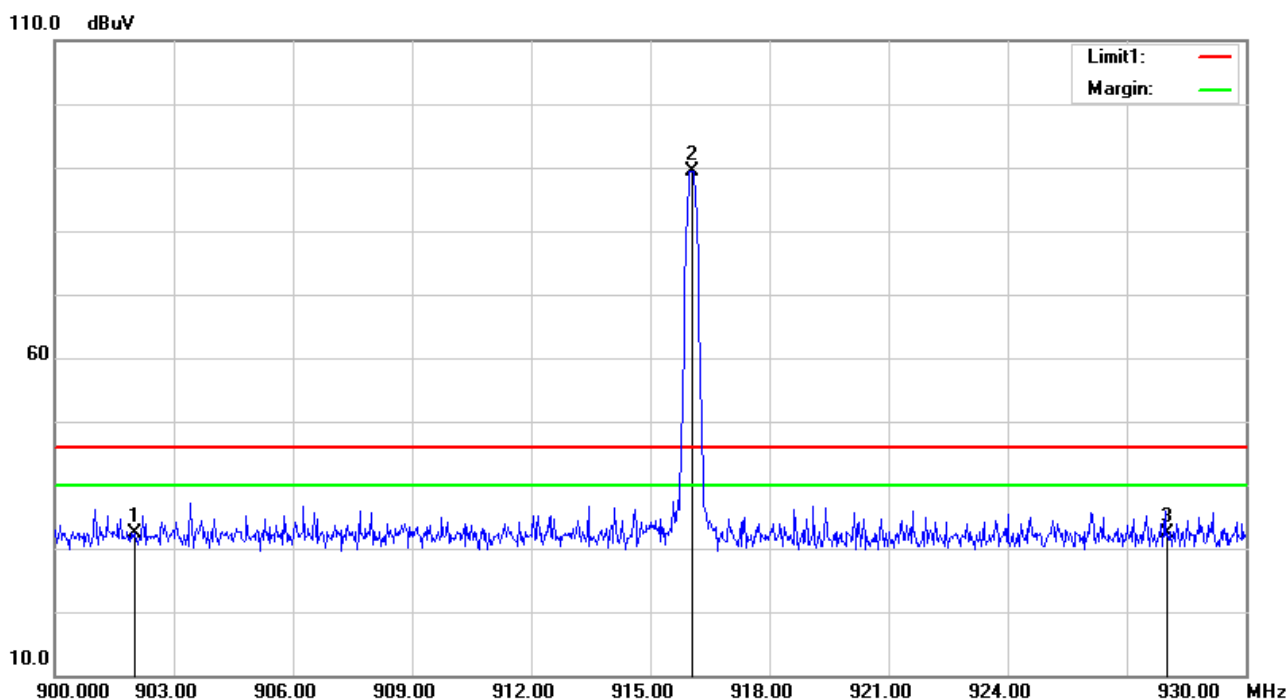

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	902.0000	32.68	-0.40	32.28	46.00	-13.72	peak
3	928.0000	32.04	0.43	32.47	46.00	-13.53	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Result	Duty cycle	Final Results	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
2	916.0450	89.49	-0.09	89.40	0	89.40	94.00	-4.60	peak

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : $RBW = 30\text{KHz}$, $VBW \geq RBW$, Sweep time = Auto.

4.2 TEST SETUP



4.3 EUT OPERATION CONDITIONS

TX mode.






4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC5V		


Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	99% Bandwidth (MHz)
CH01	908.5	0.140	0.121
CH02	908.4	0.140	0.119
CH03	916	0.170	0.142

The Lowest Channel:908.5MHz

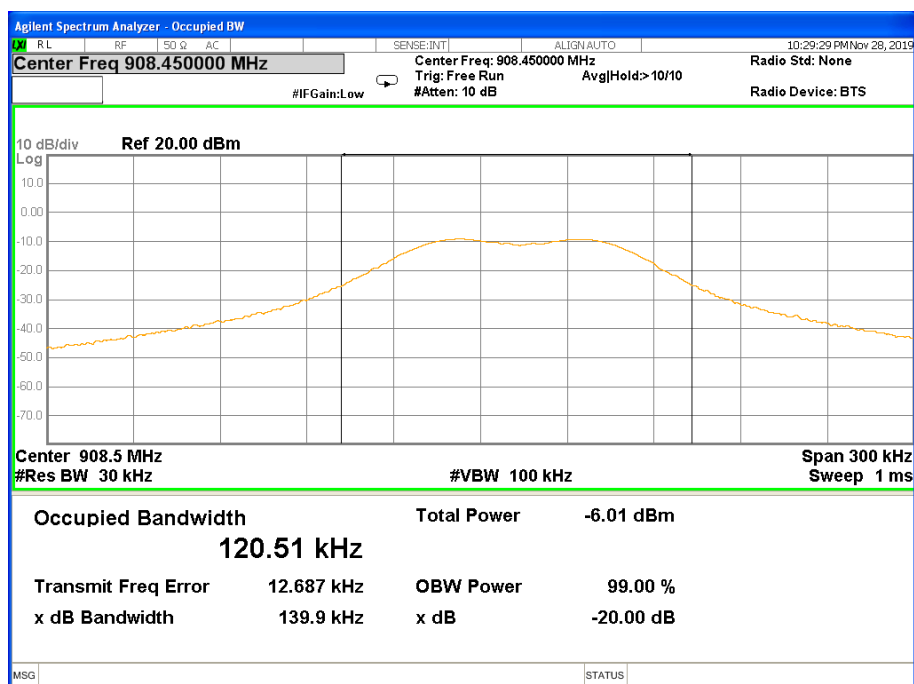




The Middle Channel: 908.4MHz

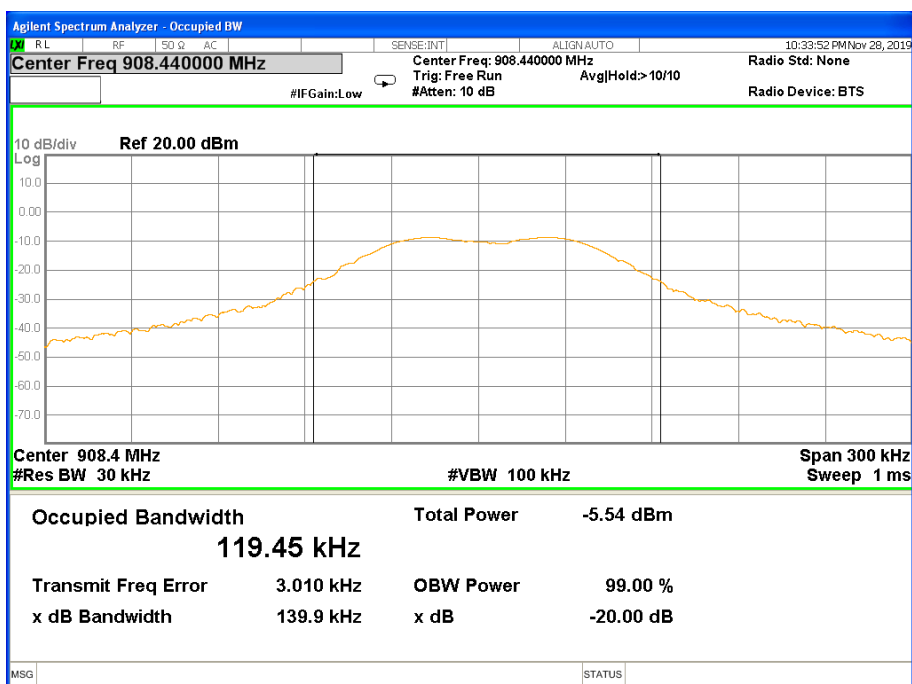

The High Channel: 916MHz

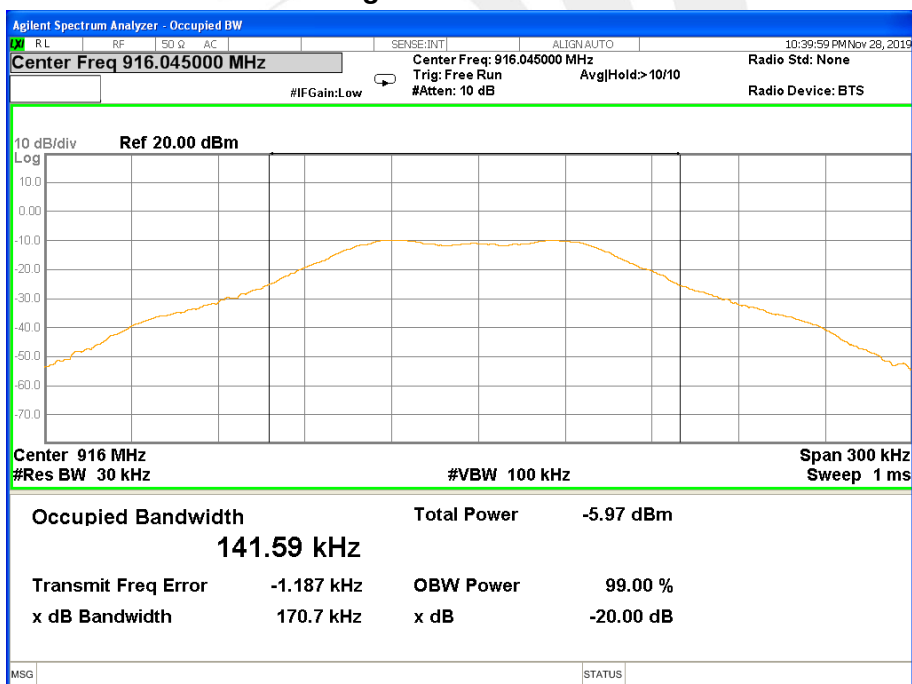



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It conforms to the standard requirements.





APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****

