



TEST REPORT

Application No.: GZCR2108020804AT
Applicant: Thundercomm Technology Co.,Ltd
Address of Applicant: Building 4, No. 99, Data Valley Middle Road, Xiantao District, Yubei District, Chongqing, China.
Manufacturer: Thundercomm Technology Co.,Ltd
Address of Manufacturer: Building 4, No. 99, Middle Road, Xiantao Data, Yubei District, Chongqing
Factory: ZEGNA DAIDONG LIMITED CORPORATION
Address of Factory: No. 41 Gangjian Road, Changping Town, Dongguan City, Guangdong Province, China.
Equipment Under Test (EUT):
EUT Name: EB5 Edge AI Box
Model No.: EB5
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2021-08-02
Date of Test: 2021-08-02 to 2021-08-13
Date of Issue: 2021-08-26

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No. 198 Kexhu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Testing & Inspection Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-08-26		Original

Authorized for issue by				
				
		Lily Kuang/Project Engineer		
				
		Ricky Liu/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass
Frequency Stability		KDB 789033 II A 3	47 CFR Part 15, Subpart C 15.407 (g)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
Duty Cycle		KDB 789033 D02 II B 2	KDB 789033 D02 II B 1	Pass
99% Bandwidth		KDB 789033 II D	N/A	Pass
26dB Emission bandwidth		KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
Maximum Conducted output power		KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Peak Power spectrum density		KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions (below 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions (above 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units.....	7
4.3 Measurement Uncertainty	7
4.4 Test Location	7
4.5 Test Facility.....	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	15
6.1 Antenna Requirement	15
6.1.1 Test Requirement:	15
6.1.2 Conclusion	15
6.2 Transmission in the Absence of Data	16
6.2.1 Test Requirement:	16
6.2.2 Conclusion	16
6.3 Frequency Stability.....	16
6.3.1 Test Requirement:	16
6.3.2 Conclusion	16
7 Radio Spectrum Matter Test Results.....	17
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	17
7.1.1 E.U.T. Operation.....	17
7.1.2 Test Mode Description	17
7.1.3 Test Setup Diagram	18
7.1.4 Measurement Procedure and Data.....	19
7.2 Duty Cycle	22
7.2.1 E.U.T. Operation.....	22
7.2.2 Test Mode Description	22
7.2.3 Test Setup Diagram	23
7.2.4 Measurement Procedure and Data.....	23
7.3 99% Bandwidth	24
7.3.1 E.U.T. Operation.....	24
7.3.2 Test Mode Description	24
7.3.3 Test Setup Diagram	25
7.3.4 Measurement Procedure and Data.....	25
7.4 26dB Emission bandwidth	26
7.4.1 E.U.T. Operation.....	26
7.4.2 Test Mode Description	26
7.4.3 Test Setup Diagram	27



7.4.4	Measurement Procedure and Data.....	27
7.5	Minimum 6 dB bandwidth (5.725-5.85 GHz band).....	28
7.5.1	E.U.T. Operation	28
7.5.2	Test Mode Description	28
7.5.3	Test Setup Diagram	28
7.5.4	Measurement Procedure and Data.....	28
7.6	Maximum Conducted output power	29
7.6.1	E.U.T. Operation	29
7.6.2	Test Mode Description	29
7.6.3	Test Setup Diagram	30
7.6.4	Measurement Procedure and Data.....	30
7.7	Peak Power spectrum density	31
7.7.1	E.U.T. Operation	31
7.7.2	Test Mode Description	31
7.7.3	Test Setup Diagram	32
7.7.4	Measurement Procedure and Data.....	32
7.8	Radiated Emissions which fall in the restricted bands	33
7.8.1	E.U.T. Operation	33
7.8.2	Test Mode Description	33
7.8.3	Test Setup Diagram	35
7.8.4	Measurement Procedure and Data.....	36
7.9	Radiated Emissions (below 1GHz)	169
7.9.1	E.U.T. Operation	169
7.9.2	Test Mode Description	169
7.9.3	Test Setup Diagram	171
7.9.4	Measurement Procedure and Data.....	171
7.10	Radiated Emissions (above 1GHz).....	174
7.10.1	E.U.T. Operation.....	174
7.10.2	Test Mode Description	174
7.10.3	Test Setup Diagram	176
7.10.4	Measurement Procedure and Data.....	177
8	Test Setup Photo	348
9	EUT Constructional Details (EUT Photos).....	348
10	Appendix.....	349



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:

Adapter
Model: HKA09019047-6U
Input: AC 100-240V, 50/60Hz, 1.5A
Output: DC 19.0V, 4.74A, 90.06W

Test voltage:

AC 120V, 60Hz or AC 240V, 50Hz
Note: Both nominal AC 120V, 60Hz and AC 240 V, 50Hz are required for testing in accordance with FCC KDB174176, this report only shows the results of the worst test result(AC 120V, 60Hz);

Cable(s):

DC cable:145cm with a ferrite core
AC cable:137cm unshielded

Internal Source:

More than 108MHz

Operation Frequency:

Band	Mode	Frequency Range(MHz)	Number of channels
UNII Band I	802.11a/n/ax(HT20)	5180-5240	4
	802.11n/ax(HT40)	5190-5230	2
	802.11ac/ax(HT80)	5210	1
UNII Band II-A	802.11a/n/ax(HT20)	5260-5320	4
	802.11n/ax(HT40)	5270-5310	2
	802.11ac/ax(HT80)	5290	1
UNII Band II-C	802.11a/n/ax(HT20)	5500-5700	11
	802.11n/ax(HT40)	5510-5670	5
	802.11ac/ax(HT80)	5530-5610	2
UNII Band III	802.11a/n/ax(HT20)	5745-5825	5
	802.11n/ax(HT40)	5755-5795	2
	802.11ac/ax(HT80)	5775	1

Modulation Type:

802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM)
802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
802.11ac: OFDM (256QAM, 64QAM,16QAM, QPSK, BPSK)
802.11ax: OFDM (1024QAM, 256QAM, 64QAM,16QAM, QPSK, BPSK)

DFS Function:

Slave without radar detection

TPC Function:

Not support

Antenna Type:

Monopole Antenna

Antenna Gain:

Antenna1: 2.4dBi, Antenna2: 2.4dBi
Note: MIMO for 802.11n/ac/ax.
This Devices transmitting with Cyclic Delay Diversity (CDD).

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	3.12dB
Duty Cycle	± 0.37%
99% Bandwidth	± 3%
26dB Emission bandwidth	± 3%
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	± 3%
Maximum Conducted output power	± 0.75dB
Peak Power spectrum density	± 2.84dB
Radiated Emissions	5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz)
Radiated Emissions which fall in the restricted bands	5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz)
Frequency Stability	± 7.25 x 10 ⁻⁸

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-01-08	2022-01-06
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2020-09-25	2021-09-24
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR4	EMC2221	2021-06-01	2022-05-31

Duty Cycle					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14	2021-07-13
				2021-07-12	2022-07-11
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

99% Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14	2021-07-13
				2021-07-12	2022-07-11



Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

26dB Emission bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14 2021-07-12	2021-07-13 2022-07-11
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14 2021-07-12	2021-07-13 2022-07-11
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou Branch Testing Laboratory, 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Maximum Conducted output power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz- 6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14	2021-07-13
				2021-07-12	2022-07-11
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Peak Power spectrum density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz- 6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14	2021-07-13
				2021-07-12	2022-07-11
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18



EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-31 2021-07-29	2021-07-30 2022-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Radiated Emissions (below 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable	HangTianXing	N/A	EMC0542	2020-09-09	2022-09-08
Trilog Broadband Antenna(25MHz-1GHz)-Lab	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Amplifier(9kHz-1.3GHz)	HP	8447F	EMC2065	2021-05-19	2022-05-18
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2019-12-27	2021-12-26
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, CSTC EEC Laboratory, No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

EMI Test Receiver(1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2220	2021/5/26	2022/5/25
-----------------------------	-----------------	------	---------	-----------	-----------

Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-31 2021-07-29	2021-07-30 2022-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Frequency Stability					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-14 2021-07-12	2021-07-13 2022-07-11
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou branch: Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2020-07-07	2021-07-06
				2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2020-07-07	2021-07-06
				2021-07-05	2022-07-05



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

EUT Antenna:

The antenna connector is a RP-SMA type that comply with Part15.203, the best case gain of the antenna1/antenna2 is 2.4dBi.

Antenna location: Refer to Internal photos.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (c)

6.2.2 Conclusion

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

6.3 Frequency Stability

6.3.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (g)

6.3.2 Conclusion


The grantee declared that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual, it comply the frequency stability requirement.

Pre-scan 05

worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

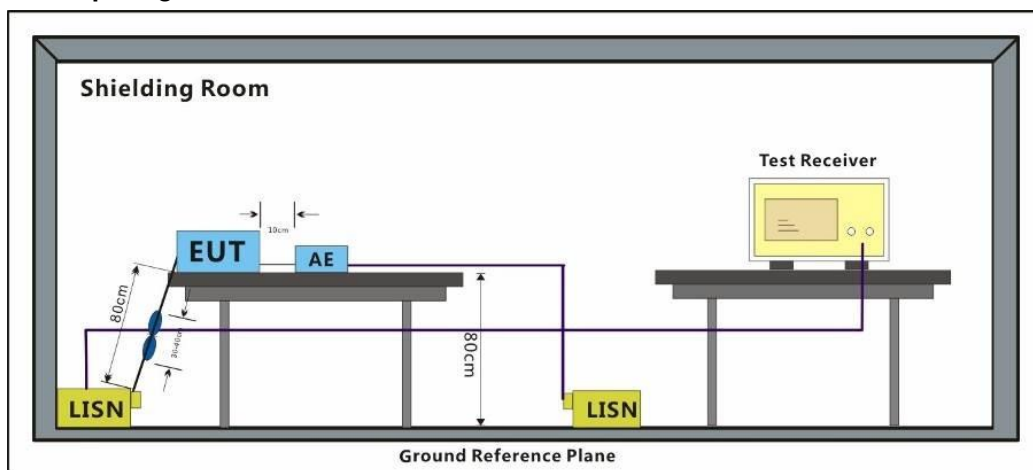


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Measured Level=Read Level+ Cable Loss+ LISN Factor


Test Mode: 02; Line: Live line

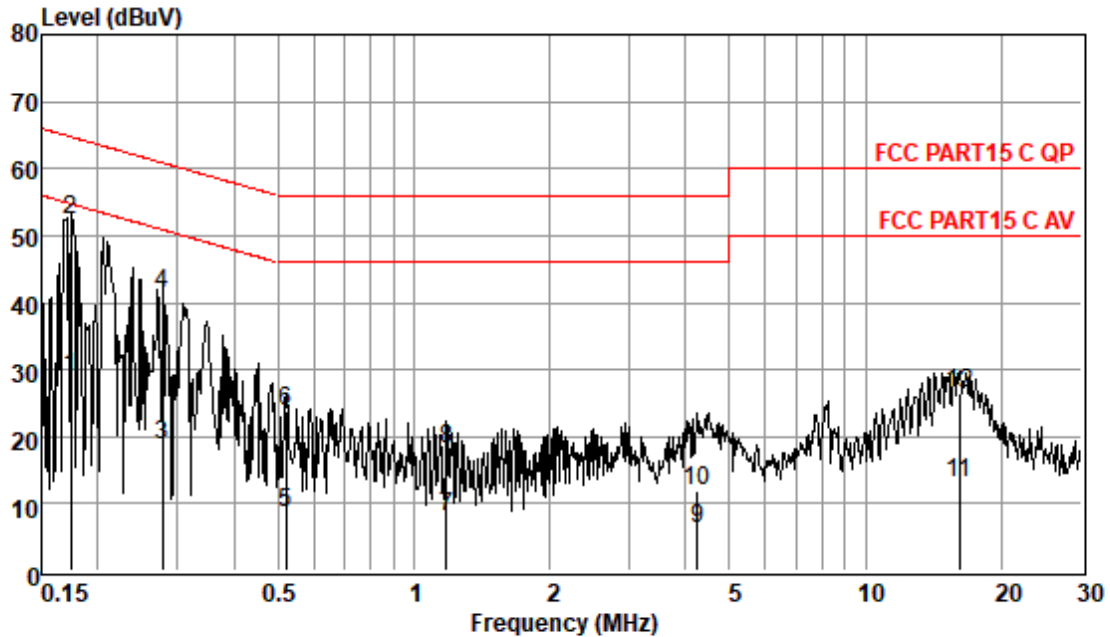

Pol : LINE
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	19.11	0.06	9.62	28.79	54.77	-25.98	Average
0.17	42.81	0.06	9.62	52.49	64.77	-12.28	QP
0.28	8.99	0.06	9.62	18.67	50.90	-32.23	Average
0.28	31.77	0.06	9.62	41.45	60.90	-19.45	QP
0.52	-1.11	0.07	9.63	8.59	46.00	-37.41	Average
0.52	14.14	0.07	9.63	23.84	56.00	-32.16	QP
1.18	-1.57	0.08	9.61	8.12	46.00	-37.88	Average
1.18	8.48	0.08	9.61	18.17	56.00	-37.83	QP
4.25	-3.44	0.17	9.63	6.36	46.00	-39.64	Average
4.25	2.09	0.17	9.63	11.89	56.00	-44.11	QP
16.14	2.92	0.32	9.75	12.99	50.00	-37.01	Average
16.14	16.35	0.32	9.75	26.42	60.00	-33.58	QP

Test Mode: 02; Line: Neutral Line

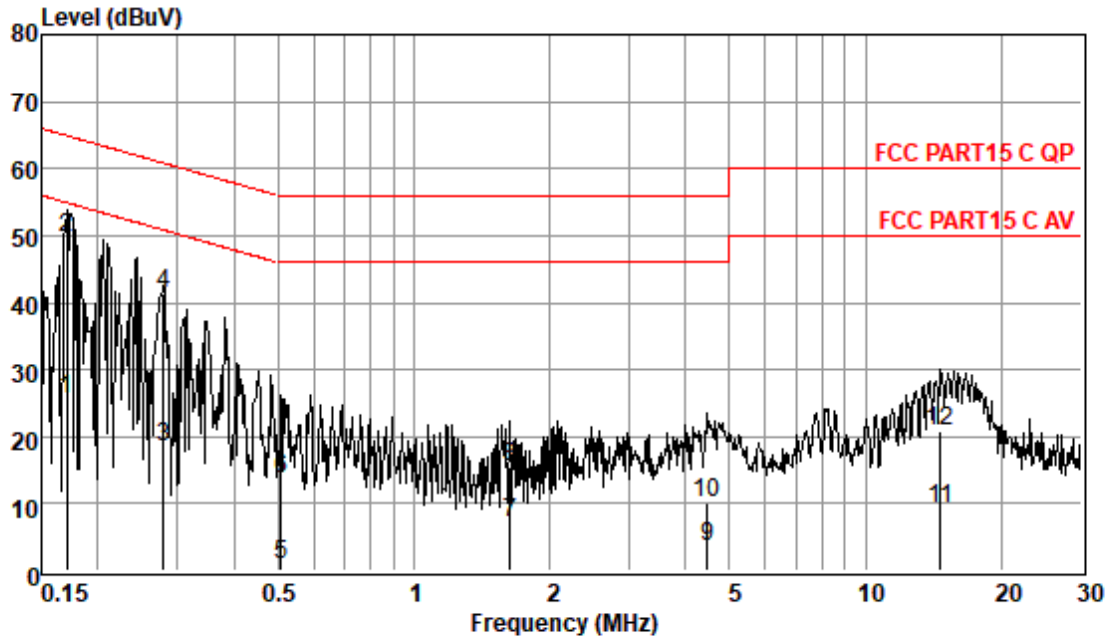

Pol : NEUTRAL
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	16.06	0.06	9.55	25.67	54.94	-29.27	Average
0.17	40.17	0.06	9.55	49.78	64.94	-15.16	QP
0.28	8.88	0.06	9.54	18.48	50.85	-32.37	Average
0.28	31.61	0.06	9.54	41.21	60.85	-19.64	QP
0.51	-8.70	0.07	9.55	0.92	46.00	-45.08	Average
0.51	4.05	0.07	9.55	13.67	56.00	-42.33	QP
1.64	-2.61	0.10	9.55	7.04	46.00	-38.96	Average
1.64	5.86	0.10	9.55	15.51	56.00	-40.49	QP
4.45	-6.03	0.17	9.56	3.70	46.00	-42.30	Average
4.45	0.53	0.17	9.56	10.26	56.00	-45.74	QP
14.59	-0.85	0.30	9.64	9.09	50.00	-40.91	Average
14.59	10.97	0.30	9.64	20.91	60.00	-39.09	QP

7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1
Test Method: KDB 789033 D02 II B 2

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 24.7 °C Humidity: 46.3 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	02	
		TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	03	
		TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	04	
		TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	05	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

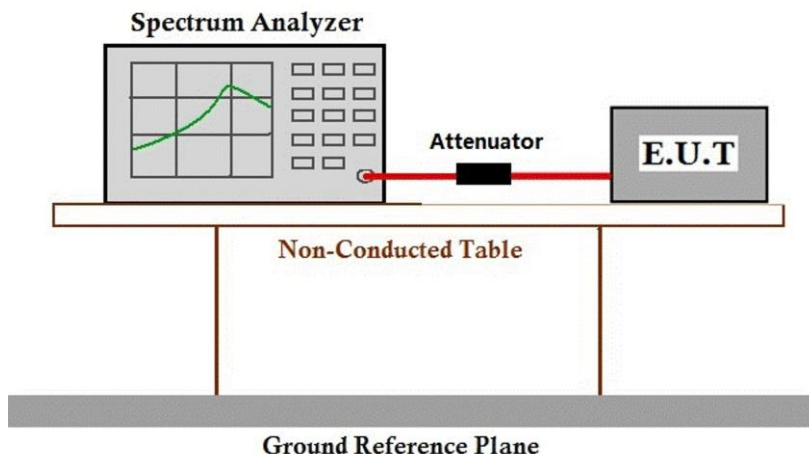

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D

7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 24.7 °C Humidity: 46.3 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	02	
		TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	03	
		TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	04	
		TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	05	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

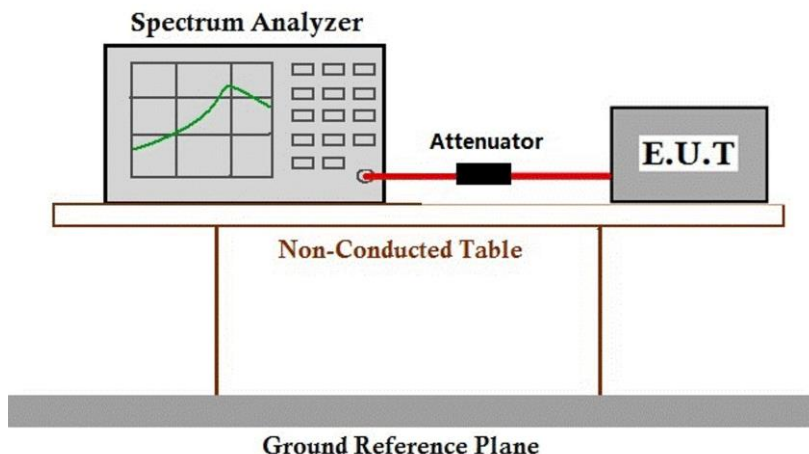

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)
Test Method: KDB 789033 D02 II C 1

7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 24.7 °C Humidity: 46.3 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	02	
		TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	03	
		TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	04	
		TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	05	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

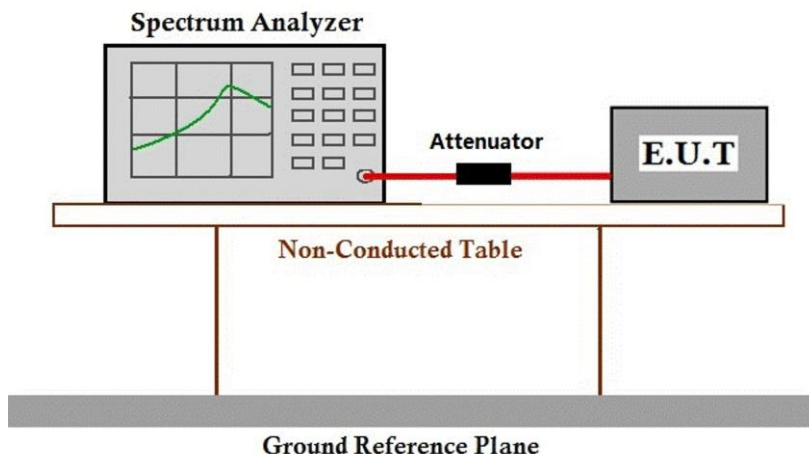

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥ 500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C

Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description


Pre-scan / Mode
Final test Code

Description

Final test 05

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

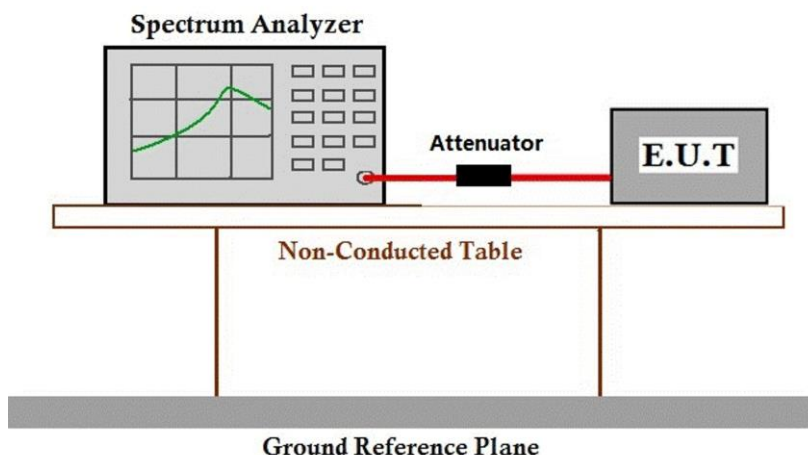

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.6 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C

Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode DescriptionPre-scan / Mode
Final test Code**Description**

Final test 02

TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

Final test 03

TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

Final test 04

TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

Final test 05

7.6.3 Test Setup Diagram

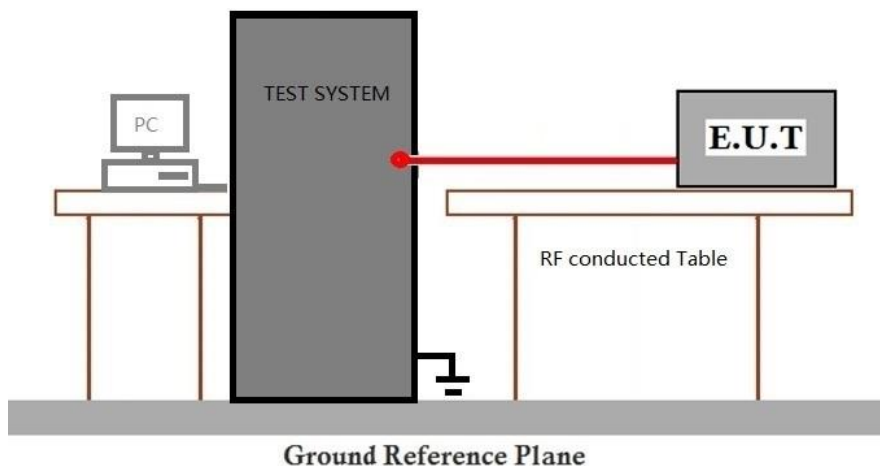

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Peak Power spectrum density

Test Requirement	47 CFR Part 15, Subpart C 15.407 (a)
------------------	--------------------------------------

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)		Limit
5150-5250		≤17dBm in 1MHz for master device
		≤11dBm in 1MHz for client device
5250-5350		≤11dBm in 1MHz for client device
5470-5725		≤11dBm in 1MHz for client device
5725-5850		≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.	

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C Humidity: 46.3 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is deemed to have read, understood and accepted the Terms and Conditions of the Company's General Conditions of Service and the Client's instructions. If any, The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or signature, is strictly prohibited. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.DCcheck@sgs.com.
 No. 190 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Final test 05

worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

TX mode (U-NII-3) Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

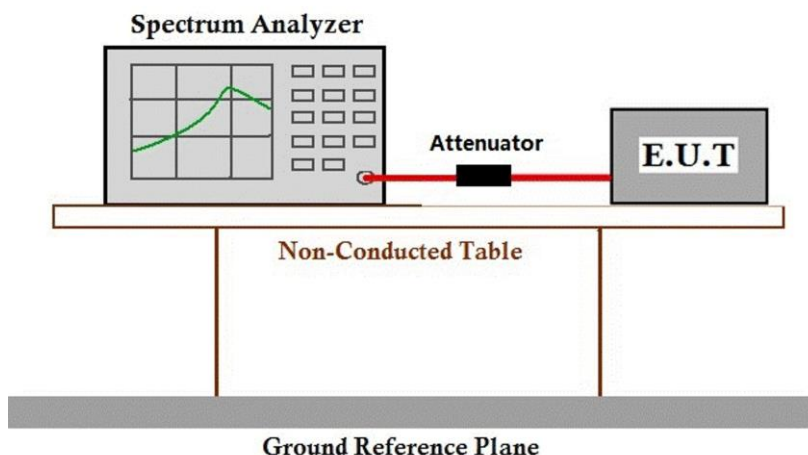

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C

Humidity: 54.2 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 02

TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Final test 03

IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

Final test 04

TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

Final test 05


TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.8.3 Test Setup Diagram

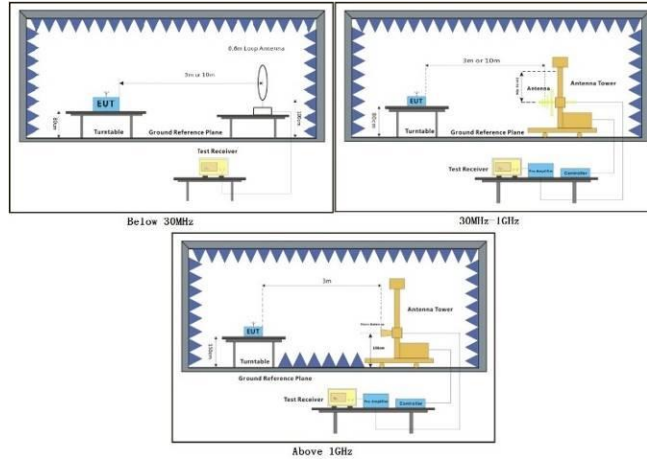

7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find the worst case is MIMO mode. only record the worst case test data 802.11a in this report.


Note: All average values corresponding to peaks are measured, only the frequency of the maximum average is recorded in the report;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

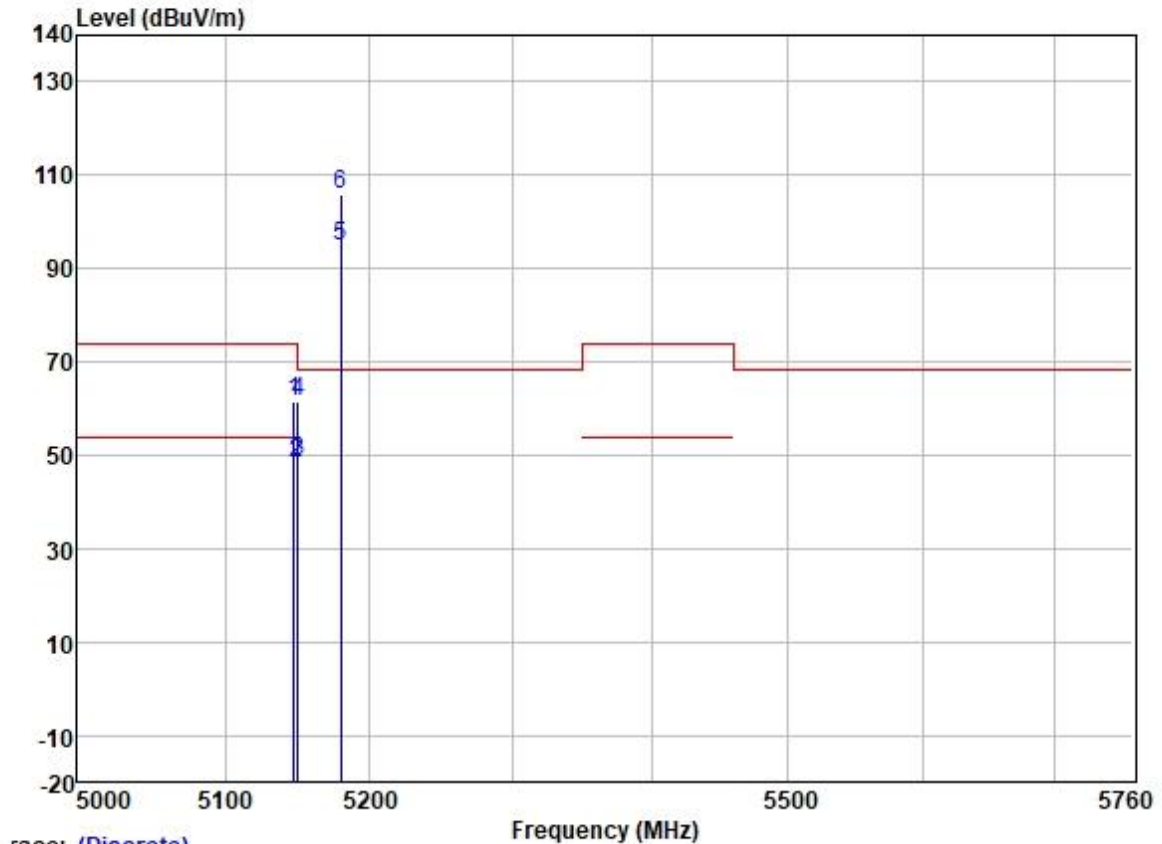

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5146.958	61.11	31.72	5.62	36.86	61.59	74.00	-12.41	HORIZONTAL Peak
2	5149.357	47.85	31.72	5.62	36.86	48.33	54.00	-5.67	HORIZONTAL Average
3	5149.980	48.22	31.72	5.62	36.86	48.70	54.00	-5.30	HORIZONTAL Average
4	5149.980	61.21	31.72	5.62	36.86	61.69	74.00	-12.31	HORIZONTAL Peak
5	5180.000	94.43	31.73	5.61	36.87	94.90	-----	-----	HORIZONTAL Average
6 *	5180.000	105.24	31.73	5.61	36.87	105.71	68.20	37.51	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

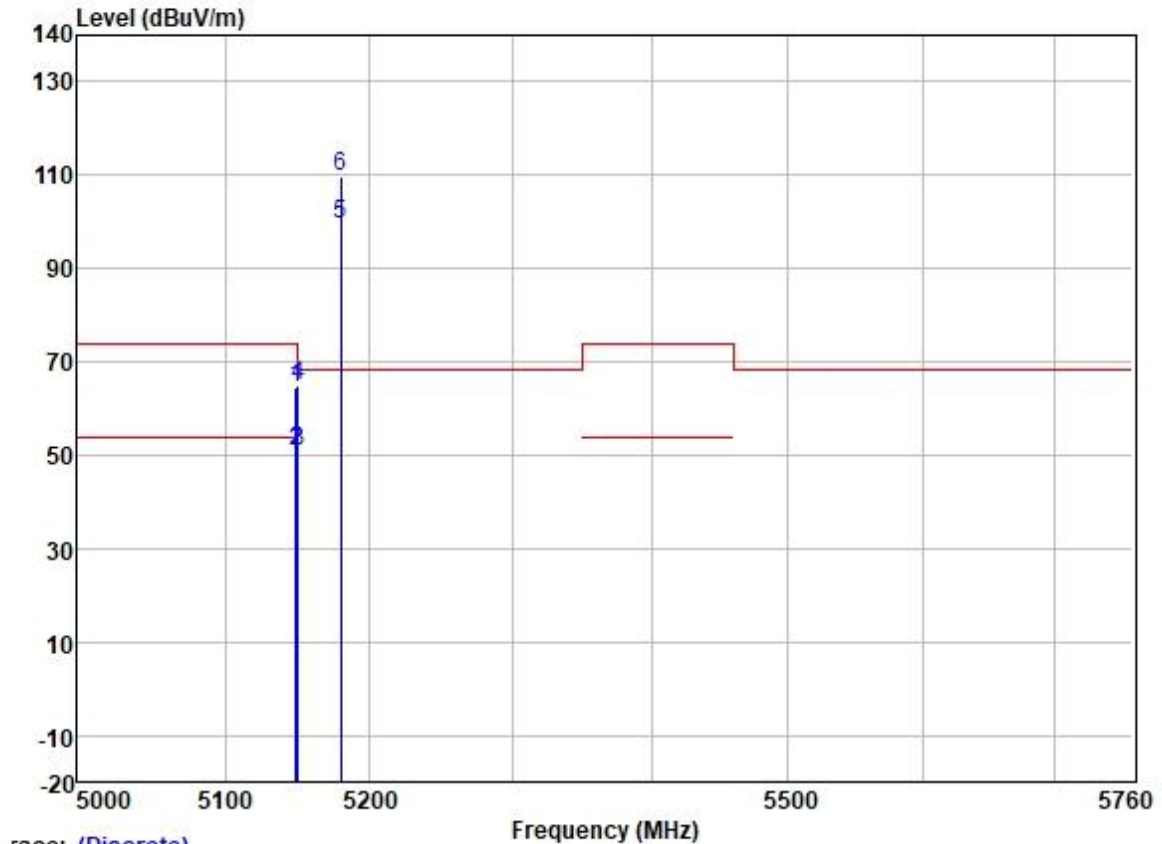

Trace: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5148.757	64.01	31.72	5.62	36.86	64.49	74.00	-9.51	VERTICAL	Peak
2	5149.458	50.28	31.72	5.62	36.86	50.76	54.00	-3.24	VERTICAL	Average
3	5149.980	50.27	31.72	5.62	36.86	50.75	54.00	-3.25	VERTICAL	Average
4	5149.980	64.60	31.72	5.62	36.86	65.08	74.00	-8.92	VERTICAL	Peak
5	5180.000	98.81	31.73	5.61	36.87	99.28	-----	-----	VERTICAL	Average
6 *	5180.000	109.11	31.73	5.61	36.87	109.58	68.20	41.38	VERTICAL	Peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

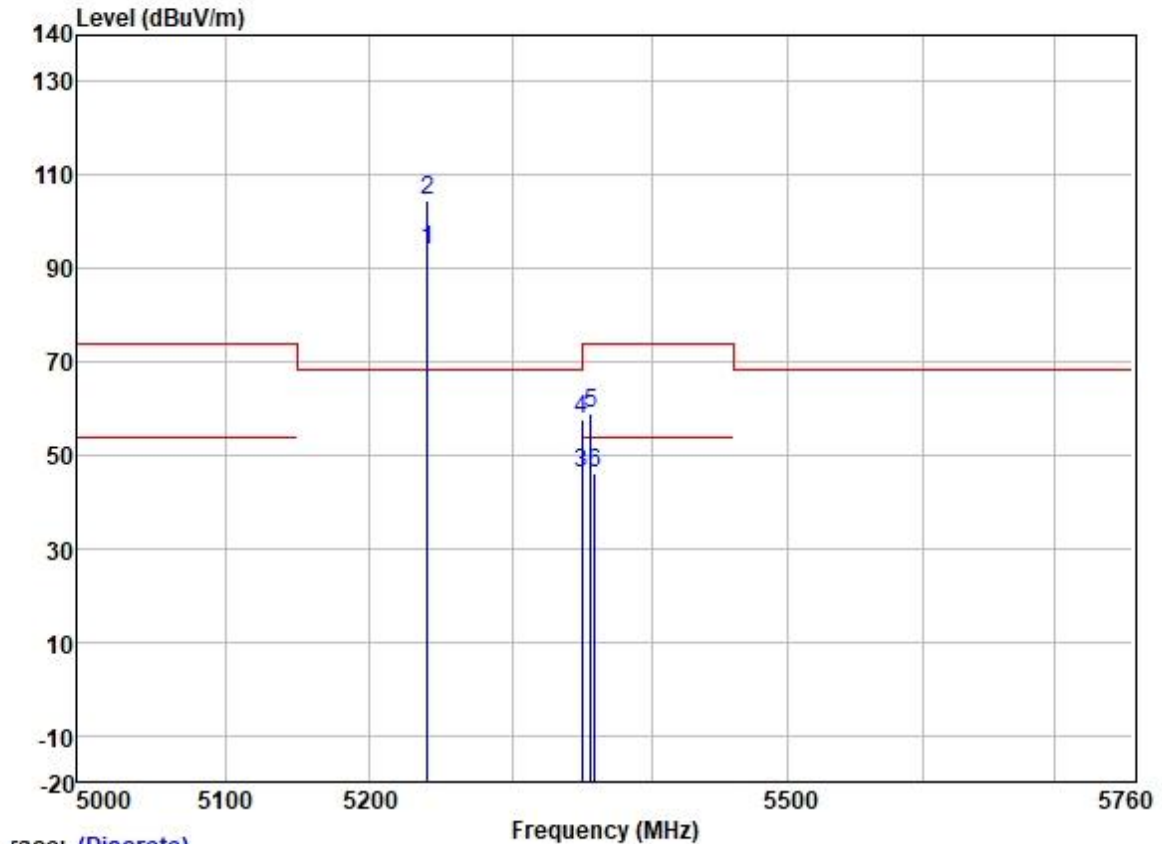


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	93.43	31.75	5.74	36.87	94.05	-----	-----	HORIZONTAL Average
2 *	5240.000	103.77	31.75	5.74	36.87	104.39	68.20	36.19	HORIZONTAL Peak
3	5350.020	45.04	31.77	6.05	36.88	45.98	54.00	-8.02	HORIZONTAL Average
4	5350.020	56.70	31.77	6.05	36.88	57.64	74.00	-16.36	HORIZONTAL Peak
5	5356.029	57.84	31.78	6.03	36.88	58.77	74.00	-15.23	HORIZONTAL Peak
6	5359.291	45.29	31.78	6.03	36.88	46.22	54.00	-7.78	HORIZONTAL Average

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

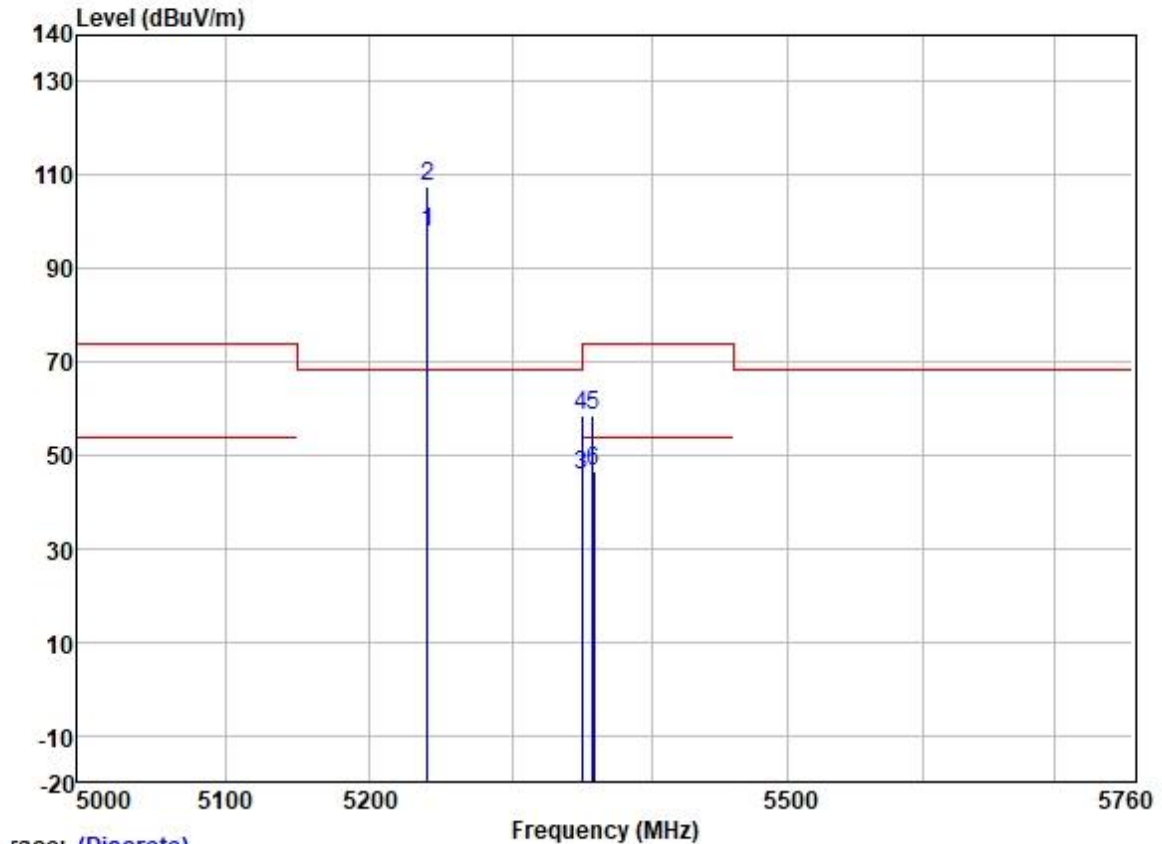

race: (Discrete)	Frequency (MHz)									
	Freq	ReadLevel	AntennaFactor	CableLoss	PreampFactor	Level	LimitLine	OverLimit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5240.000	97.01	31.75	5.74	36.87	97.63	-----	-----	VERTICAL	Average
2 *	5240.000	106.99	31.75	5.74	36.87	107.61	68.20	39.41	VERTICAL	Peak
3	5350.020	44.83	31.77	6.05	36.88	45.77	54.00	-8.23	VERTICAL	Average
4	5350.020	57.45	31.77	6.05	36.88	58.39	74.00	-15.61	VERTICAL	Peak
5	5357.730	57.58	31.78	6.03	36.88	58.51	74.00	-15.49	VERTICAL	Peak
6	5358.440	45.47	31.78	6.03	36.88	46.40	54.00	-7.60	VERTICAL	Average


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

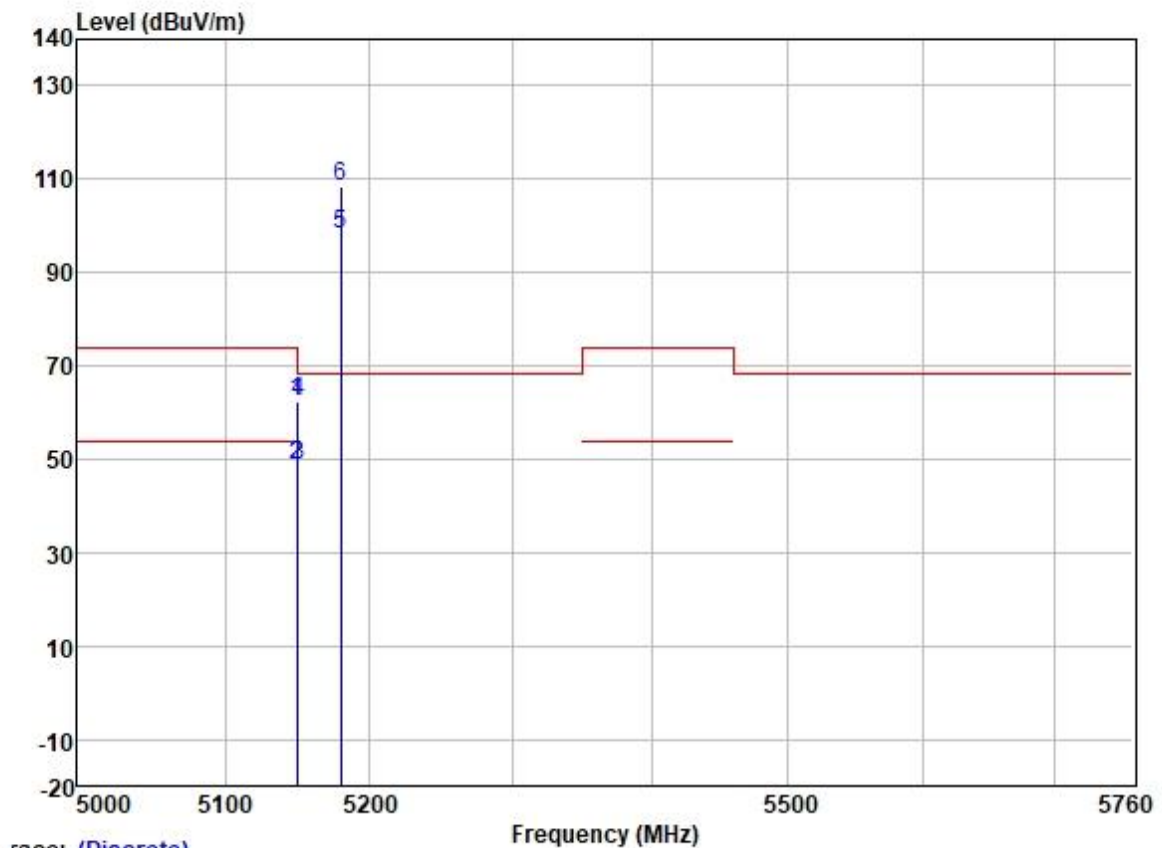

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	5149.157	61.94	31.72	5.62	36.86	62.42	74.00	-11.58	HORIZONTAL Peak
2	5149.458	48.35	31.72	5.62	36.86	48.83	54.00	-5.17	HORIZONTAL Average
3	5149.980	48.39	31.72	5.62	36.86	48.87	54.00	-5.13	HORIZONTAL Average
4	5149.980	61.66	31.72	5.62	36.86	62.14	74.00	-11.86	HORIZONTAL Peak
5	5180.000	97.76	31.73	5.61	36.87	98.23	-----	-----	HORIZONTAL Average
6 *	5180.000	107.82	31.73	5.61	36.87	108.29	68.20	40.09	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

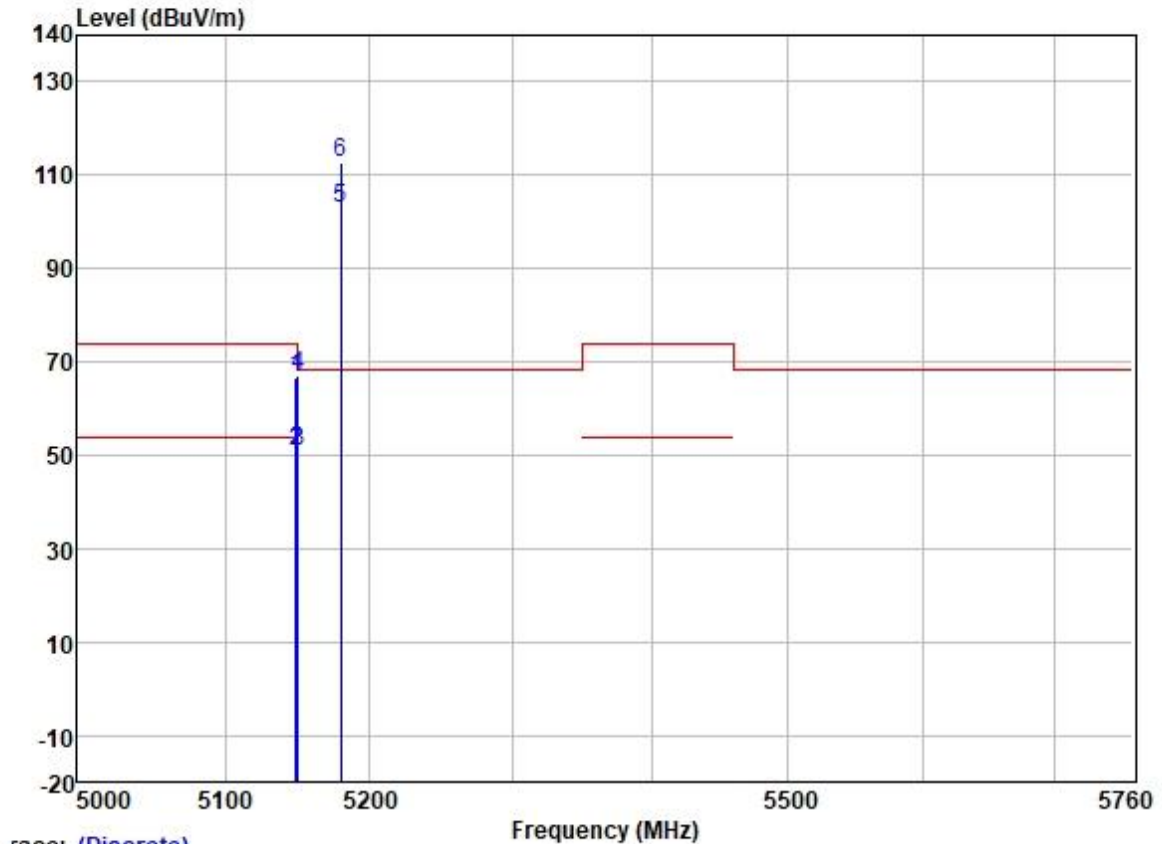

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5148.857	66.11	31.72	5.62	36.86	66.59	74.00	-7.41	VERTICAL
2	5149.257	50.40	31.72	5.62	36.86	50.88	54.00	-3.12	VERTICAL
3	5149.980	50.50	31.72	5.62	36.86	50.98	54.00	-3.02	VERTICAL
4	5149.980	66.42	31.72	5.62	36.86	66.90	74.00	-7.10	VERTICAL
5	5180.000	102.50	31.73	5.61	36.87	102.97	-----	-----	VERTICAL
6 *	5180.000	112.20	31.73	5.61	36.87	112.67	68.20	44.47	VERTICAL


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

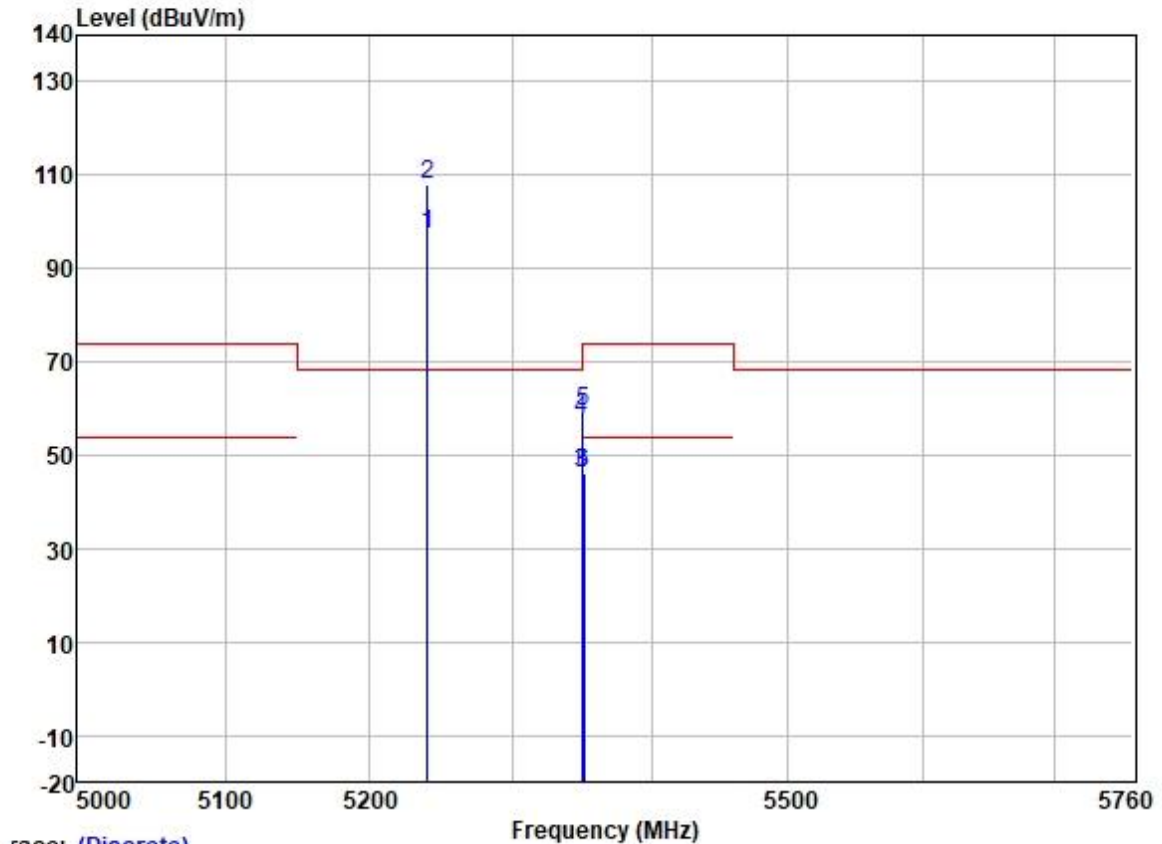

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	96.81	31.75	5.74	36.87	97.43	-----	-----	HORIZONTAL Average
2 *	5240.000	107.29	31.75	5.74	36.87	107.91	68.20	39.71	HORIZONTAL Peak
3	5350.020	45.14	31.77	6.05	36.88	46.08	54.00	-7.92	HORIZONTAL Average
4	5350.020	56.58	31.77	6.05	36.88	57.52	74.00	-16.48	HORIZONTAL Peak
5	5350.504	58.40	31.77	6.05	36.88	59.34	74.00	-14.66	HORIZONTAL Peak
6	5351.070	45.25	31.77	6.05	36.88	46.19	54.00	-7.81	HORIZONTAL Average

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

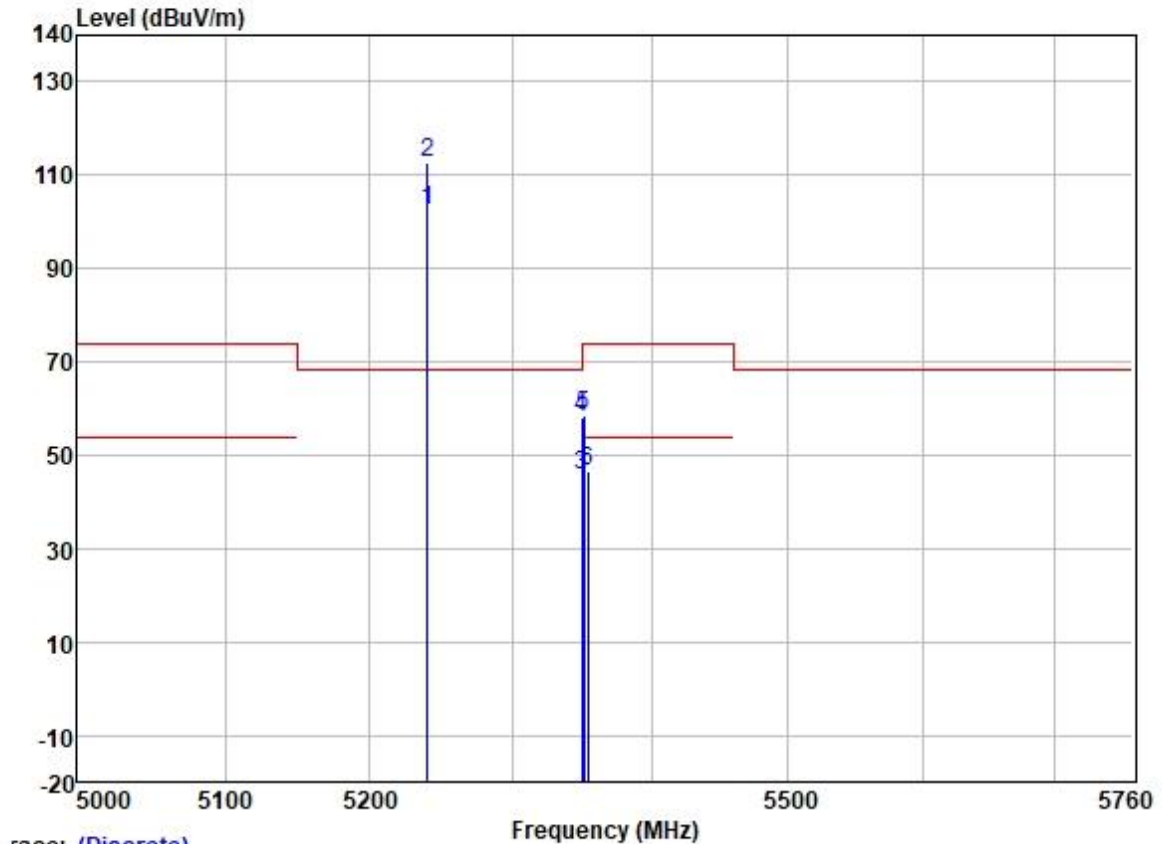


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5240.000	102.00	31.75	5.74	36.87	102.62	-----	-----	VERTICAL	Average
2 *	5240.000	111.95	31.75	5.74	36.87	112.57	68.20	44.37	VERTICAL	Peak
3	5350.020	44.95	31.77	6.05	36.88	45.89	54.00	-8.11	VERTICAL	Average
4	5350.020	57.23	31.77	6.05	36.88	58.17	74.00	-15.83	VERTICAL	Peak
5	5351.070	57.76	31.77	6.05	36.88	58.70	74.00	-15.30	VERTICAL	Peak
6	5354.187	45.48	31.78	6.03	36.88	46.41	54.00	-7.59	VERTICAL	Average

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

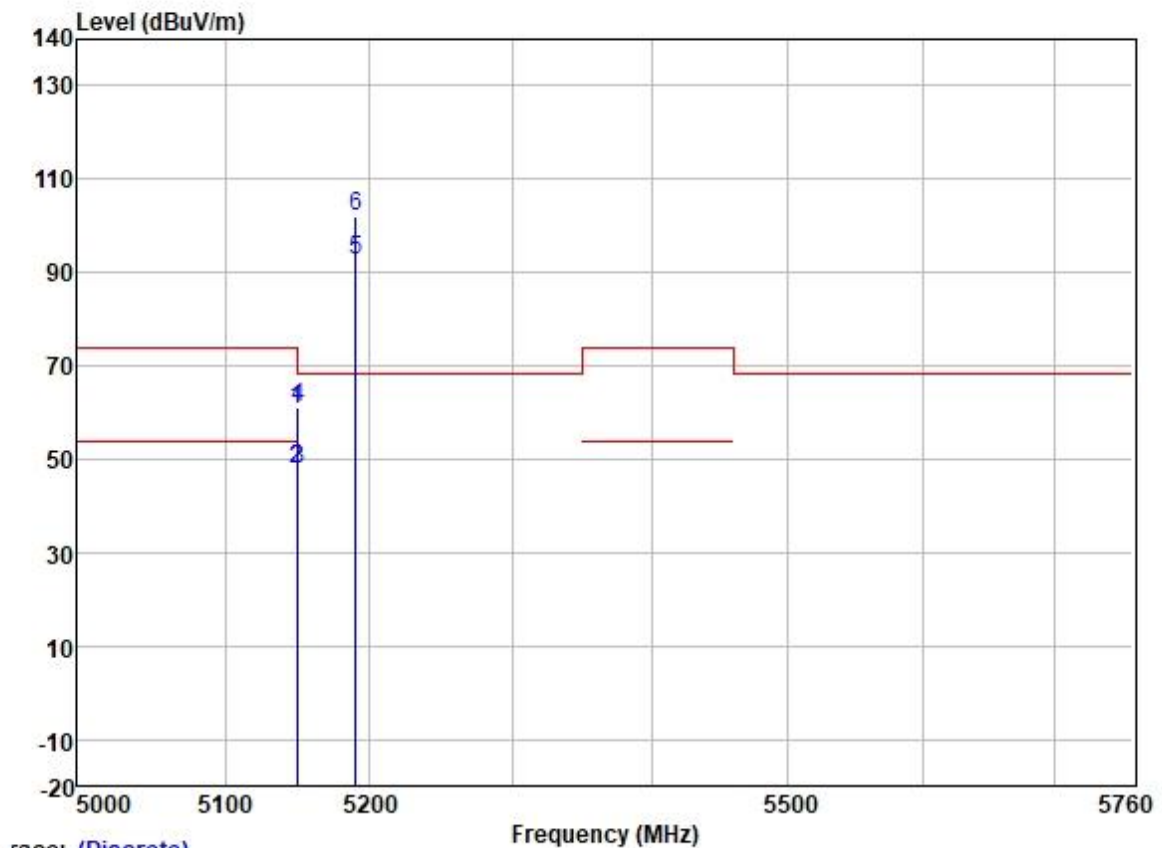


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.342	60.35	31.72	5.62	36.86	60.83	74.00	-13.17	HORIZONTAL Peak
2	5149.461	47.37	31.72	5.62	36.86	47.85	54.00	-6.15	HORIZONTAL Average
3	5149.980	47.44	31.72	5.62	36.86	47.92	54.00	-6.08	HORIZONTAL Average
4	5149.980	60.60	31.72	5.62	36.86	61.08	74.00	-12.92	HORIZONTAL Peak
5	5190.000	92.00	31.73	5.60	36.87	92.46	-----	-----	HORIZONTAL Average
6 *	5190.000	101.66	31.73	5.60	36.87	102.12	68.20	33.92	HORIZONTAL Peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

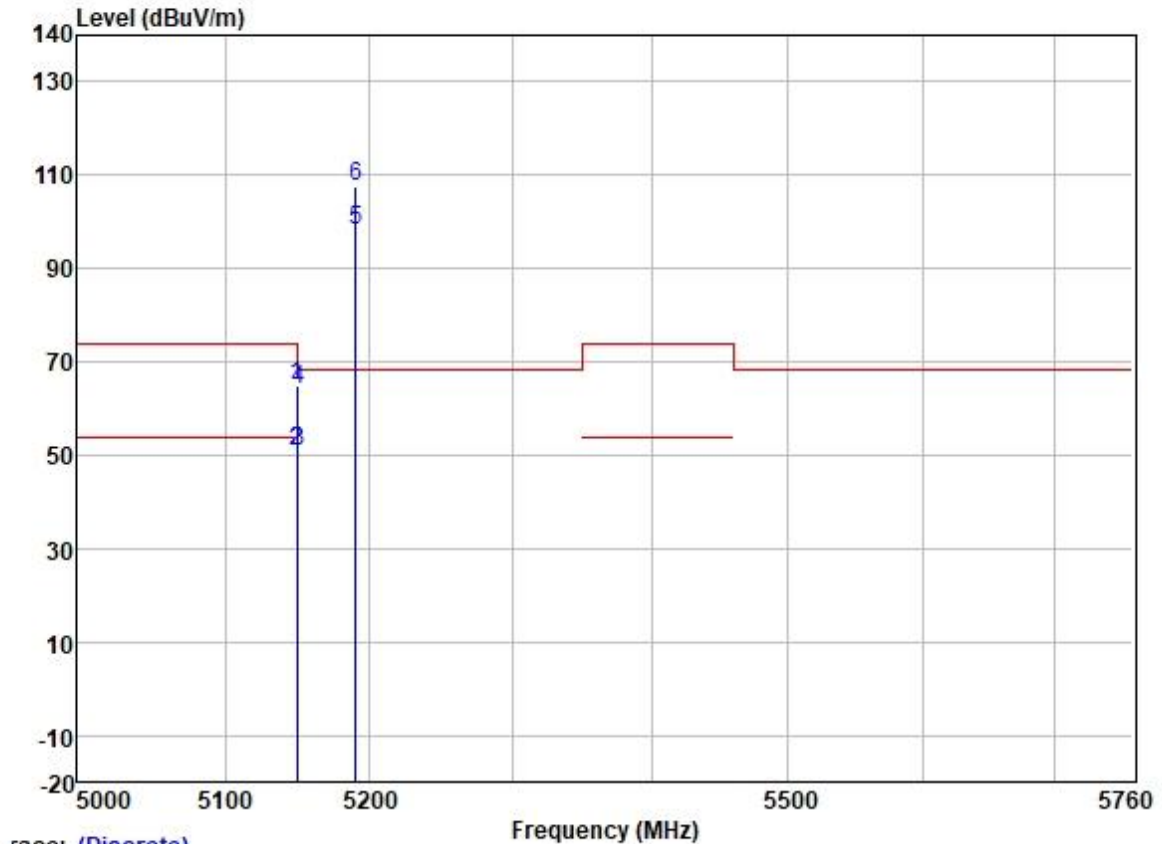


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5149.102	64.35	31.72	5.62	36.86	64.83	74.00	-9.17	VERTICAL	Peak
2	5149.342	50.35	31.72	5.62	36.86	50.83	54.00	-3.17	VERTICAL	Average
3	5149.980	50.47	31.72	5.62	36.86	50.95	54.00	-3.05	VERTICAL	Average
4	5149.980	63.63	31.72	5.62	36.86	64.11	74.00	-9.89	VERTICAL	Peak
5	5190.000	97.52	31.73	5.60	36.87	97.98	-----	-----	VERTICAL	Average
6 *	5190.000	107.23	31.73	5.60	36.87	107.69	68.20	39.49	VERTICAL	Peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

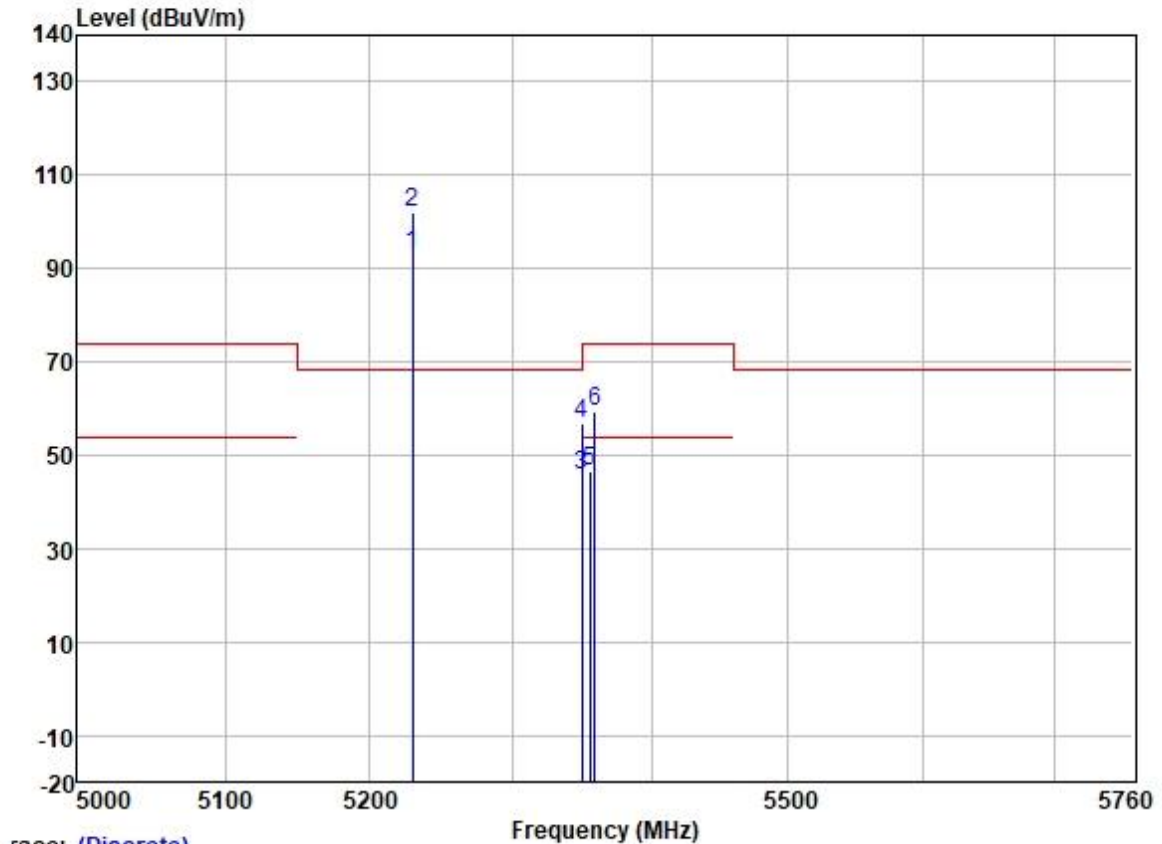

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	92.45	31.74	5.70	36.87	93.02	-----	-----	HORIZONTAL Average
2	* 5230.000	101.66	31.74	5.70	36.87	102.23	68.20	34.03	HORIZONTAL Peak
3	5350.020	44.91	31.77	6.05	36.88	45.85	54.00	-8.15	HORIZONTAL Average
4	5350.020	56.05	31.77	6.05	36.88	56.99	74.00	-17.01	HORIZONTAL Peak
5	5355.129	45.49	31.78	6.03	36.88	46.42	54.00	-7.58	HORIZONTAL Average
6	5359.188	58.53	31.78	6.03	36.88	59.46	74.00	-14.54	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

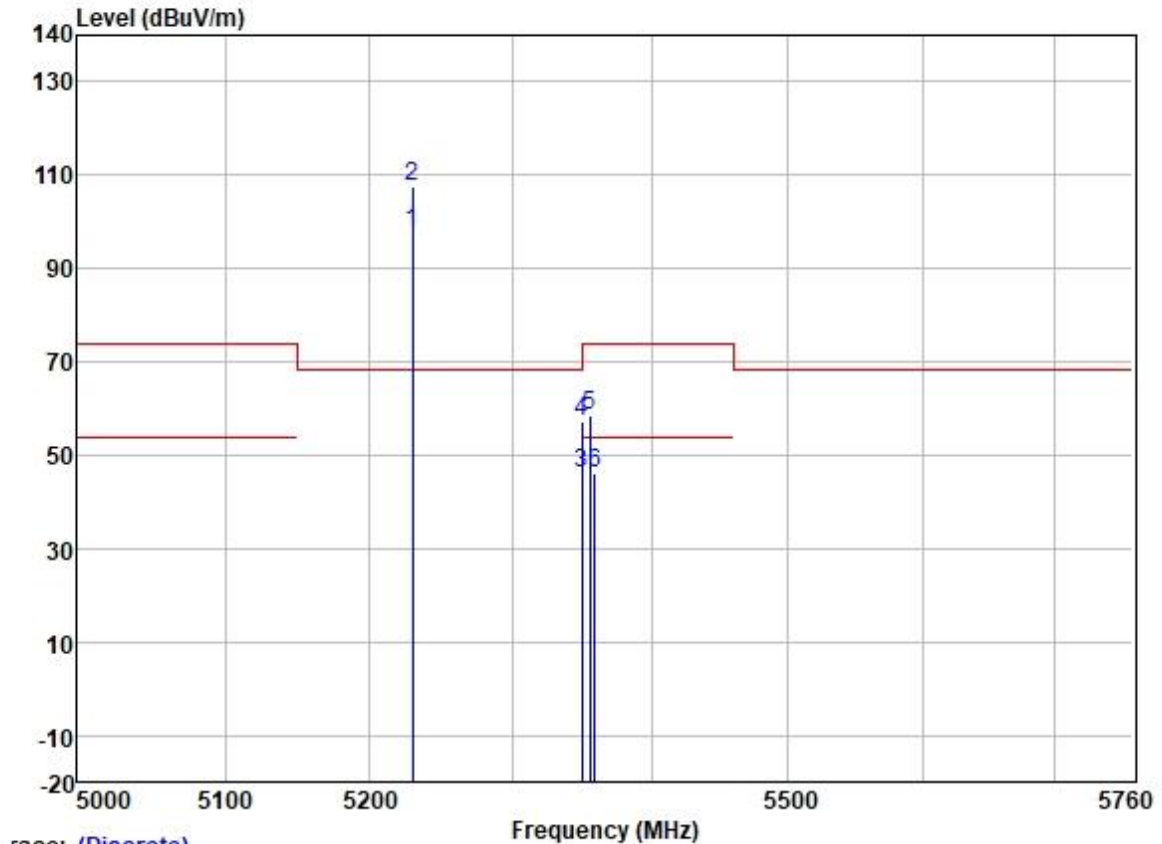

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5230.000	97.11	31.74	5.70	36.87	97.68	-----	-----	VERTICAL	Average
2 *	5230.000	106.89	31.74	5.70	36.87	107.46	68.20	39.26	VERTICAL	Peak
3	5350.020	45.29	31.77	6.05	36.88	46.23	54.00	-7.77	VERTICAL	Average
4	5350.020	56.46	31.77	6.05	36.88	57.40	74.00	-16.60	VERTICAL	Peak
5	5355.778	57.61	31.78	6.03	36.88	58.54	74.00	-15.46	VERTICAL	Peak
6	5359.350	45.21	31.78	6.03	36.88	46.14	54.00	-7.86	VERTICAL	Average


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

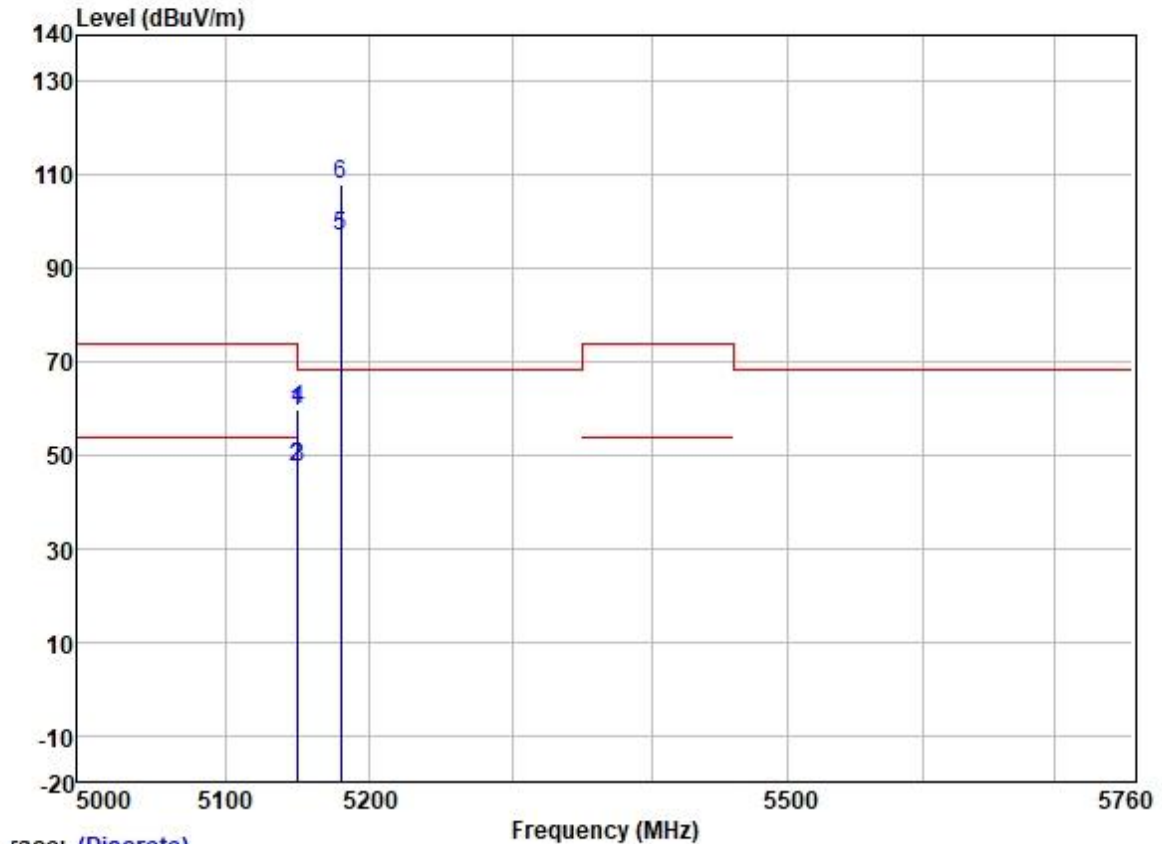

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5149.257	58.96	31.72	5.62	36.86	59.44	74.00	-14.56	HORIZONTAL	Peak
2	5149.357	47.00	31.72	5.62	36.86	47.48	54.00	-6.52	HORIZONTAL	Average
3	5149.980	46.80	31.72	5.62	36.86	47.28	54.00	-6.72	HORIZONTAL	Average
4	5149.980	59.15	31.72	5.62	36.86	59.63	74.00	-14.37	HORIZONTAL	Peak
5	5180.000	96.43	31.73	5.61	36.87	96.90	-----	-----	HORIZONTAL	Average
6 *	5180.000	107.32	31.73	5.61	36.87	107.79	68.20	39.59	HORIZONTAL	Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

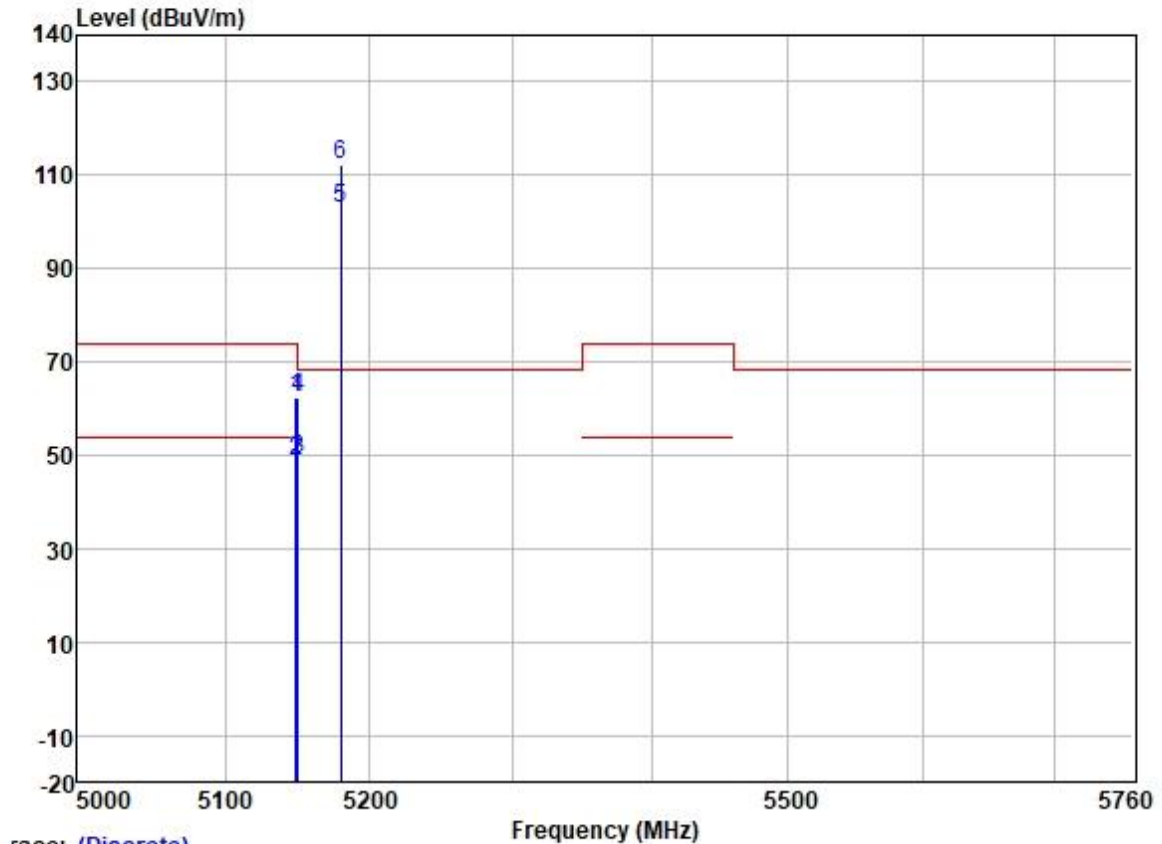

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5148.558	61.78	31.72	5.62	36.86	62.26	74.00	-11.74	VERTICAL
2	5149.458	48.23	31.72	5.62	36.86	48.71	54.00	-5.29	VERTICAL
3	5149.980	48.52	31.72	5.62	36.86	49.00	54.00	-5.00	VERTICAL
4	5149.980	62.07	31.72	5.62	36.86	62.55	74.00	-11.45	VERTICAL
5	5180.000	102.22	31.73	5.61	36.87	102.69	-----	-----	VERTICAL
6 *	5180.000	111.88	31.73	5.61	36.87	112.35	68.20	44.15	VERTICAL


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

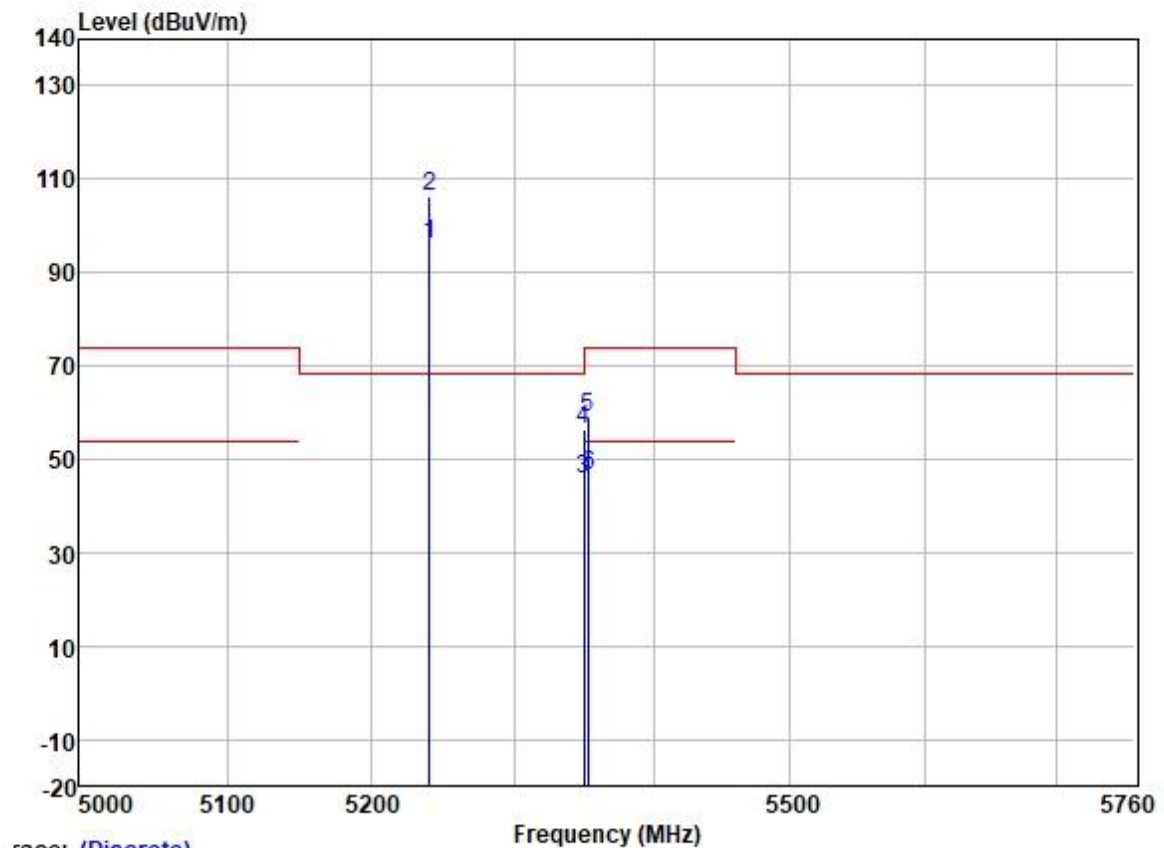

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	95.51	31.75	5.74	36.87	96.13	-----	-----	HORIZONTAL Average
2 *	5240.000	105.87	31.75	5.74	36.87	106.49	68.20	38.29	HORIZONTAL Peak
3	5350.020	44.94	31.77	6.05	36.88	45.88	54.00	-8.12	HORIZONTAL Average
4	5350.020	55.53	31.77	6.05	36.88	56.47	74.00	-17.53	HORIZONTAL Peak
5	5352.345	57.88	31.77	6.05	36.88	58.82	74.00	-15.18	HORIZONTAL Peak
6	5353.195	45.56	31.77	6.05	36.88	46.50	54.00	-7.50	HORIZONTAL Average


Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

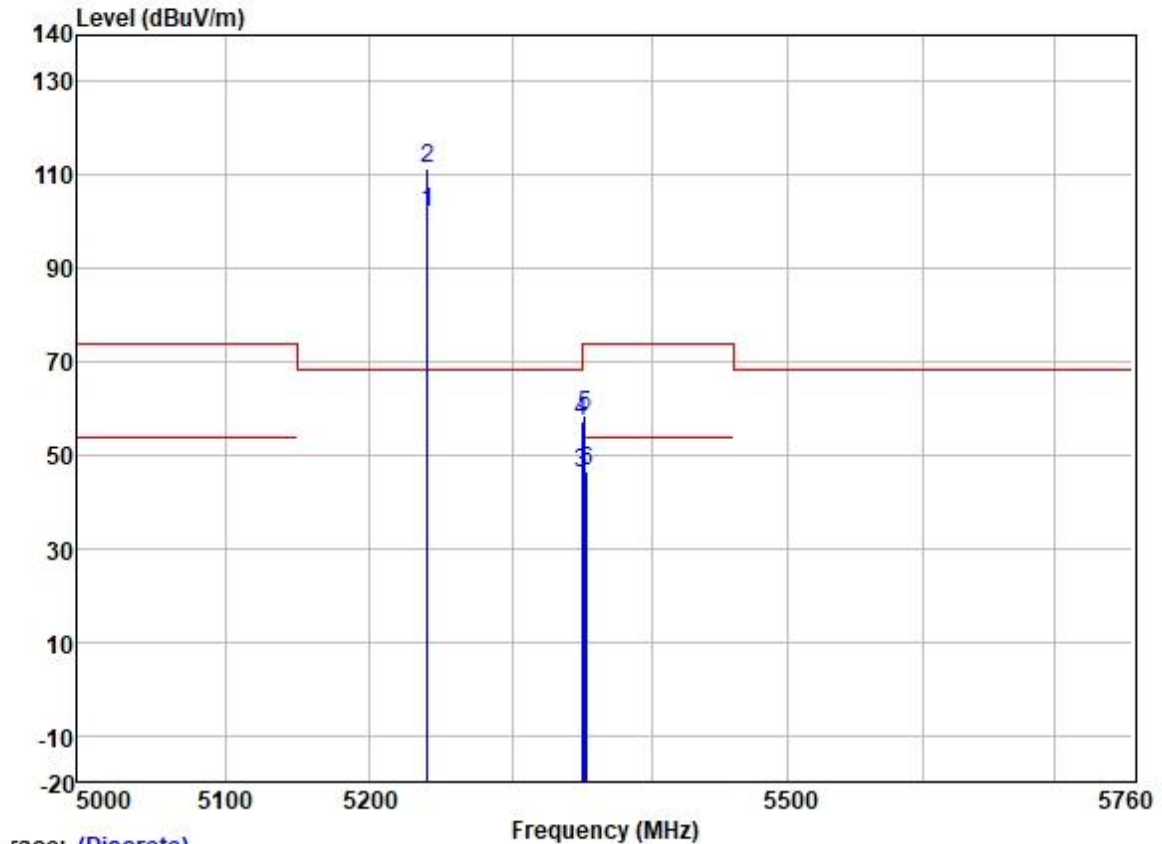

Trace: (Discrete)

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Limit Line	Over Limit	Pol/Phase	Remark			
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5240.000	101.21	31.75	5.74	36.87	101.83	-----	-----	VERTICAL	Average
2 *	5240.000	111.00	31.75	5.74	36.87	111.62	68.20	43.42	VERTICAL	Peak
3	5350.020	45.10	31.77	6.05	36.88	46.04	54.00	-7.96	VERTICAL	Average
4	5350.020	56.19	31.77	6.05	36.88	57.13	74.00	-16.87	VERTICAL	Peak
5	5351.920	57.66	31.77	6.05	36.88	58.60	74.00	-15.40	VERTICAL	Peak
6	5353.620	45.62	31.77	6.05	36.88	46.56	54.00	-7.44	VERTICAL	Average


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

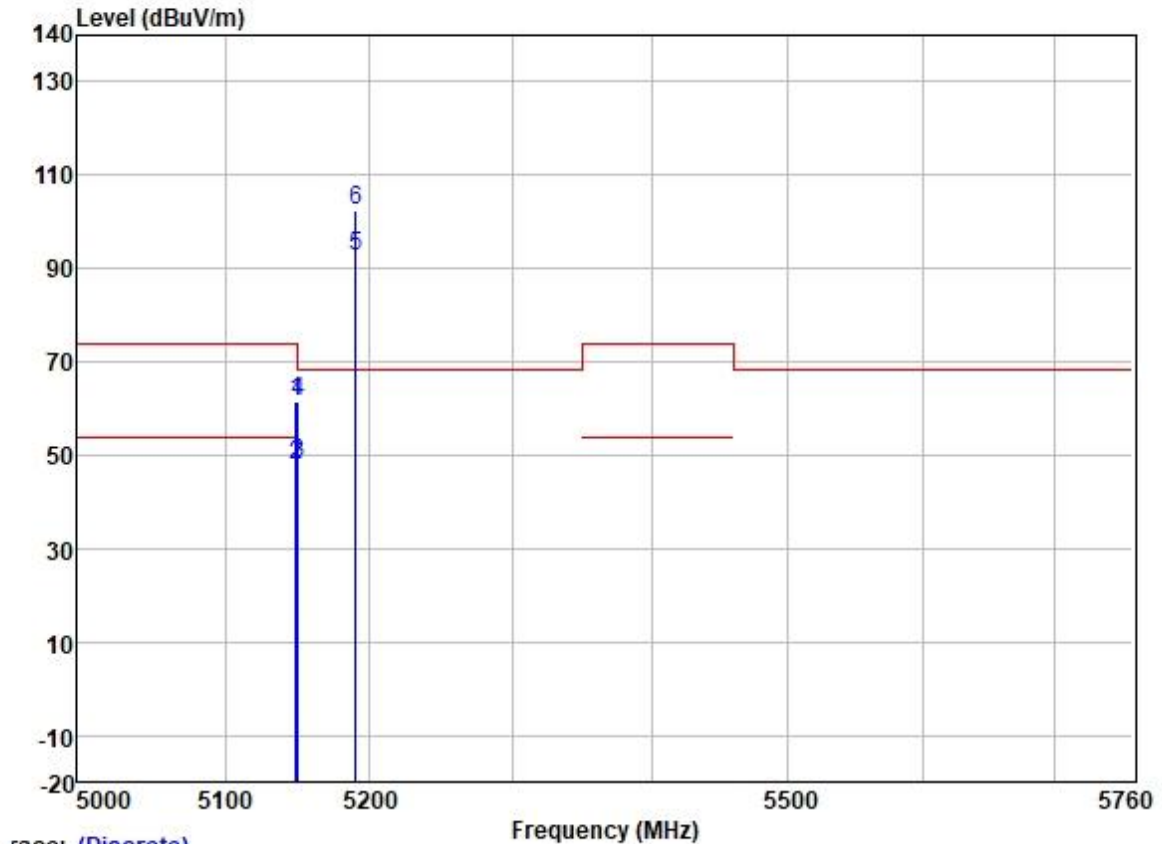

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5148.623	61.20	31.72	5.62	36.86	61.68	74.00	-12.32	HORIZONTAL Peak
2	5149.461	47.36	31.72	5.62	36.86	47.84	54.00	-6.16	HORIZONTAL Average
3	5149.980	47.88	31.72	5.62	36.86	48.36	54.00	-5.64	HORIZONTAL Average
4	5149.980	60.97	31.72	5.62	36.86	61.45	74.00	-12.55	HORIZONTAL Peak
5	5190.000	92.23	31.73	5.60	36.87	92.69	-----	-----	HORIZONTAL Average
6 *	5190.000	101.88	31.73	5.60	36.87	102.34	68.20	34.14	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

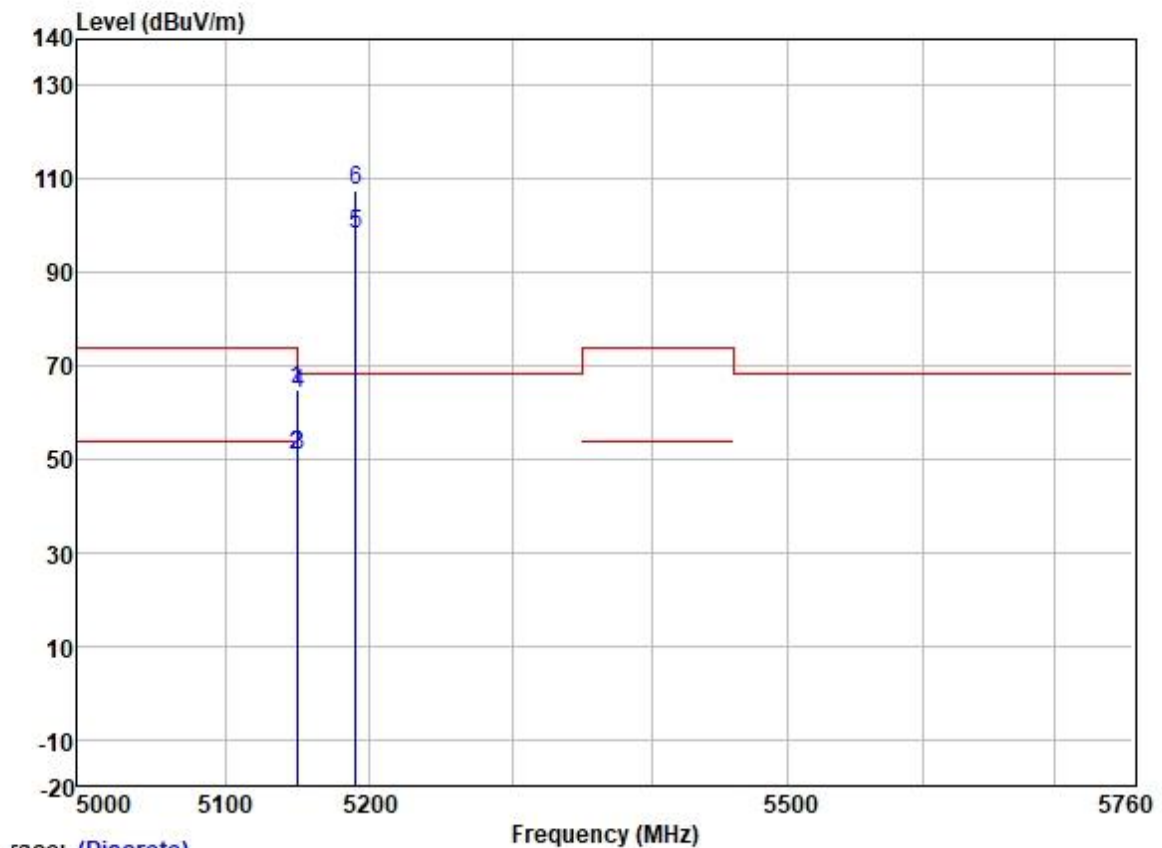

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.222	64.34	31.72	5.62	36.86	64.82	74.00	-9.18	VERTICAL Peak
2	5149.342	50.27	31.72	5.62	36.86	50.75	54.00	-3.25	VERTICAL Average
3	5149.980	50.41	31.72	5.62	36.86	50.89	54.00	-3.11	VERTICAL Average
4	5149.980	63.56	31.72	5.62	36.86	64.04	74.00	-9.96	VERTICAL Peak
5	5190.000	97.53	31.73	5.60	36.87	97.99	-----	-----	VERTICAL Average
6 *	5190.000	107.28	31.73	5.60	36.87	107.74	68.20	39.54	VERTICAL Peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

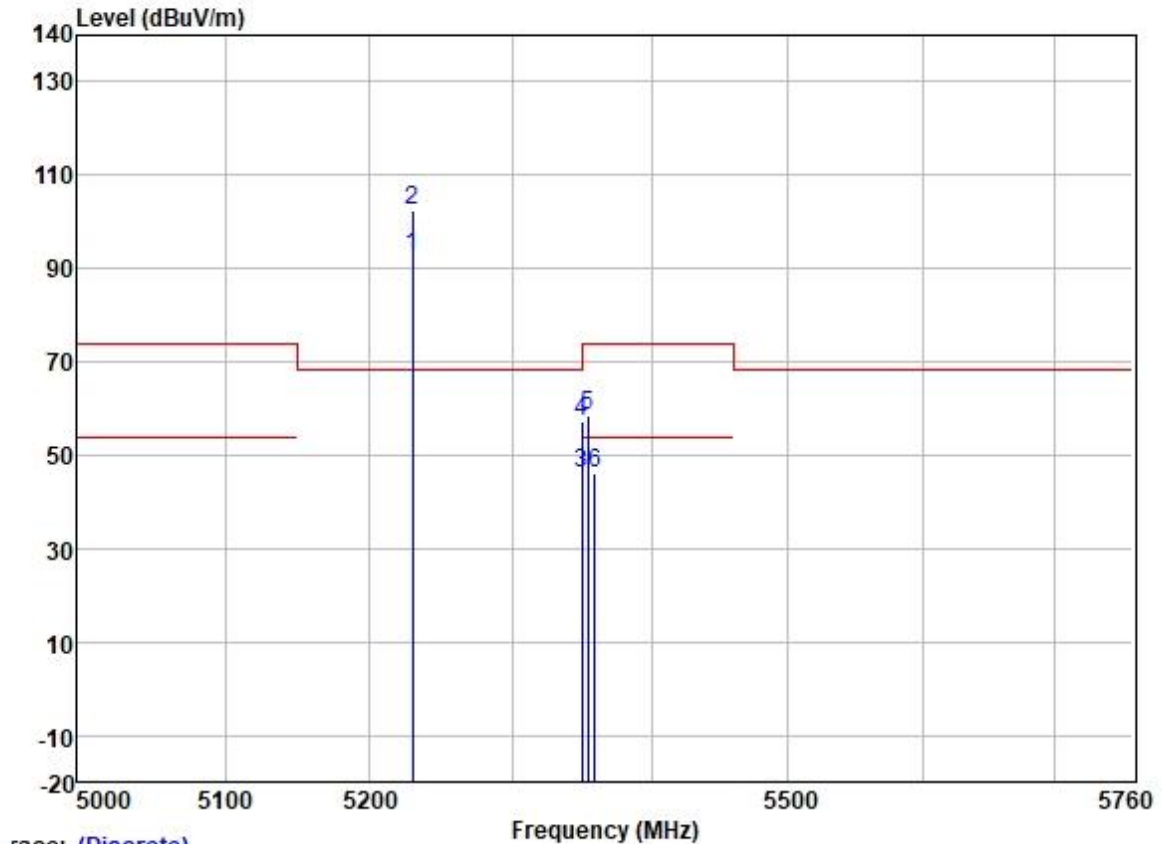

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	92.23	31.74	5.70	36.87	92.80	-----	-----	HORIZONTAL Average
2	* 5230.000	101.79	31.74	5.70	36.87	102.36	68.20	34.16	HORIZONTAL Peak
3	5350.020	45.24	31.77	6.05	36.88	46.18	54.00	-7.82	HORIZONTAL Average
4	5350.020	56.13	31.77	6.05	36.88	57.07	74.00	-16.93	HORIZONTAL Peak
5	5354.318	57.47	31.78	6.03	36.88	58.40	74.00	-15.60	HORIZONTAL Peak
6	5359.025	45.14	31.78	6.03	36.88	46.07	54.00	-7.93	HORIZONTAL Average

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

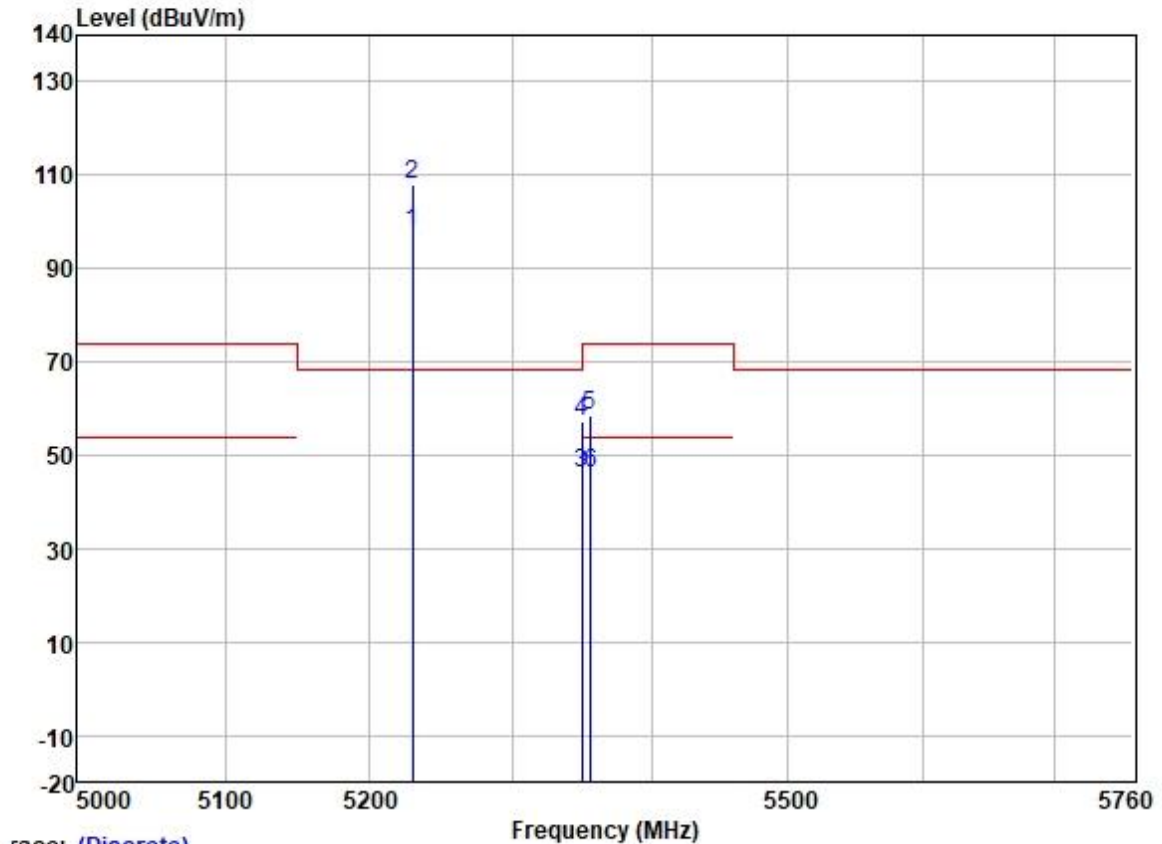

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	97.30	31.74	5.70	36.87	97.87	-----	-----	VERTICAL Average
2 *	5230.000	107.40	31.74	5.70	36.87	107.97	68.20	39.77	VERTICAL Peak
3	5350.020	45.19	31.77	6.05	36.88	46.13	54.00	-7.87	VERTICAL Average
4	5350.020	56.14	31.77	6.05	36.88	57.08	74.00	-16.92	VERTICAL Peak
5	5355.454	57.64	31.78	6.03	36.88	58.57	74.00	-15.43	VERTICAL Peak
6	5356.265	45.21	31.78	6.03	36.88	46.14	54.00	-7.86	VERTICAL Average


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

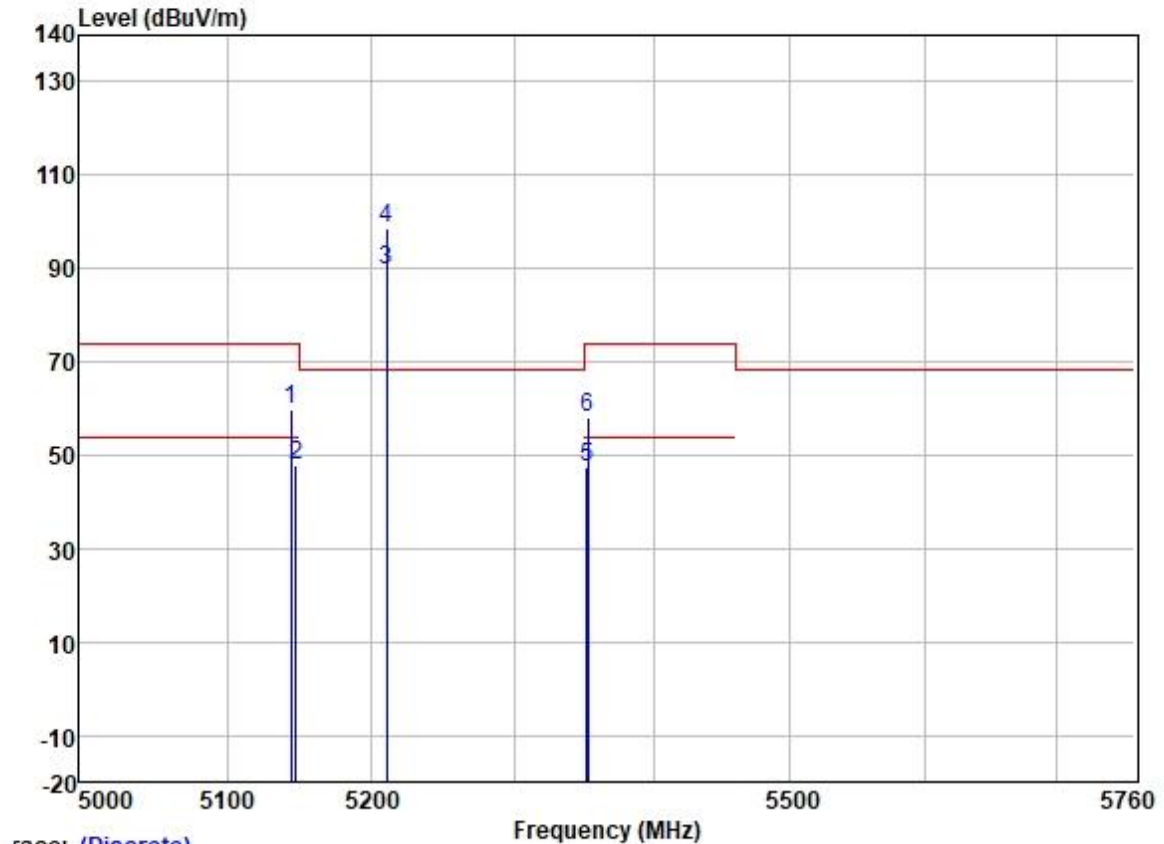

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5143.805	59.50	31.72	5.62	36.86	59.98	74.00	-14.02	HORIZONTAL Peak
2	5147.386	47.39	31.72	5.62	36.86	47.87	54.00	-6.13	HORIZONTAL Average
3	5210.000	89.10	31.74	5.65	36.87	89.62	-----	-----	HORIZONTAL Average
4 *	5210.000	98.28	31.74	5.65	36.87	98.80	68.20	30.60	HORIZONTAL Peak
5	5351.744	46.29	31.77	6.05	36.88	47.23	54.00	-6.77	HORIZONTAL Average
6	5352.276	57.06	31.77	6.05	36.88	58.00	74.00	-16.00	HORIZONTAL Peak

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

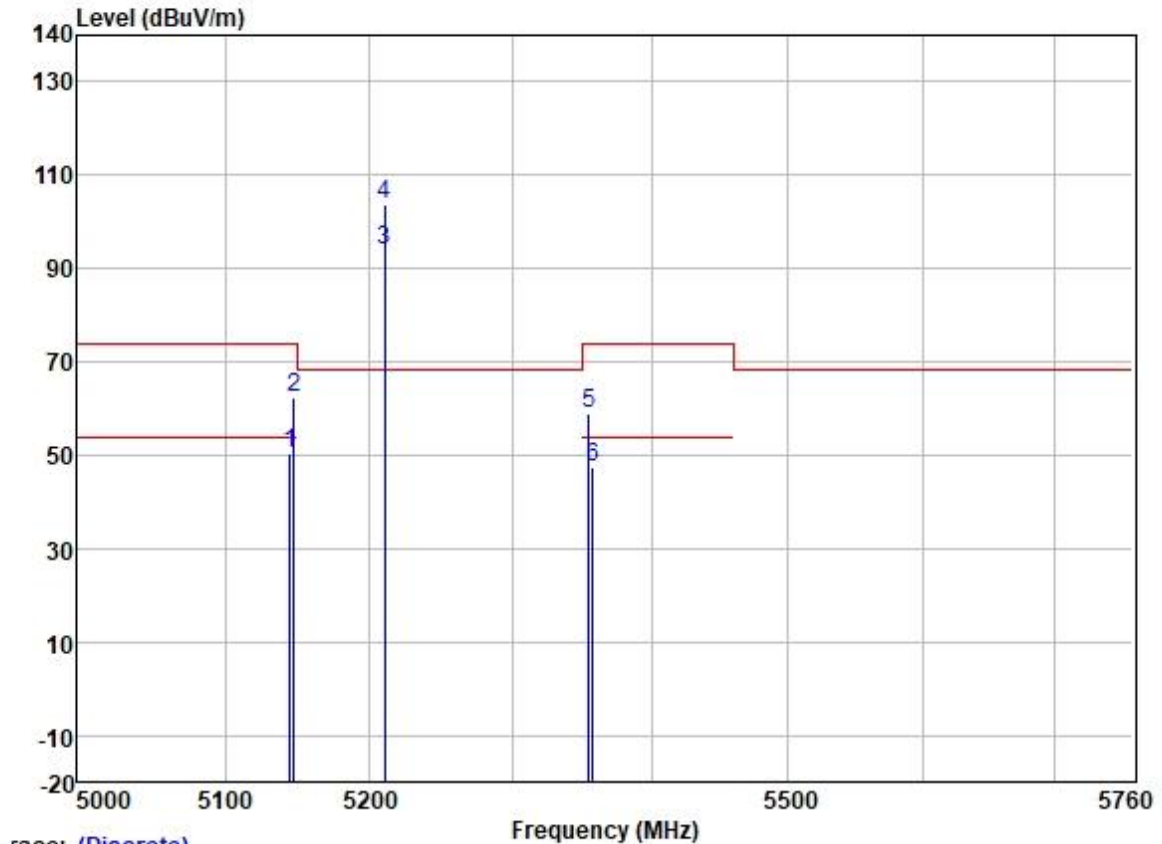

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5144.316	49.83	31.72	5.62	36.86	50.31	54.00	-3.69	VERTICAL
2	5147.130	62.01	31.72	5.62	36.86	62.49	74.00	-11.51	VERTICAL
3	5210.000	93.60	31.74	5.65	36.87	94.12	-----	-----	VERTICAL
4 *	5210.000	103.15	31.74	5.65	36.87	103.67	68.20	35.47	VERTICAL
5	5354.938	57.85	31.78	6.03	36.88	58.78	74.00	-15.22	VERTICAL
6	5357.868	46.39	31.78	6.03	36.88	47.32	54.00	-6.68	VERTICAL


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

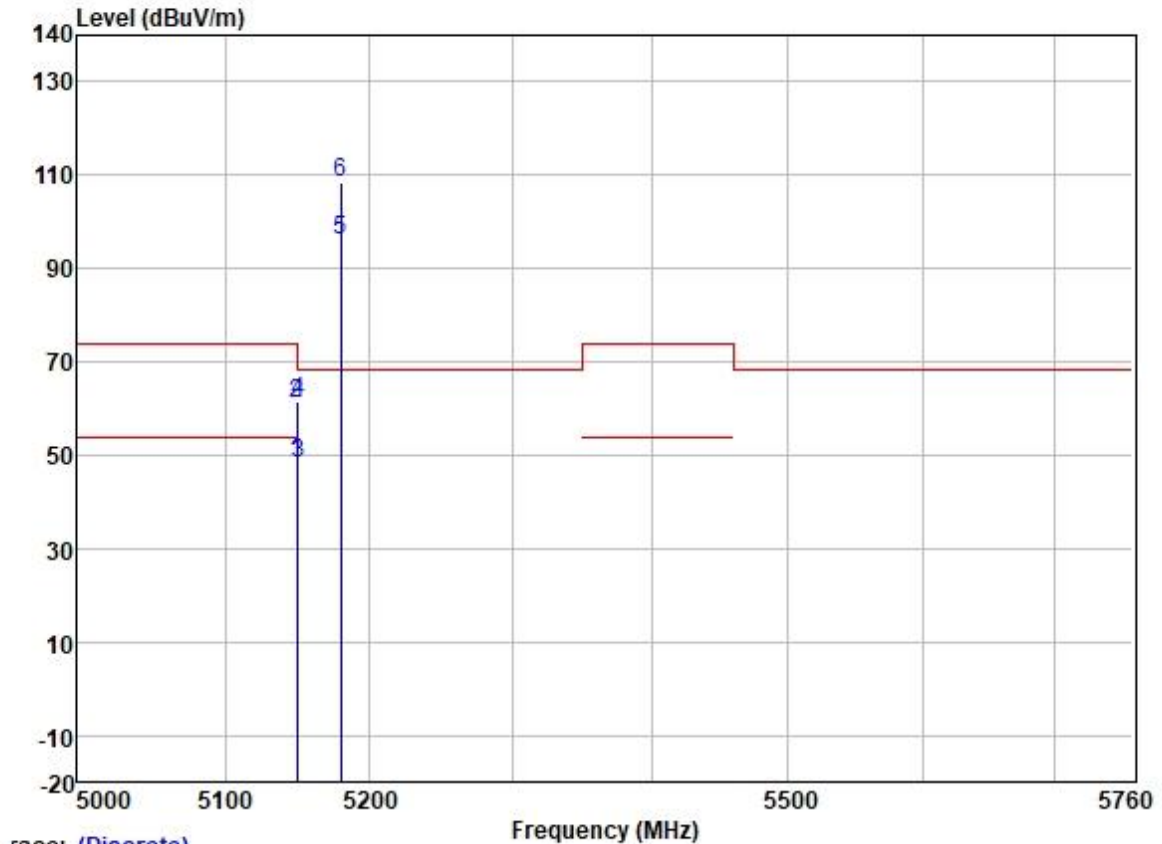

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.357	47.77	31.72	5.62	36.86	48.25	54.00	-5.75	HORIZONTAL Average
2	5149.357	60.41	31.72	5.62	36.86	60.89	74.00	-13.11	HORIZONTAL Peak
3	5149.980	47.75	31.72	5.62	36.86	48.23	54.00	-5.77	HORIZONTAL Average
4	5149.980	60.93	31.72	5.62	36.86	61.41	74.00	-12.59	HORIZONTAL Peak
5	5180.000	95.77	31.73	5.61	36.87	96.24	-----	-----	HORIZONTAL Average
6 *	5180.000	108.08	31.73	5.61	36.87	108.55	68.20	40.35	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

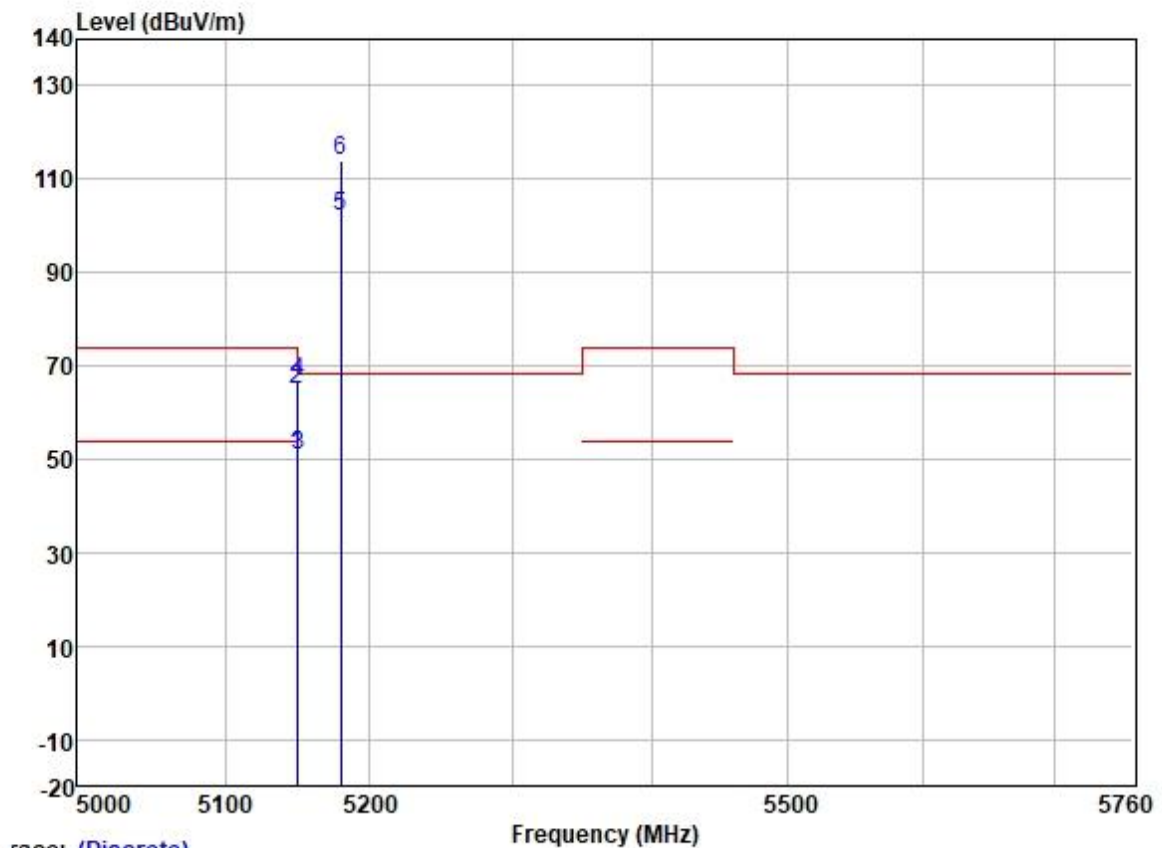

race: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5149.357	50.29	31.72	5.62	36.86	50.77	54.00	-3.23	VERTICAL	Average
2	5149.458	64.40	31.72	5.62	36.86	64.88	74.00	-9.12	VERTICAL	Peak
3	5149.980	50.50	31.72	5.62	36.86	50.98	54.00	-3.02	VERTICAL	Average
4	5149.980	66.04	31.72	5.62	36.86	66.52	74.00	-7.48	VERTICAL	Peak
5	5180.000	101.44	31.73	5.61	36.87	101.91	-----	-----	VERTICAL	Average
6 *	5180.000	113.54	31.73	5.61	36.87	114.01	68.20	45.81	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

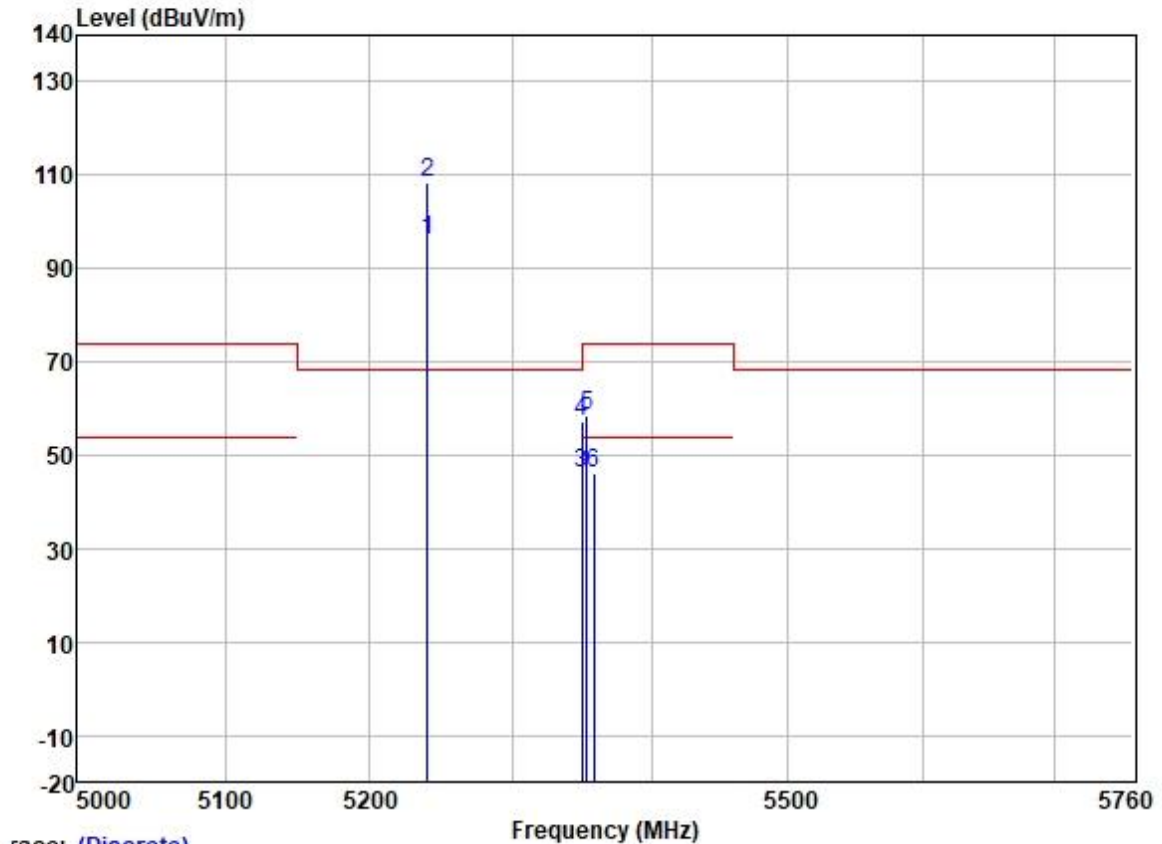

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	95.42	31.75	5.74	36.87	96.04	-----	-----	HORIZONTAL Average
2 *	5240.000	107.90	31.75	5.74	36.87	108.52	68.20	40.32	HORIZONTAL Peak
3	5350.020	45.12	31.77	6.05	36.88	46.06	54.00	-7.94	HORIZONTAL Average
4	5350.020	56.15	31.77	6.05	36.88	57.09	74.00	-16.91	HORIZONTAL Peak
5	5353.479	57.41	31.77	6.05	36.88	58.35	74.00	-15.65	HORIZONTAL Peak
6	5358.156	45.32	31.78	6.03	36.88	46.25	54.00	-7.75	HORIZONTAL Average


Test Mode: 02; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

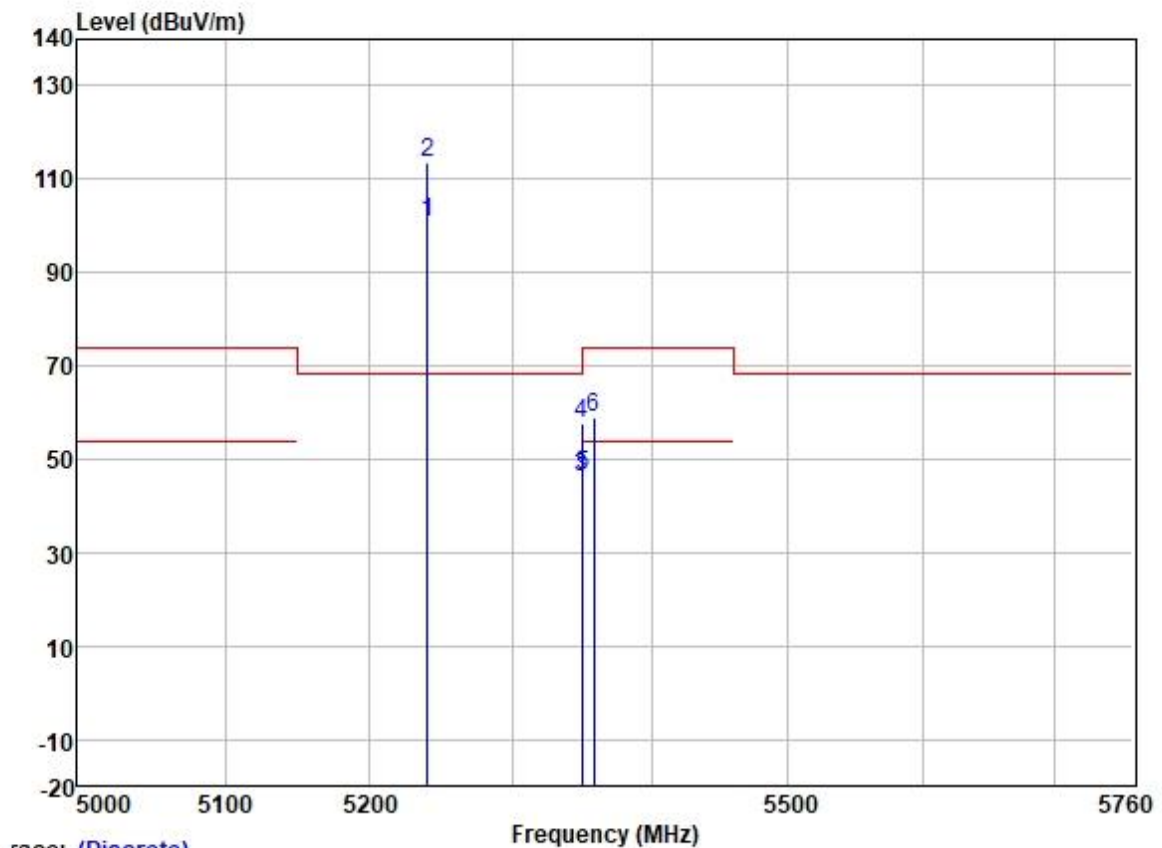

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	100.33	31.75	5.74	36.87	100.95	-----	-----	VERTICAL
2	5240.000	112.79	31.75	5.74	36.87	113.41	68.20	45.21	VERTICAL
3	5350.020	45.32	31.77	6.05	36.88	46.26	54.00	-7.74	VERTICAL
4	5350.020	56.72	31.77	6.05	36.88	57.66	74.00	-16.34	VERTICAL
5	5350.787	45.65	31.77	6.05	36.88	46.59	54.00	-7.41	VERTICAL
6	5358.440	58.00	31.78	6.03	36.88	58.93	74.00	-15.07	VERTICAL


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

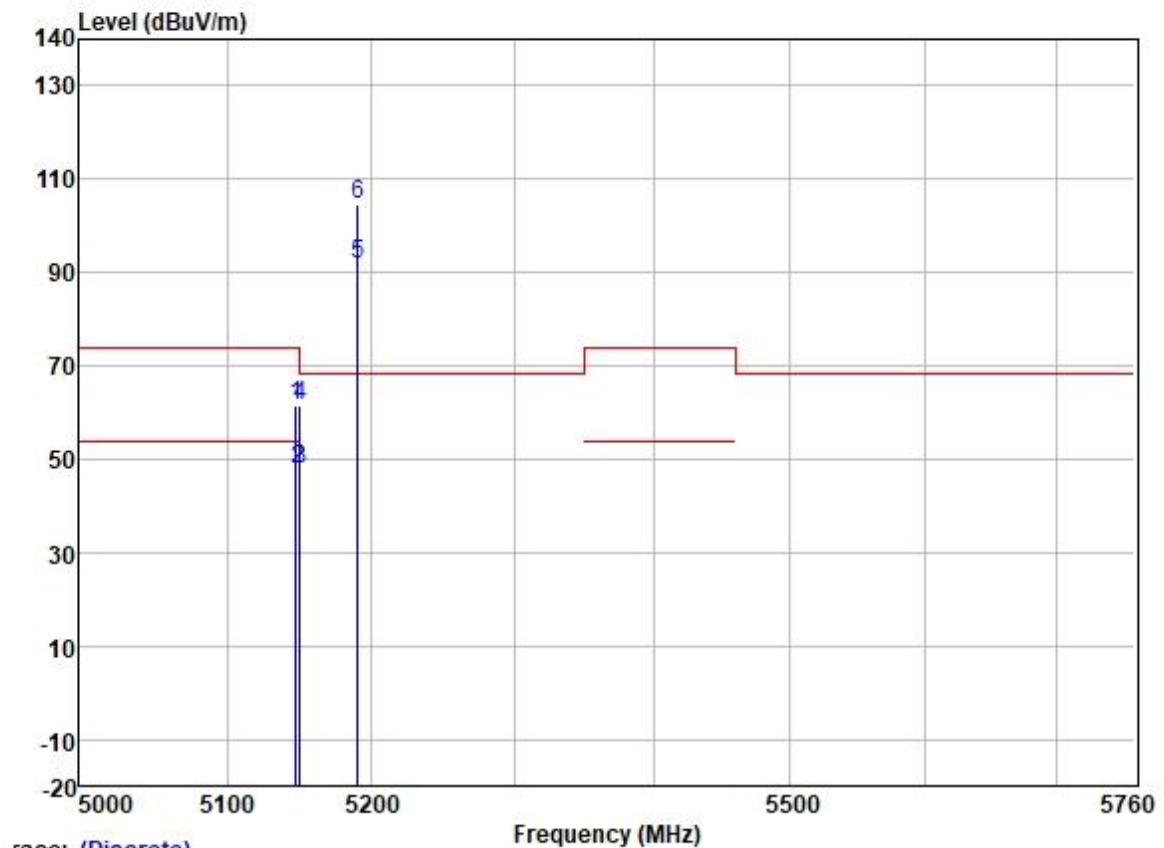

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5147.545	60.85	31.72	5.62	36.86	61.33	74.00	-12.67	HORIZONTAL Peak
2	5149.461	47.55	31.72	5.62	36.86	48.03	54.00	-5.97	HORIZONTAL Average
3	5149.980	47.56	31.72	5.62	36.86	48.04	54.00	-5.96	HORIZONTAL Average
4	5149.980	61.05	31.72	5.62	36.86	61.53	74.00	-12.47	HORIZONTAL Peak
5	5190.000	91.48	31.73	5.60	36.87	91.94	-----	-----	HORIZONTAL Average
6 *	5190.000	104.10	31.73	5.60	36.87	104.56	68.20	36.36	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

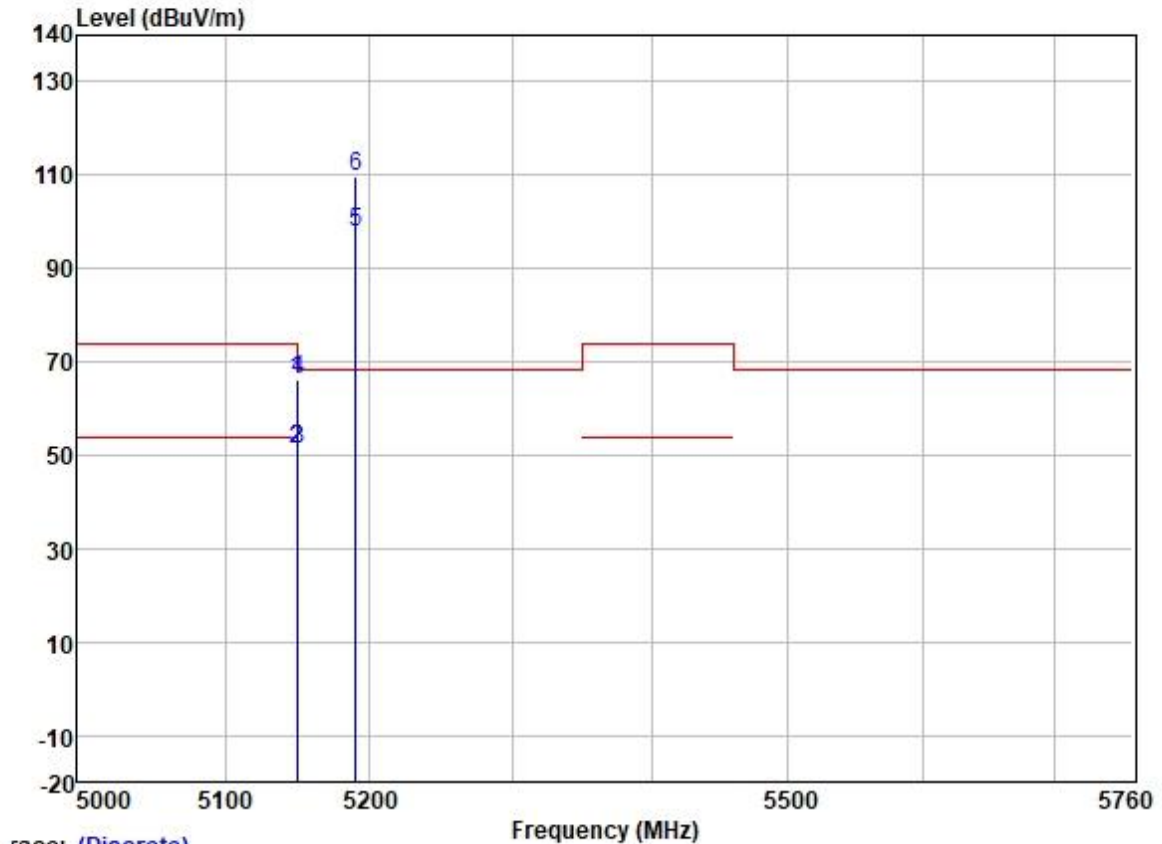

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.102	65.82	31.72	5.62	36.86	66.30	74.00	-7.70	VERTICAL
2	5149.342	50.87	31.72	5.62	36.86	51.35	54.00	-2.65	VERTICAL
3	5149.980	50.64	31.72	5.62	36.86	51.12	54.00	-2.88	VERTICAL
4	5149.980	65.69	31.72	5.62	36.86	66.17	74.00	-7.83	VERTICAL
5	5190.000	97.38	31.73	5.60	36.87	97.84	-----	-----	VERTICAL
6 *	5190.000	109.19	31.73	5.60	36.87	109.65	68.20	41.45	VERTICAL


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

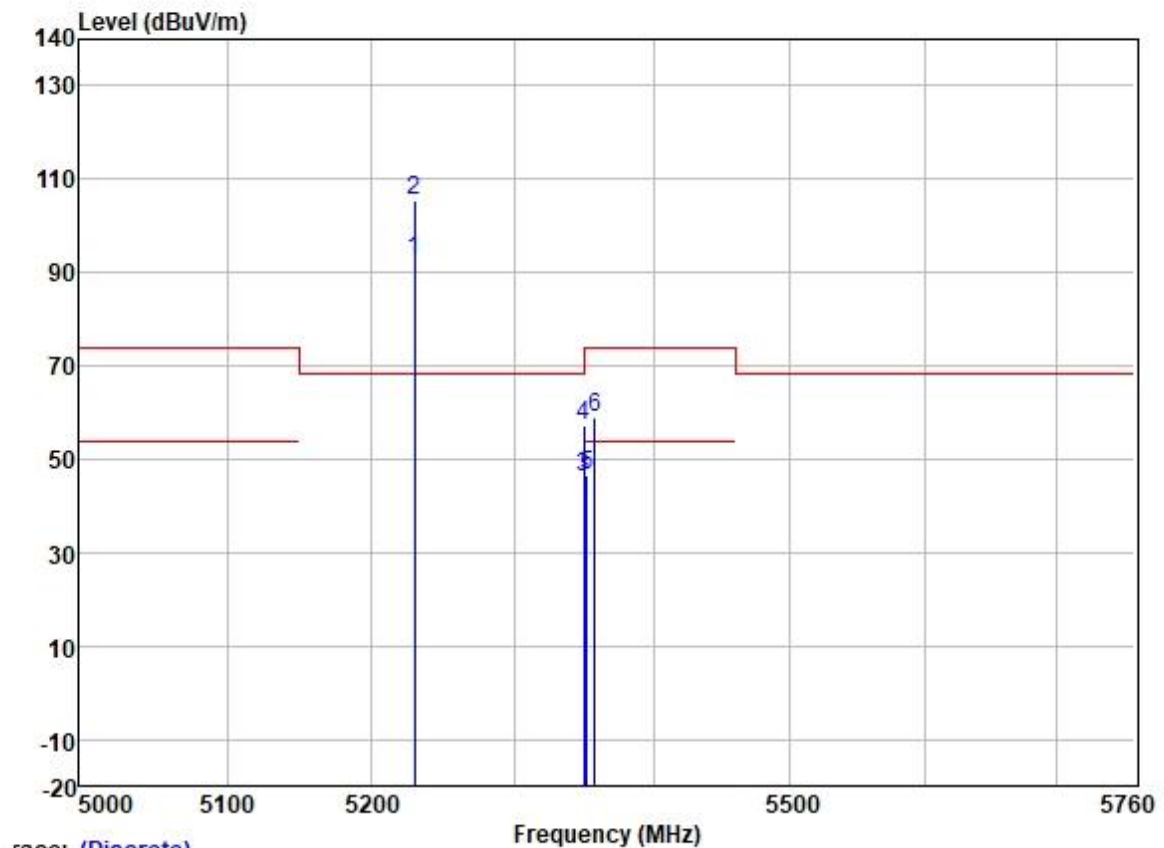

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	92.12	31.74	5.70	36.87	92.69	-----	-----	HORIZONTAL Average
2 *	5230.000	104.80	31.74	5.70	36.87	105.37	68.20	37.17	HORIZONTAL Peak
3	5350.020	45.01	31.77	6.05	36.88	45.95	54.00	-8.05	HORIZONTAL Average
4	5350.020	56.09	31.77	6.05	36.88	57.03	74.00	-16.97	HORIZONTAL Peak
5	5351.722	45.53	31.77	6.05	36.88	46.47	54.00	-7.53	HORIZONTAL Average
6	5357.564	57.81	31.78	6.03	36.88	58.74	74.00	-15.26	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

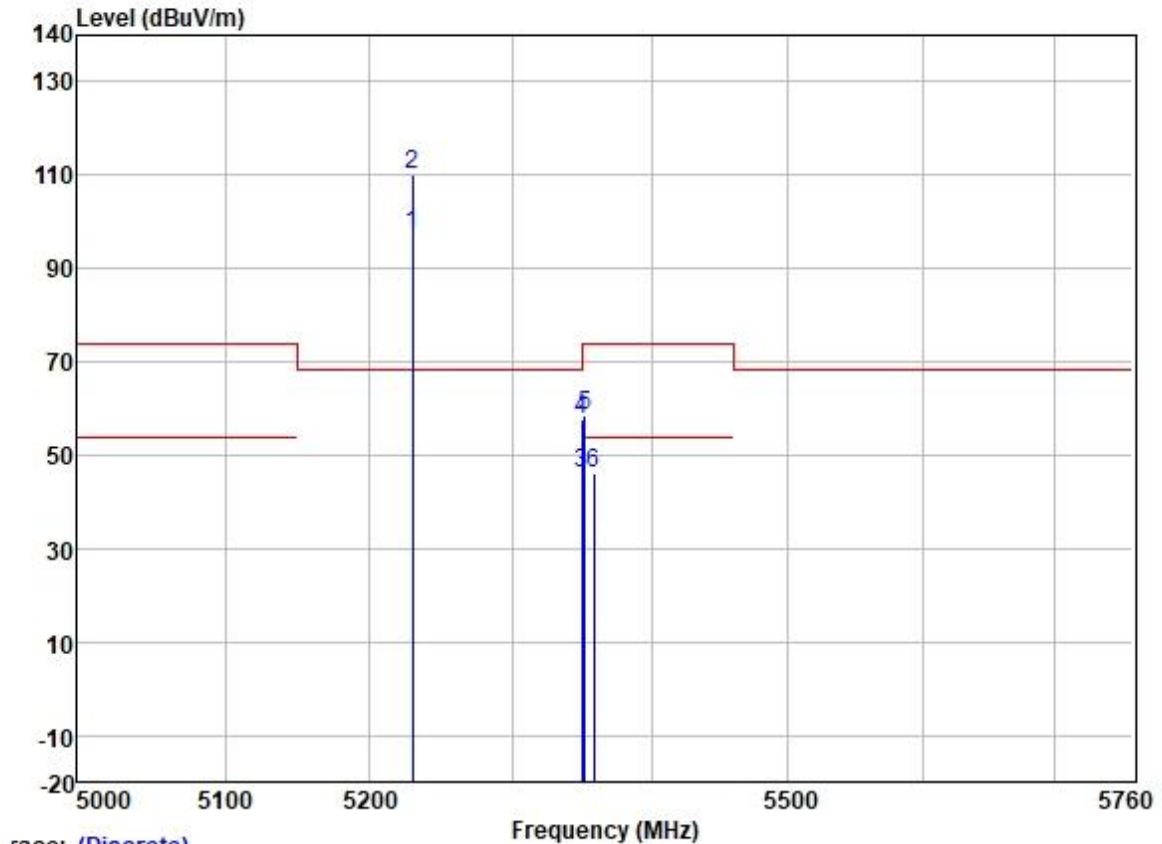

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	96.92	31.74	5.70	36.87	97.49	-----	-----	VERTICAL Average
2 *	5230.000	109.42	31.74	5.70	36.87	109.99	68.20	41.79	VERTICAL Peak
3	5350.020	45.25	31.77	6.05	36.88	46.19	54.00	-7.81	VERTICAL Average
4	5350.020	56.70	31.77	6.05	36.88	57.64	74.00	-16.36	VERTICAL Peak
5	5351.884	57.39	31.77	6.05	36.88	58.33	74.00	-15.67	VERTICAL Peak
6	5358.538	45.16	31.78	6.03	36.88	46.09	54.00	-7.91	VERTICAL Average

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:80MHz; Channel:middle

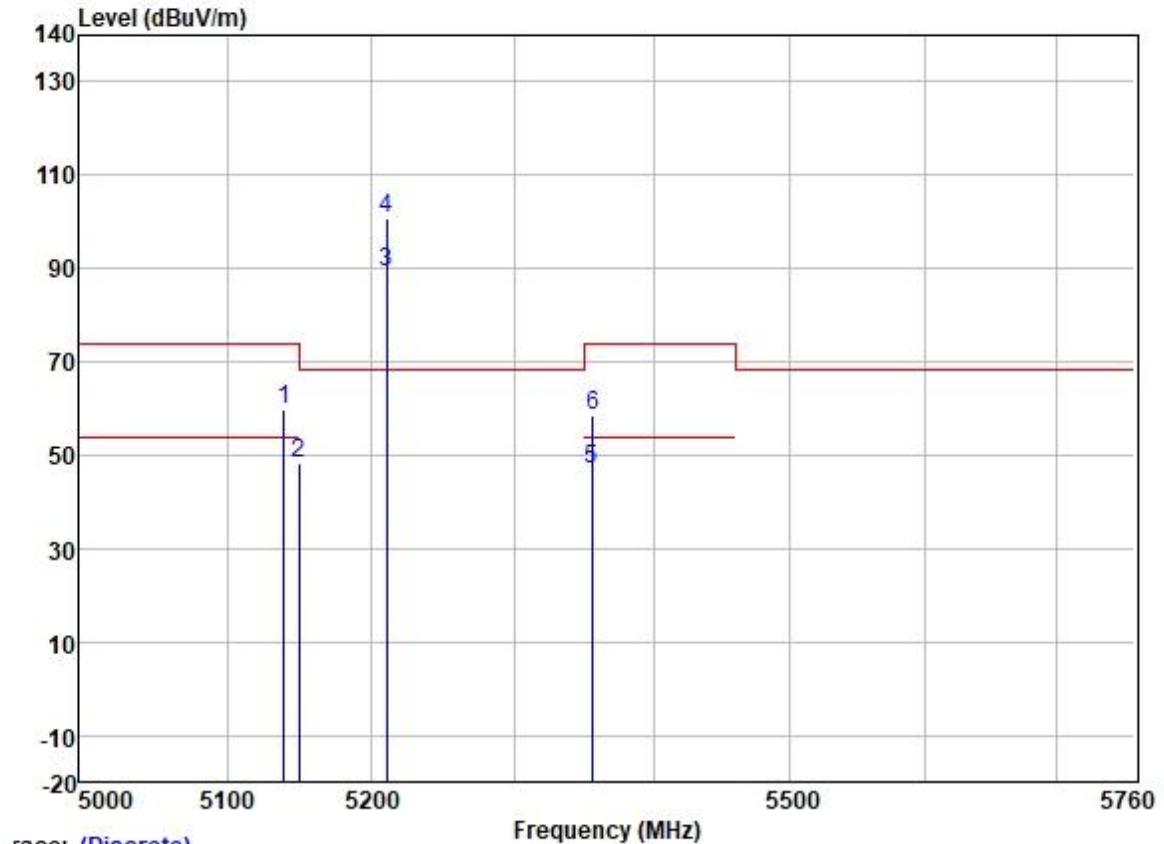


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5139.203	59.22	31.72	5.63	36.86	59.71	74.00	-14.29	HORIZONTAL Peak
2	5149.435	47.94	31.72	5.62	36.86	48.42	54.00	-5.58	HORIZONTAL Average
3	5210.000	88.70	31.74	5.65	36.87	89.22	-----	-----	HORIZONTAL Average
4 *	5210.000	100.33	31.74	5.65	36.87	100.85	68.20	32.65	HORIZONTAL Peak
5	5355.737	45.99	31.78	6.03	36.88	46.92	54.00	-7.08	HORIZONTAL Average
6	5356.270	57.51	31.78	6.03	36.88	58.44	74.00	-15.56	HORIZONTAL Peak

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ax; Bandwidth: 80MHz; Channel: middle

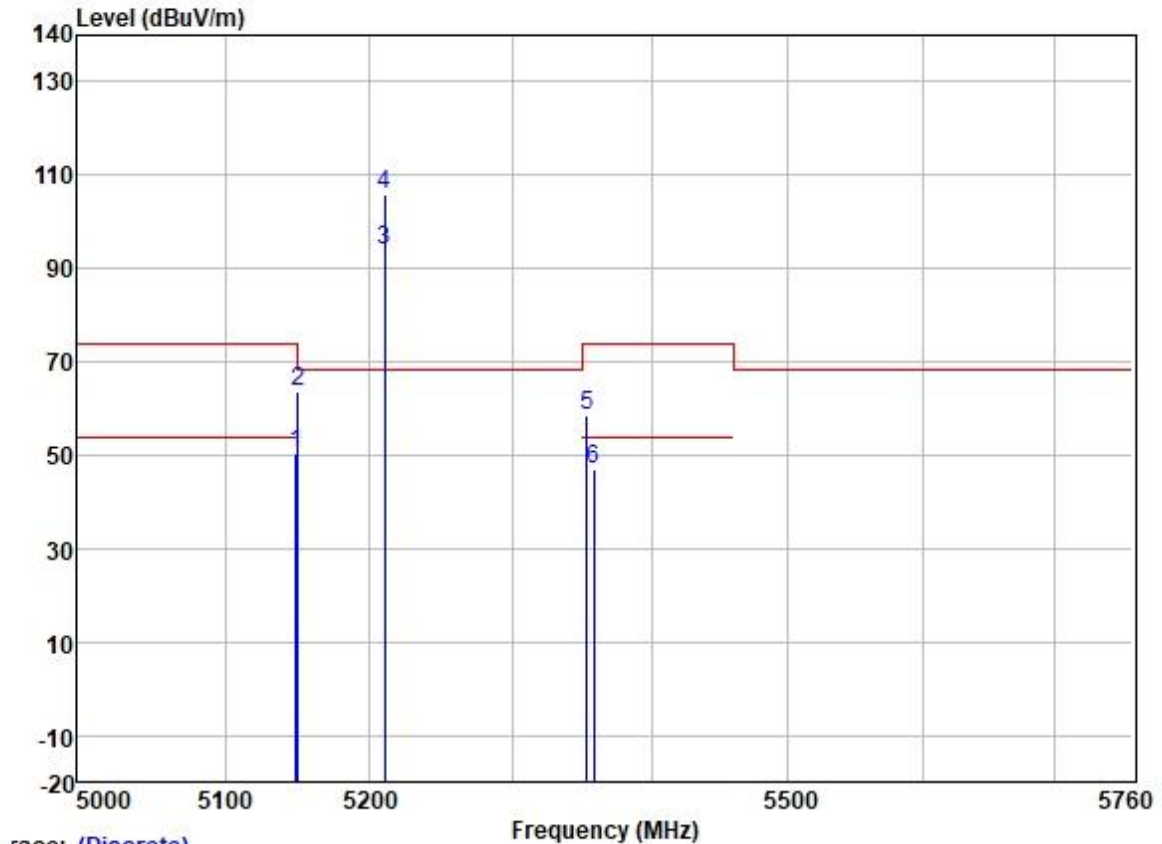


	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Limit Line	Over Limit	Pol/Phase	Remark			
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5148.667	49.82	31.72	5.62	36.86	50.30	54.00	-3.70	VERTICAL	Average
2	5149.690	63.28	31.72	5.62	36.86	63.76	74.00	-10.24	VERTICAL	Peak
3	5210.000	93.31	31.74	5.65	36.87	93.83	-----	-----	VERTICAL	Average
4 *	5210.000	105.47	31.74	5.65	36.87	105.99	68.20	37.79	VERTICAL	Peak
5	5353.341	57.41	31.77	6.05	36.88	58.35	74.00	-15.65	VERTICAL	Peak
6	5358.667	46.13	31.78	6.03	36.88	47.06	54.00	-6.94	VERTICAL	Average

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

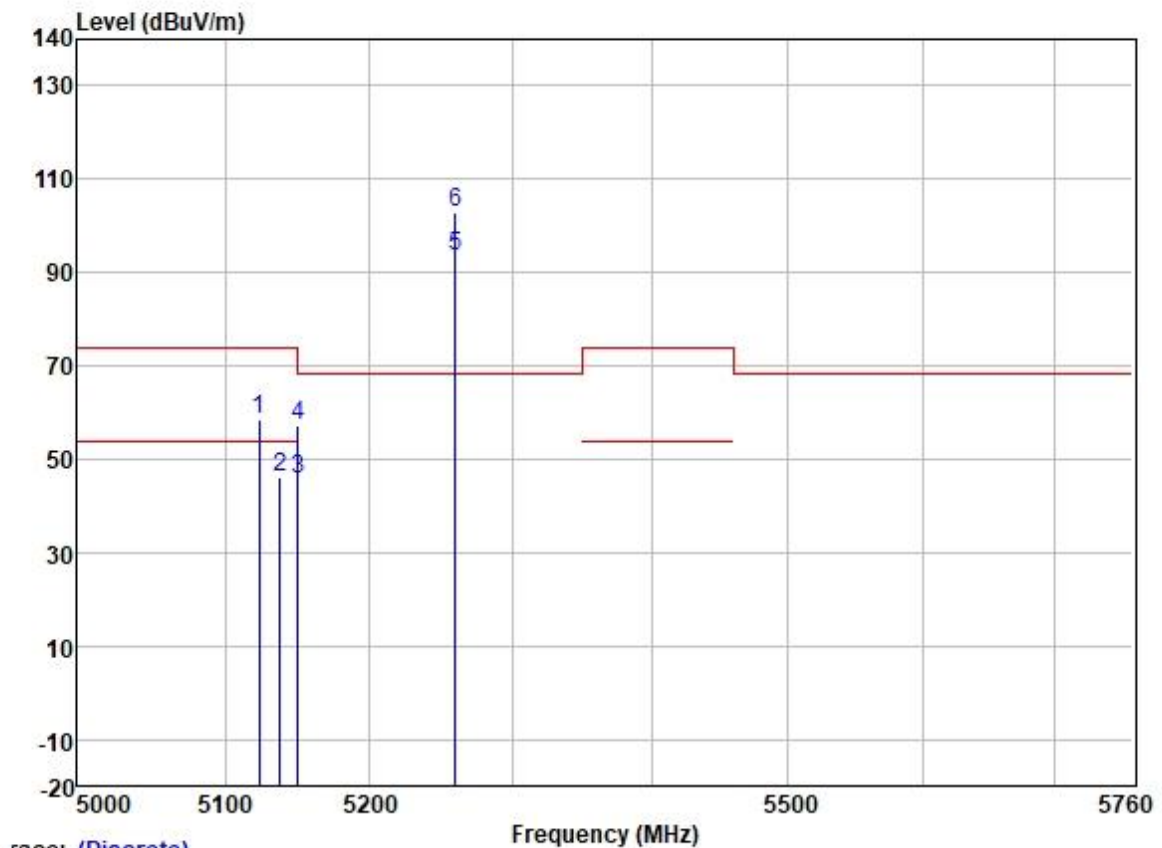

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5123.404	58.19	31.72	5.64	36.86	58.69	74.00	-15.31	HORIZONTAL Peak
2	5137.818	45.63	31.72	5.63	36.86	46.12	54.00	-7.88	HORIZONTAL Average
3	5149.980	45.41	31.72	5.62	36.86	45.89	54.00	-8.11	HORIZONTAL Average
4	5149.980	56.54	31.72	5.62	36.86	57.02	74.00	-16.98	HORIZONTAL Peak
5	5260.000	92.64	31.75	5.77	36.87	93.29	-----	-----	HORIZONTAL Average
6 *	5260.000	102.28	31.75	5.77	36.87	102.93	68.20	34.73	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

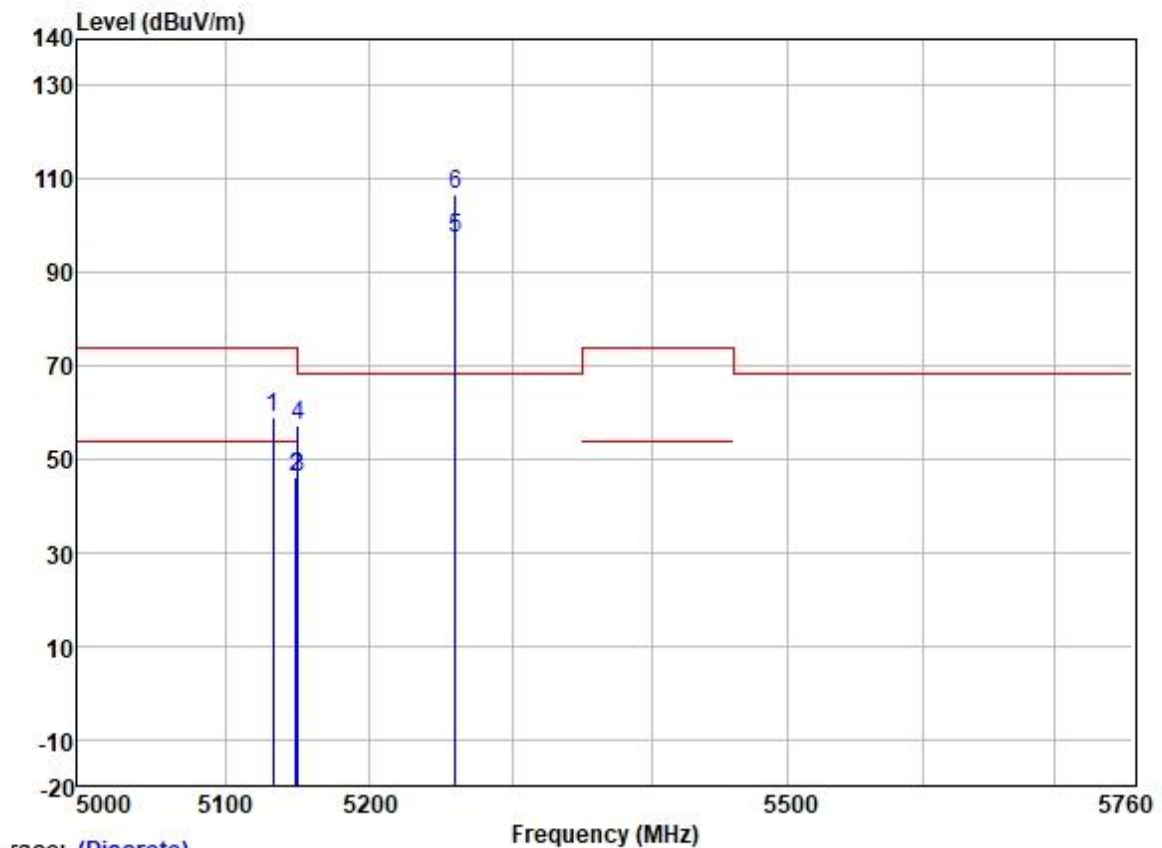

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5133.009	58.36	31.72	5.63	36.86	58.85	74.00	-15.15	VERTICAL
2	5148.701	45.80	31.72	5.62	36.86	46.28	54.00	-7.72	VERTICAL
3	5149.980	45.49	31.72	5.62	36.86	45.97	54.00	-8.03	VERTICAL
4	5149.980	56.93	31.72	5.62	36.86	57.41	74.00	-16.59	VERTICAL
5	5260.000	96.84	31.75	5.77	36.87	97.49	-----	-----	VERTICAL
6 *	5260.000	106.16	31.75	5.77	36.87	106.81	68.20	38.61	VERTICAL


Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

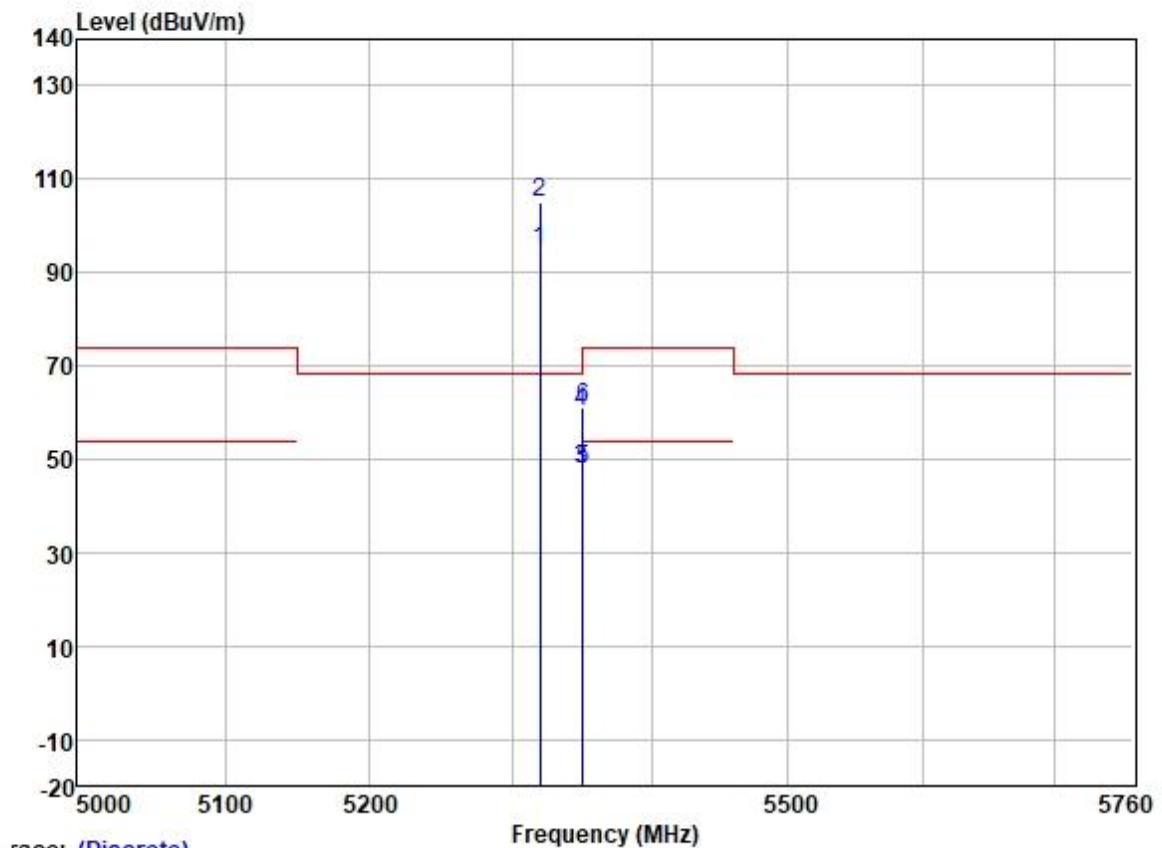

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	93.87	31.77	6.08	36.88	94.84	-----	-----	HORIZONTAL Average
2 *	5320.000	103.94	31.77	6.08	36.88	104.91	68.20	36.71	HORIZONTAL Peak
3	5350.020	47.10	31.77	6.05	36.88	48.04	54.00	-5.96	HORIZONTAL Average
4	5350.020	59.43	31.77	6.05	36.88	60.37	74.00	-13.63	HORIZONTAL Peak
5	5350.566	46.95	31.77	6.05	36.88	47.89	54.00	-6.11	HORIZONTAL Average
6	5350.566	60.21	31.77	6.05	36.88	61.15	74.00	-12.85	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

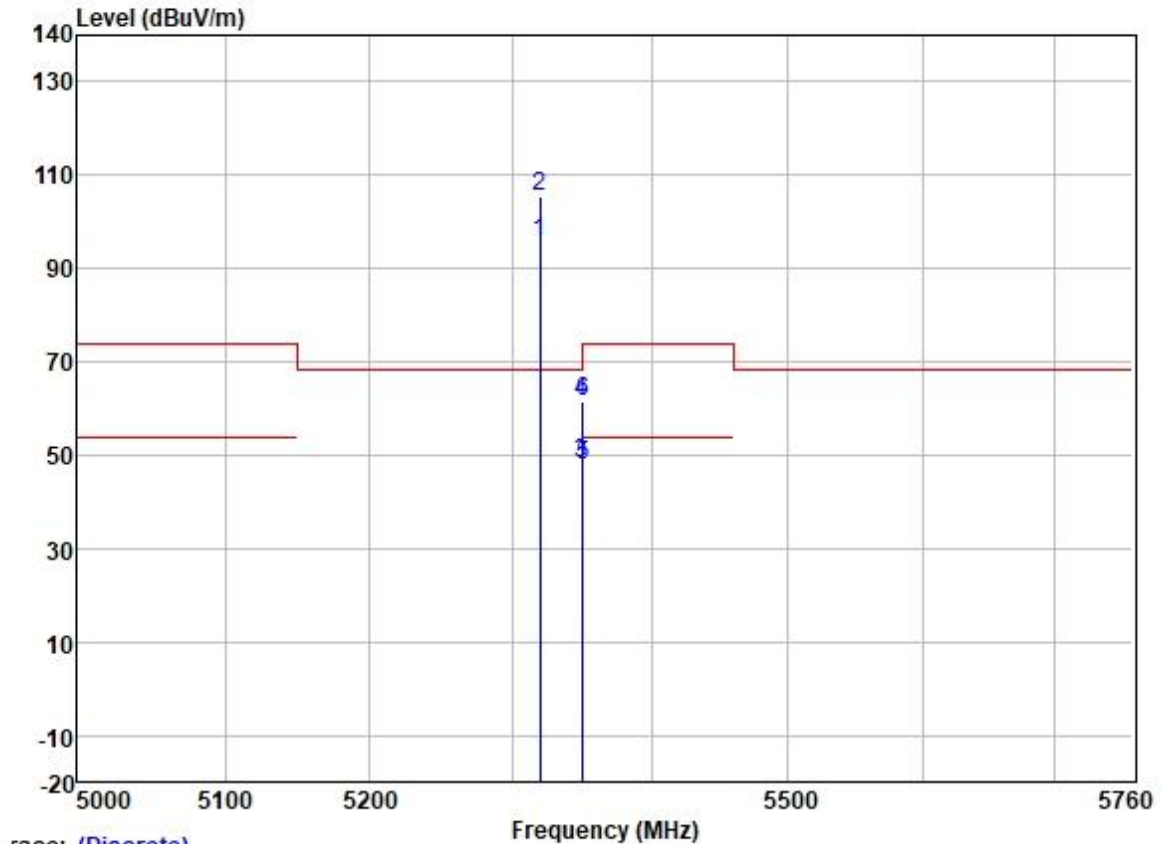

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	5320.000	94.81	31.77	6.08	36.88	95.78	-----	VERTICAL	Average
2 *	5320.000	104.41	31.77	6.08	36.88	105.38	68.20	VERTICAL	Peak
3	5350.020	47.46	31.77	6.05	36.88	48.40	54.00	VERTICAL	Average
4	5350.020	60.50	31.77	6.05	36.88	61.44	74.00	VERTICAL	Peak
5	5350.566	47.07	31.77	6.05	36.88	48.01	54.00	VERTICAL	Average
6	5350.667	60.59	31.77	6.05	36.88	61.53	74.00	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

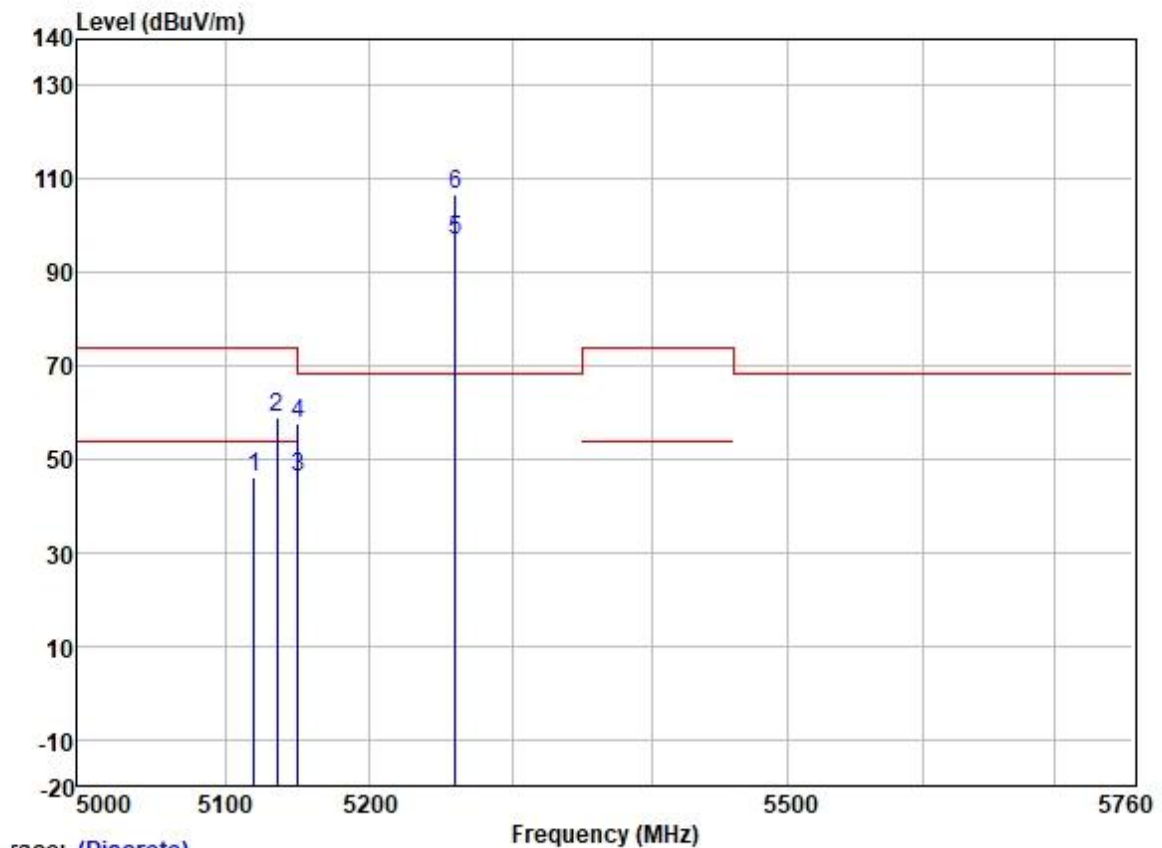

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5120.028	45.68	31.72	5.64	36.86	46.18	54.00	-7.82	HORIZONTAL Average
2	5135.858	58.50	31.72	5.63	36.86	58.99	74.00	-15.01	HORIZONTAL Peak
3	5149.980	45.67	31.72	5.62	36.86	46.15	54.00	-7.85	HORIZONTAL Average
4	5149.980	57.05	31.72	5.62	36.86	57.53	74.00	-16.47	HORIZONTAL Peak
5	5260.000	96.27	31.75	5.77	36.87	96.92	-----	-----	HORIZONTAL Average
6 *	5260.000	106.12	31.75	5.77	36.87	106.77	68.20	38.57	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

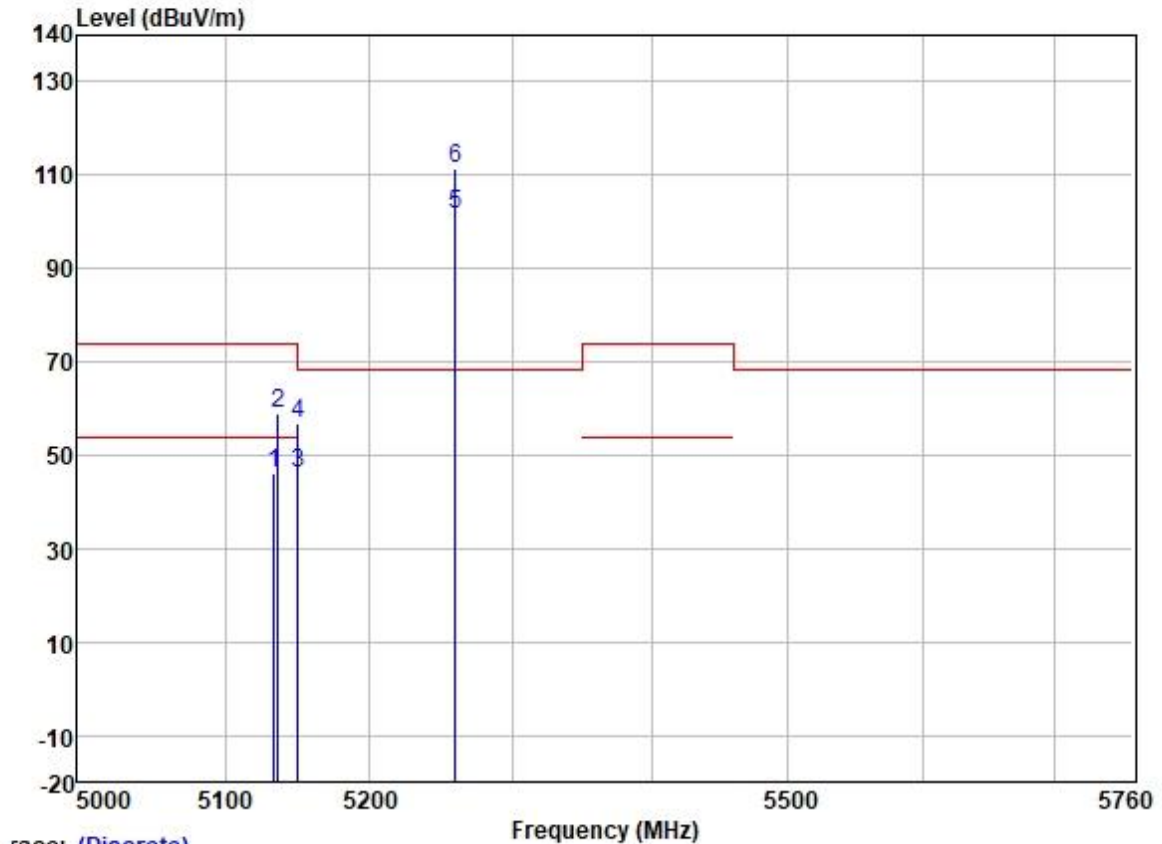


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5133.543	45.76	31.72	5.63	36.86	46.25	54.00	-7.75	VERTICAL Average
2	5136.393	58.50	31.72	5.63	36.86	58.99	74.00	-15.01	VERTICAL Peak
3	5149.980	45.46	31.72	5.62	36.86	45.94	54.00	-8.06	VERTICAL Average
4	5149.980	56.43	31.72	5.62	36.86	56.91	74.00	-17.09	VERTICAL Peak
5	5260.000	101.13	31.75	5.77	36.87	101.78	-----	-----	VERTICAL Average
6 *	5260.000	110.75	31.75	5.77	36.87	111.40	68.20	43.20	VERTICAL Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

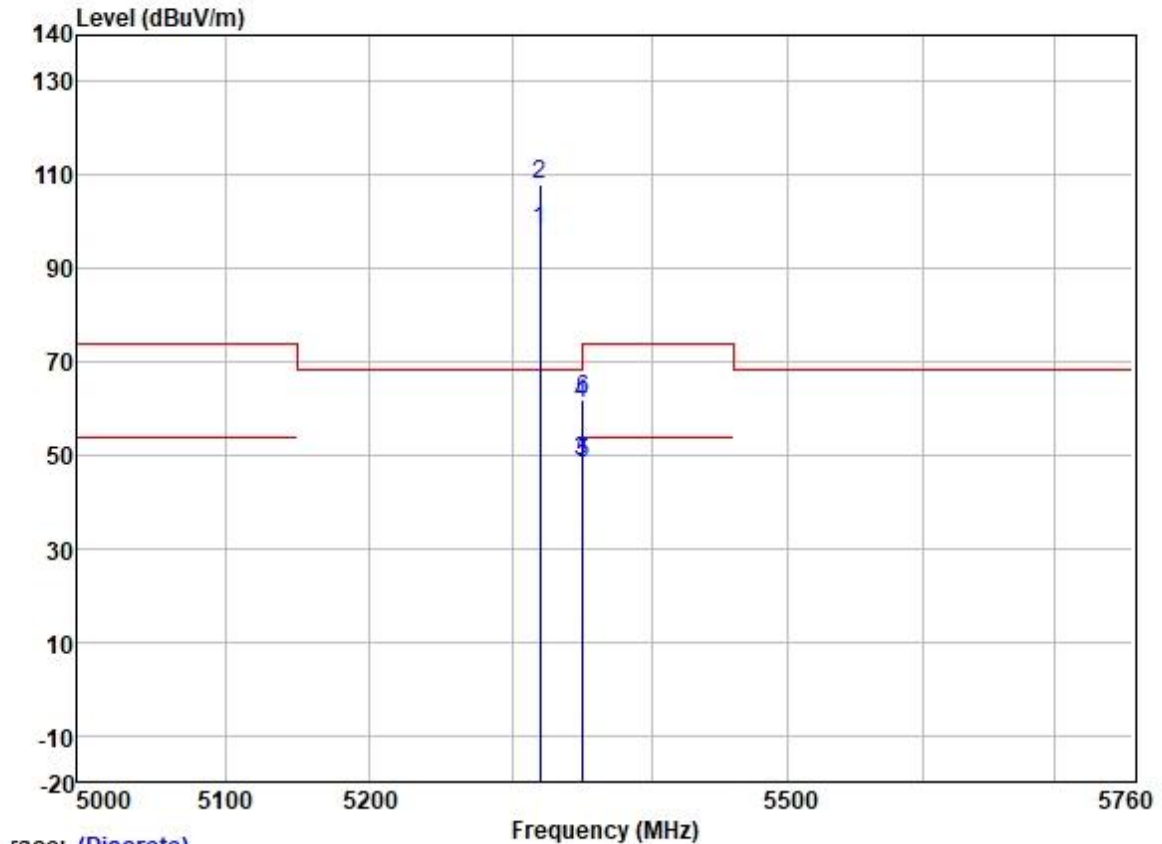

race: (Discrete)	Frequency (MHz)								
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark
		Level	Factor	Loss	Factor	Level	Line		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	97.25	31.77	6.08	36.88	98.22	-----	-----	HORIZONTAL Average
2 *	5320.000	107.01	31.77	6.08	36.88	107.98	68.20	39.78	HORIZONTAL Peak
3	5350.020	47.66	31.77	6.05	36.88	48.60	54.00	-5.40	HORIZONTAL Average
4	5350.020	60.27	31.77	6.05	36.88	61.21	74.00	-12.79	HORIZONTAL Peak
5	5350.566	47.16	31.77	6.05	36.88	48.10	54.00	-5.90	HORIZONTAL Average
6	5350.667	60.82	31.77	6.05	36.88	61.76	74.00	-12.24	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

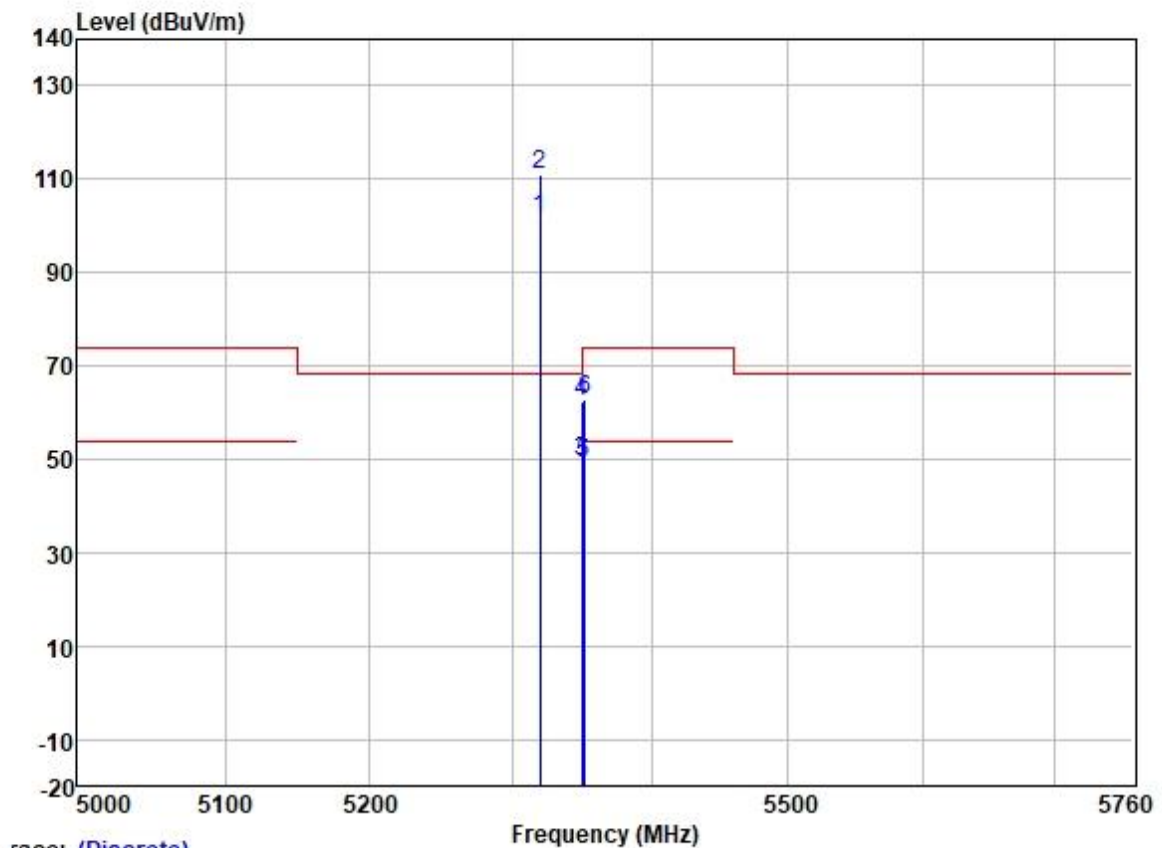

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	100.54	31.77	6.08	36.88	101.51	-----	-----	VERTICAL Average
2 *	5320.000	110.09	31.77	6.08	36.88	111.06	68.20	42.86	VERTICAL Peak
3	5350.020	48.59	31.77	6.05	36.88	49.53	54.00	-4.47	VERTICAL Average
4	5350.020	61.36	31.77	6.05	36.88	62.30	74.00	-11.70	VERTICAL Peak
5	5350.866	48.29	31.77	6.05	36.88	49.23	54.00	-4.77	VERTICAL Average
6	5352.167	61.92	31.77	6.05	36.88	62.86	74.00	-11.14	VERTICAL Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

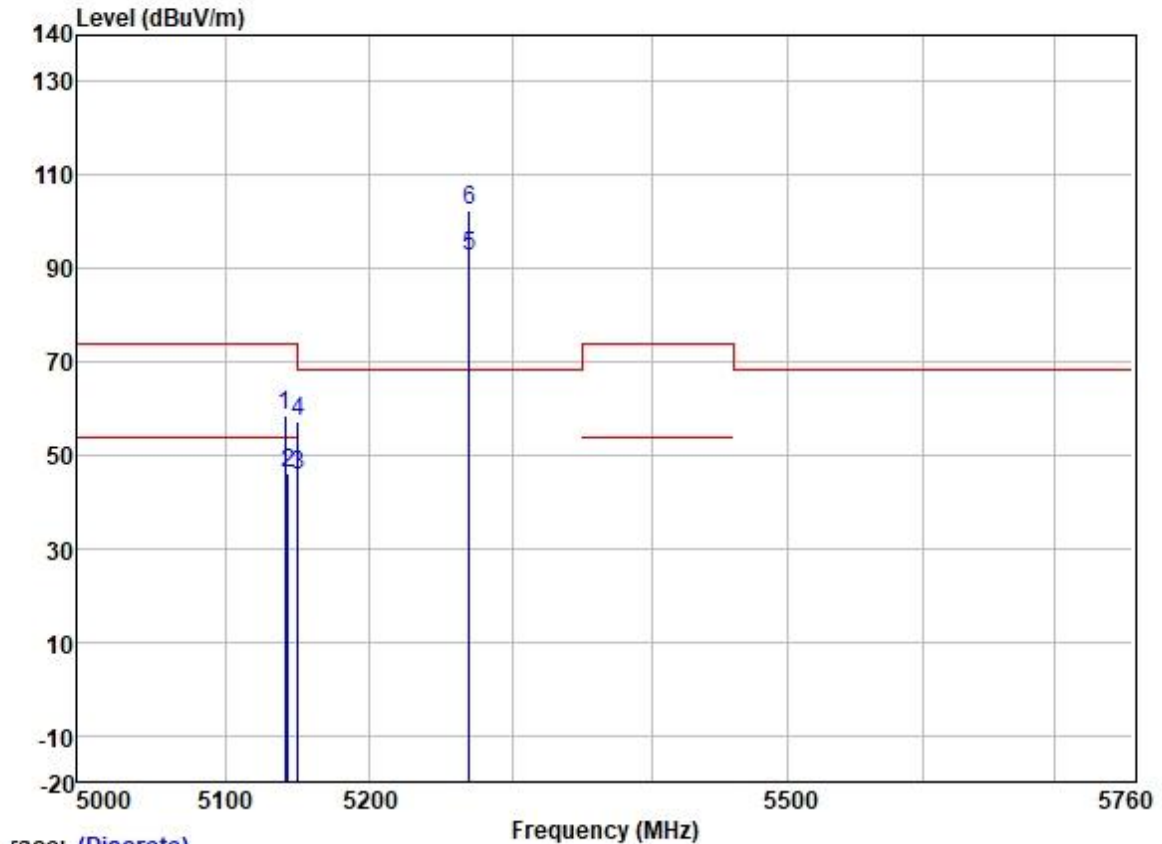


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5141.167	57.98	31.72	5.63	36.86	58.47	74.00	-15.53	HORIZONTAL Peak
2	5143.145	45.50	31.72	5.62	36.86	45.98	54.00	-8.02	HORIZONTAL Average
3	5149.980	45.18	31.72	5.62	36.86	45.66	54.00	-8.34	HORIZONTAL Average
4	5149.980	56.58	31.72	5.62	36.86	57.06	74.00	-16.94	HORIZONTAL Peak
5	5270.000	92.05	31.75	5.80	36.87	92.73	-----	-----	HORIZONTAL Average
6 *	5270.000	101.63	31.75	5.80	36.87	102.31	68.20	34.11	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

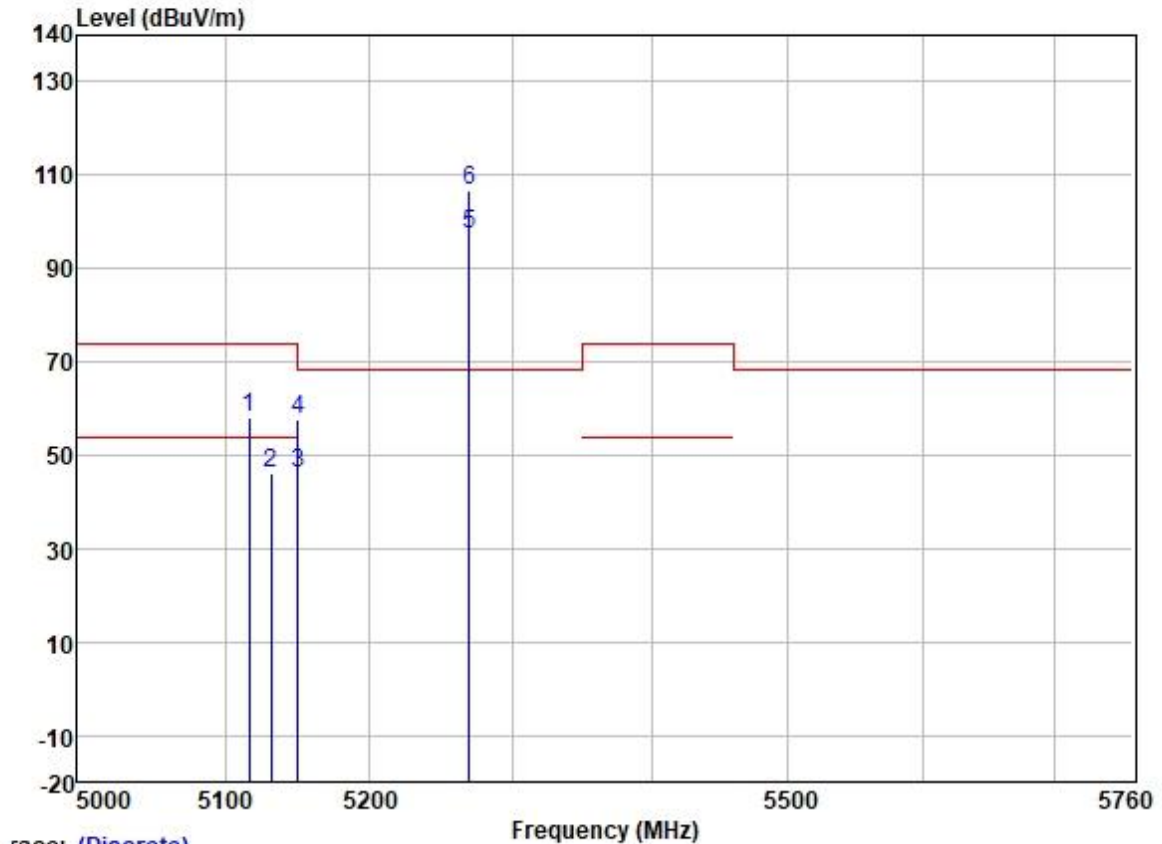

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5116.309	57.74	31.72	5.64	36.86	58.24	74.00	-15.76	VERTICAL Peak
2	5131.288	45.75	31.72	5.63	36.86	46.24	54.00	-7.76	VERTICAL Average
3	5149.980	45.46	31.72	5.62	36.86	45.94	54.00	-8.06	VERTICAL Average
4	5149.980	57.12	31.72	5.62	36.86	57.60	74.00	-16.40	VERTICAL Peak
5	5270.000	96.54	31.75	5.80	36.87	97.22	-----	-----	VERTICAL Average
6 *	5270.000	105.96	31.75	5.80	36.87	106.64	68.20	38.44	VERTICAL Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

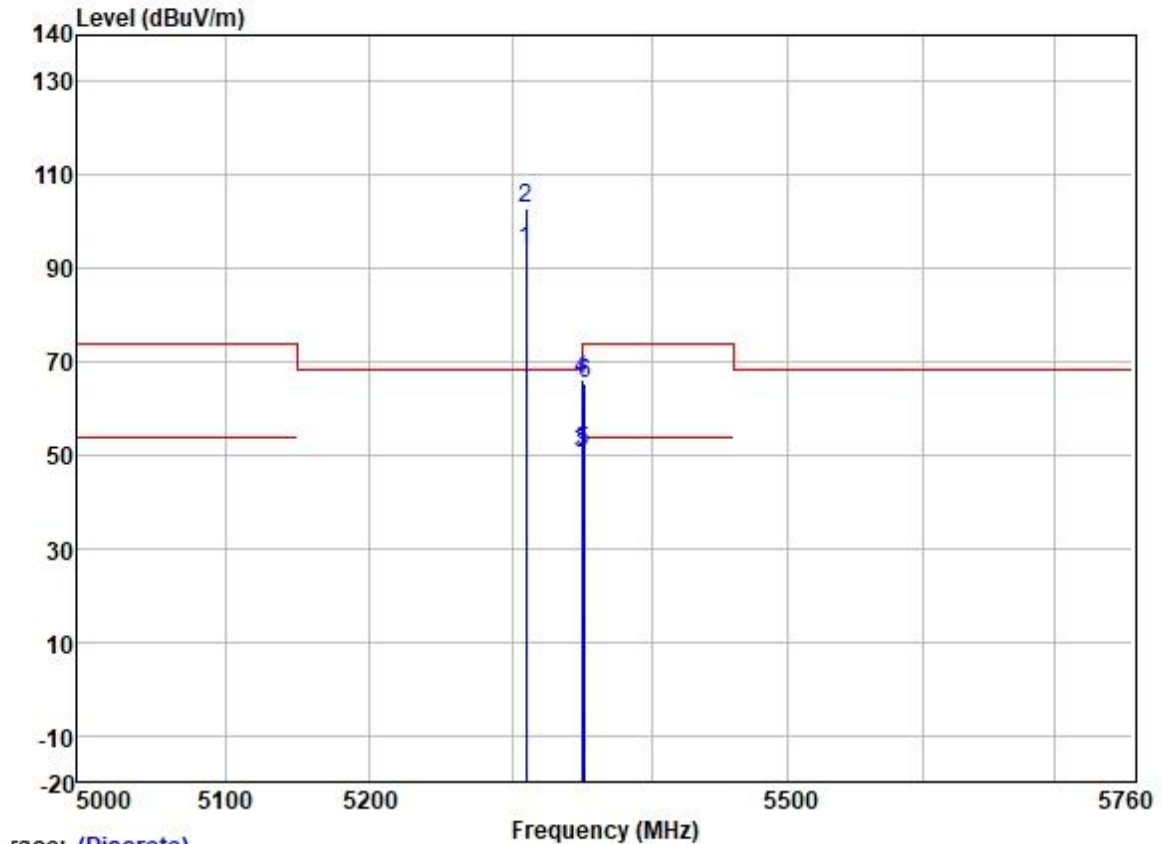

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	92.98	31.77	6.08	36.87	93.96	-----	-----	HORIZONTAL Average
2 *	5310.000	101.84	31.77	6.08	36.87	102.82	68.20	34.62	HORIZONTAL Peak
3	5350.020	49.47	31.77	6.05	36.88	50.41	54.00	-3.59	HORIZONTAL Average
4	5350.020	65.28	31.77	6.05	36.88	66.22	74.00	-7.78	HORIZONTAL Peak
5	5350.474	49.74	31.77	6.05	36.88	50.68	54.00	-3.32	HORIZONTAL Average
6	5352.037	64.49	31.77	6.05	36.88	65.43	74.00	-8.57	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

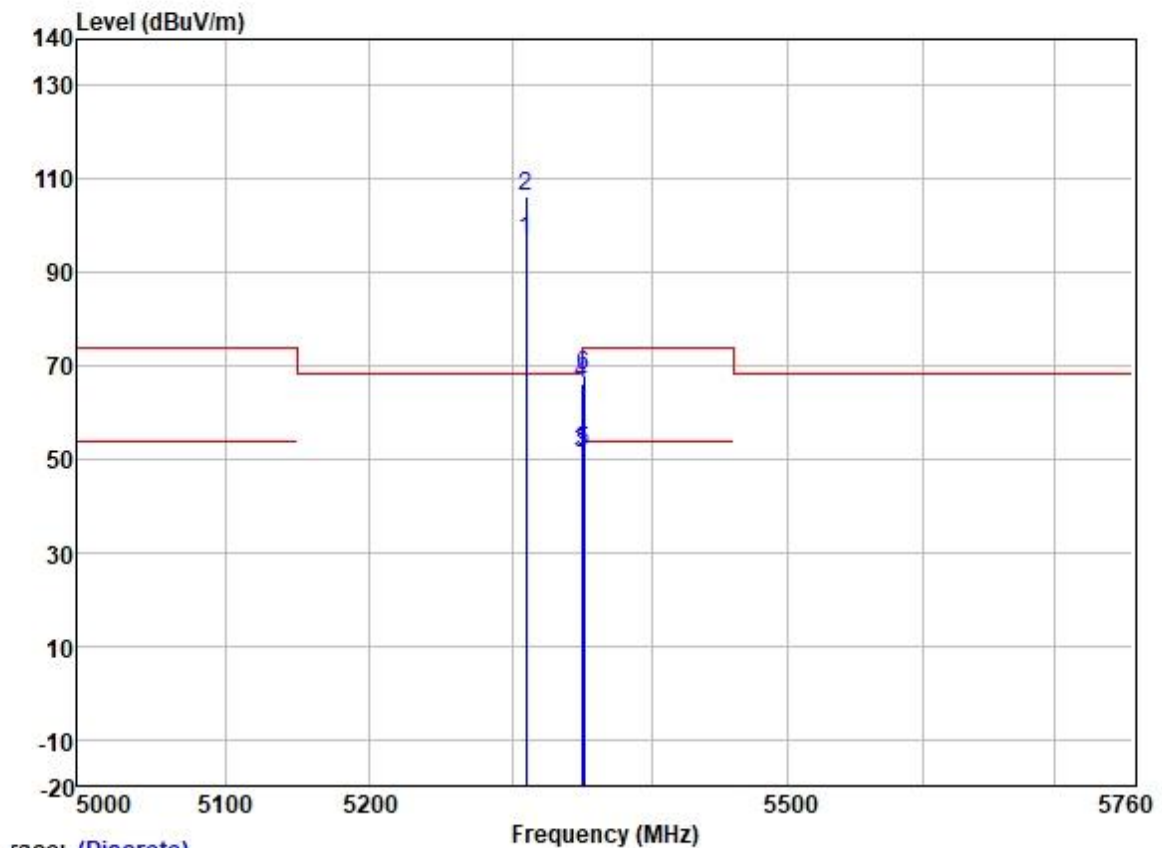

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	95.89	31.77	6.08	36.87	96.87	-----	-----	VERTICAL Average
2 *	5310.000	105.48	31.77	6.08	36.87	106.46	68.20	38.26	VERTICAL Peak
3	5350.020	50.49	31.77	6.05	36.88	51.43	54.00	-2.57	VERTICAL Average
4	5350.020	65.31	31.77	6.05	36.88	66.25	74.00	-7.75	VERTICAL Peak
5	5350.474	50.79	31.77	6.05	36.88	51.73	54.00	-2.27	VERTICAL Average
6	5351.315	66.98	31.77	6.05	36.88	67.92	74.00	-6.08	VERTICAL Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

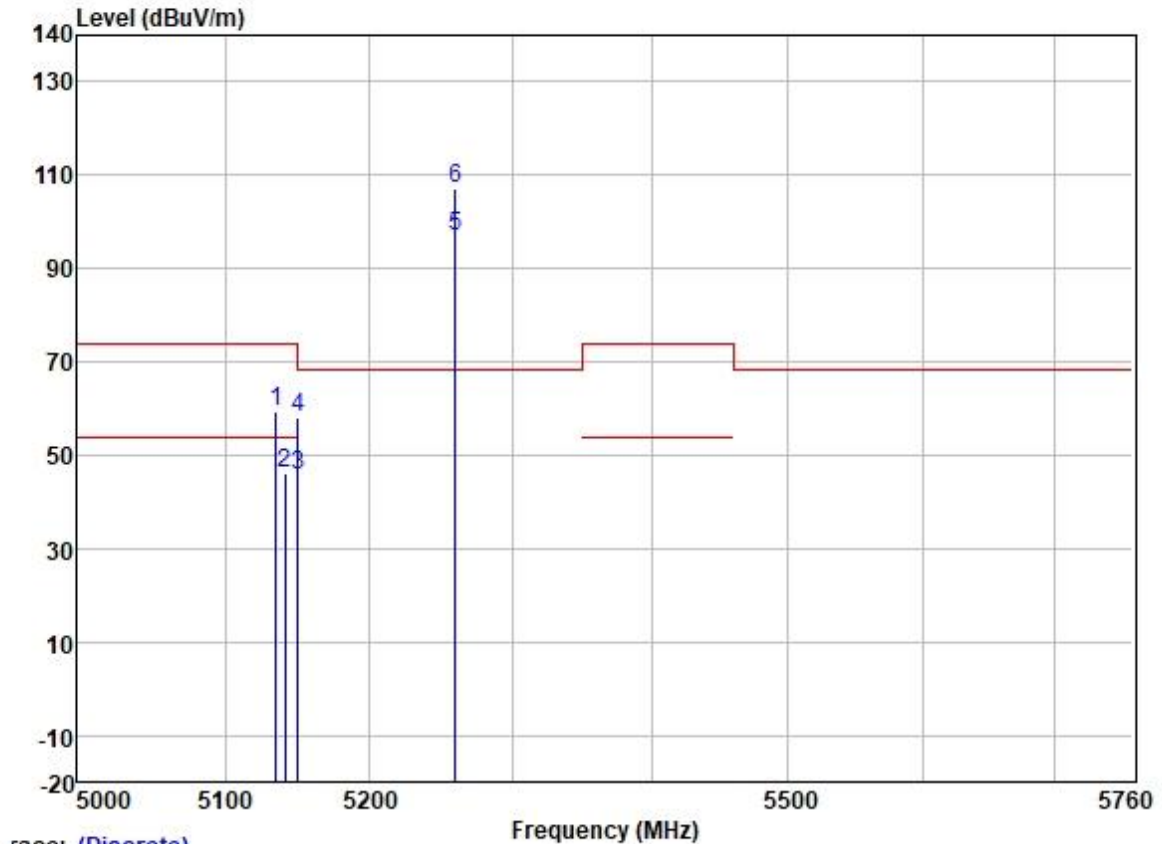


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5135.146	58.73	31.72	5.63	36.86	59.22	74.00	-14.78	HORIZONTAL Peak
2	5141.027	45.68	31.72	5.63	36.86	46.17	54.00	-7.83	HORIZONTAL Average
3	5149.980	45.43	31.72	5.62	36.86	45.91	54.00	-8.09	HORIZONTAL Average
4	5149.980	57.77	31.72	5.62	36.86	58.25	74.00	-15.75	HORIZONTAL Peak
5	5260.000	96.34	31.75	5.77	36.87	96.99	-----	-----	HORIZONTAL Average
6 *	5260.000	106.59	31.75	5.77	36.87	107.24	68.20	39.04	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

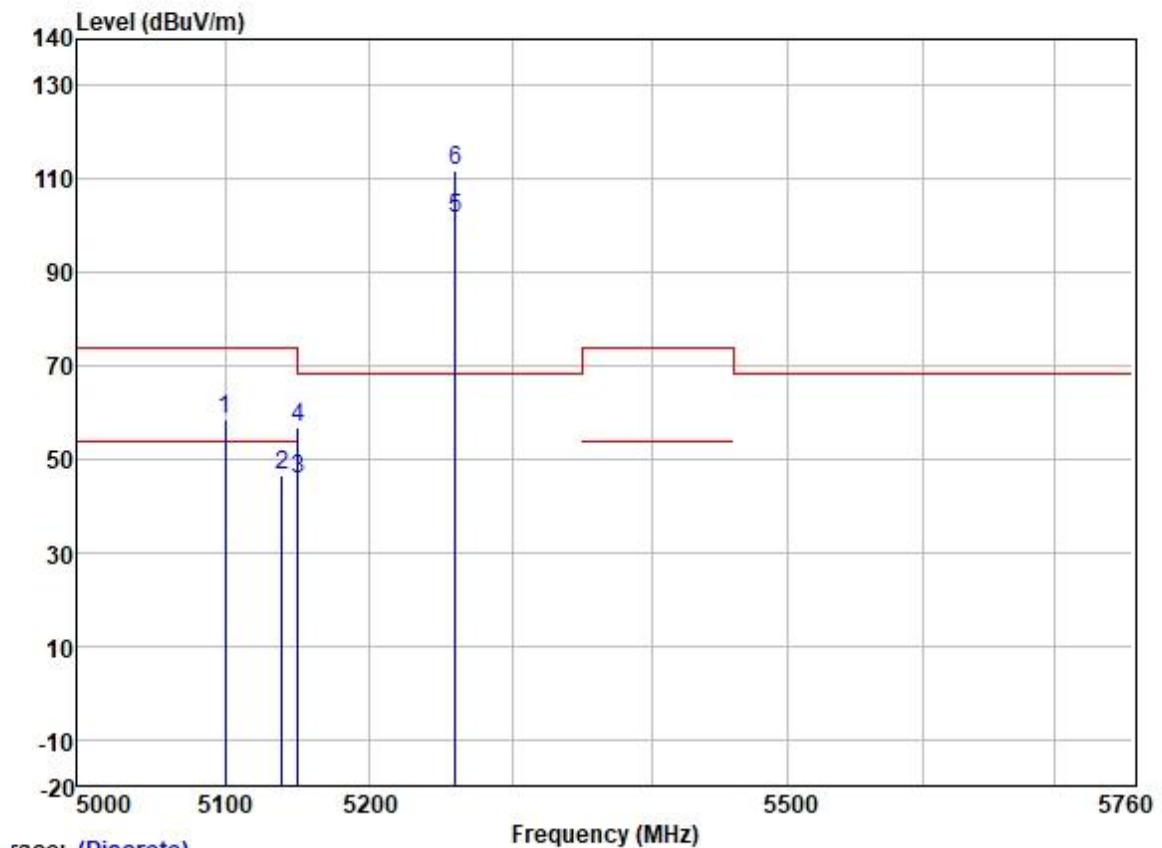

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Limit Line	Over Limit	Pol/Phase	Remark			
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5100.000	57.82	31.72	5.65	36.86	58.33	74.00	-15.67	VERTICAL	Peak
2	5139.244	45.94	31.72	5.63	36.86	46.43	54.00	-7.57	VERTICAL	Average
3	5149.980	45.24	31.72	5.62	36.86	45.72	54.00	-8.28	VERTICAL	Average
4	5149.980	56.44	31.72	5.62	36.86	56.92	74.00	-17.08	VERTICAL	Peak
5	5260.000	100.83	31.75	5.77	36.87	101.48	-----	-----	VERTICAL	Average
6 *	5260.000	111.12	31.75	5.77	36.87	111.77	68.20	43.57	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

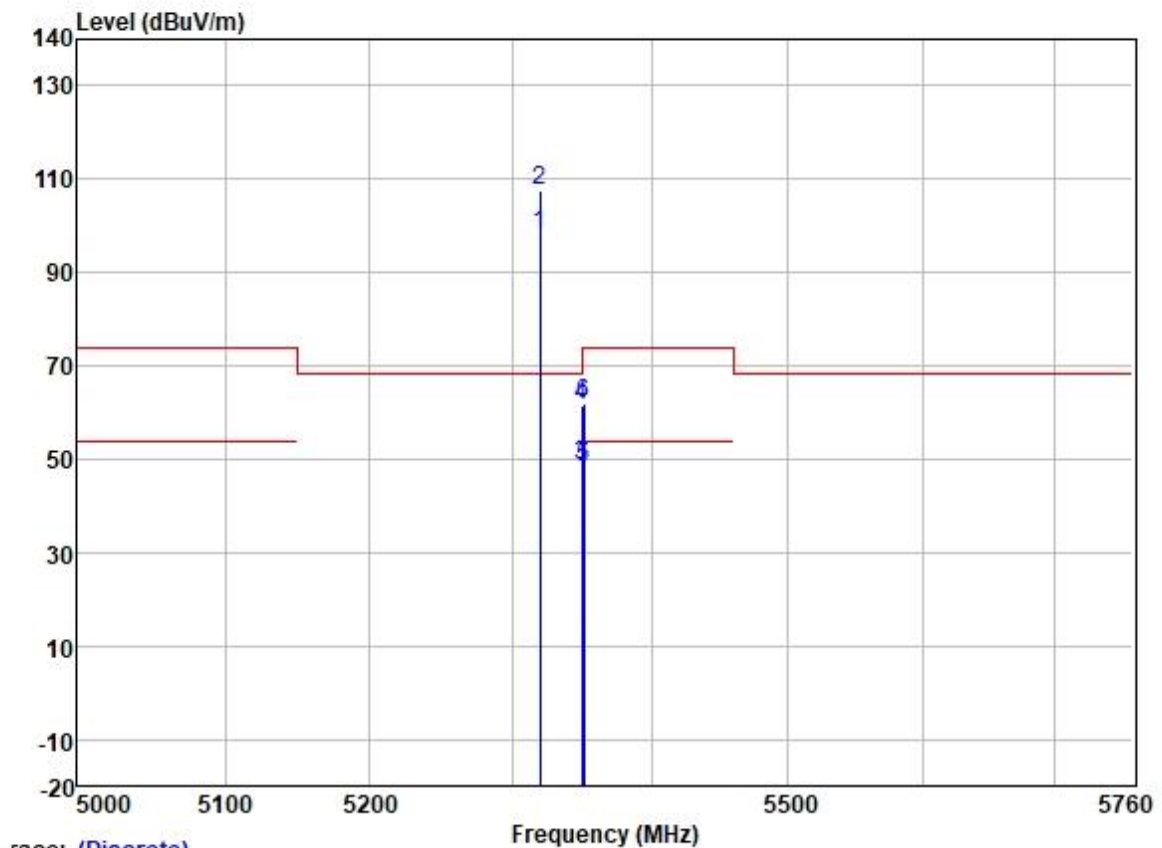

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	97.40	31.77	6.08	36.88	98.37	-----	-----	HORIZONTAL Average
2 *	5320.000	106.74	31.77	6.08	36.88	107.71	68.20	39.51	HORIZONTAL Peak
3	5350.020	47.58	31.77	6.05	36.88	48.52	54.00	-5.48	HORIZONTAL Average
4	5350.020	60.38	31.77	6.05	36.88	61.32	74.00	-12.68	HORIZONTAL Peak
5	5350.866	47.23	31.77	6.05	36.88	48.17	54.00	-5.83	HORIZONTAL Average
6	5351.267	60.99	31.77	6.05	36.88	61.93	74.00	-12.07	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

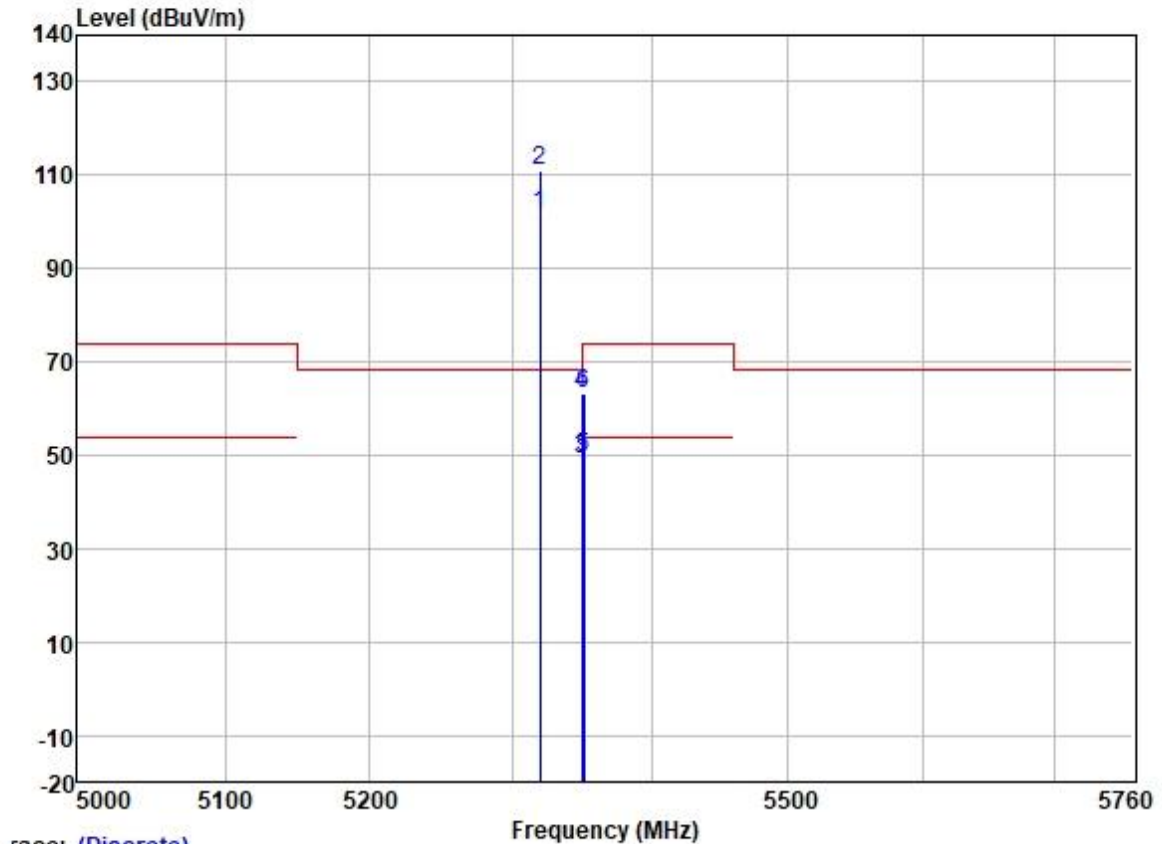

race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	100.57	31.77	6.08	36.88	101.54	-----	-----	VERTICAL	Average
2 *	5320.000	109.82	31.77	6.08	36.88	110.79	68.20	42.59	VERTICAL	Peak
3	5350.020	48.39	31.77	6.05	36.88	49.33	54.00	-4.67	VERTICAL	Average
4	5350.020	62.29	31.77	6.05	36.88	63.23	74.00	-10.77	VERTICAL	Peak
5	5350.667	48.58	31.77	6.05	36.88	49.52	54.00	-4.48	VERTICAL	Average
6	5351.267	62.23	31.77	6.05	36.88	63.17	74.00	-10.83	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

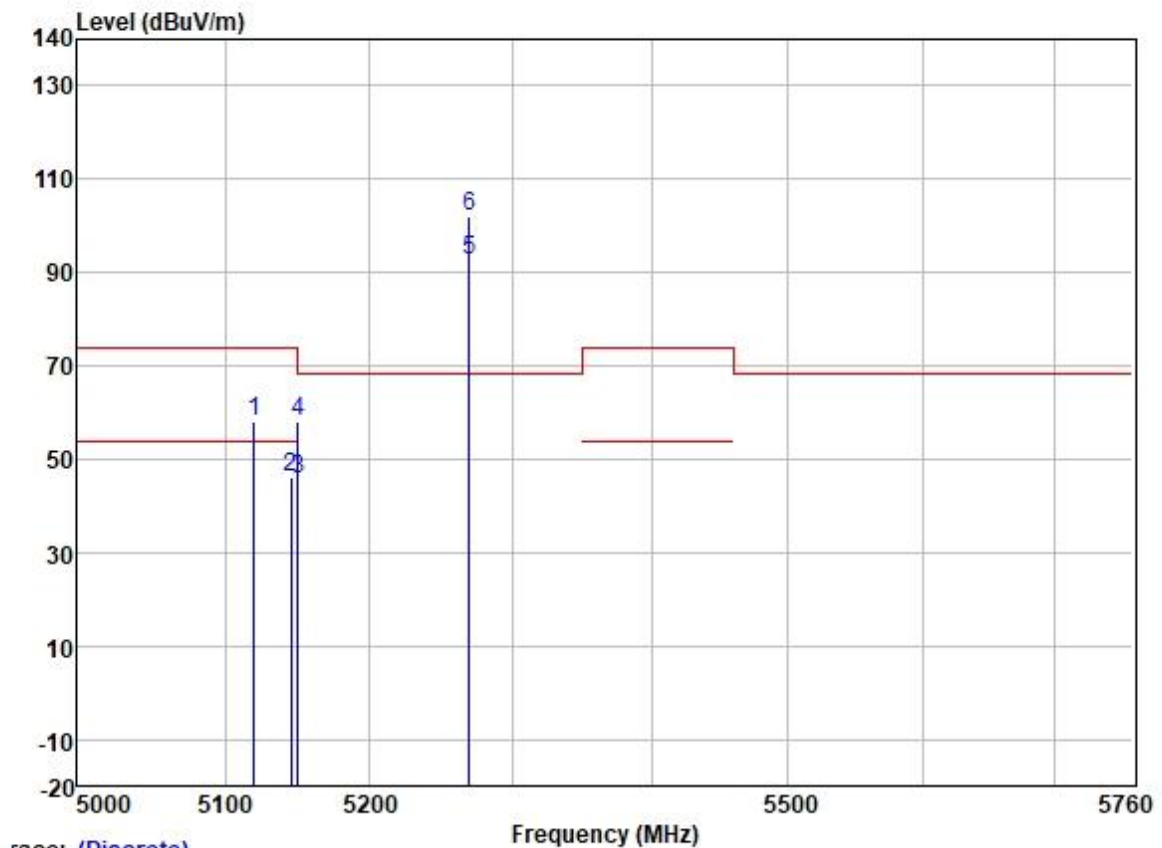

race: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5120.049	57.70	31.72	5.64	36.86	58.20	74.00	-15.80	HORIZONTAL Peak
2	5145.123	45.77	31.72	5.62	36.86	46.25	54.00	-7.75	HORIZONTAL Average
3	5149.980	45.36	31.72	5.62	36.86	45.84	54.00	-8.16	HORIZONTAL Average
4	5149.980	57.63	31.72	5.62	36.86	58.11	74.00	-15.89	HORIZONTAL Peak
5	5270.000	92.10	31.75	5.80	36.87	92.78	-----	-----	HORIZONTAL Average
6 *	5270.000	101.19	31.75	5.80	36.87	101.87	68.20	33.67	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

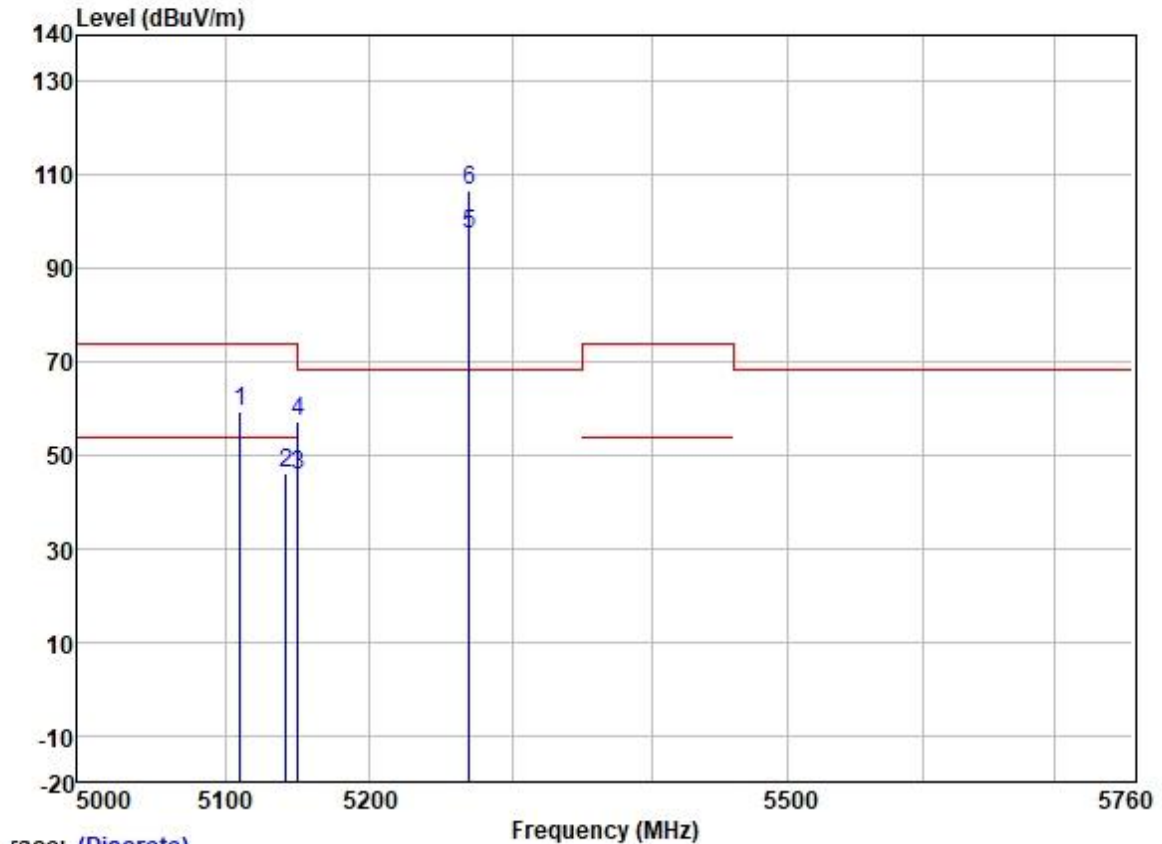


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5110.604	58.99	31.72	5.65	36.86	59.50	74.00	-14.50	VERTICAL Peak
2	5141.958	45.72	31.72	5.62	36.86	46.20	54.00	-7.80	VERTICAL Average
3	5149.980	45.39	31.72	5.62	36.86	45.87	54.00	-8.13	VERTICAL Average
4	5149.980	56.69	31.72	5.62	36.86	57.17	74.00	-16.83	VERTICAL Peak
5	5270.000	96.64	31.75	5.80	36.87	97.32	-----	-----	VERTICAL Average
6 *	5270.000	106.17	31.75	5.80	36.87	106.85	68.20	38.65	VERTICAL Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

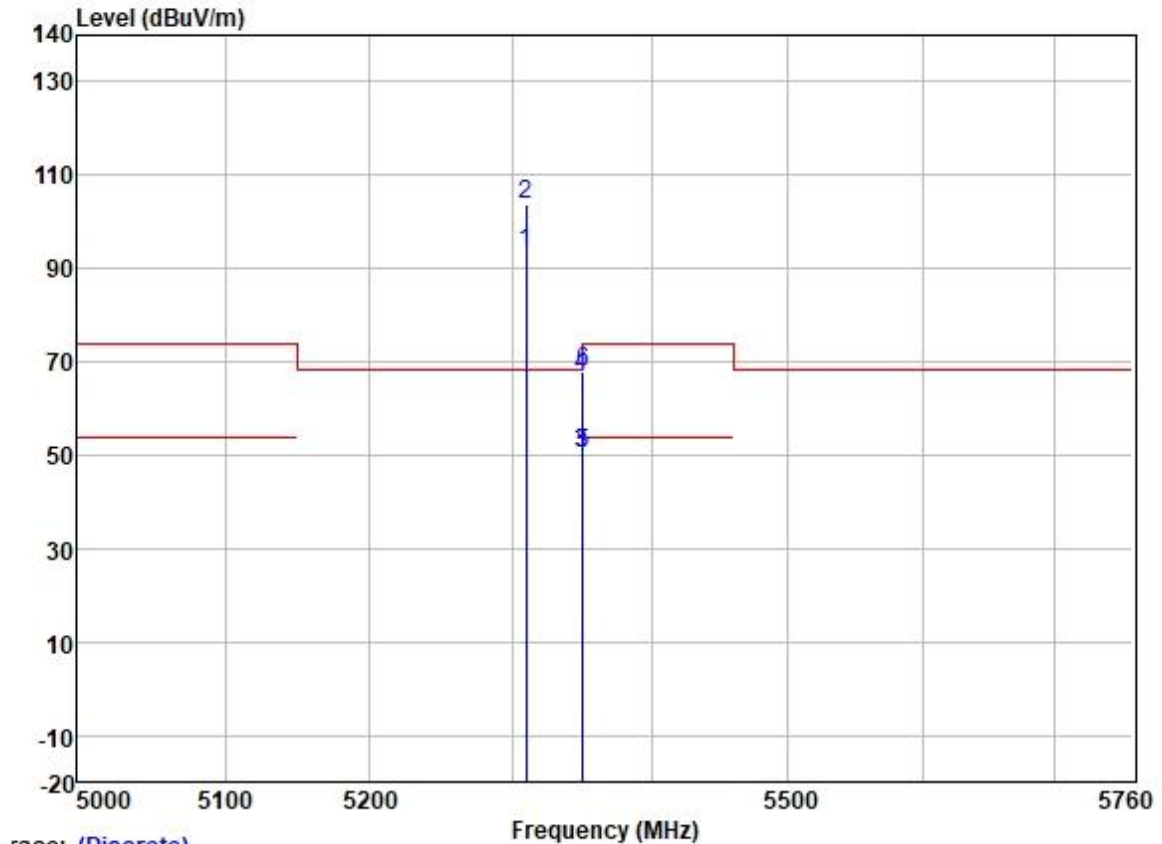


race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	92.50	31.77	6.08	36.87	93.48	-----	-----	HORIZONTAL	Average
2 *	5310.000	102.85	31.77	6.08	36.87	103.83	68.20	35.63	HORIZONTAL	Peak
3	5350.020	49.27	31.77	6.05	36.88	50.21	54.00	-3.79	HORIZONTAL	Average
4	5350.020	65.98	31.77	6.05	36.88	66.92	74.00	-7.08	HORIZONTAL	Peak
5	5350.474	49.29	31.77	6.05	36.88	50.23	54.00	-3.77	HORIZONTAL	Average
6	5350.714	67.11	31.77	6.05	36.88	68.05	74.00	-5.95	HORIZONTAL	Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

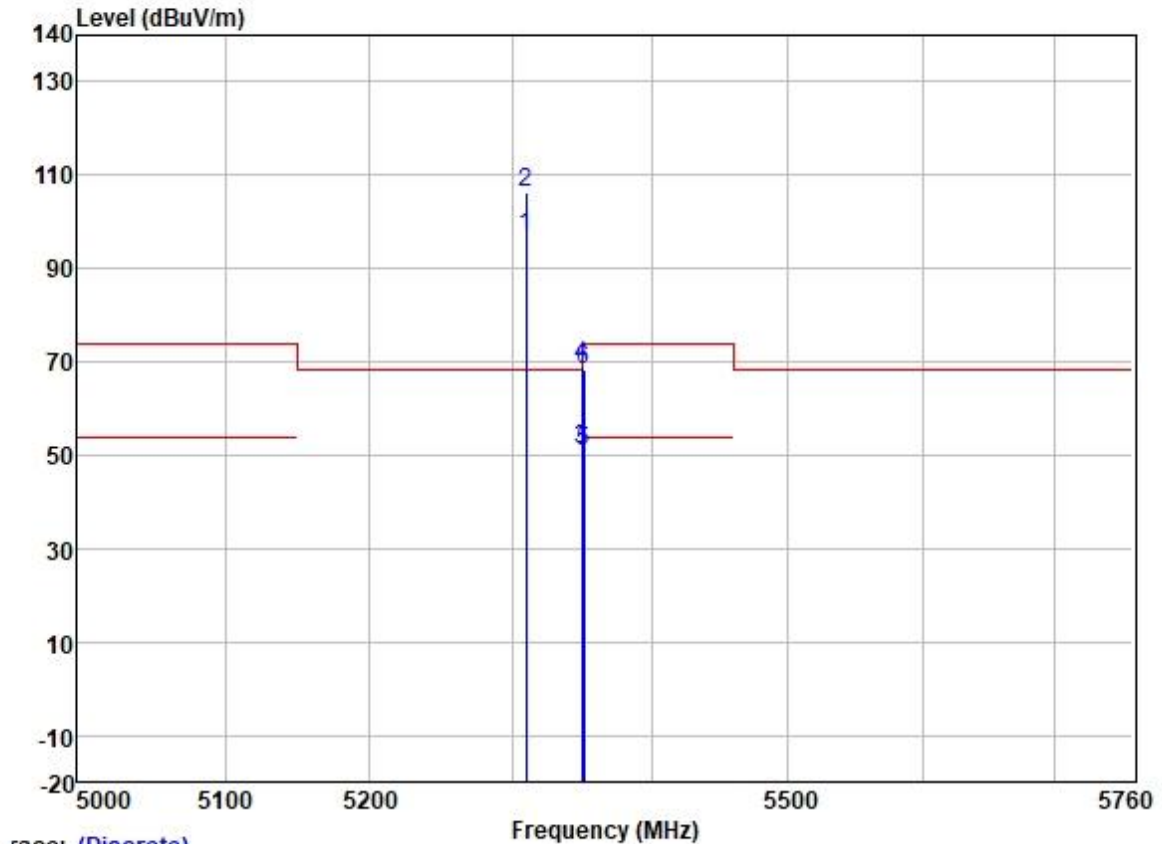

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	95.95	31.77	6.08	36.87	96.93	-----	-----	VERTICAL Average
2 *	5310.000	105.39	31.77	6.08	36.87	106.37	68.20	38.17	VERTICAL Peak
3	5350.020	50.35	31.77	6.05	36.88	51.29	54.00	-2.71	VERTICAL Average
4	5350.020	68.13	31.77	6.05	36.88	69.07	74.00	-4.93	VERTICAL Peak
5	5350.474	49.81	31.77	6.05	36.88	50.75	54.00	-3.25	VERTICAL Average
6	5350.955	67.23	31.77	6.05	36.88	68.17	74.00	-5.83	VERTICAL Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

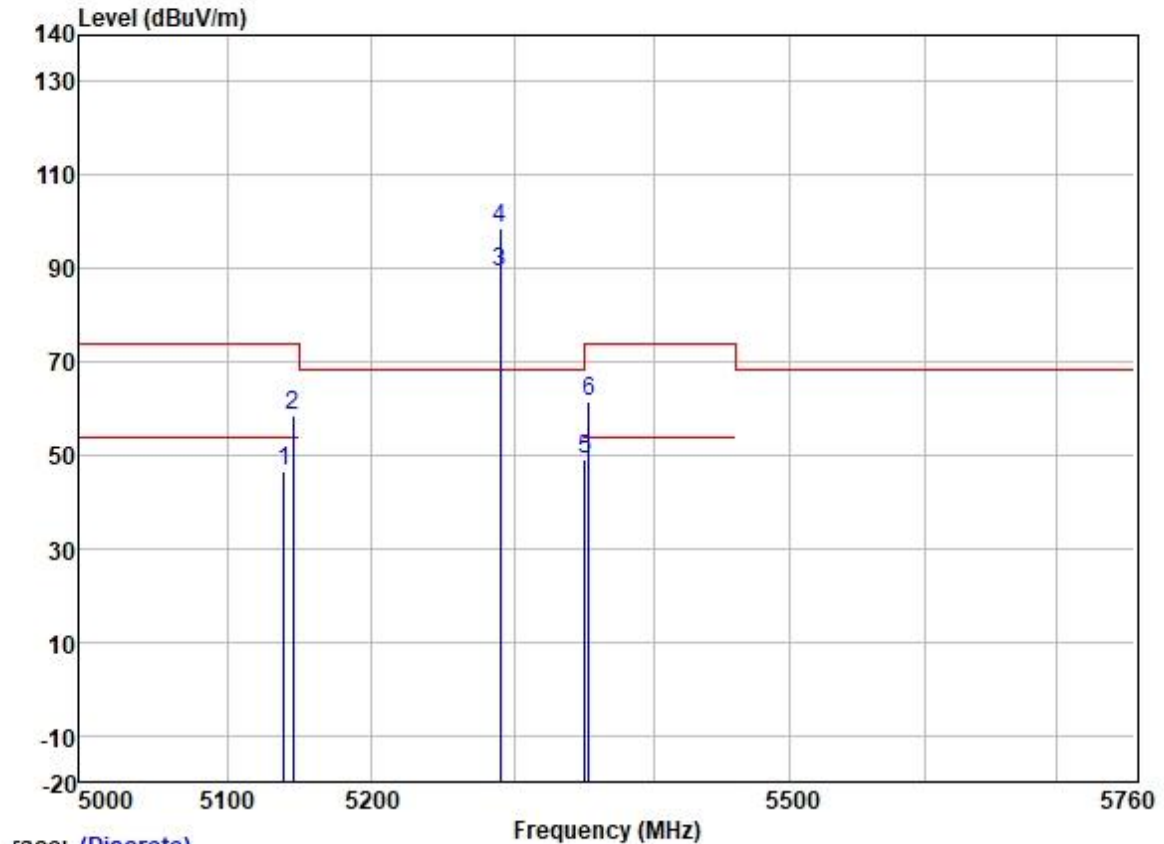

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5139.212	46.28	31.72	5.63	36.86	46.77	54.00	-7.23	HORIZONTAL Average
2	5145.384	58.18	31.72	5.62	36.86	58.66	74.00	-15.34	HORIZONTAL Peak
3	5290.000	88.44	31.76	6.00	36.87	89.33	-----	-----	HORIZONTAL Average
4 *	5290.000	97.91	31.76	6.00	36.87	98.80	68.20	30.60	HORIZONTAL Peak
5	5350.229	48.32	31.77	6.05	36.88	49.26	54.00	-4.74	HORIZONTAL Average
6	5353.288	60.36	31.77	6.05	36.88	61.30	74.00	-12.70	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

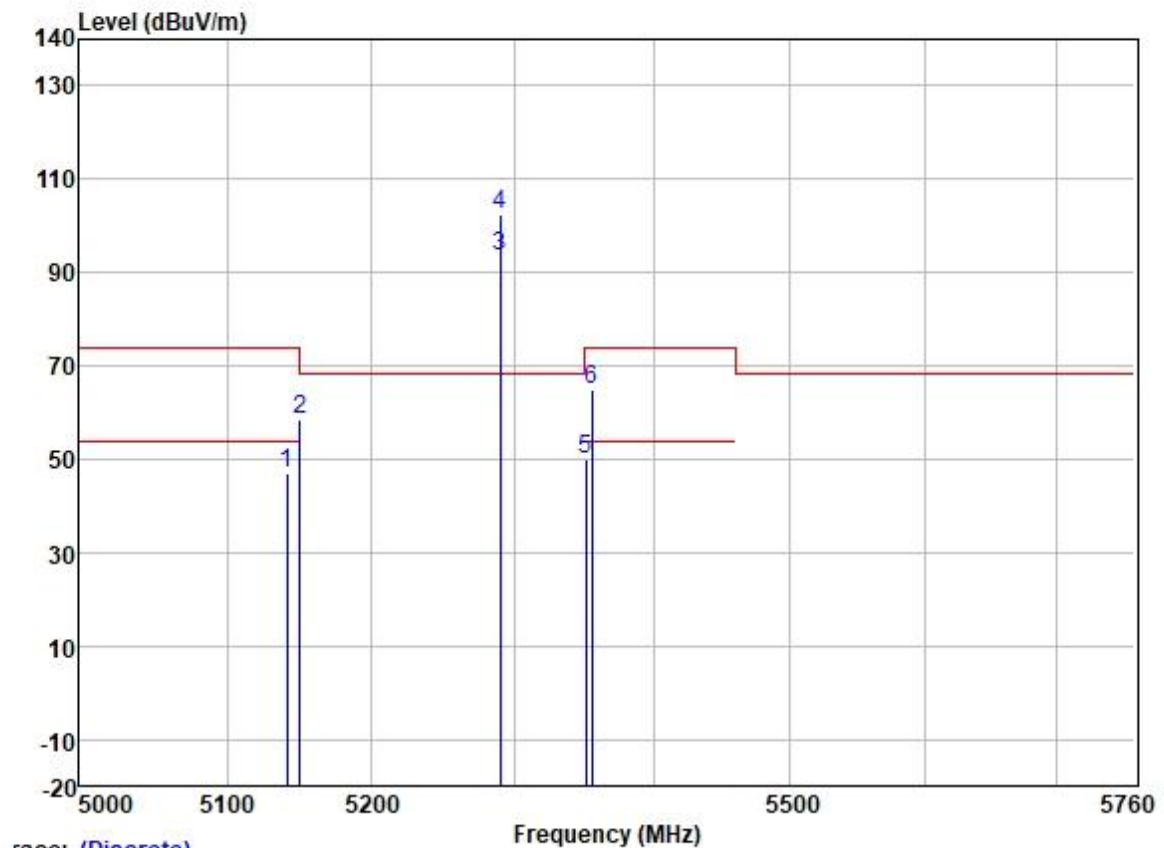

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5140.975	46.40	31.72	5.63	36.86	46.89	54.00	-7.11	VERTICAL	Average
2	5149.798	57.87	31.72	5.62	36.86	58.35	74.00	-15.65	VERTICAL	Peak
3	5290.000	92.79	31.76	6.00	36.87	93.68	-----	-----	VERTICAL	Average
4 *	5290.000	101.59	31.76	6.00	36.87	102.48	68.20	34.28	VERTICAL	Peak
5	5351.146	49.15	31.77	6.05	36.88	50.09	54.00	-3.91	VERTICAL	Average
6	5355.124	64.14	31.78	6.03	36.88	65.07	74.00	-8.93	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

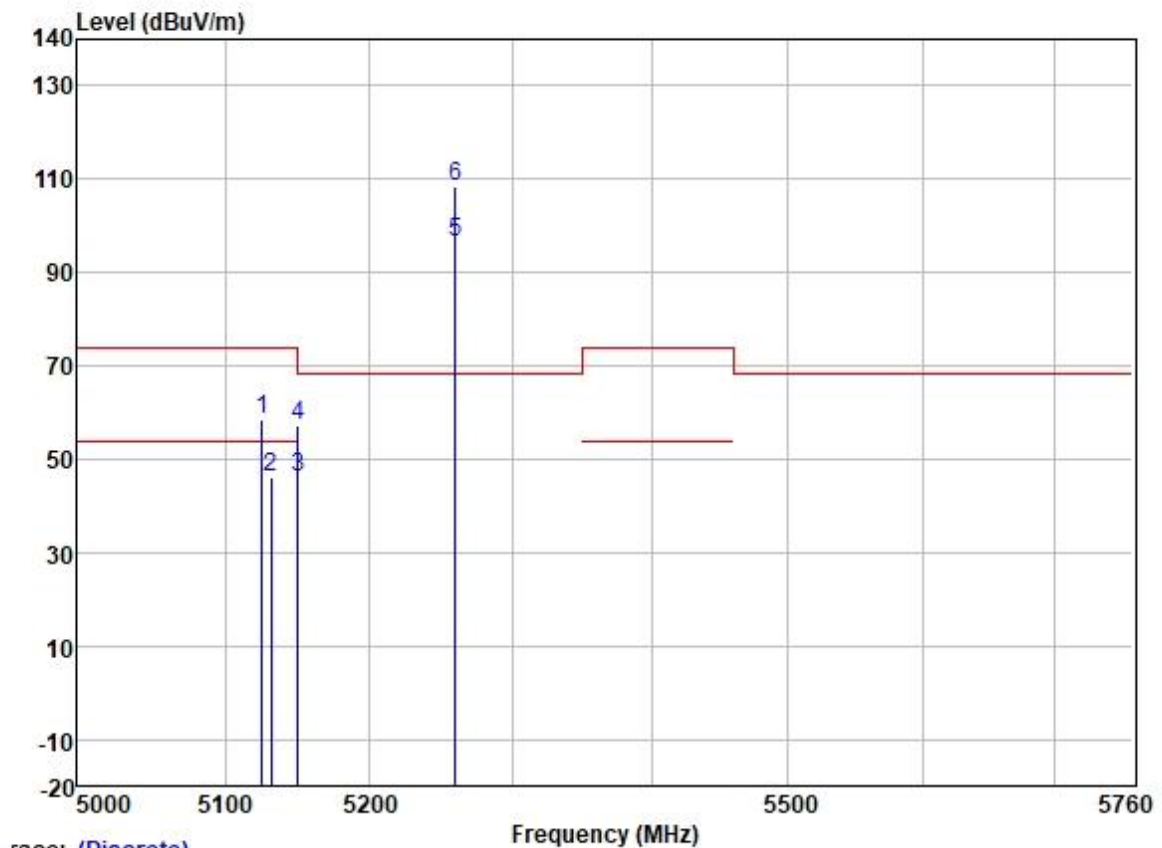

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5125.003	57.96	31.72	5.64	36.86	58.46	74.00	-15.54	HORIZONTAL Peak
2	5131.407	45.70	31.72	5.63	36.86	46.19	54.00	-7.81	HORIZONTAL Average
3	5149.980	45.61	31.72	5.62	36.86	46.09	54.00	-7.91	HORIZONTAL Average
4	5149.980	56.71	31.72	5.62	36.86	57.19	74.00	-16.81	HORIZONTAL Peak
5	5260.000	95.92	31.75	5.77	36.87	96.57	-----	-----	HORIZONTAL Average
6 *	5260.000	107.86	31.75	5.77	36.87	108.51	68.20	40.31	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:Low

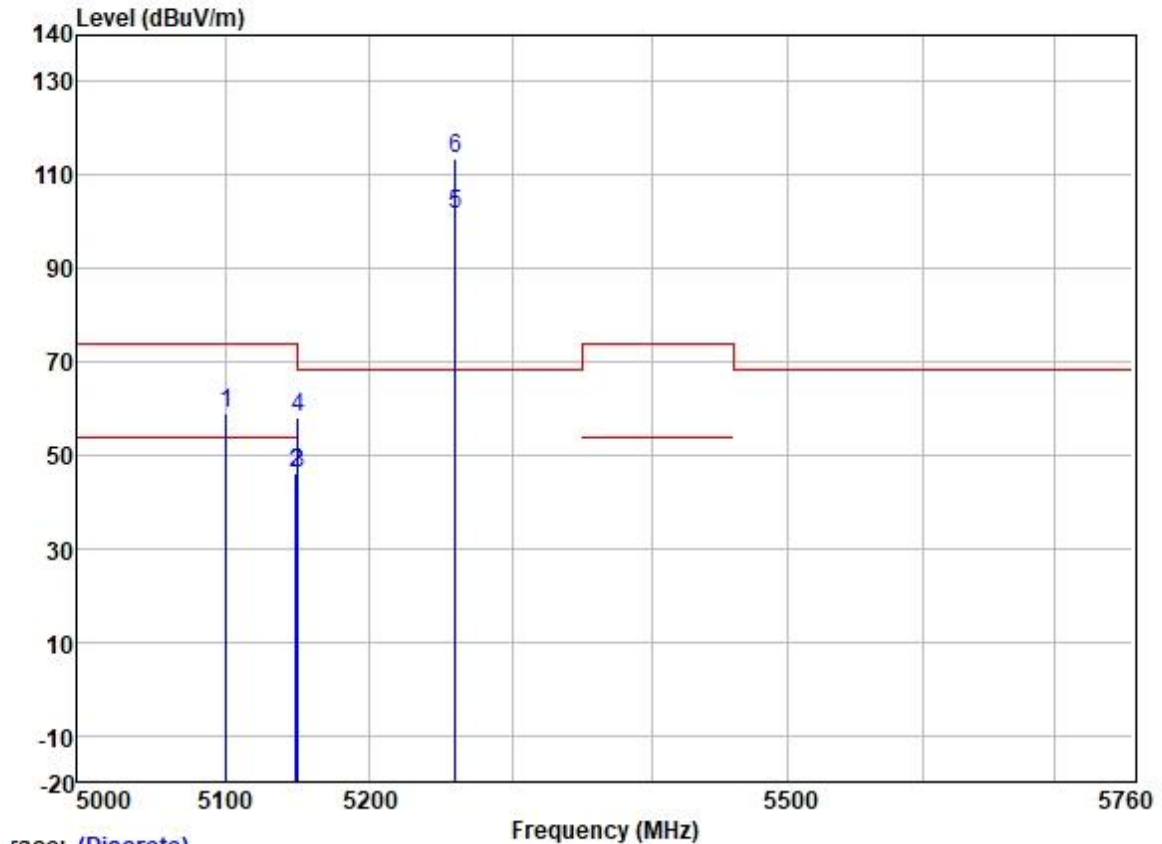

	Freq	Read	Antenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5100.708	58.25	31.72	5.65	36.86	58.76	74.00	-15.24	VERTICAL	Peak
2	5148.701	45.63	31.72	5.62	36.86	46.11	54.00	-7.89	VERTICAL	Average
3	5149.980	45.57	31.72	5.62	36.86	46.05	54.00	-7.95	VERTICAL	Average
4	5149.980	57.40	31.72	5.62	36.86	57.88	74.00	-16.12	VERTICAL	Peak
5	5260.000	100.90	31.75	5.77	36.87	101.55	-----	-----	VERTICAL	Average
6 *	5260.000	112.90	31.75	5.77	36.87	113.55	68.20	45.35	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

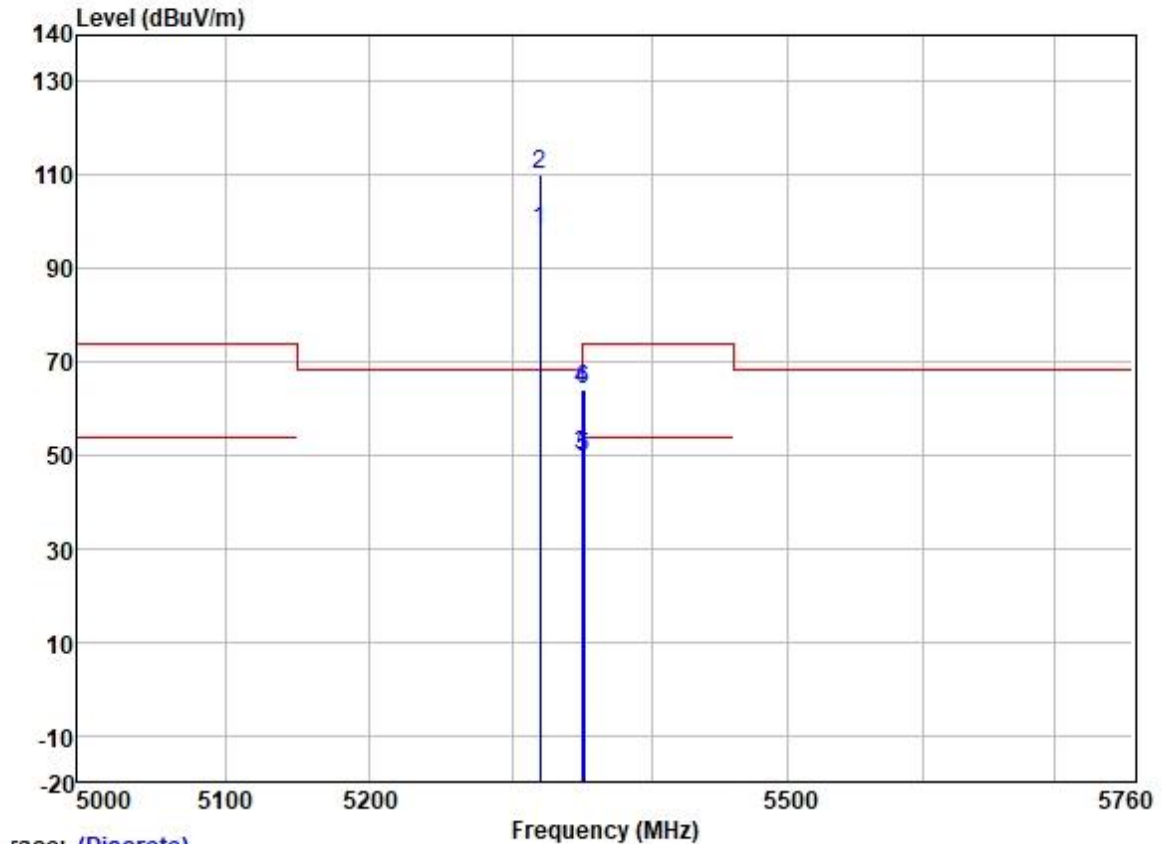

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	97.07	31.77	6.08	36.88	98.04	-----	-----	HORIZONTAL Average
2 *	5320.000	109.06	31.77	6.08	36.88	110.03	68.20	41.83	HORIZONTAL Peak
3	5350.020	49.11	31.77	6.05	36.88	50.05	54.00	-3.95	HORIZONTAL Average
4	5350.020	63.13	31.77	6.05	36.88	64.07	74.00	-9.93	HORIZONTAL Peak
5	5350.767	48.62	31.77	6.05	36.88	49.56	54.00	-4.44	HORIZONTAL Average
6	5351.167	63.16	31.77	6.05	36.88	64.10	74.00	-9.90	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation:802.11ax; Bandwidth:20MHz; Channel:High

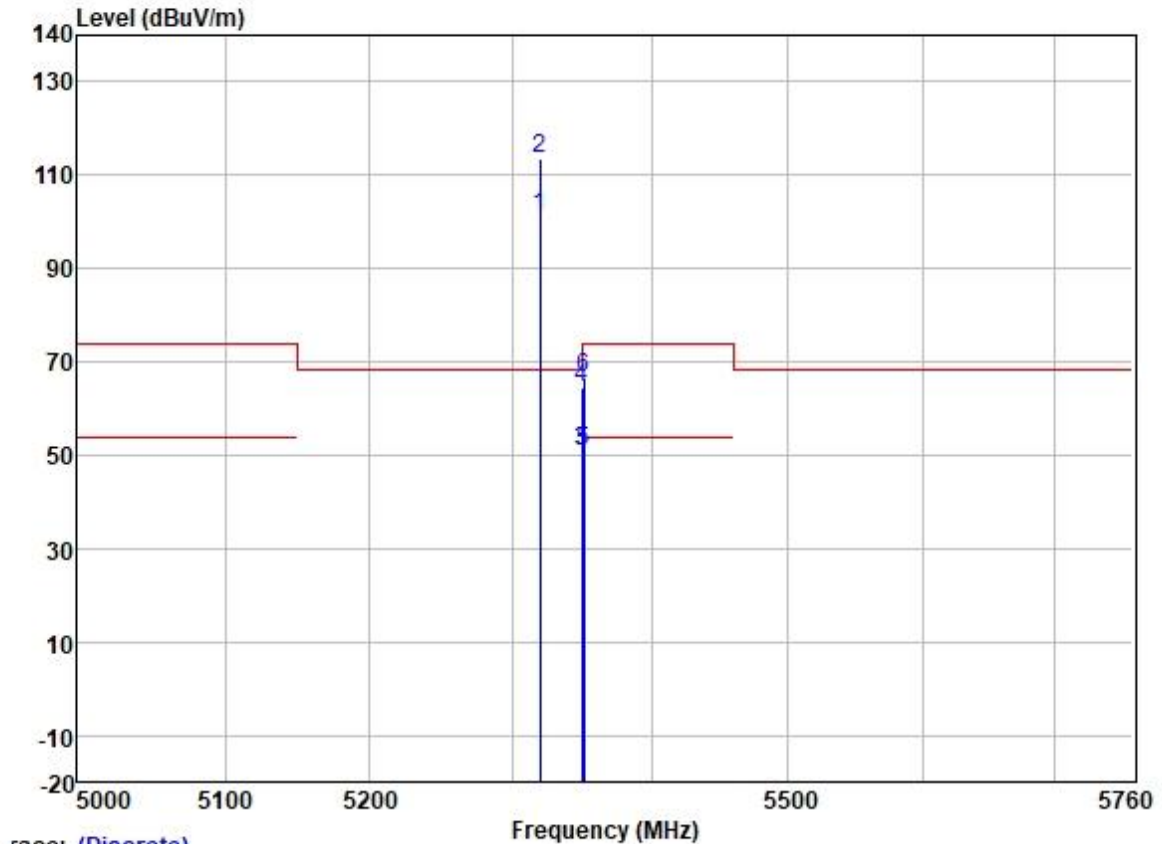

Trace: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	100.24	31.77	6.08	36.88	101.21	-----	-----	VERTICAL	Average
2 *	5320.000	112.55	31.77	6.08	36.88	113.52	68.20	45.32	VERTICAL	Peak
3	5350.020	49.93	31.77	6.05	36.88	50.87	54.00	-3.13	VERTICAL	Average
4	5350.020	63.75	31.77	6.05	36.88	64.69	74.00	-9.31	VERTICAL	Peak
5	5350.667	49.94	31.77	6.05	36.88	50.88	54.00	-3.12	VERTICAL	Average
6	5351.367	65.71	31.77	6.05	36.88	66.65	74.00	-7.35	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

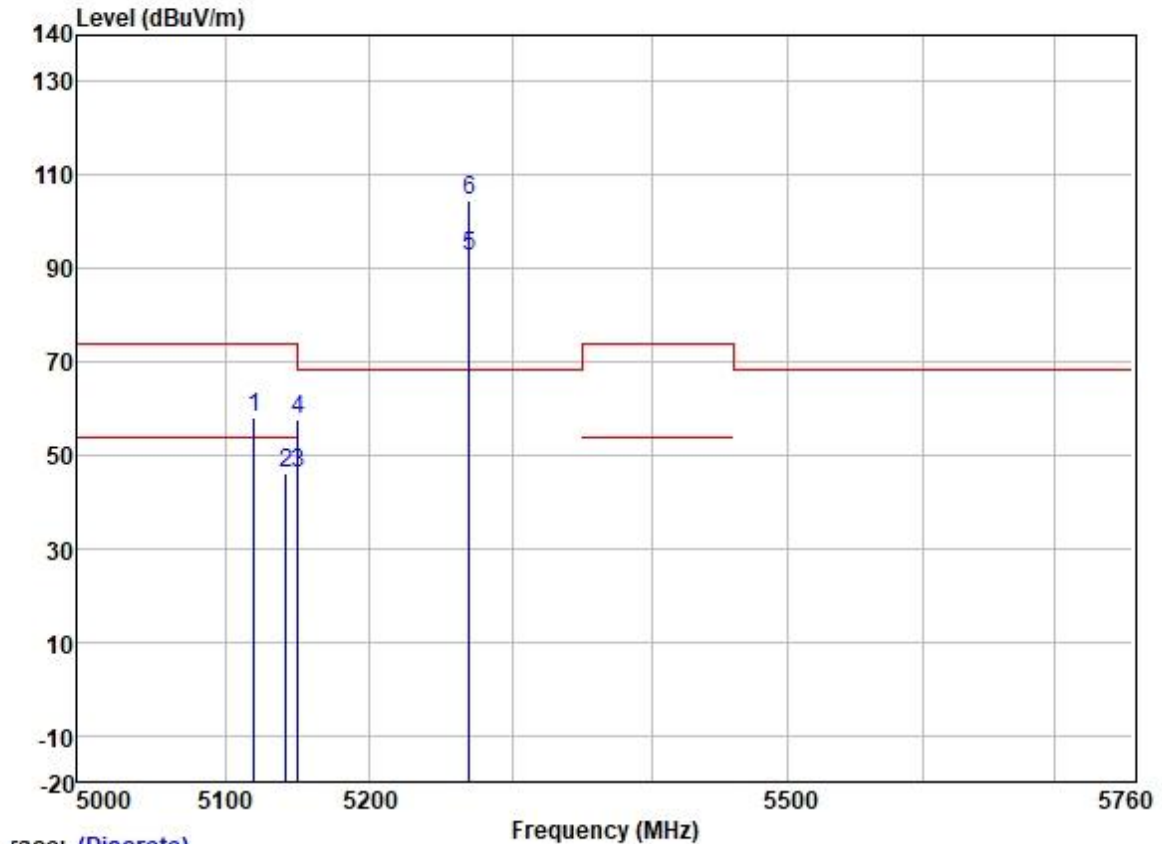


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5120.049	57.73	31.72	5.64	36.86	58.23	74.00	-15.77	HORIZONTAL Peak
2	5141.958	45.76	31.72	5.62	36.86	46.24	54.00	-7.76	HORIZONTAL Average
3	5149.980	45.45	31.72	5.62	36.86	45.93	54.00	-8.07	HORIZONTAL Average
4	5149.980	57.11	31.72	5.62	36.86	57.59	74.00	-16.41	HORIZONTAL Peak
5	5270.000	92.04	31.75	5.80	36.87	92.72	-----	-----	HORIZONTAL Average
6 *	5270.000	103.85	31.75	5.80	36.87	104.53	68.20	36.33	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:Low

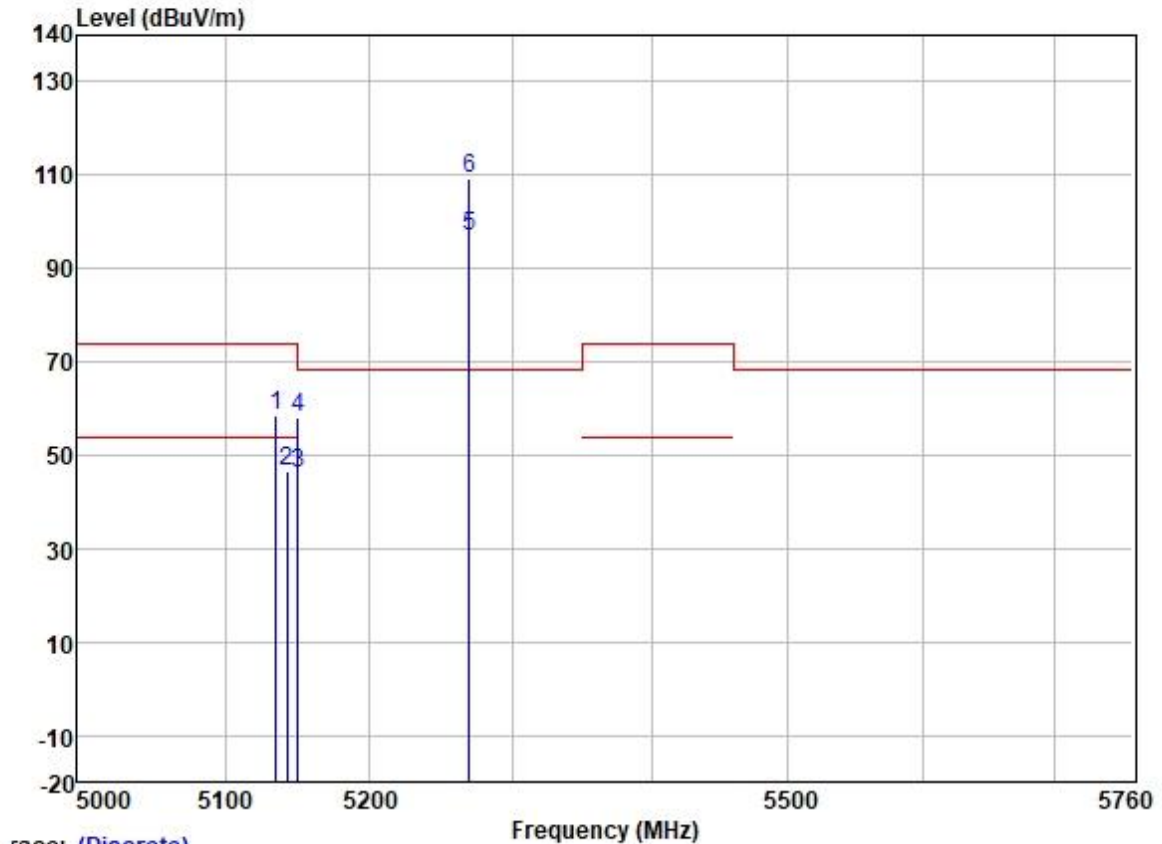

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5134.645	58.05	31.72	5.63	36.86	58.54	74.00	-15.46	VERTICAL Peak
2	5142.353	45.97	31.72	5.62	36.86	46.45	54.00	-7.55	VERTICAL Average
3	5149.980	45.72	31.72	5.62	36.86	46.20	54.00	-7.80	VERTICAL Average
4	5149.980	57.74	31.72	5.62	36.86	58.22	74.00	-15.78	VERTICAL Peak
5	5270.000	96.22	31.75	5.80	36.87	96.90	-----	-----	VERTICAL Average
6 *	5270.000	108.57	31.75	5.80	36.87	109.25	68.20	41.05	VERTICAL Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

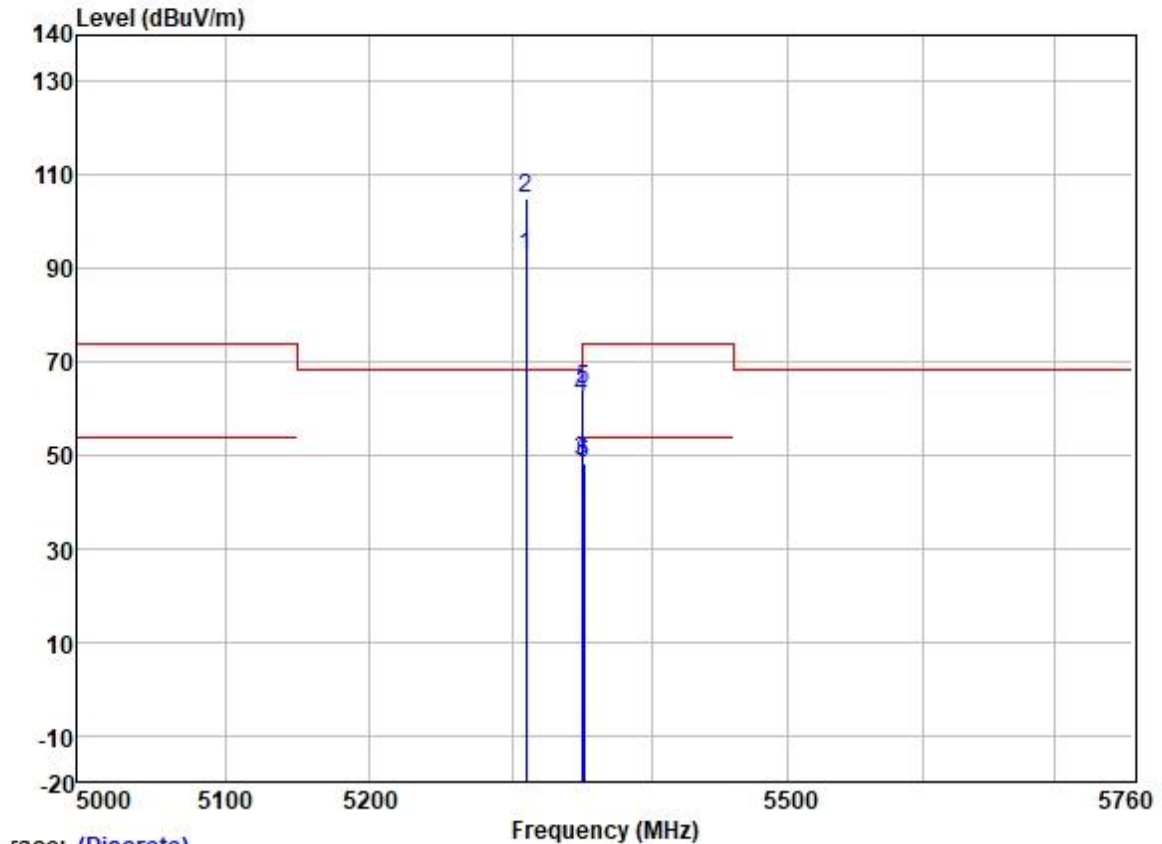

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	5310.000	91.52	31.77	6.08	36.87	92.50	-----	HORIZONTAL	Average
2 *	5310.000	104.02	31.77	6.08	36.87	105.00	68.20	36.80	HORIZONTAL Peak
3	5350.020	47.73	31.77	6.05	36.88	48.67	54.00	-5.33	HORIZONTAL Average
4	5350.020	61.45	31.77	6.05	36.88	62.39	74.00	-11.61	HORIZONTAL Peak
5	5350.594	62.97	31.77	6.05	36.88	63.91	74.00	-10.09	HORIZONTAL Peak
6	5351.075	47.43	31.77	6.05	36.88	48.37	54.00	-5.63	HORIZONTAL Average

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax; Bandwidth:40MHz; Channel:High

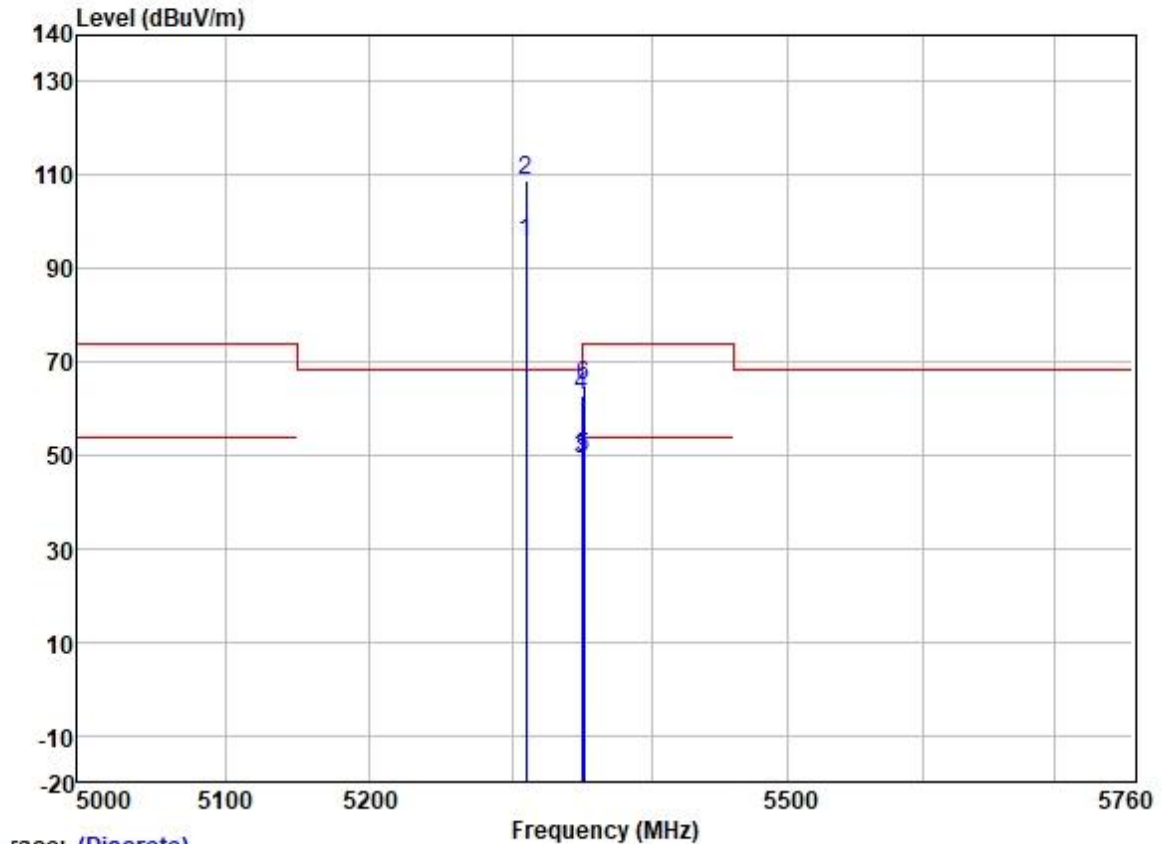

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	94.52	31.77	6.08	36.87	95.50	-----	-----	VERTICAL Average
2 *	5310.000	107.76	31.77	6.08	36.87	108.74	68.20	40.54	VERTICAL Peak
3	5350.020	47.97	31.77	6.05	36.88	48.91	54.00	-5.09	VERTICAL Average
4	5350.020	61.96	31.77	6.05	36.88	62.90	74.00	-11.10	VERTICAL Peak
5	5350.594	48.54	31.77	6.05	36.88	49.48	54.00	-4.52	VERTICAL Average
6	5351.436	63.85	31.77	6.05	36.88	64.79	74.00	-9.21	VERTICAL Peak