

# TEST REPORT

## Part 15 Subpart C 15.247

**Equipment under test** Wireless Barcode Scanner

**Model name** TSK-6000

**FCC ID** 2AOHVT SK-6000

**Applicant** Techscan Korea Co.,Ltd.

**Manufacturer** Techscan Korea Co.,Ltd.

**Date of test(s)** 2018.01.08 ~ 2018.01.12

**Date of issue** 2018.01.16

**Issued to**

**Techscan Korea Co.,Ltd.**

Guro-Dong-410, Woorim e-biz Center II, 12, Digital-ro 33-gil,  
Guro-gu, Seoul, Korea  
Tel: + 82-2-890-5440 / Fax: + 82-2-890-5443

**Issued by**  
**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, Korea  
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Young-Jin Lee Test engineer	Hyeon-su, Jang Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (2 ) of (44)

### Revision history

Revision	Date of issue	Test report No.	Description
-	2018.01.16	KES-RF-18T0011	Initial

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## TABLE OF CONTENTS

1.	General information .....	4
1.1.	EUT description .....	4
1.2.	Test configuration.....	5
1.3.	Device modifications.....	5
1.4.	Information about derivative model .....	5
1.5.	Frequency/channel operations.....	5
1.6.	Accessory information .....	5
1.7.	Measurement Uncertainty .....	6
2.	Summary of tests.....	7
3.	Test results.....	8
3.1.	20 dB bandwidth .....	8
3.2.	Output power .....	11
3.3.	Carrier frequency separation .....	14
3.4.	Number of hopping frequency .....	16
3.5.	Time of occupancy .....	18
3.6.	Radiated restricted band and emissions.....	21
3.7.	Conducted band edge and out of band emissions.....	35
3.8.	AC conducted emissions .....	40
Appendix A.	Measurement equipment .....	42
Appendix B.	Test setup photo.....	43



## KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (4 ) of (44)

### 1. General information

Applicant: Techscan Korea Co.,Ltd.  
Applicant address: Guro-Dong-410, Woorim e-biz Center II, 12, Digital-ro 33-gil,  
Guro-gu, Seoul, Korea  
Test site: KES Co., Ltd.  
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea  
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC rule part(s): 15.247  
FCC ID: 2AOHVT SK-6000  
Test device serial No.:  Production  Pre-production  Engineering

#### 1.1. EUT description

Equipment under test Wireless Barcode Scanner  
Frequency range 2402 MHz ~ 2480 MHz (EDR)  
Model TSK-6000  
Derivative model TSK-6000  
Modulation technique FHSS //  $\pi/4$ -DQPSK, 8DPSK  
Number of channels 79ch (Hopping mode), 20ch(AFH mode)  
Antenna specification Type : PCB Antenna // Peak gain : 0.5 dBi  
Power source DC 3.7 V (Rechargeable Battery)

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

### **Pseudorandom frequency hopping sequence**

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

### **Equal hopping frequency use**

The channels of this system will be used equally over the long-term distribution of the hopsets.

### **System receiver input bandwidth**

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### **1.2. Test configuration**

The **Techscan Korea Co.,Ltd. Wireless Barcode Scanner FCC ID: 2AOHVTSTK-6000** was tested per the guidance of ANSI C63.10-2013 and DA 00-705. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

### **1.3. Device modifications**

N/A

### **1.4. Information about derivative model**

N/A

### **1.5. Frequency/channel operations**

Ch.	Frequency (MHz)	Rate(Mbps)
00	2402	2,3
.	.	.
39	2441	2,3
.	.	.
78	2480	2,3

### **1.6. Accessory information**

Applicant	Equipment	Manufacturer	Model	Power source
-	-	-	-	-



### KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (6 ) of (44)

#### 1.7. Measurement Uncertainty

Test Item	Uncertainty	
Uncertainty for Conduction emission test	2.62 dB	
Uncertainty for Radiation emission test (include Fundamental emission)	9kHz - 30MHz	4.54 dB
	30MHz - 1GHz	4.36 dB
	Above 1GHz	5.00 dB
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


## 2. Summary of tests

Reference	Test description	Test results
15.247(a)(1)(iii)	20 dB bandwidth	Pass
15.247(b)(1)	Output power	Pass
15.247(a)(1)	Channel separation	Pass
15.247(a)(1)(iii)	Number of channels	Pass
15.247(a)(1)(iii)	Time of occupancy	Pass
15.205, 15.209	Radiated restricted band and emission	Pass
15.207(d)	Conducted band edge and out of band emissions	Pass
15.207(a)	AC conducted emissions	Pass

### 3. Test results

#### 3.1. 20 dB bandwidth

##### Test setup



##### Test procedure

DA 00-705

##### Test setting

1. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
2. RBW  $\geq$  1% of the 20 dB bandwidth
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Sweep = auto couple
7. Trace mode = max hold

##### Limit

Not applicable



## KES Co., Ltd.


C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (9 ) of (44)

### Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(MHz)
2 402	00	2	1.237
2 441	39		1.242
2 480	78		1.237
2 402	00	3	1.207
2 441	39		1.203
2 480	78		1.207


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

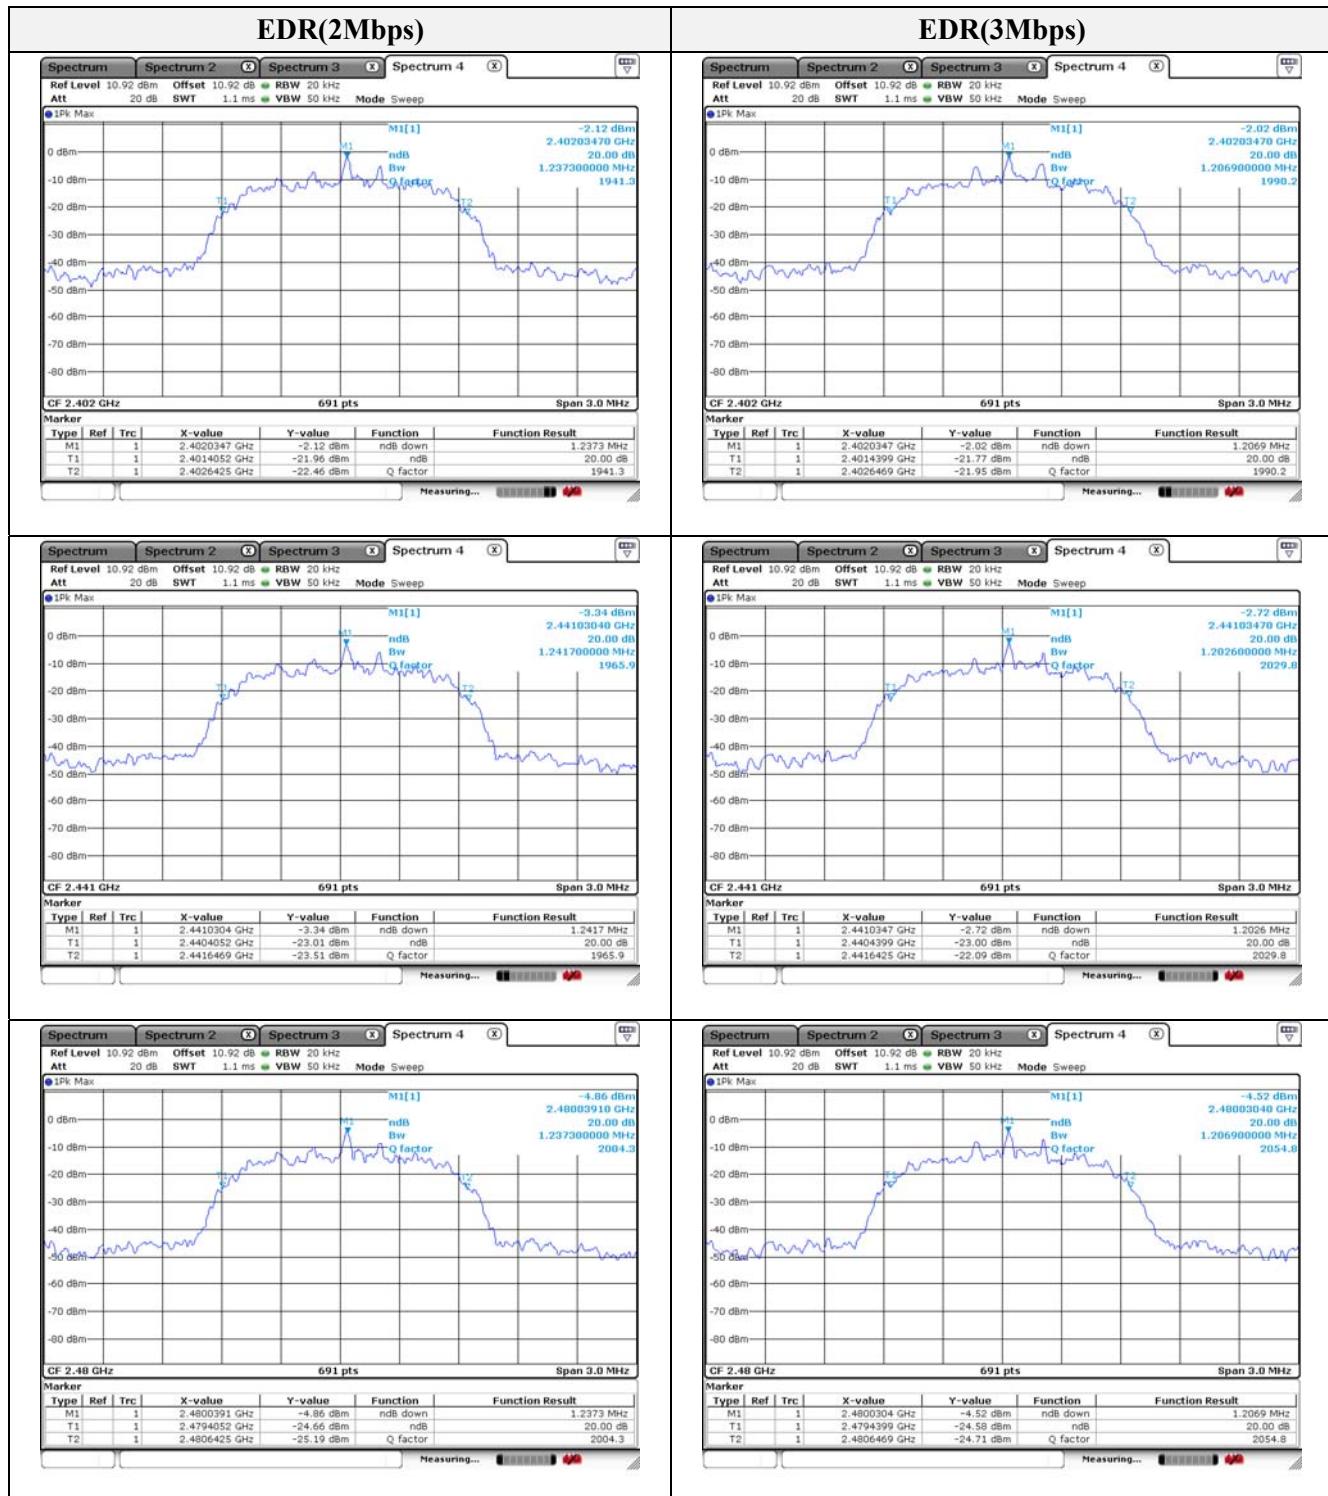

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.2. Output power

#### Test setup



#### Test procedure

DA 00-705

#### Test setting

1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

#### Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.



## KES Co., Ltd.


C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (12 ) of (44)

### Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured power (dBm)	Peak Power Limit (dBm)
2 402	00	2	0.77	20.97
2 441	39		-0.17	
2 480	78		-1.71	
2 402	00		1.14	
2 441	39		0.23	
2 480	78		-1.28	


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

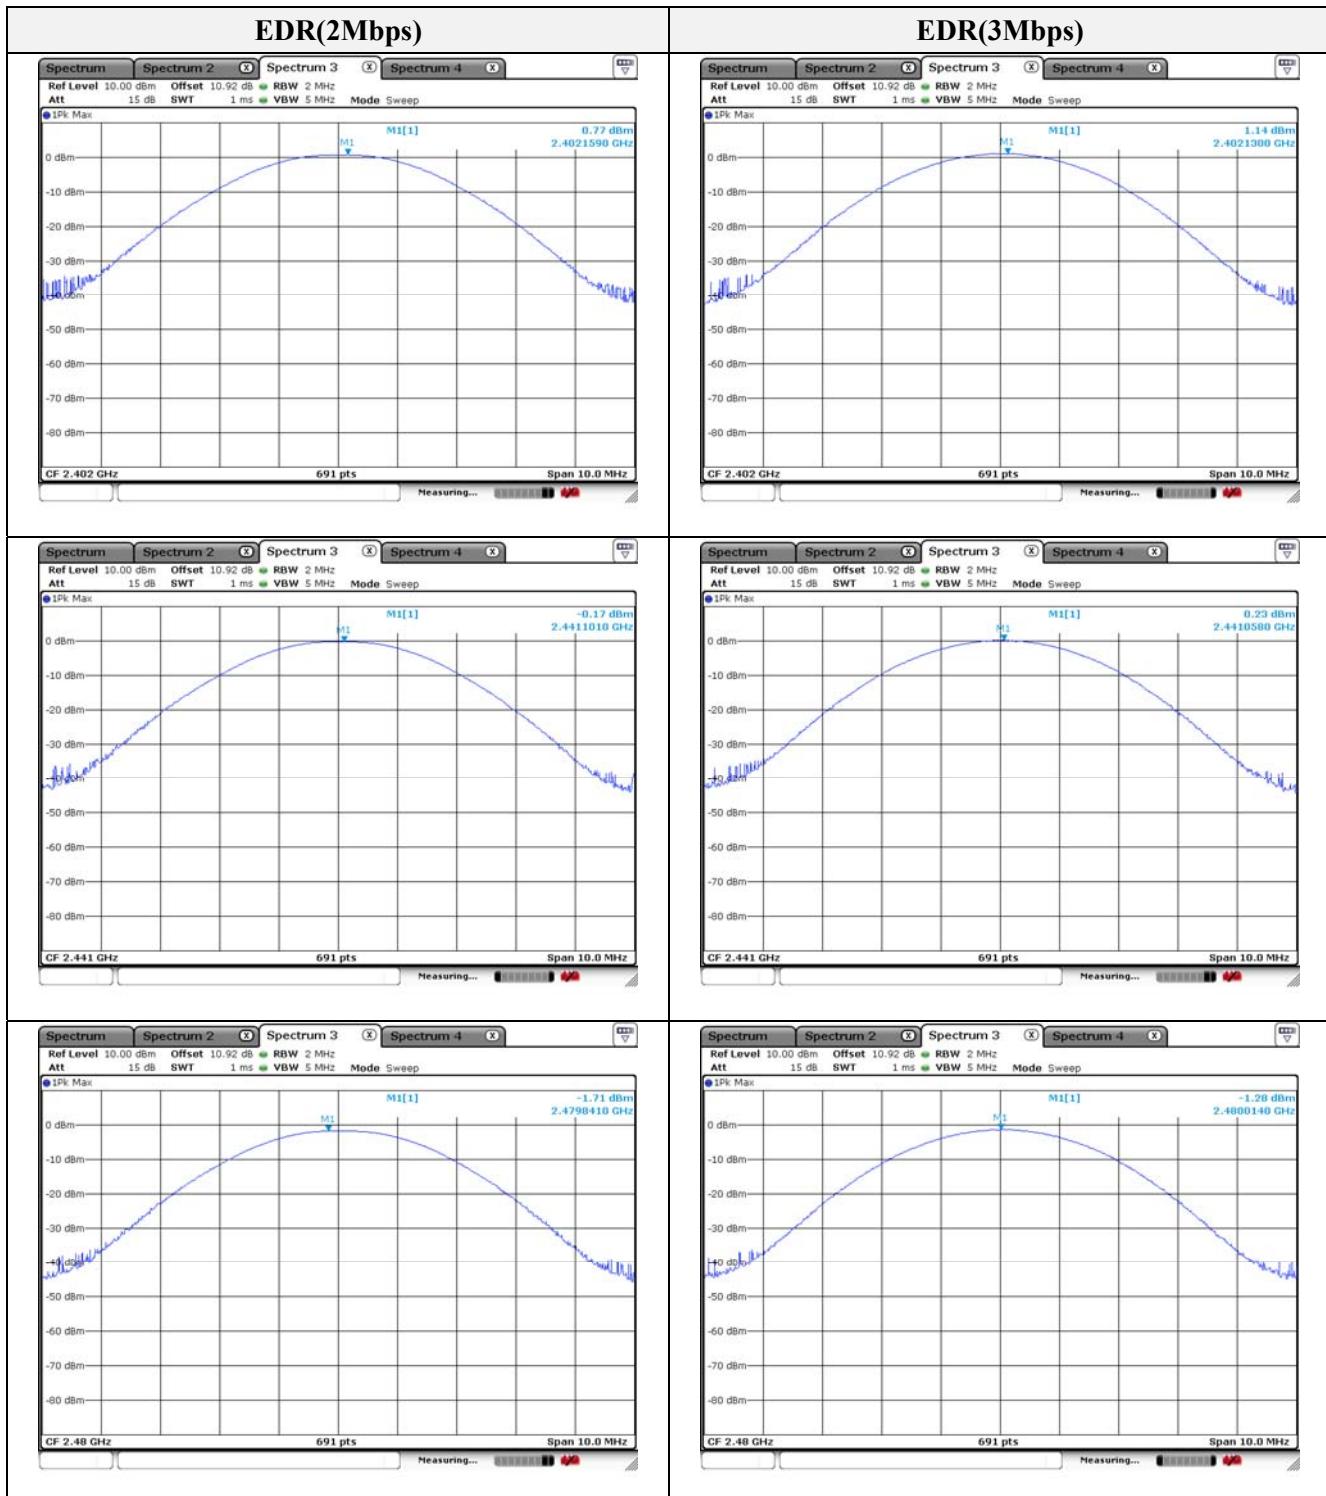

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.3. Carrier frequency separation

#### Test setup



#### Test procedure

DA 00-705

#### Test setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span
4. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

#### Limit


According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test results**

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)
2 441	39	2	1 003
2 441	39	3	1 003


**Note:**

Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.

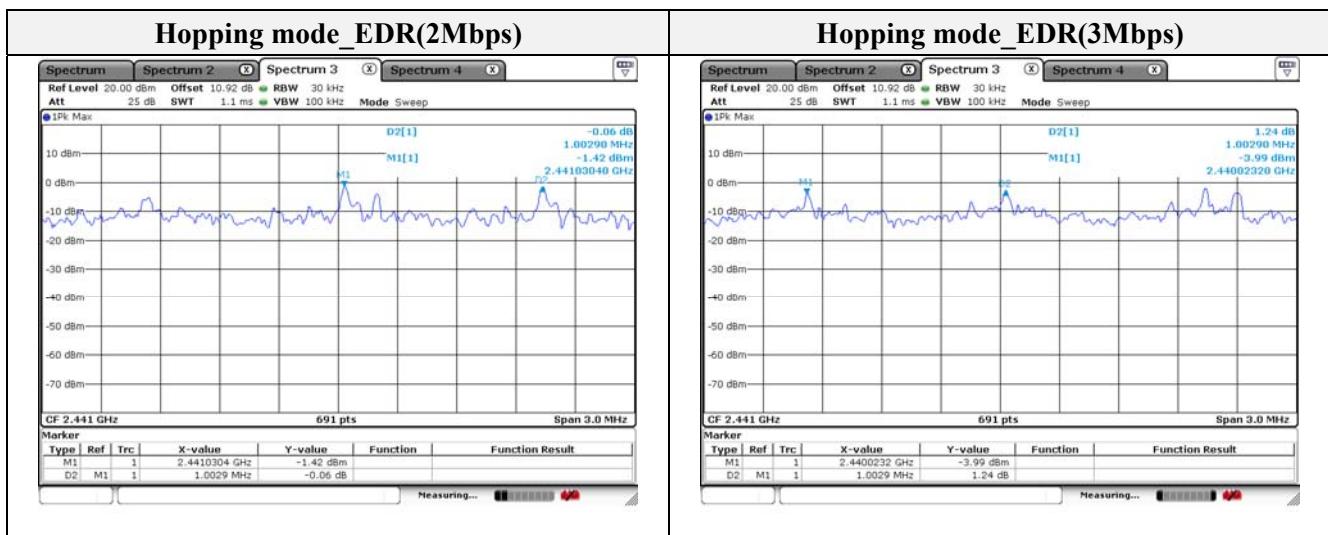

### 3.4. Number of hopping frequency

#### Test setup



#### Test procedure

DA 00-705





#### Test setting

1. The EUT must have its hopping function enabled.
2. Frequency range: 2 400 MHz ~ 2 441.5 MHz, 2 441.5 MHz ~ 2 483.5 MHz
3. Span = the frequency band of operation
4. RBW = 300 kHz ( $\geq$  1% of the span)
5. VBW = 1 MHz ( $\geq$  RBW)
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### Limit


According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

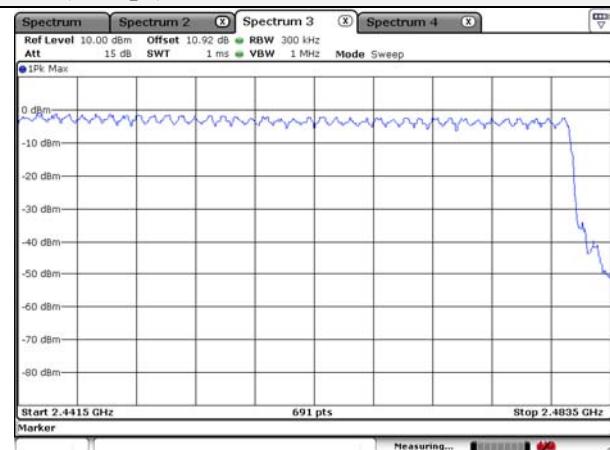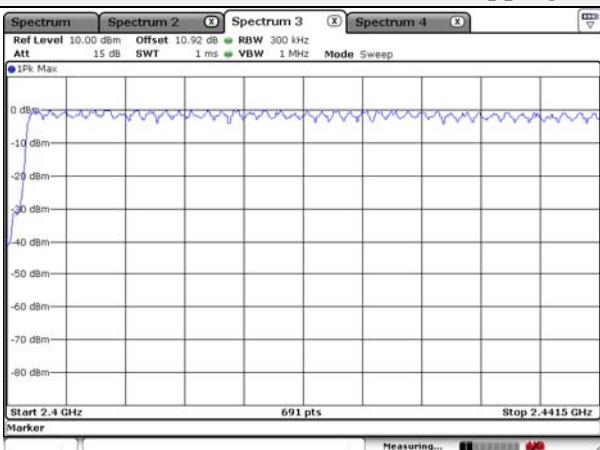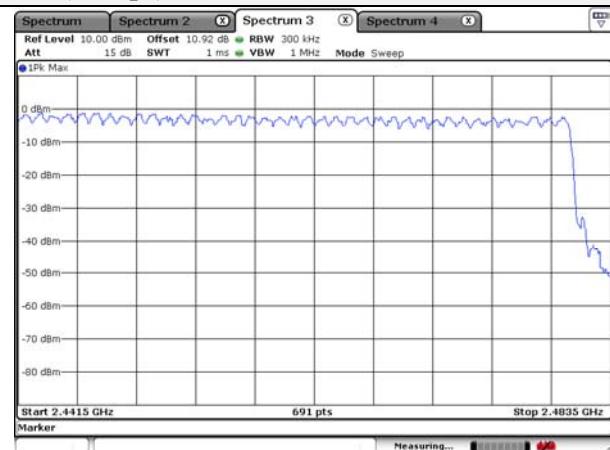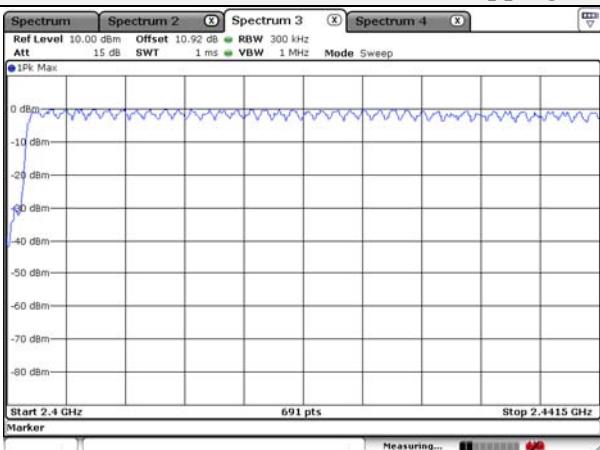**Test results**
**Hopping mode\_EDR(2Mbps)**

**Hopping mode\_EDR(3Mbps)**

**Note:**

In case of AFH mode, minimum number of hopping channels is 20.

### 3.5. Time of occupancy

#### Test setup



#### Test procedure

DA 00-705

#### Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
4. RBW = 1 MHz
5. VBW = 1 MHz ( $\geq$  RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time =  $0.4(s) \times 79 = 31.6(s)$

Time of occupancy on the TX channel in 31.6 sec

= time domain slot length  $\times$  (hop rate  $\div$  number of hop per channel)  $\times$  31.6

#### • Adaptive Frequency Hopping

A period time =  $0.4(s) \times 20 = 8.0(s)$

Time of occupancy on the TX channel in 8.0 sec

= time domain slot length  $\times$  (hop rate  $\div$  number of hop per channel)  $\times$  8.0

**Test results**
**Operation mode: GFSK**

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
2-DH1	2 441	0.517	170.24	400
2-DH3	2 441	1.772	285.28	400
2-DH5	2 441	3.019	323.41	400
3-DH1	2 441	0.517	170.24	400
3-DH3	2 441	1.772	284.64	400
3-DH5	2 441	3.019	324.05	400

**Note:**
**Normal Mode**

 2-DH1: Dwell time (ms)  $\times$   $[(1\ 600 \div 2) \div 79] \times 31.6(s) = 170.24$  (ms)


 2-DH3: Dwell time (ms)  $\times$   $[(1\ 600 \div 4) \div 79] \times 31.6(s) = 285.28$  (ms)

 2-DH5: Dwell time (ms)  $\times$   $[(1\ 600 \div 6) \div 79] \times 31.6(s) = 323.41$  (ms)

 3-DH1: Dwell time (ms)  $\times$   $[(1\ 600 \div 2) \div 79] \times 31.6(s) = 170.24$  (ms)

 3-DH3: Dwell time (ms)  $\times$   $[(1\ 600 \div 4) \div 79] \times 31.6(s) = 284.64$  (ms)

 3-DH5: Dwell time (ms)  $\times$   $[(1\ 600 \div 6) \div 79] \times 31.6(s) = 324.05$  (ms)

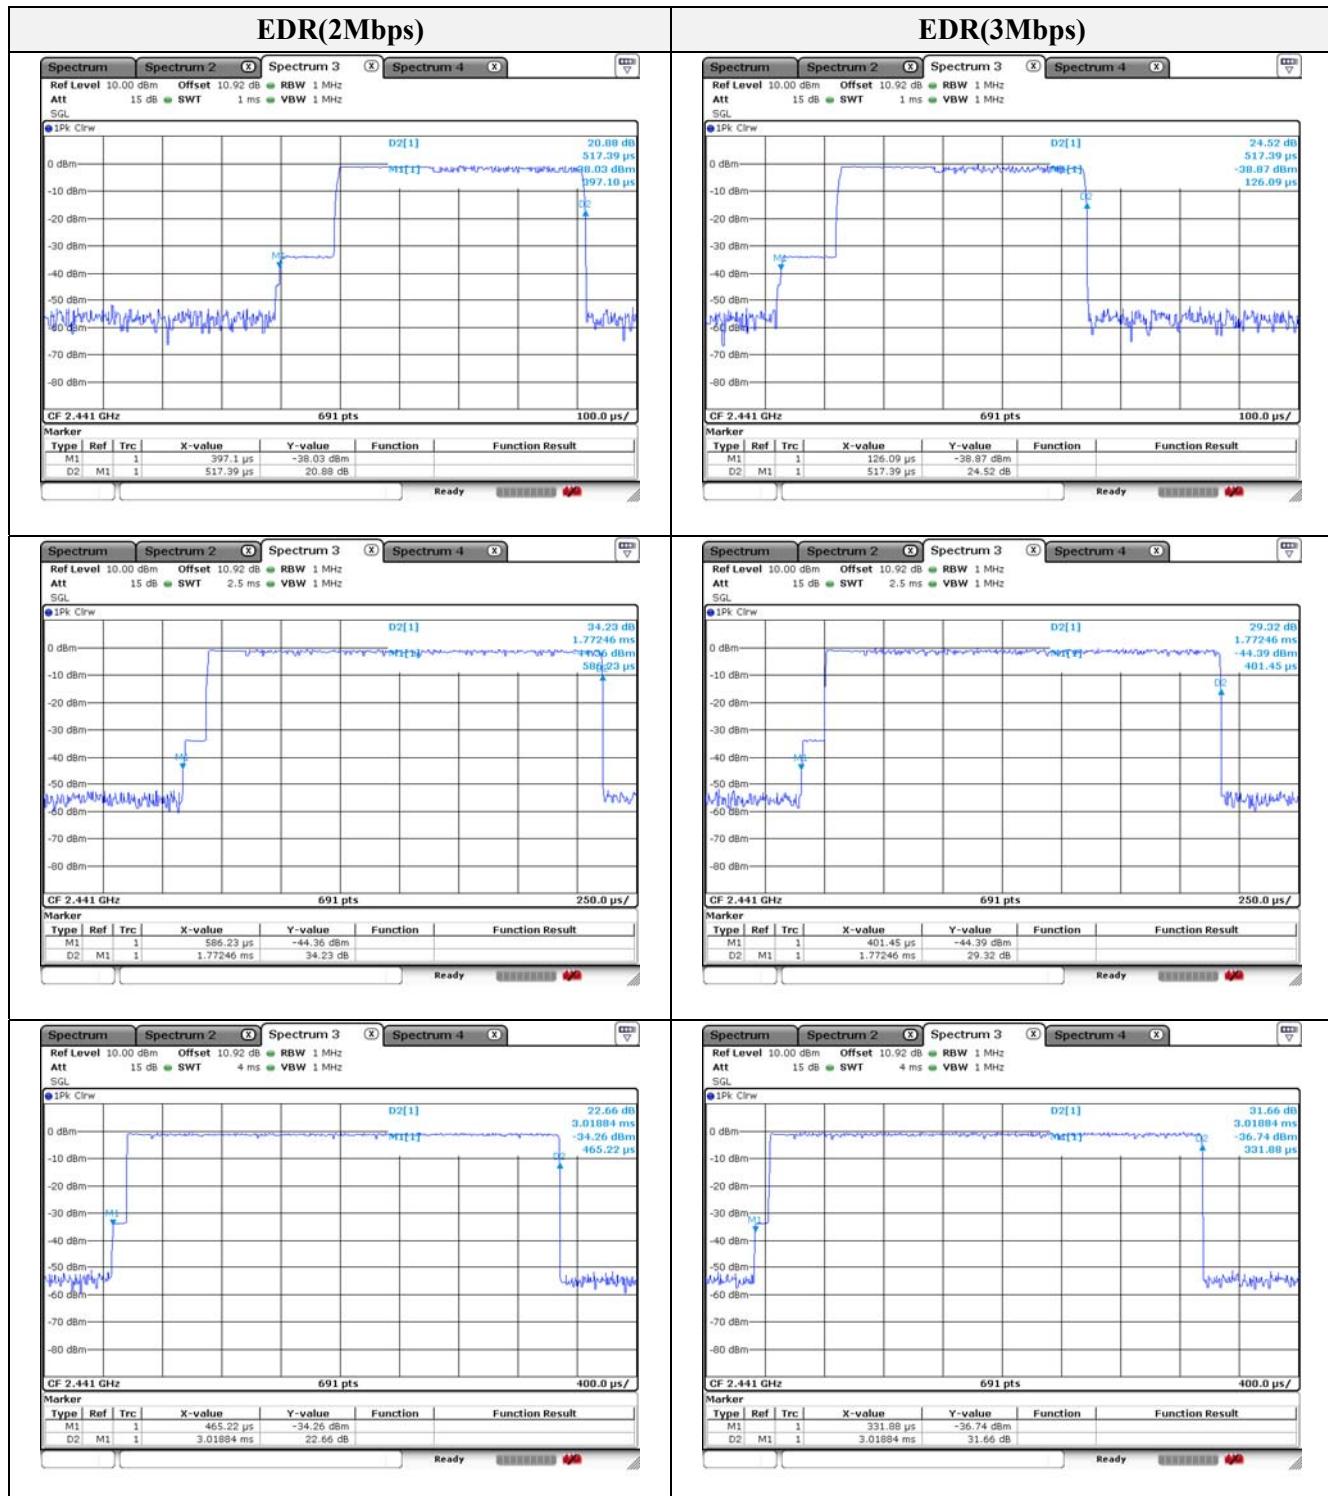


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


### 3.6. Radiated restricted band and emissions

#### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

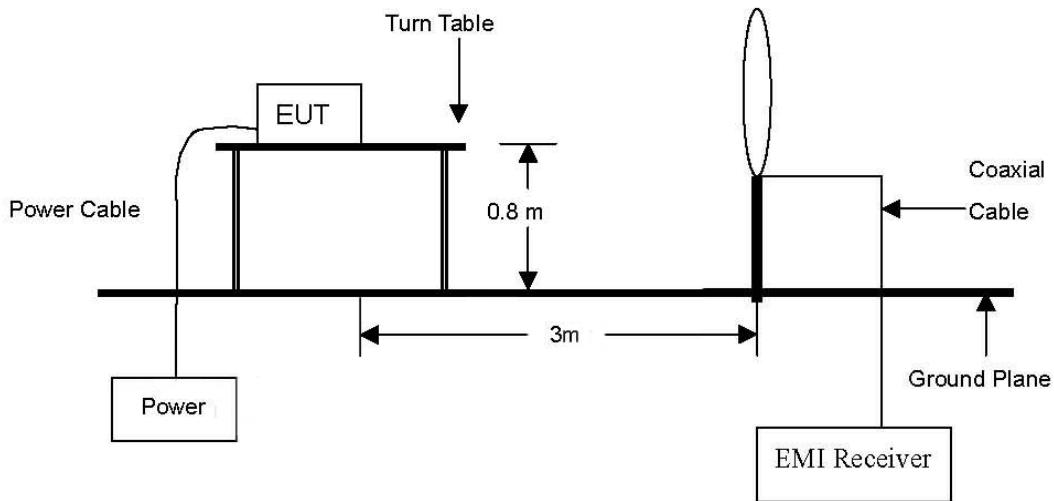

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

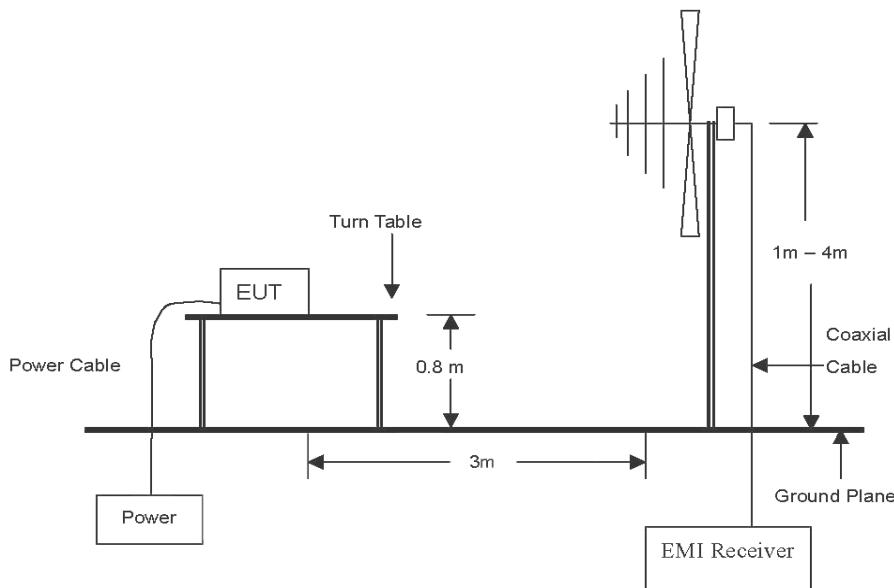

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

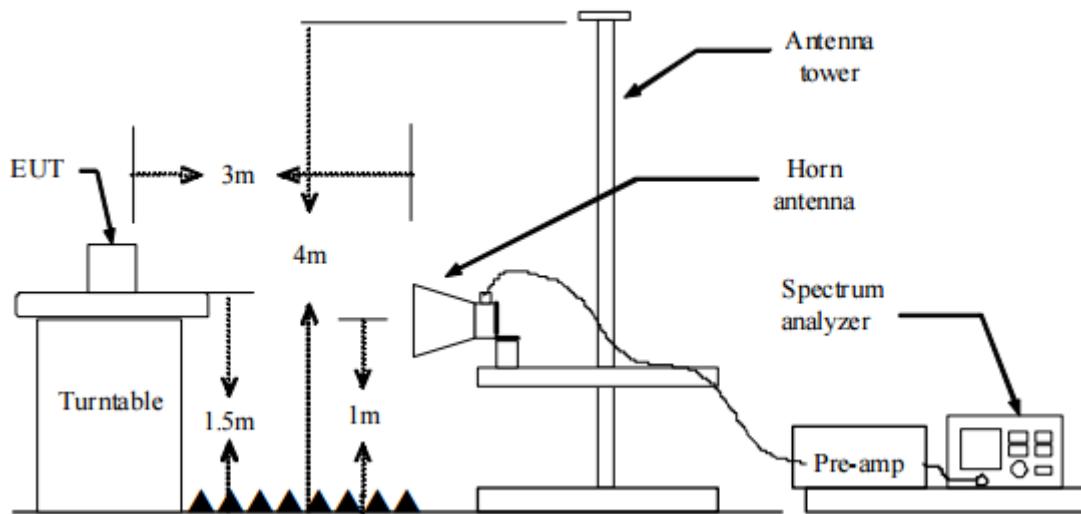

**Test procedure**

1. The EUT is placed on a turntable, which is 0.8 m(below 1GHz) and 1.5 m(above 1GHz) above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum analyzer settings for  $f < 1 \text{ GHz}$ :  
Span = wide enough to fully capture the emission being measured  
RBW = 100 kHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = quasi peak  
Trace = max hold
8. Spectrum analyzer settings for  $f \geq 1 \text{ GHz}$ : Peak  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
9. Spectrum analyzer settings for  $f \geq 1 \text{ GHz}$ : Average  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz  
VBW  $\geq 1/T \text{ Hz}$ , where T= pulse width in seconds  
Sweep = auto  
Detector function = peak  
Trace = max hold
10. Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels =  $\Delta t = \tau[\text{ms}] \times 79 \text{ channels} = 238.501 \text{ ms}$ , where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t[\text{ms}] = H \rightarrow \text{Round up to next highest integer, } H' = 1$
  - c. Worst Case Dwell Time =  $\tau[\text{ms}] \times H' = 3.019 \text{ ms}$
  - d. Duty Cycle Correction =  $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -30.40 \text{ dB}$
11. Both 2Mbps & 3Mbps data rate were investigated. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**Note:**

1. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
2. When Average result is different from peak result over 20 dB (over-averaging), according to 15.35 (c), as a "duty cycle correction factor", pulse averaging with  $20 \log(\text{duty cycle})$  has to be used.  
Duty cycle correction factor =  $20\log(\text{dwell time}/100 \text{ ms})$
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.
5. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + Correction factors(dB/m) + Cable loss(dB) + or  $F_d$ (dB)
6. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
7. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
8. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.
9. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
10. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
11.  $f < 30 \text{ MHz}$ , extrapolation factor of 40 dB/decade of distance.  $F_d = 40\log(D_m / D_s)$   
 $f \geq 30 \text{ MHz}$ , extrapolation factor of 20 dB/decade of distance.  $F_d = 20\log(D_m / D_s)$

Where:

$F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters



## KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (25 ) of (44)

### Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Test results (Below 30 MHz)**


Mode: EDR

Transfer rate: 3 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

Frequency (MHz)	Level (dB $\mu$ V)	Ant. Pol. (H/V)	CF (dB)	F <sub>d</sub> (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No spurious emissions were detected within 20dB of the limit							

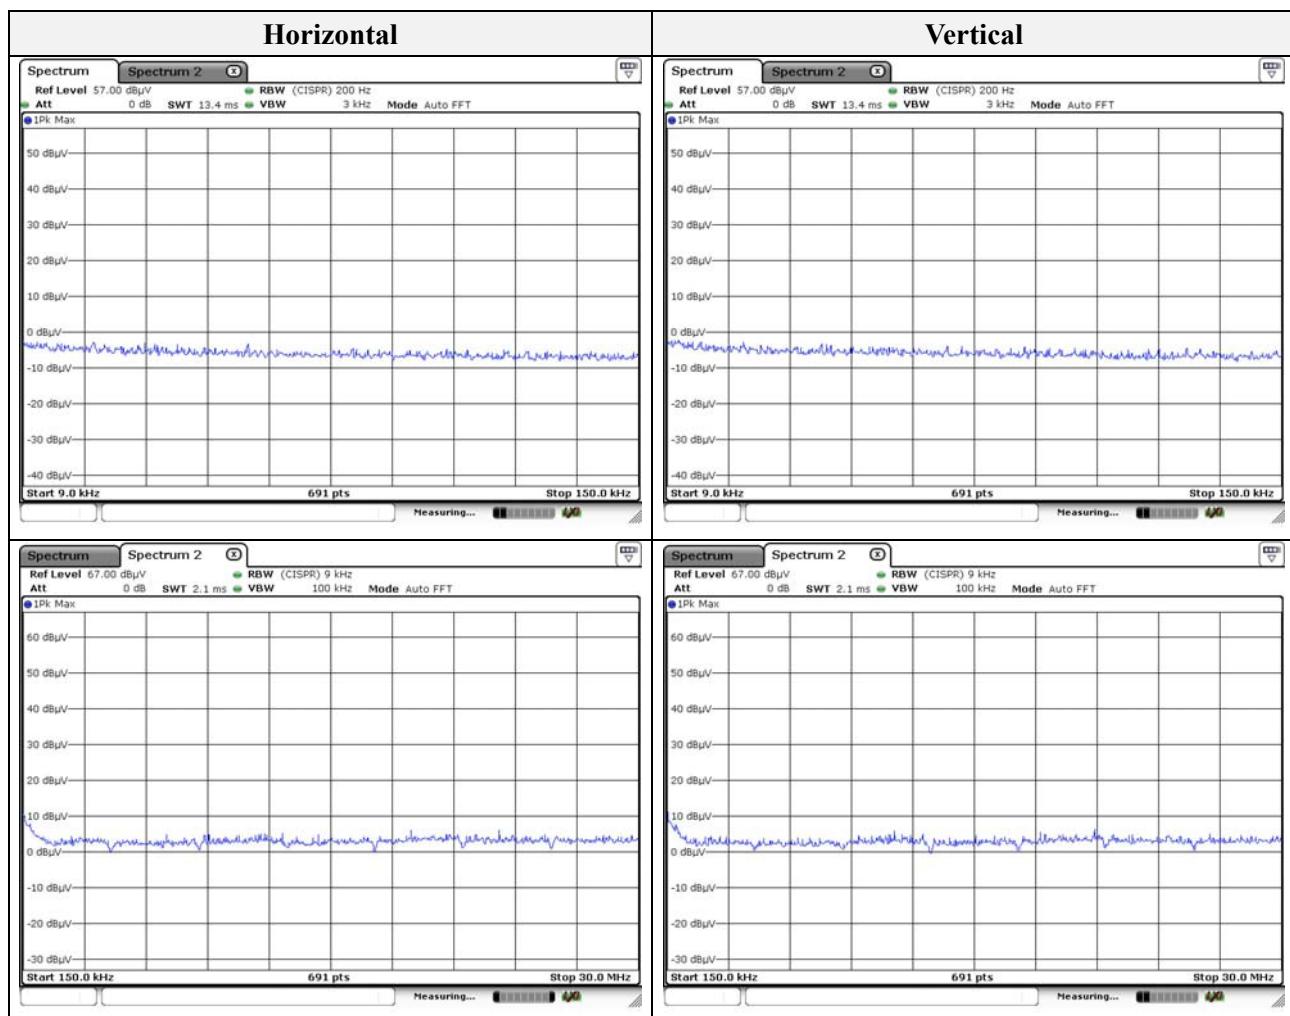

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


**Test results (Below 1 000 MHz) – Worst case**

Mode: EDR

Transfer rate: 3 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

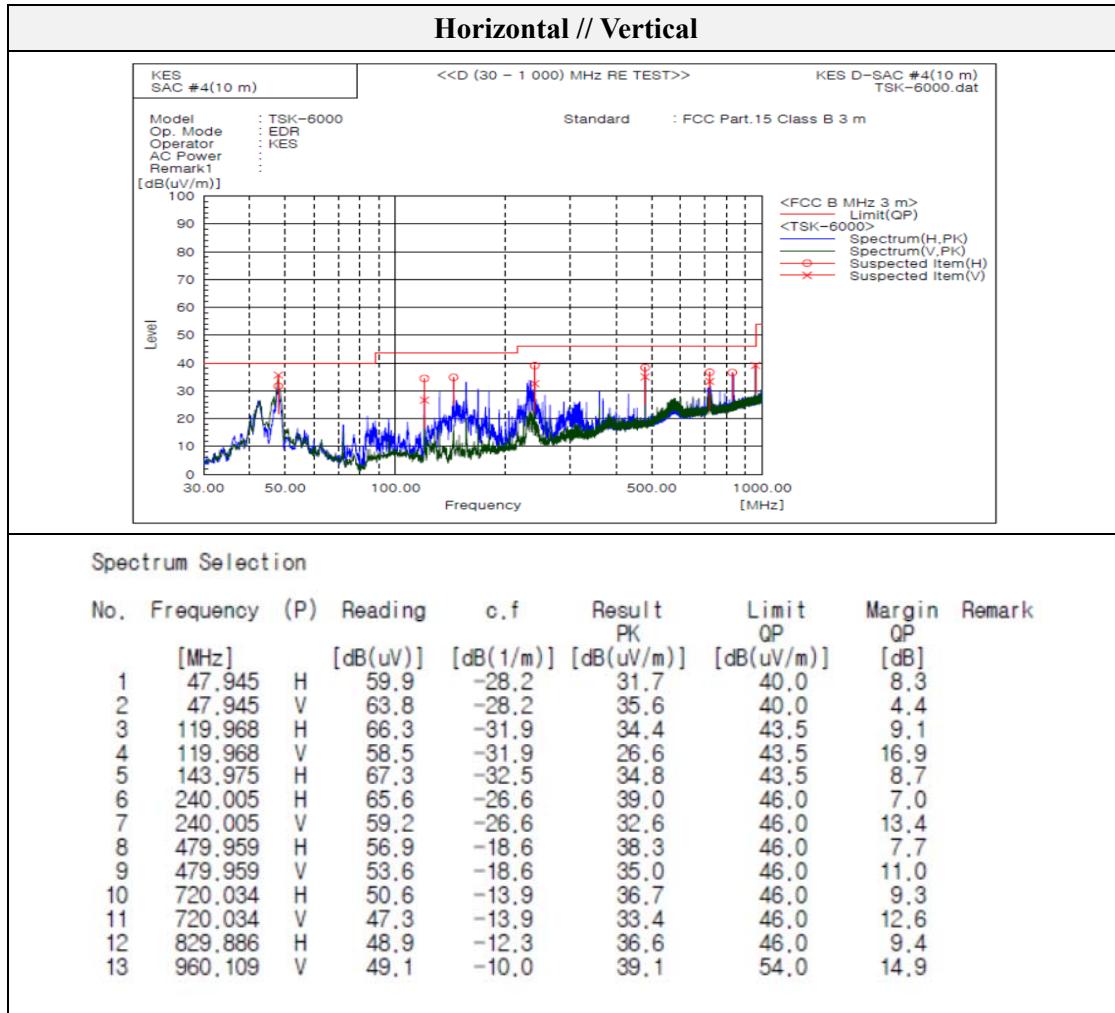

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Test results (Above 1 000 MHz)**


Mode:	EDR
Transfer rate:	3 Mbps
Distance of measurement:	3 meter
Channel:	00

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1201.20	53.76	Peak	H	-7.85	-	45.91	74.00	28.09
1441.40	52.44	Peak	H	-6.33	-	46.11	74.00	27.89
1603.50	58.65	Peak	H	-4.95	-	53.70	74.00	20.30
1160.60	54.37	Peak	V	-8.11	-	46.26	74.00	27.74
1603.50	54.15	Peak	V	-4.95	-	49.20	74.00	24.80
1997.10	52.46	Peak	V	-1.00	-	51.46	74.00	22.54

**- Band edge**

Frequency (MHz)	Level (dB $\mu$ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2386.39	52.50	Peak	H	-0.23	-	52.27	74.00	21.73
2332.14	50.93	Peak	V	-0.33	-	50.60	74.00	23.40

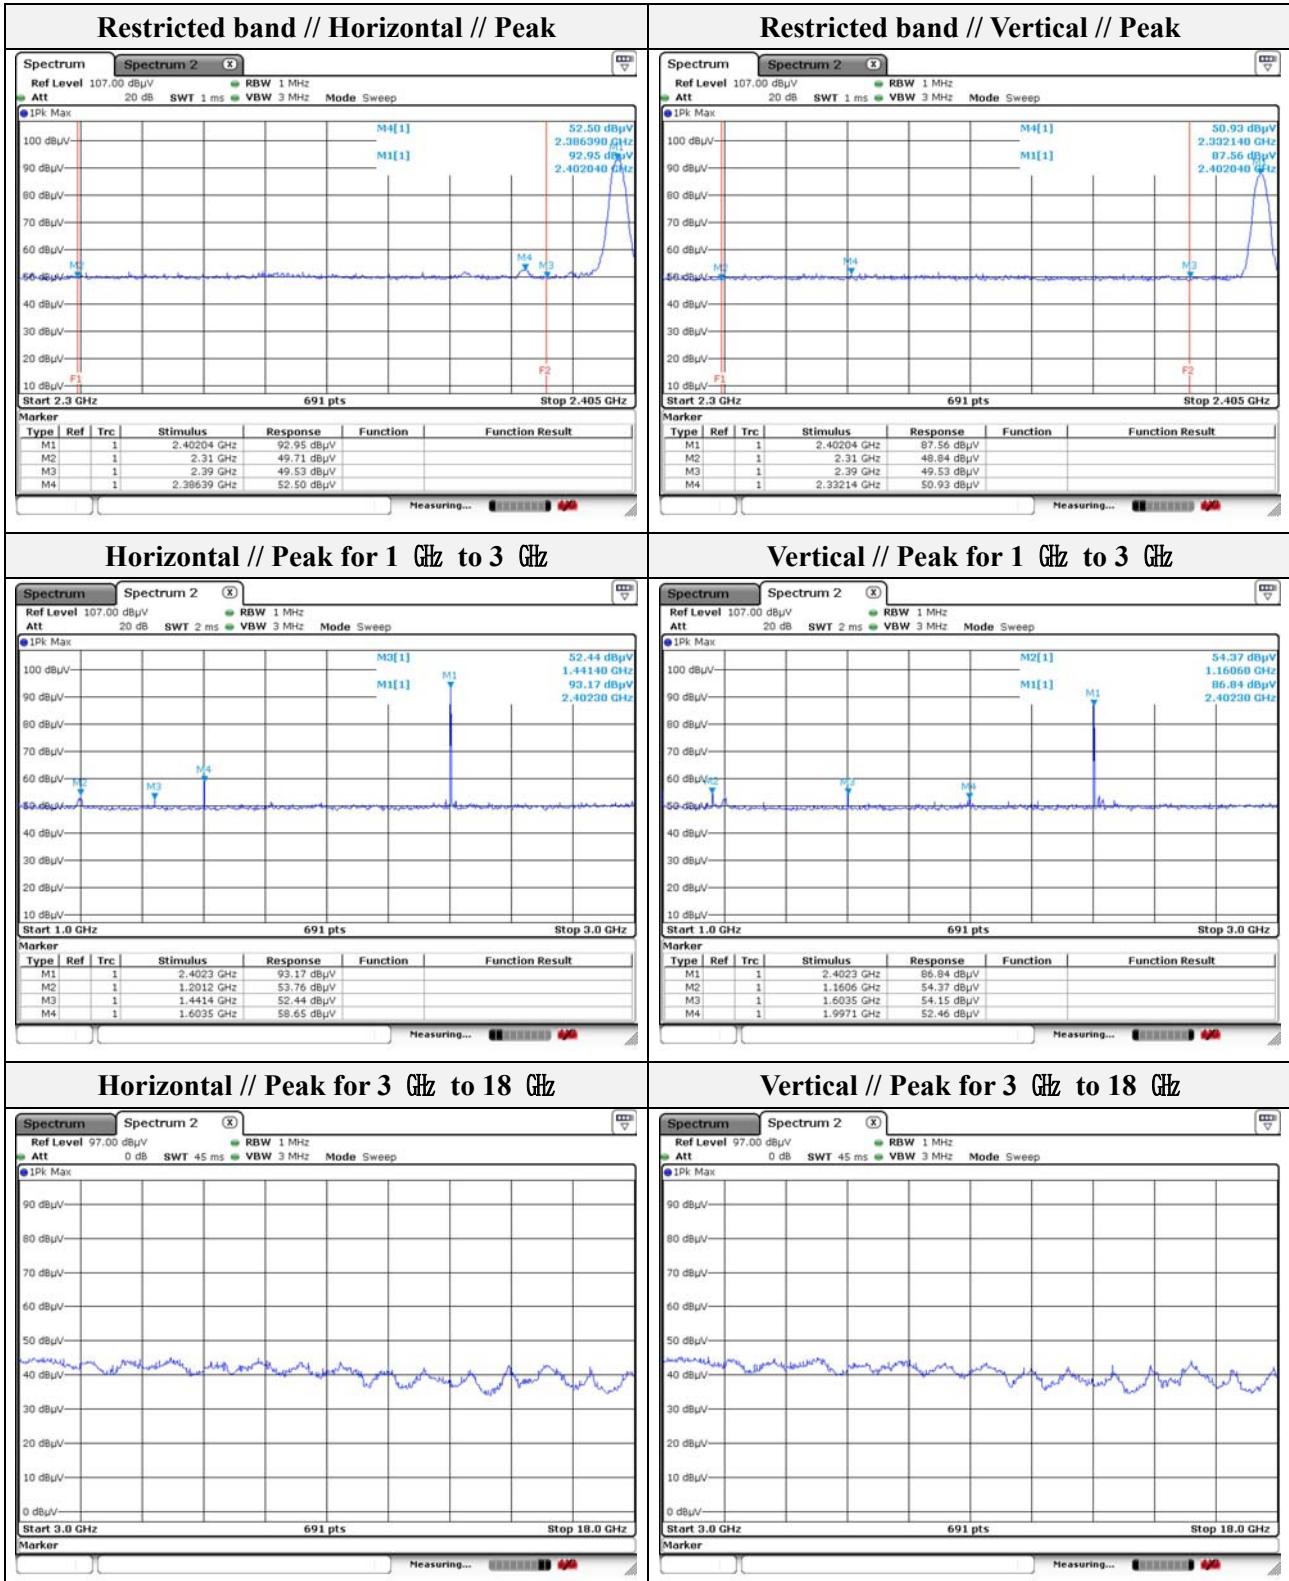

Note.

1. Average test would be performed if the peak result were greater than the average limit.
2. No spurious emission were detected above 3 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Test report No.:  
KES-RF-18T0011  
Page (30 ) of (44)

Mode: EDR  
Transfer rate: 3 Mbps  
Distance of measurement: 3 meter  
Channel: 39

### - Spurious

Frequency (MHz)	Level (dB $\mu$ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1201.20	53.44	Peak	H	-7.85	-	45.59	74.00	28.41
1626.60	57.35	Peak	H	-4.73	-	52.62	74.00	21.38
1201.20	54.37	Peak	V	-7.85	-	46.52	74.00	27.48
1626.60	56.95	Peak	V	-4.73	-	52.22	74.00	21.78
2130.20	58.88	Peak	V	-0.71	-	58.17	74.00	15.83
2130.20	58.88	Average	V	-0.71	-30.40	27.77	54.00	26.63

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

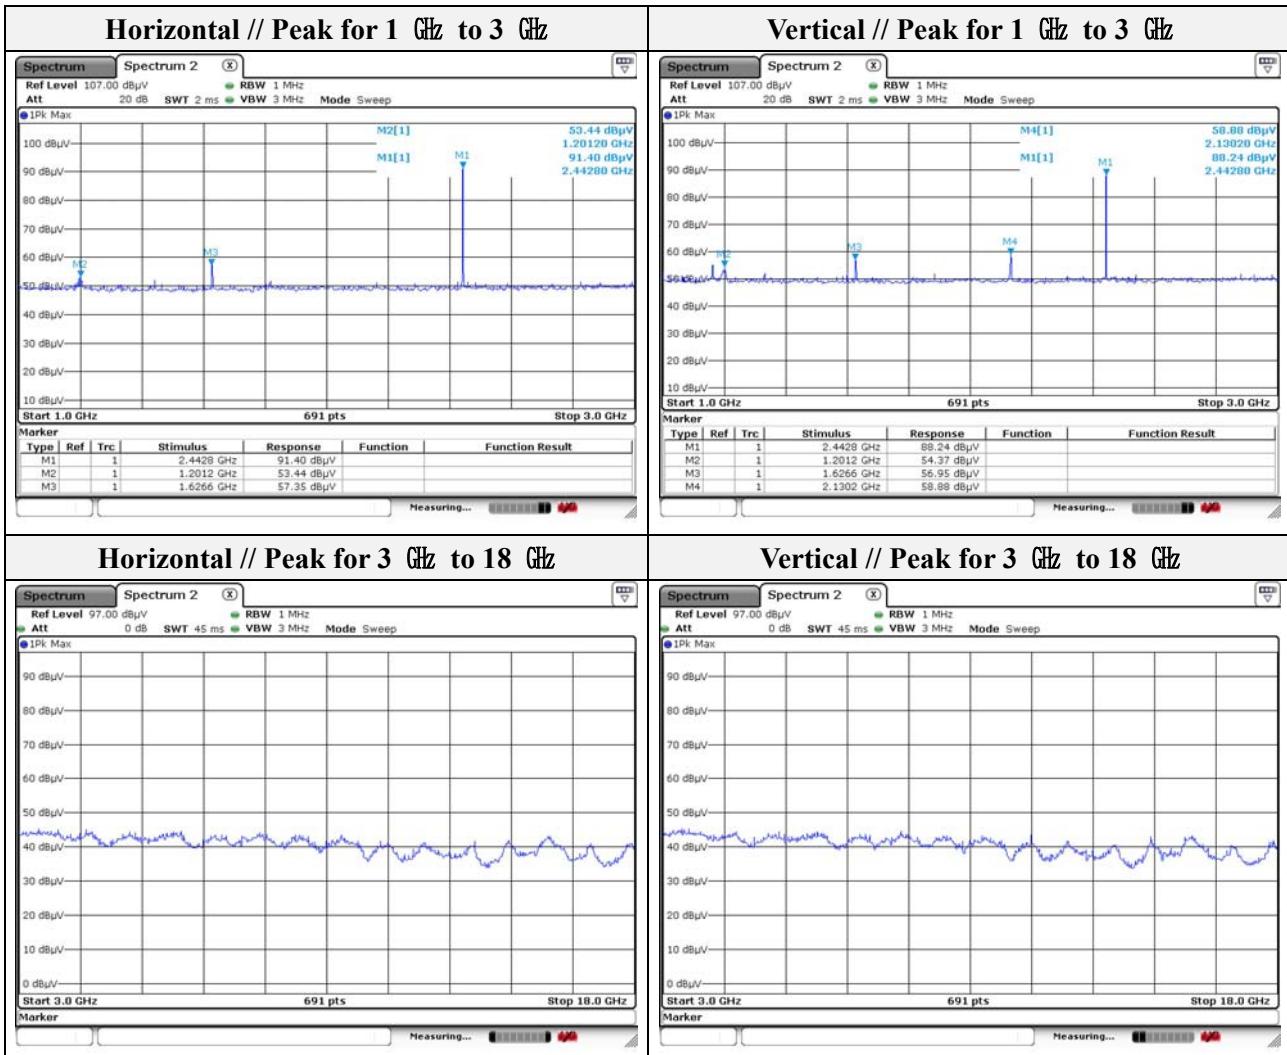

Note.

1. Average test would be performed if the peak result were greater than the average limit.
2. No spurious emission were detected above 3 GHz.



## KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (32 ) of (44)

Mode: EDR  
Transfer rate: 3 Mbps  
Distance of measurement: 3 meter  
Channel: 78


### - Spurious

Frequency (MHz)	Level (dB $\mu$ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1201.20	54.12	Peak	H	-7.85	-	46.27	74.00	27.73
1652.70	56.90	Peak	H	-4.48	-	52.42	74.00	21.58
1163.50	55.74	Peak	V	-8.09	-	47.65	74.00	26.35
1652.70	57.95	Peak	V	-4.48	-	53.47	74.00	20.53

### - Band edge

Frequency (MHz)	Level (dB $\mu$ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2496.27	51.66	Peak	H	-0.02	-	51.64	74.00	22.36
2496.08	51.81	Peak	V	-0.02	-	51.79	74.00	22.21

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

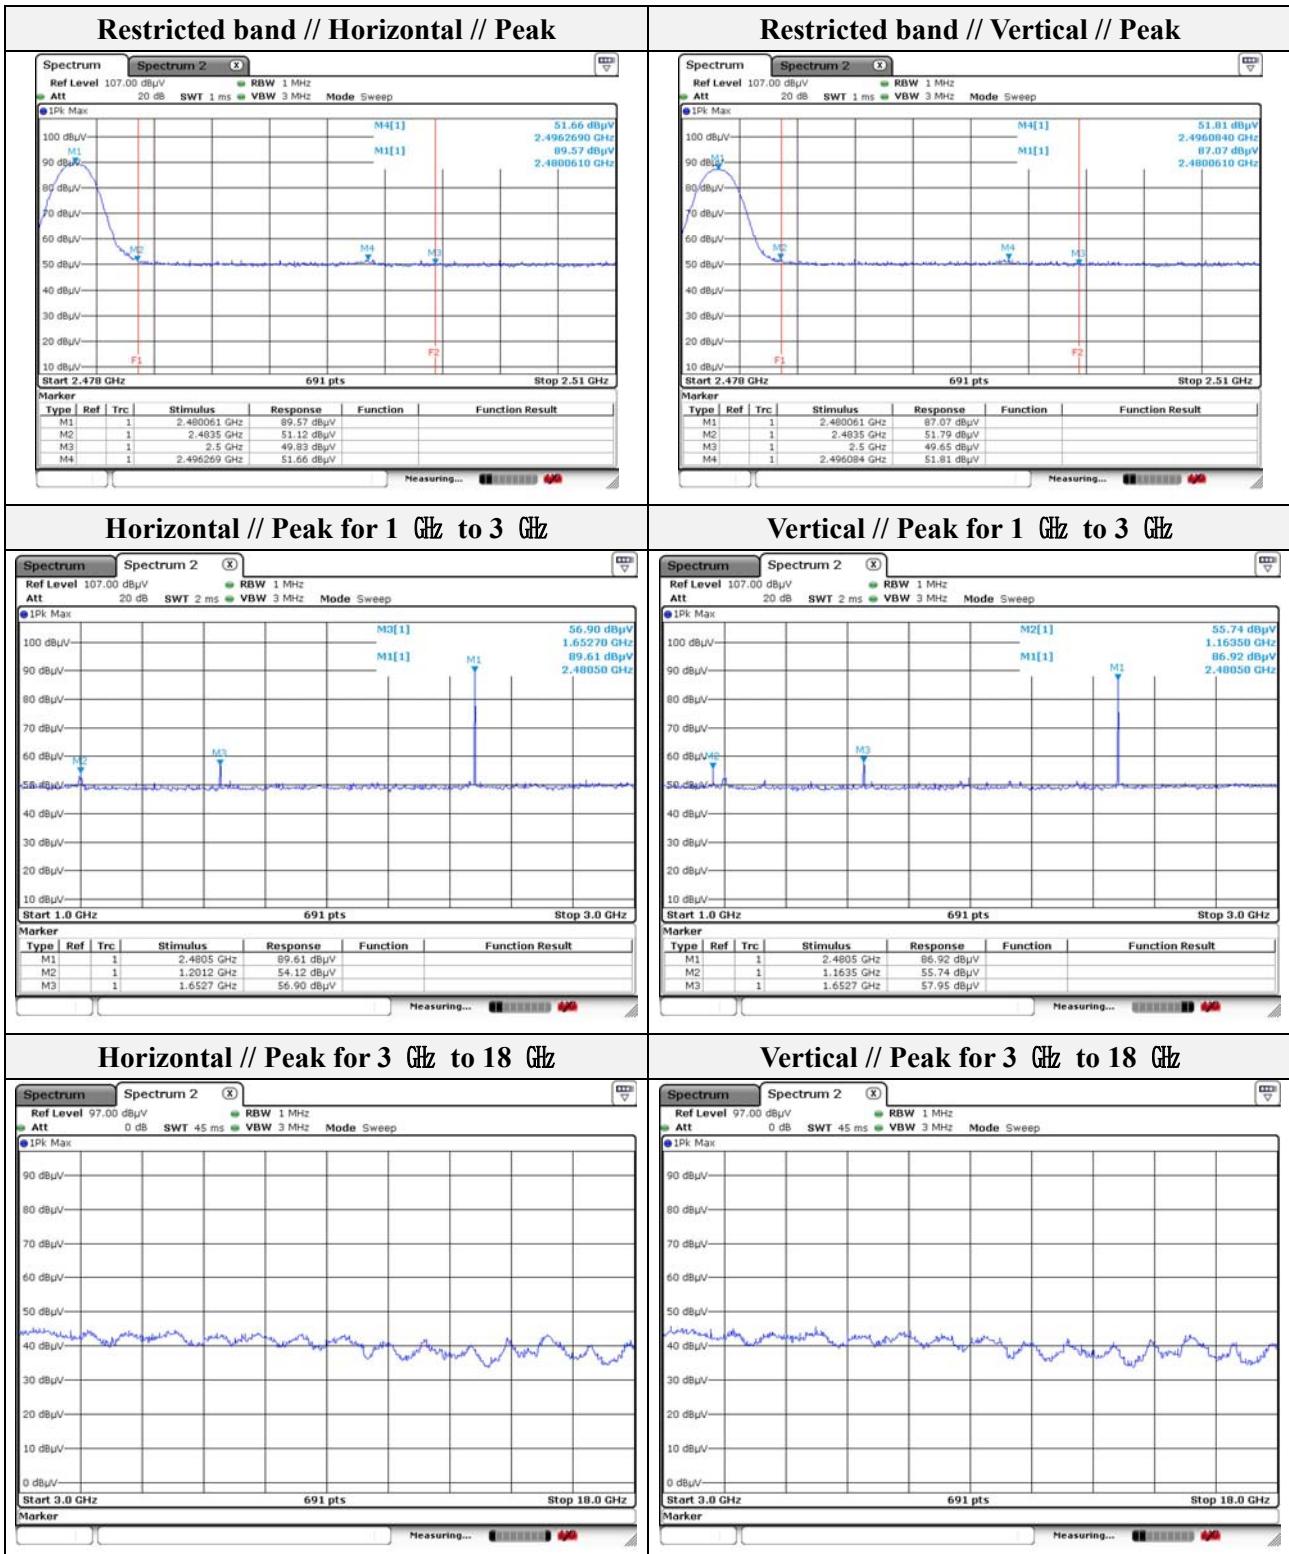


Note.

1. Average test would be performed if the peak result were greater than the average limit.
2. No spurious emission were detected above 3 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Test results (18 GHz to 30 GHz) – Worst case**


Mode:	EDR
Transfer rate:	3 Mbps
Distance of measurement:	3 meter
Channel:	00(Worst case)

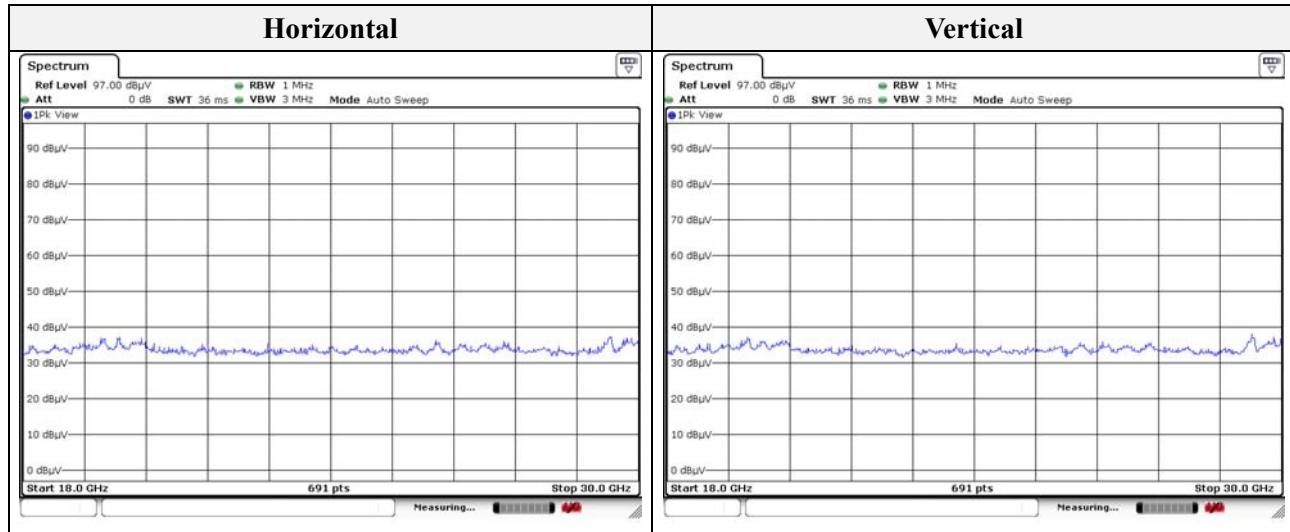
**Note.**

1. No spurious emission were detected above 18 GHz.

### 3.7. Conducted band edge and out of band emissions

#### Test setup



#### Test procedure

DA 00-705


#### Test setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW  $\geq$  300 kHz
4. Detector = Peak
5. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Limit


According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

## Test results

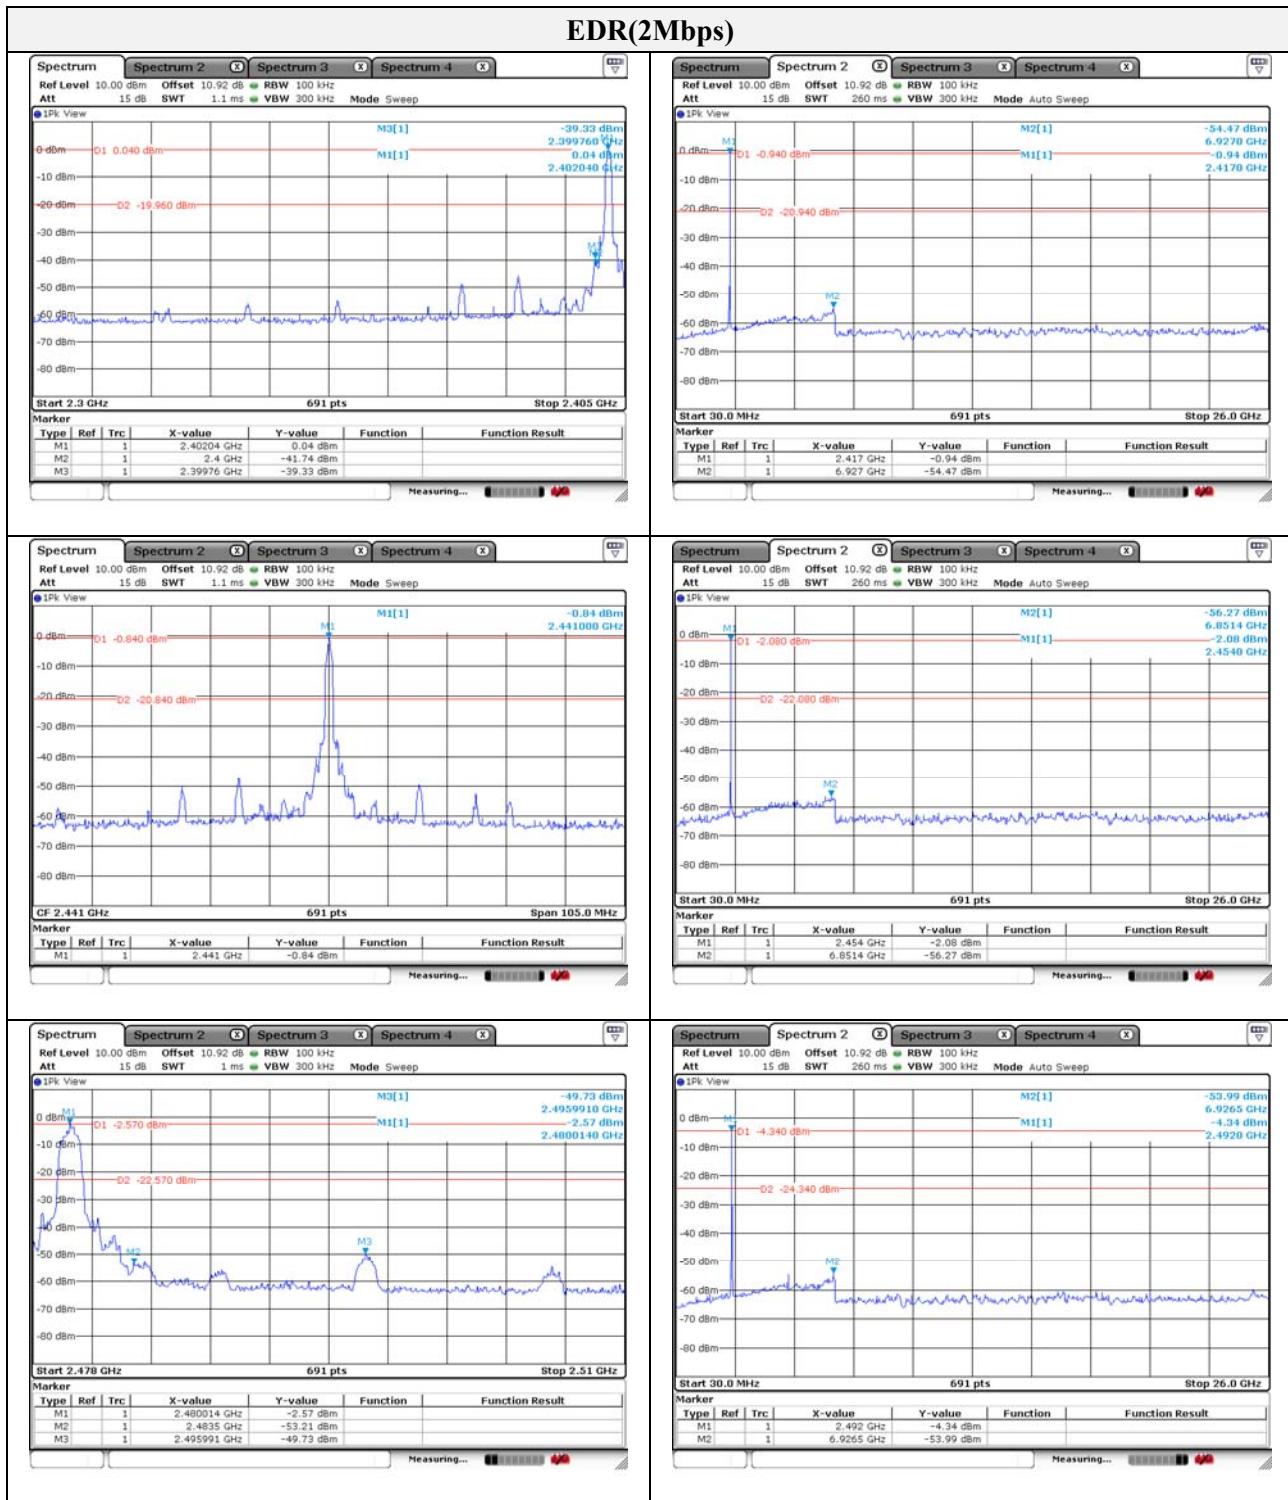


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

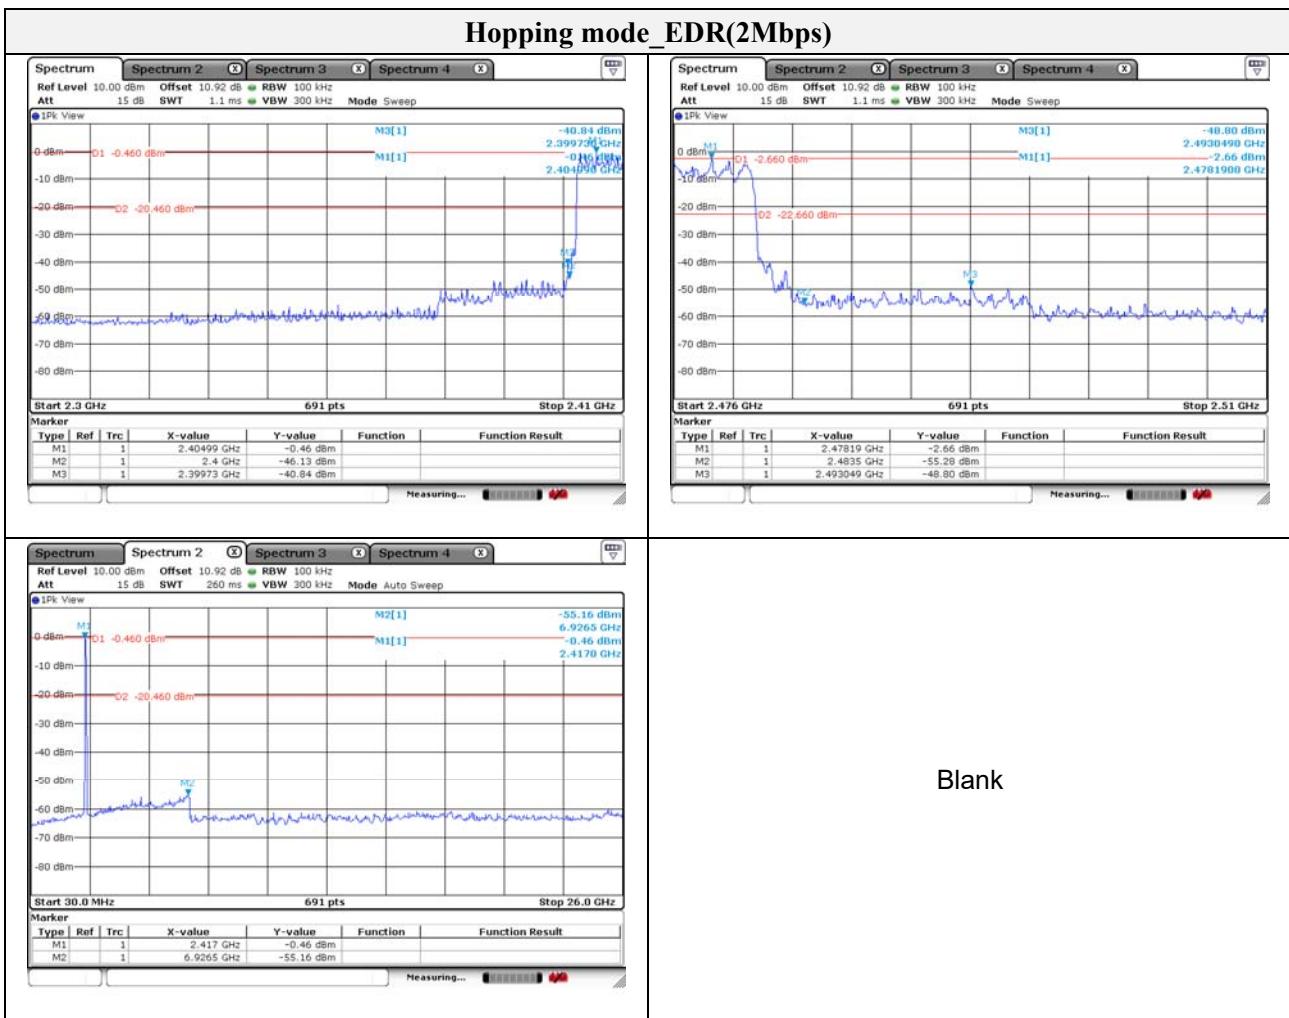

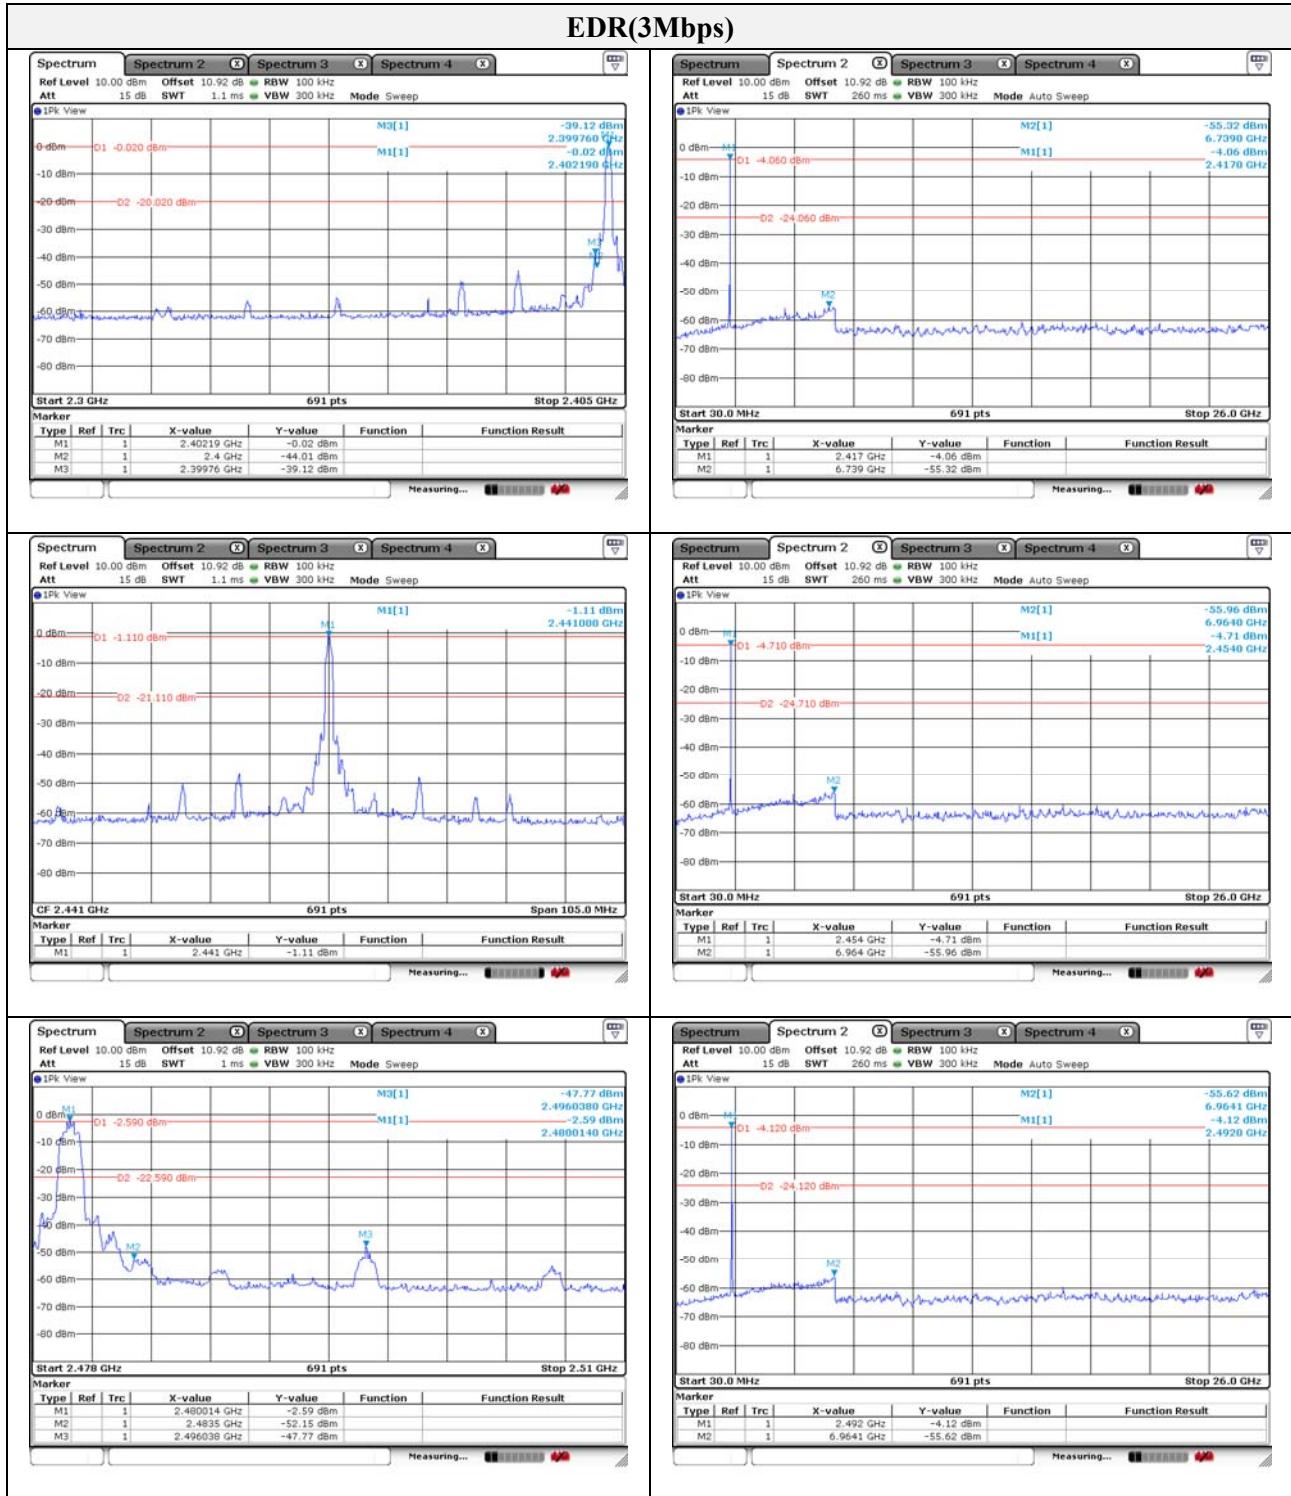

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

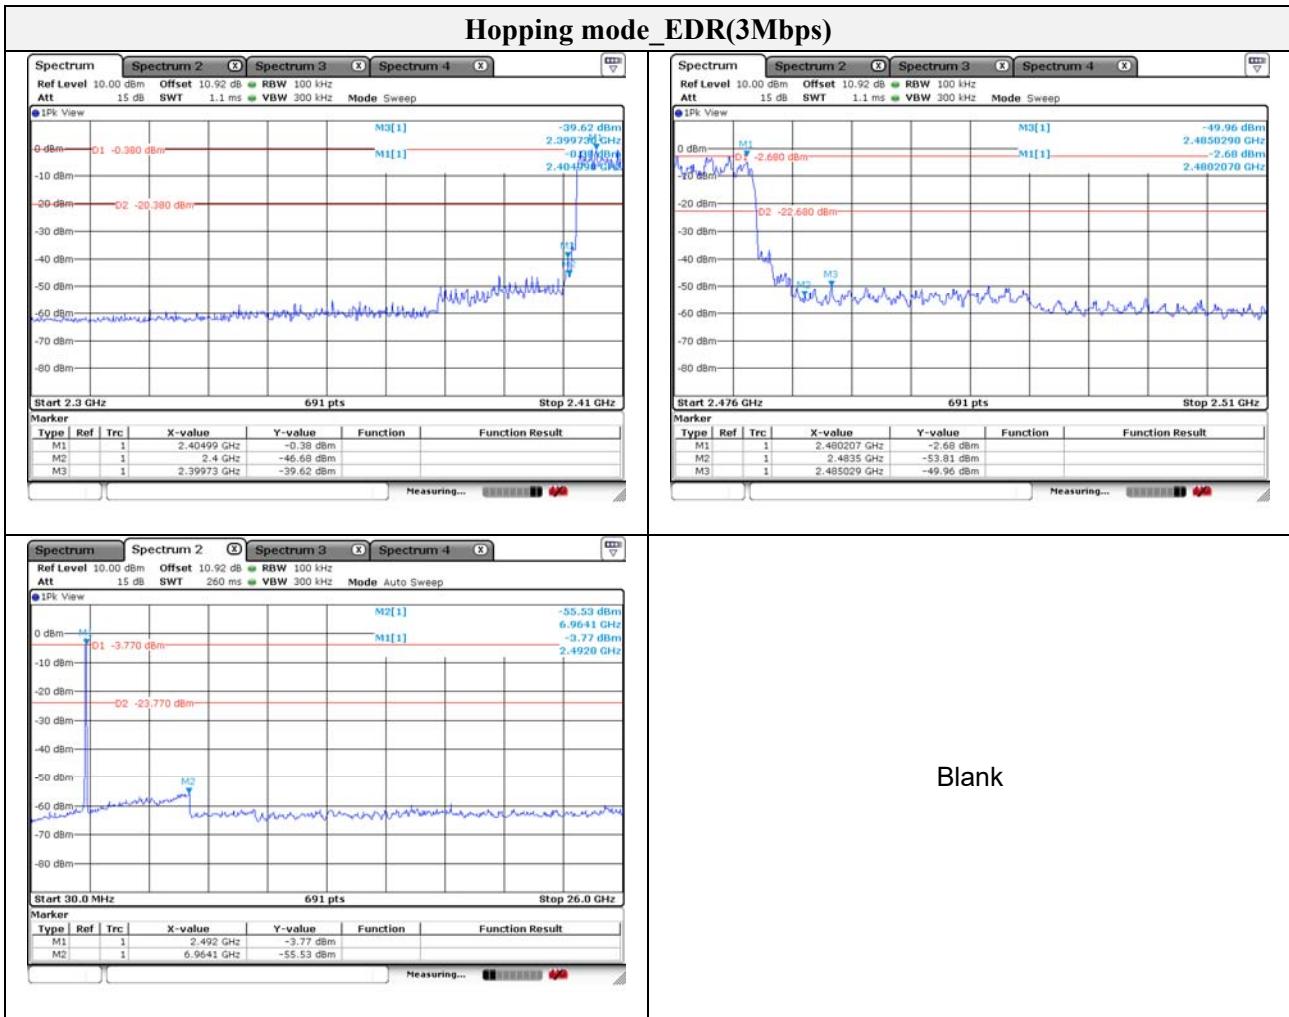

### 3.8. AC conducted emissions

#### Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

#### Note:

1. All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
3. Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

## Test results



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0011  
Page (42 ) of (44)

### Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV40	101002	1 year	2018.07.04
Spectrum Analyzer	R&S	FSV30	101389	1 year	2018.01.23
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2018.01.23
Power Meter	Anritsu	ML2495A	1438001	1 year	2018.01.23
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2018.01.23
Attenuator	Agilent	8493C	51401	1 year	2018.07.04
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2019.05.10
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-714	2 years	2018.11.28
Horn Antenna	A.H	SAS-571	414	2 years	2019.02.15
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170550	2 years	2019.02.15
High Pass Filter	Wainwright Instrument GmbH	WHJS3000-10TT	1	1 year	2018.07.03
Low Pass Filter	Wainwright Instrument GmbH	WLK1.0/18G-10TT	1	1 year	2018.07.03
Preamplifier	HP	8449B	3008A00538	1 year	2018.01.19
Preamplifier	AGILENT	8449B	3008A01729	1 year	2018.05.31
EMI Test Receiver	R&S	ESR3	101781	1 year	2018.04.27
EMI Test Receiver	R&S	ESU26	100552	1 year	2018.04.19
Pulse Limiter	R&S	ESH3-Z2	101915	1 year	2018.11.27
LISN	SCHWARZBECK	NSLK8126	8126157	1 year	2018.03.24

### Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	LG Electronics Inc.,	LG15N53	311QCFT567147
Test Board	N/A	N/A	N/A
AC/DC Adapter	WEIHAI PNTELECOM	MCS-H06KP	PB7Y0000322

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.