



EMC TEST REPORT

Applicant Daiichi Elektronik Sanayi ve Ticaret A.S.

FCC ID 2AOI6-D716AF

Product D716AF-1 A7 7" AVN w CP&AA&DAB,
D716AF-2 A7 7" AVN w CP&AA&DABEU,
D716AF-3 A7 7" AVN w CP&AA&DABAU/NZ

Band Daiichi

Model D716AF

Report No. R1905A0213-E2V1

Issue Date June 12, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2018)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Performed by: Wei Liu/ Manager

Guangchang Fan

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information	6
2.2	General information.....	6
2.3	Applied Standards	7
2.4	Test Mode.....	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	14
4	Main Test Instrument	17
ANNEX A: The EUT Appearance and Test Configuration.....		18
A.1	EUT Appearance	18
A.2	Test Setup.....	20
ANNEX B: Product Change Description.....		22



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Test Date: May 7, 2019 ~ May 11, 2019			

D716AF (Report No: R1905A0213-E2) is a variant model of D715AF (Report No: R1812A0521-E1). All test items tested for variant in this report. The detailed product change description please refers to the ANNEX B.



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2 General Description of Equipment under Test

2.1 Client Information

Applicant	Daiichi Elektronik Sanayi ve Ticaret A.S.
Applicant address	Asirefendi caddes Imar Han No:15 Kat 4, Faith,istanbul,Turket
Manufacturer	Guangzhou Liuhuan Information Technology Co., Ltd.
Manufacturer address	NO.6 Yunpu 4th Road, Huangpu District, Guangzhou, China

2.2 General information

EUT Description			
Device Type:	Fixed Device		
Model Number:	D716AF		
IMEI:	/		
HW Version:	V1.0.3		
SW Version:	V1.0.2.2_CP_AA		
Antenna Type:	BT: PCB Antenna GPS: Fixed External Antenna		
Frequency:	Band	Tx (MHz)	Rx (MHz)
	Bluetooth:	2402 ~ 2480	2402 ~ 2480
Modulation:	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8-DPSK		
Test Mode:	Transfer Data Mode		
EUT Accessory			
GPS Antenna	Manufacturer: JIAXING GLEAD ELECTRONICS CO.,LTD. Model: DAS1595		
Note: The information of the EUT is declared by the manufacturer.			



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2018)

ANSI C63.4 (2014)



2.4 Test Mode

Test Mode	
Mode 1	External Power Supply + EUT +Idle



3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=1Hz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

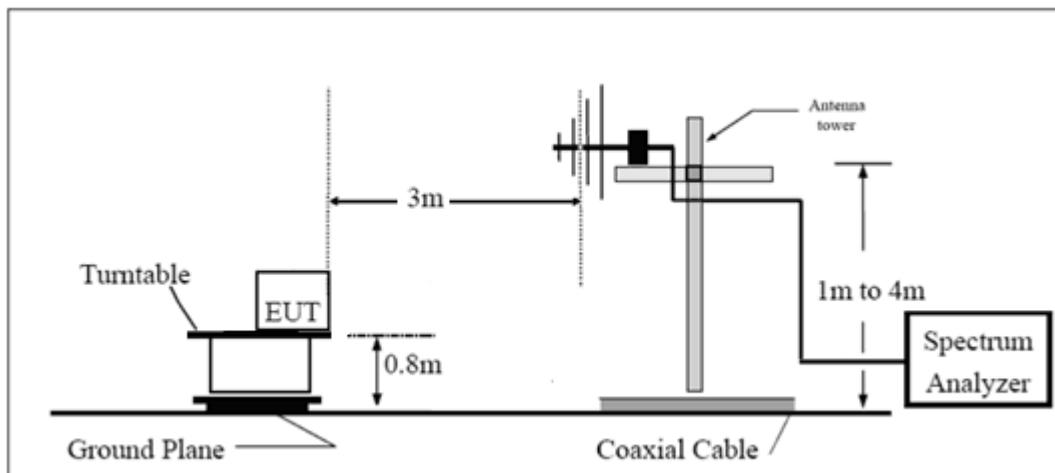

Above 1GHz

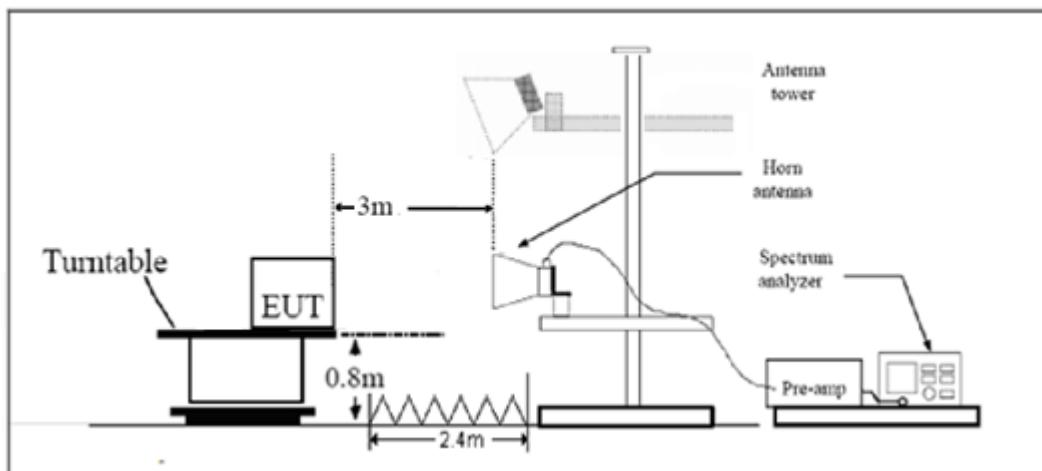

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz,which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
30MHz~200MHz	4.02 dB
200MHz~1000MHz	3.28 dB
1GHz~18GHz	3.70 dB
18GHz~26.5GHz	5.78 dB
26.5GHz~40GHz	5.82 dB

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz- 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

RE 0.03-1GHz QP Class B

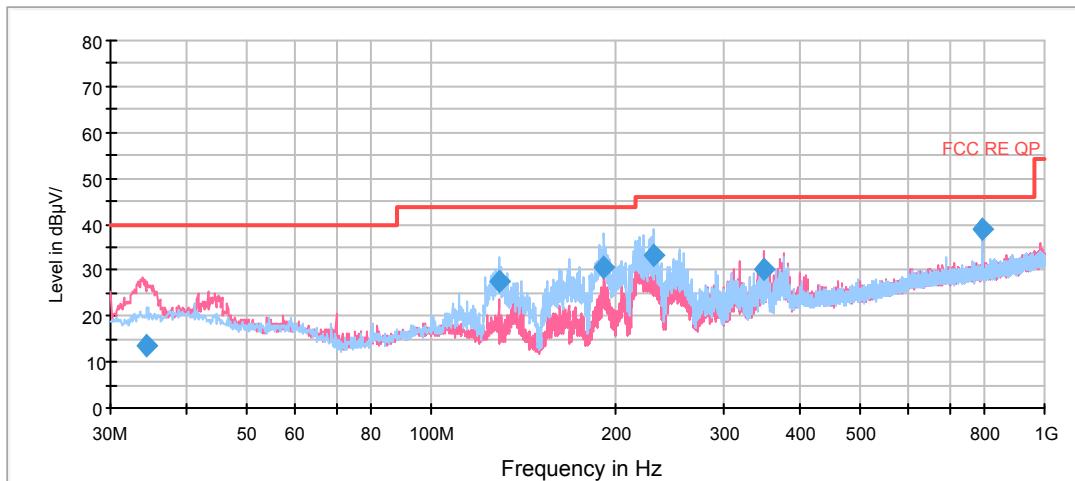

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
34.480000	13.6	100.0	V	22.0	16.1	26.4	40.0
128.818750	27.5	186.0	H	0.0	10.4	16.0	43.5
191.626250	30.5	100.0	H	86.0	11.6	13.0	43.5
229.981250	33.2	125.0	H	274.0	13.2	12.8	46.0
348.402500	30.4	175.0	V	201.0	17.4	15.6	46.0
793.027500	38.8	225.0	H	103.0	24.8	7.2	46.0


Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak



FCC RE 1G-18GHz PK+AV Class B

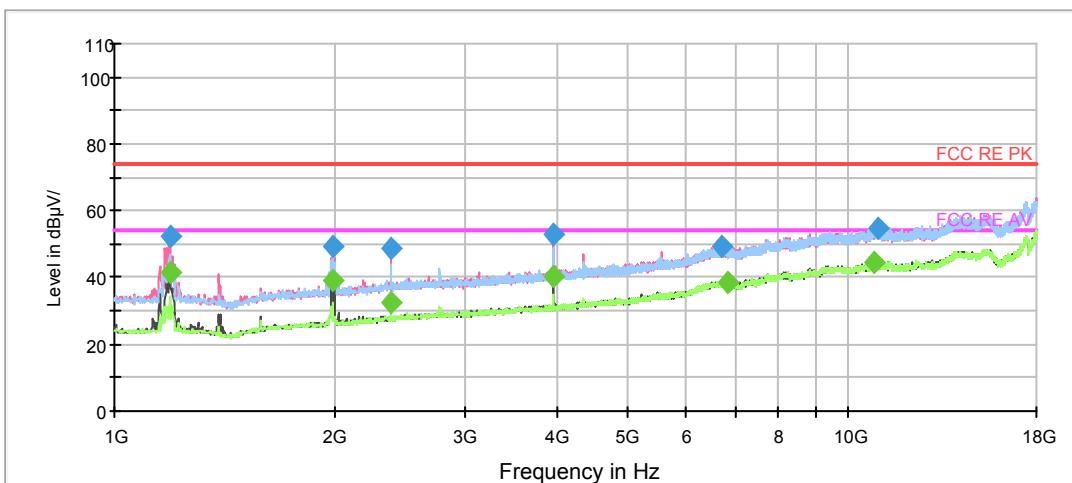

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.125000	52.5	100.0	V	359.0	-11.2	21.5	74.0
1981.750000	49.1	100.0	V	0.0	-8.9	24.9	74.0
2379.125000	48.7	100.0	V	349.0	-6.9	25.3	74.0
3964.375000	53.0	100.0	V	51.0	-2.9	21.0	74.0
6697.125000	49.2	200.0	H	193.0	5.0	24.8	74.0
10957.750000	54.7	100.0	H	0.0	13.5	19.3	74.0

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.125000	41.3	100.0	V	359.0	-11.2	12.7	54.0
1981.750000	38.8	100.0	V	0.0	-8.9	15.2	54.0
2379.125000	32.6	100.0	V	349.0	-6.9	21.4	54.0
3964.375000	40.5	100.0	V	51.0	-2.9	13.5	54.0
6858.625000	38.6	200.0	H	351.0	5.0	15.4	54.0
10792.000000	44.5	100.0	V	323.0	13.4	9.5	54.0

3.2 Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

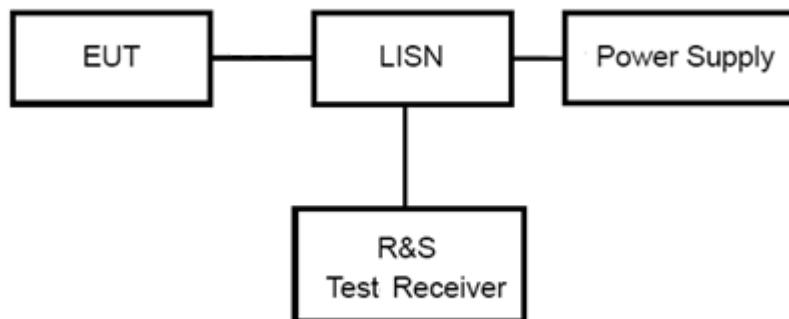

Note: Power Supply is DC-12V Power supply.

Limits

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 [*]	56 to 46 [*]
0.5 - 5	56	46
5 - 30	60	50


^{*}: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.57$ dB.

Test Results


Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

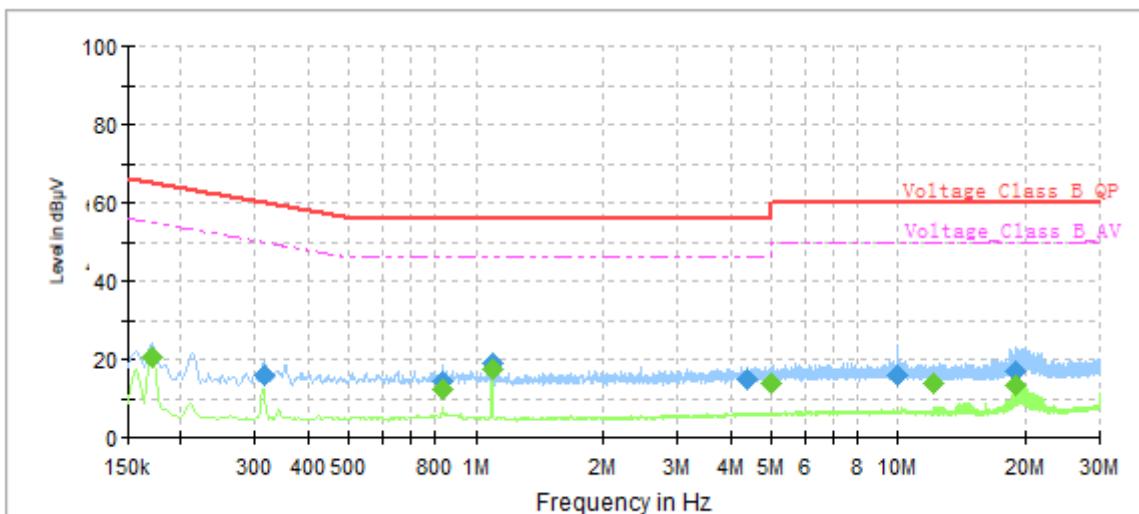

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.17	---	20.53	54.95	34.42	1000.0	9.000	L1	ON	19.15
0.31	15.97	---	59.86	43.89	1000.0	9.000	L1	ON	19.17
0.83	---	12.23	46.00	33.77	1000.0	9.000	L1	ON	19.24
0.83	14.37	---	56.00	41.63	1000.0	9.000	L1	ON	19.24
1.09	---	17.22	46.00	28.78	1000.0	9.000	L1	ON	19.24
1.09	18.78	---	56.00	37.22	1000.0	9.000	L1	ON	19.24
4.37	14.92	---	56.00	41.08	1000.0	9.000	L1	ON	19.10
4.99	---	13.75	46.00	32.25	1000.0	9.000	L1	ON	19.08
10.00	15.95	---	60.00	44.05	1000.0	9.000	L1	ON	19.40
12.16	---	14.06	50.00	35.94	1000.0	9.000	L1	ON	19.41
18.95	16.79	---	60.00	43.21	1000.0	9.000	L1	ON	19.61
19.02	---	13.46	50.00	36.54	1000.0	9.000	L1	ON	19.62

L line

Conducted Emission from 150 KHz to 30 MHz

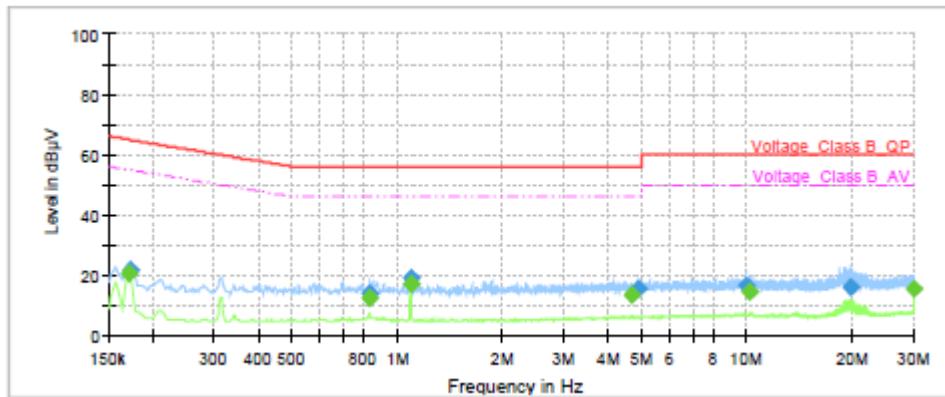

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.17	---	20.38	54.95	34.57	1000.0	9.000	N	ON	19.16
0.17	21.38	---	64.84	43.46	1000.0	9.000	N	ON	19.16
0.83	---	12.15	46.00	33.85	1000.0	9.000	N	ON	19.24
0.83	13.94	---	56.00	42.06	1000.0	9.000	N	ON	19.24
1.09	---	17.06	46.00	28.94	1000.0	9.000	N	ON	19.24
1.09	18.72	---	56.00	37.28	1000.0	9.000	N	ON	19.24
4.69	---	13.47	46.00	32.53	1000.0	9.000	N	ON	19.09
4.89	15.32	---	56.00	40.68	1000.0	9.000	N	ON	19.07
10.00	16.18	---	60.00	43.82	1000.0	9.000	N	ON	19.42
10.22	---	14.42	50.00	35.58	1000.0	9.000	N	ON	19.42
19.79	16.02	---	60.00	43.98	1000.0	9.000	N	ON	19.45
30.00	---	15.41	50.00	34.59	1000.0	9.000	N	ON	19.68

N line
Conducted Emission from 150 KHz to 30 MHz



4 Main Test Instrument

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Trilog Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2019-06-19
EMI Test Receiver	R&S	ESR	101667	2018-05-20	2019-05-19
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/

*****END OF REPORT*****

ANNEX A: The EUT Appearance and Test Configuration

A.1 EUT Appearance



a: EUT



b: GPS Antenna

Picture 1 EUT and Accessory

A.2 Test Setup



Below 1GHz



Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup



ANNEX B: Product Change Description

Daiichi Elektronik Sanayi ve Ticaret. A.S.

Product Change Description

We, [Daiichi Elektronik Sanayi ve Ticaret. A.S.] ,declare on our sole responsibility that the product,

[Variant Model---D716AF]

is the variant of the initial certified product,

[Initial Model---D715AF]

Except the following changes on the latest MODEL: [Variant Model ---D716AF]

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: NO

HARDWARE MODIFICATION:

Band changes: NO

Power Amplifier changes: NO

Antenna changes: NO

PCB Layout changes: Yes.

Components on PCB changes: Yes

LCD changes: No

Speaker changes: NO

Camera changes: NO

Vibrator changes: NO

Bluetooth changes: NO

FM changes: NO

Other changes: NO

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: Yes

Mechanical shell changes: Yes

Other changes detailed: Yes

ACCESSORY MODIFICATIONS:

Battery changes: yes coin battery changed

AC Adaptor changes: NO

Earphone changes: NO



Daiichi Elektronik Sanayi ve Ticaret. A.S.



Signature:

Print name: Ahmet Urgan

Date: 2019-05-09

Company: Daiichi Elektronik Sanayi ve Ticaret. A.S.

Address: Asirefendi caddes Imar Han No:15 Kat 4 / ISTANBUL

Tel: (+90) 532 340 72 11

Fax: (+90) 216 471 19 24