

FCC/ISED - TEST REPORT

Report Number : **68.950.24.1733.01** Date of Issue: **2025-01-24**

Model/HVIN : **T800, T800-2, T800-41**

Product Type : **Dash Cam**

Applicant : **70mai Co., Ltd.**

Address : **Room 2220, building 2, No. 588, Zixing road, MinHang District,**
201100 Shanghai, CHINA

Manufacturer : **70mai Co., Ltd.**

Address : **Room 2220, building 2, No. 588, Zixing road, MinHang District,**
201100 Shanghai, CHINA

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **51**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration	9
9	Technical Requirement	10
9.1	Conducted Peak Output Power & EIRP	10
9.2	Power Spectral Density	14
9.3	6 dB Bandwidth and 99% Occupied Bandwidth	17
9.4	Spurious RF Conducted Emissions	22
9.5	Band Edge	28
9.6	Spurious Radiated Emissions for Transmitter	32
10	Test Equipment List	49
11	System Measurement Uncertainty	51

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,
Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

ISED CAB identifier CN0077

Product:	Dash Cam
Model no.:	T800, T800-2, T800-41
Hardware Version Identification No. (HVIN)	T800, T800-2, T800-41
Product Marketing Name (PMN)	Dash Cam
Brand name:	70mai
FCC ID:	2AOK9-T800
IC:	28033-T800
Options and accessories:	Car charger, Power Cable
Rating:	5VDC, 2.4A powered by car charger
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna:	Type: onboard PCB antenna Function of each antenna as below: antenna 1: 2.4GHz Wi-Fi transmit&receive, BLE transmit&receive antenna 2: U-NII-1(5150-5250MHz)) transmit &receive U-NII-3(5745-5825MHz) transmit &receive 2.4GHz Wi-Fi receive only, BLE receive only Gain: antenna 1: 2.23 dBi for 2400-2483.5MHz antenna 2: 2.61 dBi for 5150-5250MHz; 2.49 dBi for 5745-5825MHz
Description of the EUT:	The Equipment Under Test (EUT) is a Dash Cam which support Low Energy Bluetooth(1M&2M) and Wi-Fi operated at 2.4GHz and U-NII-1(5150-5250MHz FCC only) and U-NII-3(5745-5825MHz FCC&ISED). This report is only for Bluetooth Low Energy

Page 4 of 51

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	N/A	☐	☐	☒	N/A
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	☒	☐	☐	T: 22.5°C H: 48.1%
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	☒	☐	☐	T: 22.5°C H: 48.1%
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	☒	☐	☐	T: 22.5°C H: 48.1%
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	☒	☐	☐	T: 22.5°C H: 48.1%
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	☒	☐	☐	T: 22.5°C H: 48.1%
§15.247(d) & RSS-247 5.5	Band edge	Site 1	☒	☐	☐	T: 23.0°C H: 49.6%
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	☒	☐	☐	T: 23.0°C H: 49.6%
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	☒	☐	☐	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an onboard PCB antenna, which gain is 2.23dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

Note 3: T :Temperature, H: Humidity.

6 General Remarks

This submittal(s) (test report) is intended for FCC ID: 2AOK9-T800, IC: 28033-T800, complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

Models differences description as below:

Model T800 is a dash cam without Rear Camera Midriver.

Model T800-2 will be equipped with an additional accessory Rear Camera Midriver RC24 based on T800 in package, the Rear Camera Midriver RC24 is a standalone rear camera which is connected to dash cam via type-C port, the Rear Camera Midriver RC24 doesn't support wireless function.

Model T800-41 is equipped with an additional accessory Rear Camera Midriver RC24 based on T800 in package, the Rear Camera Midriver RC41 is a standalone rear camera which is connected to dash cam via type-C port, the Rear Camera Midriver RC41 doesn't support wireless function.

So model T800 is selected as the representative for all tests, other models are deemed to fulfill the requirements of standards.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.


Sample Received Date: 2024-12-06

Testing Start Date: 2024-12-06


Testing End Date: 2025-01-20

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch


Reviewed by:


John Zhi
Section Manager

Prepared by:


Sanvin Zheng
Project Engineer


Tested by:


Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9KHz - 30MHz

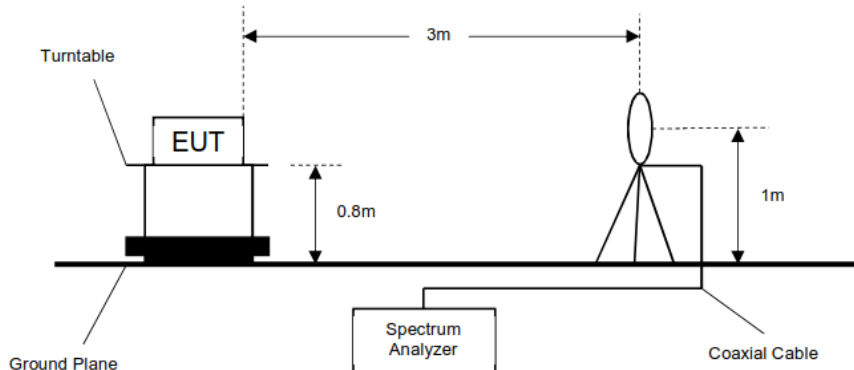


30MHz - 1GHz

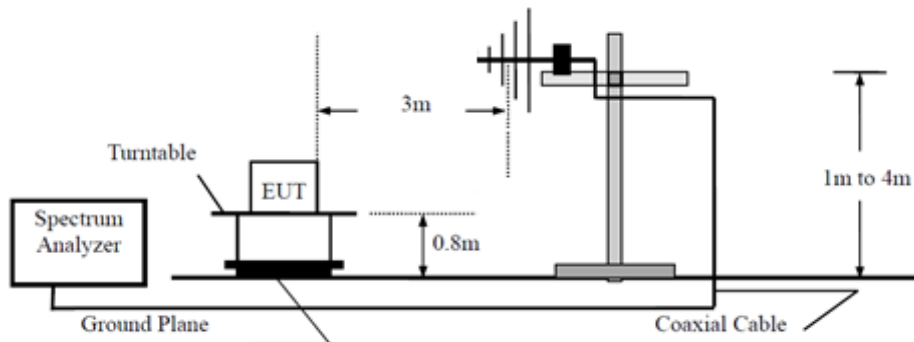

Above 1GHz

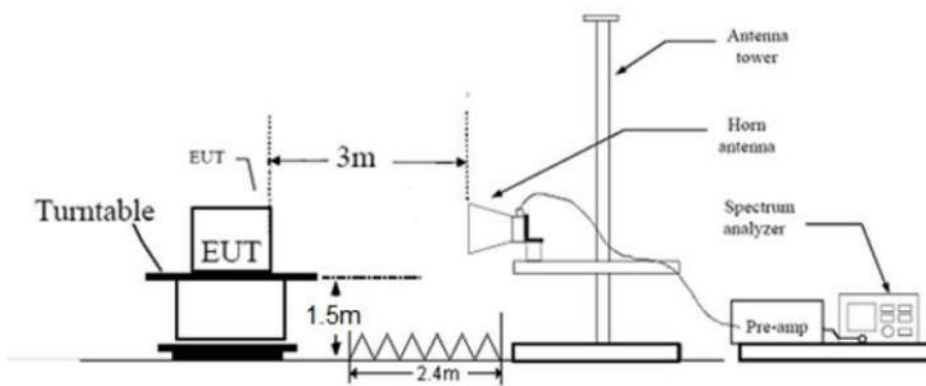

7.2 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Notebook	LENOVO	X220	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
USB-C Cable	350cm	Shielded	Without Ferrite

Test software information:

Test Software Version	SecureCRT.exe	
Modulation	Setting TX Power	Packet Type
GFSK	Default	PRBS9

The system was configured to non-hopping mode, testing channel 0, 19, 39.

9 Technical Requirement

9.1 Conducted Peak Output Power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30


According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 4	≤ 36


Conducted Peak Output Power & EIRP

Frequency MHz	Mode	Conducted Peak Output Power dBm	Antenna Gain dBi	EIRP dBm	Result
Bottom channel 2402MHz	LE 1Mbps	5.56	2.23	7.79	Pass
Middle channel 2440MHz	LE 1Mbps	5.58	2.23	7.81	Pass
Top channel 2480MHz	LE 1Mbps	5.69	2.23	7.92	Pass
Bottom channel 2402MHz	LE 2Mbps	5.49	2.23	7.72	Pass
Middle channel 2440MHz	LE 2Mbps	5.49	2.23	7.72	Pass
Top channel 2480MHz	LE 2Mbps	5.61	2.23	7.84	Pass


1M_LCH_2402MHz_Ant1_NTNV

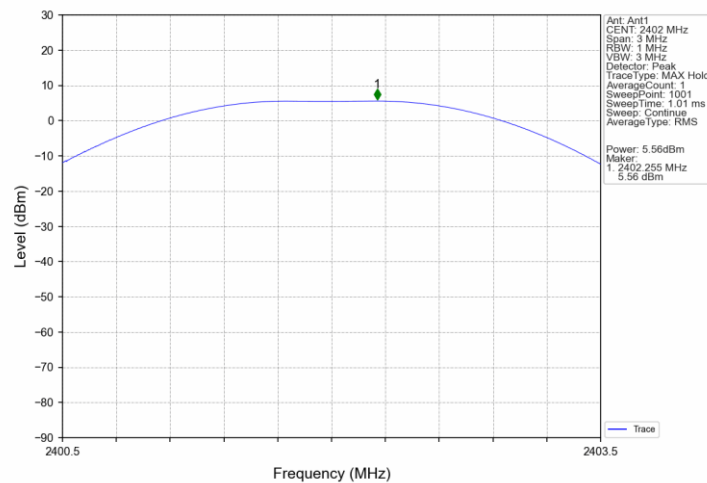


1M_MCH_2440MHz_Ant1_NTNV

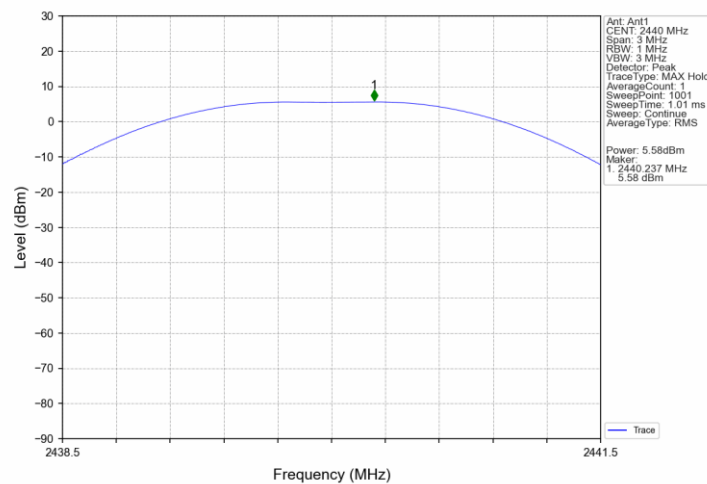


1M_HCH_2480MHz_Ant1_NTNV

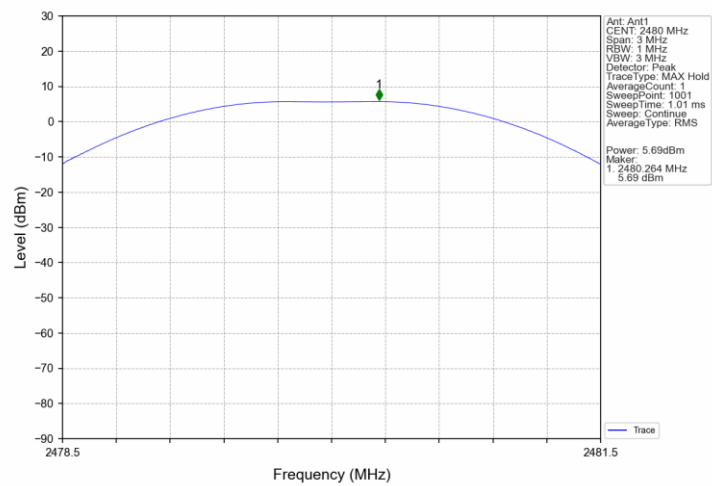


2M_LCH_2402MHz_Ant1_NTNV

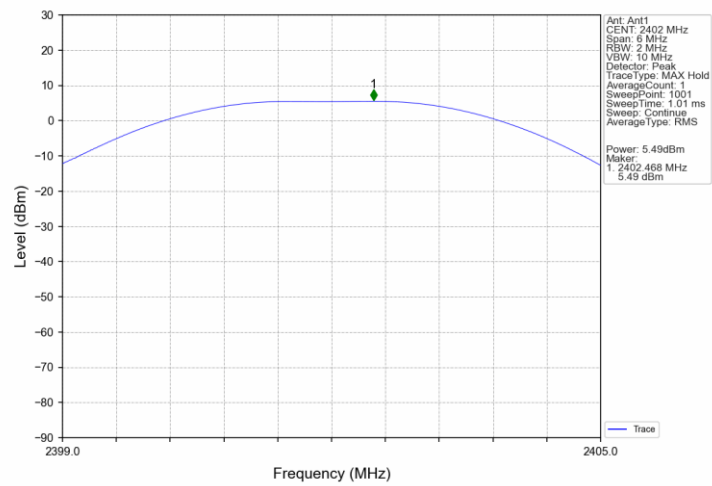

2M_MCH_2440MHz_Ant1_NTNV

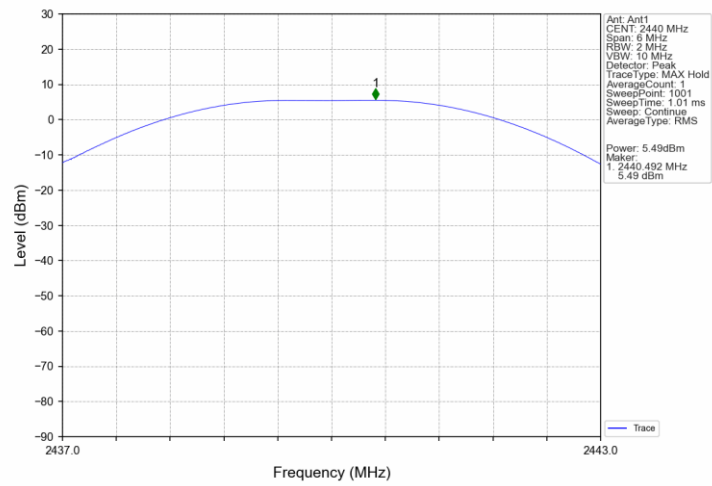

2M_HCH_2480MHz_Ant1_NTNV

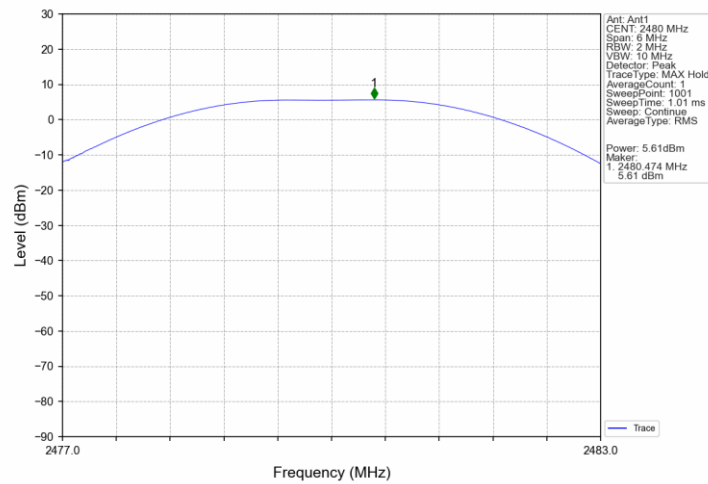

9.2 Power Spectral Density

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤ 8


Test result

Frequency MHz	Mode	Power spectral density dBm/3KHz	Result
Bottom channel 2402MHz	LE 1Mbps	-10.17	Pass
Middle channel 2440MHz	LE 1Mbps	-9.99	Pass
Top channel 2480MHz	LE 1Mbps	-9.95	Pass
Bottom channel 2402MHz	LE 2Mbps	-14.02	Pass
Middle channel 2440MHz	LE 2Mbps	-14.00	Pass
Top channel 2480MHz	LE 2Mbps	-13.82	Pass


1M_LCH_2402MHz_Ant1_NTNV

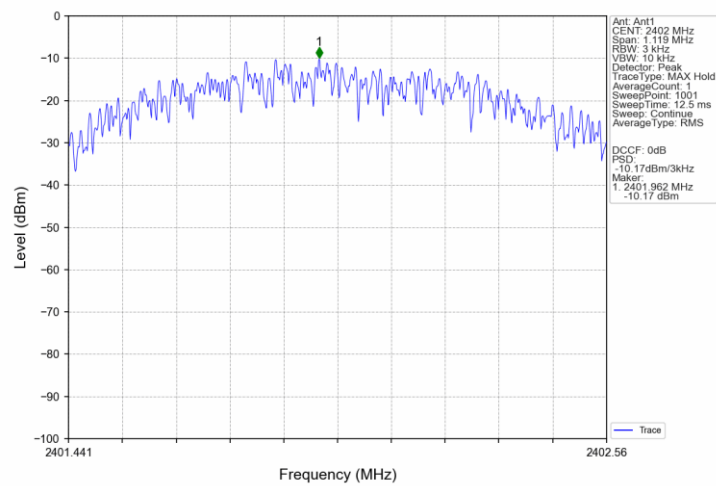


1M_MCH_2440MHz_Ant1_NTNV

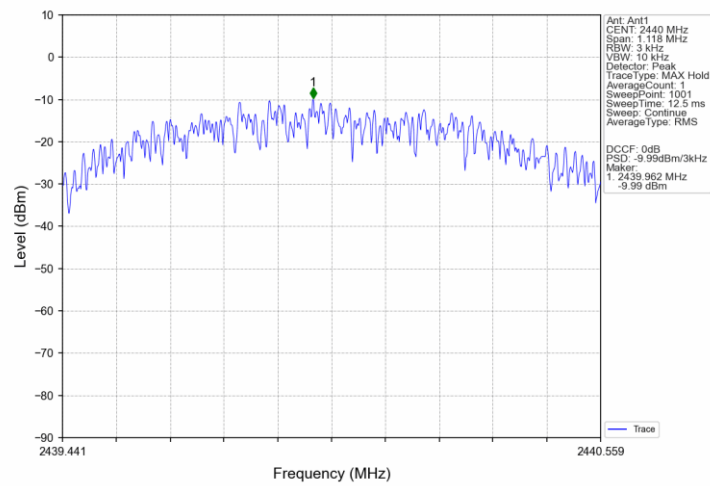


1M_HCH_2480MHz_Ant1_NTNV

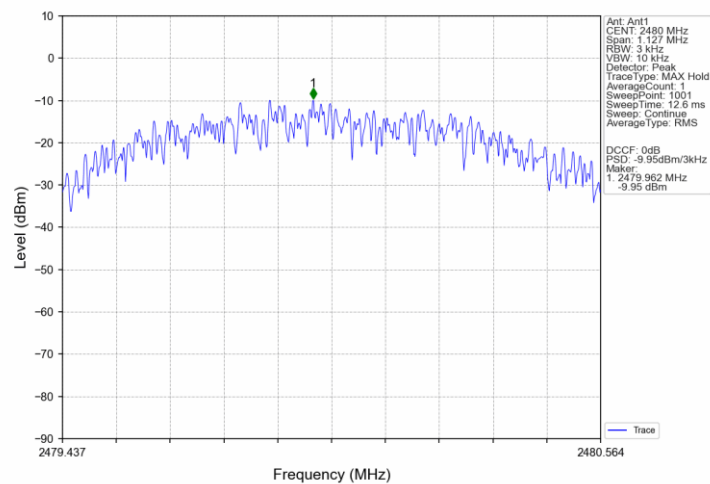


2M_LCH_2402MHz_Ant1_NTNV

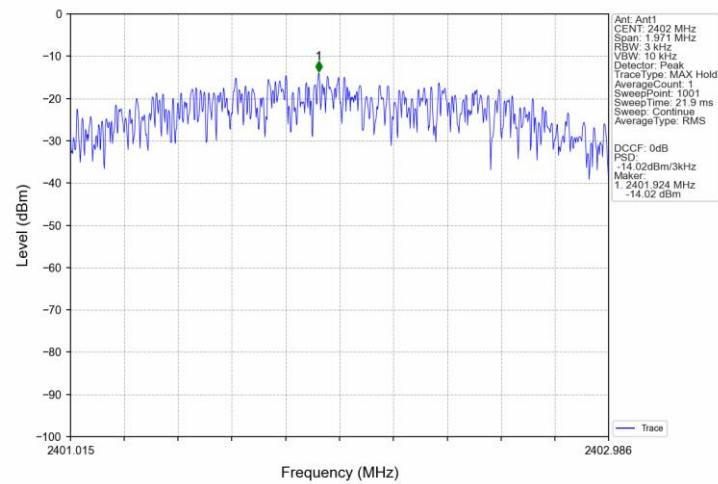

2M_MCH_2440MHz_Ant1_NTNV

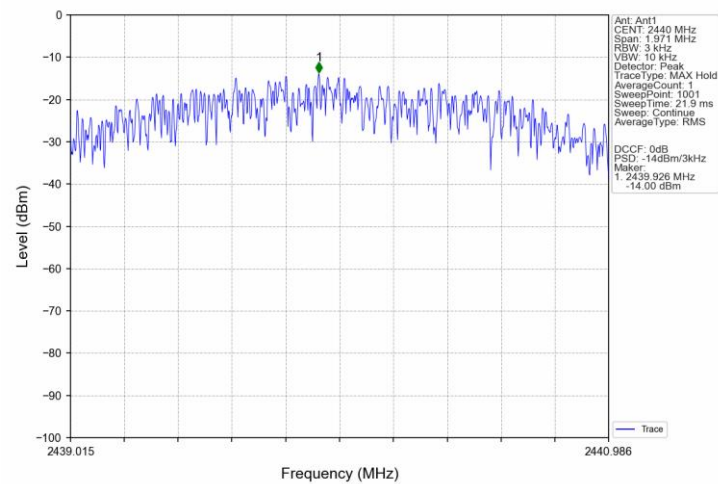

2M_HCH_2480MHz_Ant1_NTNV

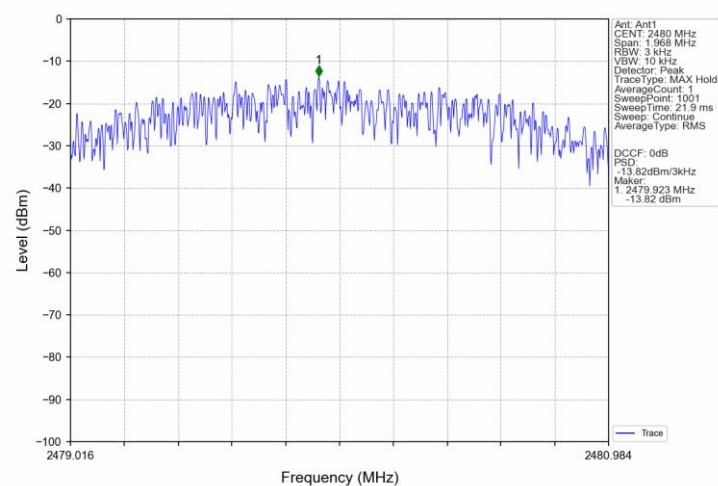

9.3 6 dB Bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set center frequency to the nominal EUT channel center frequency
3. Set RBW = 1% to 5% of the OBW but not less than 100kHz, VBW $\geq 3 \times$ RBW Detector = Peak. Trace mode = max hold. Sweep = auto Trace = max hold
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
5. Record the results in the test report.

Limit

Limit [kHz]

≥ 500

Test Method for 99 % Bandwidth




1. Set center frequency to the nominal EUT channel center frequency
2. Set span = 1.5 times to 5.0 times the OBW. Set RBW = 1 % to 5 % of the OBW Set VBW ≥ 3 RBW Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize.
3. Use the 99 % power bandwidth function of the instrument.
4. Record the results in the test report.


Limit

Limit [kHz]


Test result

Frequency MHz	Mode	6dB bandwidth MHz	99% bandwidth MHz	Result
Bottom channel 2402MHz	LE 1Mbps	0.746	1.032	Pass
Middle channel 2440MHz	LE 1Mbps	0.745	1.033	Pass
Top channel 2480MHz	LE 1Mbps	0.751	1.035	Pass
Bottom channel 2402MHz	LE 2Mbps	1.314	2.058	Pass
Middle channel 2440MHz	LE 2Mbps	1.314	2.059	Pass
Top channel 2480MHz	LE 2Mbps	1.312	2.059	Pass

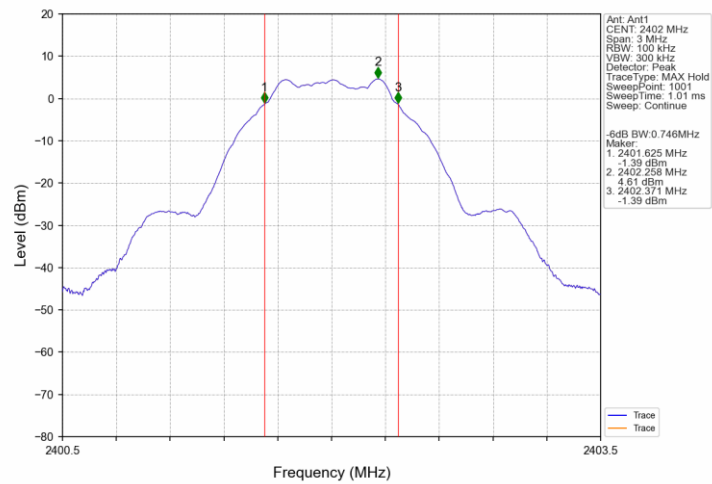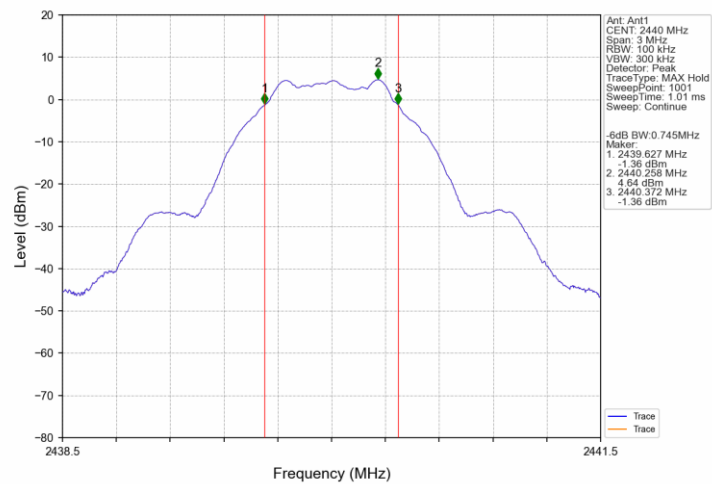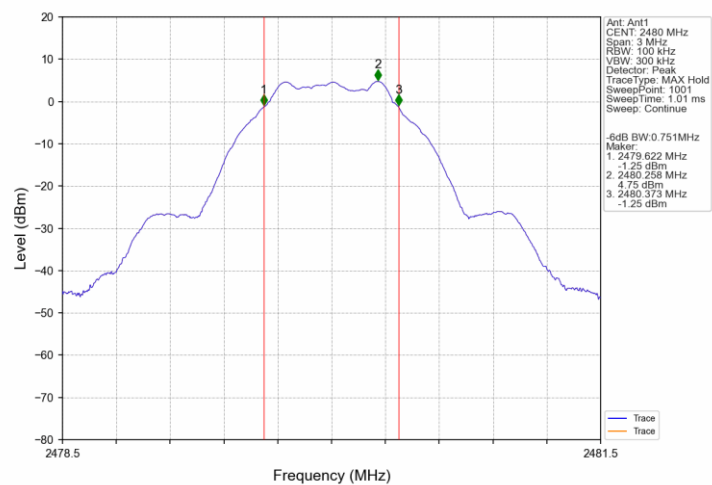
6 dB Bandwidth**1M_LCH_2402MHz_Ant1_NTNV****1M_MCH_2440MHz_Ant1_NTNV****1M_HCH_2480MHz_Ant1_NTNV****2M_LCH_2402MHz_Ant1_NTNV**



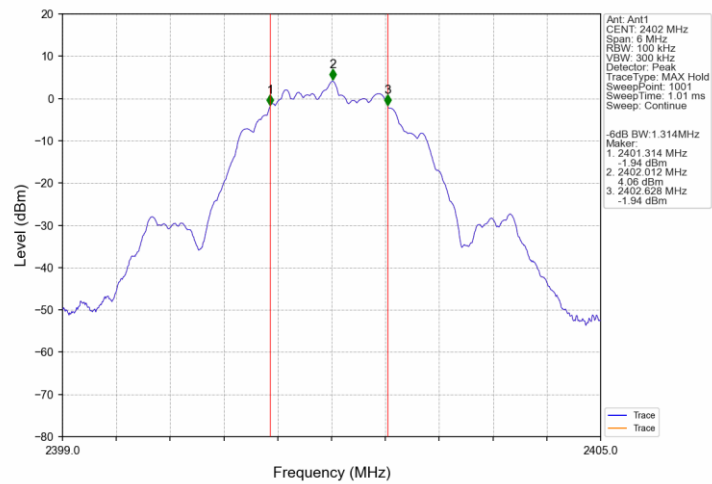



2M_MCH_2440MHz_Ant1_NTNV

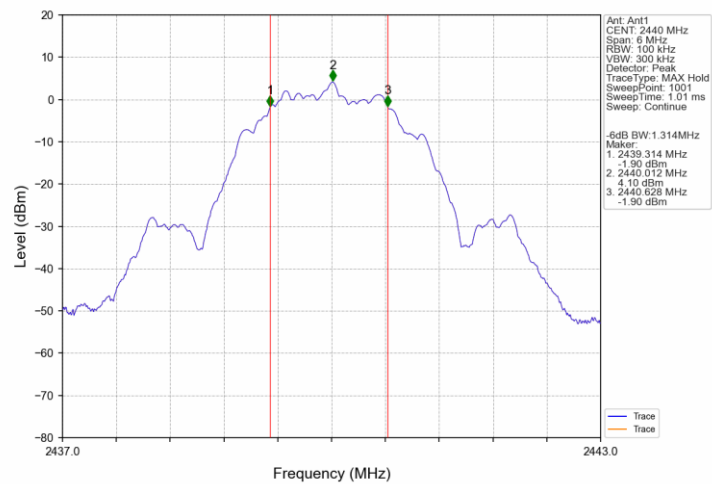


2M_HCH_2480MHz_Ant1_NTNV

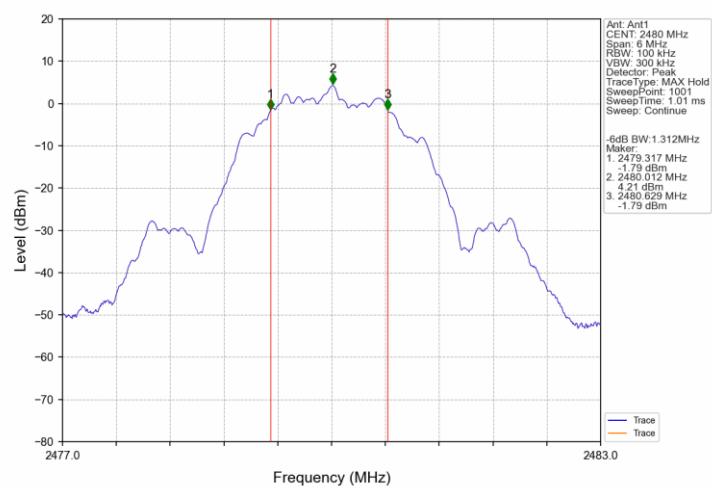

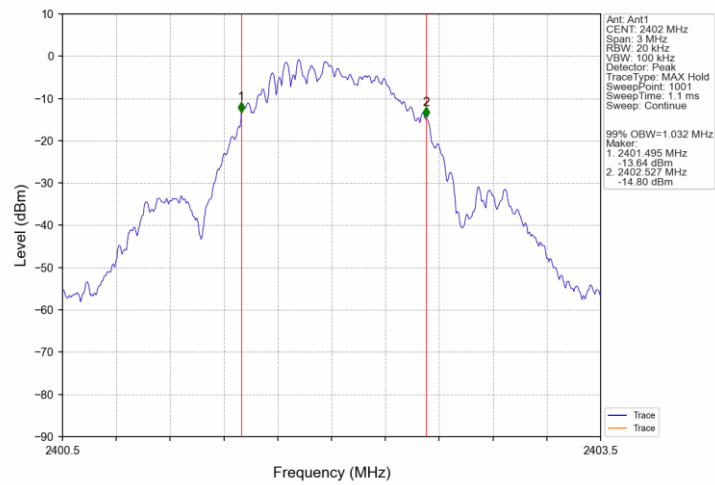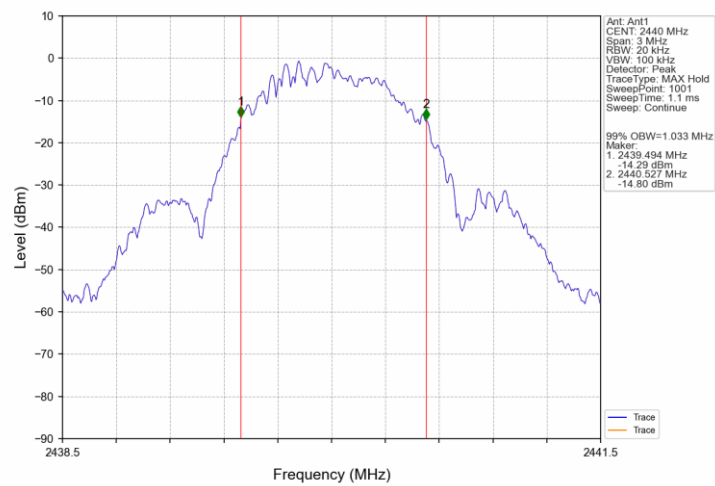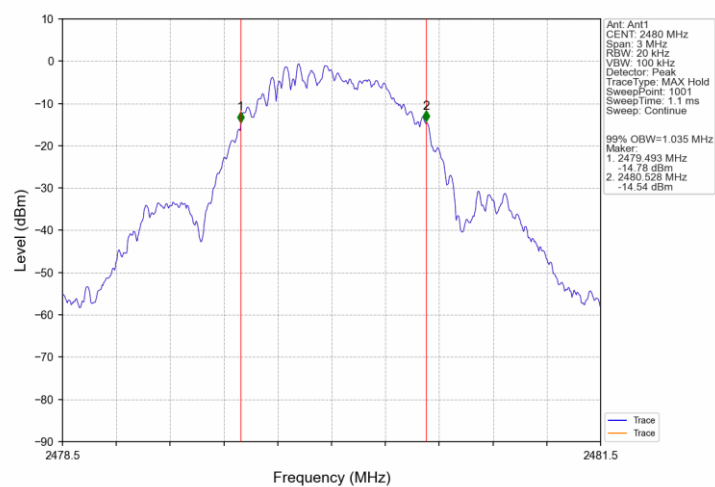
99% Bandwidth**1M_LCH_2402MHz_Ant1_NTNV****1M_MCH_2440MHz_Ant1_NTNV****1M_HCH_2480MHz_Ant1_NTNV****2M_LCH_2402MHz_Ant1_NTNV**

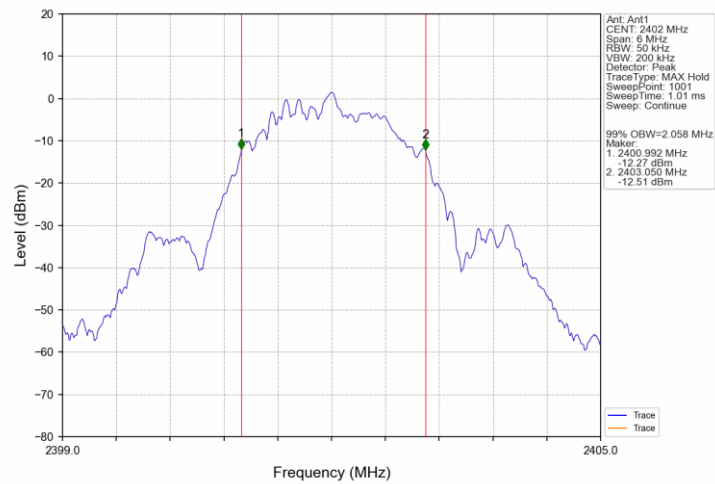

2M_MCH_2440MHz_Ant1_NTNV

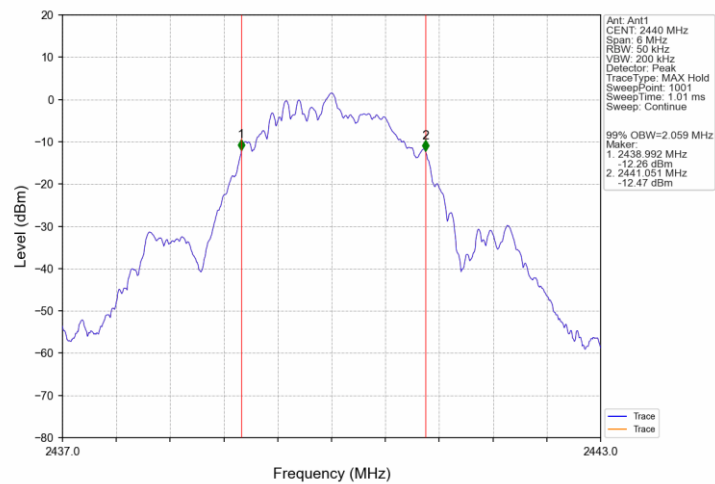

2M_HCH_2480MHz_Ant1_NTNV

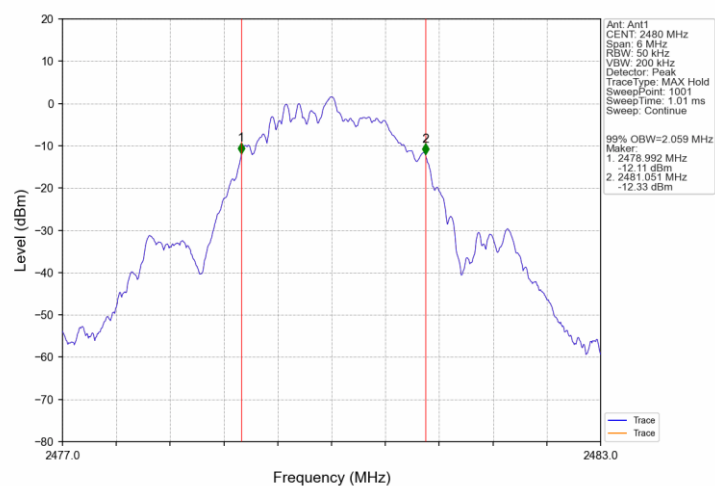

9.4 Spurious RF Conducted Emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	4.62	-15.38	Pass
		2440	1	4.65	-15.35	Pass
		2480	1	4.76	-15.24	Pass
2M	SISO	2402	1	4.21	-15.79	Pass
		2440	1	4.24	-15.76	Pass
		2480	1	4.37	-15.63	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


1M_LCH_2402MHz_Ant1_NTNV

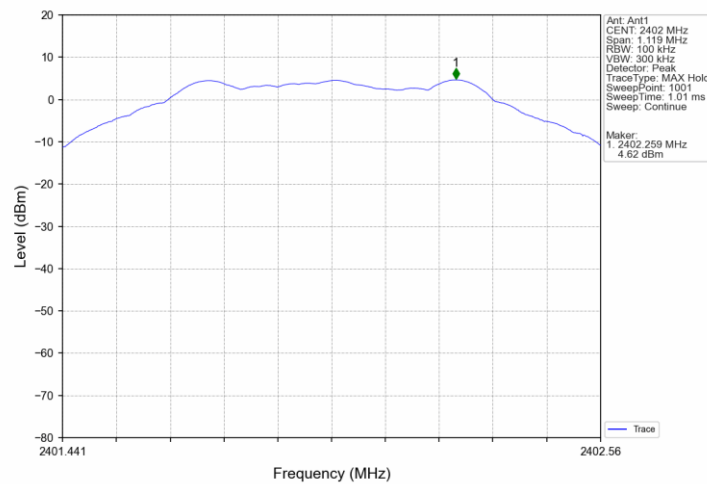


1M_MCH_2440MHz_Ant1_NTNV

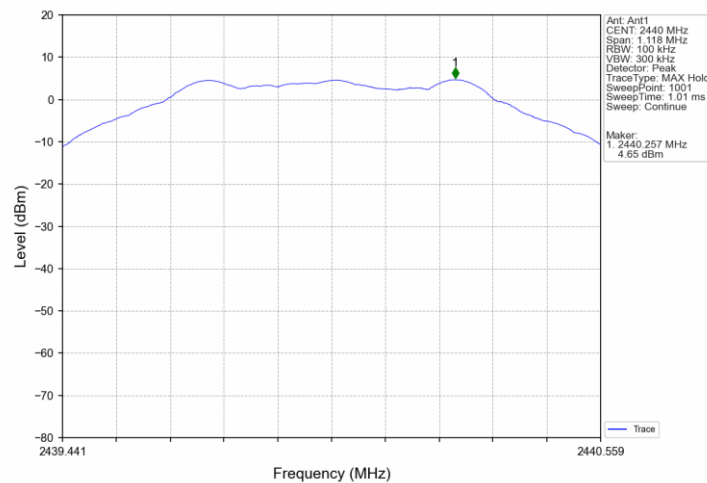


1M_HCH_2480MHz_Ant1_NTNV

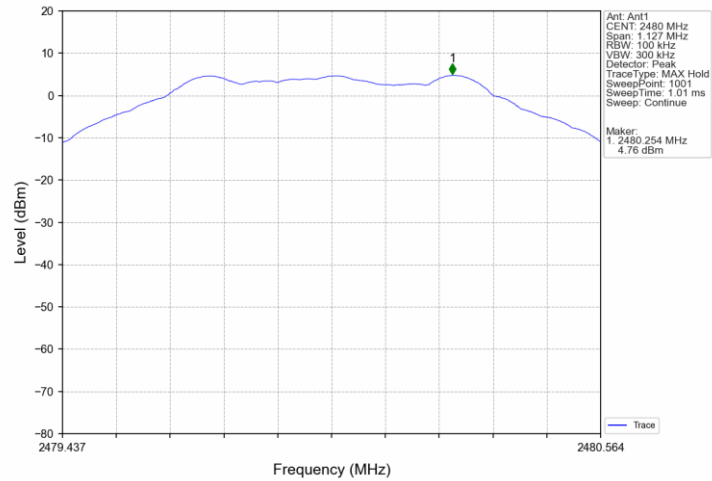


2M_LCH_2402MHz_Ant1_NTNV

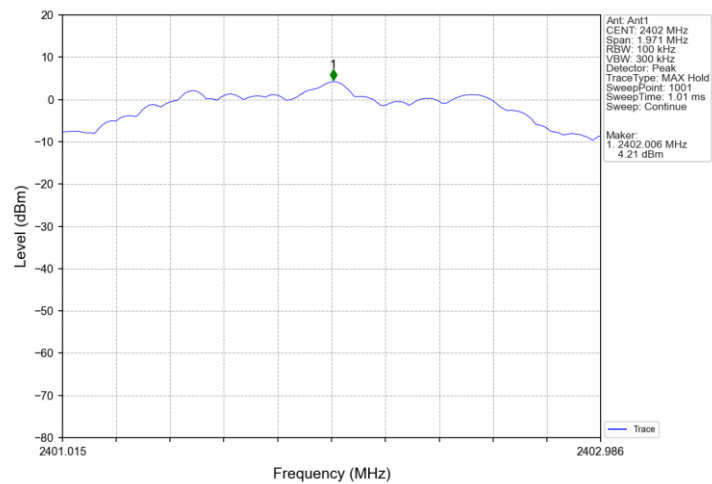


2M_MCH_2440MHz_Ant1_NTNV

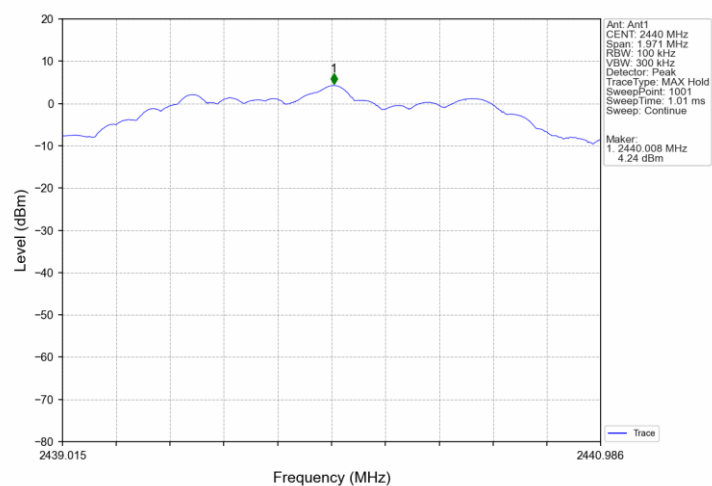


2M_HCH_2480MHz_Ant1_NTNV

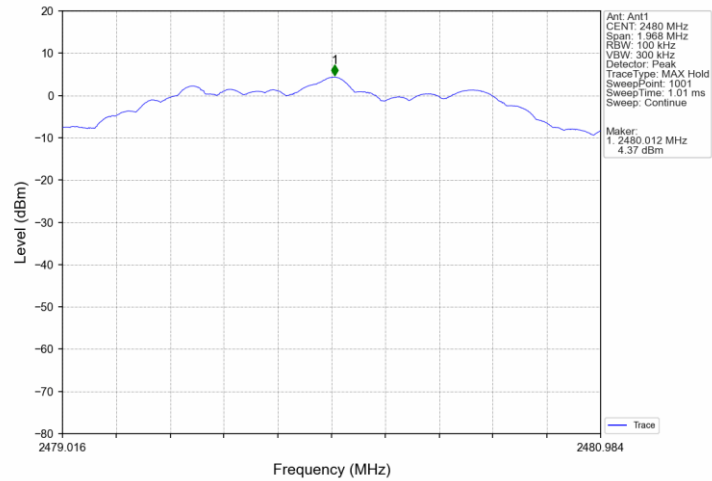


1M_LCH_2402MHz_Ant1_NTNV

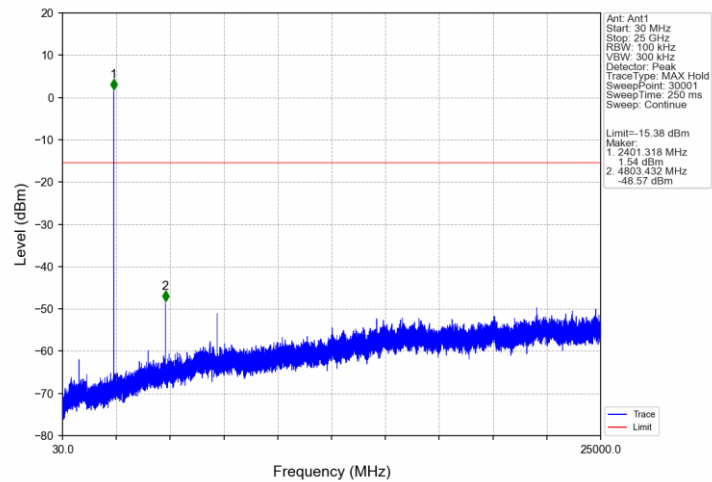


1M_MCH_2440MHz_Ant1_NTNV

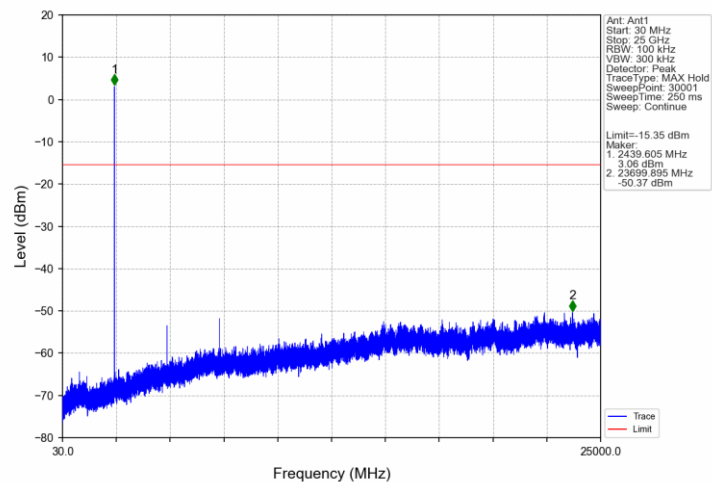


1M_HCH_2480MHz_Ant1_NTNV

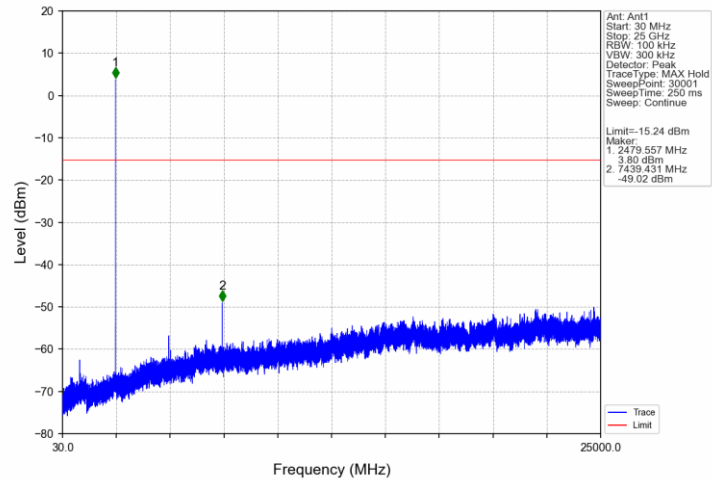


2M_LCH_2402MHz_Ant1_NTNV

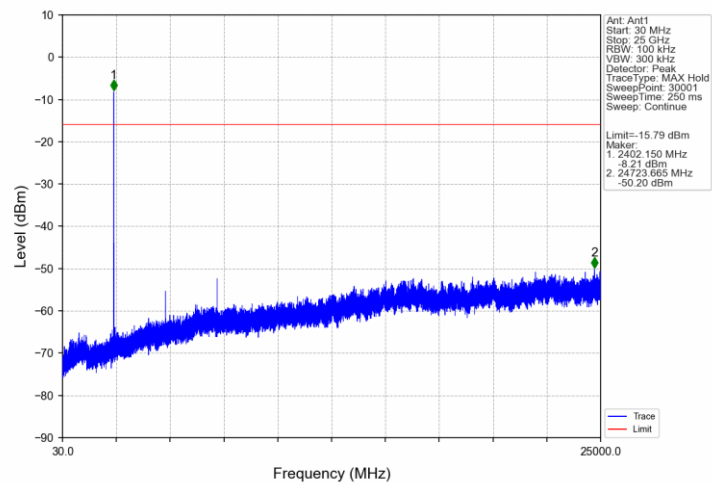

2M_MCH_2440MHz_Ant1_NTNV

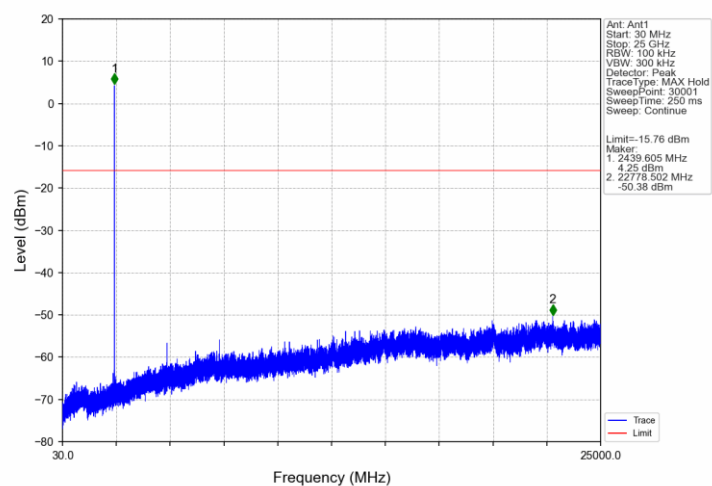

2M_HCH_2480MHz_Ant1_NTNV

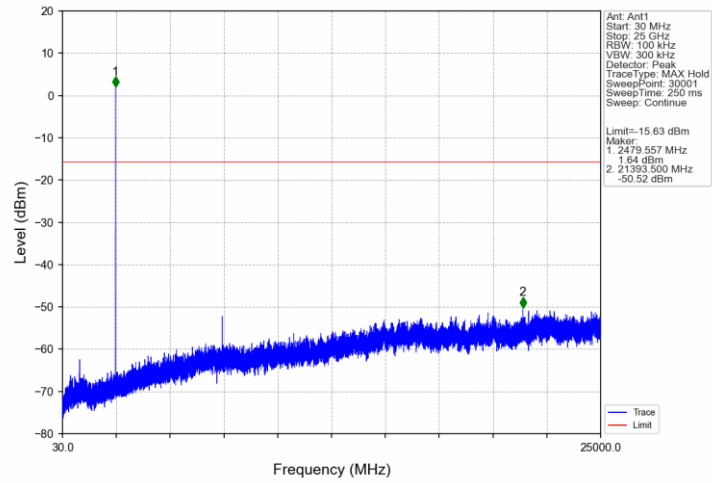

9.5 Band Edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.


Frequency Range MHz	Limit (dBc)
30-25000	-20

Band edge testing


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	4.62	-15.38	Pass
		2480	1	4.76	-15.24	Pass
2M	SISO	2402	1	4.21	-15.79	Pass
		2480	1	4.37	-15.63	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


1M_LCH_2402MHz_Ant1_NTNV

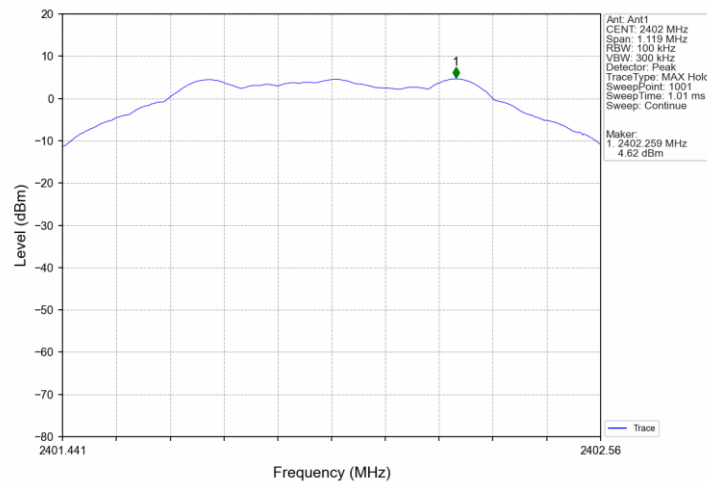


1M_HCH_2480MHz_Ant1_NTNV

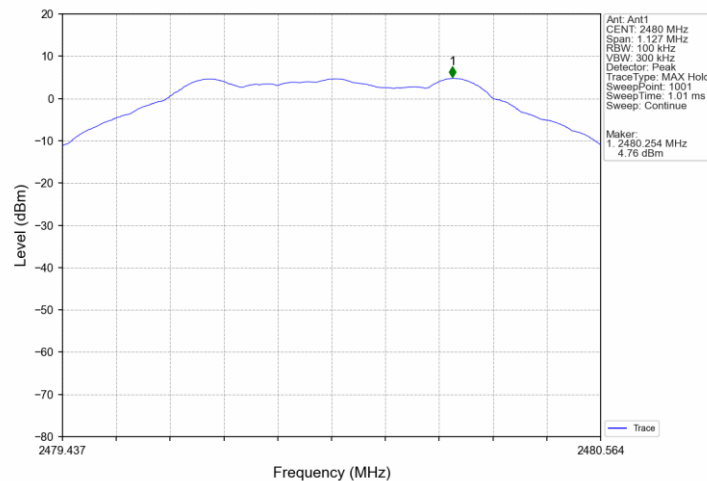


2M_LCH_2402MHz_Ant1_NTNV

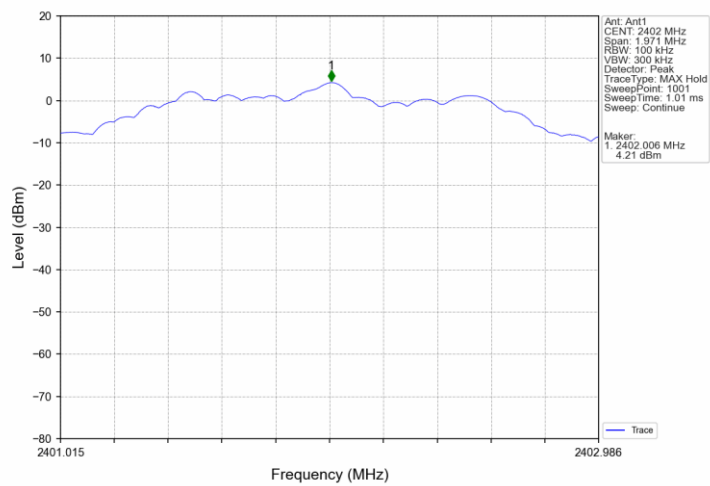


2M_HCH_2480MHz_Ant1_NTNV

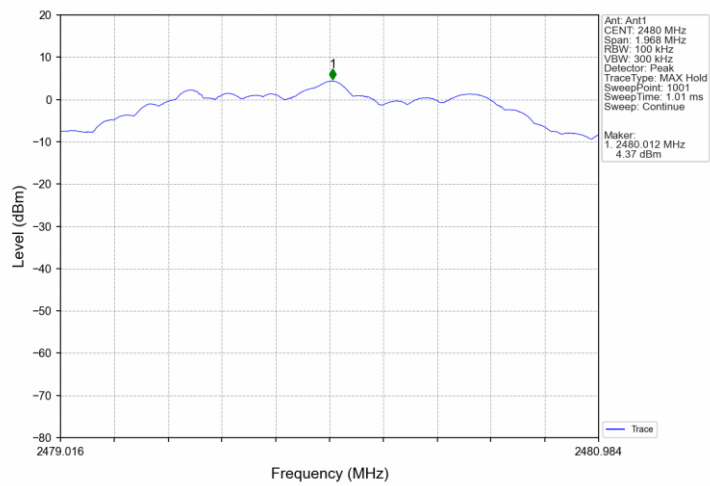


1M_LCH_2402MHz_Ant1_NTNV

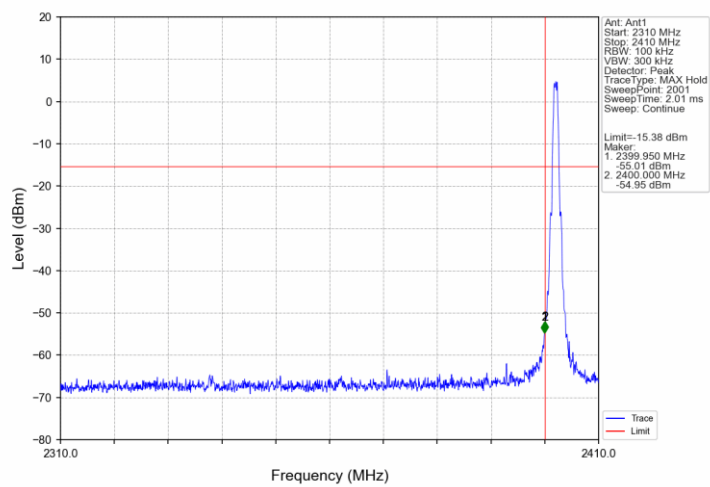


1M_HCH_2480MHz_Ant1_NTNV

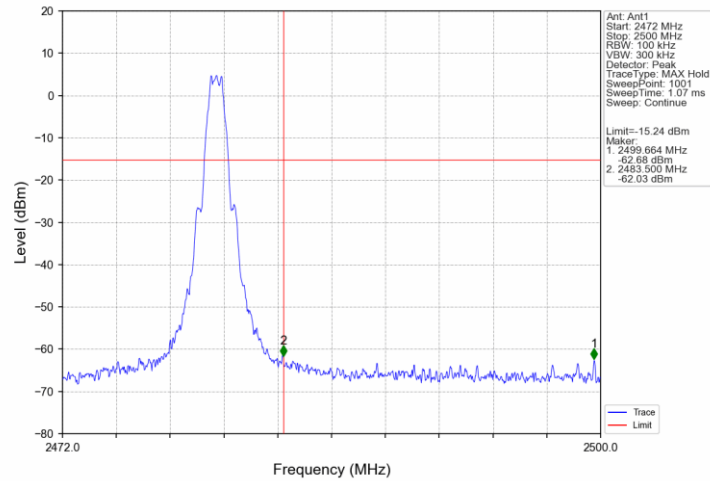

2M_LCH_2402MHz_Ant1_NTNV

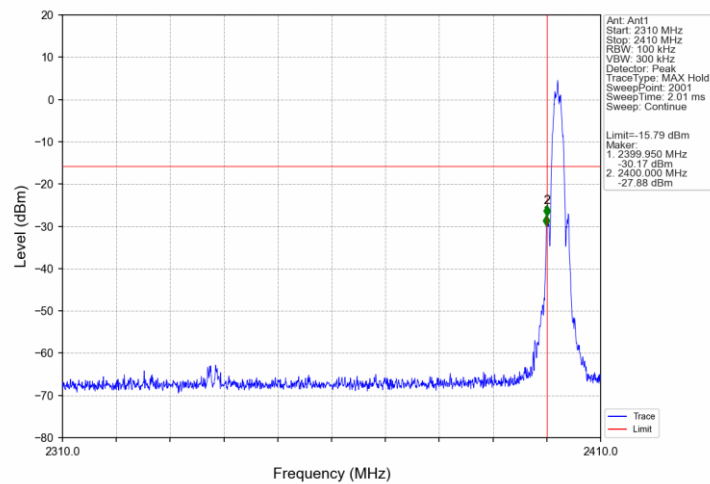

2M_HCH_2480MHz_Ant1_NTNV

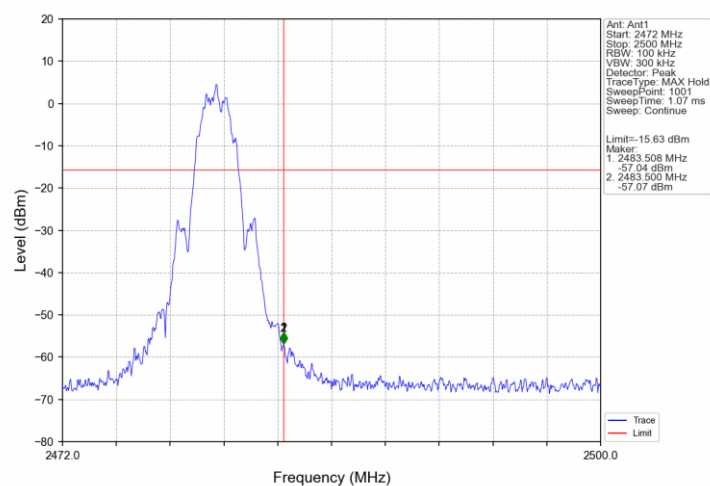

9.6 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction

factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)


Note 2: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)

Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Only worse case (which is subject to the maximum EIRP, BLE_1Mbps mode) test result is listed in the report.

FCC_Test data_9kHz to 30MHz (worst case)

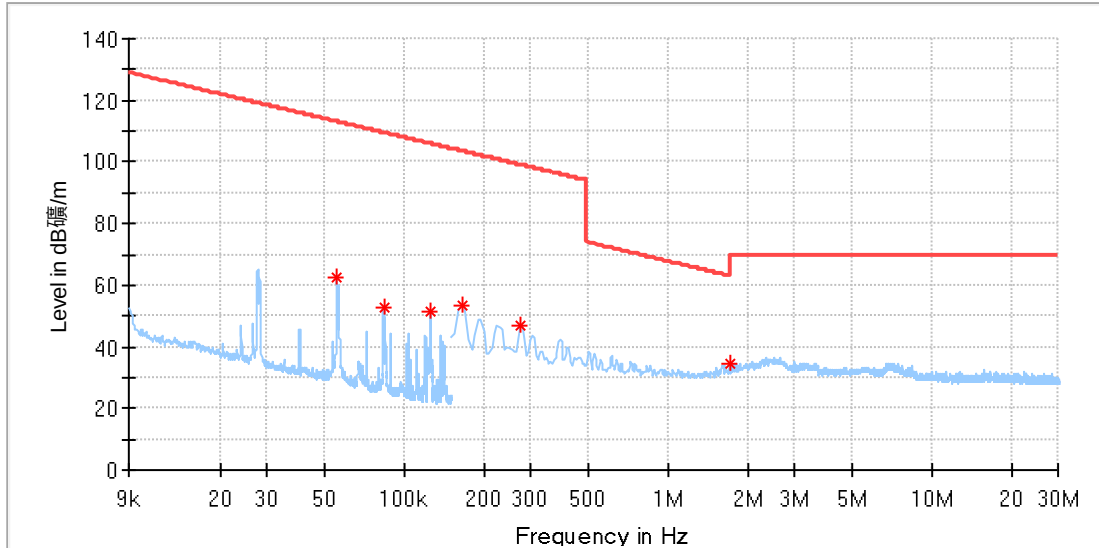


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.055483	62.68	113.07	50.39	H	209.0	19.92
0.083448	52.64	109.50	56.86	H	145.0	19.92
0.124620	51.43	105.99	54.56	H	292.0	19.92
0.164925	53.65	103.54	49.89	H	277.0	19.89
0.274375	46.84	99.08	52.24	H	208.0	19.90
1.702200	34.19	63.01	28.83	H	1.0	20.02

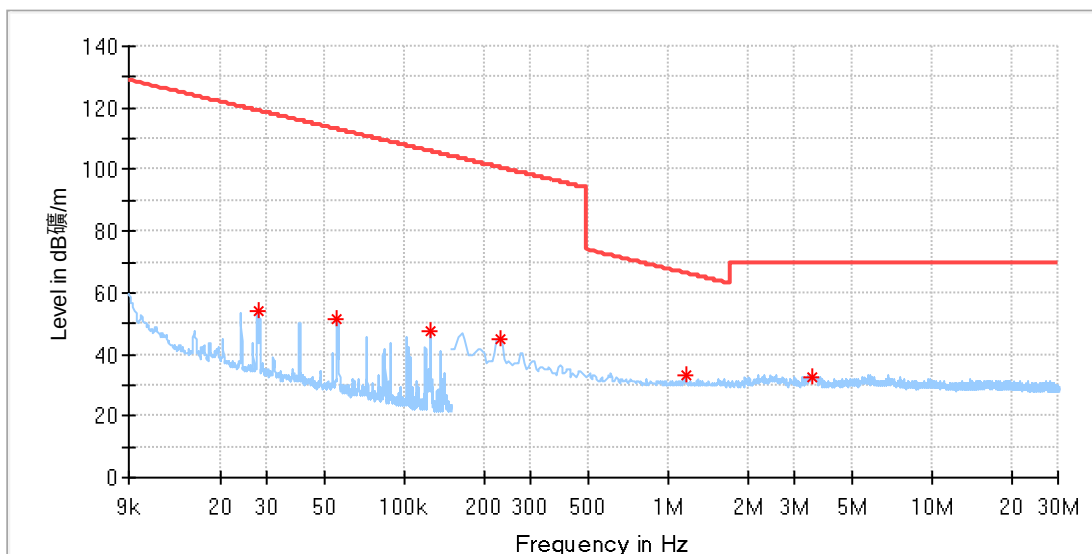


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027753	54.06	119.14	65.08	V	286.0	19.88
0.055577	51.26	113.06	61.80	V	278.0	19.92
0.124620	47.53	105.99	58.46	V	0.0	19.92
0.229600	44.73	100.64	55.90	V	266.0	19.88
1.164900	33.00	66.36	33.36	V	109.0	19.94
3.498175	32.84	70.00	37.16	V	232.0	20.13

ISED_Test data_9kHz to 30MHz (worst case)

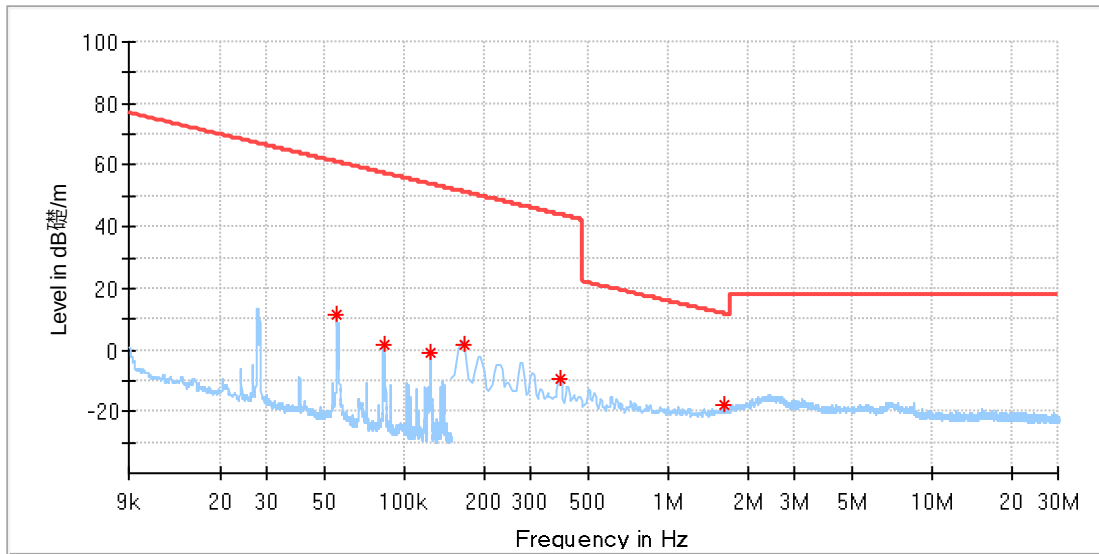


Frequency (MHz)	MaxPeak (dBµA/m)	Limit (dBµA/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.055577	11.21	61.02	49.81	H	163.0	-31.61
0.083307	1.78	57.46	55.69	H	99.0	-31.61
0.124667	-0.80	53.92	54.72	H	283.0	-31.61
0.169900	1.44	51.20	49.77	H	206.0	-31.64
0.388800	-9.10	43.94	53.04	H	275.0	-31.63
1.637525	-17.84	11.70	29.54	H	1.0	-31.52

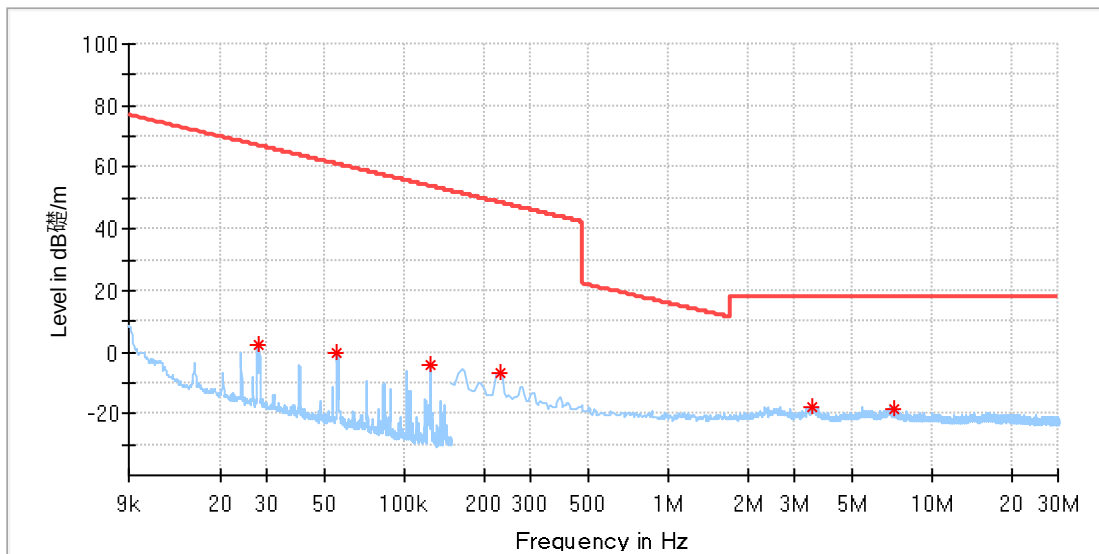

Frequency (MHz)	MaxPeak (dBµA/m)	Limit (dBµA/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027753	2.36	67.11	64.75	V	262.0	-31.65
0.055530	-0.40	61.02	61.42	V	246.0	-31.61
0.124714	-4.21	53.92	58.13	V	358.0	-31.61
0.229600	-6.71	48.56	55.27	V	292.0	-31.65
3.533000	-17.98	18.06	36.04	V	327.0	-31.40
7.115000	-18.20	18.06	36.26	V	232.0	-31.37

Test data_30MHz to 1000MHz (worst case)

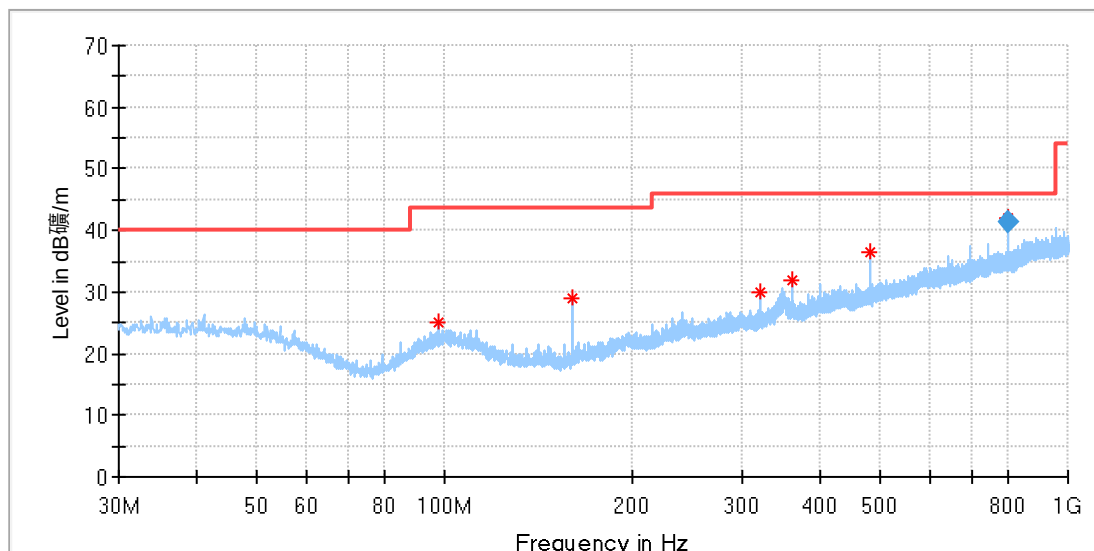


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
97.475625	25.23	43.50	18.27	100.0	H	29.0	19.60
159.980000	29.05	43.50	14.45	200.0	H	105.0	16.04
319.969375	29.85	46.00	16.15	100.0	H	238.0	21.94
359.981875	31.91	46.00	14.09	100.0	H	347.0	22.59
479.958750	36.50	46.00	9.50	100.0	H	98.0	25.60
799.998125	42.05	46.00	3.95	100.0	H	158.0	30.66

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
799.998125	41.30	46.00	4.70	100.0	H	158.0	30.66

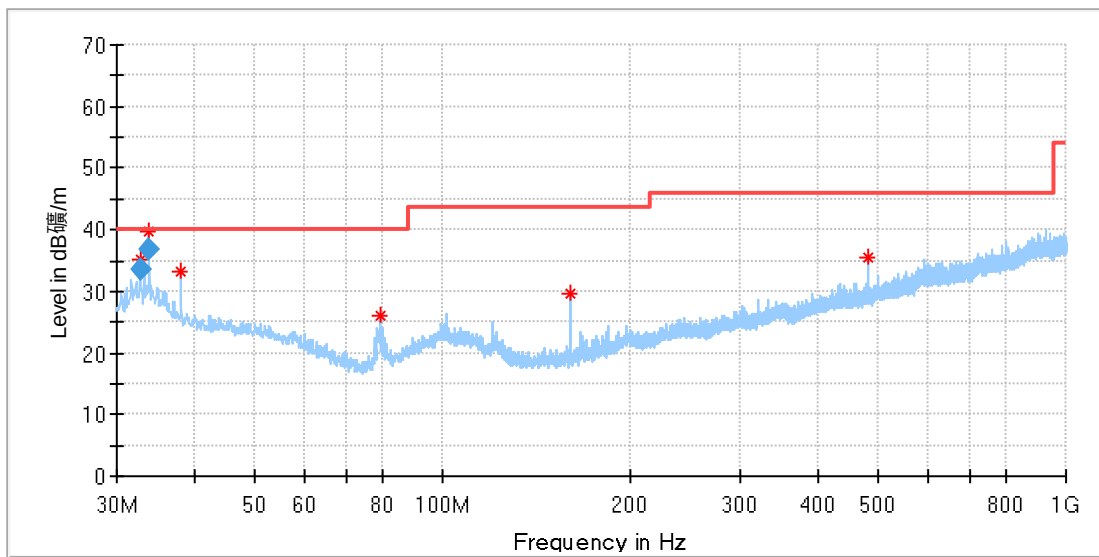

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.788750	35.08	40.00	4.92	100.0	V	0.0	21.06
33.819375	39.77	40.00	0.23	100.0	V	0.0	20.96
38.002500	33.08	40.00	6.92	100.0	V	0.0	20.99
79.288125	26.20	40.00	13.80	100.0	V	72.0	15.16
159.980000	29.65	43.50	13.85	100.0	V	221.0	16.04
479.958750	35.45	46.00	10.55	100.0	V	264.0	25.60

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.788750	33.41	40.00	6.59	100.0	V	0.0	21.06
33.819375	36.70	40.00	3.30	100.0	V	0.0	20.96

Test data 1GHz to 18GHz

BLE_1Mbps_Low Channel:

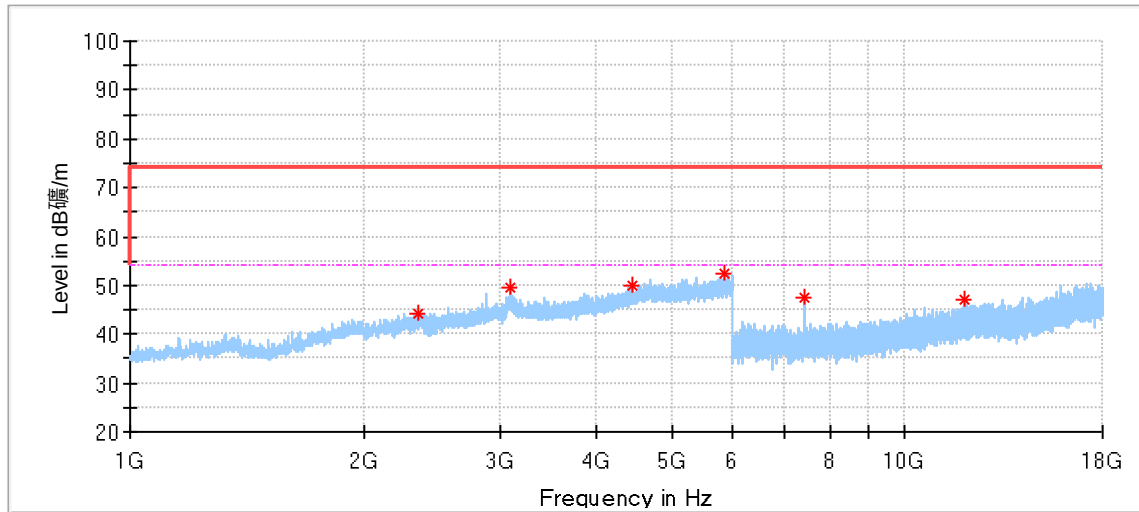


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.000000	44.39	74.00	29.61	150.0	H	277.0	-1.69
3088.500000	49.42	74.00	24.58	150.0	H	122.0	2.32
4459.500000	49.99	74.00	24.01	150.0	H	305.0	4.80
5839.000000	52.21	74.00	21.79	150.0	H	345.0	7.44
7439.500000	47.61	74.00	26.39	150.0	H	328.0	9.48
11910.000000	46.95	74.00	27.05	150.0	H	126.0	16.56

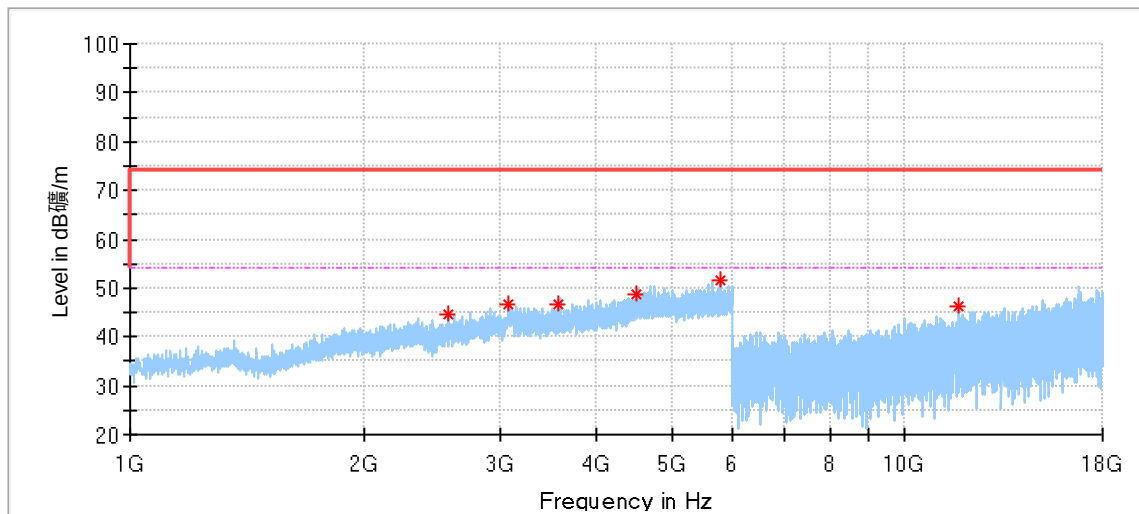


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2580.500000	44.75	74.00	29.25	150.0	V	0.0	-1.05
3075.500000	46.74	74.00	27.26	150.0	V	0.0	1.91
3572.500000	46.77	74.00	27.23	150.0	V	0.0	1.89
4511.500000	48.86	74.00	25.14	150.0	V	0.0	5.10
5791.000000	51.48	74.00	22.52	150.0	V	0.0	7.30
11709.000000	46.45	74.00	27.55	150.0	V	0.0	15.67

BLE_1Mbps _Middle Channel:

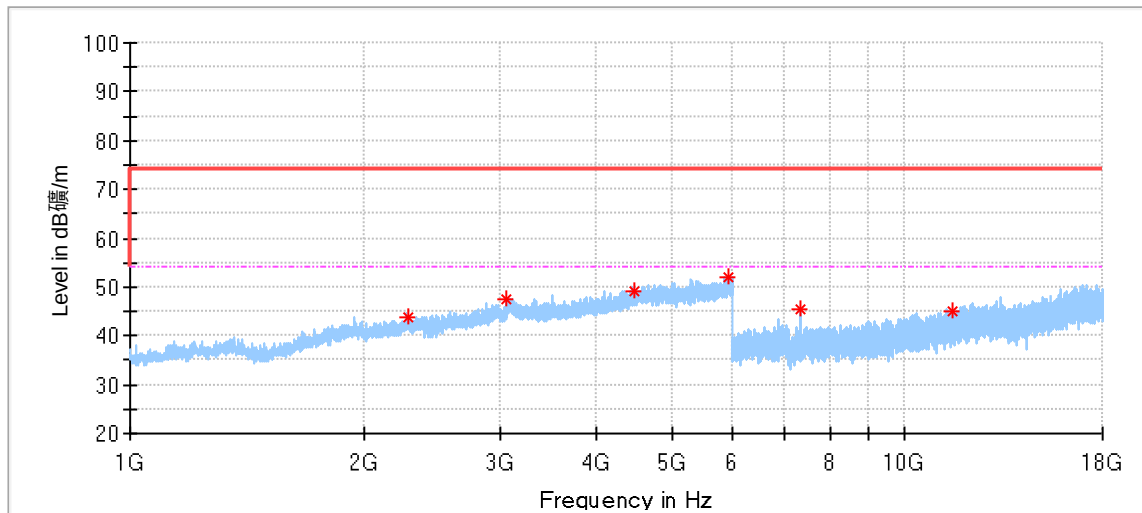


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2286.000000	43.66	74.00	30.34	150.0	H	13.0	-1.95
3059.500000	47.35	74.00	26.65	150.0	H	244.0	1.28
4468.000000	48.93	74.00	25.07	150.0	H	80.0	4.86
5916.500000	52.15	74.00	21.85	150.0	H	107.0	7.96
7320.000000	45.50	74.00	28.50	150.0	H	122.0	9.38
11556.500000	45.17	74.00	28.83	150.0	H	12.0	15.28

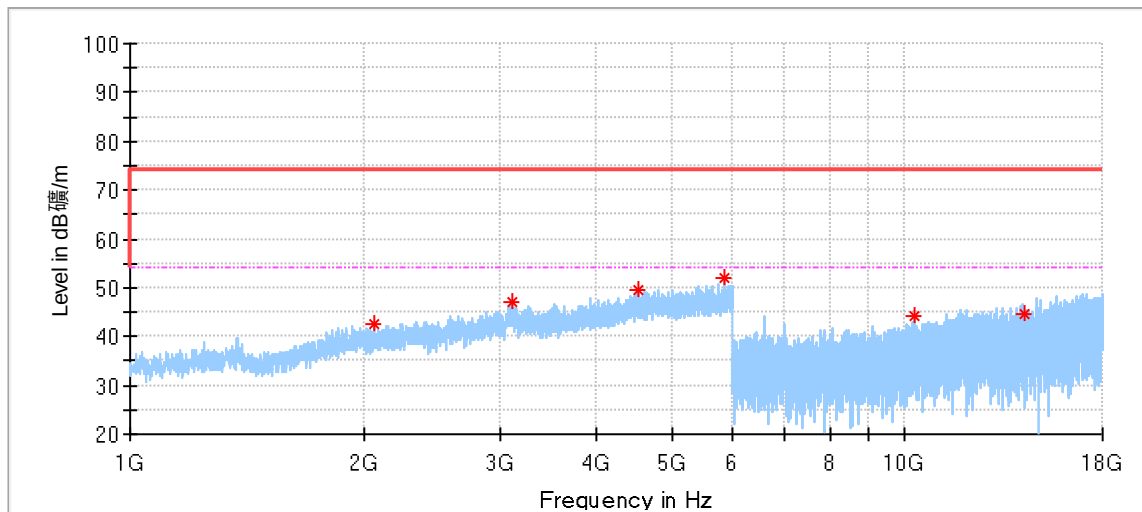


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2070.000000	42.69	74.00	31.31	150.0	V	0.0	-3.23
3117.500000	47.08	74.00	26.92	150.0	V	0.0	1.99
4529.500000	49.49	74.00	24.51	150.0	V	0.0	5.19
5866.000000	51.91	74.00	22.09	150.0	V	0.0	7.61
10276.500000	44.05	74.00	29.95	150.0	V	0.0	13.42
14259.000000	44.42	74.00	29.58	150.0	V	0.0	16.77

BLE_1Mbps_High Channel:

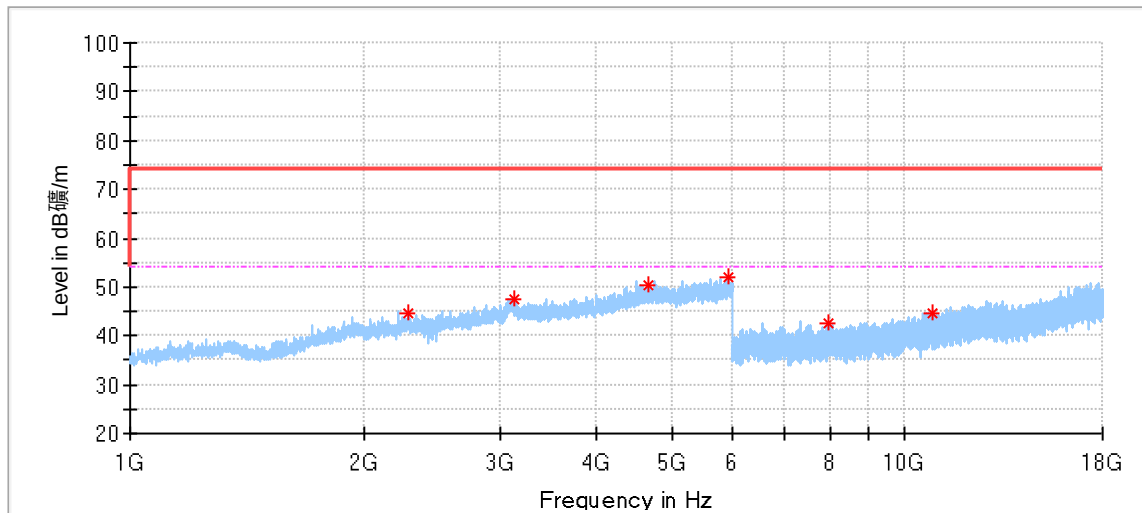


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2292.000000	44.78	74.00	29.22	150.0	H	95.0	-1.93
3124.500000	47.55	74.00	26.45	150.0	H	218.0	1.76
4672.500000	50.50	74.00	23.50	150.0	H	0.0	5.76
5920.500000	52.04	74.00	21.96	150.0	H	191.0	7.98
7958.500000	42.44	74.00	31.56	150.0	H	212.0	9.96
10838.500000	44.58	74.00	29.42	150.0	H	17.0	13.62

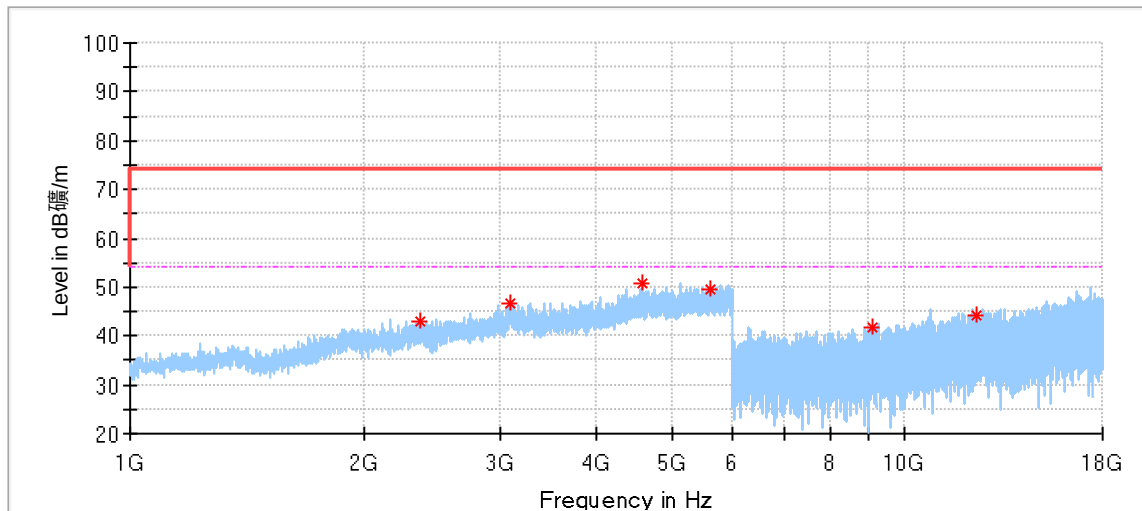


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2371.000000	42.95	74.00	31.05	150.0	V	0.0	-1.58
3087.000000	46.86	74.00	27.14	150.0	V	0.0	2.28
4571.500000	50.93	74.00	23.07	150.0	V	0.0	5.42
5606.000000	49.37	74.00	24.63	150.0	V	0.0	6.93
9072.500000	41.90	74.00	32.10	150.0	V	0.0	11.63
12397.000000	44.14	74.00	29.86	150.0	V	0.0	16.24

Test data 18GHz to 40GHz:
BLE_1Mbps_Low Channel:

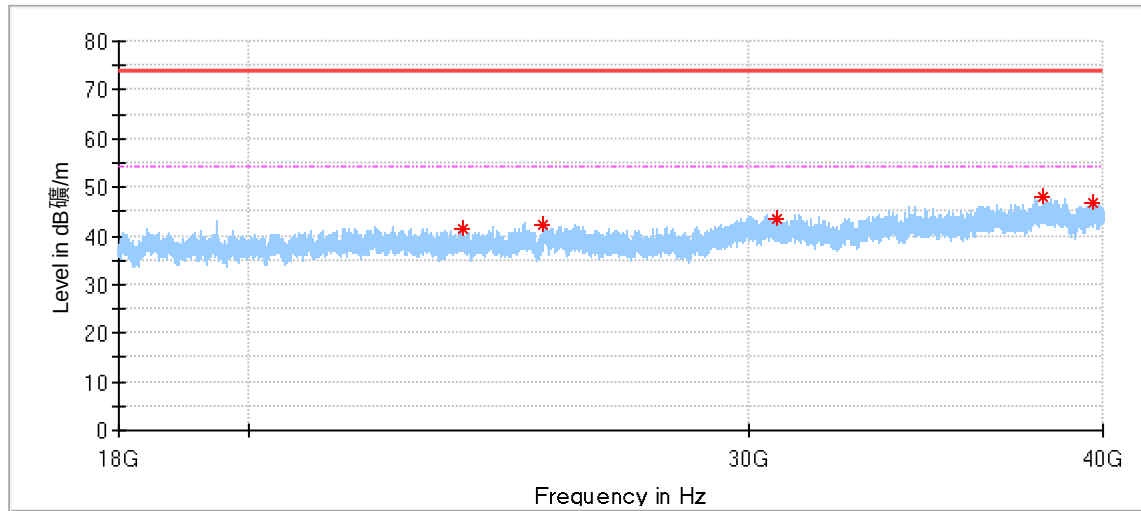


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23786.000000	41.64	74.00	32.36	150.0	H	297.0	0.57
25394.062500	42.29	74.00	31.71	150.0	H	312.0	1.34
30720.125000	43.33	74.00	30.67	150.0	H	4.0	1.89
38121.750000	47.88	74.00	26.12	150.0	H	353.0	5.61
39659.687500	46.80	74.00	27.20	150.0	H	233.0	7.50

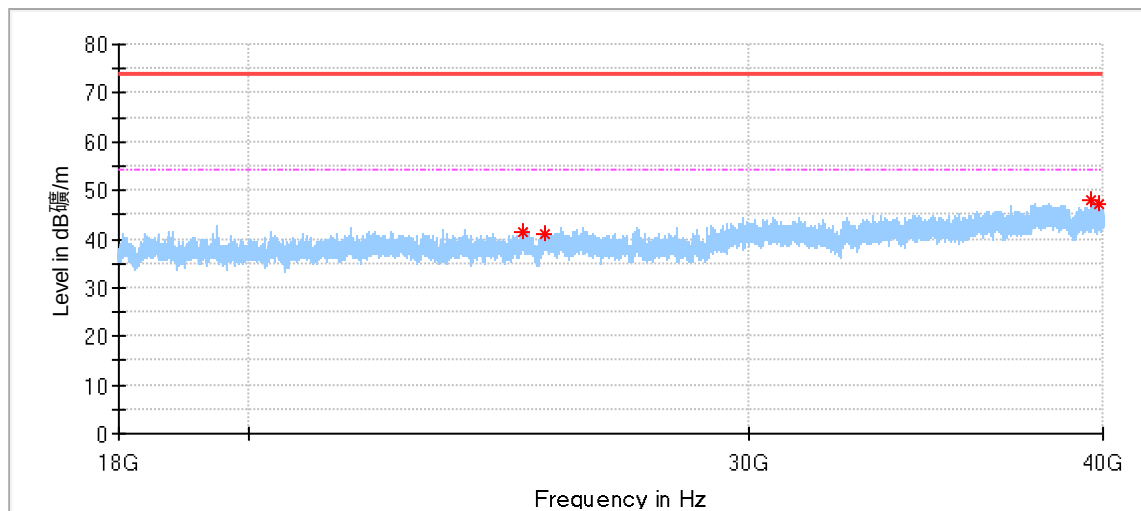


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24994.625000	41.54	74.00	32.46	150.0	V	234.0	1.27
25447.000000	41.20	74.00	32.80	150.0	V	48.0	1.41
39640.437500	47.94	74.00	26.06	150.0	V	219.0	7.47
39894.812500	47.32	74.00	26.68	150.0	V	63.0	8.18

BLE_1Mbps_ Middle Channel:

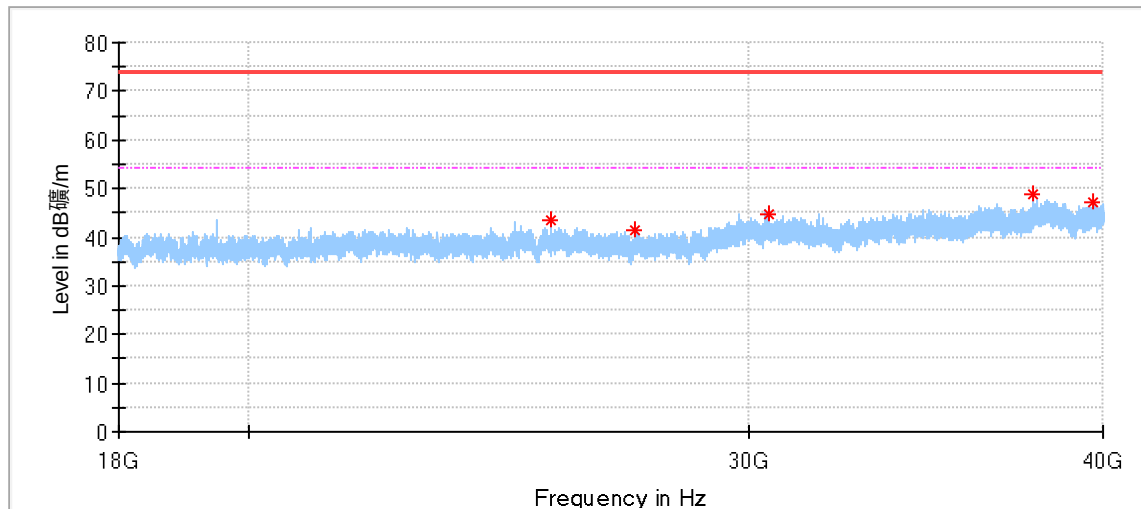


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
25541.875000	43.41	74.00	30.59	150.0	H	339.0	1.53
27363.062500	41.41	74.00	32.59	150.0	H	126.0	1.76
30481.562500	44.53	74.00	29.47	150.0	H	248.0	2.01
37789.000000	48.69	74.00	25.31	150.0	H	0.0	4.60
39668.625000	47.01	74.00	26.99	150.0	H	126.0	7.51

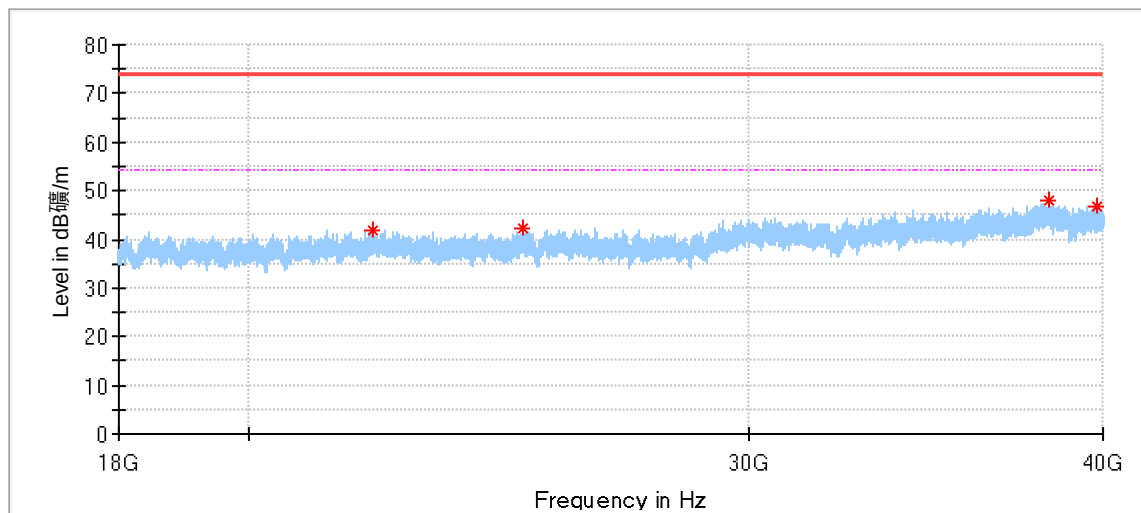


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22118.812500	41.97	74.00	32.03	150.0	V	16.0	0.14
24980.875000	42.46	74.00	31.54	150.0	V	1.0	1.23
38268.187500	47.96	74.00	26.04	150.0	V	77.0	6.30
39781.375000	46.97	74.00	27.03	150.0	V	214.0	7.86

BLE_1Mbps_High Channel:

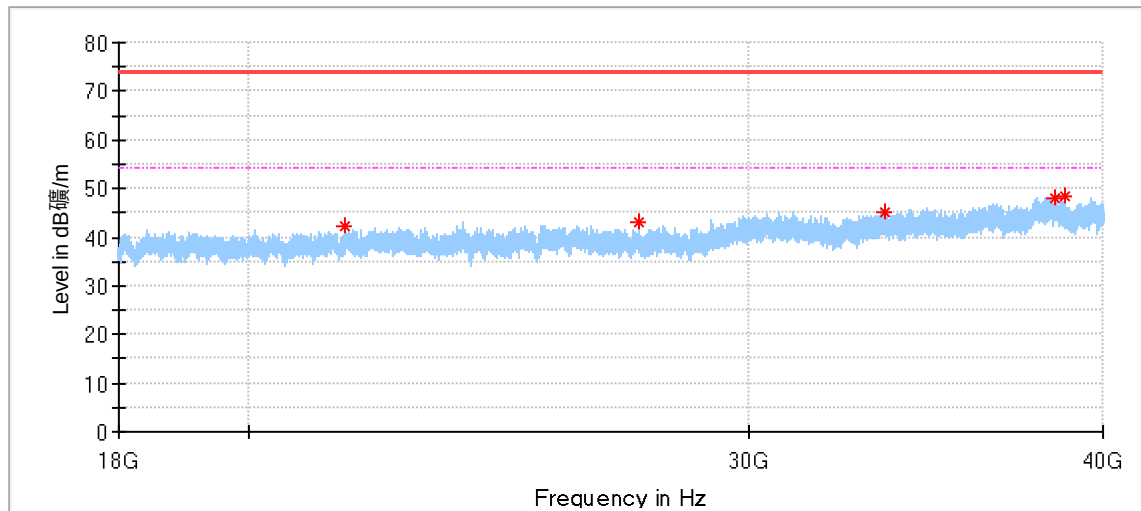


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21631.375000	42.08	74.00	31.92	150.0	H	359.0	-0.26
27449.687500	43.27	74.00	30.73	150.0	H	97.0	1.66
33490.062500	45.10	74.00	28.90	150.0	H	282.0	2.76
38456.562500	48.19	74.00	25.81	150.0	H	160.0	6.57
38806.500000	48.44	74.00	25.56	150.0	H	0.0	5.70

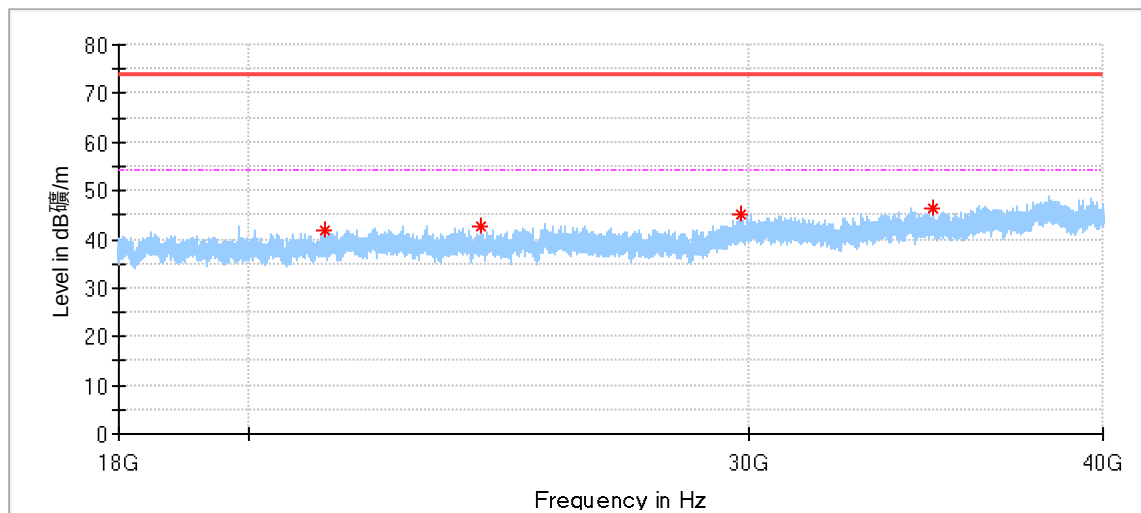


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21258.062500	41.85	74.00	32.15	150.0	V	65.0	-0.56
24157.250000	42.74	74.00	31.26	150.0	V	126.0	0.51
29818.125000	45.09	74.00	28.91	150.0	V	232.0	2.00
34843.062500	46.32	74.00	27.68	150.0	V	329.0	3.77

Restricted band band-edge of operation. test result as below:

BLE_1Mbps_Low Channel:

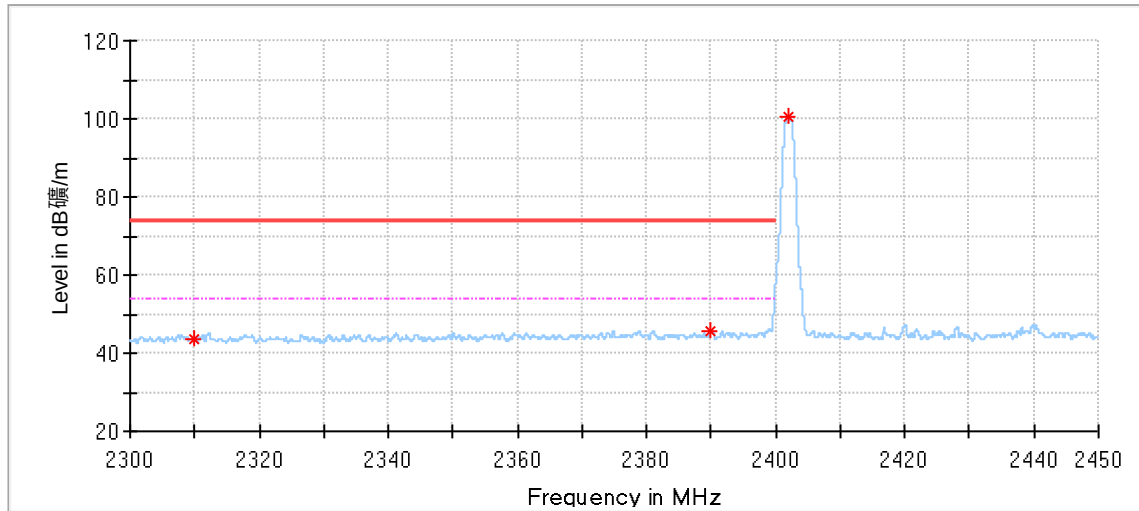


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2310.005000	43.84	74.00	30.16	150.0	H	304.0	-2.25
2390.000000	45.86	74.00	28.14	150.0	H	261.0	-1.74
2402.000000	100.56	---	---	150.0	H	272.0	-1.54

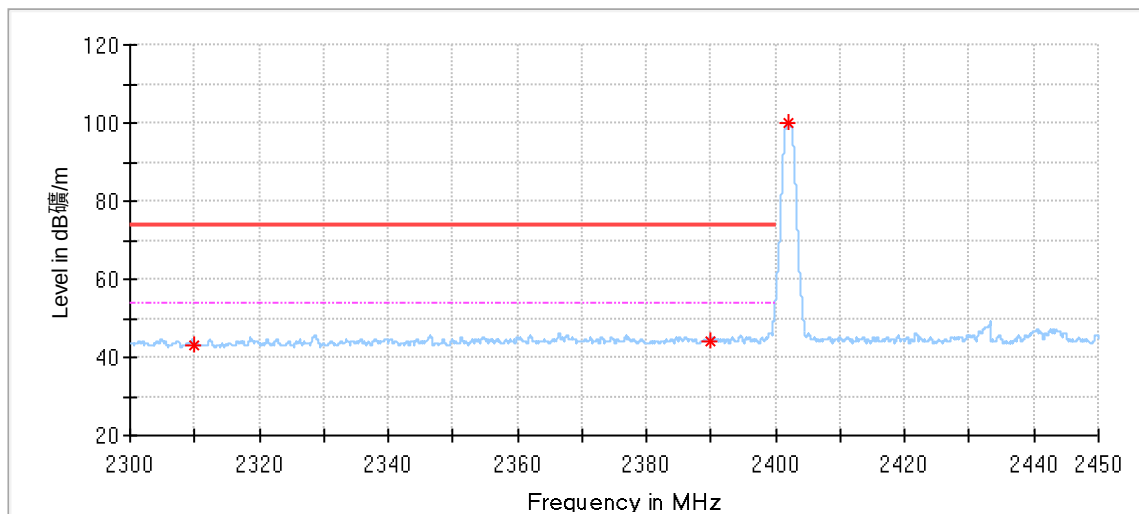


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2310.005000	43.32	74.00	30.68	150.0	V	174.0	-2.25
2390.000000	44.26	74.00	29.74	150.0	V	301.0	-1.74
2402.015000	100.01	---	---	150.0	V	312.0	-1.54

BLE_1Mbps_High Channel:

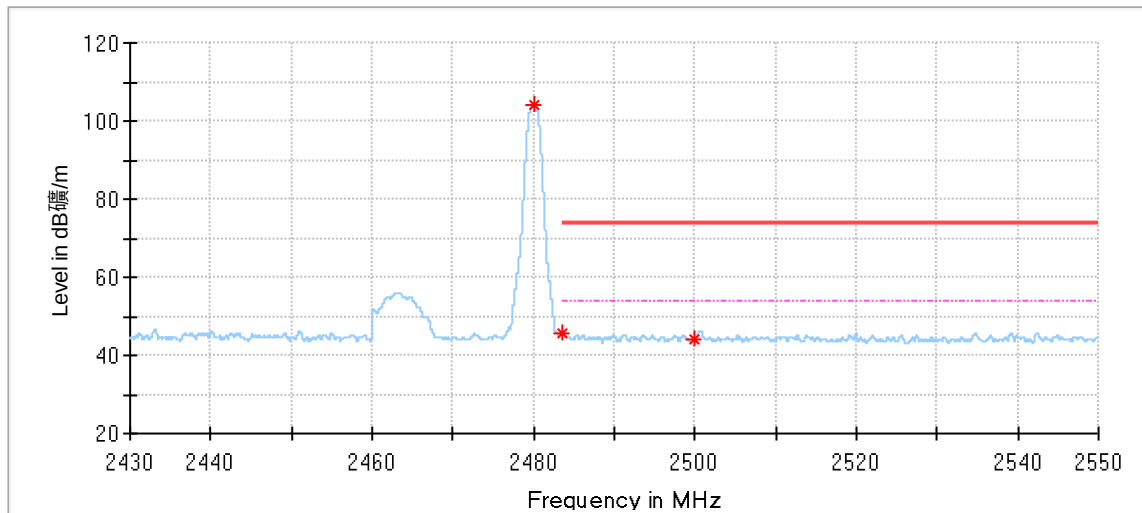


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.016000	103.86	---	---	150.0	H	141.0	-1.80
2483.508000	45.55	74.00	28.45	150.0	H	130.0	-1.85
2500.008000	44.02	74.00	29.98	150.0	H	354.0	-2.08

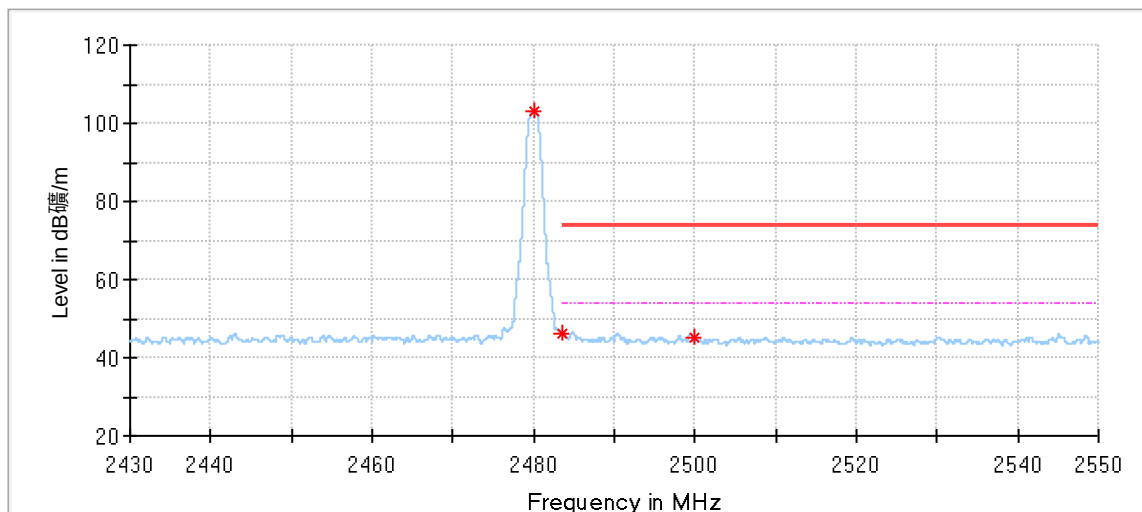


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.004000	103.14	---	---	150.0	V	59.0	-1.80
2483.508000	46.24	74.00	27.76	150.0	V	59.0	-1.85
2500.020000	44.96	74.00	29.04	150.0	V	83.0	-2.08

BLE_2Mbps _Low Channel:

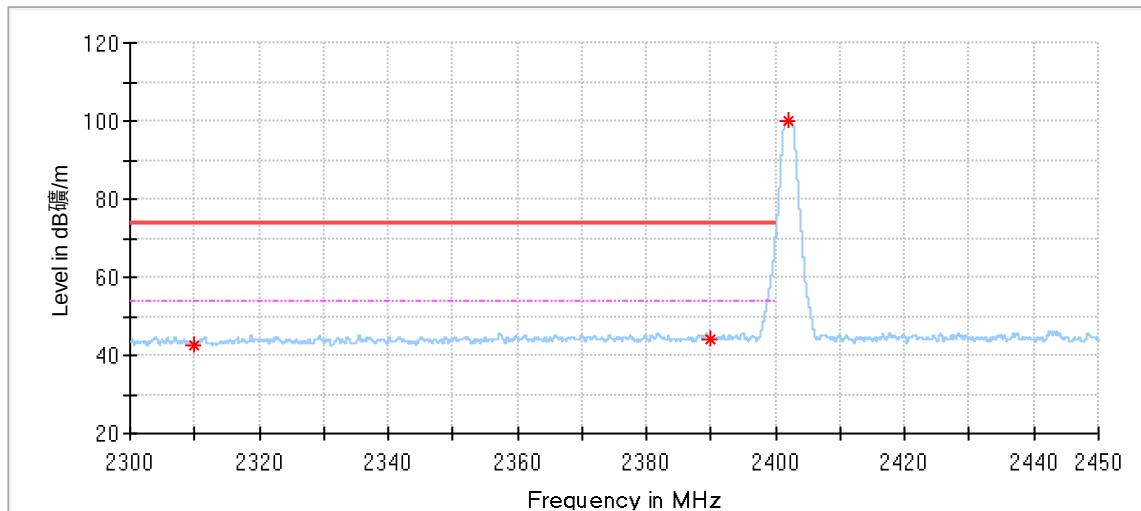


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2310.005000	42.62	74.00	31.38	150.0	H	56.0	-2.25
2390.000000	44.03	74.00	29.97	150.0	H	109.0	-1.74
2402.000000	100.24	---	---	150.0	H	257.0	-1.54

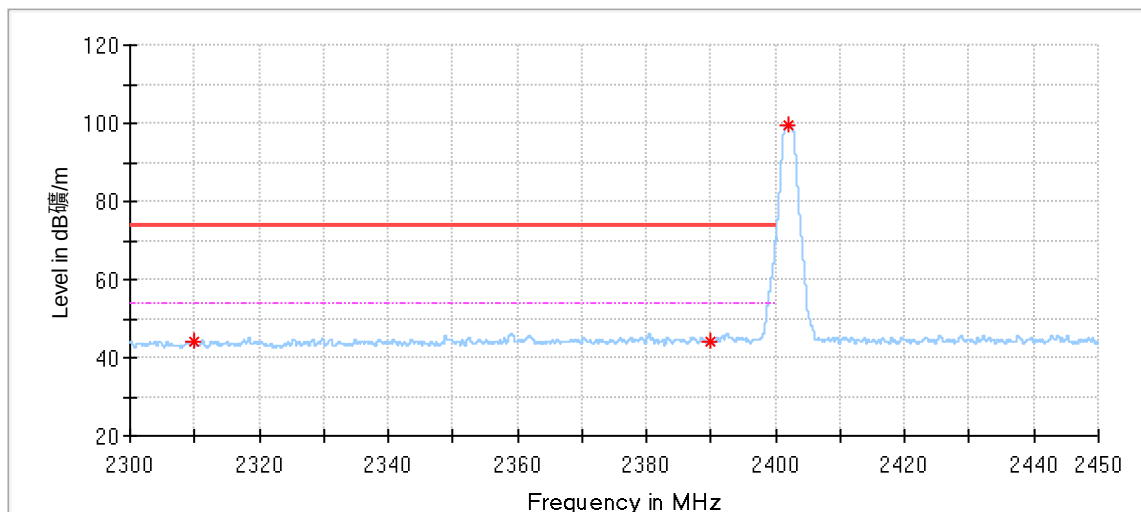


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2310.005000	44.02	74.00	29.98	150.0	V	317.0	-2.25
2390.000000	43.99	74.00	30.01	150.0	V	187.0	-1.74
2402.015000	99.66	---	---	150.0	V	317.0	-1.54

BLE_2Mbps_High Channel:

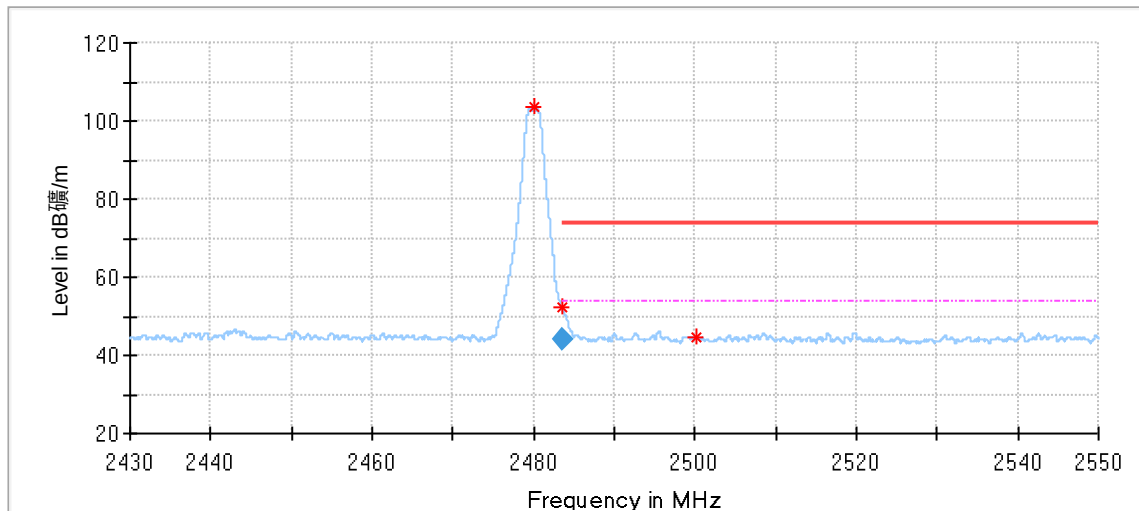

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.004000	103.54	---	---	150.0	H	139.0	-1.80
2483.508000	52.05	74.00	21.95	150.0	H	139.0	-1.85
2500.164000	44.71	74.00	29.29	150.0	H	322.0	-2.08
Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.508000	44.25	54.00	9.75	150.0	H	139.0	-1.85

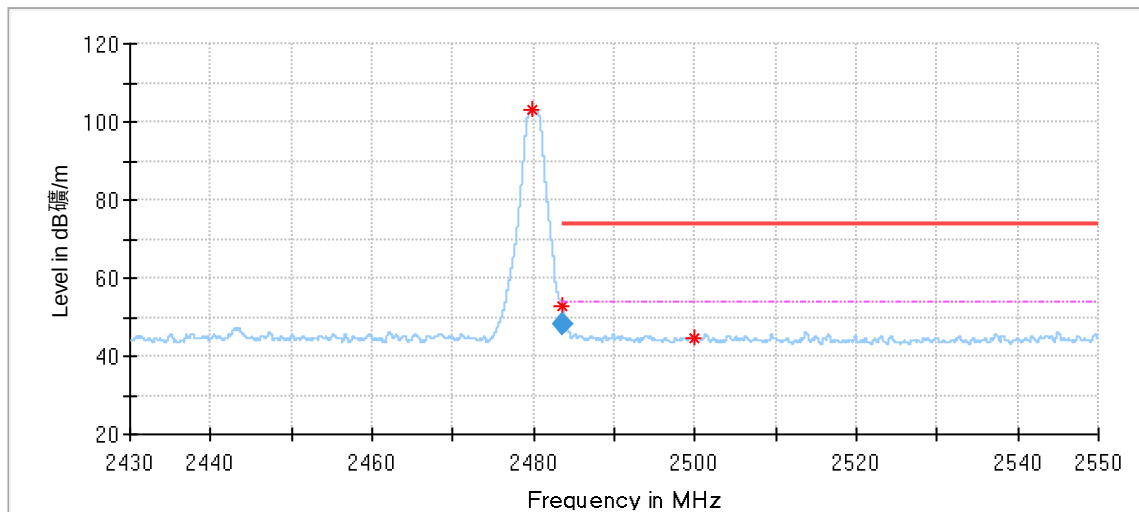

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.956000	103.05	---	---	150.0	V	55.0	-1.80
2483.508000	52.87	74.00	21.13	150.0	V	43.0	-1.85
2500.020000	44.56	74.00	29.44	150.0	V	129.0	-2.08

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.508000	48.02	54.00	5.98	150.0	V	43.0	-1.85

Remark:

- (1) Corrected Amplitude = Read level + Corrector factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Radiated Emission Test (9kHz-30MHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2025-5-13
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2025-7-24
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (30MHz-1GHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2025-5-13
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	68-4-80-14-002	707	1	2025-7-2
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-001	15542	1	2025-5-11
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A20	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (1GHz-18GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2025-4-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2025-5-11
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2025-5-11
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (18GHz-40GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2025-7-2
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2025-7-17
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Test System(FCC Part15 C/RSS-247)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2025-5-11
RF Meas. and Switch Matrix Unit	TST PASS	TSCB3023R2	68-4-93-23-001	2811685c	1	2025-5-11
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A21	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A22	----	----	----
Test software	TST PASS	TST PASS	68-4-93-23-001-A03	Version 2.0	N/A	N/A
Test software	Tonscend	JS1120-3	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.69dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 30MHz-1000MHz	Horizontal: 4.78dB; Vertical: 5.85dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.40dB; Vertical: 5.40dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 18GHz-40GHz	Horizontal: 5.29dB; Vertical: 5.29dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

---THE END OF REPORT---