

FCC Test Report

Applicant : **Anker Innovations Limited**

Address : **Unit 56, 8th Floor, Tower 2, Admiralty Centre,
18 Harcourt Road, Hong Kong**

Product Name : **A1722: Anker SOLIX C300 Portable Power
Station
A1723: Anker SOLIX C300X Portable Power
Station**

Report Date : **Aug. 02, 2024**

Shenzhen Anbotek Compliance Laboratory Limited



Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline
400-003-0500
www.anbotek.com.cn



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	8
1.4. Description of Test Configuration	8
1.5. Description of Test Setup	9
1.6. Test Equipment List	10
1.7. Measurement Uncertainty	11
1.8. Description of Test Facility	11
1.9. Disclaimer	12
2. Summary of Test Results	13
3. Conducted Emission Test	14
3.1. Test Standard and Limit	14
3.2. Test Setup	14
3.3. Test Procedure	14
3.4. Test Data	14
4. Radiation Spurious Emission and Band Edge Test	17
4.1. Test Standard and Limit	17
4.2. Test Setup	17
4.3. Test Procedure	18
4.4. Test Data	19
5. Maximum Conducted Output Power Test	29
5.1. Test Standard and Limit	29
5.2. Test Setup	29
5.3. Test Procedure	29
5.4. Test Data	29
6. 6dB Bandwidth and 99% Occupied Bandwidth Test	30
6.1. Test Standard and Limit	30
6.2. Test Setup	30
6.3. Test Procedure	30
6.4. Test Data	30
7. Maximum Power Spectral Density Test	31
7.1. Test Standard and Limit	31
7.2. Test Setup	31
7.3. Test Procedure	31



7.4. Test Data	31
8. Conducted Spurious Emission and Band Edge Test	32
8.1. Test Standard and Limit	32
8.2. Test Setup	32
8.3. Test Procedure	32
8.4. Test Data	32
9. Antenna Requirement	33
9.1. Test Standard and Requirement	33
9.2. Antenna Connected Construction	33
APPENDIX I -- TEST SETUP PHOTOGRAPH	34
APPENDIX II -- EXTERNAL PHOTOGRAPH	34
APPENDIX III -- INTERNAL PHOTOGRAPH	34



TEST REPORT

Applicant : Anker Innovations Limited
Manufacturer : Anker Innovations Limited
Product Name : A1722: Anker SOLIX C300 Portable Power Station
: A1723: Anker SOLIX C300X Portable Power Station
Model No. : A1722, A1723
Trade Mark : Anker SOLIX
Rating(s) : Please refer to page 7

Test Standard(s) : 47 CFR Part 15.247

Test Method(s) : ANSI C63.10: 2020, KDB 558074 D01 15.247 Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15.247 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

May 07, 2024

Date of Test

May 07 ~ Jun. 25, 2024

Prepared by

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Edward Pan

(Edward Pan)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotek.com.cn



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Aug. 02, 2024



1. General Information

1.1. Client Information

Applicant	:	Anker Innovations Limited
Address	:	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Manufacturer	:	Anker Innovations Limited
Address	:	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

1.2. Description of Device (EUT)

Product Name	:	A1722: Anker SOLIX C300 Portable Power Station A1723: Anker SOLIX C300X Portable Power Station
Model No.	:	A1722, A1723 (Note: All samples are the same except the model number, Product Name & appearance color, so we prepare "A1722" for test only.)
Trade Mark	:	Anker SOLIX
Test Power Supply	:	AC 120V, 60Hz/DC 19.2V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Mode	:	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40)
Operation Frequency	:	2412~2462MHz
Number of Channel	:	11 Channel for 20MHz bandwidth (2412~2462MHz) 7 channels for 40MHz bandwidth (2422~2452MHz)
Modulation Type	:	<input checked="" type="checkbox"/> 802.11b: DSSS (CCK, DQPSK, DBPSK) <input checked="" type="checkbox"/> 802.11g: OFDM (BPSK, QPSK, 16QAM, 64QAM) <input checked="" type="checkbox"/> 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	2.23dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



Rating(s):

Anker SOLIX C300 Portable Power Station

Model: A1722 Battery Pack Rated Capacity: 19.2VDC/15000mAh 288Wh
 DC Input: 11-28V=8.2A Max (100W Max) Car Charger Output: 12V=10A
 USB-C1 Output: 5V=3A USB-A Output: 5V=2.4A
 USB-C2 Output: 5V=3A / 9V=3A / 15V=3A / 20V=5A / 28V=5A (140W Max)
 USB-C2 Input: 9V=3A / 15V=3A / 20V=5A / 28V=5A (140W Max)
 USB-C3 Output: 5V=3A / 9V=3A / 15V=3A / 20V=5A / 28V=5A (140W Max)
 USB-A and USB-C1 Total Output: 5V=4A (20W Max)
 AC Input: 120V~ 3.2A Max, 60Hz AC Input Power (Charging): 330W Max
 AC Input Power (Bypass Mode): 380W Max
 AC Output (Inverter Mode): 120V~ 2.5A, 60Hz, 300W Max
 AC Output (Bypass Mode): 120V~ 2.5A Max, 60Hz, 300W Max
 Total output: 360W Discharging Temperature: -4°F-104°F / -20°C-40°C
 Charging Temperature: 32°F-104°F / 0°C-40°C
 Anker Innovations Limited | Made in China
 CAN ICES-003(B)/NMB-003(B) FCC ID:2AOKB-A1722 IC: 23451-A1722

The device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interferences received, including interference that may cause undesired operation.



Li-ion 32

WARNING: Do not overcharge the internal battery. See Instruction Manual. Do not smoke, strike a match, or cause a spark in the vicinity of the power pack. Only charge the internal battery in a well ventilated area. Risk of Electric Shock and Risk of Fire. This device is not to be stored in a vehicle.

CAUTION: Risk of Electric Shock. Do not remove cover. No user serviceable parts inside. Refer servicing to qualified service personnel. Risk of Injury To Persons. Do not use this product if the power cord or the battery cables are damaged in any way. This device is not intended for use in a commercial repair facility. Risk of Electric Shock. Connect only to properly grounded outlets.

DANGER: This device is intended to be used indoors only. Do not use outdoors.

AVERTISSEMENT: Ne pas surcharger la batterie interne. Consulter le manuel d'utilisation. Il ne faut pas fumer, allumer une allumette ou produire des étincelles à proximité du bloc d'alimentation. Charger la batterie uniquement dans un endroit bien aéré. Risque de choc électrique et risque d'incendie. Cet appareil ne doit pas être stocké dans un véhicule.

MISE EN GARDE: Risque de décharge électrique. Ne pas enlever le couvercle. Aucune des pièces à l'intérieur ne peut être réparée par l'utilisateur. L'entretien courant doit être effectué par un personnel d'entretien qualifié. Risque de blessure aux personnes. Ne pas utiliser ce produit si le cordon d'alimentation ou les câbles de batterie sont endommagés de quelque façon. Le dispositif n'est pas destiné à être utilisé dans un atelier de réparation commercial. Risque de décharge électrique. Brancher l'uni té uniquement à des prises de courant correctement mises à la masse. Risque de choc électrique. Se connecter uniquement aux prises correctement mises à la terre.

DANGER: Le dispositif est destiné à être utilisé à l'intérieur seulement. Ne pas l'utiliser à l'extérieur.

ALWAYS HERE TO HELP
<https://www.anker.com>



support@anker.com
 support.me@anker.com
 CED-CN@anker.com

(US/CA)+1 (800)988 7973 English only
 (États-Unis/Canada)+1 (800)988 7973 Anglais seulement
 (UK) +44(0)1604 936200
 (DE) +49(0)69 9579 7960
 (日本) 03 4455 7823

(AU)+61 3 8331 4800
 (中国)+86 400 0550 036
 (MEA) +971 42428633

Anker SOLIX C300X Portable Power Station

Model: A1723 Battery Pack Rated Capacity: 19.2VDC/15000mAh 288Wh
 DC Input: 11-28V=8.2A Max (100W Max) Car Charger Output: 12V=10A
 USB-C1 Output: 5V=3A USB-A Output: 5V=2.4A
 USB-C2 Output: 5V=3A / 9V=3A / 15V=3A / 20V=5A / 28V=5A (140W Max)
 USB-C2 Input: 9V=3A / 15V=3A / 20V=5A / 28V=5A (140W Max)
 USB-C3 Output: 5V=3A / 9V=3A / 15V=3A / 20V=5A / 28V=5A (140W Max)
 USB-A and USB-C1 Total Output: 5V=4A (20W Max)
 AC Input: 120V~ 3.2A Max, 60Hz AC Input Power (Charging): 330W Max
 AC Input Power (Bypass Mode): 380W Max
 AC Output (Inverter Mode): 120V~ 2.5A, 60Hz, 300W Max
 AC Output (Bypass Mode): 120V~ 2.5A Max, 60Hz, 300W Max
 Total output: 360W Discharging Temperature: -4°F-104°F / -20°C-40°C
 Charging Temperature: 32°F-104°F / 0°C-40°C
 Anker Innovations Limited | Made in China
 CAN ICES-003(B)/NMB-003(B) FCC ID:2AOKB-A1722 IC: 23451-A1722

The device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interferences received, including interference that may cause undesired operation.



Li-ion 32

WARNING: Do not overcharge the internal battery. See Instruction Manual. Do not smoke, strike a match, or cause a spark in the vicinity of the power pack. Only charge the internal battery in a well ventilated area. Risk of Electric Shock and Risk of Fire. This device is not to be stored in a vehicle.

CAUTION: Risk of Electric Shock. Do not remove cover. No user serviceable parts inside. Refer servicing to qualified service personnel. Risk of Injury To Persons. Do not use this product if the power cord or the battery cables are damaged in any way. This device is not intended for use in a commercial repair facility. Risk of Electric Shock. Connect only to properly grounded outlets.

DANGER: This device is intended to be used indoors only. Do not use outdoors.

AVERTISSEMENT: Ne pas surcharger la batterie interne. Consulter le manuel d'utilisation. Il ne faut pas fumer, allumer une allumette ou produire des étincelles à proximité du bloc d'alimentation. Charger la batterie uniquement dans un endroit bien aéré. Risque de choc électrique et risque d'incendie. Cet appareil ne doit pas être stocké dans un véhicule.

MISE EN GARDE: Risque de décharge électrique. Ne pas enlever le couvercle. Aucune des pièces à l'intérieur ne peut être réparée par l'utilisateur. L'entretien courant doit être effectué par un personnel d'entretien qualifié. Risque de blessure aux personnes. Ne pas utiliser ce produit si le cordon d'alimentation ou les câbles de batterie sont endommagés de quelque façon. Le dispositif n'est pas destiné à être utilisé dans un atelier de réparation commercial. Risque de décharge électrique. Brancher l'uni té uniquement à des prises de courant correctement mises à la masse. Risque de choc électrique. Se connecter uniquement aux prises correctement mises à la terre.

DANGER: Le dispositif est destiné à être utilisé à l'intérieur seulement. Ne pas l'utiliser à l'extérieur.

ALWAYS HERE TO HELP
<https://www.anker.com>



support@anker.com
 support.me@anker.com
 CED-CN@anker.com

(US/CA)+1 (800)988 7973 English only
 (États-Unis/Canada)+1 (800)988 7973 Anglais seulement
 (UK) +44(0)1604 936200
 (DE) +49(0)69 9579 7960
 (日本) 03 4455 7823

(AU)+61 3 8331 4800
 (中国)+86 400 0550 036
 (MEA) +971 42428633



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
--	--

1.4. Description of Test Configuration



Channel	Freq. (MHz)						
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. For 802.11b, 802.11g, and 802.11n(HT20) modes were test with channel 1, 6, 11.
For 802.11n(HT40) modes were test with channel 3, 6, 9.



1.5. Description of Test Setup

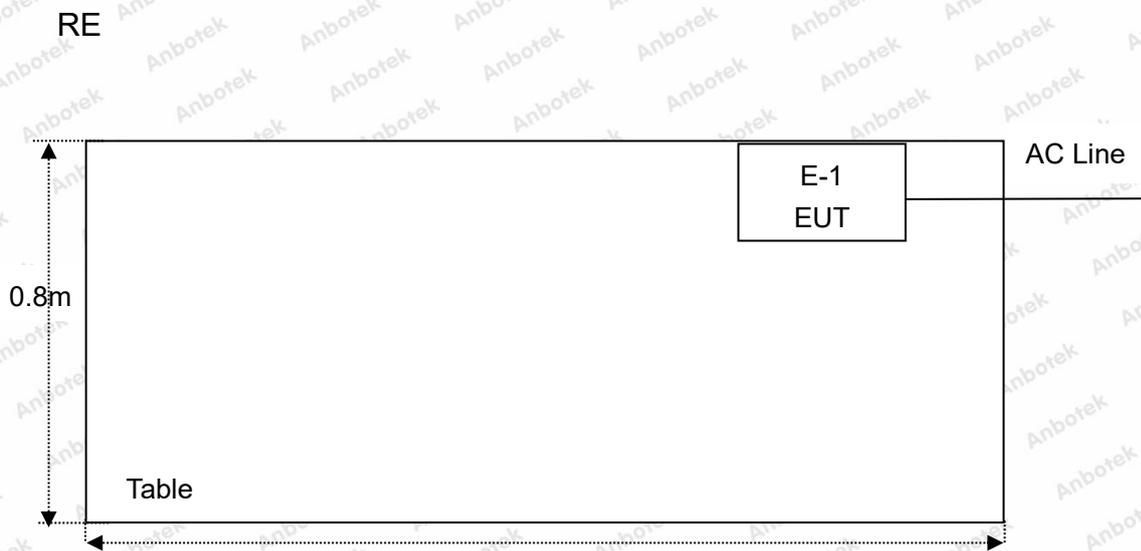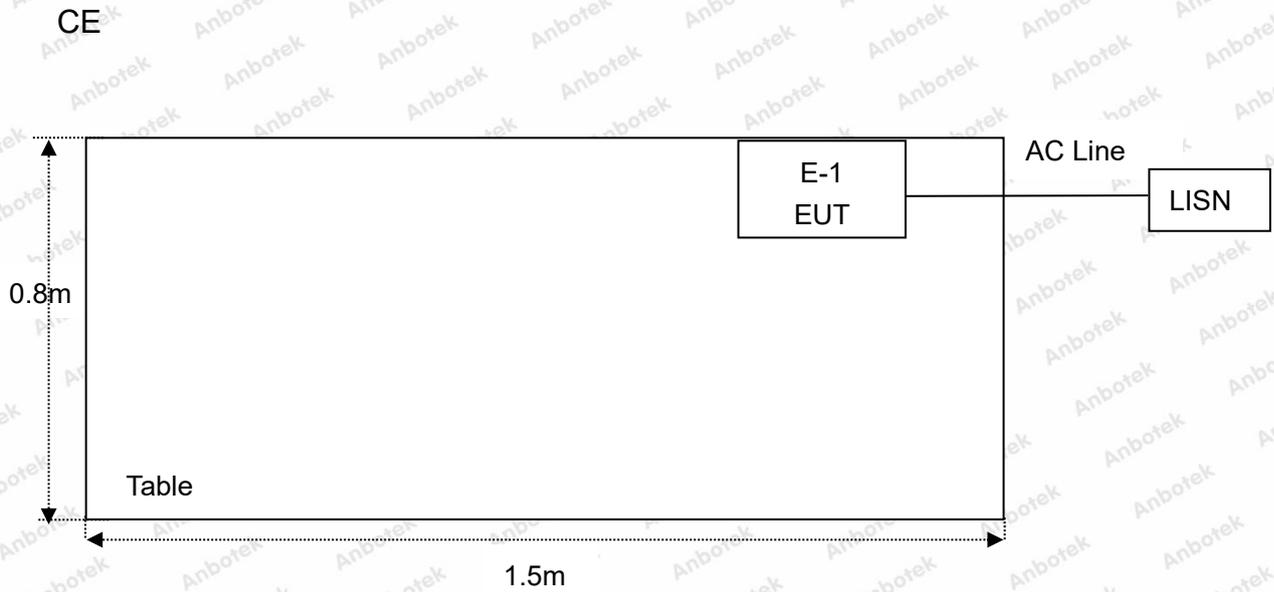

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Jan. 18, 2024	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jan. 18, 2024	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 12, 2023	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Jan. 17, 2024	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
8.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Oct. 16, 2022	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 12, 2023	1 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Oct. 12, 2023	1 Year
11.	Pre-amplifier	Schwarzbeck	BBV-9745	9745-075	Jan. 17, 2024	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 12, 2023	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 12, 2023	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 12, 2023	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 20, 2023	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 16, 2023	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	May. 06, 2024	1 Year

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotek.com.cn



1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Power Spectral Density	0.76dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.



1.9.Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Radiated Spurious Emission and Band Edge	PASS
15.247(b)(3)	Maximum Conduct Output Power	PASS
15.247(a)(2)	6dB Bandwidth	PASS
N/A	99% Occupied Bandwidth	Report only
15.247(e)	Maximum Power Spectral Density	PASS
15.247(d)	Conducted Spurious Emission and Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

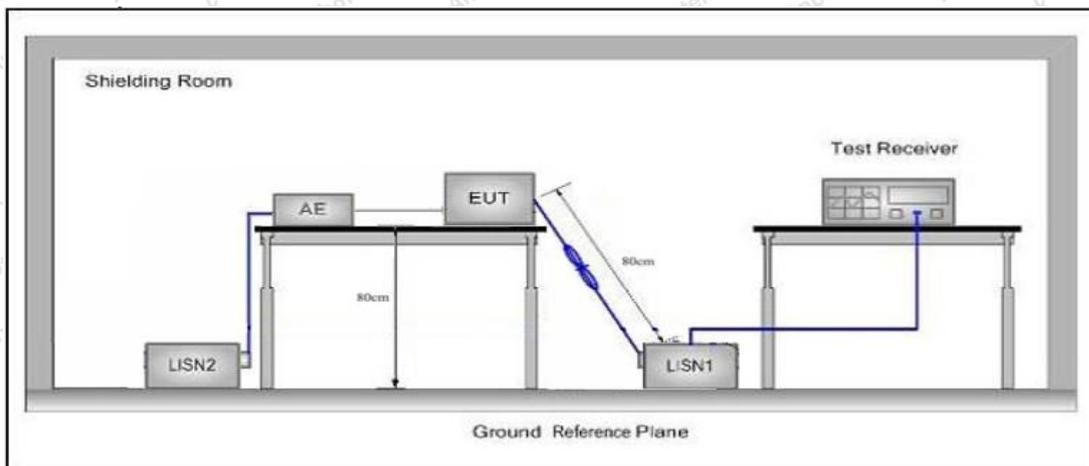

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11b 2462MHz
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Live Line
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

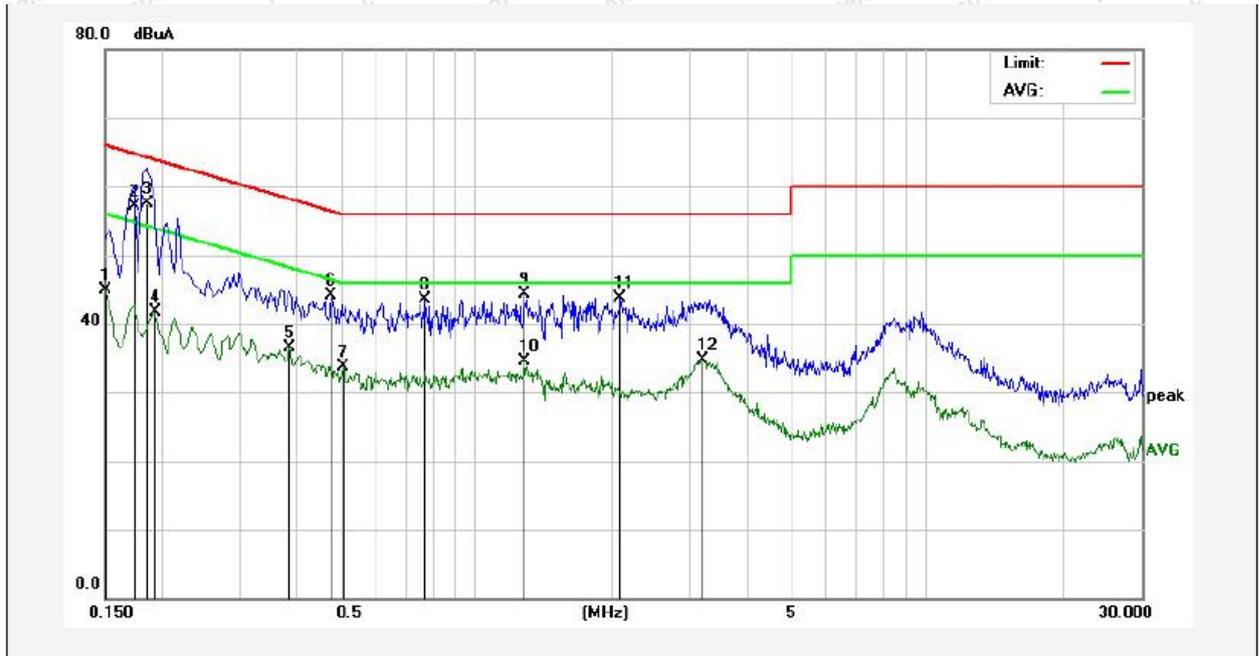


No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit (dBuA)	Over Limit (dB)	Detector	Remark
1	0.1500	27.08	17.82	44.90	55.99	-11.09	AVG	
2	0.1740	39.37	17.83	57.20	64.76	-7.56	QP	
3	0.1860	39.78	17.82	57.60	64.21	-6.61	QP	
4	0.1940	23.88	17.82	41.70	53.86	-12.16	AVG	
5	0.3860	18.71	17.81	36.52	48.15	-11.63	AVG	
6	0.4780	26.17	17.85	44.02	56.37	-12.35	QP	
7	0.5100	15.85	17.86	33.71	46.00	-12.29	AVG	
8	0.7740	25.70	17.87	43.57	56.00	-12.43	QP	
9	1.2780	26.54	17.86	44.40	56.00	-11.60	QP	
10	1.2780	16.56	17.86	34.42	46.00	-11.58	AVG	
11	2.0980	25.84	17.85	43.69	56.00	-12.31	QP	
12	3.2020	16.88	17.85	34.73	46.00	-11.27	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11b 2462MHz
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Neutral Line
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

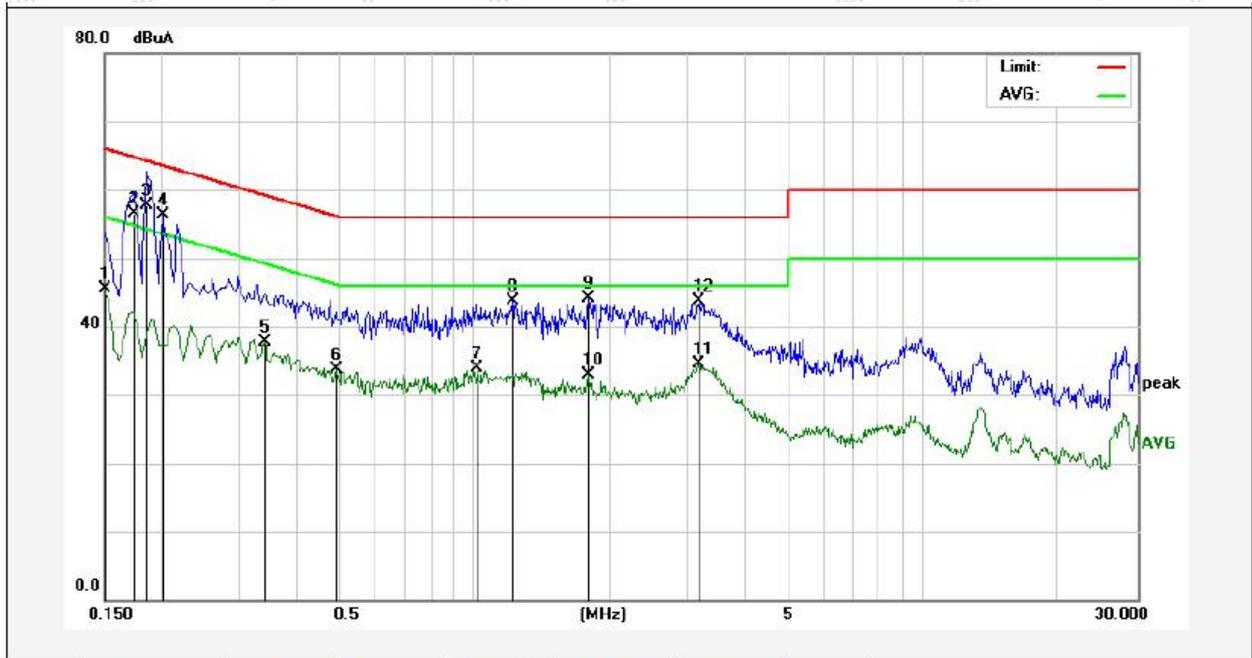

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit (dBuA)	Over Limit (dB)	Detector	Remark
1	0.1500	27.74	17.82	45.56	55.99	-10.43	AVG	
2	0.1740	38.77	17.83	56.60	64.76	-8.16	QP	
3	0.1860	39.98	17.82	57.80	64.21	-6.41	QP	
4	0.2020	38.42	17.82	56.24	63.52	-7.28	QP	
5	0.3420	19.90	17.83	37.73	49.15	-11.42	AVG	
6	0.4940	15.89	17.86	33.75	46.10	-12.35	AVG	
7	1.0180	16.03	17.86	33.89	46.00	-12.11	AVG	
8	1.2220	25.95	17.85	43.80	56.00	-12.20	QP	
9	1.7940	26.29	17.86	44.15	56.00	-11.85	QP	
10	1.7940	14.99	17.86	32.85	46.00	-13.15	AVG	
11	3.1540	16.68	17.85	34.53	46.00	-11.47	AVG	
12	3.1619	25.79	17.85	43.64	56.00	-12.36	QP	



4. Radiation Spurious Emission and Band Edge Test

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

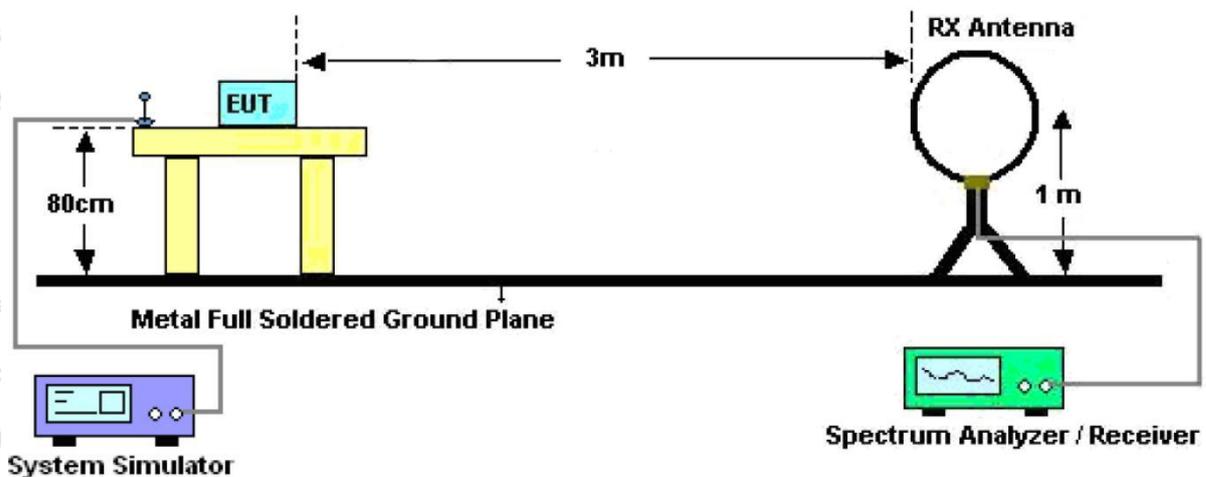


Figure 1. Below 30MHz



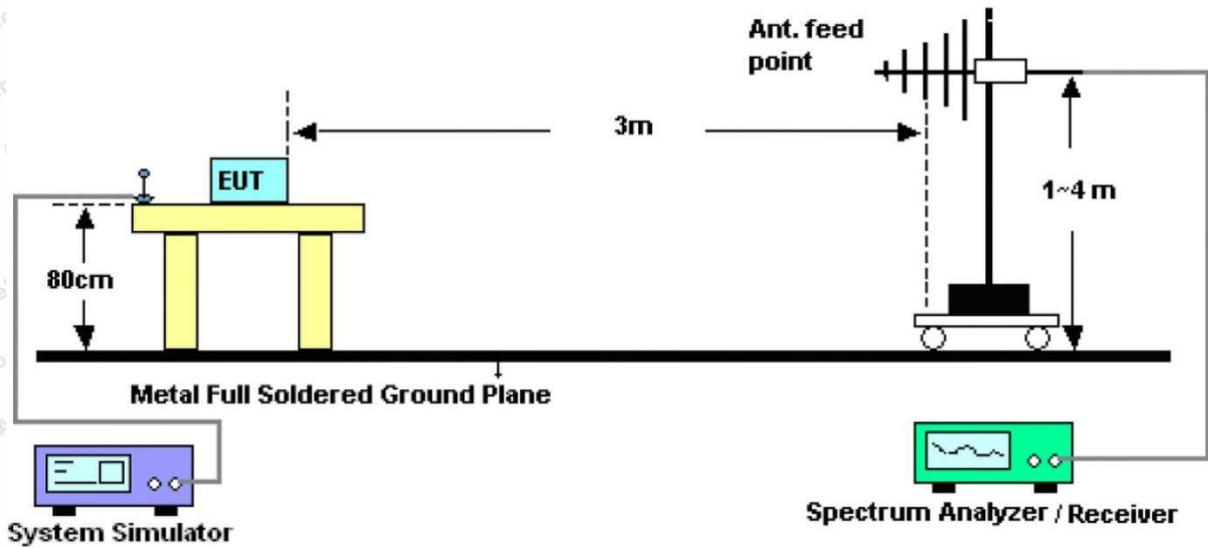


Figure 2. 30MHz to 1GHz

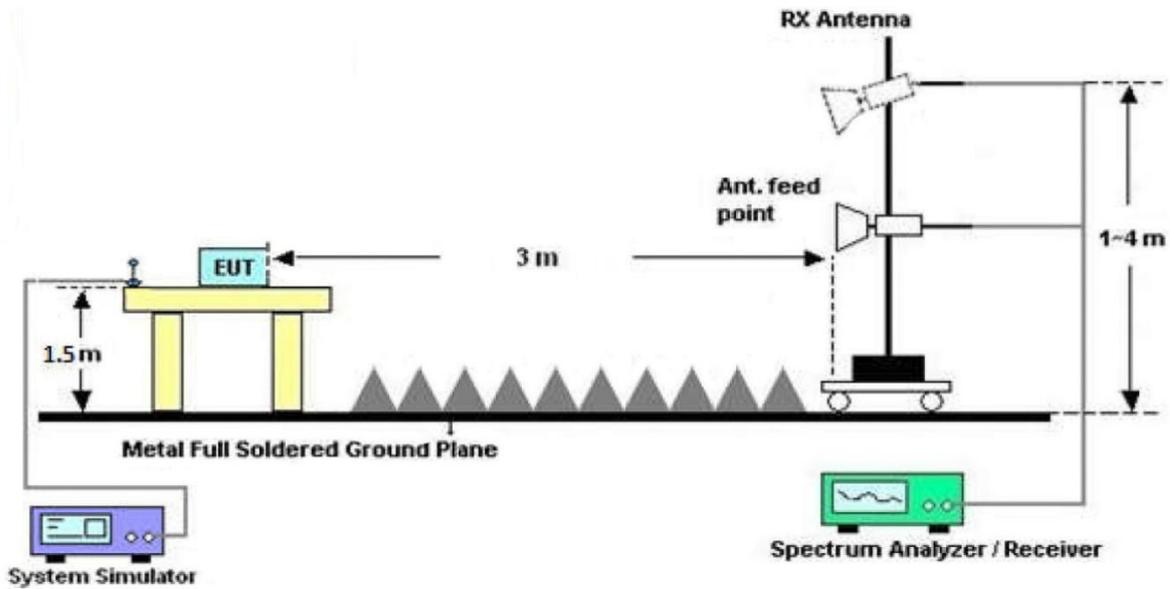


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement:

-VBW=10Hz, When duty cycle is no less than 98 percent

-VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.4 duty cycle.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: 802.11b 2462MHz
 Power Source: AC 120V, 60Hz
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

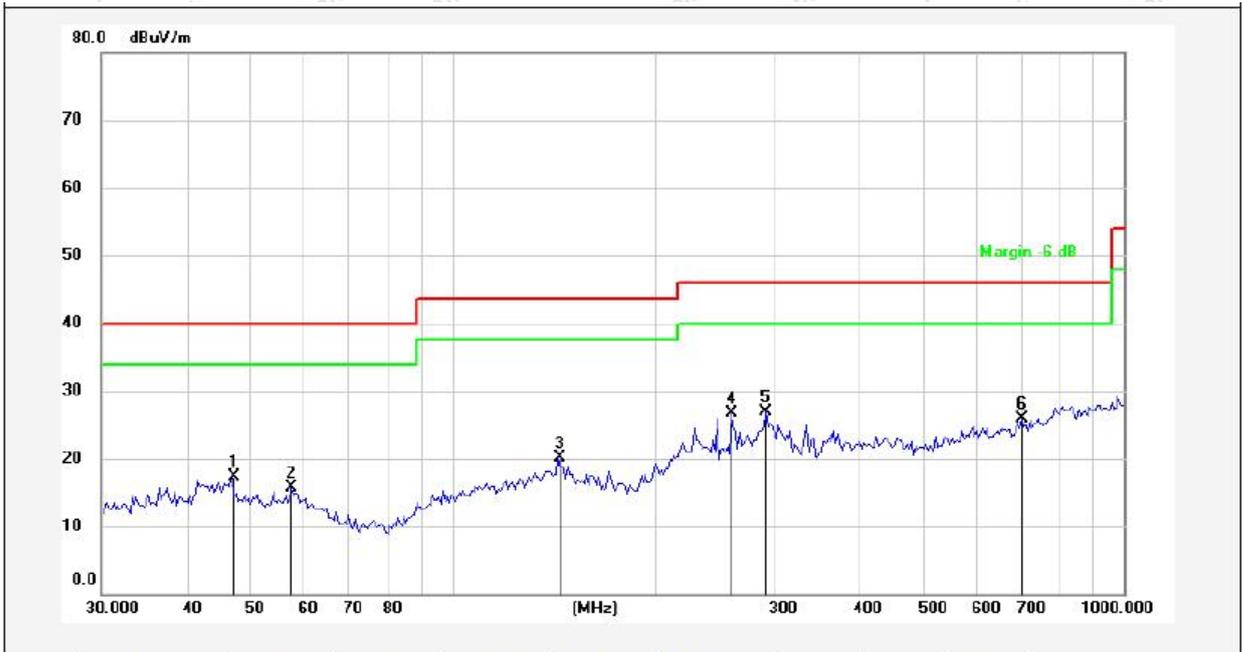

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	46.9948	34.53	-17.30	17.23	40.00	-22.77	QP			
2	57.5939	33.51	-17.80	15.71	40.00	-24.29	QP			
3	143.3261	41.78	-21.58	20.20	43.50	-23.30	QP			
4	260.1444	42.85	-16.20	26.65	46.00	-19.35	QP			
5	293.0842	42.34	-15.44	26.90	46.00	-19.10	QP			
6	704.2261	34.12	-8.20	25.92	46.00	-20.08	QP			



Test Results (30~1000MHz)

Test Mode: 802.11b 2462MHz
 Power Source: AC 120V, 60Hz
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 22.5°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.4371	38.61	-17.30	21.31	40.00	-18.69	QP			
2	64.4331	39.60	-19.68	19.92	40.00	-20.08	QP			
3	101.6443	38.08	-17.46	20.62	43.50	-22.88	QP			
4	133.6188	42.63	-21.31	21.32	43.50	-22.18	QP			
5	349.2500	39.88	-14.15	25.73	46.00	-20.27	QP			
6	478.8456	39.40	-11.63	27.77	46.00	-18.23	QP			



Test Results (Above 1000MHz)

Test Mode: 802.11b Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.05	15.31	44.36	74.00	-29.64	Vertical
7236.00	29.69	18.06	47.75	74.00	-26.25	Vertical
9648.00	30.85	23.77	54.62	74.00	-19.38	Vertical
12060.00	*			74.00		Vertical
14472.00	*			74.00		Vertical
4824.00	29.57	15.31	44.88	74.00	-29.12	Horizontal
7236.00	29.14	18.06	47.20	74.00	-26.80	Horizontal
9648.00	28.05	23.77	51.82	74.00	-22.18	Horizontal
12060.00	*			74.00		Horizontal
14472.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	20.14	15.31	35.45	54.00	-18.55	Vertical
7236.00	20.56	18.06	38.62	54.00	-15.38	Vertical
9648.00	21.10	23.77	44.87	54.00	-9.13	Vertical
12060.00	*			54.00		Vertical
14472.00	*			54.00		Vertical
4824.00	20.12	15.31	35.43	54.00	-18.57	Horizontal
7236.00	19.72	18.06	37.78	54.00	-16.22	Horizontal
9648.00	19.02	23.77	42.79	54.00	-11.21	Horizontal
12060.00	*			54.00		Horizontal
14472.00	*			54.00		Horizontal



Test Results (Above 1000MHz)

Test Mode: 802.11b Mode				Test channel: Middle		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	30.42	15.41	45.83	74.00	-28.17	Vertical
7311.00	29.88	18.01	47.89	74.00	-26.11	Vertical
9748.00	31.17	23.79	54.96	74.00	-19.04	Vertical
12185.00	*			74.00		Vertical
14622.00	*			74.00		Vertical
4874.00	30.56	15.41	45.97	74.00	-28.03	Horizontal
7311.00	31.71	18.01	49.72	74.00	-24.28	Horizontal
9748.00	31.49	23.79	55.28	74.00	-18.72	Horizontal
12185.00	*			74.00		Horizontal
14622.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	21.12	15.41	36.53	54.00	-17.47	Vertical
7311.00	19.78	18.01	37.79	54.00	-16.21	Vertical
9748.00	21.87	23.79	45.66	54.00	-8.34	Vertical
12185.00	*			54.00		Vertical
14622.00	*			54.00		Vertical
4874.00	20.46	15.41	35.87	54.00	-18.13	Horizontal
7311.00	21.11	18.01	39.12	54.00	-14.88	Horizontal
9748.00	21.39	23.79	45.18	54.00	-8.82	Horizontal
12185.00	*			54.00		Horizontal
14622.00	*			54.00		Horizontal



Test Results (Above 1000MHz)

Test Mode: 802.11b Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.59	15.51	44.10	74.00	-29.90	Vertical
7386.00	29.41	17.97	47.38	74.00	-26.62	Vertical
9848.00	31.14	23.82	54.96	74.00	-19.04	Vertical
12310.00	*			74.00		Vertical
14772.00	*			74.00		Vertical
4924.00	27.76	15.51	43.27	74.00	-30.73	Horizontal
7386.00	29.01	17.97	46.98	74.00	-27.02	Horizontal
9848.00	27.94	23.82	51.76	74.00	-22.24	Horizontal
12310.00	*			74.00		Horizontal
14772.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	19.52	15.51	35.03	54.00	-18.97	Vertical
7386.00	20.33	17.97	38.30	54.00	-15.70	Vertical
9848.00	21.65	23.82	45.47	54.00	-8.53	Vertical
12310.00	*			54.00		Vertical
14772.00	*			54.00		Vertical
4924.00	19.13	15.51	34.64	54.00	-19.36	Horizontal
7386.00	19.41	17.97	37.38	54.00	-16.62	Horizontal
9848.00	19.21	23.82	43.03	54.00	-10.97	Horizontal
12310.00	*			54.00		Horizontal
14772.00	*			54.00		Horizontal

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20),n(HT40) mode, and found the 802.11bmode is worse case , the report only record this mode.
2. Result=Reading + Factor
3. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:

Test Mode: 802.11b Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	41.29	9.58	50.87	74.00	-23.13	Horizontal
2390.00	42.22	9.73	51.95	74.00	-22.05	Horizontal
2310.00	43.11	9.58	52.69	74.00	-21.31	Vertical
2390.00	48.24	9.73	57.97	74.00	-16.03	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	32.05	9.58	41.63	54.00	-12.37	Horizontal
2390.00	39.52	9.73	49.25	54.00	-4.75	Horizontal
2310.00	32.15	9.58	41.73	54.00	-12.27	Vertical
2390.00	41.99	9.73	51.72	54.00	-2.28	Vertical

Test Mode: 802.11b Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	47.91	9.91	57.82	74.00	-16.18	Horizontal
2500.00	43.40	9.94	53.34	74.00	-20.66	Horizontal
2483.50	48.27	9.91	58.18	74.00	-15.82	Vertical
2500.00	43.31	9.94	53.25	74.00	-20.75	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	40.06	9.91	49.97	54.00	-4.03	Horizontal
2500.00	32.56	9.94	42.50	54.00	-11.50	Horizontal
2483.50	42.57	9.91	52.48	54.00	-1.52	Vertical
2500.00	32.17	9.94	42.11	54.00	-11.89	Vertical

Remark: 1. Result=Reading + Factor



Radiated Band Edge:

Test Mode: 802.11g Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.38	9.58	48.96	74.00	-25.04	Horizontal
2390.00	44.14	9.73	53.87	74.00	-20.13	Horizontal
2310.00	43.72	9.58	53.30	74.00	-20.70	Vertical
2390.00	48.36	9.73	58.09	74.00	-15.91	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	33.73	9.58	43.31	54.00	-10.69	Horizontal
2390.00	41.80	9.73	51.53	54.00	-2.47	Horizontal
2310.00	33.56	9.58	43.14	54.00	-10.86	Vertical
2390.00	38.22	9.73	47.95	54.00	-6.05	Vertical

Test Mode: 802.11g Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.06	9.91	57.97	74.00	-16.03	Horizontal
2500.00	43.89	9.94	53.83	74.00	-20.17	Horizontal
2483.50	48.31	9.91	58.22	74.00	-15.78	Vertical
2500.00	43.37	9.94	53.31	74.00	-20.69	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.23	9.91	48.14	54.00	-5.86	Horizontal
2500.00	31.66	9.94	41.60	54.00	-12.40	Horizontal
2483.50	41.52	9.91	51.43	54.00	-2.57	Vertical
2500.00	31.70	9.94	41.64	54.00	-12.36	Vertical

Remark: 1. Result=Reading + Factor



Radiated Band Edge:

Test Mode: 802.11n (HT20) Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.38	9.58	46.96	74.00	-27.04	Horizontal
2390.00	42.14	9.73	51.87	74.00	-22.13	Horizontal
2310.00	42.72	9.58	52.30	74.00	-21.70	Vertical
2390.00	46.36	9.73	56.09	74.00	-17.91	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	32.41	9.58	41.99	54.00	-12.01	Horizontal
2390.00	38.16	9.73	47.89	54.00	-6.11	Horizontal
2310.00	31.17	9.58	40.75	54.00	-13.25	Vertical
2390.00	36.22	9.73	45.95	54.00	-8.05	Vertical

Test Mode: 802.11n (HT20) Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.68	9.91	55.59	74.00	-18.41	Horizontal
2500.00	41.40	9.94	51.34	74.00	-22.66	Horizontal
2483.50	47.27	9.91	57.18	74.00	-16.82	Vertical
2500.00	43.31	9.94	53.25	74.00	-20.75	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.21	9.91	46.12	54.00	-7.88	Horizontal
2500.00	31.81	9.94	41.75	54.00	-12.25	Horizontal
2483.50	38.34	9.91	48.25	54.00	-5.75	Vertical
2500.00	31.84	9.94	41.78	54.00	-12.22	Vertical

Remark: 1. Result=Reading + Factor



Radiated Band Edge:

Test Mode: 802.11n (HT40) Mode				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.85	9.58	49.43	74.00	-24.57	Horizontal
2390.00	45.14	9.73	54.87	74.00	-19.13	Horizontal
2310.00	44.72	9.58	54.30	74.00	-19.70	Vertical
2390.00	48.57	9.73	58.30	74.00	-15.70	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	33.33	9.58	42.91	54.00	-11.09	Horizontal
2390.00	37.83	9.73	47.56	54.00	-6.44	Horizontal
2310.00	32.37	9.58	41.95	54.00	-12.05	Vertical
2390.00	35.62	9.73	45.35	54.00	-8.65	Vertical

Test Mode: 802.11n (HT40) Mode				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.59	9.91	55.50	74.00	-18.50	Horizontal
2500.00	42.08	9.94	52.02	74.00	-21.98	Horizontal
2483.50	47.40	9.91	57.31	74.00	-16.69	Vertical
2500.00	43.81	9.94	53.75	74.00	-20.25	Vertical
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.91	9.91	45.82	54.00	-8.18	Horizontal
2500.00	33.81	9.94	43.75	54.00	-10.25	Horizontal
2483.50	38.34	9.91	48.25	54.00	-5.75	Vertical
2500.00	32.84	9.94	42.78	54.00	-11.22	Vertical

Remark: 1. Result=Reading + Factor




5. Maximum Conducted Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	1W (30dBm)

5.2. Test Setup

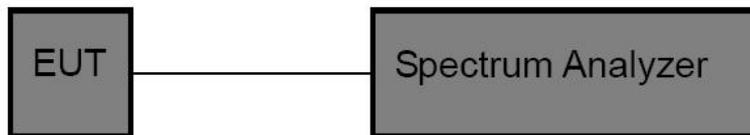

5.3. Test Procedure

1. Measure the duty cycle D of the transmitter output signal.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
4. Set VBW $\geq [3 \times \text{RBW}]$.
5. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
6. Sweep time = auto.
7. Detector = RMS
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
10. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Test for Duty Cycle.

Please refer to Appendix G of the Appendix Test Data.




6. 6dB Bandwidth and 99% Occupied Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	≥500kHz

6.2. Test Setup

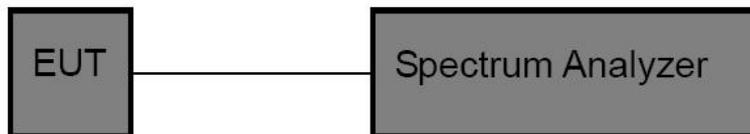

6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 - RBW= 100kHz, VBW≥3*RBW
 - Detector= Peak
 - Trace mode= Max hold.
 - Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass

Please refer to Appendix A&B of the Appendix Test Data.




7. Maximum Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section
Test Limit	8dBm/3KHz

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW} \geq 3 * \text{RBW}$, $\text{Span} = 1.5 * \text{DTS BW}$
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




8. Conducted Spurious Emission and Band Edge Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix E&F of the Appendix Test Data.



9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

9.2. Antenna Connected Construction

The antenna is a FPC antenna which permanently attached, and the best case gain of the antenna is 2.23dBi It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

