

# Anker SOLIX F3800 Portable Power Station

## What's in the Box

### Overview

PRODUCT OVERVIEW

LCD SCREEN GUIDE

### Recharging Your Power Station

AC RECHARGING (1800W MAX)

SOLAR PANEL RECHARGING (2400W MAX)

CAR RECHARGING (120W)

### Powering On / Off

### Powering Your Devices

AC CHARGING

USB CHARGING

CAR SOCKET CHARGING

### Uninterruptible Power Supply (UPS)

### Connect With an Expansion Battery

### Connect with Anker Home Power Panel

### Anker App for Smart Control

### Light

### Carry Your Power Station

### FAQ

### Specifications

## What's in the Box



Anker SOLIX F3800 Portable Power Station



AC Charging Cable




MC4 Solar Charging Cable



Important Safety Instructions


## Overview

Product Overview

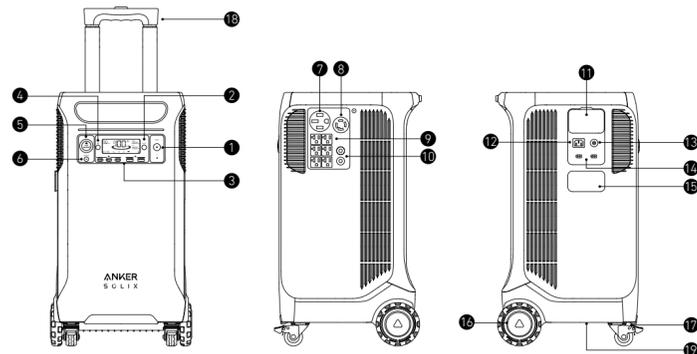

❶ On/Off Button	❷ Display Button
❸ USB Ports	❹ IoT Button
❺ Car Socket	❻ Car Socket Button
❼ NEMA 14-50 AC Output Port	❽ NEMA L14-30R AC Output Port
❾ NEMA 5-20R AC Output Port (Left three ports have UPS function)	❿ Overcharge Protection (AC Output)
⓫ Home Panel Power Port	⓬ AC Input Port
⓭ Overcharge Protection (AC Input)	⓮ Dual Solar Input and Car Input
⓯ Expansion Battery Port	⓰ Wheels
⓱ Wheel Brake	⓲ Retractable Handle (Press the button on the retractable handle and pull to extend)
⓳ Bottom Handle	

### LCD Screen Guide

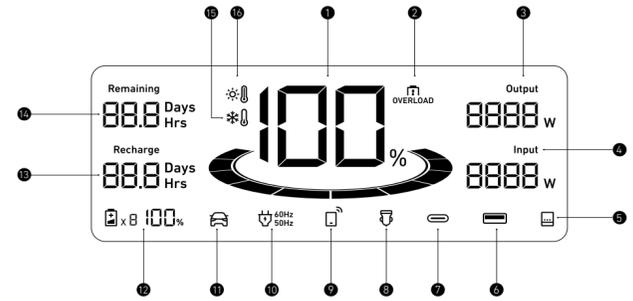


- ❶ Remaining Battery for Power Station
- ❷ Overload Warning  
This icon appears when a port is overloaded. The port will turn off to avoid any damage. Please remove the device causing overload.
- ❸ Current Output Power
- ❹ Current Input Power
- ❺ Whole-Home Power Mode
- ❻ USB-A Output Port
- ❼ USB-C Output Port
- ❽ Car Charging
- ❹ IoT  
Press the IoT button for 2 seconds and connect your devices through the app when this icon appears on the screen.
- ⓫ AC Charge and Voltage Frequency
- ⓬ Electrical Vehicle Charging
- ⓭ Remaining Battery for Expansion Battery  
When the expansion battery is connected successfully, this icon appears on the screen.
- ⓮ Estimated Time to Fully Recharge
- ⓯ Estimated Time for Battery to Deplete
- ⓰ Low-Temperature Alert  
When this icon shows, stop using the power station until the icon disappears.
- ⓱ High-Temperature Alert  
When this icon shows, stop using the power station and let it cool down until the icon disappears.

### Recharging Your Power Station

💡 When your portable power station only has 1% battery remaining, the "Remaining Battery" indicator will flicker to remind you to recharge.


#### AC Recharging (1800W Max)

Recharge your power station by connecting to a wall outlet with the AC charging cable.




#### Solar Panel Recharging (2400W Max)

Recharge your power station with a maximum solar input of 2400W.




### Car Recharging (120W)

Recharge your power station by connecting to a car's output port with the car charging cable (not included).



### Powering On / Off

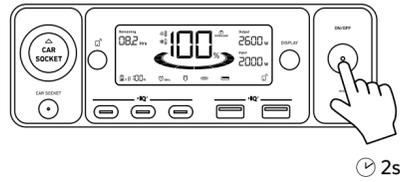

Press the ON/OFF button for 2 seconds to turn your power station on or off.


When the "Remaining Battery" indicator shows on the LCD screen, your power station is ready to charge devices.

- When powered on, press the ON/OFF button to turn the screen on or off.
- The screen will automatically turn off after 30 seconds of lighting up. The auto-off time can be set in the Anker app.
- The power station will power off automatically if the output buttons are turned off and no power loads are detected for 12 hours. The standby duration can be set in the Anker app.


### Powering Your Devices

#### AC Charging

Press the AC outlet button and connect your device to the AC output ports.

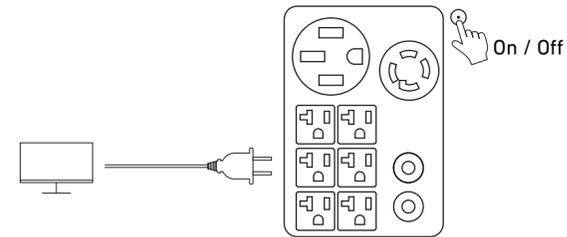


Double-click the AC outlet button, wait until the car icon appears on the screen, then connect your EV charge to the L14-30R or 14-50 AC output port.

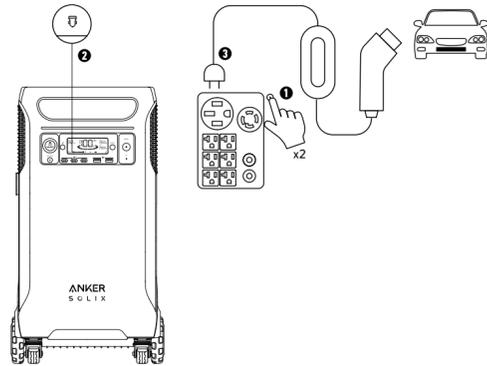


### USB Charging

Connect your devices to the USB ports.

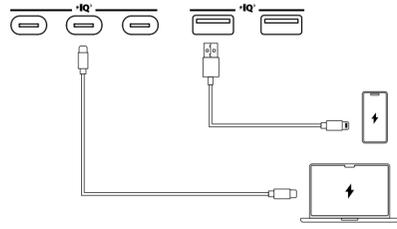


### Car Socket Charging

Turn on the car socket and connect your devices to start charging.

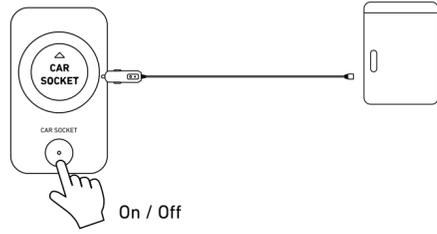


### Uninterruptible Power Supply (UPS)

To use the UPS feature, connect your power station to a wall outlet with the AC charging cable, then press the AC outlet button and connect your devices via the UPS AC output ports.

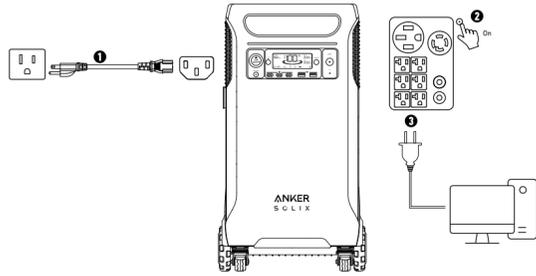


### Connect With an Expansion Battery

Your power station can be connected with expansion batteries to increase the capacity up to 26880Wh. Please refer to the user manual of Anker SOLIX BP3800 Expansion Battery for detailed instructions.

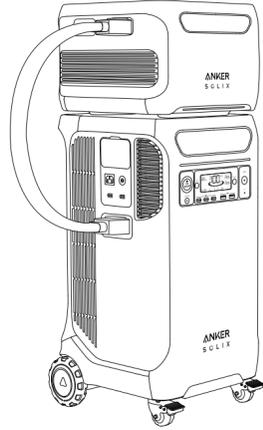

## Connect with Anker SOLIX Home Power Panel

Your power station can be connected with Anker SOLIX Home Power Panel to power your entire house. Please refer to the user manual of Anker SOLIX Home Power Panel for detailed instructions.

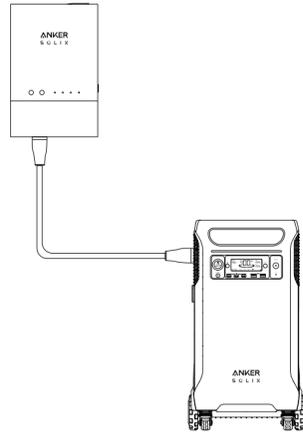

## Anker App for Smart Control

You can remotely control your power station using the Anker app.

1. Download the Anker app from the App Store (iOS devices) or Google Play (Android devices), or by scanning the QR code.




2. Connect the device to a network before using the app for the first time. After connecting successfully, you can connect your device off-grid.

3. **Firmware update:** You will be informed once a new firmware version is detected when you connect the power station to the app. During the update, ensure the power station is being charged and connected to Wi-Fi.

## Light

Turn ON/OFF the light on Anker App.

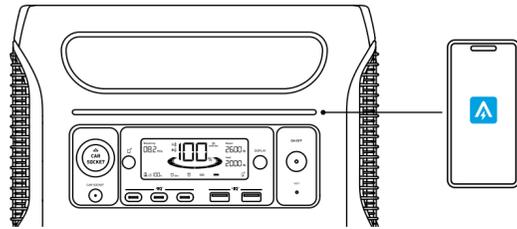


## Carry Your Power Station


1. Lay the power station flat.



2. Open the bottom folding handle.



3. Grab the bottom and top handles to lift the power station.

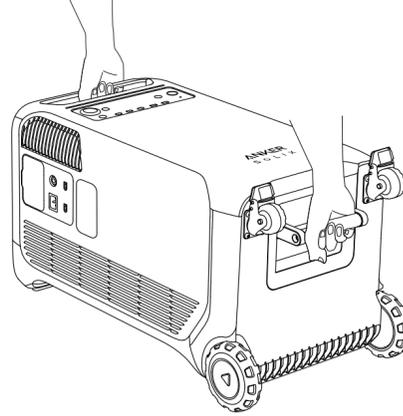


## FAQ

**Q1: What is the maximum power output of the AC output ports?**

The AC output ports can deliver a maximum of 6000W to connected devices. Each group of NEMA 20R AC Output Ports can deliver 2400W (120V/20A) of power.

**Q2: What should I do when the AC output port fails?**

If AC output does not work, check to see if the overcharge protection switch is switched on. If it is on, press down to reset and then continue working.



**Q3: What should I do when using a solar charger to charge my power station?**

The solar input supports an 11-60V solar charger with an XT-60 connector. If you use an 11-32V solar charger, the current supports 10A max. When you use a 32-60V solar charger, the current supports 25A max.

**Q4: Can the USB-C ports charge the power station (input only), or are they output only?**

The USB-C ports support output only.


**Q5: What should I do when AC recharging fails?**

If AC recharging does not work, check if the overload protection switch is turned on. If it is on, press down to reset and then continue recharging.



**Q6: How do I reset my power station?**

If your power station is not working correctly, insert a paper clip or pin into the reset hole for 1 second for a factory reset. If the power station still doesn't work, please contact support@anker.com.

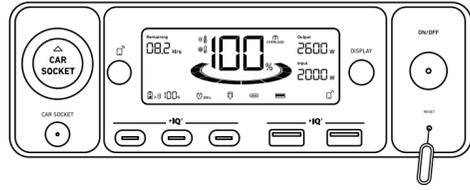**Q7: Why is the power station not working after it hasn't been used for a long time?**

If the power station is stored at a low capacity for a long time, lithium batteries will self-consume power which may lead to a quick discharge. This often leads to poor conductivity and a reduced battery lifespan that causes the battery not to work.

**Q8: How should I store and maintain the power station?**

When storing your power station, please make sure that you:

- 1) Turn off the main power button.
- 2) Store the power station in a dry and cool environment.
- 3) Check the remaining battery capacity each week. If the battery level is below 30%, fully charge the power station. Do not forget to charge it to 100% once every 3 months.

## Specifications

<b>Battery Type</b>	LiFePO4 Cell
<b>Cell Part Number</b>	32140FS-15000mAh
<b>Cell Number</b>	80
<b>Cell Capacity</b>	51.2Vdc 75Ah/3840Wh
<b>AC Input</b>	120V~ 15A (3 hours Max), 12A (continue), 60Hz L+N+PE
<b>AC Input Power (Charging)</b>	1800W Max
<b>AC Input Power (Bypass Mode)</b>	1440W Max
<b>Solar Panel Input</b>	11-32V = 10A; 32V-60V = 25A (1200W Max Each)
<b>Car Charger Output</b>	12V = 10A
<b>Home Panel Power Port</b>	3800W Max (AC Input), 6000W Max (AC Output), 120V/240V, L1+L2+N+PE
<b>AC Output Power (Total)</b>	6000W Max
<b>AC Output 1</b>	120V~ 20A Max, 60Hz, 2400W Max
<b>AC Output 2</b>	120V~ 20A Max, 60Hz, 2400W Max
<b>AC Output (NEMA 14-50 / L14-30)</b>	120V/240V~ 25A Max, 60Hz, 6000W Max
<b>USB-A Output</b>	5V = 2.4A (12W Max Per Port)
<b>USB-C Output</b>	5V = 3A / 9V = 3A / 15V = 3A / 20V = 3A / 20V = 5A (100W Max Per Port)
<b>UPS</b>	20ms
<b>Discharging Temperature</b>	-4°F-104°F / -20°C-40°C
<b>Charging Temperature</b>	32°F-104°F / 0°C-40°C
<b>Size</b>	27.6×15.3×15.6 in / 70.2×38.8×39.5 cm
<b>Net Weight</b>	60 kg / 132.2 lbs