

# FCC TEST REPORT

For

Anker Innovations Limited

PowerWave Evo Pad

Model No.: A2515

Prepared For : Anker Innovations Limited  
Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,  
Hong Kong

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei  
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,  
China.518102  
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180608002-01

Date of Test : Jun. 08~Jul. 03, 2018

Date of Report : Jul. 03, 2018

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	23
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	25
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28

# TEST REPORT

Applicant : Anker Innovations Limited  
Manufacturer : Anker Innovations Limited  
Product Name : PowerWave Evo Pad  
Model No. : A2515  
Trade Mark :   
Rating(s) : Input: DC 12V, 1.5A  
Output: DC 5V, 1A / DC 9V, 1.1A


**Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.209**  
**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test Jun. 08~Jul. 03, 2018

Prepared by



(Engineer / Oliay Yang)

Reviewer



(Supervisor / Calvin Liu)

Approved & Authorized Signer



(Manager / Tom Chen)

# 1. General Information

## 1.1. Client Information

Applicant	:	Anker Innovations Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer	:	Anker Innovations Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

## 1.2. Description of Device (EUT)

Product Name	:	PowerWave Evo Pad	
Model No.	:	A2515	
Test Sample No.	:	S1, S2	
Trade Mark	:		
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Product Description	:	Operation Frequency:	110-205KHz
		Number of Channel:	20 Channels
		Modulation Type:	MSK
		Antenna Type:	Loop Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

## 1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: A2013 Input: 100-240V 50-60Hz 0.7A Output: 3.6-6.5V=== 3A/ 6.5-9V=== 2A/ 9-12V=== 1.5A
Mobile Phone	:	Manufacturer: SAMSUNG M/N: SM-G9550 S/N: R28J636WJ1B CE, FCC, DOC

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH20
Mode 4	Keeping TX+Charging mode



For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX+Charging mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH20
Mode 4	Keeping TX+Charging mode

### 1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	0.110	6	0.135	11	0.160	16	0.185
2	0.115	7	0.140	12	0.165	17	0.190
3	0.120	8	0.145	13	0.170	18	0.195
4	0.125	9	0.150	14	0.175	19	0.200
5	0.130	10	0.155	15	0.180	20	0.205

### 1.6. Description Of Test Setup

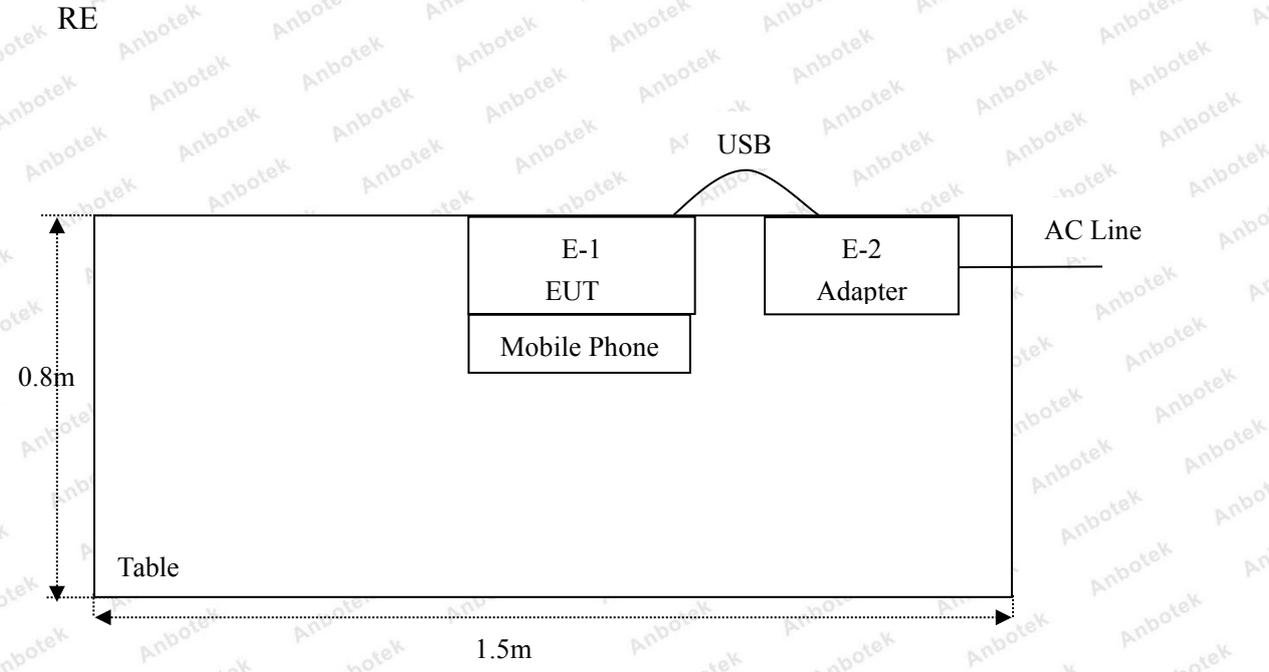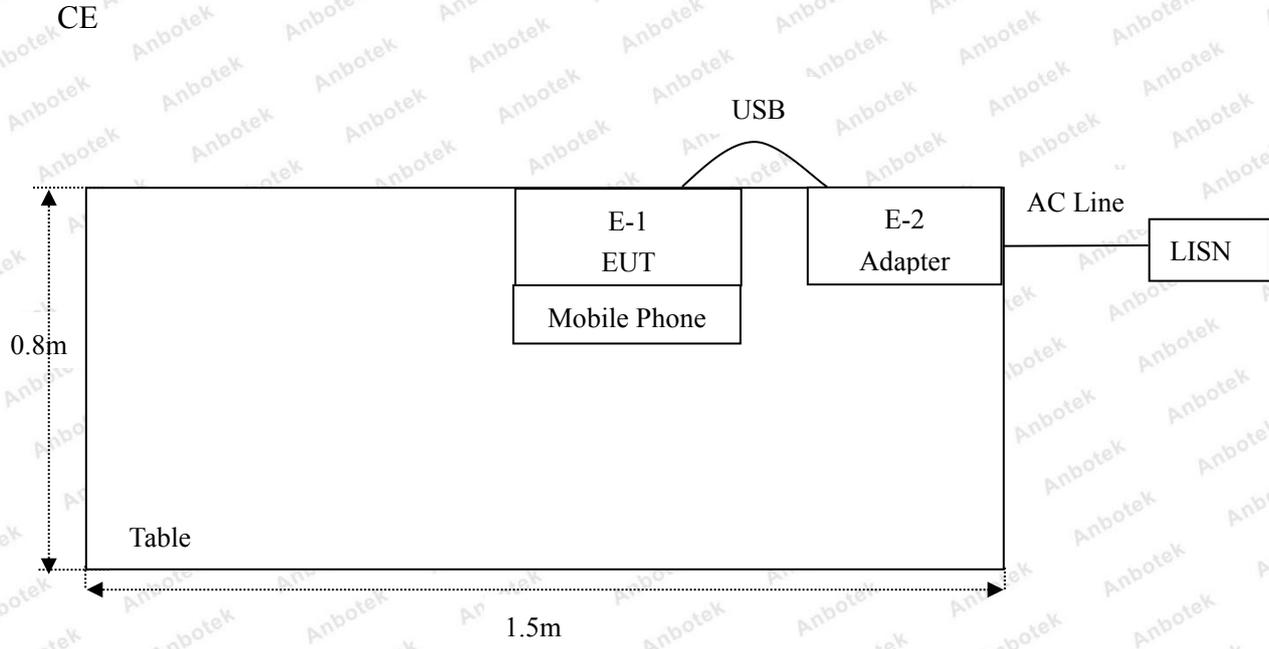

### 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80B	ZJ-17042804	Nov. 01, 2017	1 Year

### 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

#### ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

#### Test Location

All Emissions tests were performed at Shenzhen Anbotek Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results


Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS

### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
<b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

#### 3.2. Test Setup

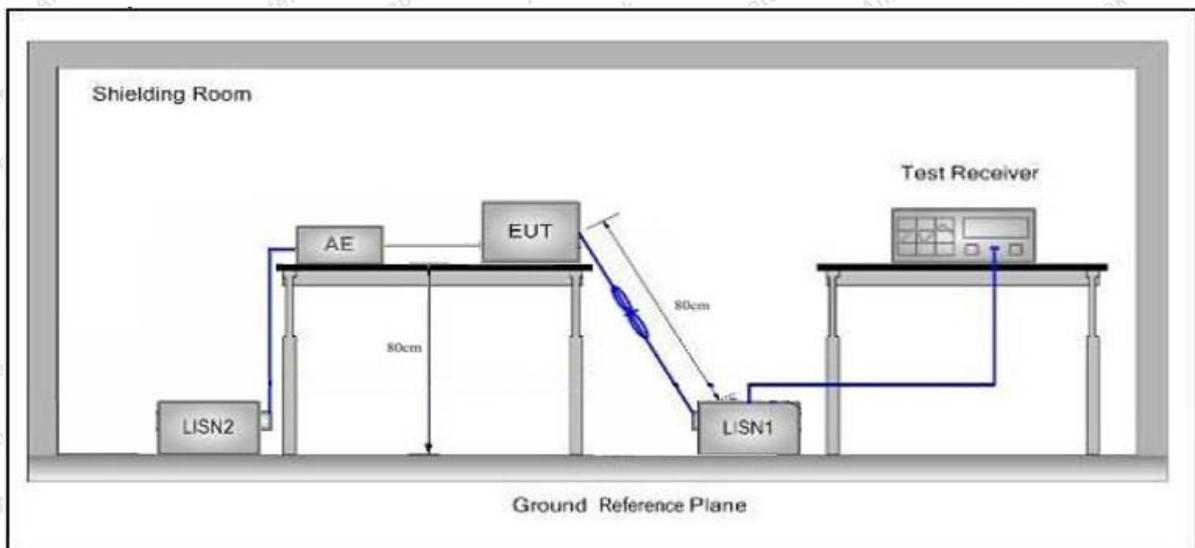

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

**Conducted Emission Test Data**


Test Site: I# Shielded Room  
 Operating Condition: Keeping TX+Charging mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.7°C Hum.: 51%

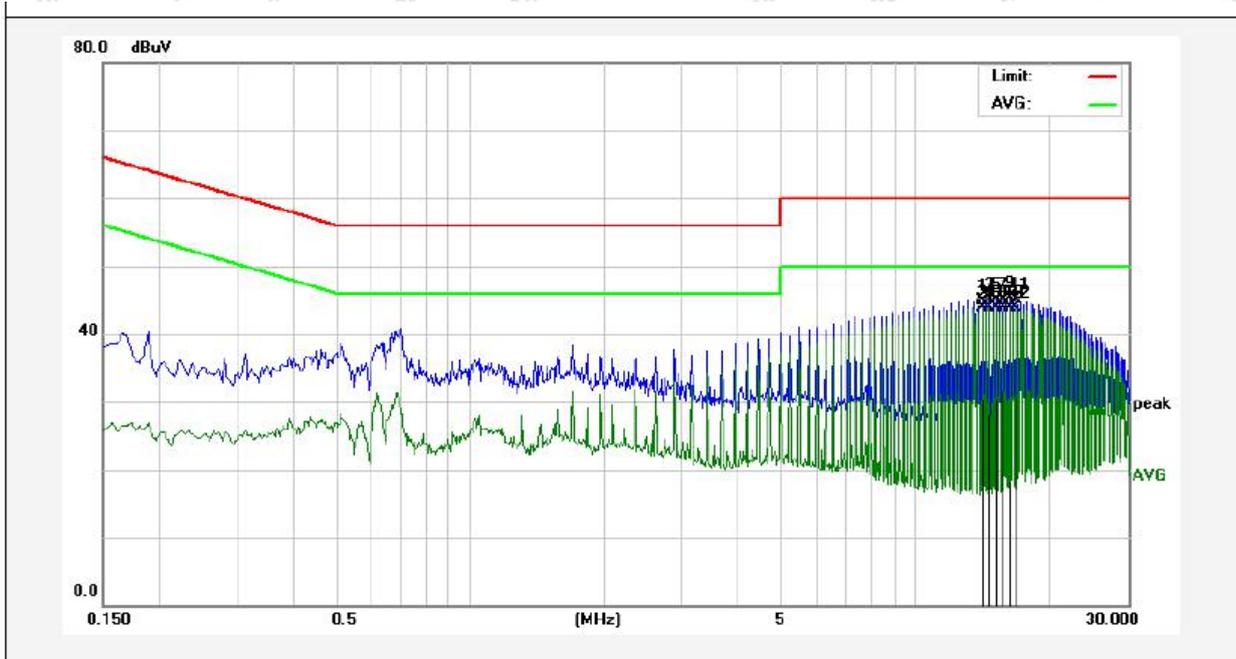

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	14.1460	24.68	20.27	44.95	60.00	-15.05	QP	
2	14.1460	23.55	20.27	43.82	50.00	-6.18	AVG	
3	14.6700	24.83	20.27	45.10	60.00	-14.90	QP	
4	14.6700	23.54	20.27	43.81	50.00	-6.19	AVG	
5	15.1940	24.88	20.26	45.14	60.00	-14.86	QP	
6	15.1940	23.70	20.26	43.96	50.00	-6.04	AVG	
7	15.7180	24.81	20.27	45.08	60.00	-14.92	QP	
8	15.7180	23.64	20.27	43.91	50.00	-6.09	AVG	
9	16.2420	24.95	20.28	45.23	60.00	-14.77	QP	
10	16.2420	23.71	20.28	43.99	50.00	-6.01	AVG	
11	16.7660	24.79	20.29	45.08	60.00	-14.92	QP	
12	16.7660	23.61	20.29	43.90	50.00	-6.10	AVG	

**Conducted Emission Test Data**


Test Site: I# Shielded Room  
 Operating Condition: Keeping TX+Charging mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.7°C Hum.: 51%

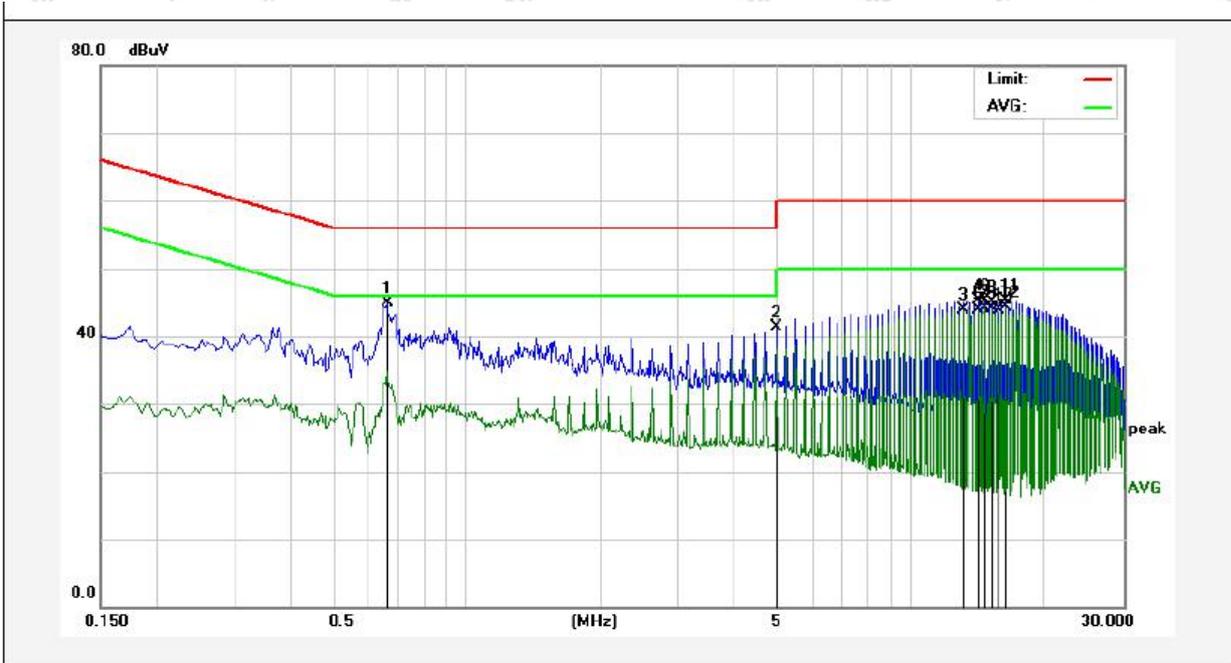

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6620	24.88	20.03	44.91	56.00	-11.09	QP	
2	4.9780	21.01	20.21	41.22	56.00	-14.78	QP	
3	13.0980	23.67	20.29	43.96	50.00	-6.04	AVG	
4	14.1460	25.02	20.27	45.29	60.00	-14.71	QP	
5	14.1460	23.71	20.27	43.98	50.00	-6.02	AVG	
6	14.6700	24.96	20.27	45.23	60.00	-14.77	QP	
7	14.6700	23.74	20.27	44.01	50.00	-5.99	AVG	
8	15.1940	24.94	20.26	45.20	60.00	-14.80	QP	
9	15.1940	23.83	20.26	44.09	50.00	-5.91	AVG	
10	15.7180	23.71	20.27	43.98	50.00	-6.02	AVG	
11	16.2420	25.11	20.28	45.39	60.00	-14.61	QP	
12	16.2420	23.94	20.28	44.22	50.00	-5.78	AVG	

**Conducted Emission Test Data**


Test Site: I# Shielded Room  
 Operating Condition: Keeping TX+Charging mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.7°C Hum.: 51%

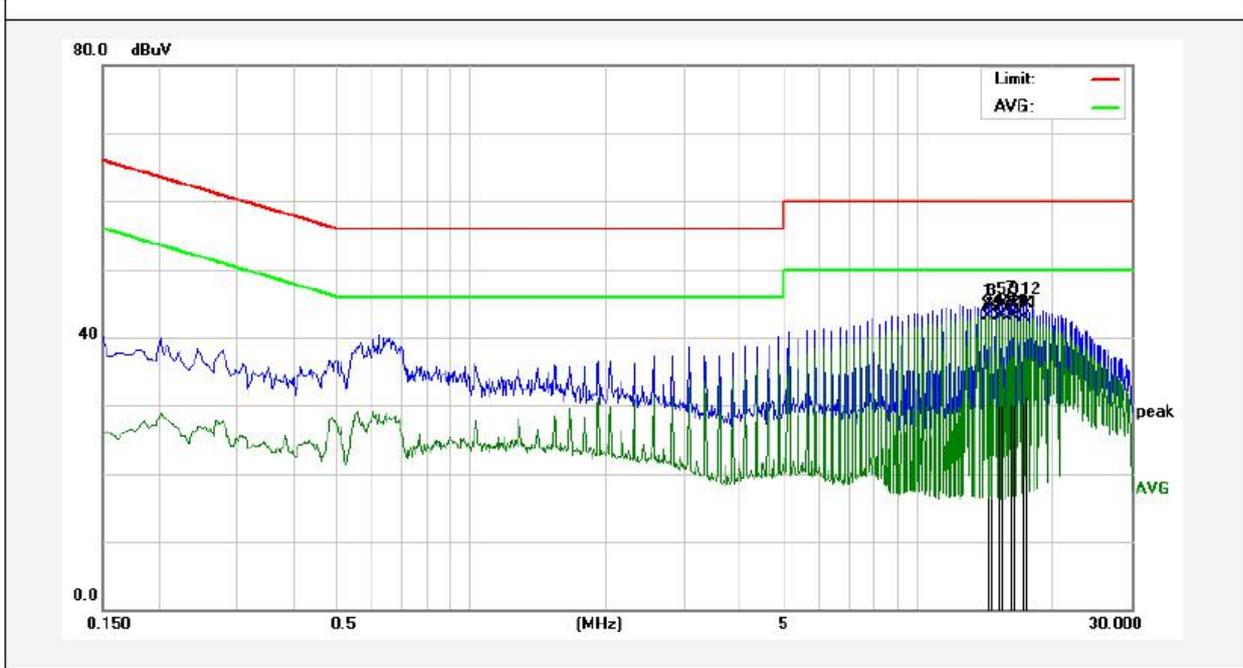

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	14.3980	24.53	20.27	44.80	60.00	-15.20	QP	
2	14.3980	22.83	20.27	43.10	50.00	-6.90	AVG	
3	14.6540	24.49	20.27	44.76	60.00	-15.24	QP	
4	15.1700	22.79	20.26	43.05	50.00	-6.95	AVG	
5	15.4260	24.60	20.27	44.87	60.00	-15.13	QP	
6	15.4260	23.10	20.27	43.37	50.00	-6.63	AVG	
7	16.1980	24.76	20.28	45.04	60.00	-14.96	QP	
8	16.1980	23.02	20.28	43.30	50.00	-6.70	AVG	
9	16.4540	24.58	20.28	44.86	60.00	-15.14	QP	
10	16.4540	22.74	20.28	43.02	50.00	-6.98	AVG	
11	17.2260	22.68	20.30	42.98	50.00	-7.02	AVG	
12	17.4820	24.57	20.30	44.87	60.00	-15.13	QP	

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Keeping TX+Charging mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.7°C Hum.: 51%

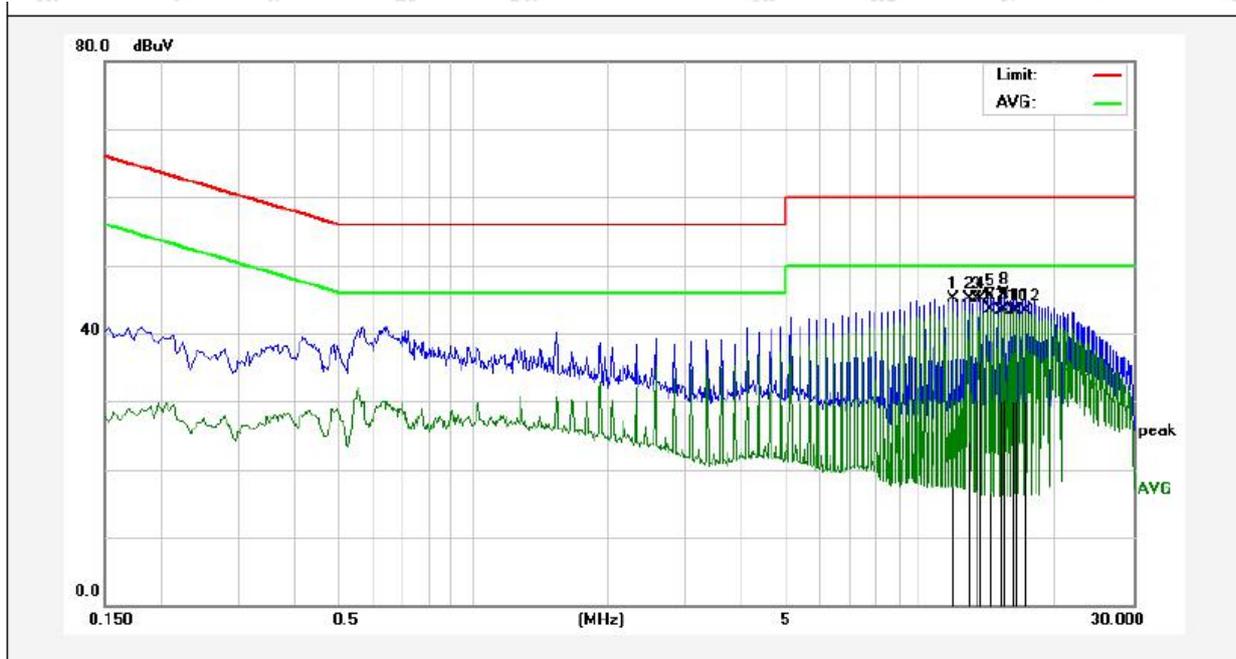

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	11.8260	24.83	20.31	45.14	60.00	-14.86	QP	
2	12.8540	24.80	20.29	45.09	60.00	-14.91	QP	
3	13.3700	24.75	20.29	45.04	60.00	-14.96	QP	
4	13.6260	24.75	20.28	45.03	60.00	-14.97	QP	
5	14.3980	25.18	20.27	45.45	60.00	-14.55	QP	
6	14.3980	23.25	20.27	43.52	50.00	-6.48	AVG	
7	15.1700	23.10	20.26	43.36	50.00	-6.64	AVG	
8	15.4260	25.39	20.27	45.66	60.00	-14.34	peak	
9	15.4260	23.29	20.27	43.56	50.00	-6.44	AVG	
10	16.1980	23.07	20.28	43.35	50.00	-6.65	AVG	
11	16.4540	23.01	20.28	43.29	50.00	-6.71	AVG	
12	17.2260	23.00	20.30	43.30	50.00	-6.70	AVG	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	-	74.0	Peak

**Remark:**

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

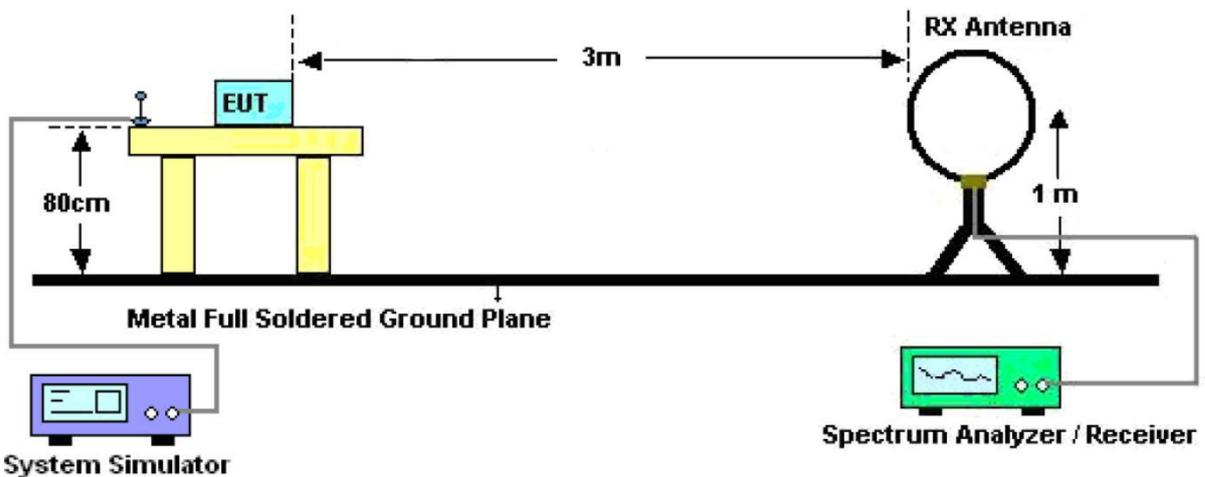


Figure 1. Below 30MHz

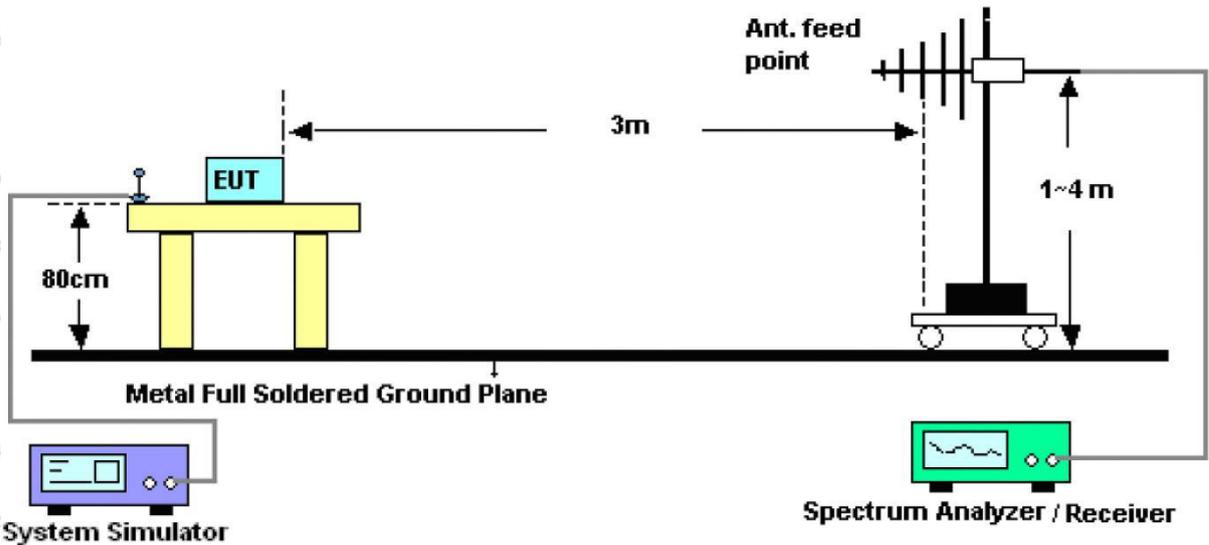


Figure 2. 30MHz to 1GHz

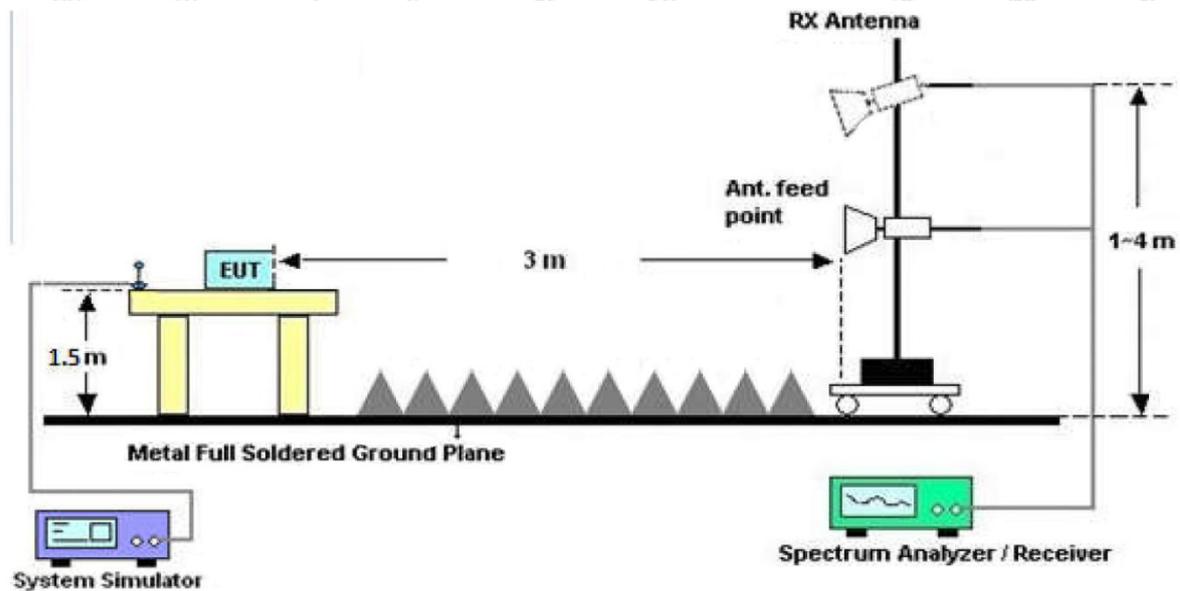


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


#### 4.4. Test Data

**PASS**

**Test Results**

(Between 9KHz – 30MHz)

<b>Job No.:</b>	<b>SZAWW180608002-01</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.4(C)/50%RH</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Distance:</b>	<b>3m</b>
<b>Test Mode:</b>	<b>Mode 4</b>		

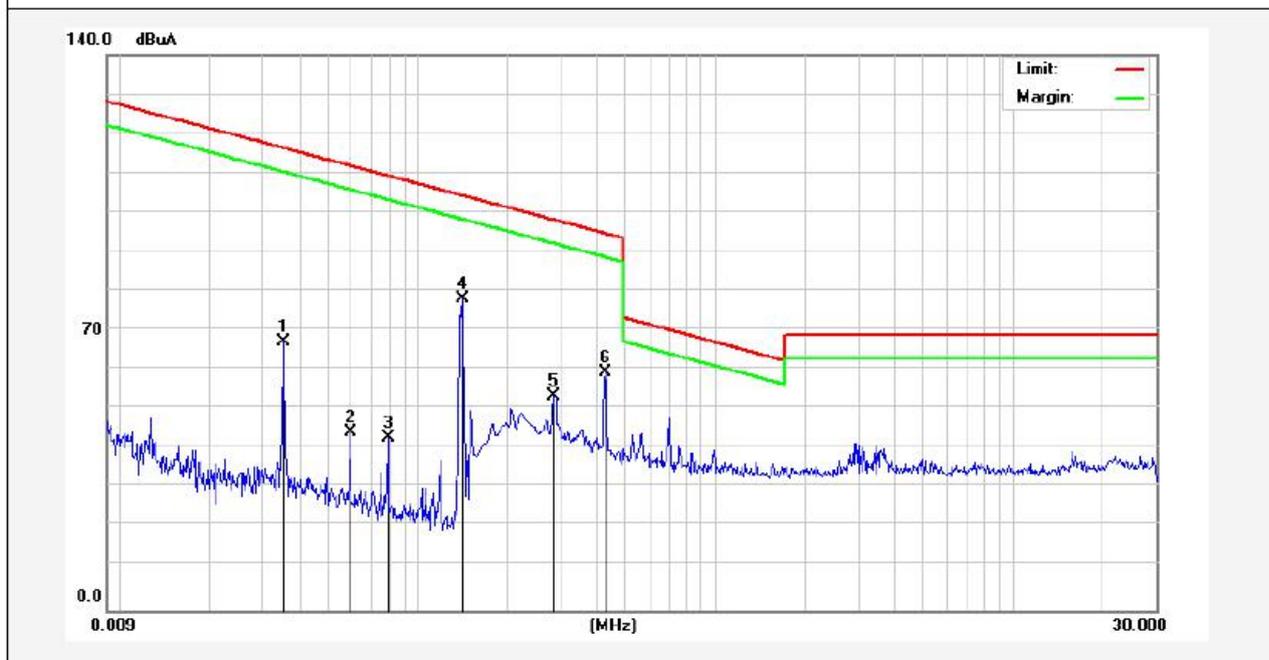


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree
									(dgc)
0.0353	48.84	19.28	2.53	0	70.65	136.52	-65.87	Peak	24
0.0353	45.77	19.28	2.53	0	67.58	116.52	-48.94	AV	24
0.0593	43.60	19.30	2.53	0	65.43	132.04	-66.61	Peak	50
0.0593	23.30	19.30	2.53	0	45.13	112.04	-66.91	AV	50
0.0793	45.37	19.32	2.55	0	67.24	129.53	-62.29	Peak	78
0.0793	21.57	19.32	2.55	0	43.44	109.53	-66.09	AV	78
0.1409	66.26	19.36	2.62	0	88.24	124.56	-36.32	Peak	241
0.1409	56.76	19.36	2.62	0	78.74	104.56	-25.82	AV	241
0.2860	47.23	19.38	2.63	0	69.24	118.45	-49.21	Peak	112
0.2860	32.07	19.38	2.63	0	54.08	98.45	-44.37	AV	112
0.4260	47.20	19.38	2.63	0	69.21	115.01	-45.80	Peak	246
0.4260	38.09	19.38	2.63	0	60.10	95.01	-34.91	AV	246

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz -1000 MHz)

<b>Job No.:</b>	<b>SZAWW180608002-01</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.4(C)/50%RH</b>
<b>Test Mode:</b>	<b>Mode 4</b>	<b>Distance:</b>	<b>3m</b>

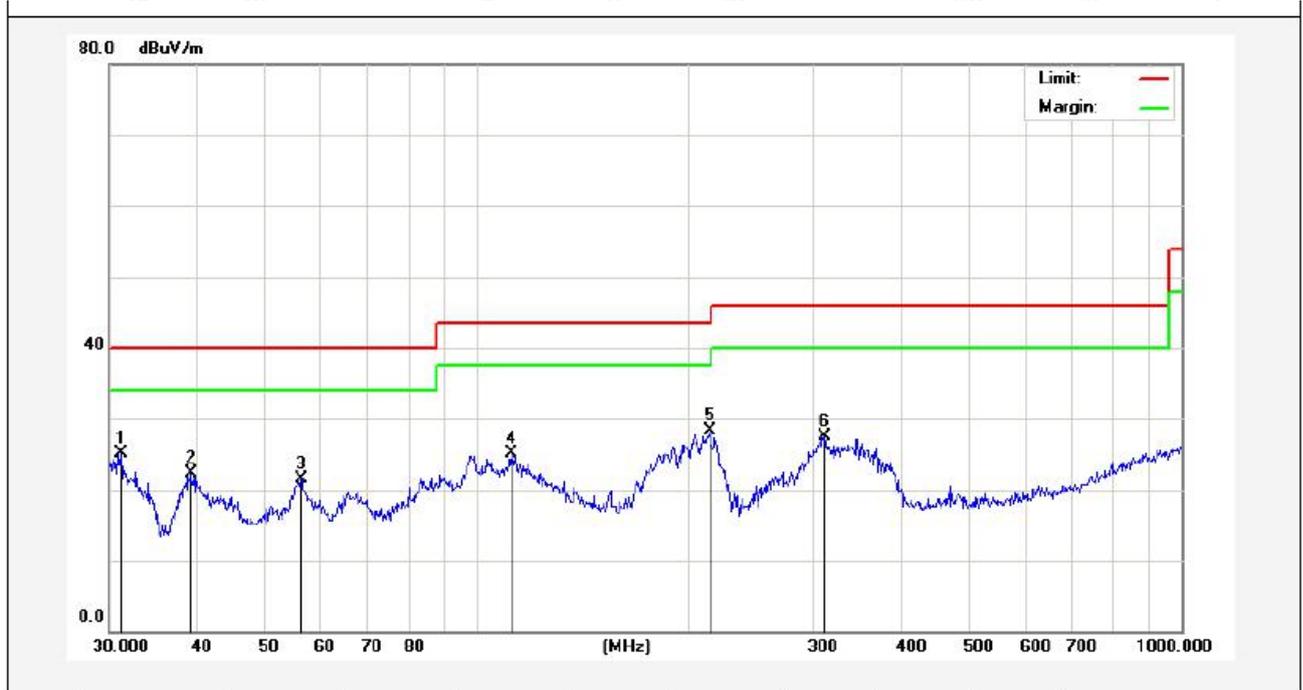


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.1798	43.36	-18.21	25.15	40.00	-14.85	QP	300	0	
2	39.1616	37.19	-14.82	22.37	40.00	-17.63	QP	300	24	
3	56.1974	38.22	-16.80	21.42	40.00	-18.58	QP	300	120	
4	111.7380	45.90	-20.74	25.16	43.50	-18.34	QP	300	220	
5	213.7634	47.53	-19.17	28.36	43.50	-15.14	QP	300	320	
6	311.0867	43.83	-16.34	27.49	46.00	-18.51	QP	300	360	

<b>Job No.:</b>	<b>SZAWW180608002-01</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.4(C)/50%RH</b>
<b>Test Mode:</b>	<b>Mode 4</b>	<b>Distance:</b>	<b>3m</b>




No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.6379	50.35	-17.36	32.99	40.00	-7.01	QP	300	0	
2	40.1347	45.78	-13.40	32.38	40.00	-7.62	QP	300	42	
3	176.2686	40.42	-16.12	24.30	43.50	-19.20	QP	300	121	
4	219.0753	40.59	-14.33	26.26	46.00	-19.74	QP	300	242	
5	329.0390	37.55	-13.83	23.72	46.00	-22.28	QP	300	343	
6	465.5994	35.26	-11.94	23.32	46.00	-22.68	QP	300	360	

<b>Job No.:</b>	<b>SZAWW180608002-01</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 240V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.4(C)/50%RH</b>
<b>Test Mode:</b>	<b>Mode 4</b>	<b>Distance:</b>	<b>3m</b>

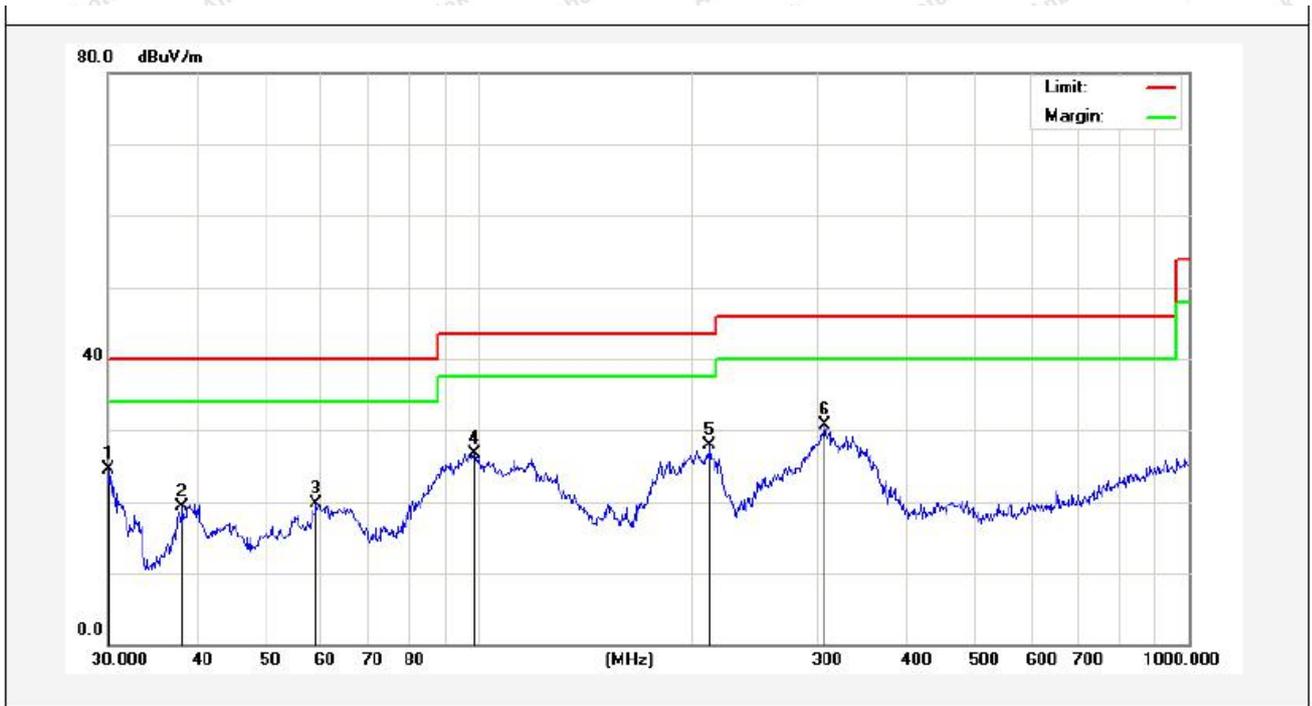

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	43.07	-18.55	24.52	40.00	-15.48	QP	300	0	
2	38.2120	34.68	-15.34	19.34	40.00	-20.66	QP	300	54	
3	59.0251	36.58	-16.94	19.64	40.00	-20.36	QP	300	120	
4	98.4866	47.58	-20.91	26.67	43.50	-16.83	QP	300	202	
5	211.5265	46.95	-19.12	27.83	43.50	-15.67	QP	300	300	
6	306.7537	47.53	-16.87	30.66	46.00	-15.34	QP	300	360	

<b>Job No.:</b>	<b>SZAWW180608002-01</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC PART15 C _3m</b>	<b>Power Source:</b>	<b>AC 240V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.4(C)/50%RH</b>
<b>Test Mode:</b>	<b>Mode 4</b>	<b>Distance:</b>	<b>3m</b>

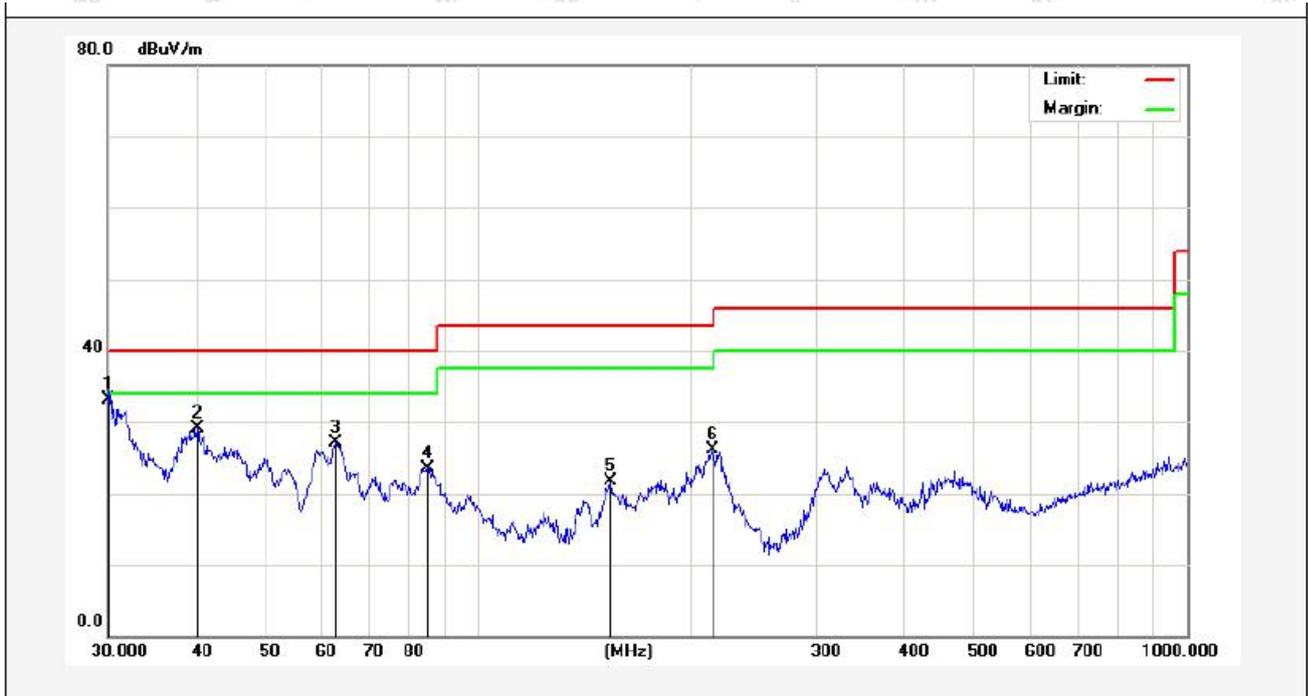

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	50.71	-17.55	33.16	40.00	-6.84	QP	300	0	
2	40.1347	42.54	-13.40	29.14	40.00	-10.86	QP	300	35	
3	62.8708	44.23	-17.07	27.16	40.00	-12.84	QP	300	121	
4	84.7019	41.50	-18.06	23.44	40.00	-16.56	QP	300	201	
5	153.7385	38.79	-17.17	21.62	43.50	-21.88	QP	300	302	
6	213.7634	40.51	-14.49	26.02	43.50	-17.48	QP	300	360	

## APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement


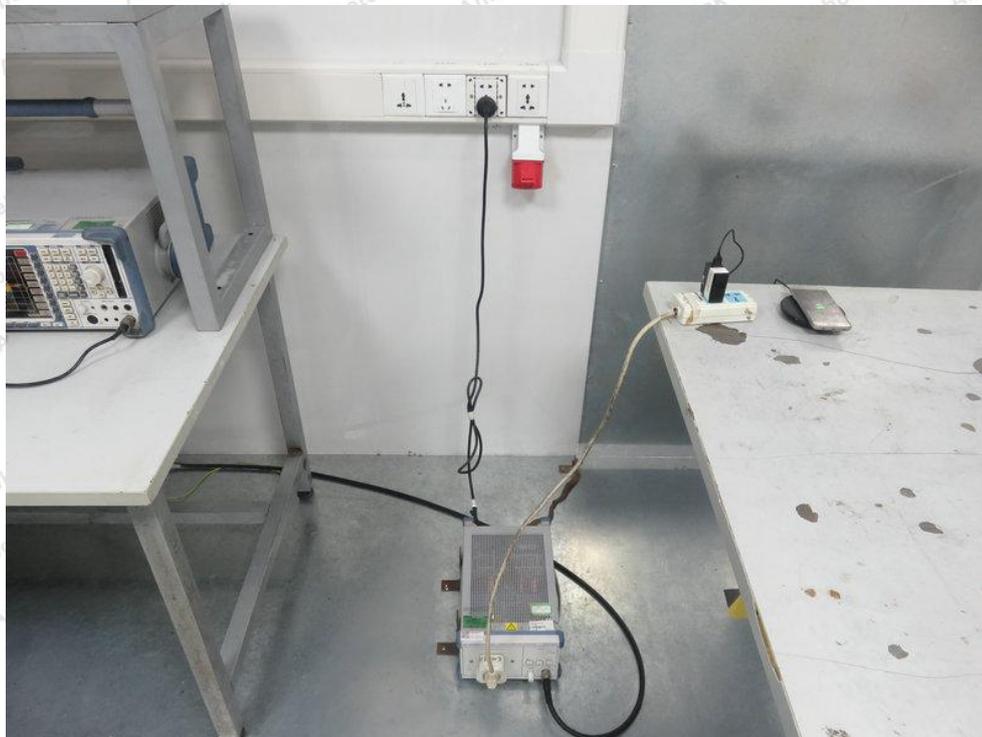


Photo of Radiation Emission Test







## APPENDIX II -- EXTERNAL PHOTOGRAPH

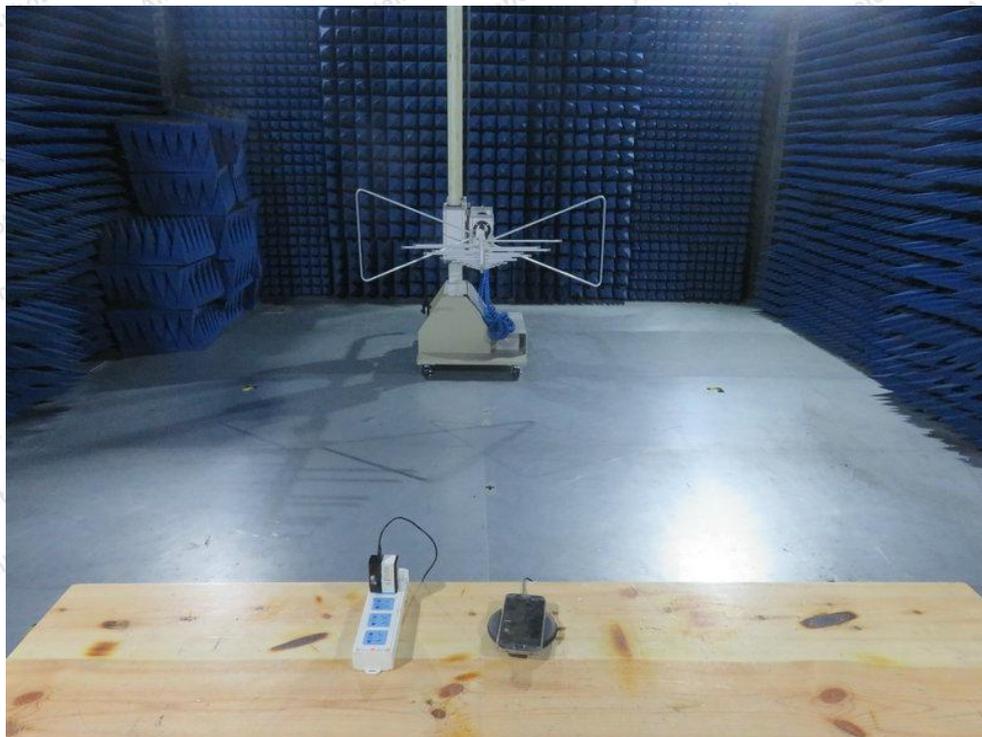









## APPENDIX III -- INTERNAL PHOTOGRAPH

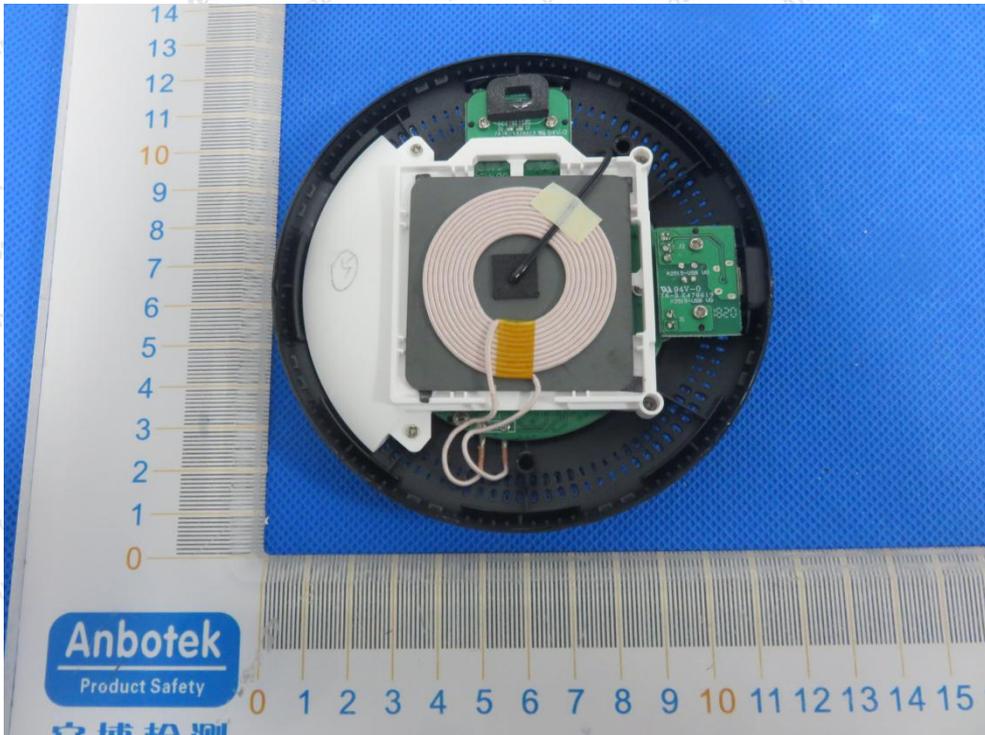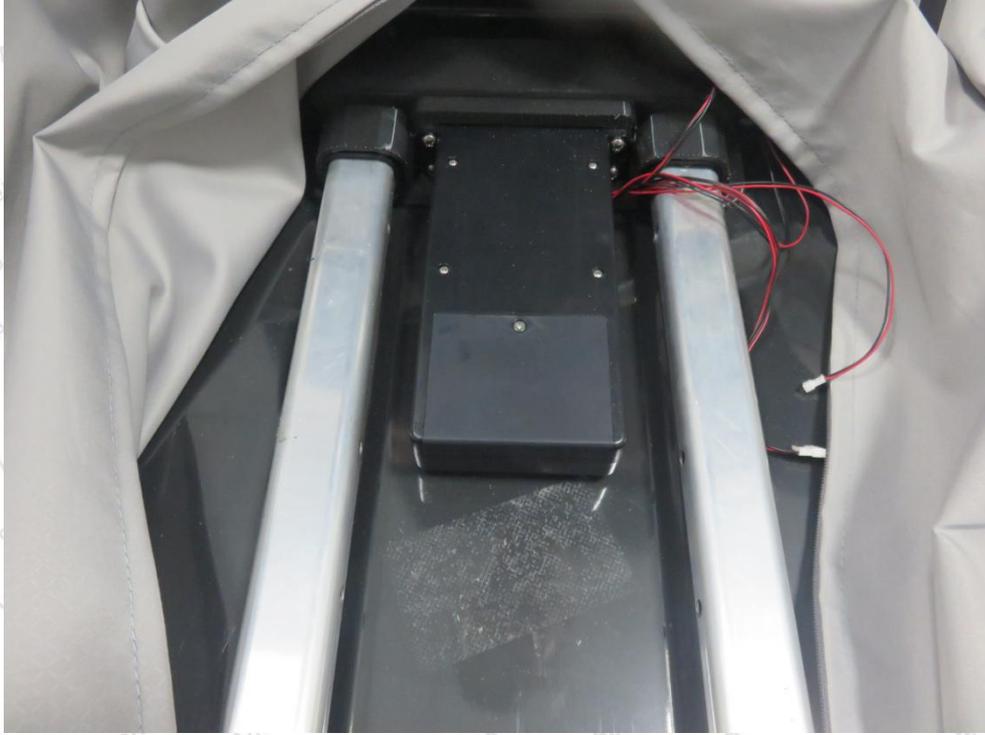

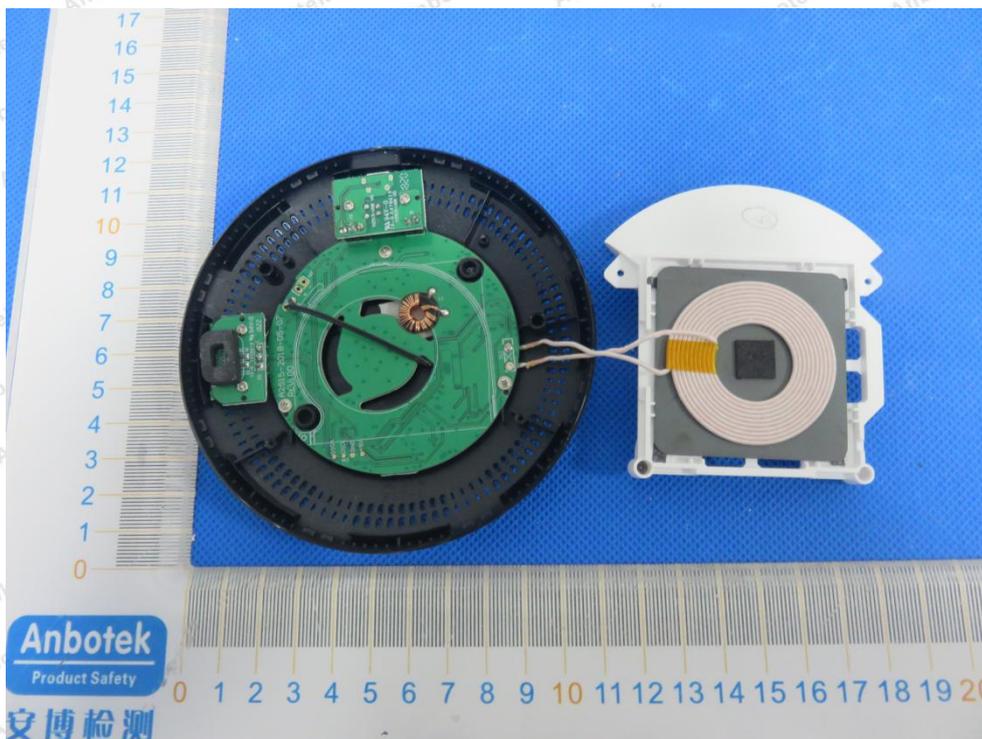

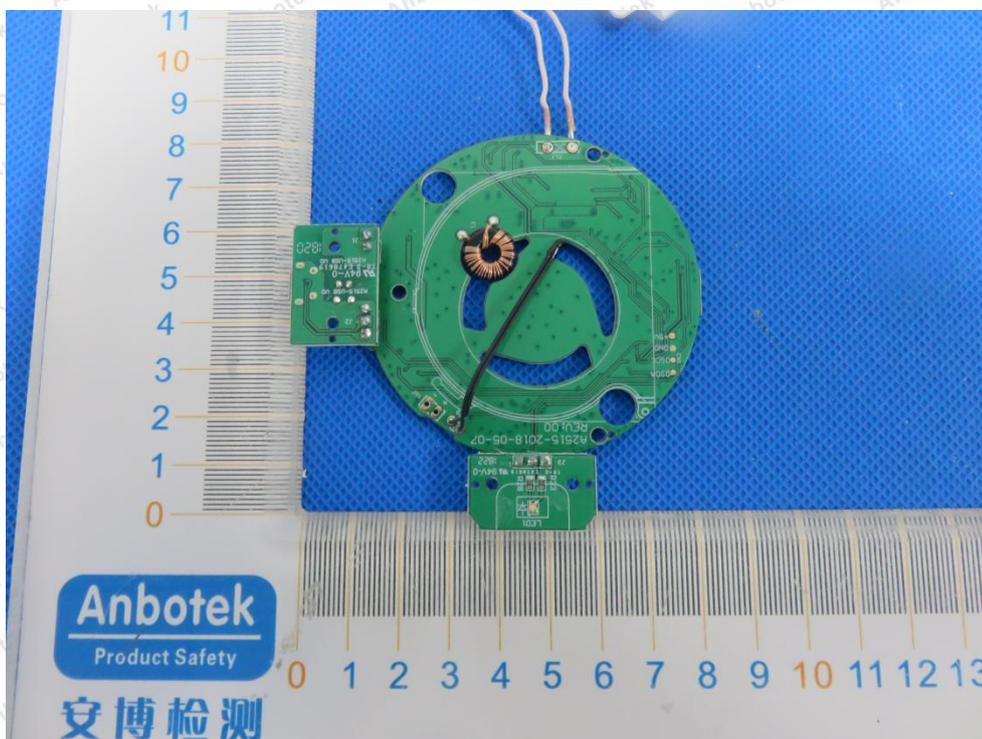



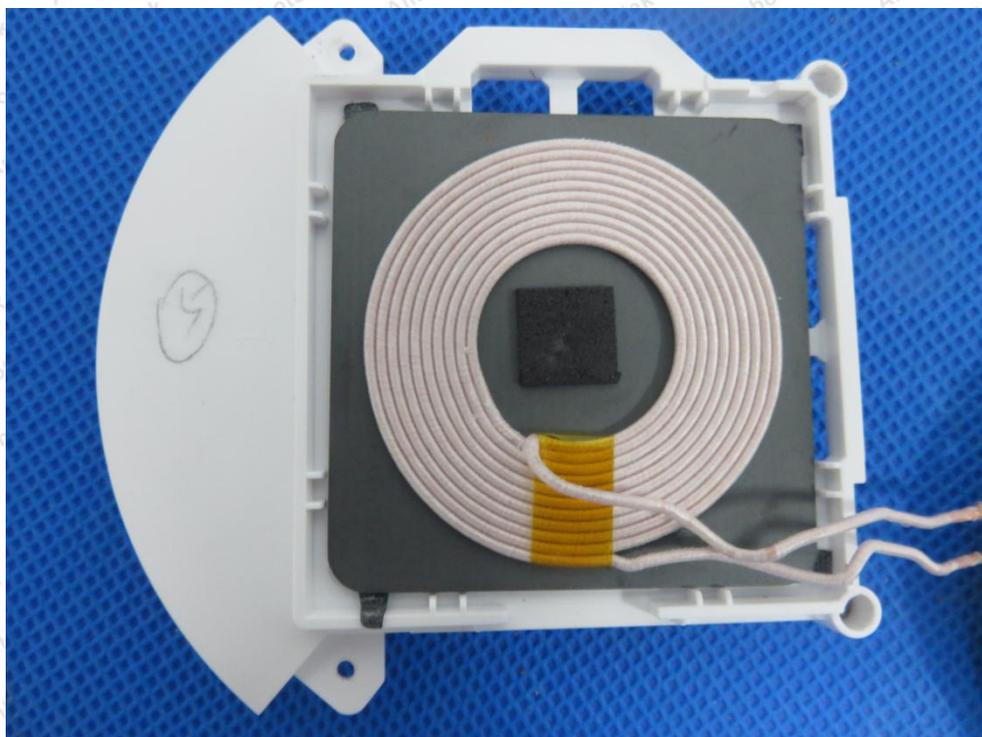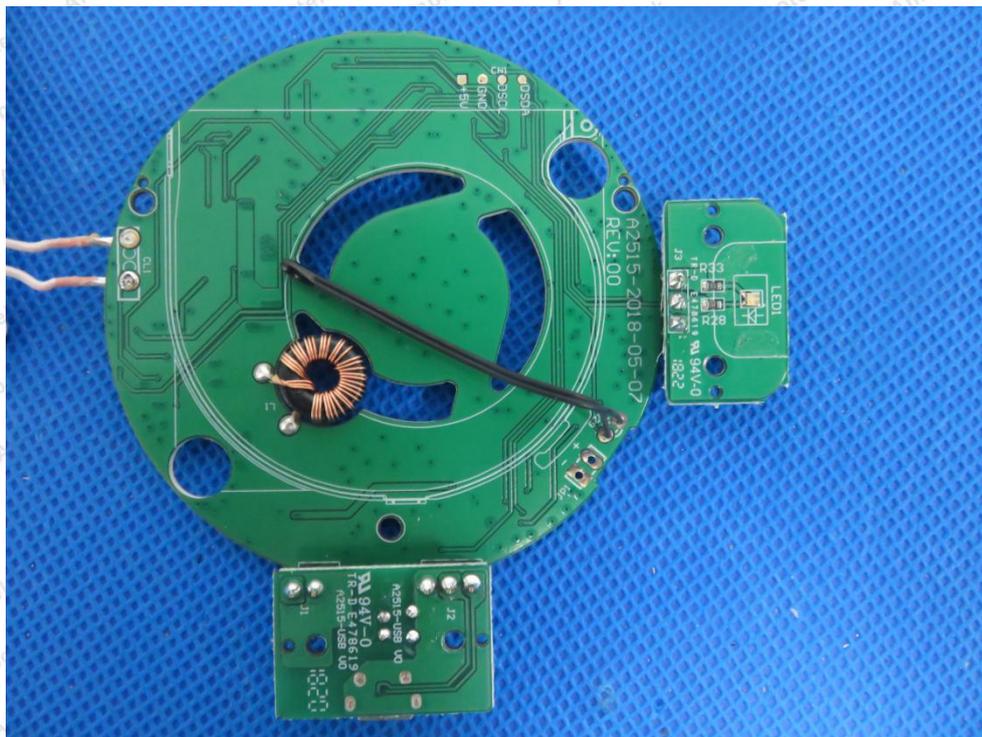

----- End of Report -----