



FCC TEST REPORT

**Test report
On Behalf of
Anker Innovations Limited
For
Soundcore Flare+
Model No.: A3162**

FCC ID: 2AOKB-A3162

Prepared for : Anker Innovations Limited
Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,
Hongkong

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: Aug. 03, 2018 ~ Aug. 08, 2018

Date of Report: Aug. 20, 2018

Report Number: HUAKE180806707E



TEST RESULT CERTIFICATION

Applicant's name : Anker Innovations Limited
 Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacture's Name : Anker Innovations Limited
 Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong

Product description

Trade Mark : Soundcore
 Product name..... : Soundcore Flare+
 Model and/or type reference : A3162
 APPLICATION PURPOSE..... : Class II Permissive Change

Standards : FCC Part 15 Subpart C Section 15.247

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
 Date (s) of performance of tests : Aug. 03, 2018 ~ Aug. 08, 2018
 Date of Issue..... : Aug. 20, 2018
 Test Result..... : **Pass**

Testing Engineer : Gary Qian
 (Gary Qian)

Technical Manager : Eden Hu
 (Eden Hu)

Authorized Signatory : Jason Zhou
 (Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 CARRIER FREQUENCY OF CHANNELS	6
2.3 OPERATION OF EUT DURING TESTING	7
2.4 DESCRIPTION OF TEST SETUP	8
2.5 EQUIPMENT USED IN EUT SYSTEM	8
2.6 MEASUREMENT INSTRUMENTS LIST	9
3 . CONDUCTED EMISSIONS TEST	10
3.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	10
3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
4. RADIATED EMISSION TEST	14
4.1TEST LIMIT	14
4.2. MEASUREMENT PROCEDURE	15
4.3. TEST SETUP	17
4.4. TEST RESULT	18
5. PEAK OUTPUT POWER	42
5.1. MEASUREMENT PROCEDURE	42
5.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	42
5.3. LIMITS AND MEASUREMENT RESULT	43
6. ANTENNA REQUIREMENT	51
7. PHOTOGRAPH OF TEST	52
8. PHOTOGRAPHS OF EUT	55



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
PEAK OUTPUT POWER	COMPLIANT

Note: Comparing the internal photos of the original with the modified device, the mainboard's PCB Layout and component placement are different except for bluetooth module. So the test data may refer to the AGC01110180624FE03 except for the data of radiated emission, conducted emissions and peak output power.

1.2 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V5.0
RF Output Power (for BR/EDR)	-0.59dBm(Max)
RF Output Power (for BLE)	-1.63dBm(Max)
Modulation	BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> π /4-DQPSK, <input checked="" type="checkbox"/> 8DPSK BLE <input checked="" type="checkbox"/> GFSK
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	E
Software Version	V2.0
Antenna Designation	PCB Antenna
Antenna Gain	3.88dBi
Power Supply	DC 7.2V by battery
Note: 1. The micro USB port only be used for charging and can't be used to transfer data with PC. 2. The standard USB port only be used to power supply for other device and can't transfer data with PC.	



2.2 CARRIER FREQUENCY OF CHANNELS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2404MHz
	:	:
	38	2478 MHz
	39	2480 MHz




2.3 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link(Hopping mode)
<p>Note:</p> <ol style="list-style-type: none">1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.3. The EUT used fully-charged battery when tested.	




2.4 DESCRIPTION OF TEST SETUP

Configure 1: (Normal hopping)

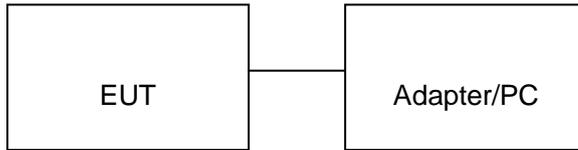

Note: Owing to the EUT has own battery, and testing may be performed while adapter or PC removed.

Configuration: Continuous TX

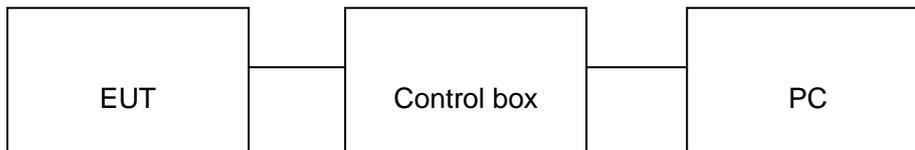

2.5 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Soundcore Flare+	Soundcore	A3162	EUT
2	Battery	HU NAN GIANTSUN	PA21	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	SERIAL	N/A	A.E
5	Adapter	I PRO	NTR-S01	A.E
6	USB Cable	N/A	1m unshielded	A.E
7	Load	HPX	RX24	A.E
8	Mobile Phone	HUAWEI	V9	A.E

**2.6 MEASUREMENT INSTRUMENTS LIST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
5.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
9.	Pre-amplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2017	1 Year
10.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
11.	Filter (2.4-2.483GHz)	Micro-tronics	087	--	Dec. 28, 2017	1 Year
12.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
13.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A

3. CONDUCTED EMISSIONS TEST


3.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

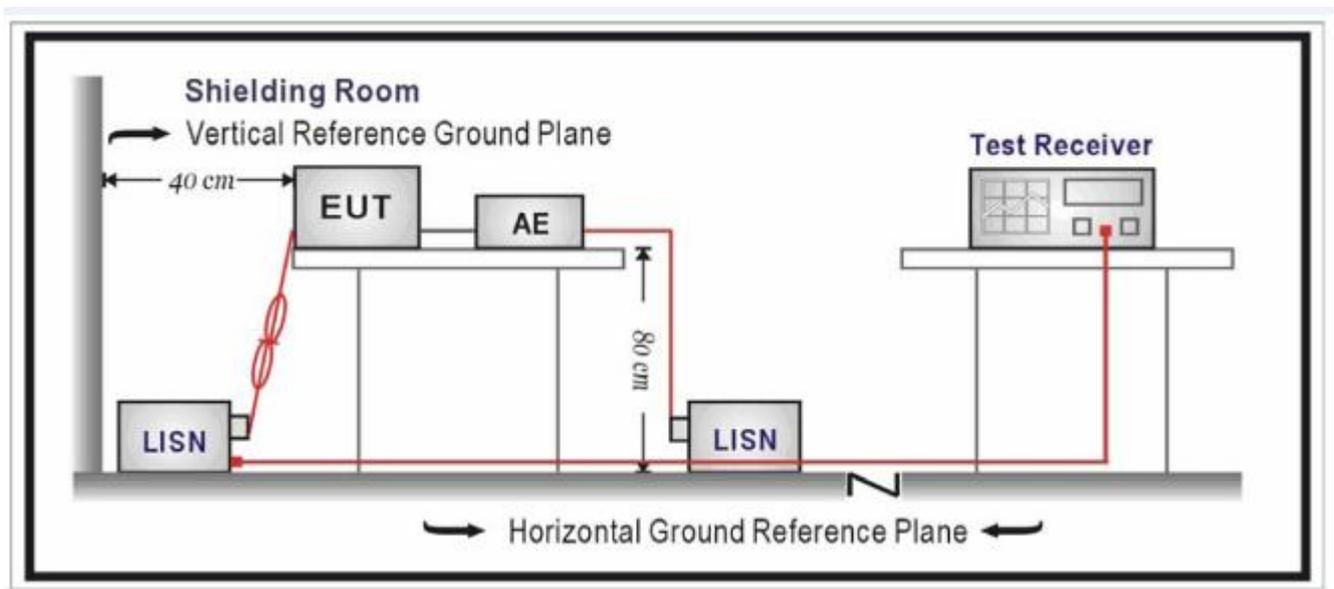



3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.




3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

BT Link with charging

By adapter(worst case)

Line Conducted Emission Test Line 1-L

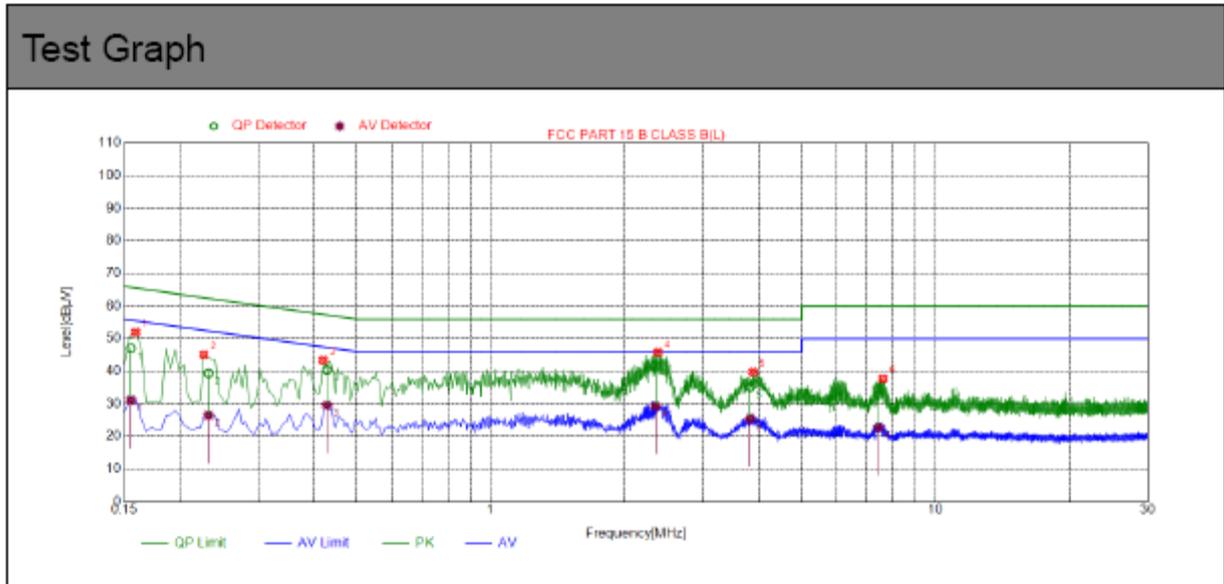


NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1552	10.03	47.05	65.71	18.66	31.20	55.71	24.51
2	0.2318	10.03	39.30	62.39	23.09	26.49	52.39	25.90
3	0.4280	10.05	40.32	57.29	16.97	29.81	47.29	17.88

4	2.3481	10.18	41.79	56.00	14.21	29.35	46.00	16.65
5	3.8253	10.25	35.15	56.00	20.85	25.51	46.00	20.49
6	7.4524	10.18	32.83	60.00	27.17	22.76	50.00	27.24



Line Conducted Emission Test Line 2-N

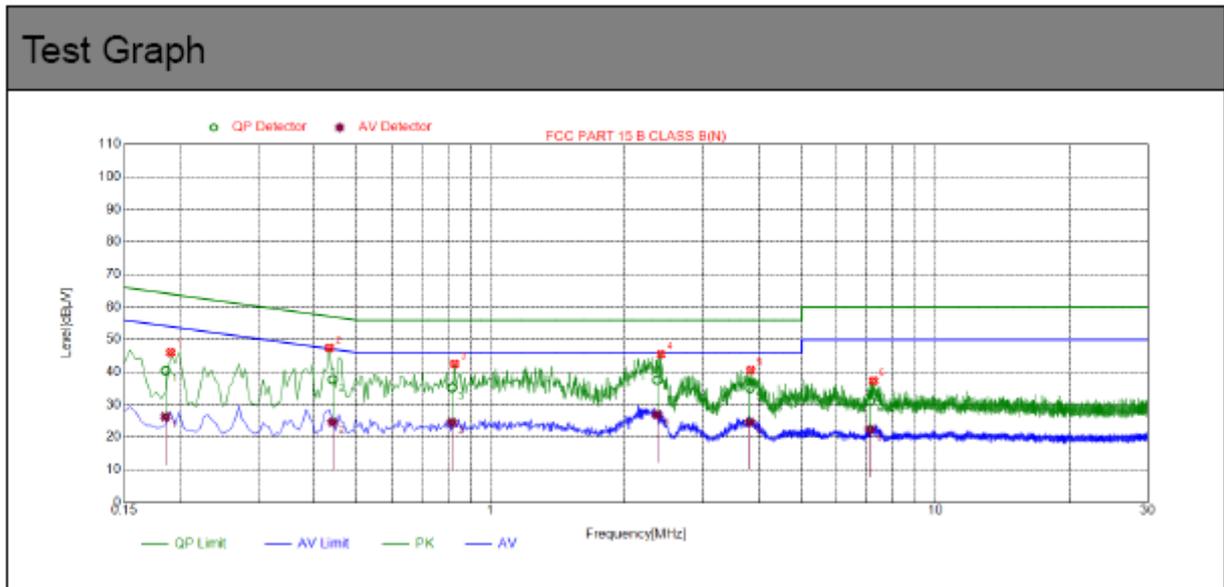

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1857	10.05	40.41	64.22	23.81	26.30	54.22	27.92
2	0.4411	10.05	37.69	57.04	19.35	24.67	47.04	22.37
3	0.8184	10.06	35.17	56.00	20.83	24.58	46.00	21.42

4	2.3684	10.18	37.51	56.00	18.49	26.93	46.00	19.07
5	3.8217	10.25	35.06	56.00	20.94	24.67	46.00	21.33
6	7.1314	10.19	31.13	60.00	28.87	22.39	50.00	27.61



4. RADIATED EMISSION TEST

4.1 TEST LIMIT

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu$ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



4.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
3. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
4. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)




The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

4.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

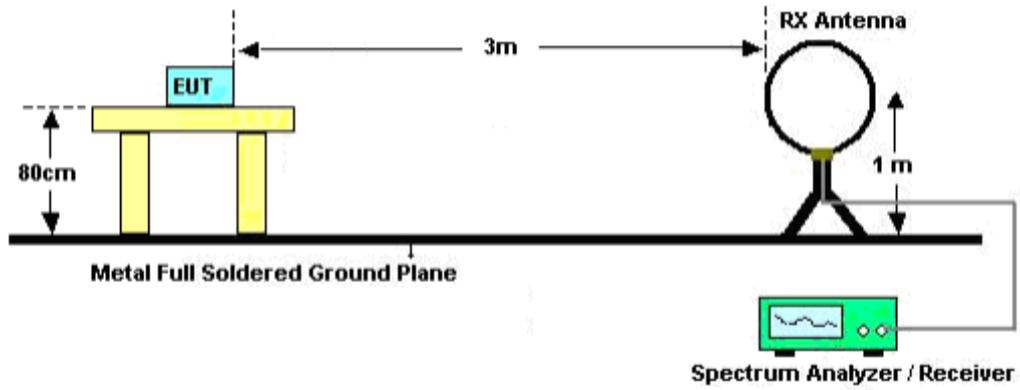

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

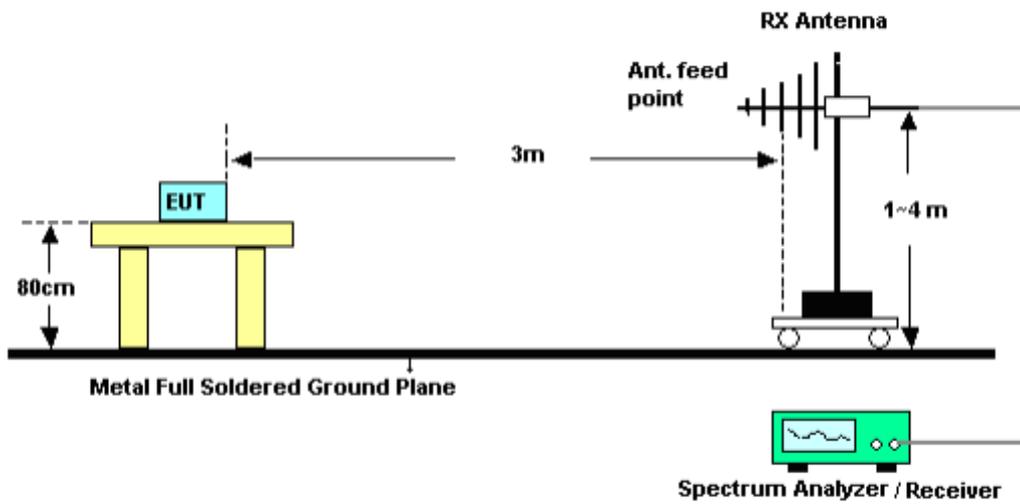



4.4. TEST RESULT

For BR/EDR


(Worst modulation: 8DPSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

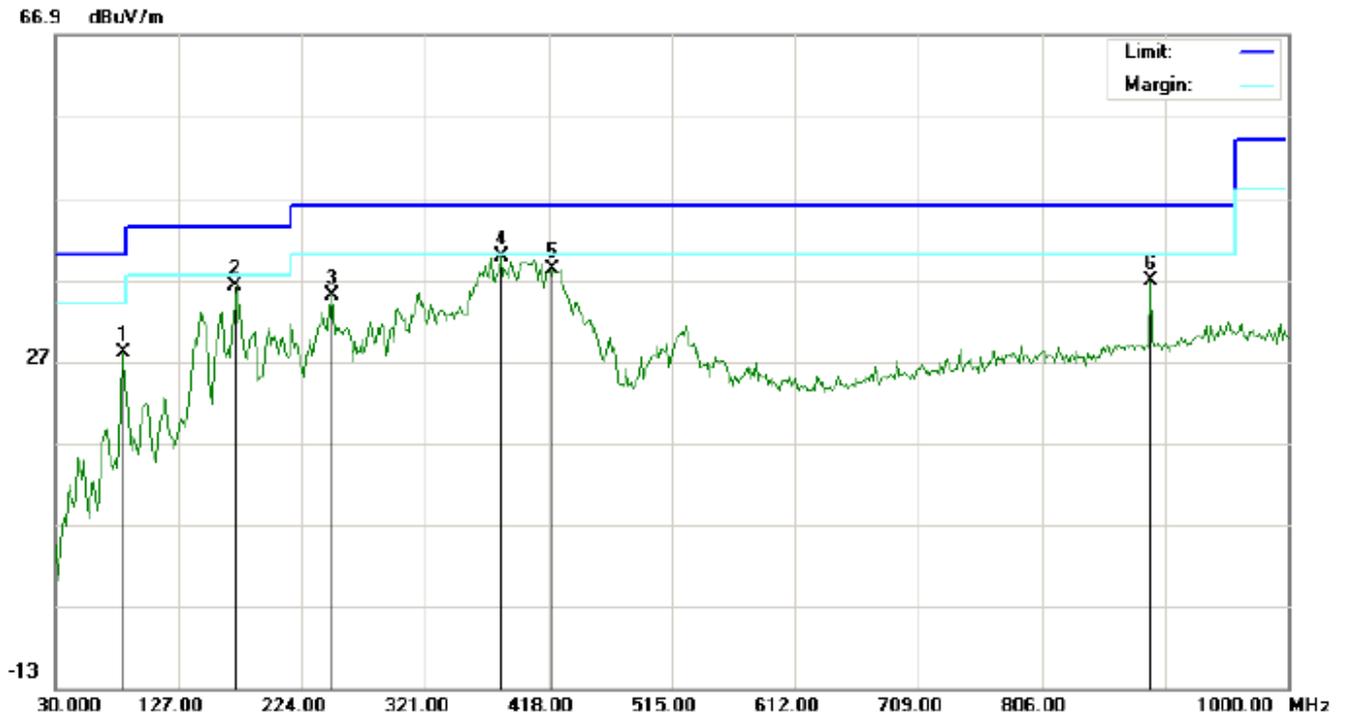


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		83.3500	27.46	0.50	27.96	40.00	-12.04	peak			
2		172.2666	25.33	10.78	36.11	43.50	-7.39	peak			
3		248.2500	27.88	7.08	34.96	46.00	-11.04	peak			
4	*	380.8167	20.82	18.94	39.76	46.00	-6.24	peak			
5		421.2333	18.51	19.72	38.23	46.00	-7.77	peak			
6		891.6833	8.33	28.39	36.72	46.00	-9.28	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

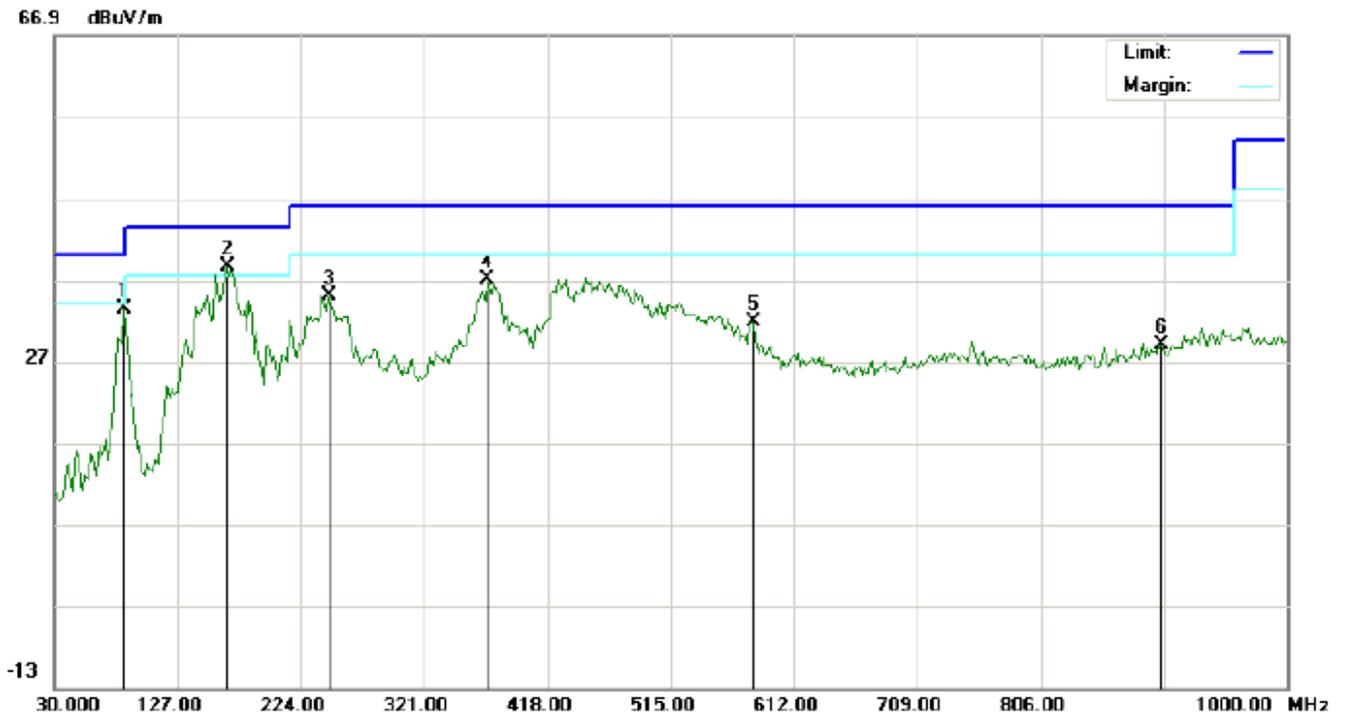

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		84.9666	29.77	3.58	33.35	40.00	-6.65	peak			
2	*	165.8000	23.70	14.96	38.66	43.50	-4.84	peak			
3		246.6333	21.41	13.57	34.98	46.00	-11.02	peak			
4		371.1167	18.20	18.88	37.08	46.00	-8.92	peak			
5		579.6667	9.12	22.63	31.75	46.00	-14.25	peak			
6		901.3833	0.36	28.65	29.01	46.00	-16.99	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		65.5664	18.25	5.93	24.18	40.00	-15.82	peak			
2		172.2666	20.33	10.78	31.11	43.50	-12.39	peak			
3		248.2500	25.38	7.08	32.46	46.00	-13.54	peak			
4	*	372.7332	18.21	18.89	37.10	46.00	-8.90	peak			
5		526.3165	8.85	21.84	30.69	46.00	-15.31	peak			
6		925.6331	3.72	29.32	33.04	46.00	-12.96	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

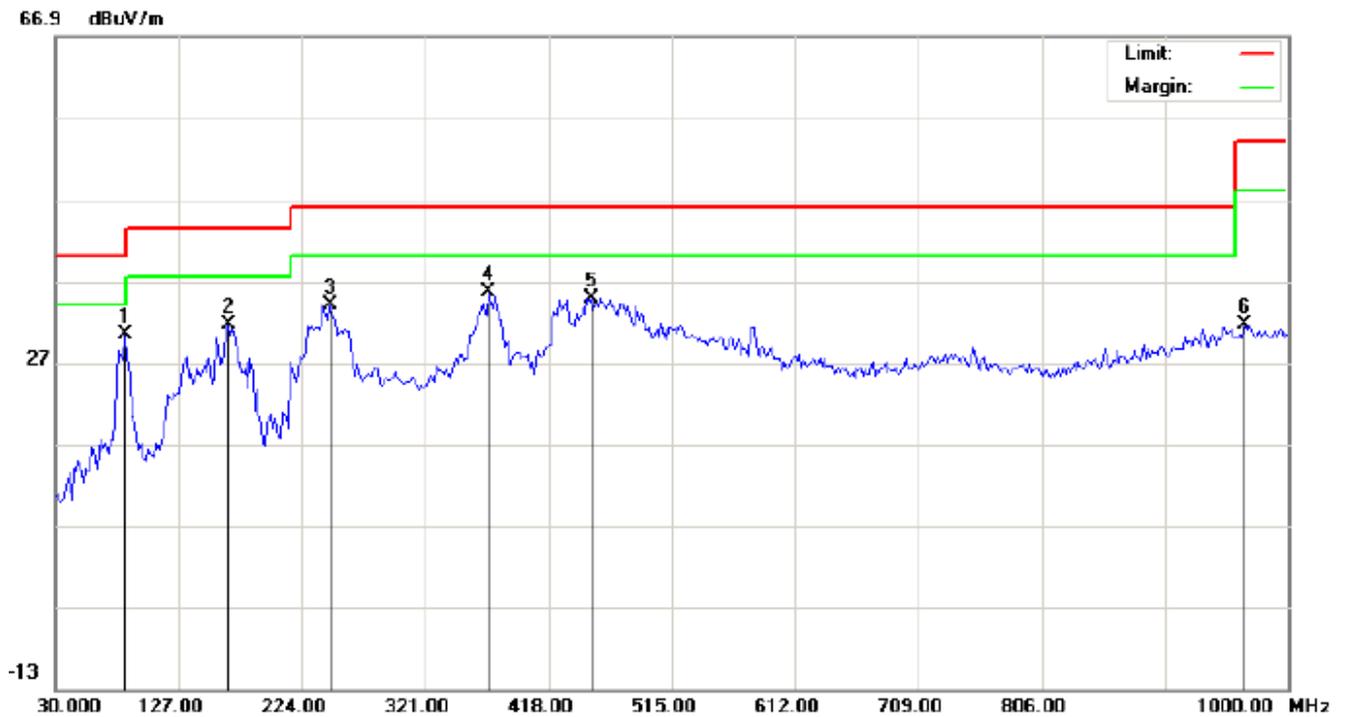

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	84.9666	26.77	3.58	30.35	40.00	-9.65	peak			
2		165.8000	16.70	14.96	31.66	43.50	-11.84	peak			
3		246.6331	20.41	13.57	33.98	46.00	-12.02	peak			
4		371.1166	16.70	18.88	35.58	46.00	-10.42	peak			
5		451.9499	14.26	20.61	34.87	46.00	-11.13	peak			
6		966.0498	1.72	29.85	31.57	54.00	-22.43	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		83.3499	27.46	0.50	27.96	40.00	-12.04	peak			
2		172.2666	17.33	10.78	28.11	43.50	-15.39	peak			
3		248.2500	25.38	7.08	32.46	46.00	-13.54	peak			
4	*	406.6831	18.21	19.27	37.48	46.00	-8.52	peak			
5		526.3165	9.35	21.84	31.19	46.00	-14.81	peak			
6		928.8667	3.61	29.41	33.02	46.00	-12.98	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	80.1166	28.05	1.84	29.89	40.00	-10.11	peak			
2		157.7167	13.79	15.32	29.11	43.50	-14.39	peak			
3		246.6331	13.91	13.57	27.48	46.00	-18.52	peak			
4		371.1166	14.20	18.88	33.08	46.00	-12.92	peak			
5		521.4664	13.38	21.71	35.09	46.00	-10.91	peak			
6		933.7164	1.95	29.55	31.50	46.00	-14.50	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION ABOVE 1GHz

RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

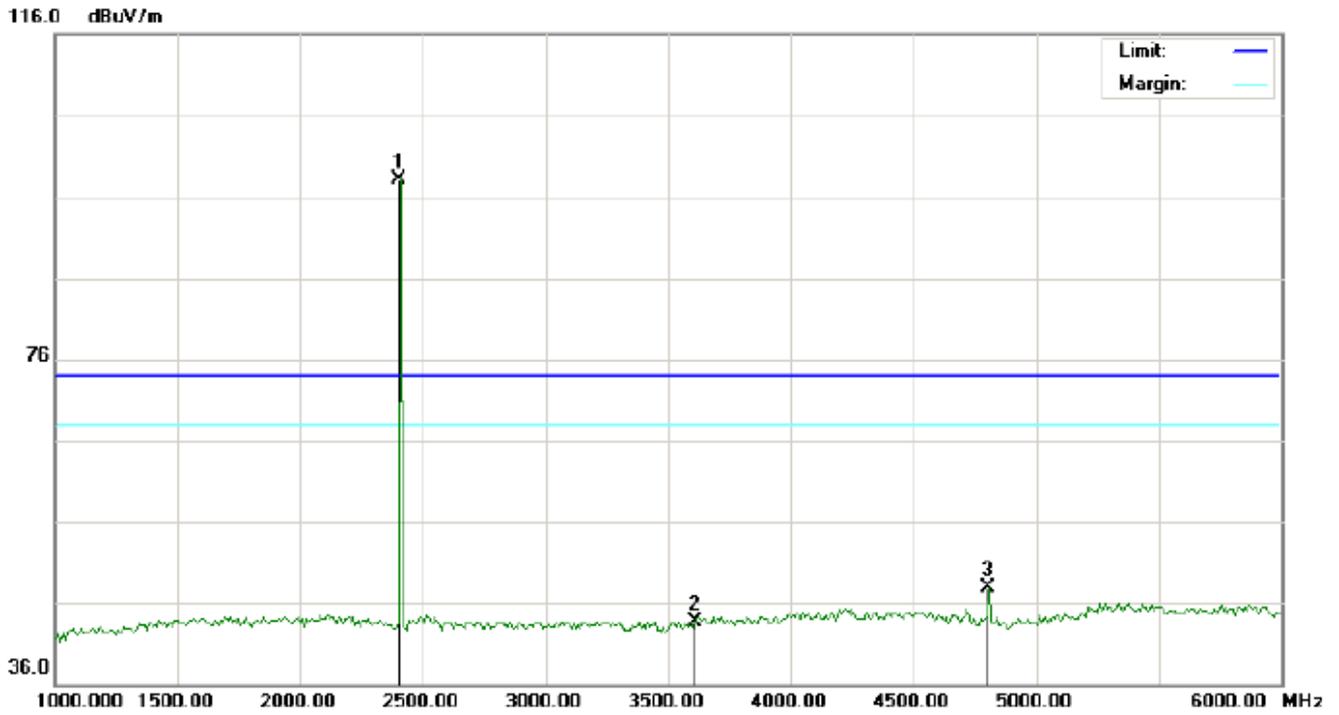


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	84.59	13.46	98.05	74.00	24.05	peak			
2		3608.333	31.00	12.78	43.78	74.00	-30.22	peak			
3		4804.000	40.21	7.69	47.90	74.00	-26.10	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL –VERTICAL

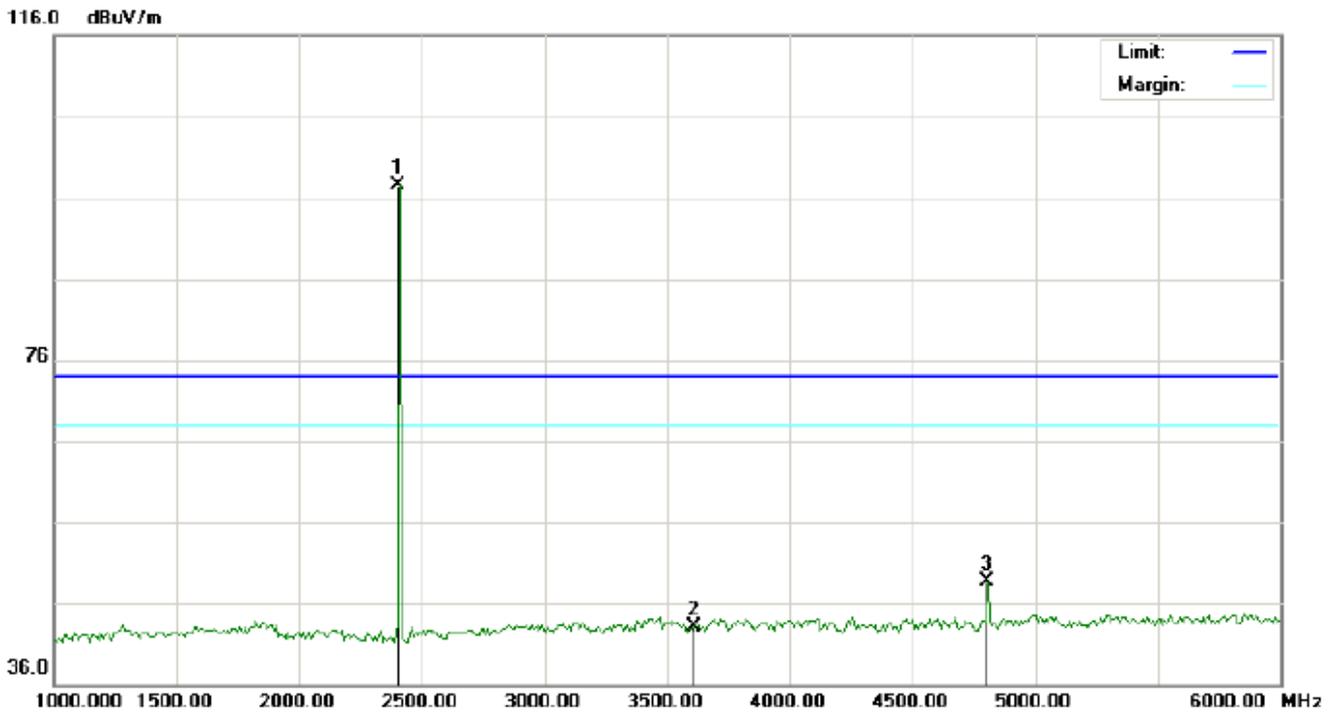


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2402.000	84.09	13.46	97.55	74.00	23.55	peak			
2		3608.333	30.33	12.78	43.11	74.00	-30.89	peak			
3		4804.000	41.05	7.69	48.74	74.00	-25.26	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

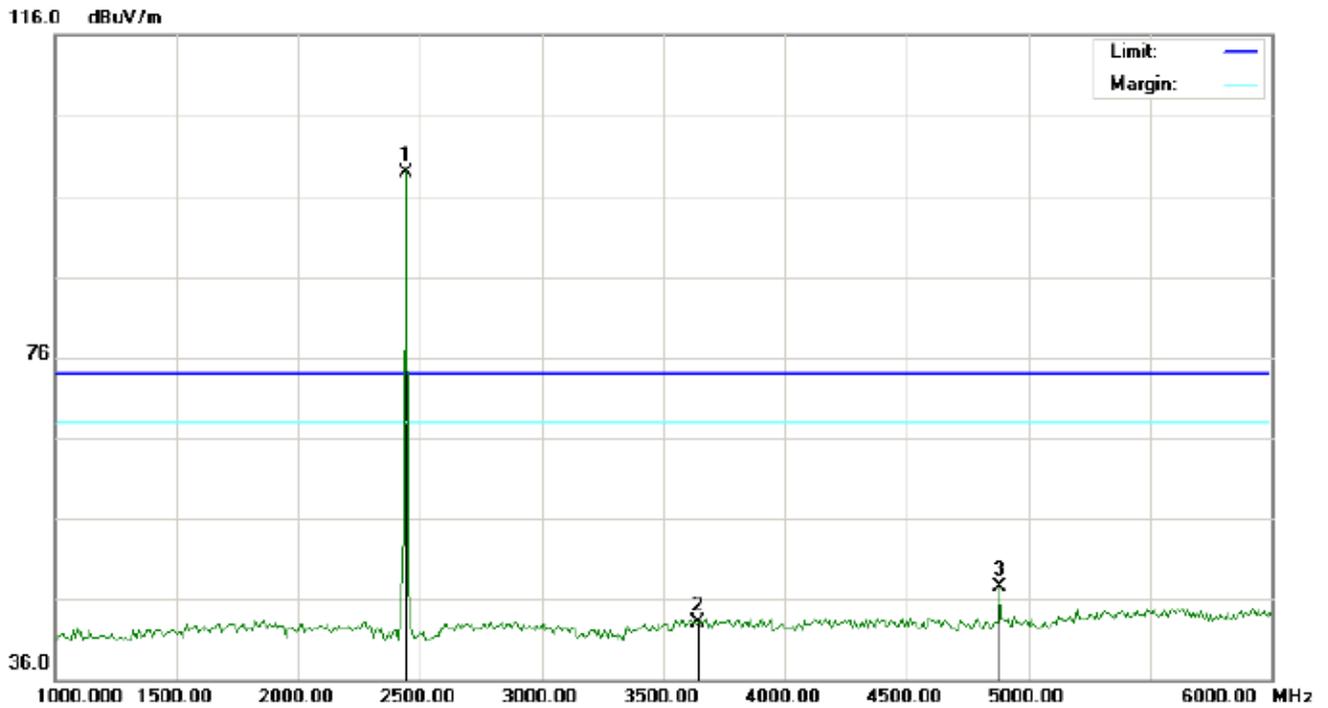


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2441.000	84.94	13.88	98.82	74.00	24.82	peak			
2		3641.667	30.14	12.98	43.12	74.00	-30.88	peak			
3		4882.000	39.66	7.89	47.55	74.00	-26.45	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics) - MIDDLE CHANNEL –VERTICAL

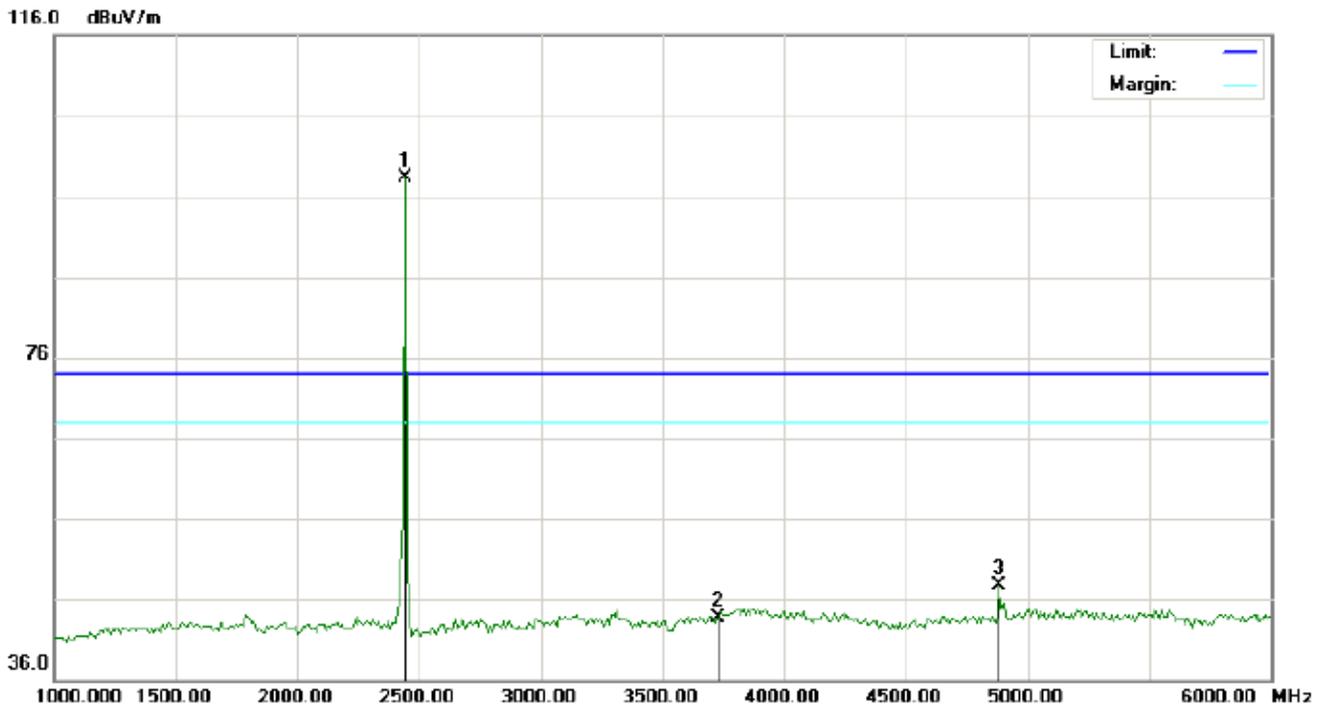


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	84.50	13.88	98.38	74.00	24.38	peak			
2		3733.333	30.11	13.55	43.66	74.00	-30.34	peak			
3		4882.000	39.89	7.89	47.78	74.00	-26.22	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL-HORIZONTAL

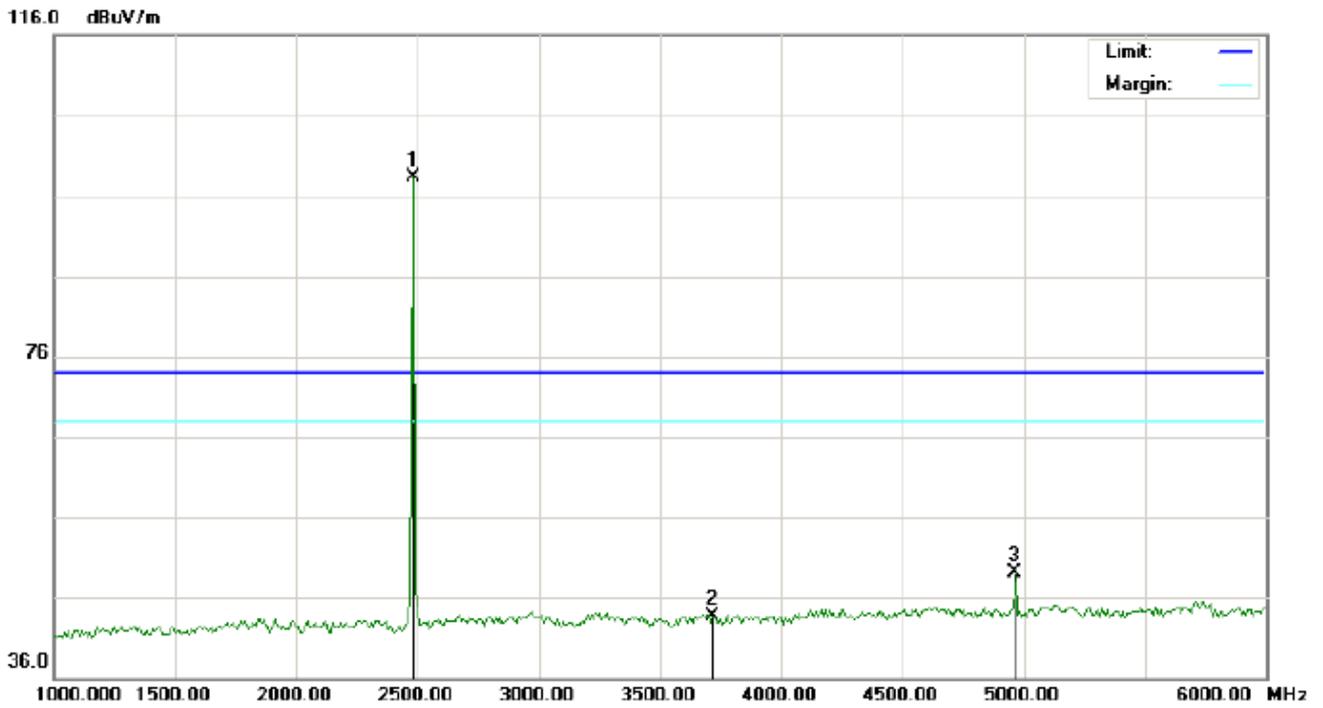


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2480.000	84.20	14.11	98.31	74.00	24.31	peak			
2		3716.667	30.35	13.44	43.79	74.00	-30.21	peak			
3		4960.000	41.10	8.09	49.19	74.00	-24.81	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL –VERTICAL

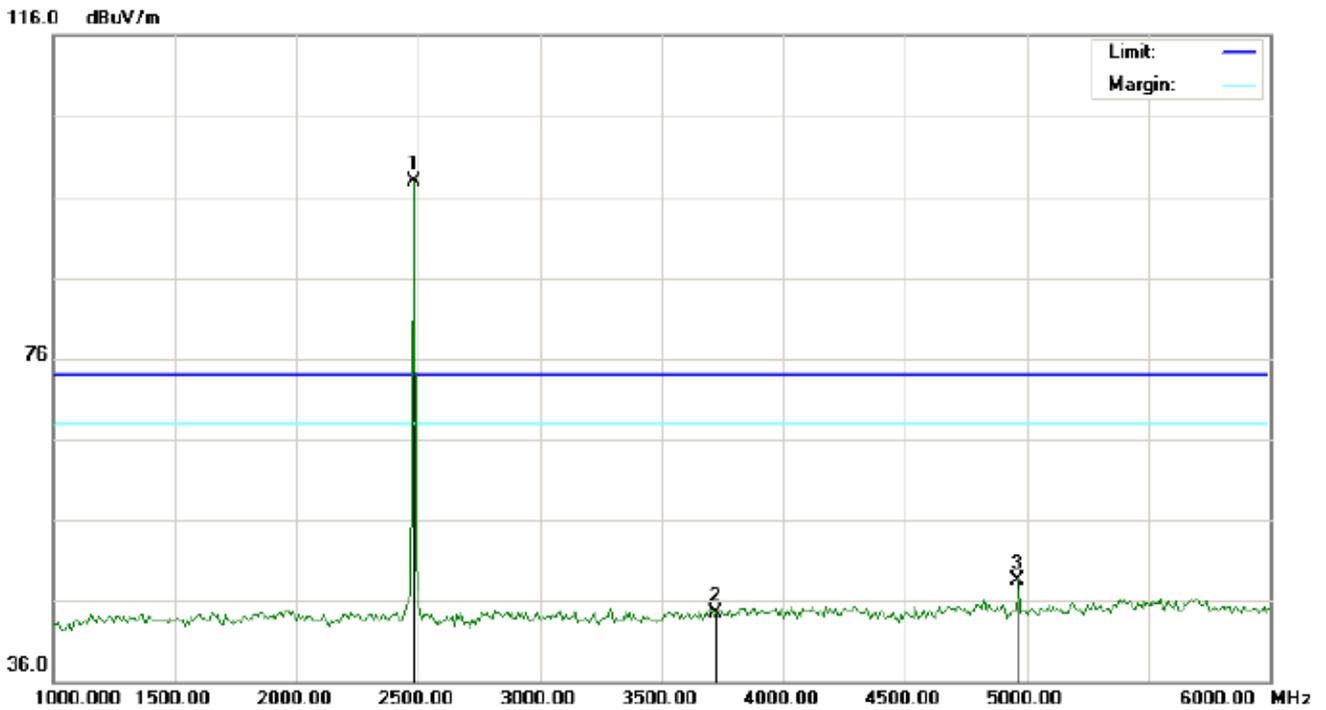

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.76	14.11	97.87	74.00	23.87	peak			
2		3725.000	30.92	13.50	44.42	74.00	-29.58	peak			
3		4960.000	40.41	8.09	48.50	74.00	-25.50	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system




For BLE

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

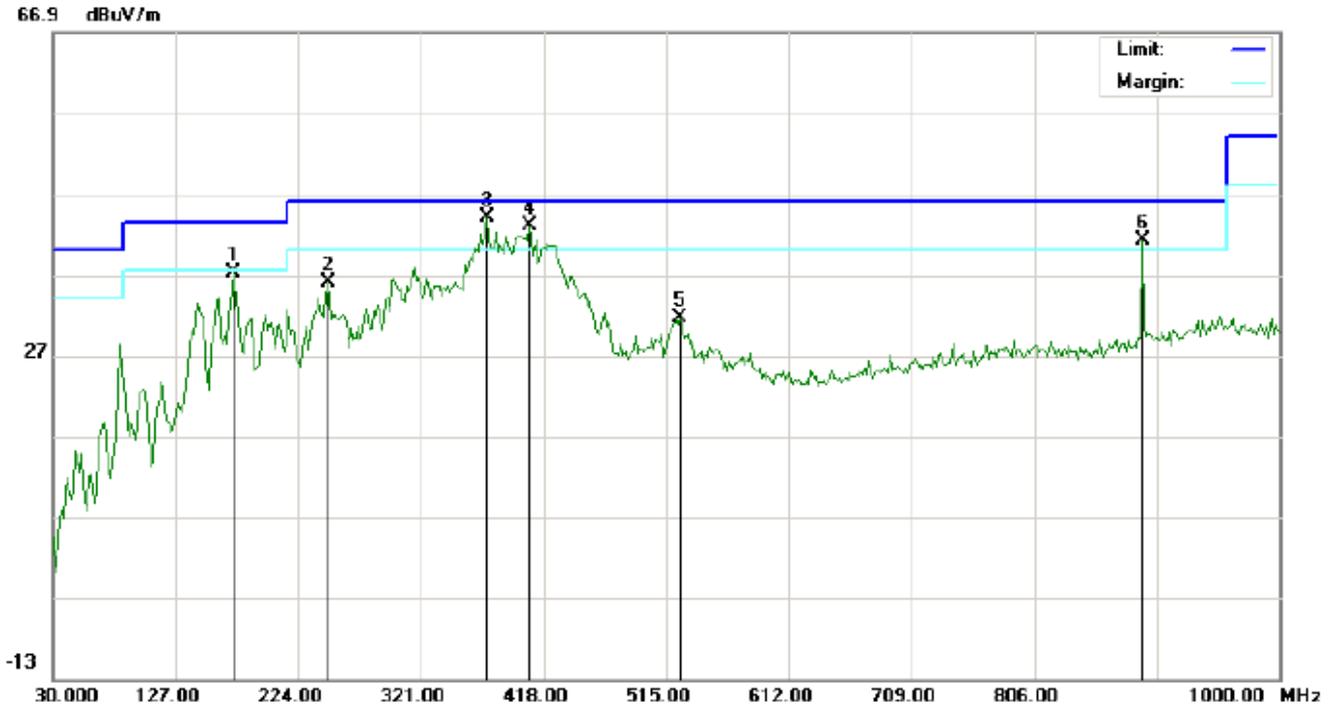


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		172.2667	26.33	10.78	37.11	43.50	-6.39	peak			
2		248.2500	28.88	7.08	35.96	46.00	-10.04	peak			
3	*	372.7333	25.21	18.89	44.10	46.00	-1.90	peak			
4	!	406.6833	23.71	19.27	42.98	46.00	-3.02	peak			
5		526.3167	9.85	21.84	31.69	46.00	-14.31	peak			
6	!	891.6833	12.83	28.39	41.22	46.00	-4.78	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

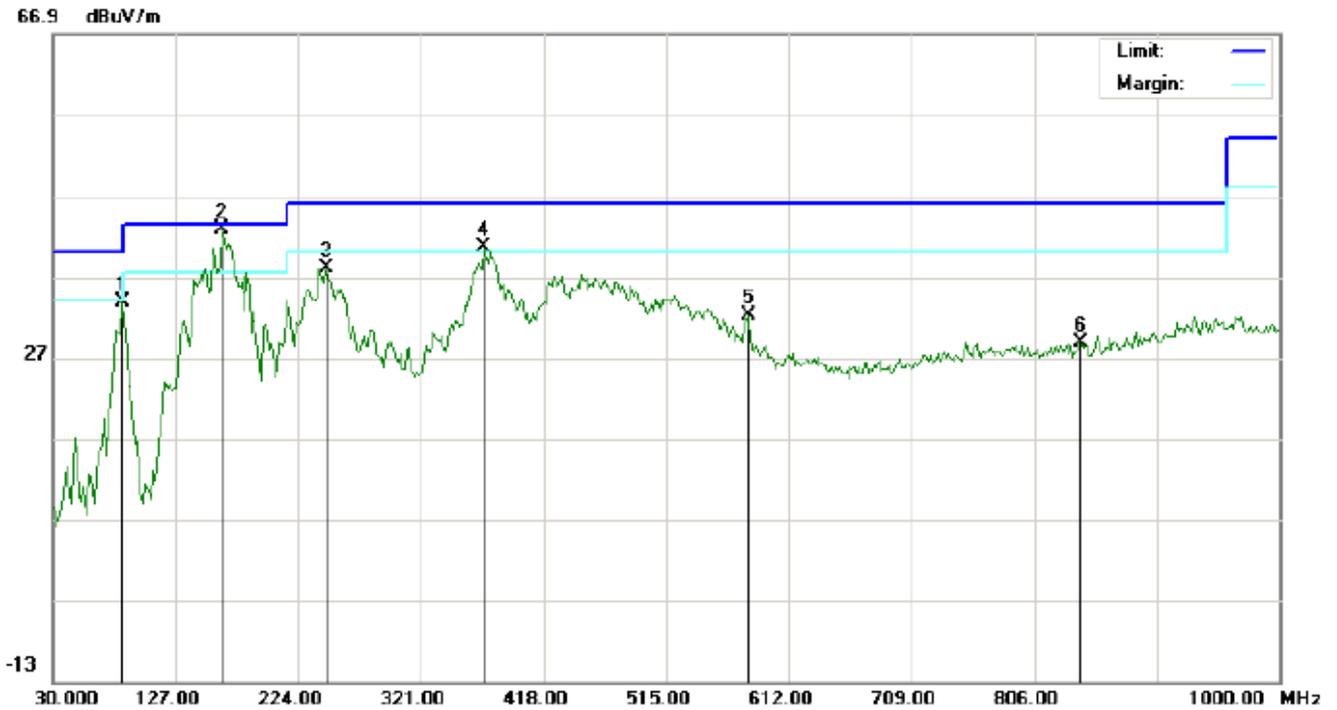

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		84.9667	30.27	3.58	33.85	40.00	-6.15	peak			
2	*	164.1833	27.72	15.07	42.79	43.50	-0.71	peak			
3		246.6333	24.41	13.57	37.98	46.00	-8.02	peak			
4	!	371.1167	21.70	18.88	40.58	46.00	-5.42	peak			
5		579.6667	9.62	22.63	32.25	46.00	-13.75	peak			
6		843.1833	1.43	27.31	28.74	46.00	-17.26	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

66.9 dBuV/m

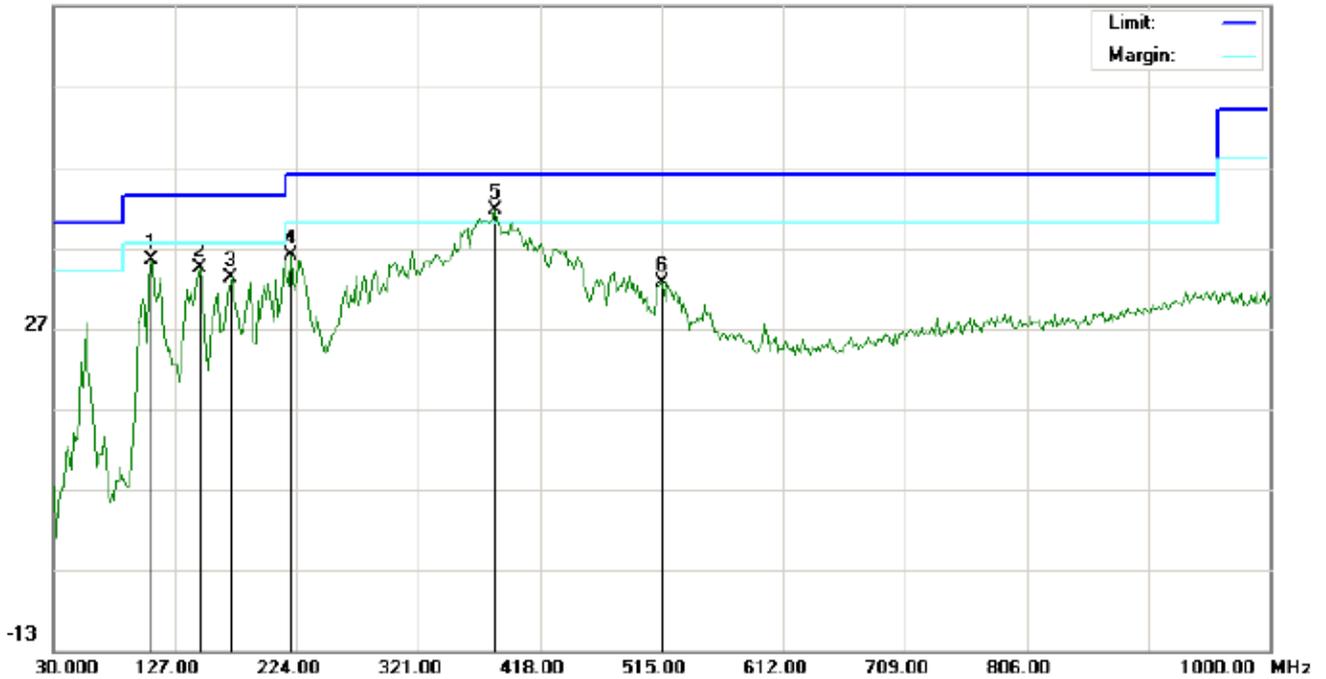


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		107.6000	26.61	8.72	35.33	43.50	-8.17	peak			
2		146.4000	20.83	13.64	34.47	43.50	-9.03	peak			
3		172.2666	22.52	10.78	33.30	43.50	-10.20	peak			
4		219.1500	26.03	10.05	36.08	46.00	-9.92	peak			
5	*	382.4332	22.75	18.95	41.70	46.00	-4.30	peak			
6		515.0000	11.10	21.53	32.63	46.00	-13.37	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

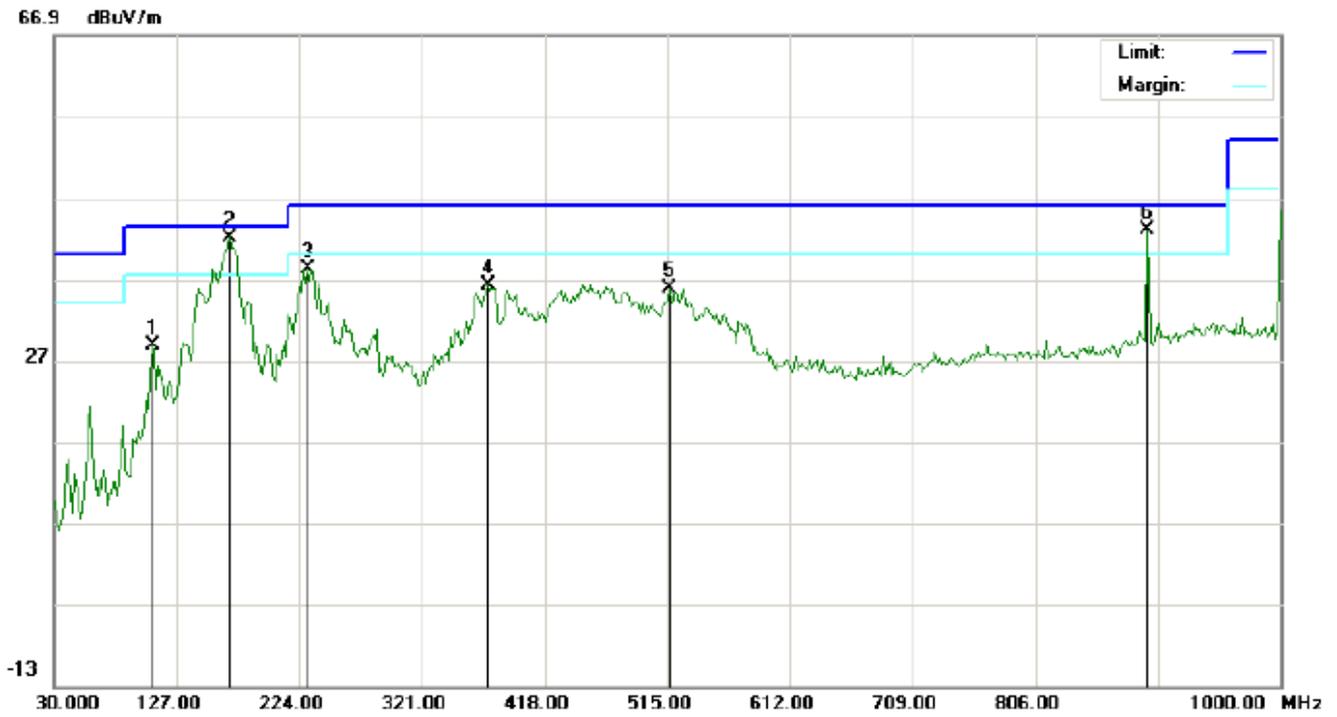

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		107.6000	28.21	0.68	28.89	43.50	-14.61	peak			
2	*	169.0333	27.34	14.76	42.10	43.50	-1.40	peak			
3		230.4667	26.31	11.99	38.30	46.00	-7.70	peak			
4		372.7333	17.39	18.89	36.28	46.00	-9.72	peak			
5		516.6167	14.23	21.58	35.81	46.00	-10.19	peak			
6	!	894.9167	14.52	28.48	43.00	46.00	-3.00	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

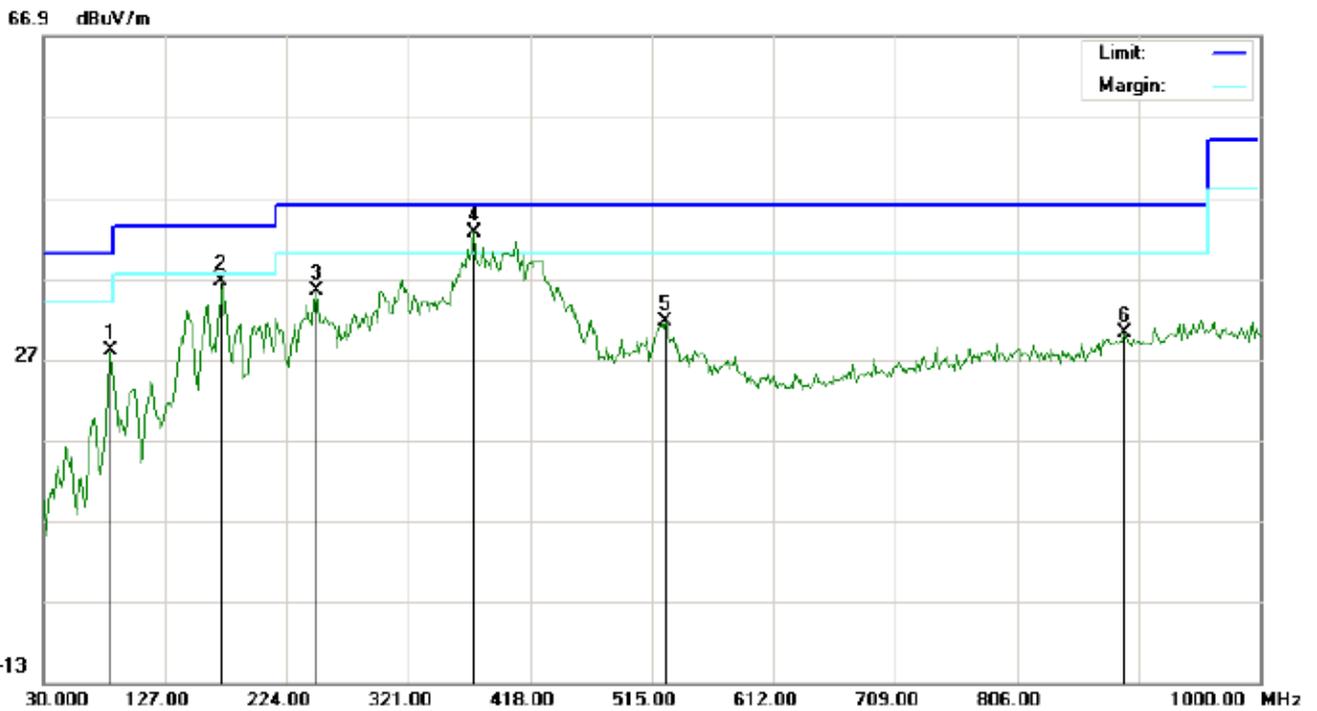


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		83.3500	27.46	0.50	27.96	40.00	-12.04	peak			
2		172.2666	25.83	10.78	36.61	43.50	-6.89	peak			
3		248.2500	28.38	7.08	35.46	46.00	-10.54	peak			
4	*	372.7333	23.71	18.89	42.60	46.00	-3.40	peak			
5		526.3167	9.85	21.84	31.69	46.00	-14.31	peak			
6		891.6833	1.83	28.39	30.22	46.00	-15.78	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

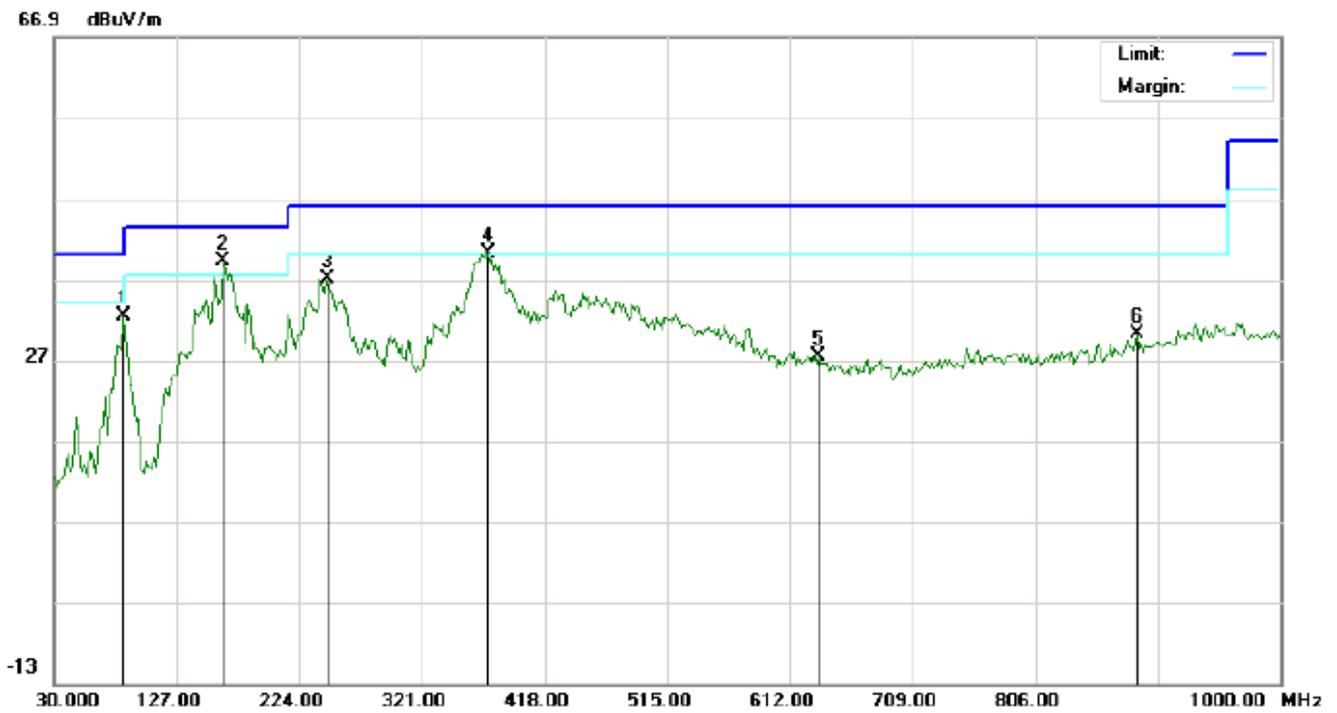

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		84.9666	28.77	3.58	32.35	40.00	-7.65	peak			
2	*	164.1833	24.22	15.07	39.29	43.50	-4.21	peak			
3		246.6333	23.41	13.57	36.98	46.00	-9.02	peak			
4	!	372.7333	21.30	18.89	40.19	46.00	-5.81	peak			
5		634.6332	3.91	23.51	27.42	46.00	-18.58	peak			
6		886.8333	2.02	28.27	30.29	46.00	-15.71	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION ABOVE 1GHz

RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

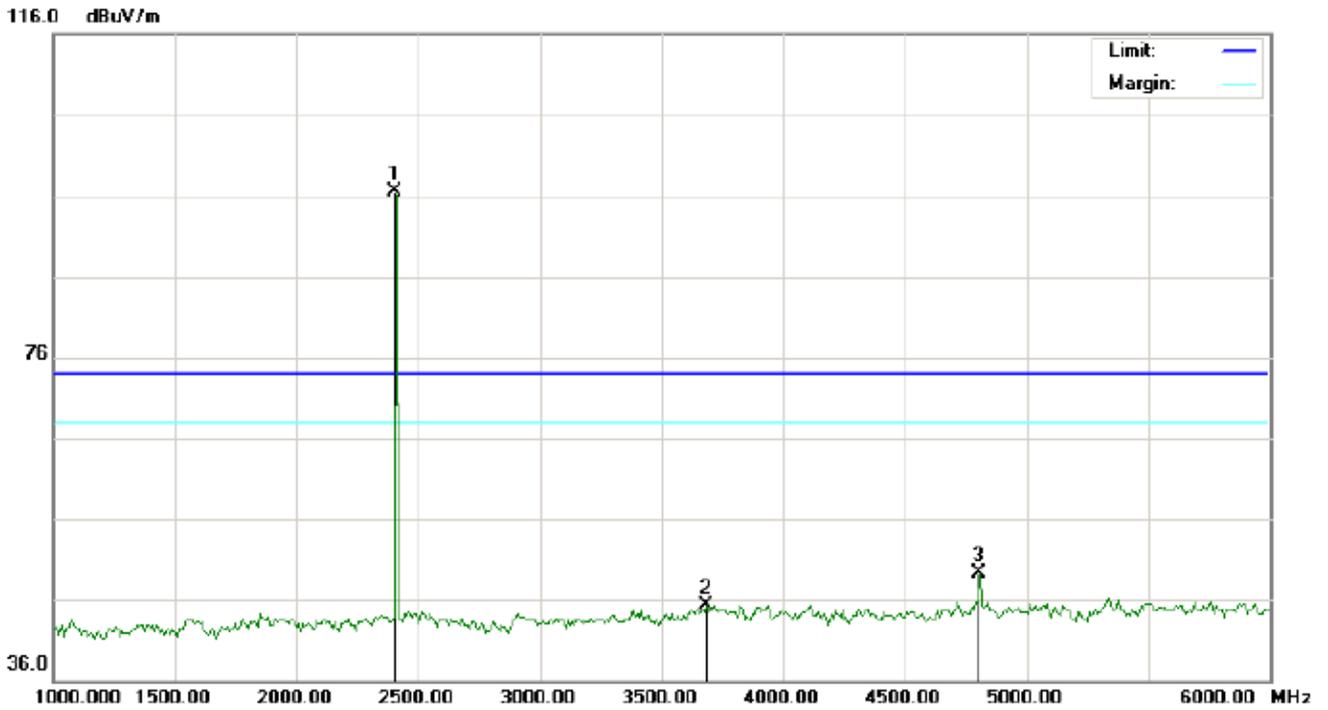


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2402.000	83.07	13.46	96.53	74.00	22.53	peak			
2		3683.333	32.00	13.24	45.24	74.00	-28.76	peak			
3		4804.000	41.71	7.69	49.40	74.00	-24.60	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL –VERTICAL

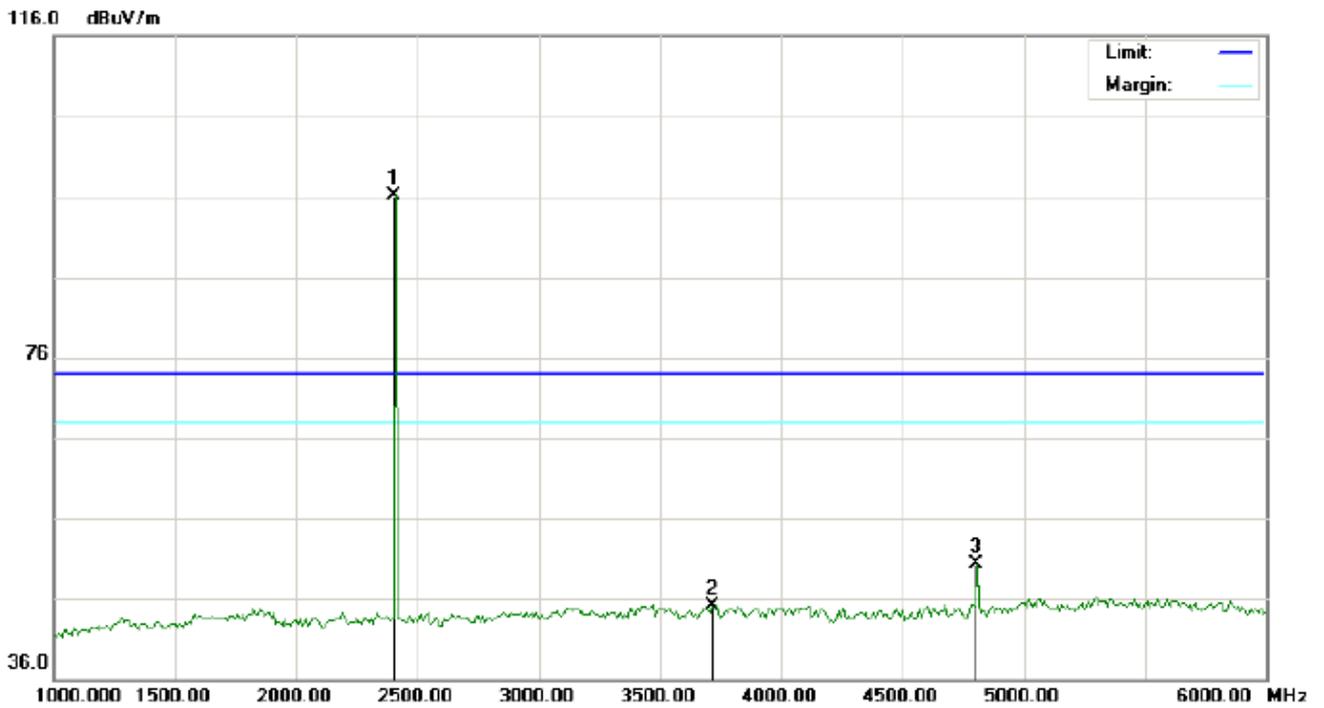


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	82.65	13.46	96.11	74.00	22.11	peak			
2		3716.667	31.58	13.44	45.02	74.00	-28.98	peak			
3		4804.000	42.55	7.69	50.24	74.00	-23.76	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

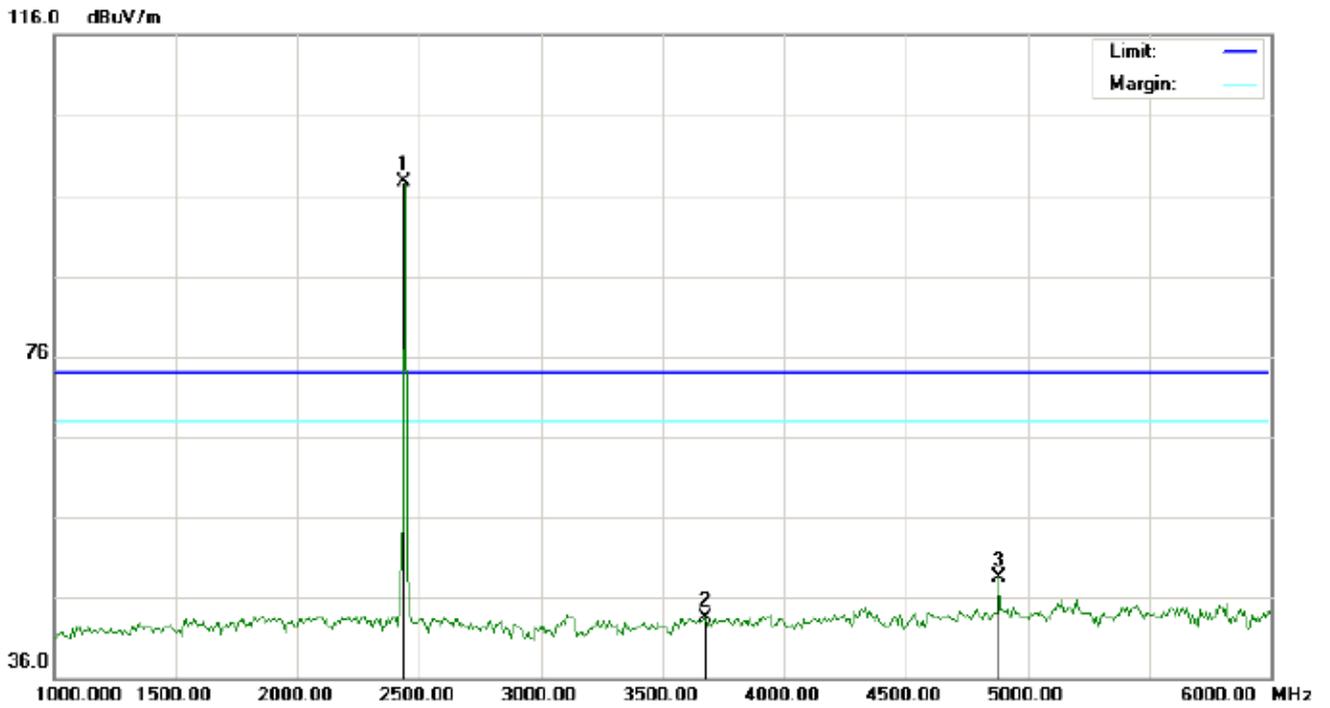


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2440.000	83.90	13.88	97.78	74.00	23.78	peak			
2		3675.000	30.25	13.19	43.44	74.00	-30.56	peak			
3		4880.000	40.66	7.89	48.55	74.00	-25.45	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics) - MIDDLE CHANNEL –VERTICAL

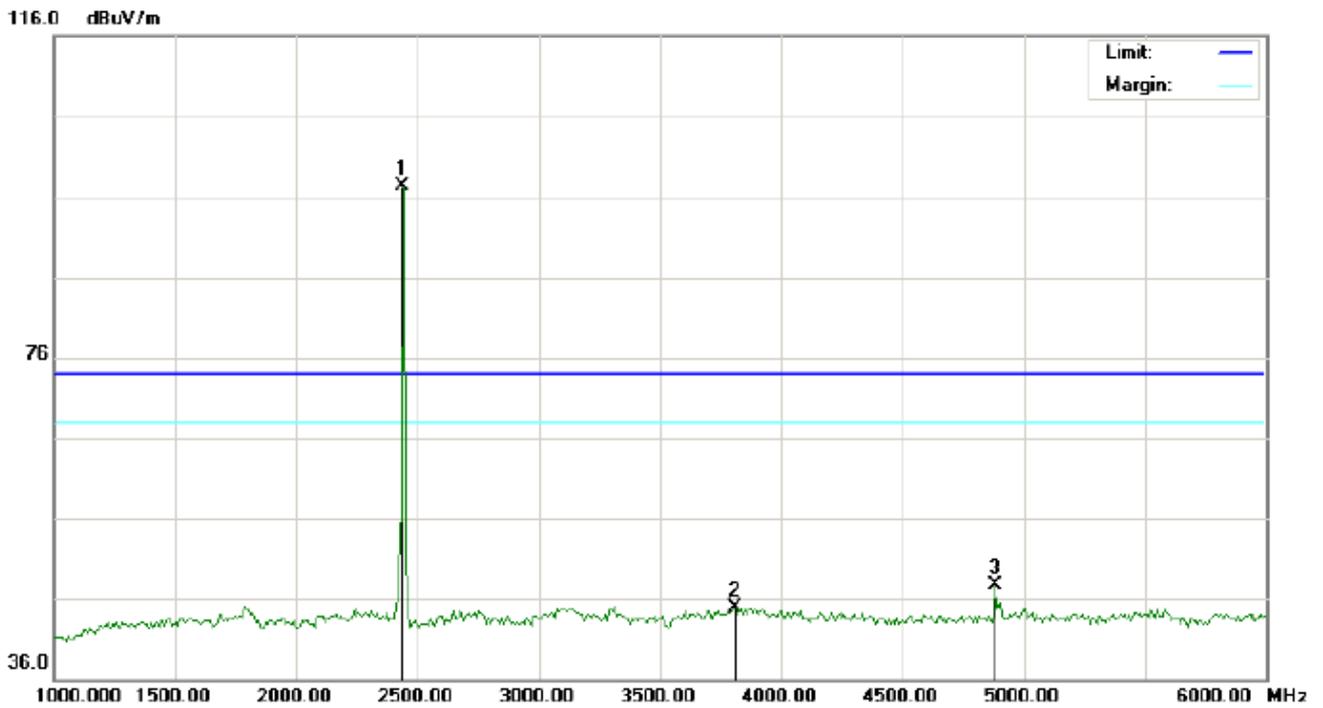


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2440.000	83.49	13.88	97.37	74.00	23.37	peak			
2		3808.333	30.99	14.01	45.00	74.00	-29.00	peak			
3		4880.000	39.89	7.89	47.78	74.00	-26.22	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL-HORIZONTAL

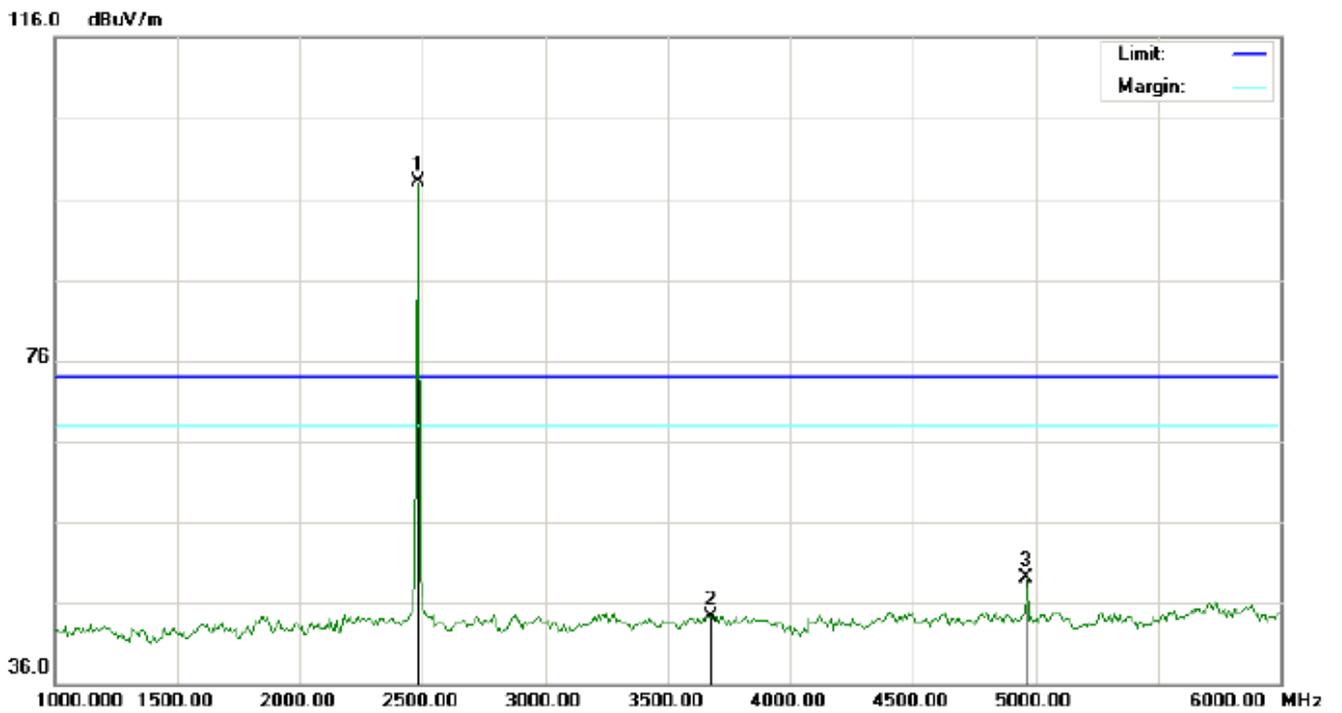


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.97	14.11	98.08	74.00	24.08	peak			
2		3675.000	31.20	13.19	44.39	74.00	-29.61	peak			
3		4960.000	41.10	8.09	49.19	74.00	-24.81	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL –VERTICAL

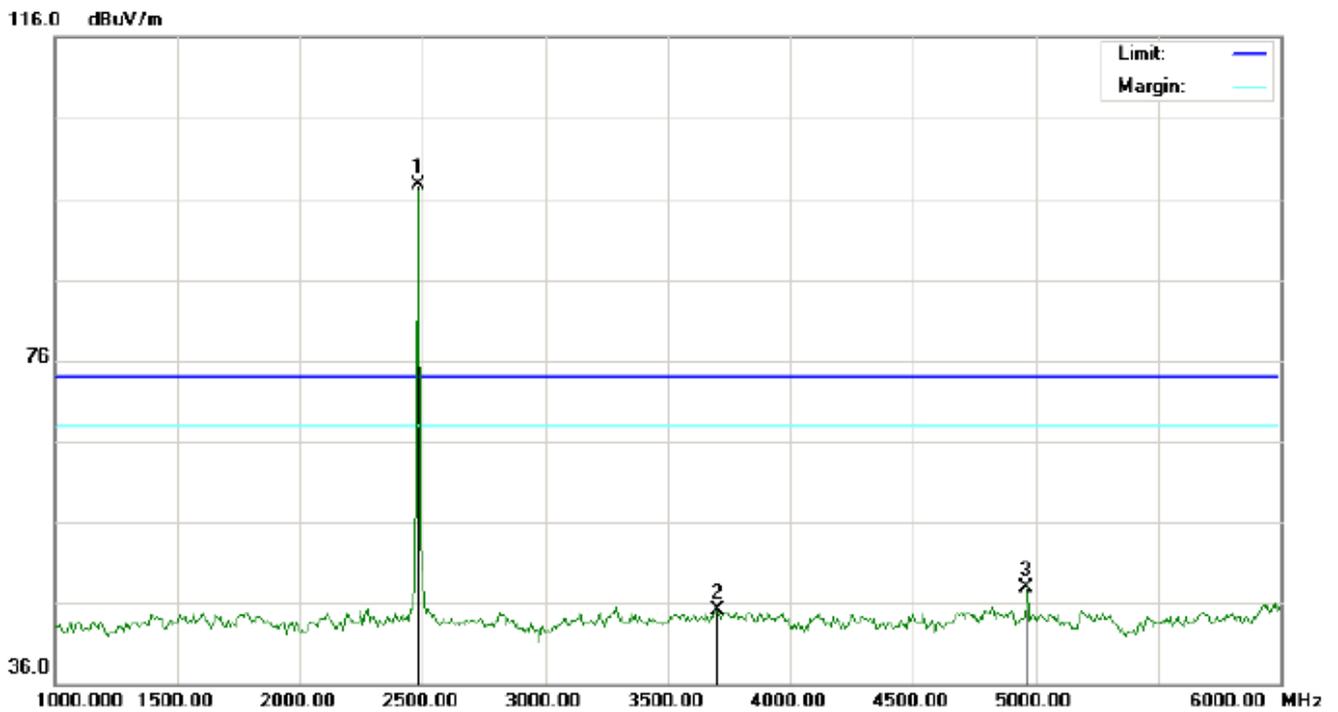

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2480.000	83.53	14.11	97.64	74.00	23.64	peak			
2		3700.000	31.67	13.34	45.01	74.00	-28.99	peak			
3		4960.000	39.91	8.09	48.00	74.00	-26.00	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system




5. PEAK OUTPUT POWER

5.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3. $RBW >$ the 20 dB bandwidth of the emission being measured, $VBW \geq RBW$.
4. Record the maximum power from the Spectrum Analyzer.
5. The maximum peak power shall be less 21dBm.

5.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

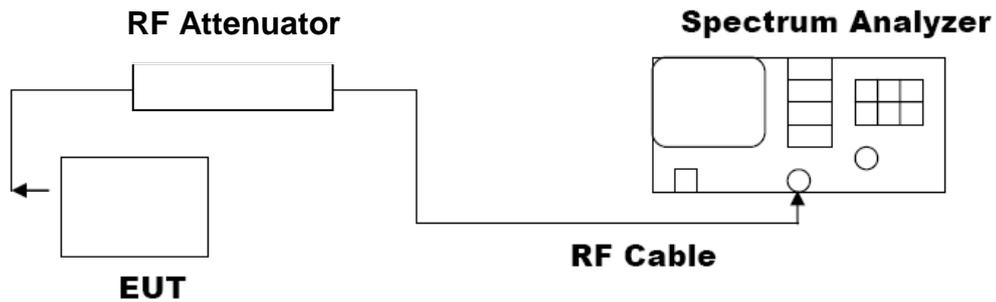




5.3. LIMITS AND MEASUREMENT RESULT

For BR/EDR


PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-2.52	21	Pass
2.441	-2.02	21	Pass
2.480	-2.42	21	Pass

CH0

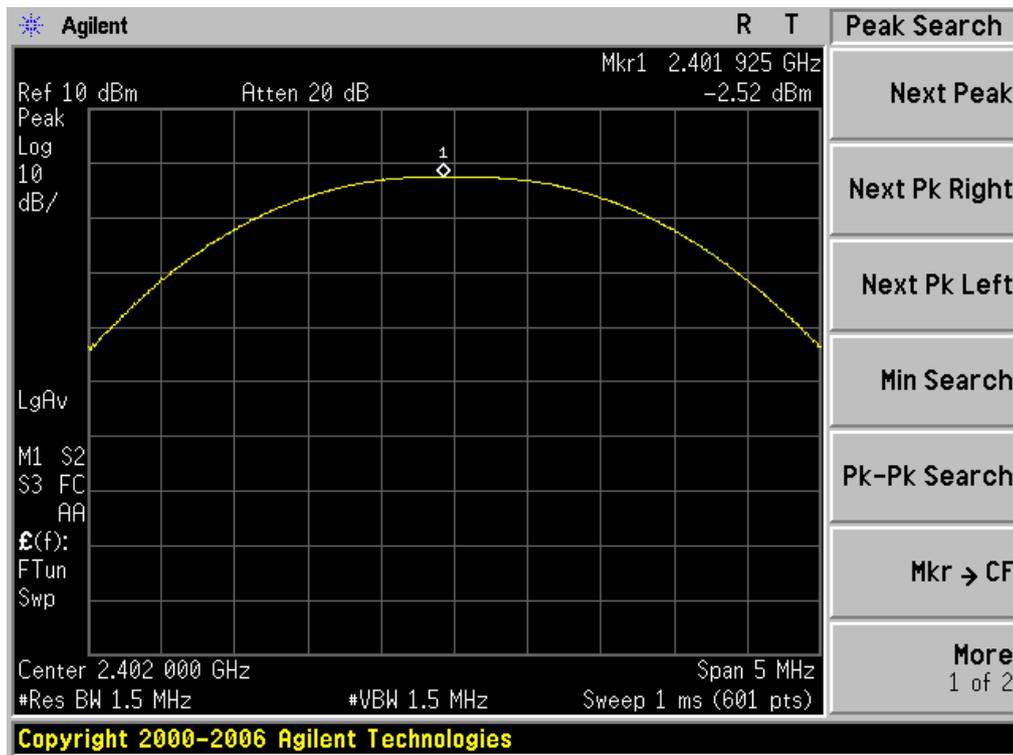




CH39

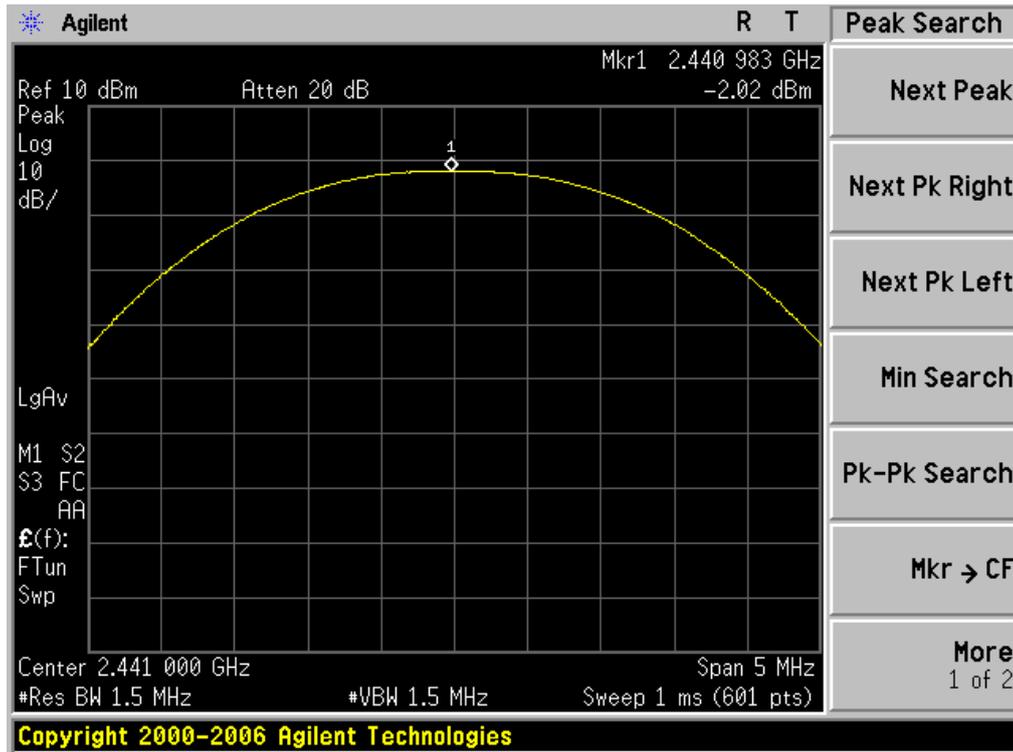


CH78

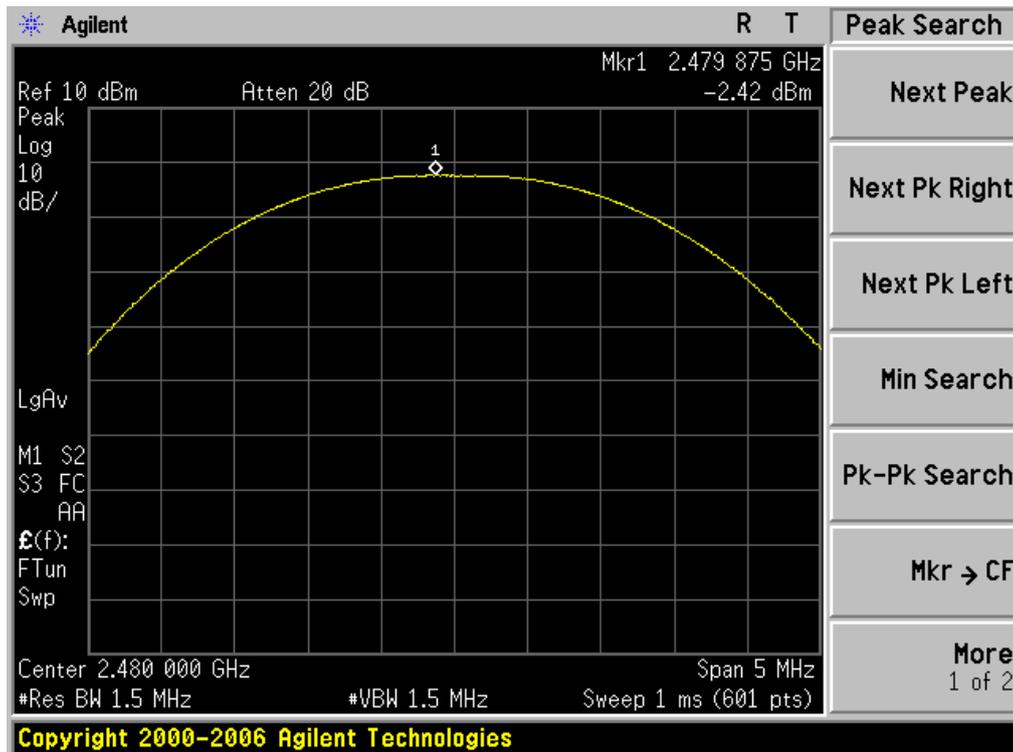




PEAK OUTPUT POWER MEASUREMENT RESULT FOR $\pi/4$ -DQPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-1.31	21	Pass
2.441	-0.83	21	Pass
2.480	-1.27	21	Pass

CH0

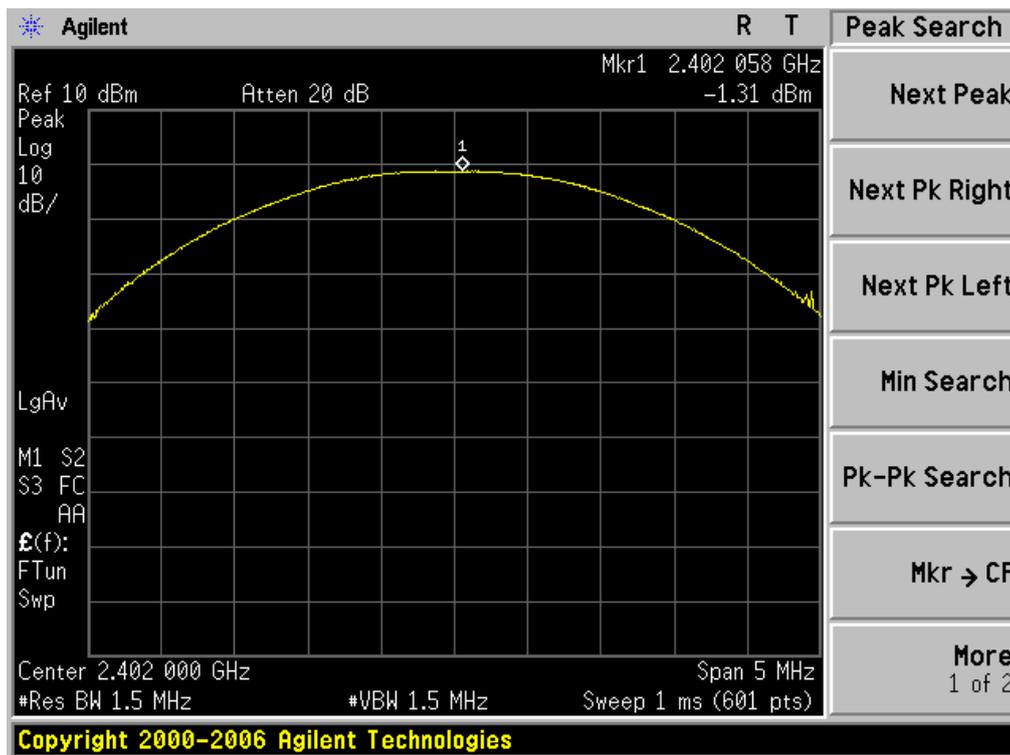




CH39

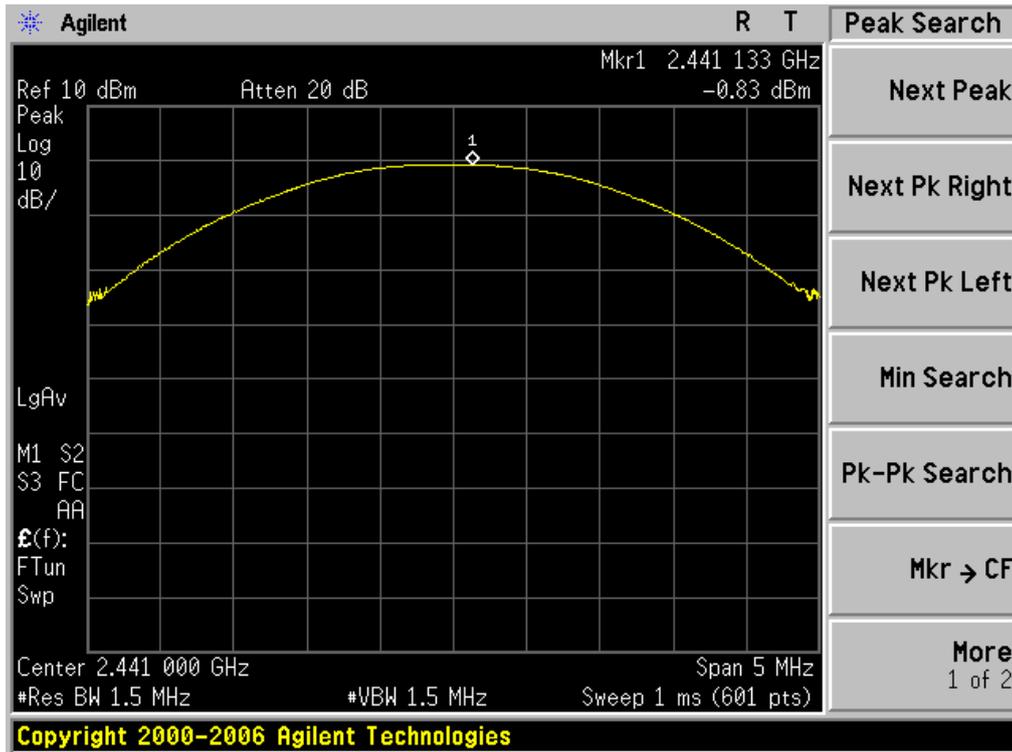


CH78

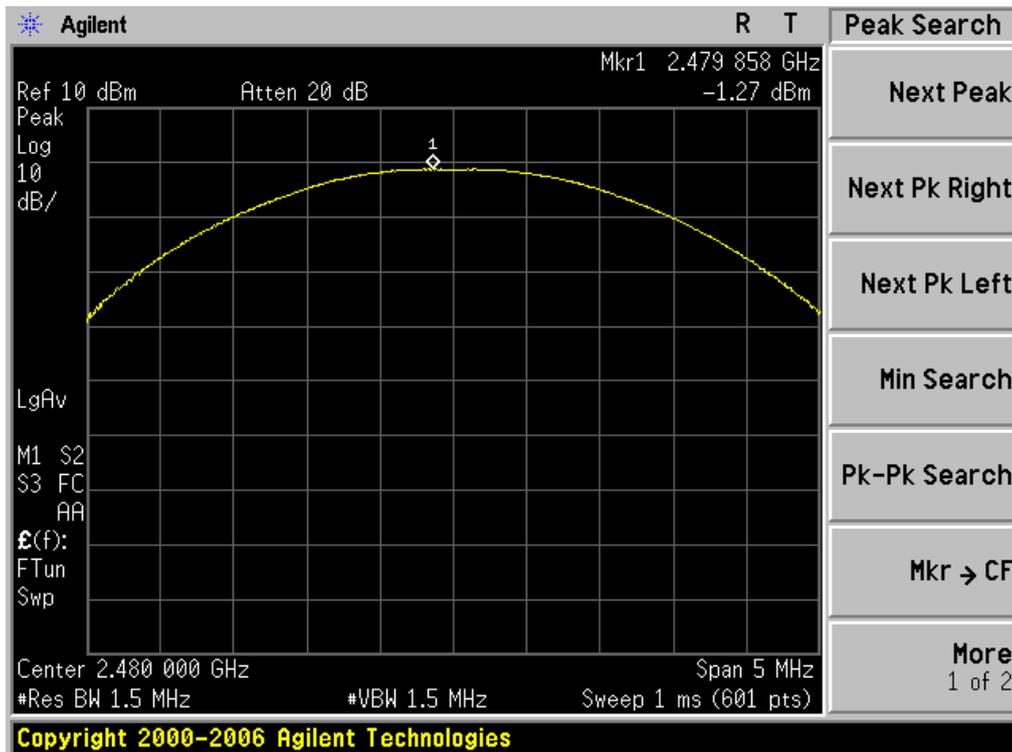




PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8DPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-1.03	21	Pass
2.441	-0.59	21	Pass
2.480	-0.96	21	Pass

CH0

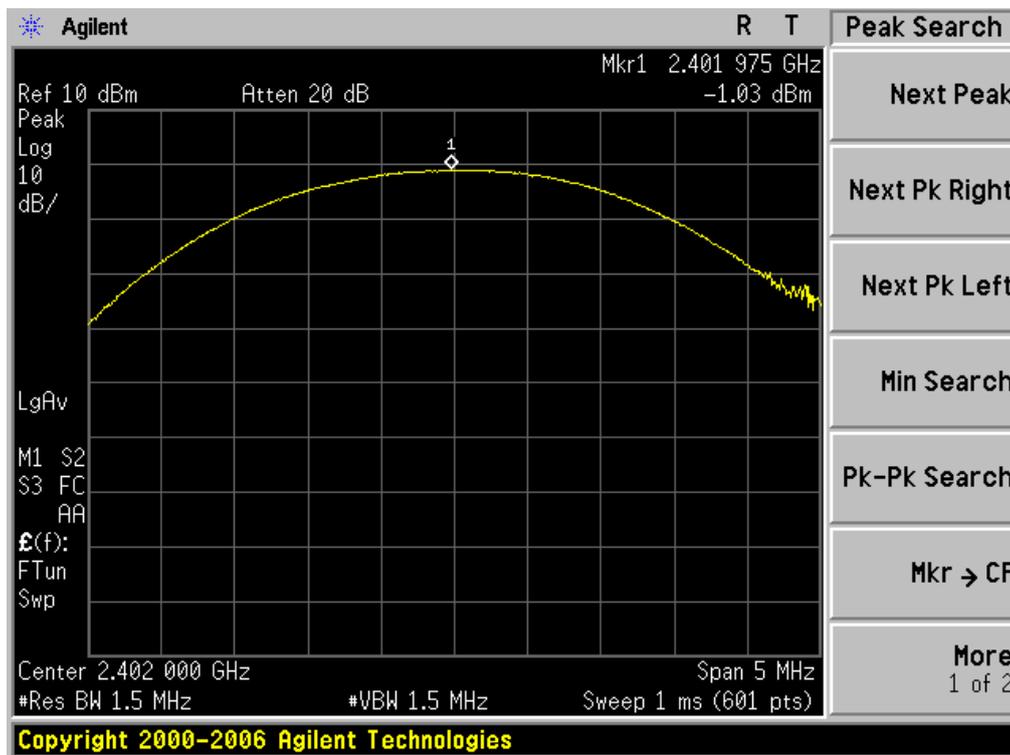




CH39

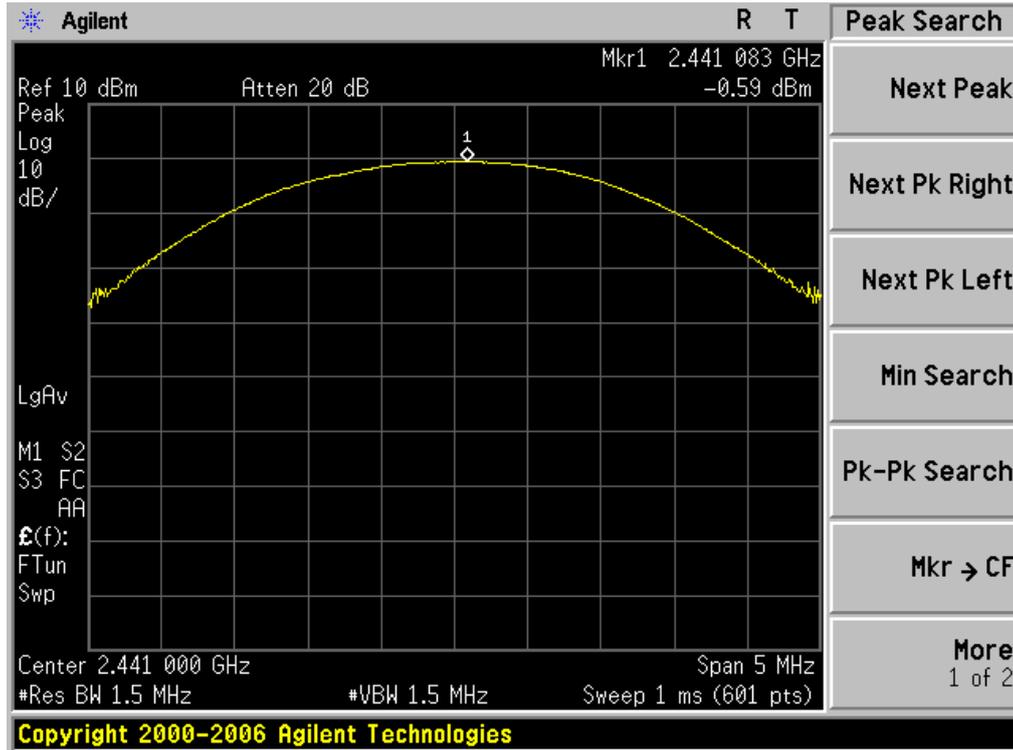

CH78

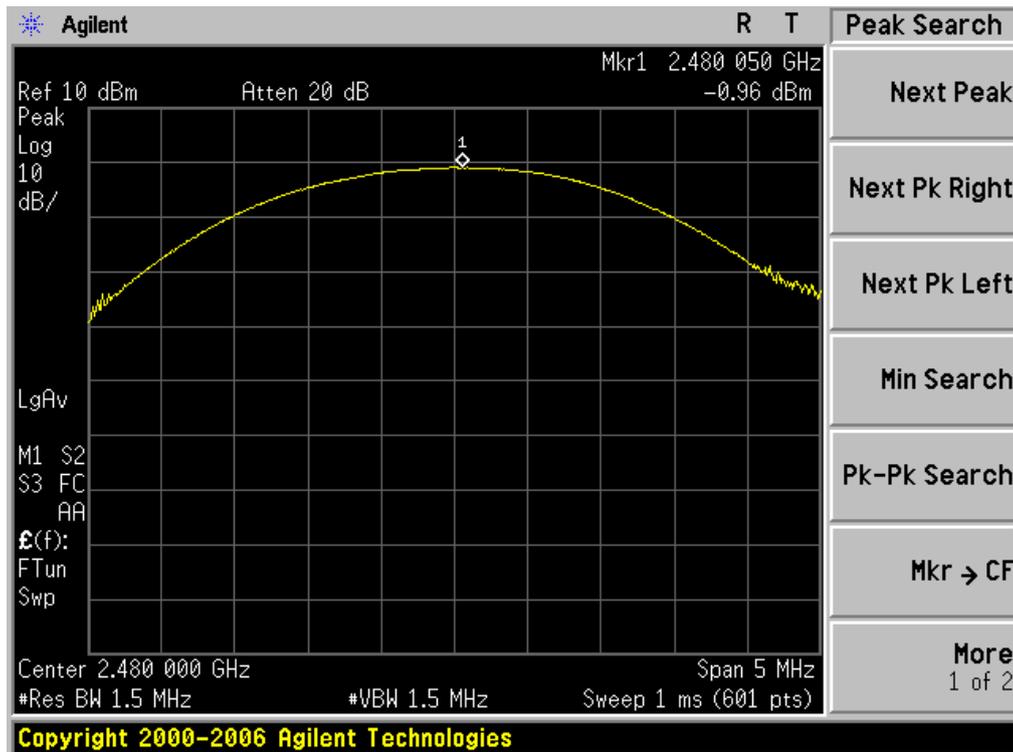




For BLE


PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-2.26	30	Pass
2.440	-1.63	30	Pass
2.480	-1.79	30	Pass

CH0

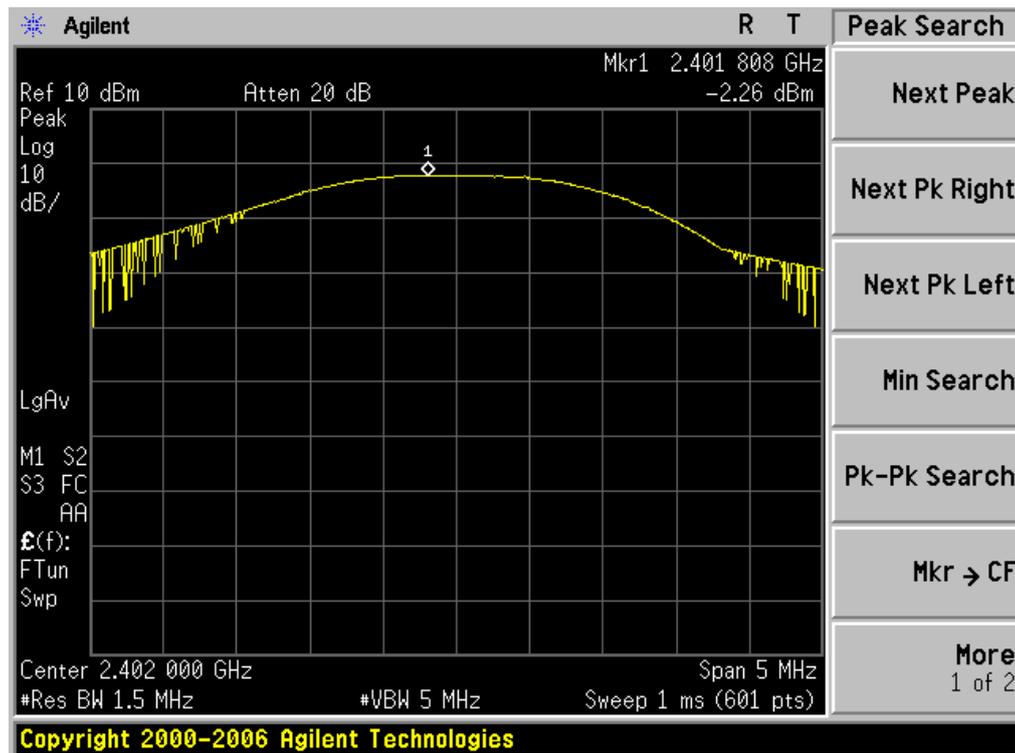




CH39

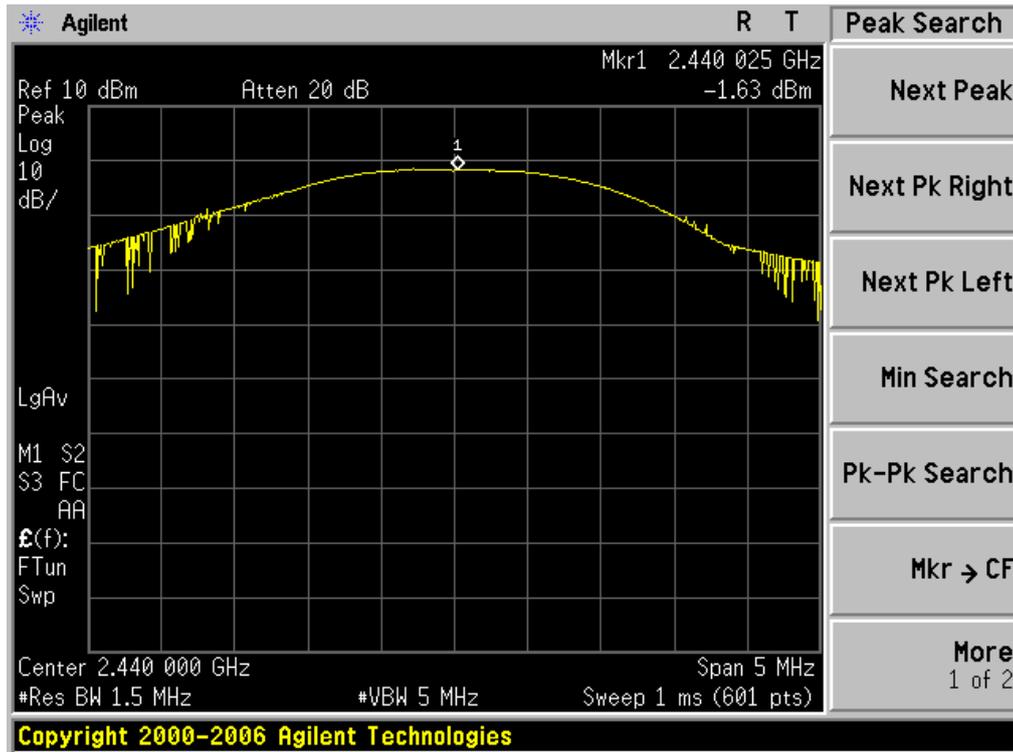

CH78

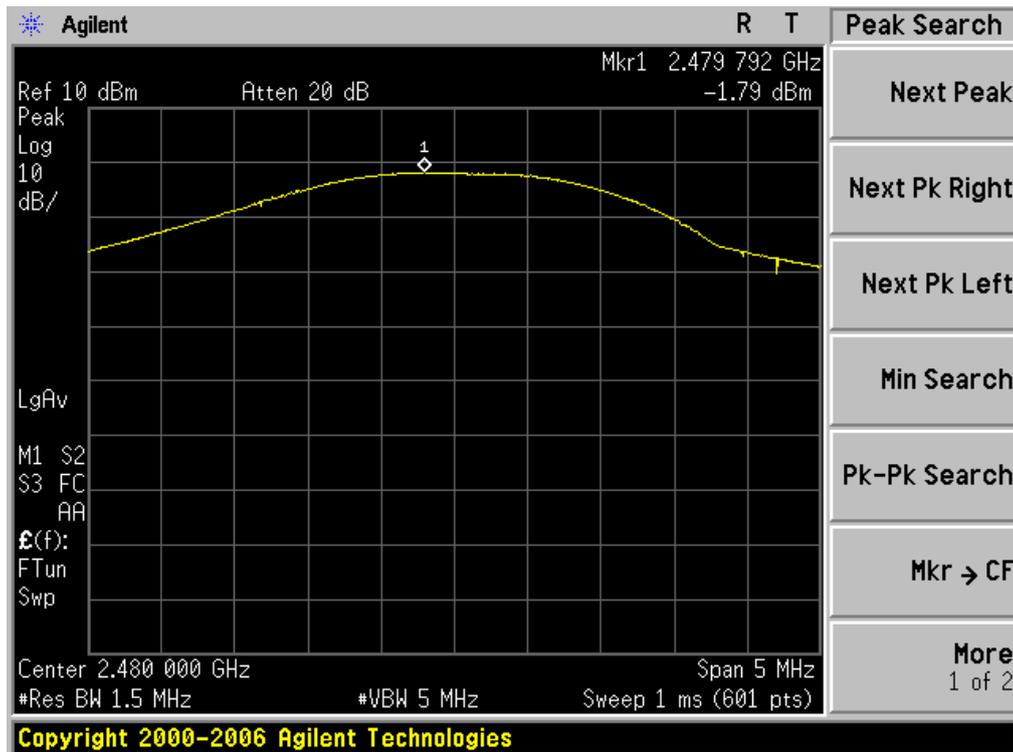

6. ANTENNA REQUIREMENT


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

ANTENNA

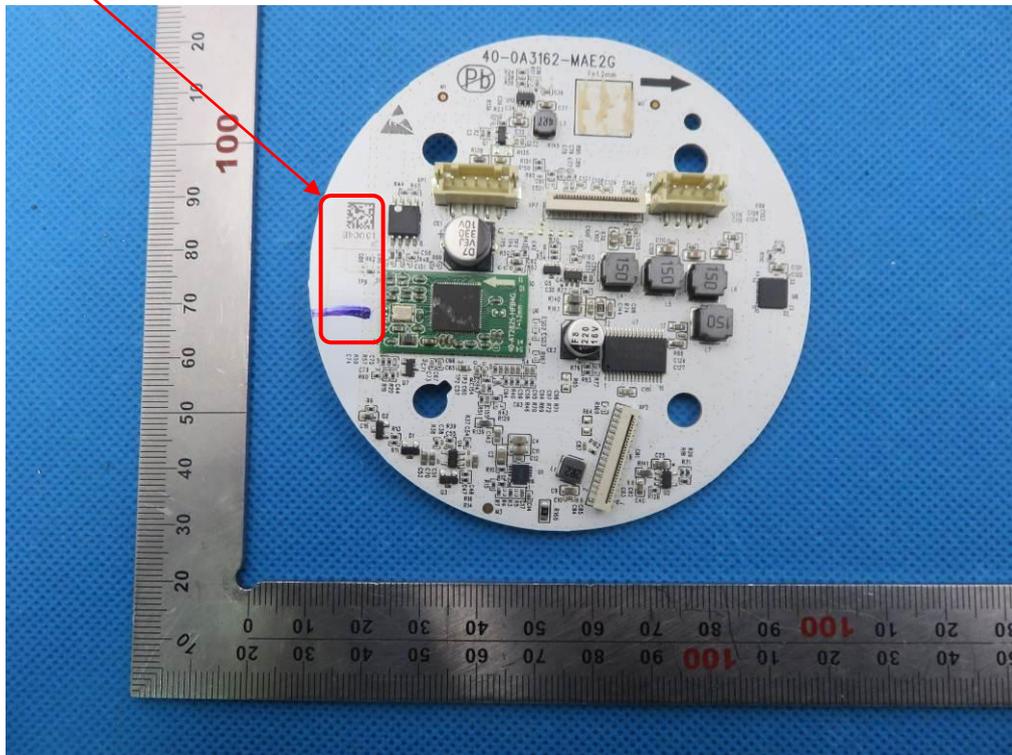

7. PHOTOGRAPH OF TEST

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP







8. PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT

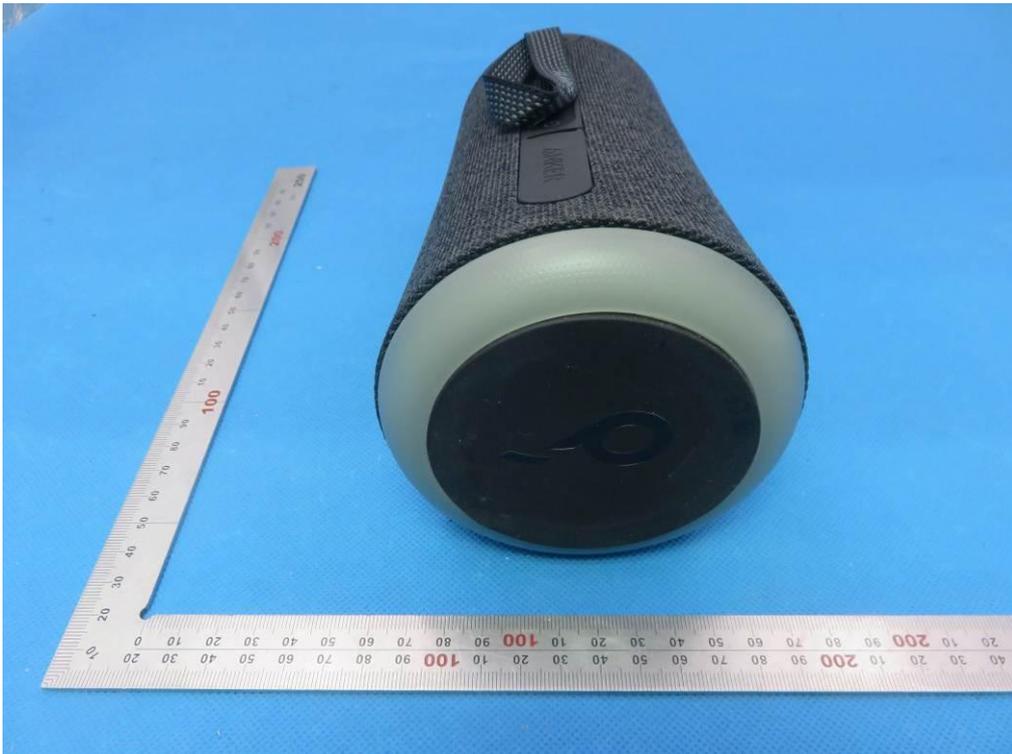

VIEW OF EUT (PORT)



OPEN VIEW OF EUT




VIEW OF BATTERY-1




VIEW OF BATTERY-2




INTERNAL VIEW OF EUT-1

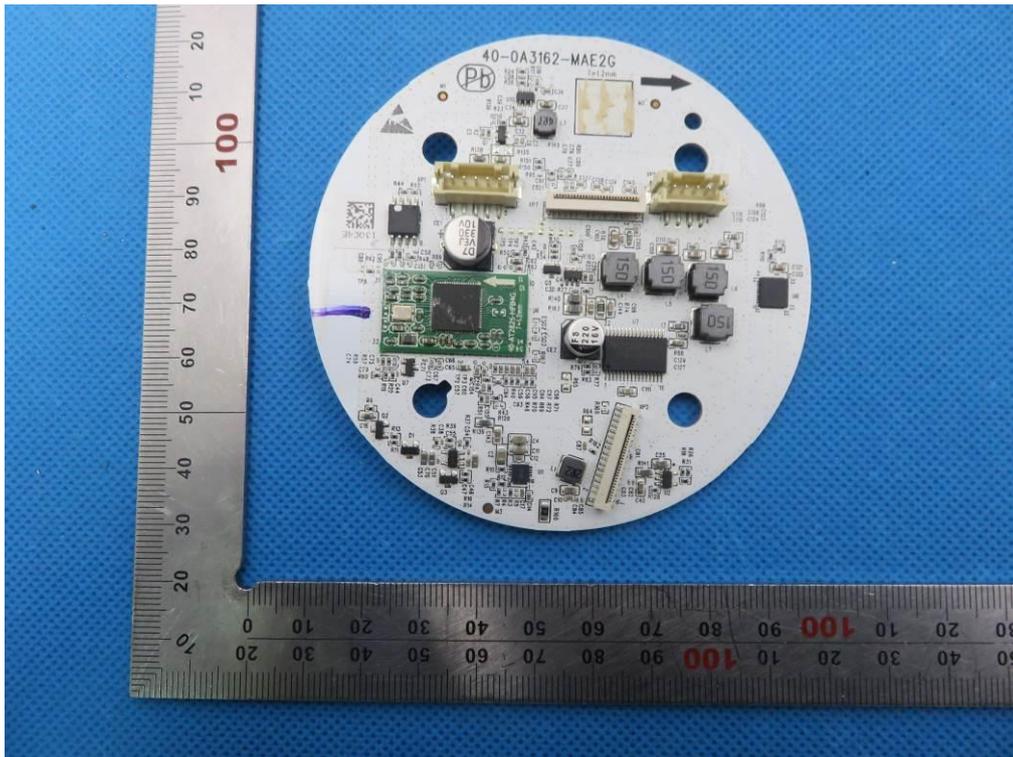


INTERNAL VIEW OF EUT-2

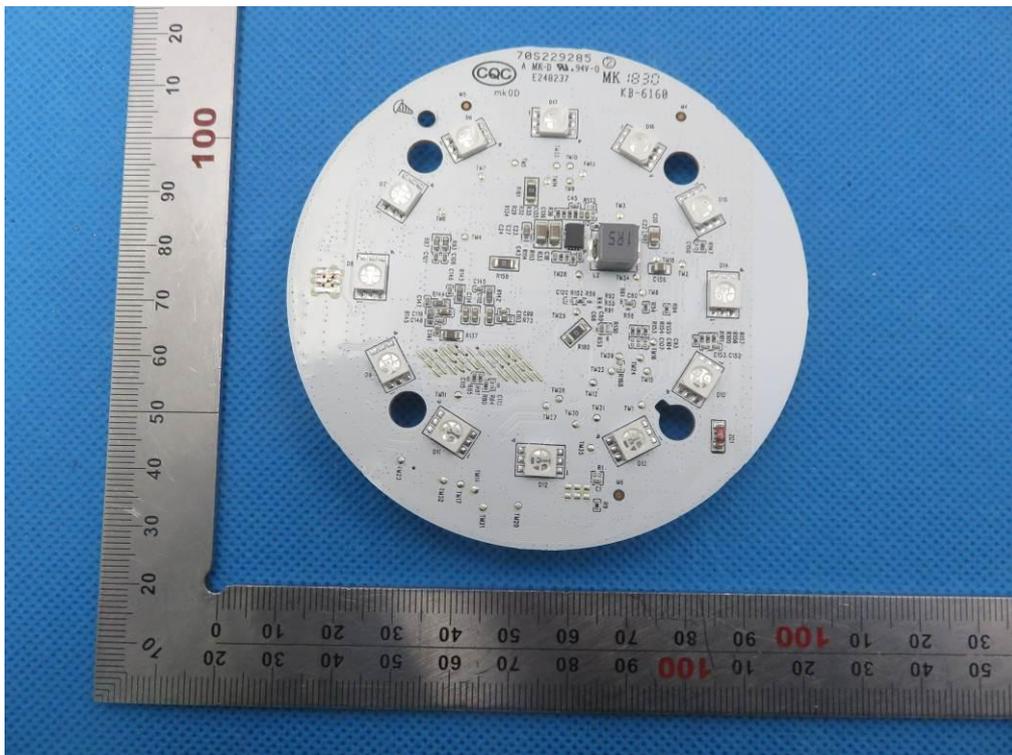


INTERNAL VIEW OF EUT-3

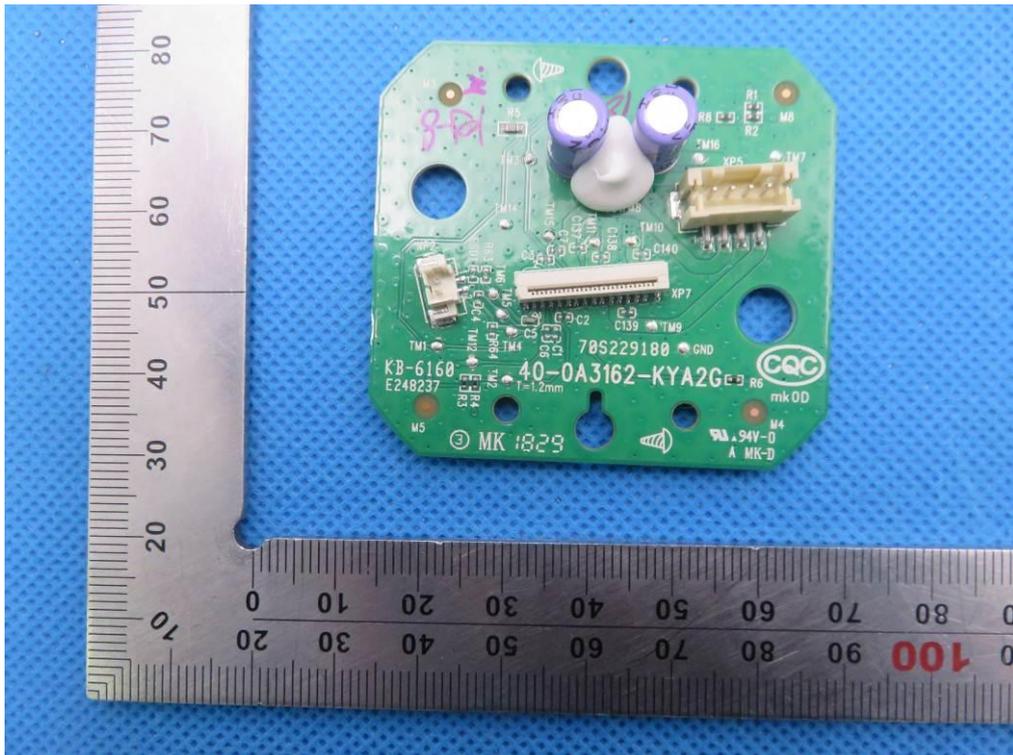


INTERNAL VIEW OF EUT-4

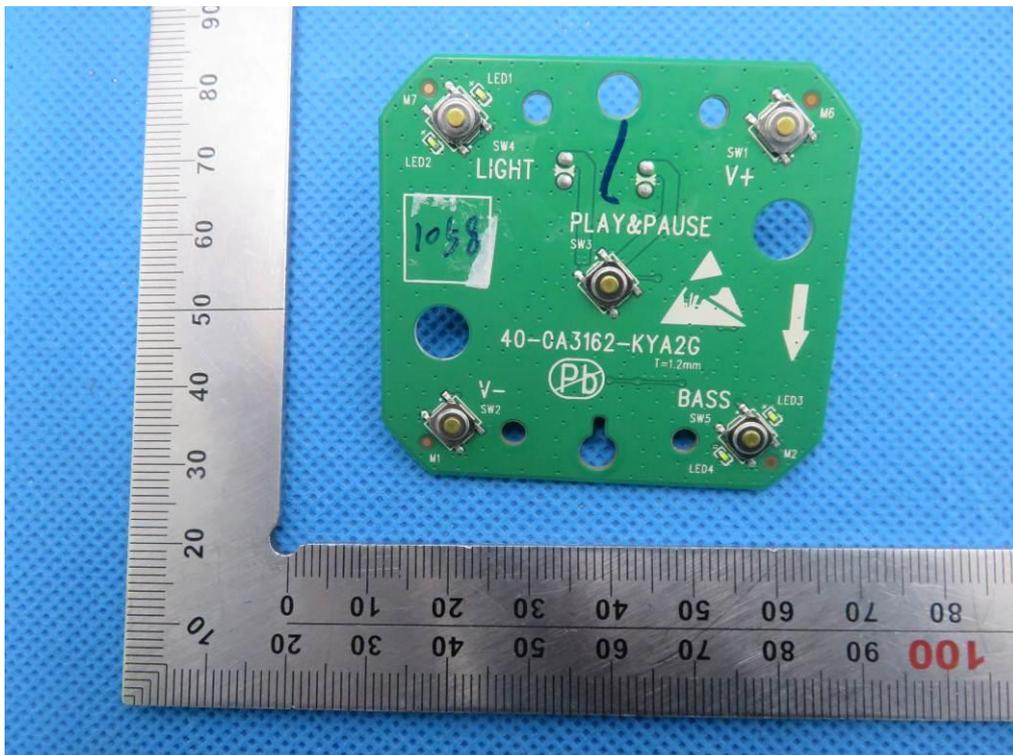

INTERNAL VIEW OF EUT-5

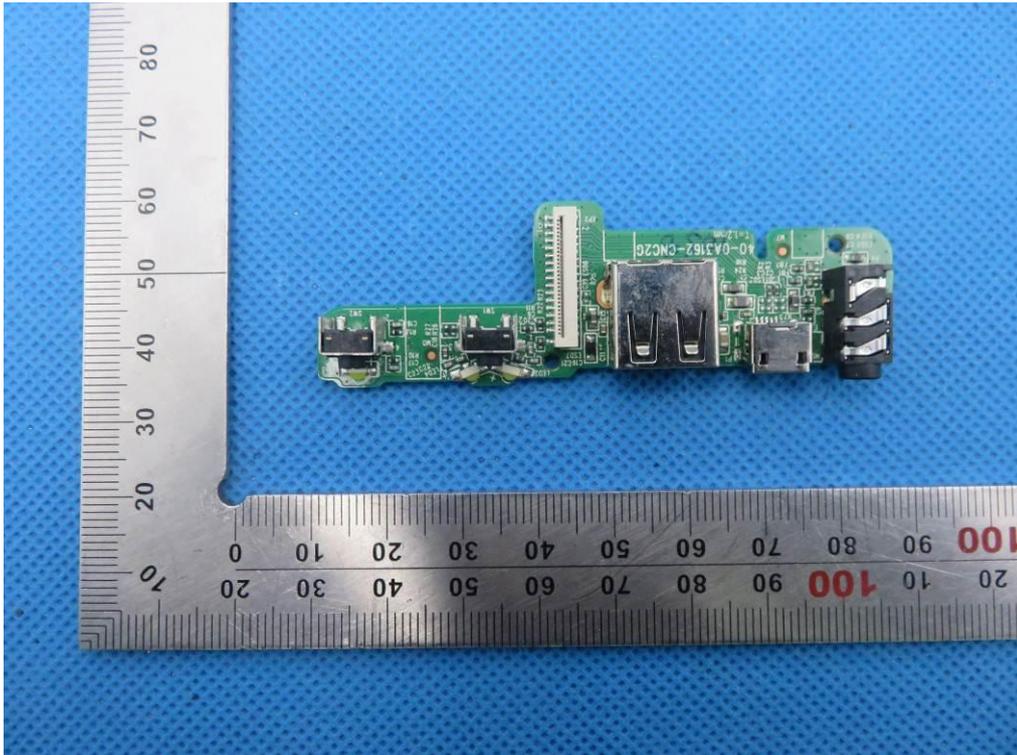

INTERNAL VIEW OF EUT-6

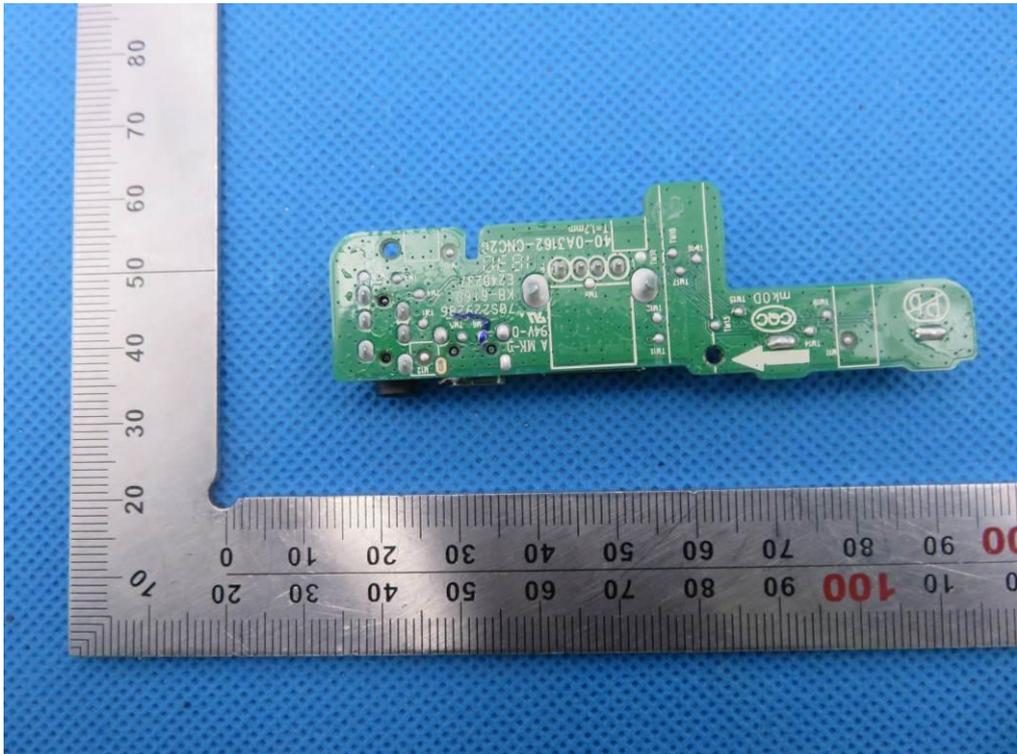

INTERNAL VIEW OF EUT-7



VIEW OF ADAPTER (AE)



The adapter was supplied by HUAKE

--END OF REPORT--