



REPORT No.: SZ19010095W02

TEST REPORT

APPLICANT : Anker Innovations Limited

PRODUCT NAME : Soundcore Sport Air

MODEL NAME : A3405

BRAND NAME : Soundcore

FCC ID : 2AOKB-A3405

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2019-01-14

TEST DATE : 2019-01-17 to 2019-01-27

ISSUE DATE : 2019-01-30

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna requirement	7
2.2. Number of Hopping Frequency	7
2.3. Peak Output Power	11
2.4. 20dB Bandwidth	18
2.5. Carried Frequency Separation	25
2.6. Time of Occupancy (Dwell time)	28
2.7. Conducted Spurious Emissions	35
2.8. Conducted Emission	48
2.9. Restricted Frequency Bands	50
2.10. Radiated Emission	59
Annex A Test Uncertainty	72
Annex B Testing Laboratory Information	73



REPORT No.: SZ19010095W02

Change History		
Version	Date	Reason for change
1.0	2019-01-30	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited
Applicant Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacturer:	Anker Innovations Limited
Manufacturer Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong

1.2. Equipment Under Test (EUT) Description

Product Name:	Soundcore Sport Air	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	V4.0	
Software Version:	V1.1	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz);	
Bluetooth Version:	Bluetooth classic	
Antenna Type:	Ceramic Antenna	
Antenna Gain:	2.0 dBi	
Accessory Information:	Battery	
	Brand Name:	VDL
	Model No.:	VDL 501225
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	95mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2 V

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).



Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Jan 23, 2019	Zhou Zijiang	PASS
3	15.247(b)	Peak Output Power	Jan 23, 2019	Zhou Zijiang	PASS
4	15.247(a)	20dB Bandwidth	Jan 23, 2019	Zhou Zijiang	PASS
5	15.247(a)	Carrier Frequency Separation	Jan 23, 2019	Zhou Zijiang	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Jan 17, 2019	Zhou Zijiang	PASS
7	15.247(d)	Conducted Spurious Emission	Jan 23, 2019	Zhou Zijiang	PASS
8	15.207	Conducted Emission	N/A	N/A	N/A ^{Note1}
9	15.247(d)	Restricted Frequency Bands	Jan 27, 2019	Wang Luan	PASS
10	15.209, 15.247(d)	Radiated Emission	Jan 27, 2019	Wang Luan	PASS

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.



1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

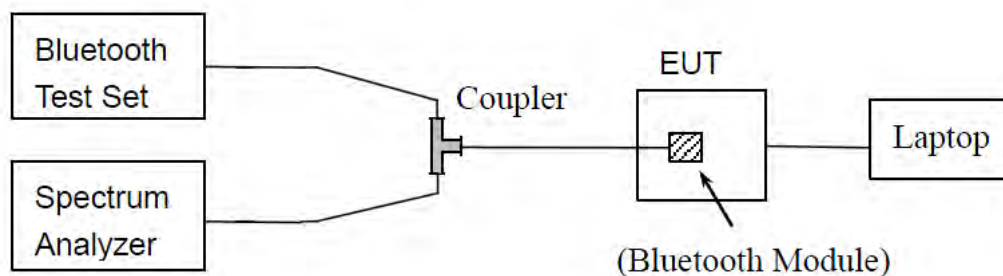

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

**B. Equipments List:**

Please reference ANNEX B(4).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS



B. Test Plots:



(GFSK)

 $(\pi/4\text{-DQPSK})$



(8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

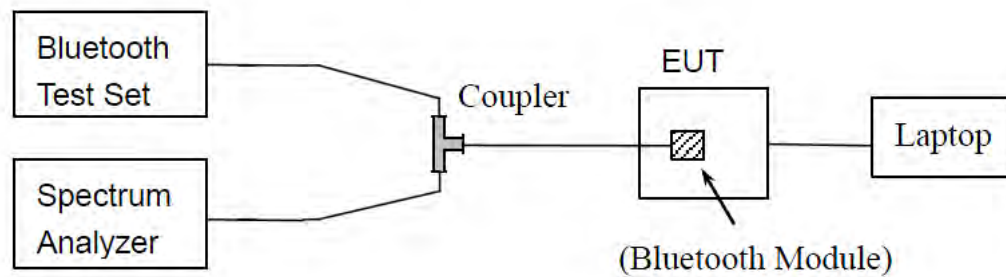

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).



2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module.

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.36	0.003	20.97	0.125	PASS
39	2441	5.07	0.003			PASS
78	2480	4.97	0.003			PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)



$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	6.94	0.005	20.97	0.125	PASS
39	2441	7.59	0.006			PASS
78	2480	7.31	0.005			PASS

B. Test Plots:



($\pi/4$ -DQPSK, Channel 0, 2402MHz)



(π/4-DQPSK, Channel 39, 2441MHz)



(π/4-DQPSK, Channel 78, 2480MHz)



8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	8.86	0.008	20.97	0.125	PASS
39	2441	7.97	0.006			PASS
78	2480	7.72	0.006			PASS

B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)

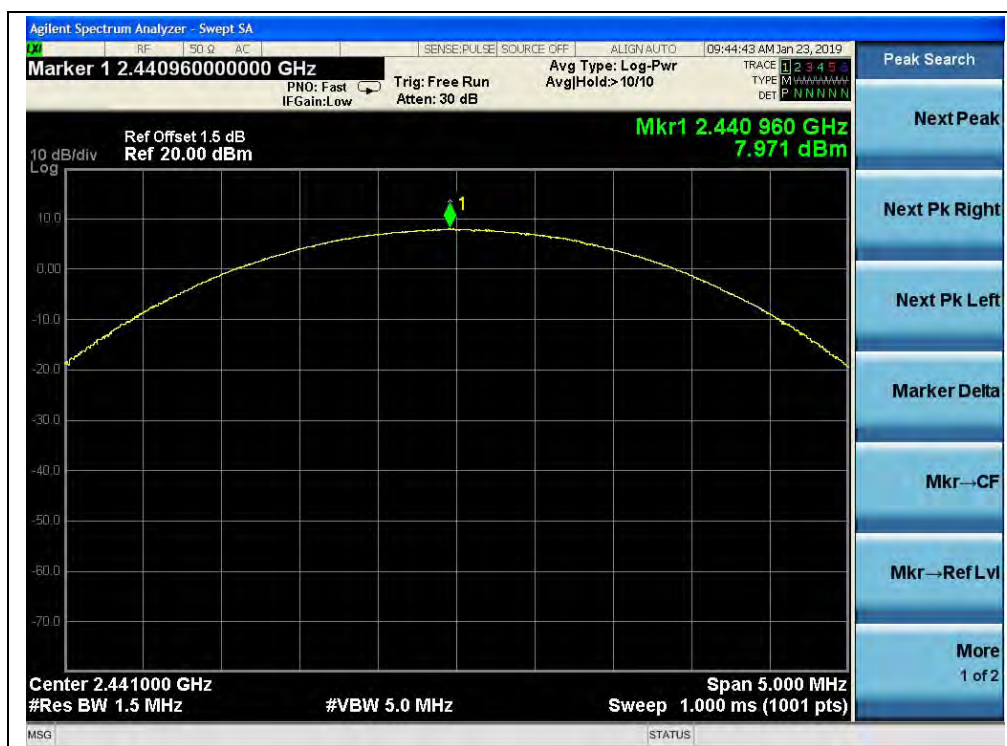

(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

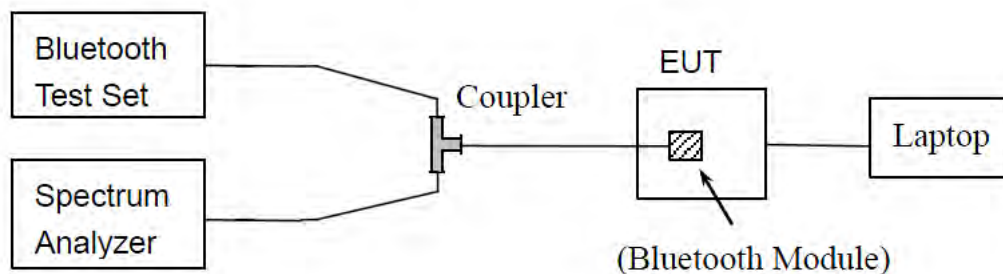

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.4.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.922	PASS
39	2441	0.963	PASS
78	2480	0.960	PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)



π/4-DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.370	PASS
39	2441	1.366	PASS
78	2480	1.368	PASS

B. Test Plots:



(π/4-DQPSK, Channel 0, 2402MHz)



($\pi/4$ -DQPSK, Channel 39, 2441MHz)



($\pi/4$ -DQPSK, Channel 78, 2480MHz)



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.353	PASS
39	2441	1.352	PASS
78	2480	1.352	PASS

B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)



(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

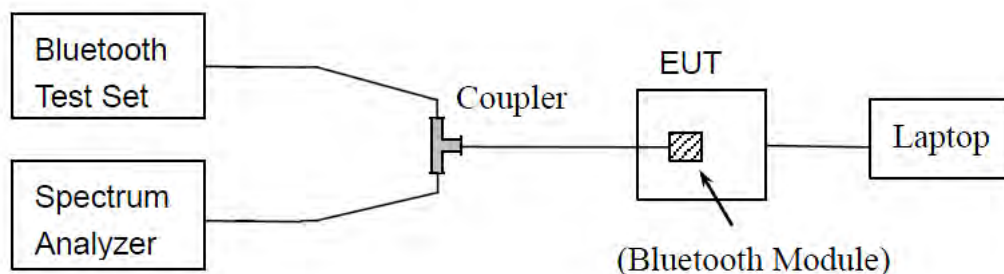

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.002	0.922	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.005	1.366		PASS
8-DPSK	39 and 40	1.002	1.352		PASS



(GFSK)



($\pi/4$ -DQPSK)



(8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

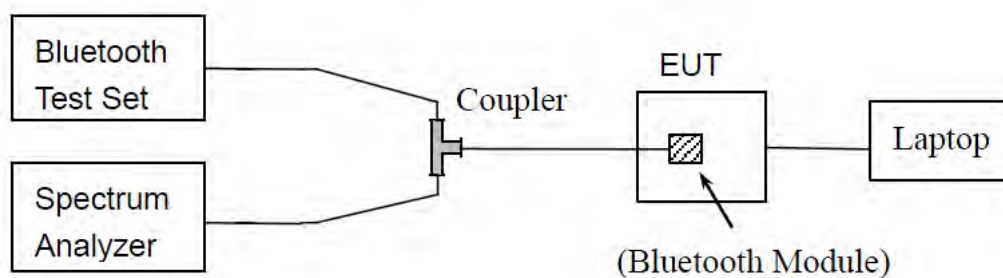

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).

2.6.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond




2.6.4. Test Result

GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.38	121.60	60.80	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.88	307.20	153.60		PASS


B. Test Plots:

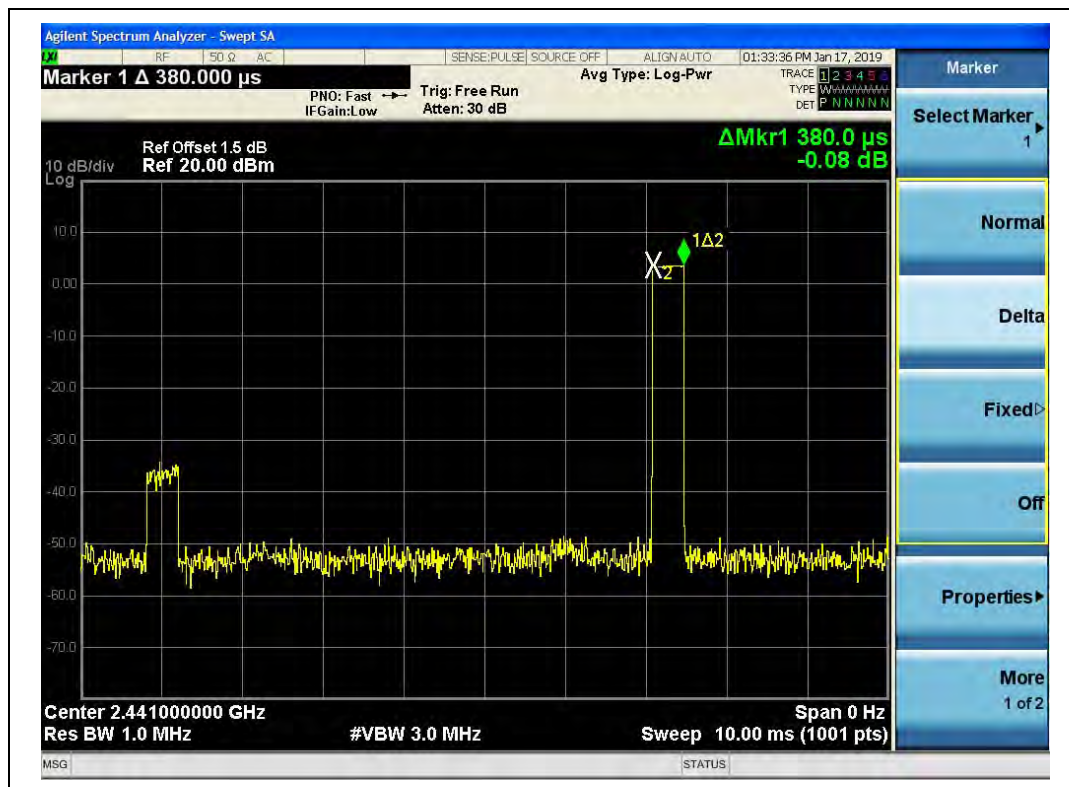

(DH1, GFSK)

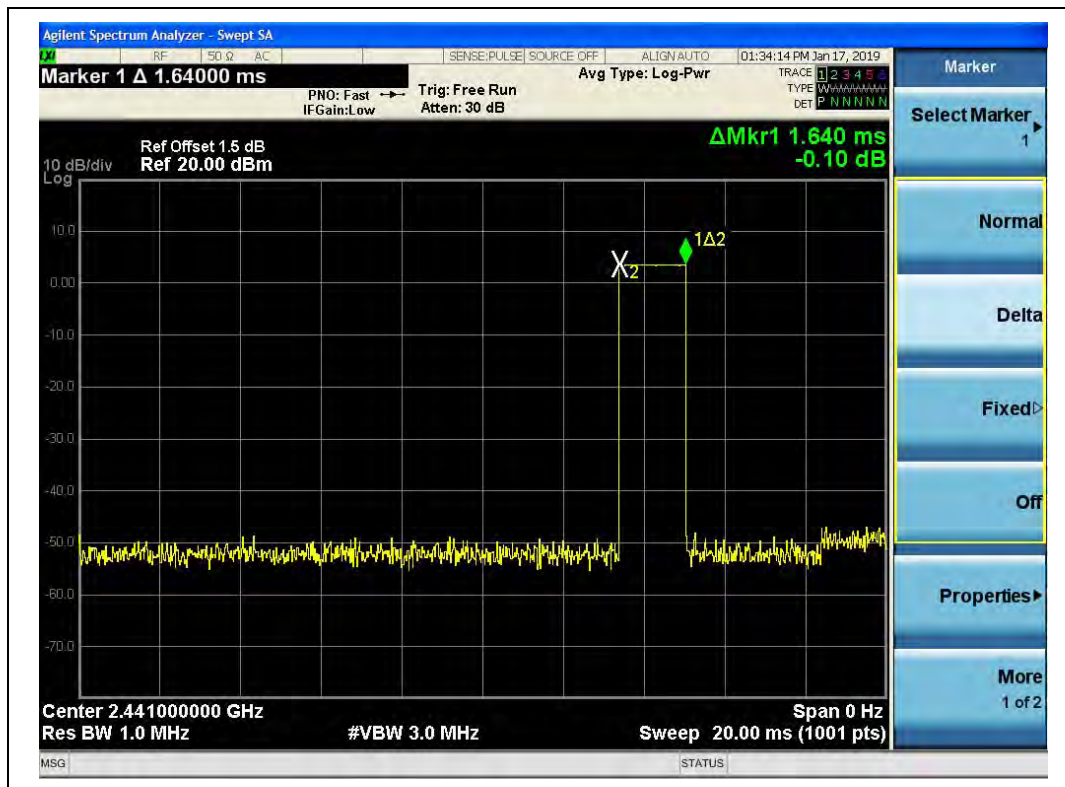

(DH3, GFSK)

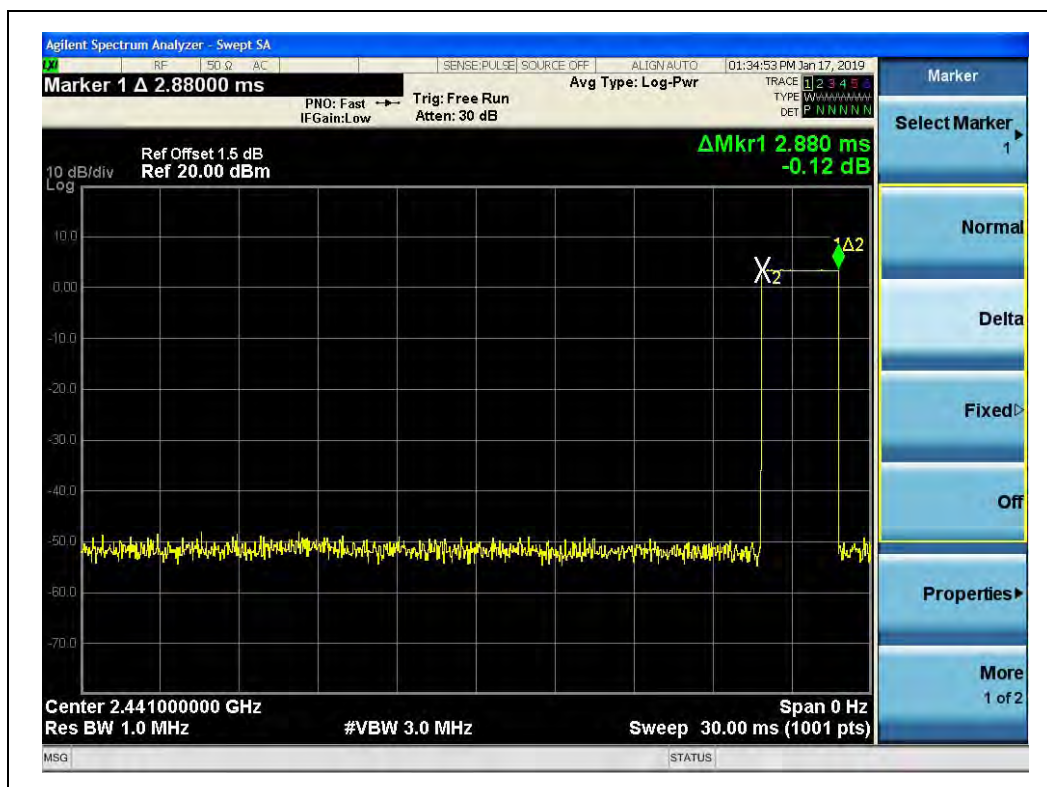

(DH5, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.39	124.80	62.40	0.4	PASS
DH3	1.66	265.60	132.80		PASS
DH5	2.91	310.40	155.20		PASS

B. Test Plots:

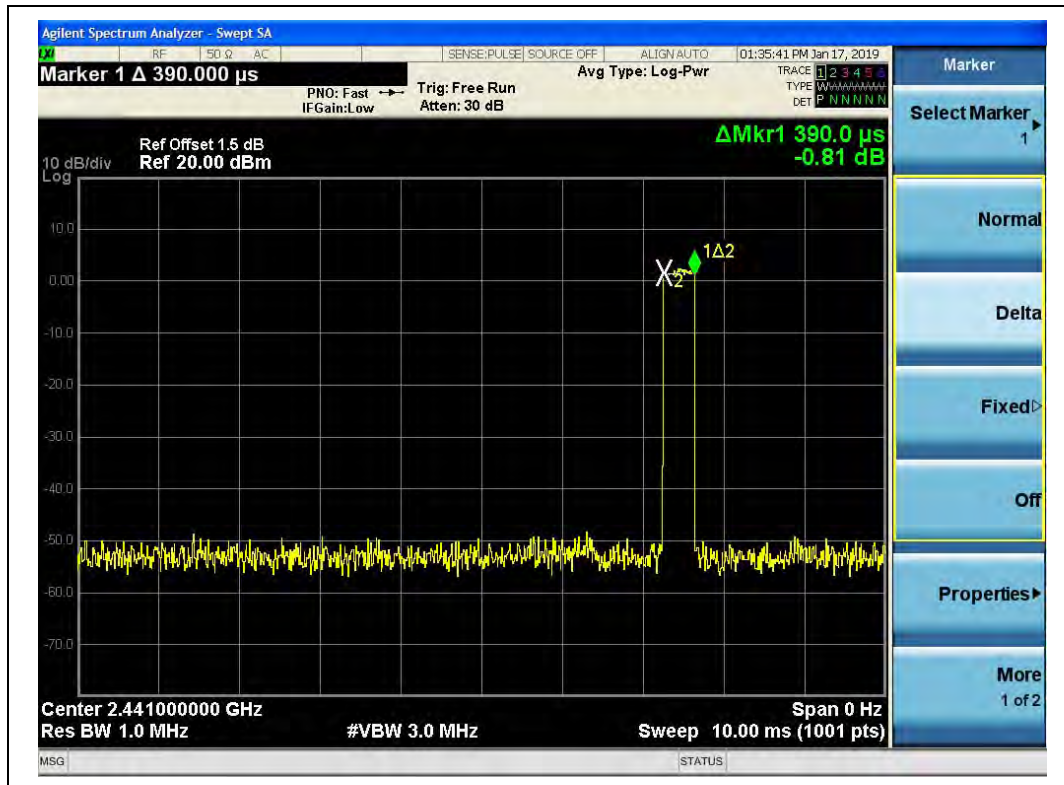

(DH1, $\pi/4$ -DQPSK)

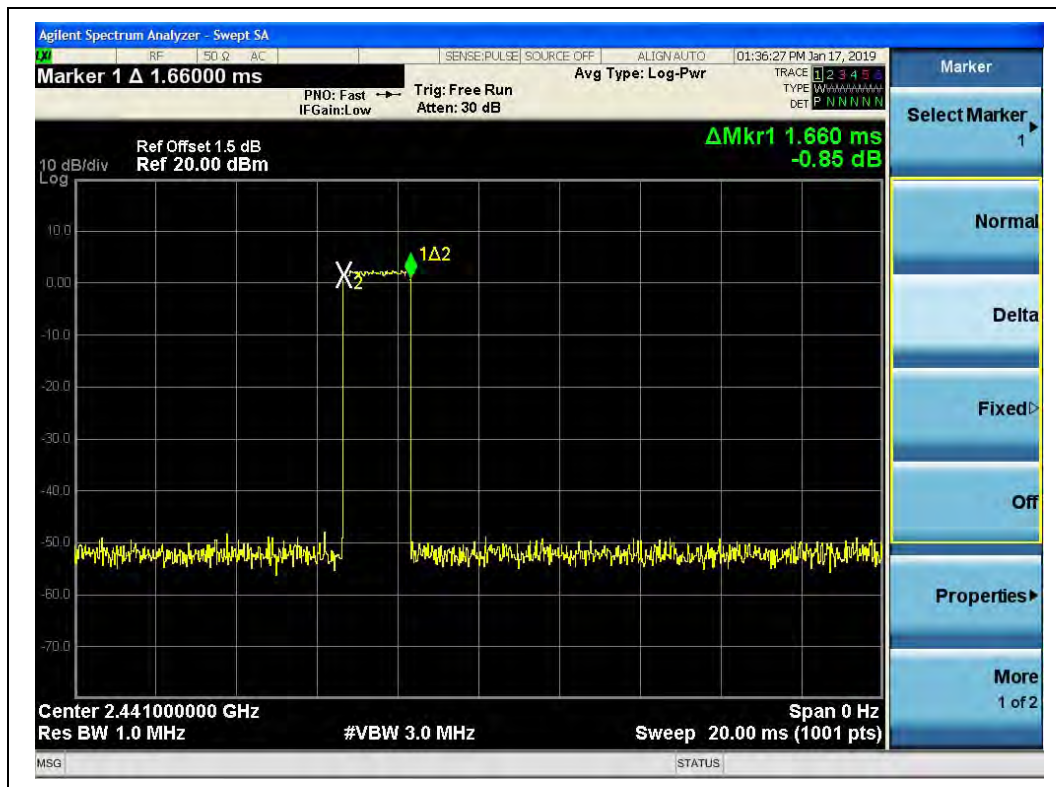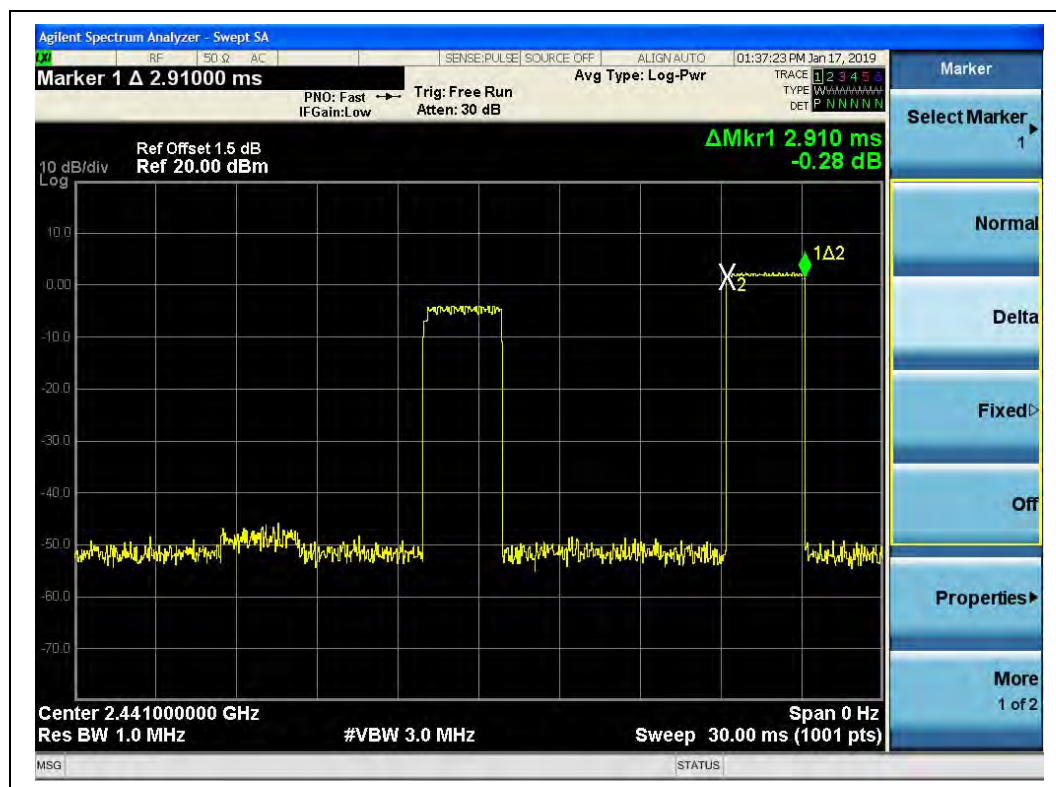
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.39	124.80	62.40	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.91	310.40	155.20		PASS


B. Test Plots:

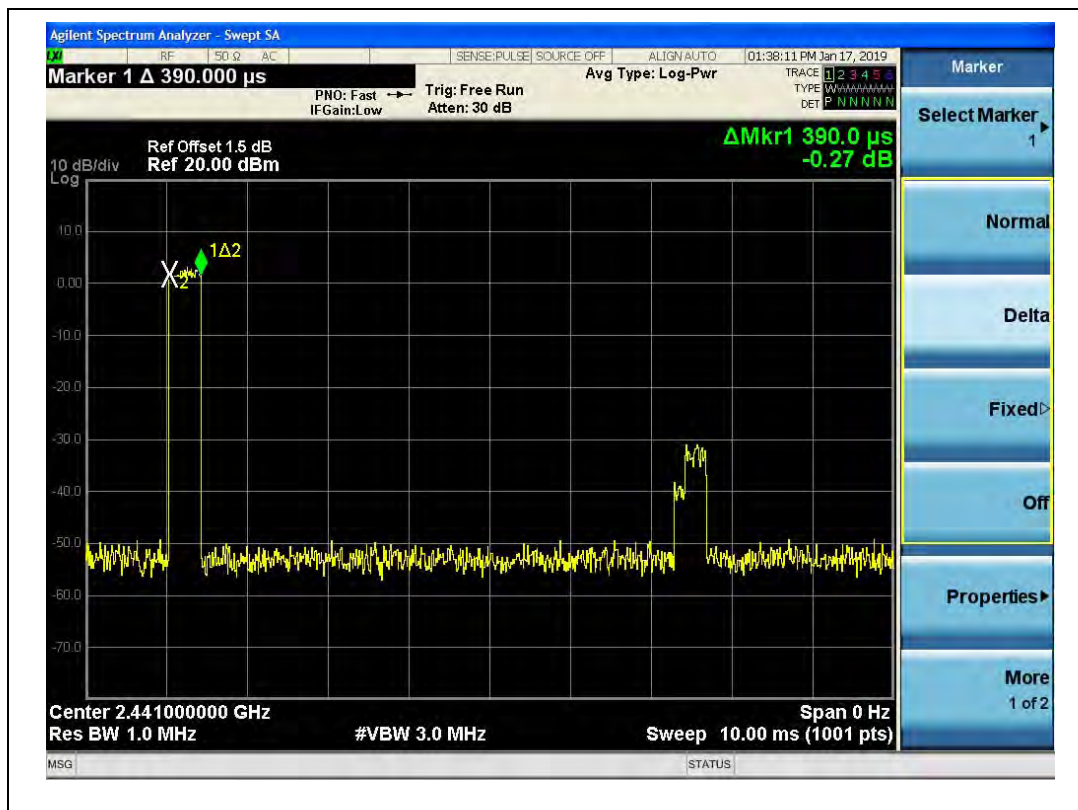

(DH1, 8-DPSK)

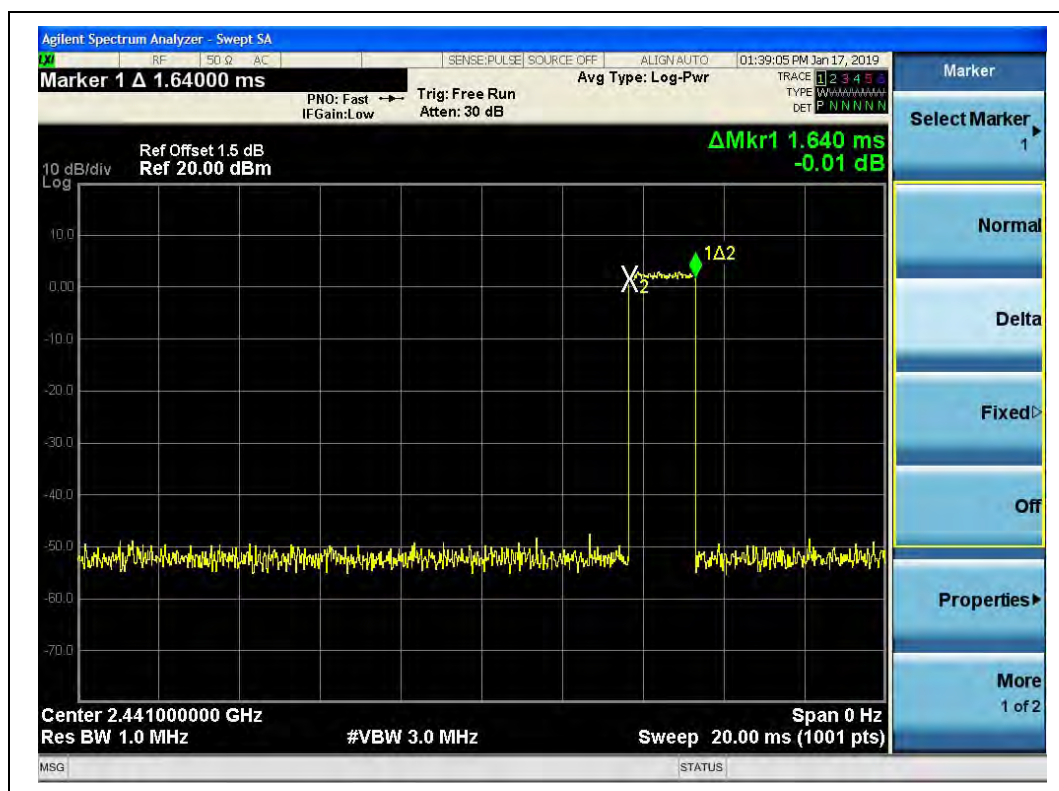

(DH3, 8-DPSK)

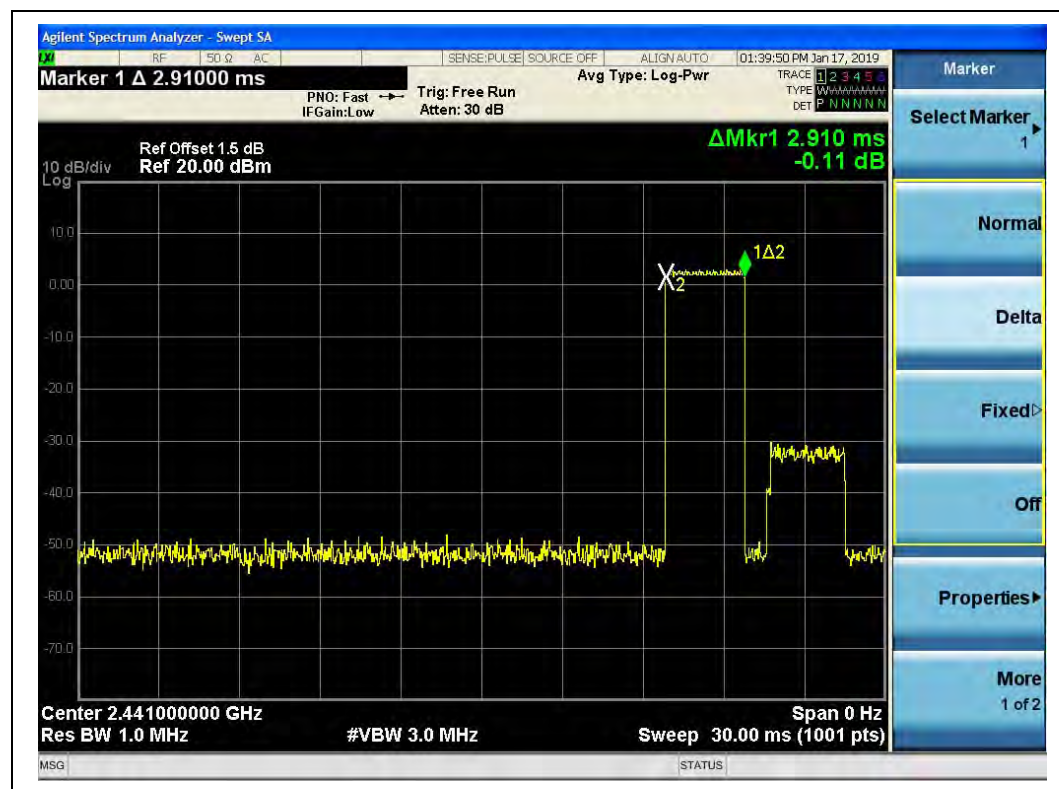

(DH5, 8-DPSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

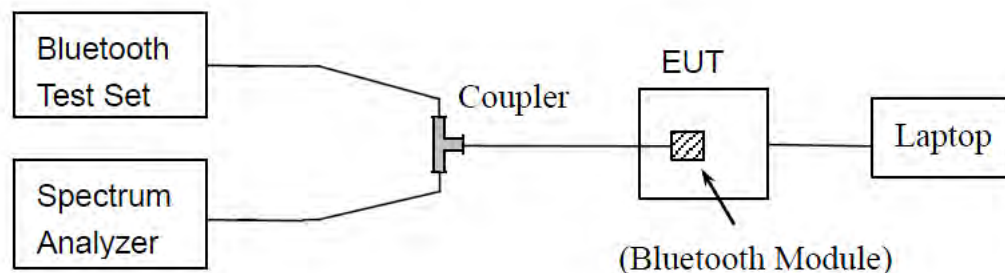

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-42.26	3.90	-16.10	PASS
39	2441	-41.41	4.17	-15.83	PASS
78	2480	-42.50	4.20	-15.80	PASS

B. Test Plots:




(Channel = 0, 30MHz to 25GHz, GFSK Mode)

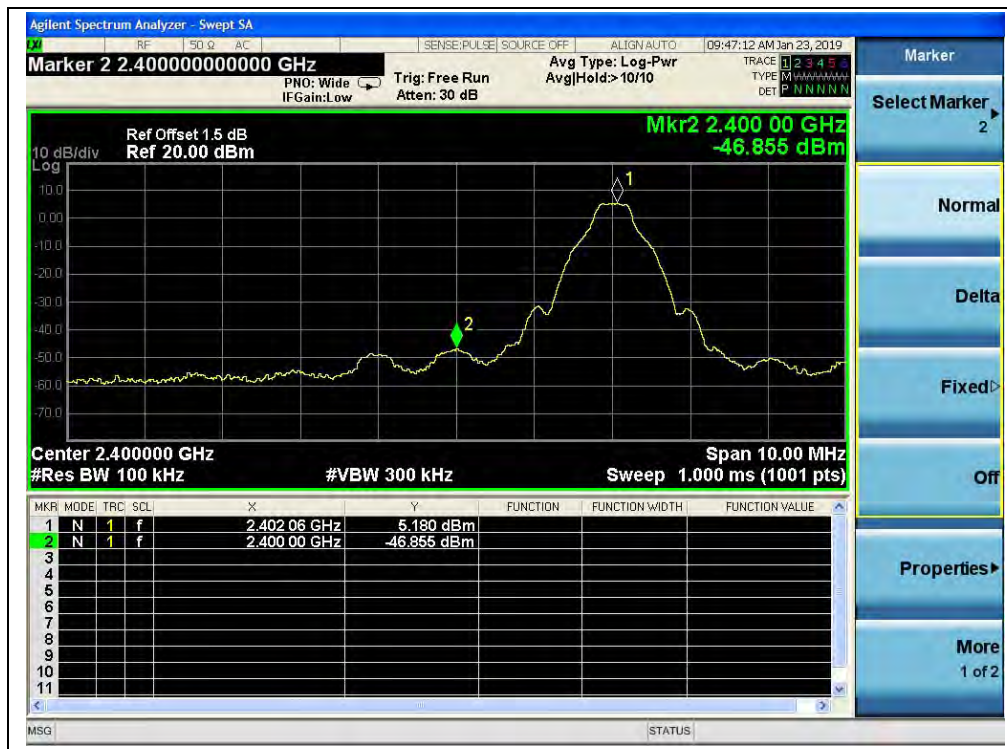


(Channel = 0, Band edge, GFSK Mode)




(Channel = 0, Band edge with hopping on, GFSK Mode)

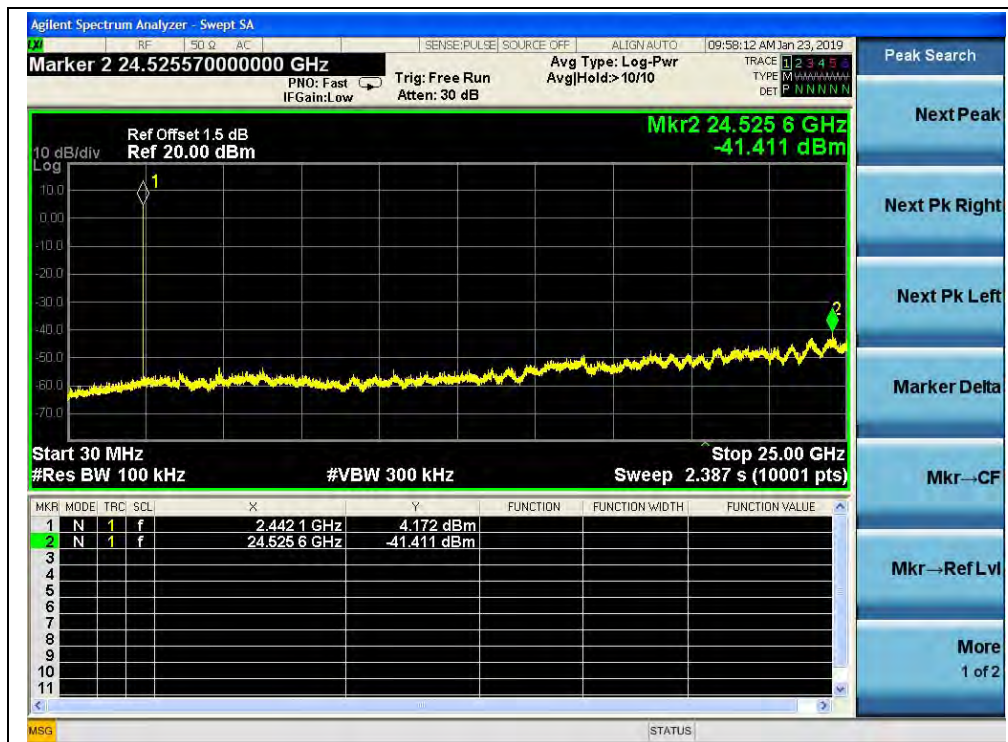

(Channel = 39, 30MHz to 25GHz, GFSK Mode)

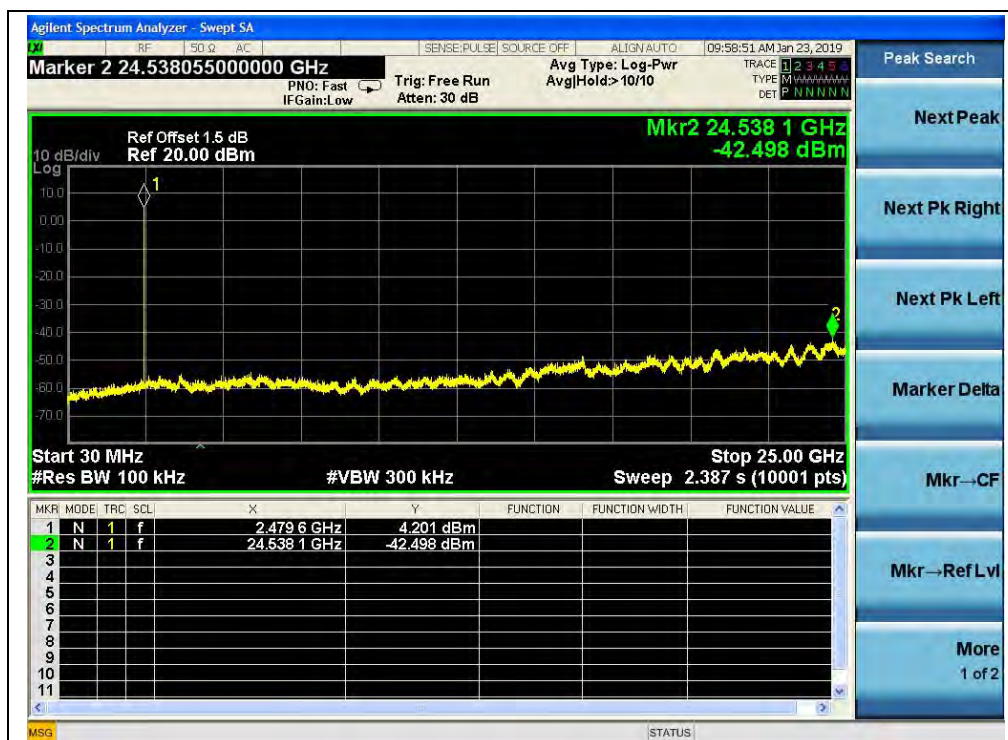

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

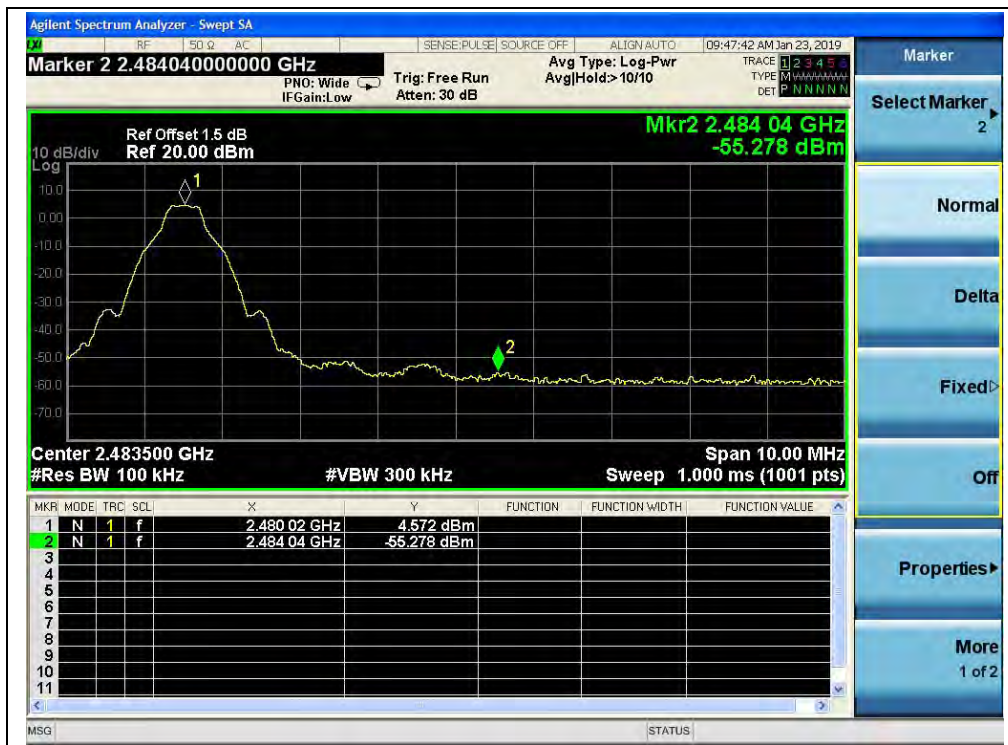

(Channel = 78, Band edge, GFSK Mode)



(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-42.15	2.36	-17.64	PASS
39	2441	-42.64	3.77	-16.23	PASS
78	2480	-41.24	1.59	-18.41	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

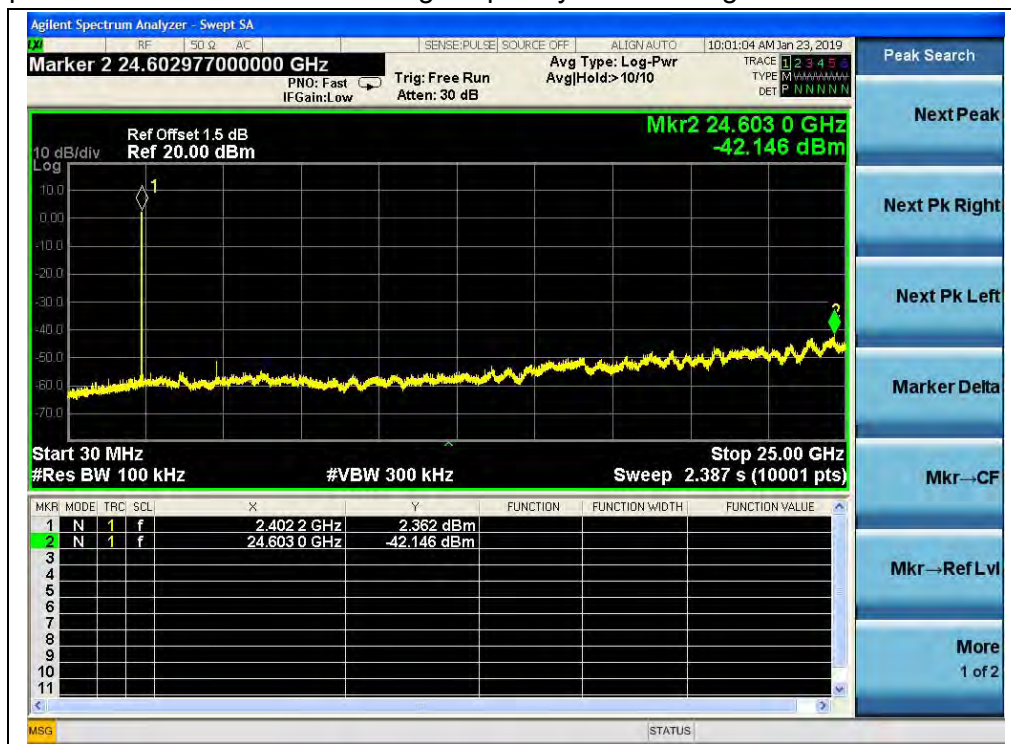


(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)



(Channel = 0, Band edge, $\pi/4$ -DQPSK)



(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

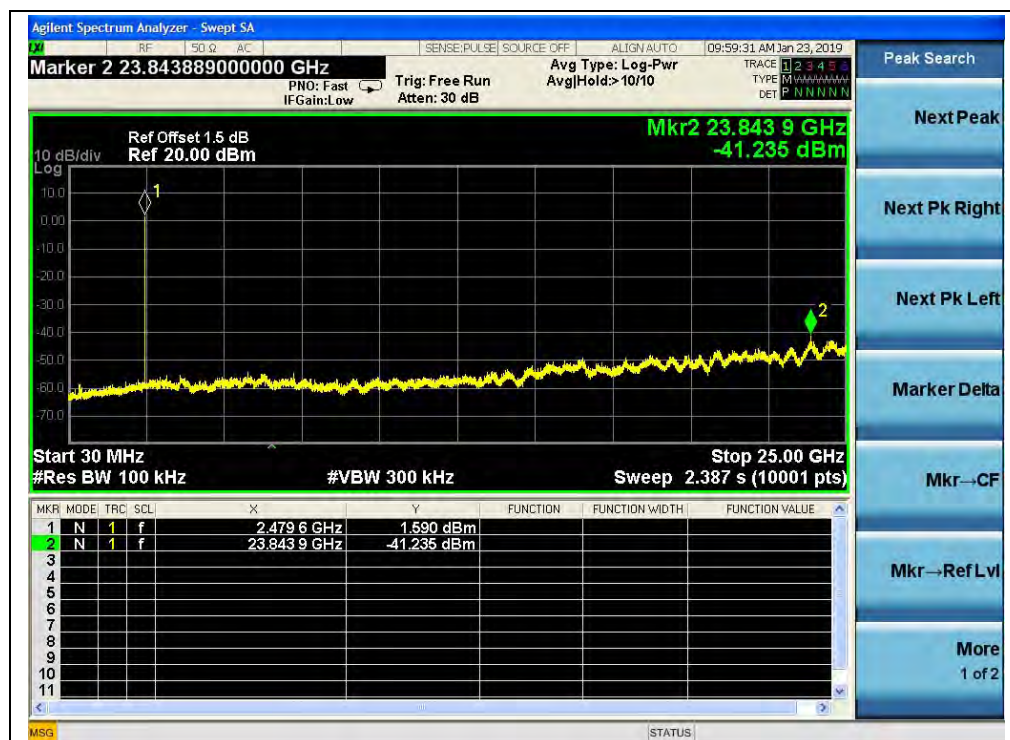(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)



(Channel = 78, Band edge, $\pi/4$ -DQPSK)



(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.05	2.93	-17.07	PASS
39	2441	-42.27	2.92	-17.08	PASS
78	2480	-42.07	2.79	-17.21	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.



(Channel = 0, 30MHz to 25GH, 8-DPSK)



(Channel = 0, Band edge, 8-DPSK)



(Channel = 0, Band edge with hopping on, 8-DPSK)



(Channel = 39, 30MHz to 25GHz, 8-DPSK)



(Channel = 78, 30MHz to 25GH, 8-DPSK)



(Channel = 78, Band edge, 8-DPSK)



(Channel = 78, Band edge with hopping on, 8-DPSK)

2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

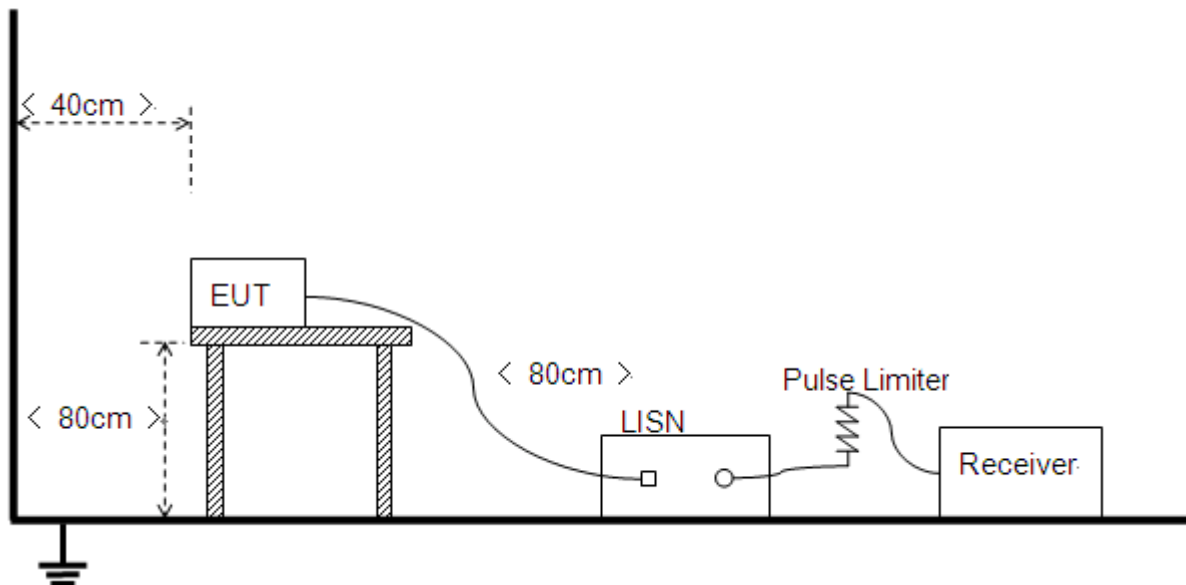

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX B(4).

2.8.3. Test Result

This test case does not apply this kind of EUT.


2.9. Restricted Frequency Bands

2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2. Test Description

A. Test Setup:

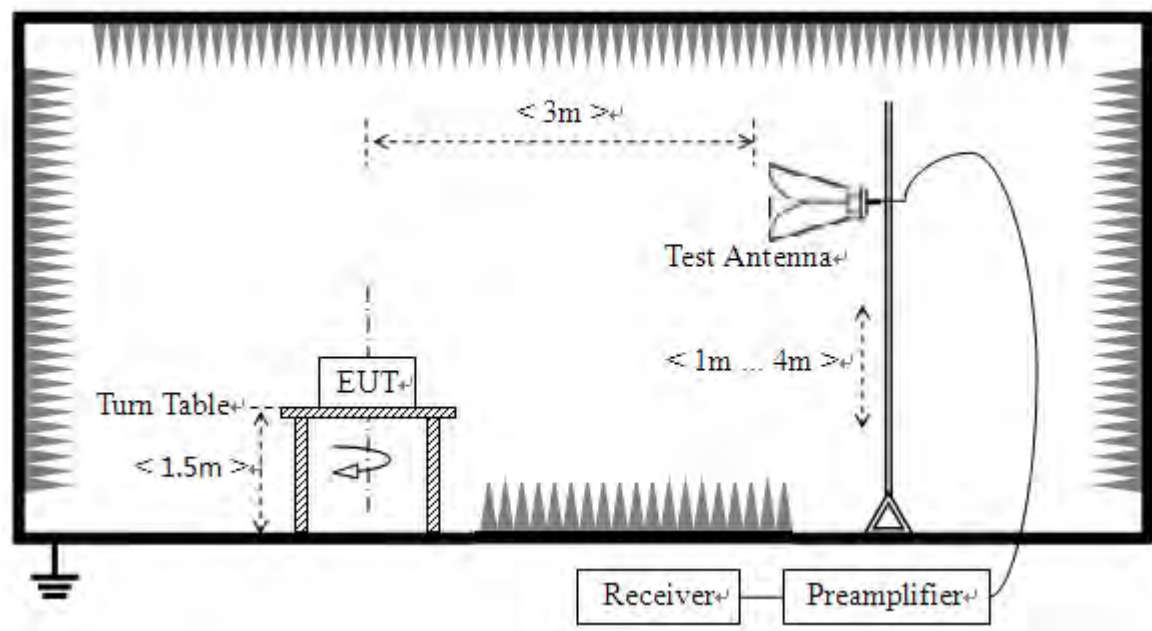

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please refer ANNEX B(4).

2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.9.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

GFSK Mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2388.09	PK	49.27	-29.67	32.56	52.16	74	PASS
0	2388.50	AV	36.43	-29.67	32.56	39.32	54	PASS
78	2484.06	PK	48.41	-29.67	32.56	51.30	74	PASS
78	2484.28	AV	36.30	-29.67	32.56	39.19	54	PASS




B. Test Plots:

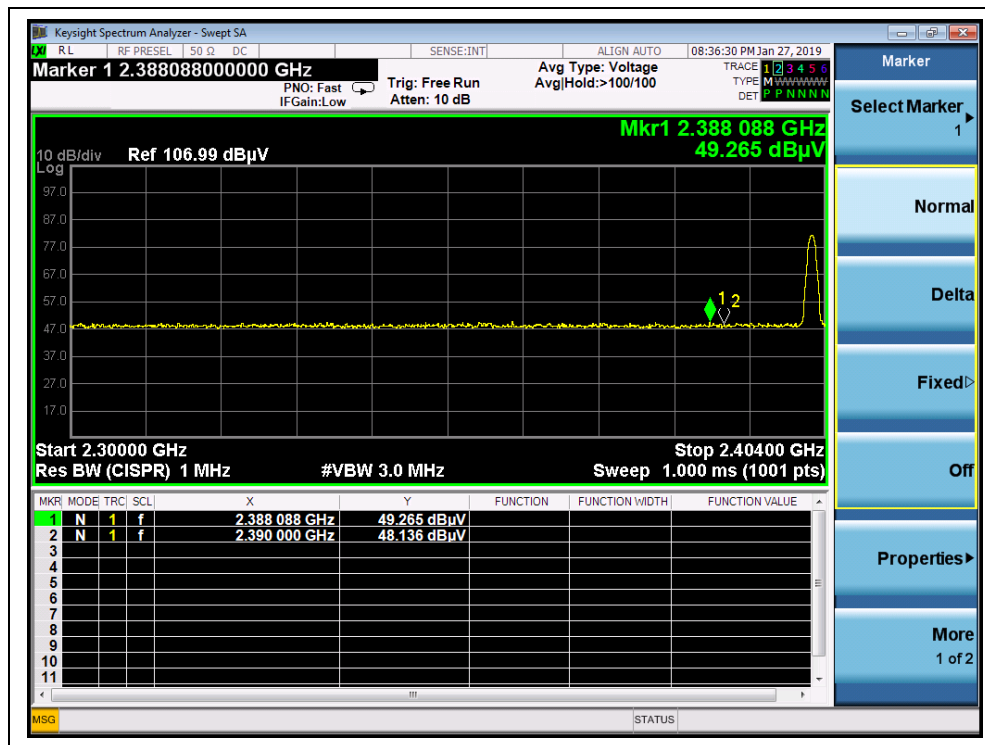

(Channel = 0, PEAK, GFSK)

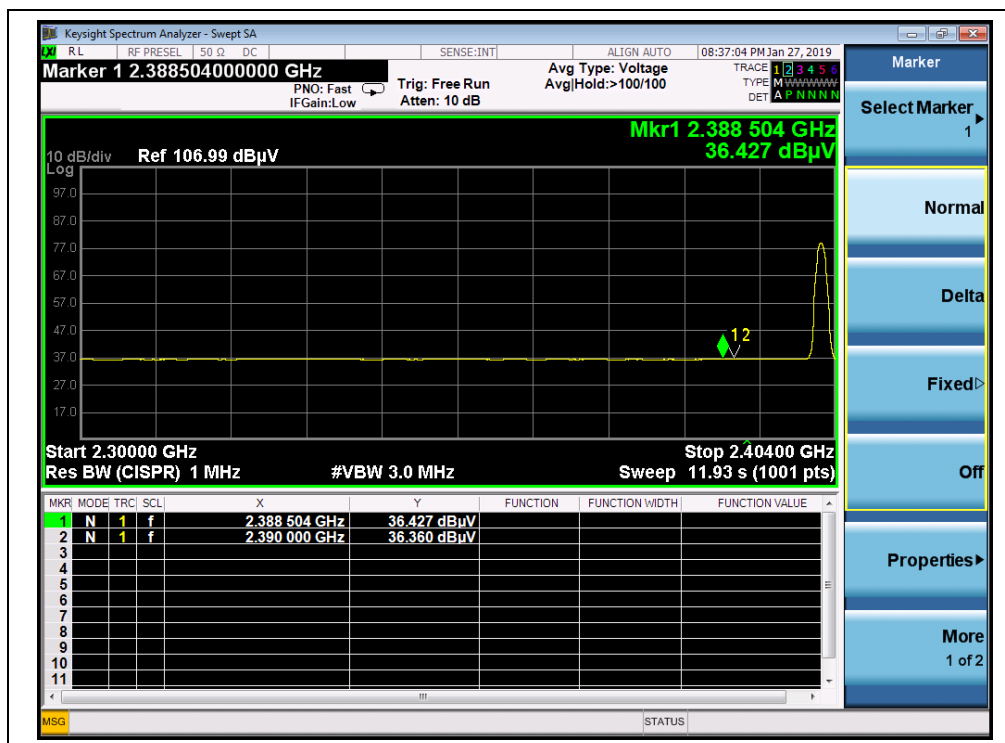

(Channel = 0, AVERAGE, GFSK)

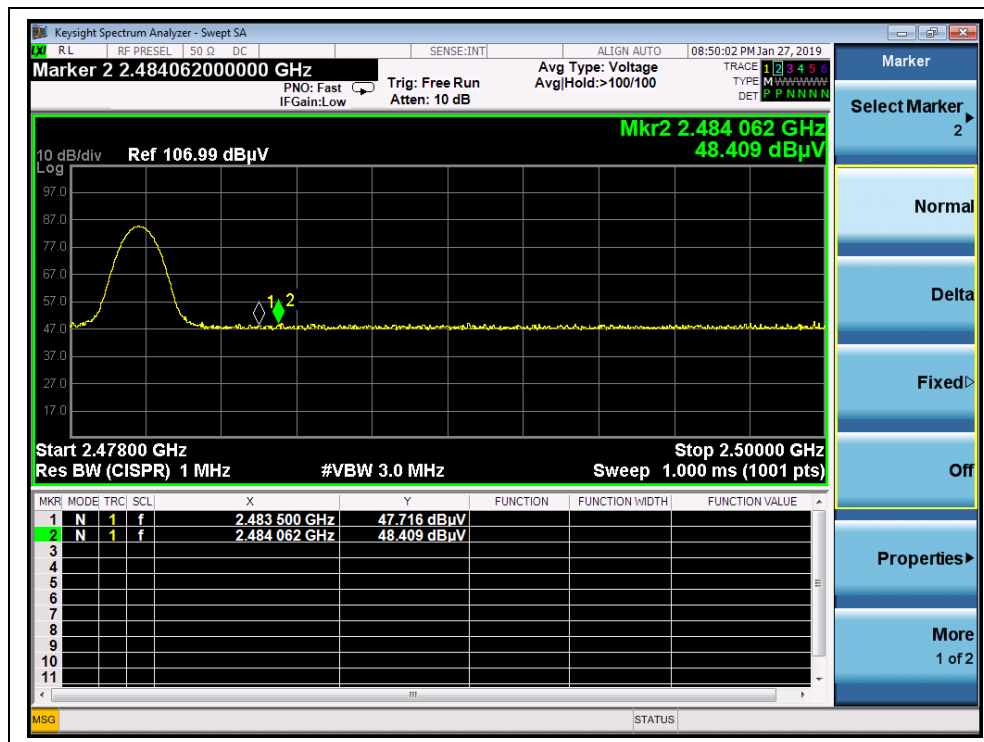

(Channel = 78, PEAK, GFSK)



(Channel = 78, AVERAGE, GFSK)



$\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2385.49	PK	49.75	-29.67	32.56	52.64	74	PASS
0	2387.46	AV	36.48	-29.67	32.56	39.37	54	PASS
78	2484.04	PK	48.41	-29.67	32.56	51.30	74	PASS
78	2484.08	AV	36.30	-29.67	32.56	39.19	54	PASS

B. Test Plots:



(Channel = 0, PEAK, $\pi/4$ -DQPSK)

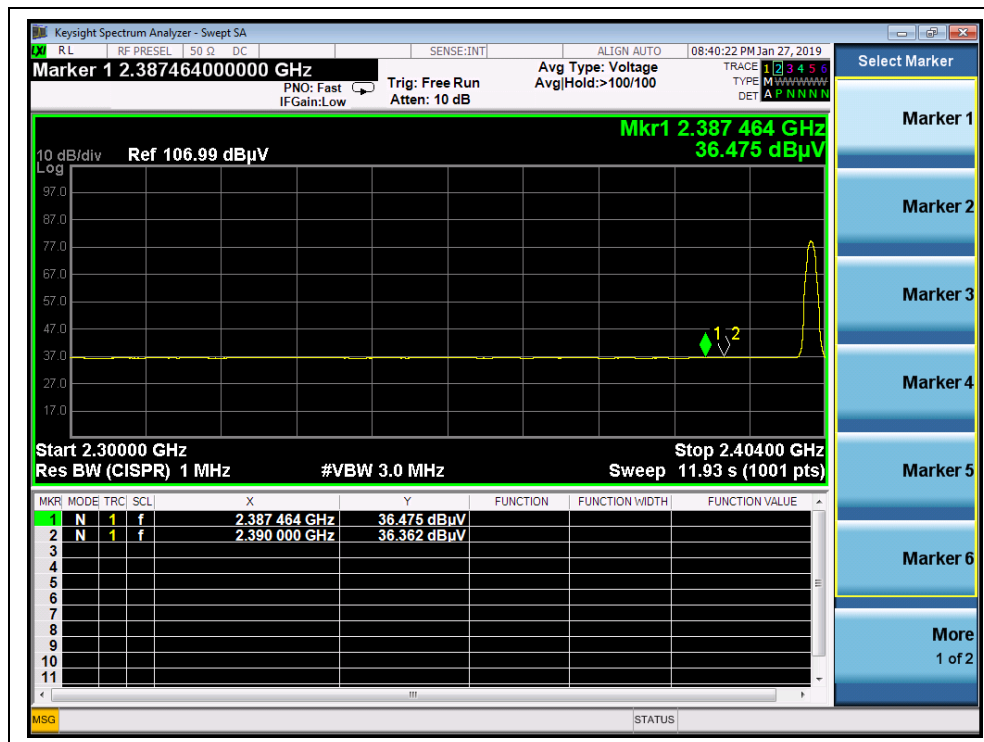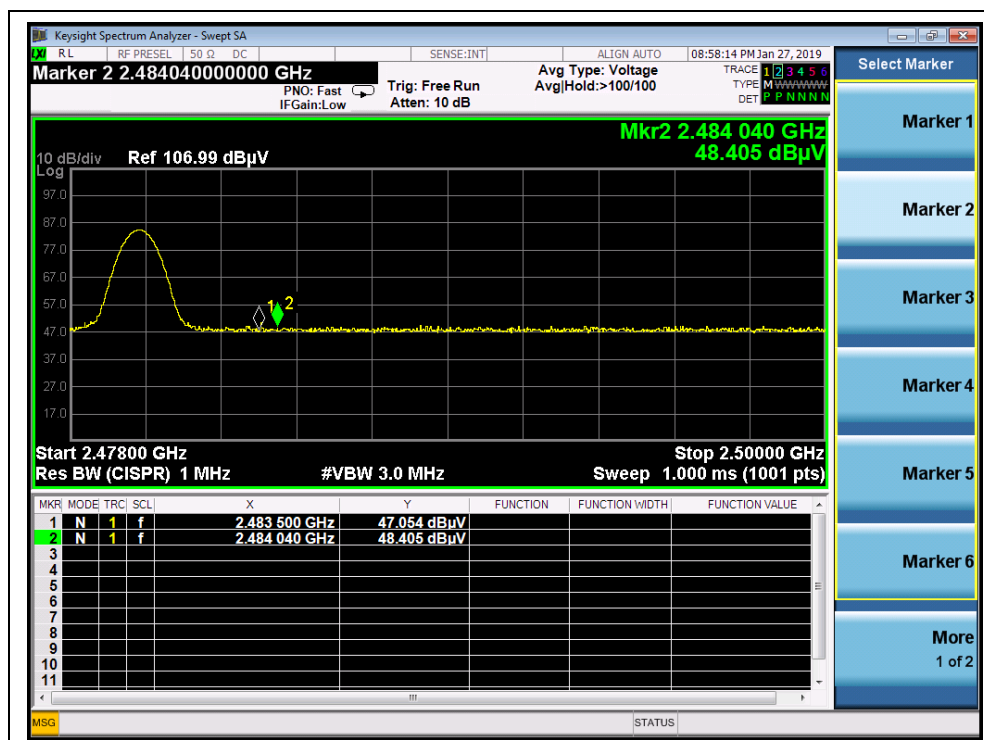(Channel = 0, AVERAGE, $\pi/4$ -DQPSK)(Channel = 78, PEAK, $\pi/4$ -DQPSK)

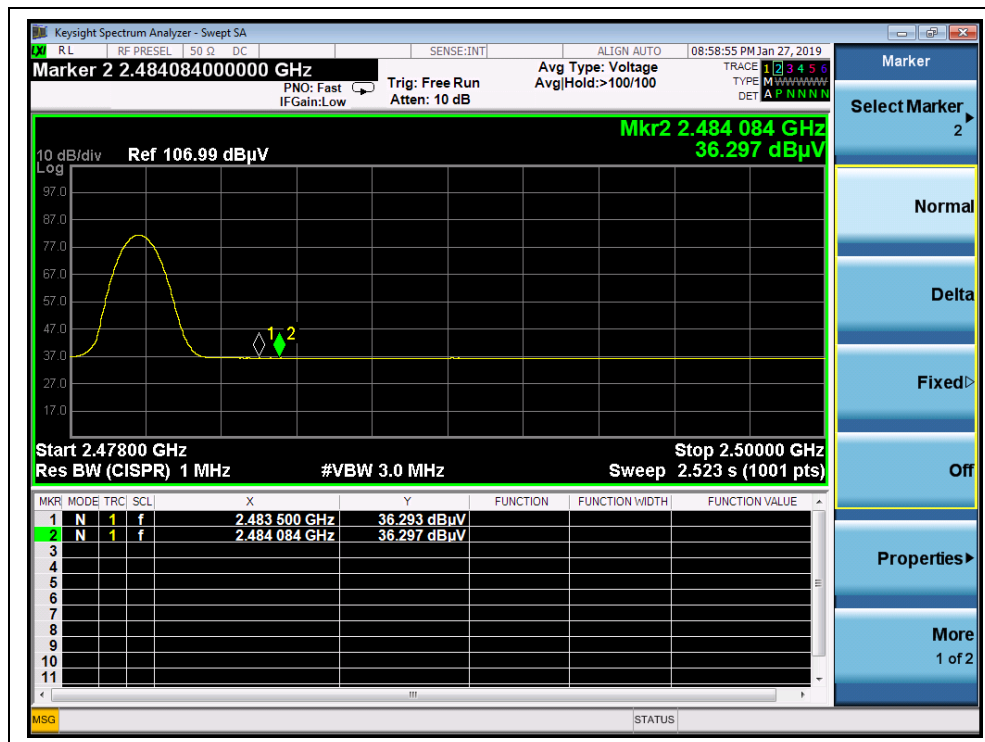

(Channel = 78, AVERAGE, $\pi/4$ -DQPSK)


8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2386.94	PK	48.61	-29.67	32.56	51.50	74	PASS
0	2386.74	AV	36.50	-29.67	32.56	39.39	54	PASS
78	2485.51	PK	49.69	-29.67	32.56	52.58	74	PASS
78	2483.93	AV	36.32	-29.67	32.56	39.21	54	PASS

**B. Test Plots:**


(Channel = 0, PEAK, 8-DPSK)

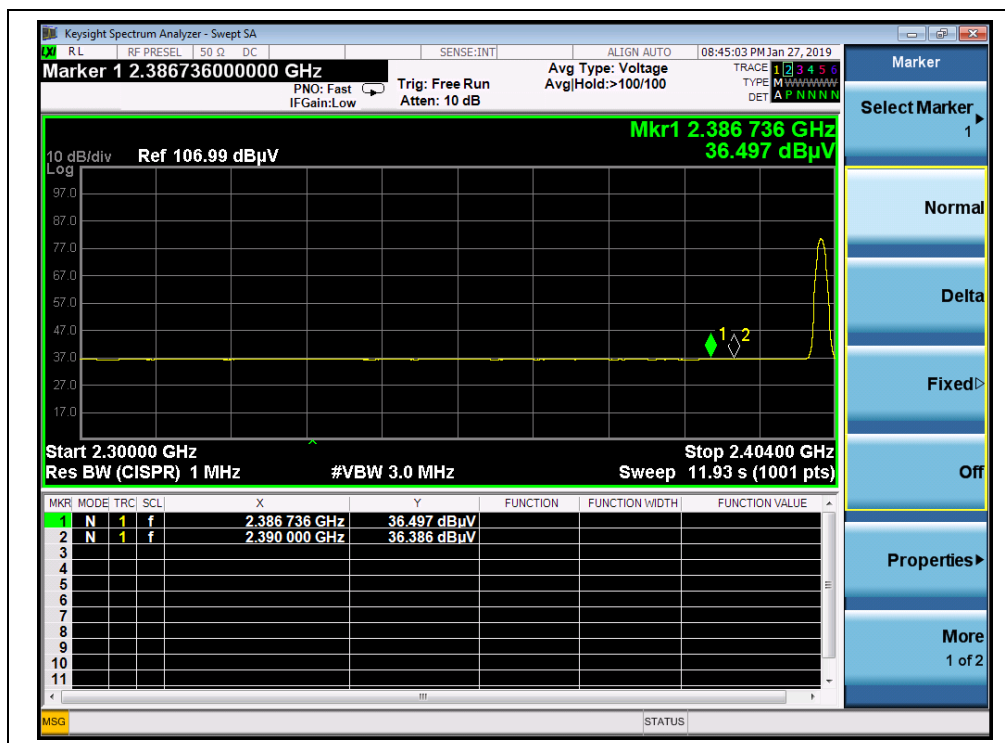

(Channel = 0, AVERAGE, 8-DPSK)

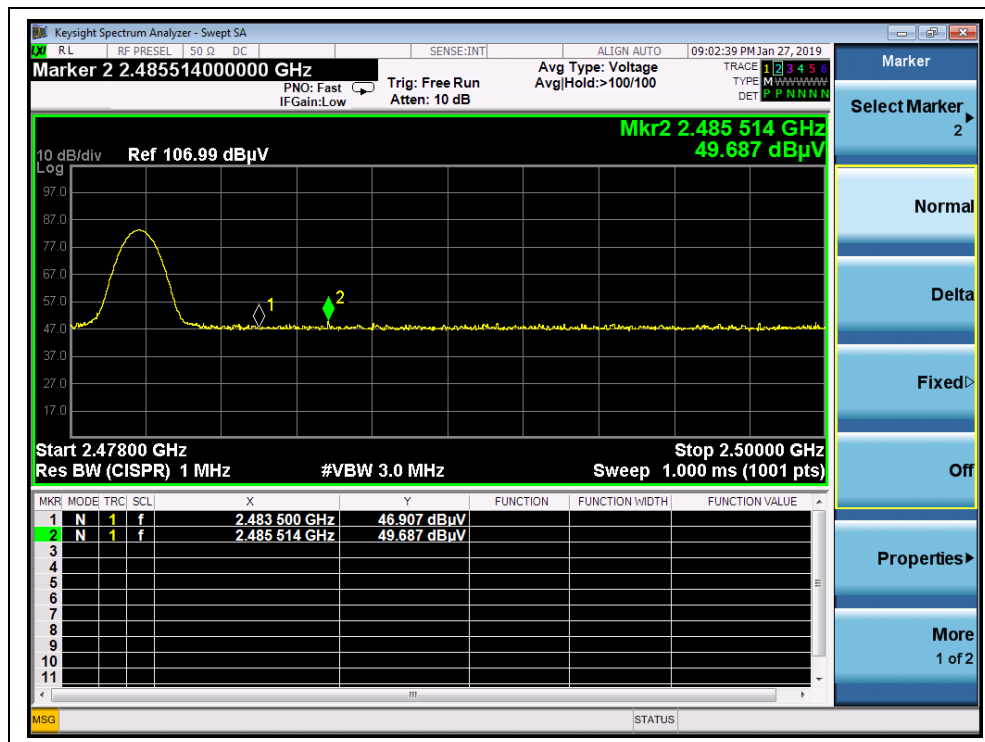

(Channel = 78, PEAK, 8-DPSK)

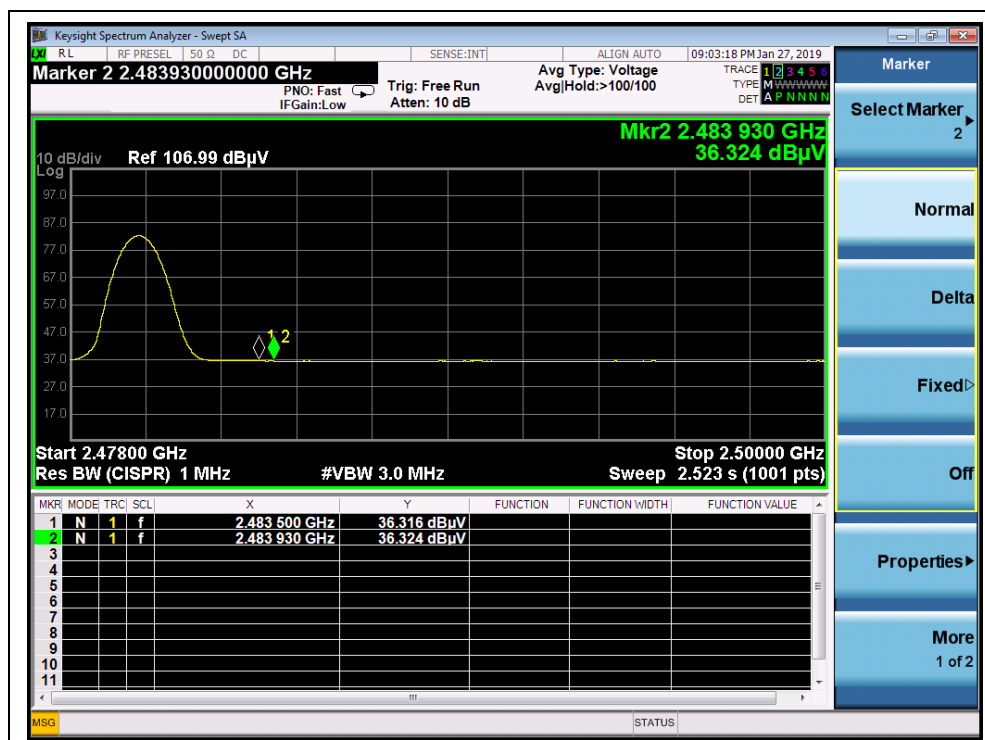

(Channel = 78, AVERAGE, 8-DPSK)

2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

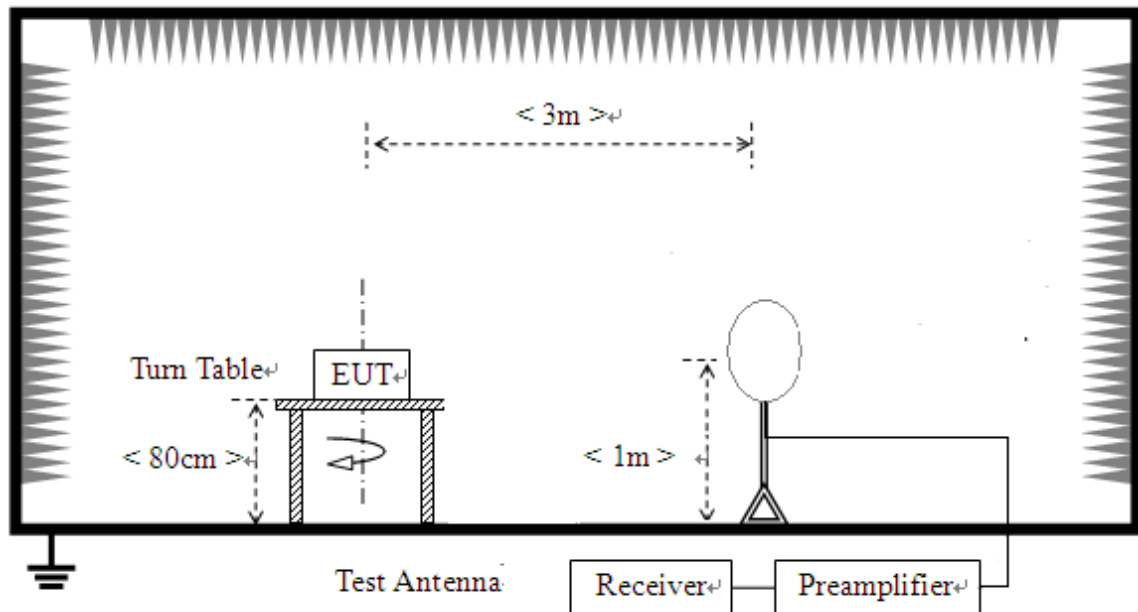

- 2) For radiated emissions from 30MHz to 1GHz

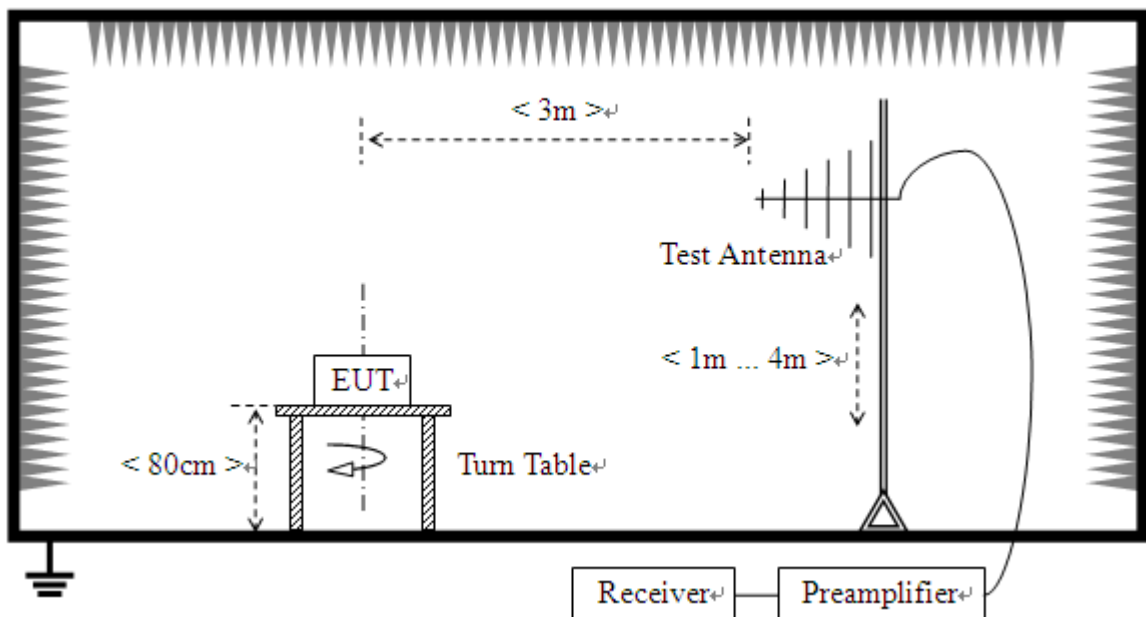

3) For radiated emissions above 1GHz

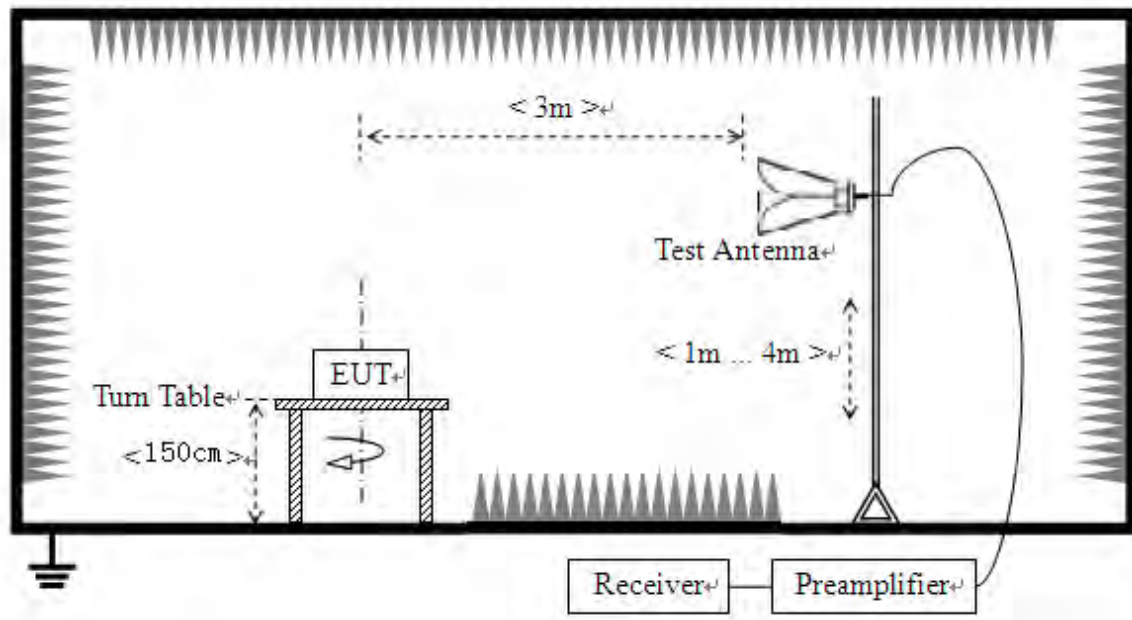

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX B(4).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode**

Plots for Channel = 0

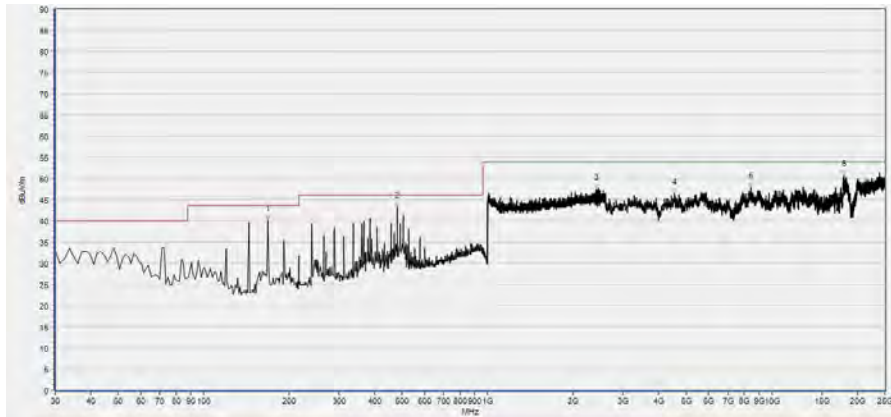

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
168.398	40.18	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
480.401	43.24	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2410.484	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4547.118	46.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8425.059	47.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17965.121	50.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 0)

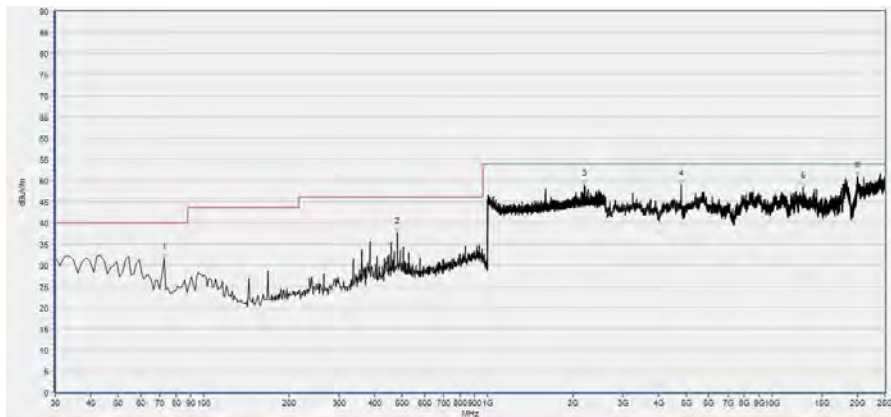

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.491	31.62	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	37.67	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2190.876	48.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4803.746	49.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12901.800	48.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
19997.781	50.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 0)

Plot for Channel = 39

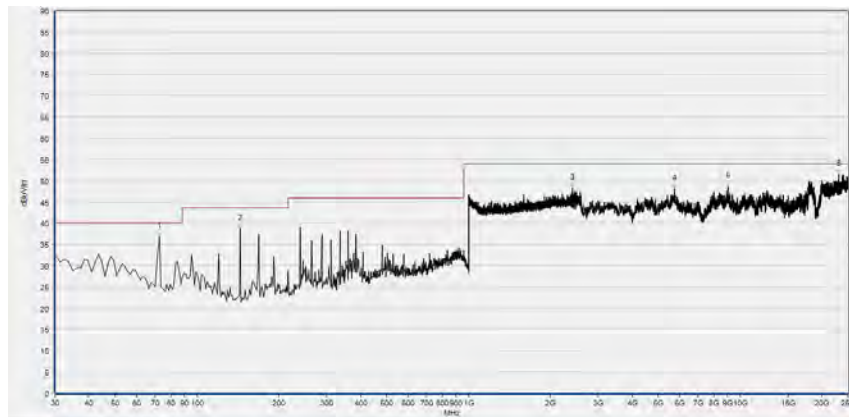

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.491	36.87	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
144.118	38.71	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2405.362	48.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5732.497	48.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9052.373	48.53	N/A	37.37	74.00	N/A	54.00	Horizontal	PASS
23097.690	51.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 39)

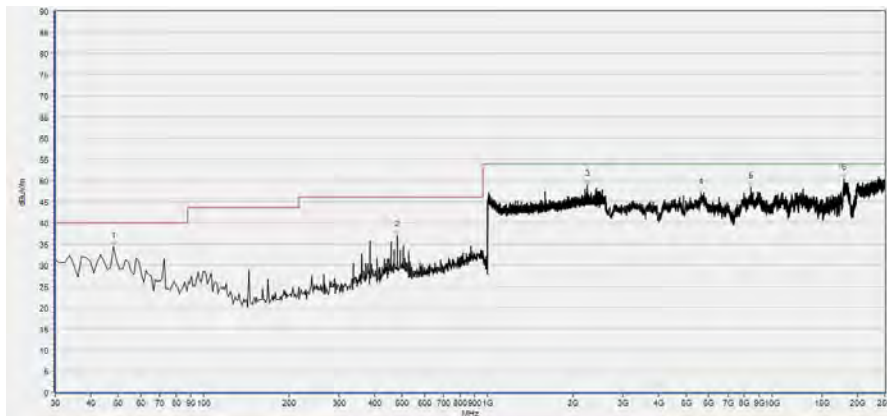

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	34.26	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	36.93	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2238.896	48.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5634.734	46.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8425.059	48.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17961.047	50.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 39)

Plot for Channel = 78

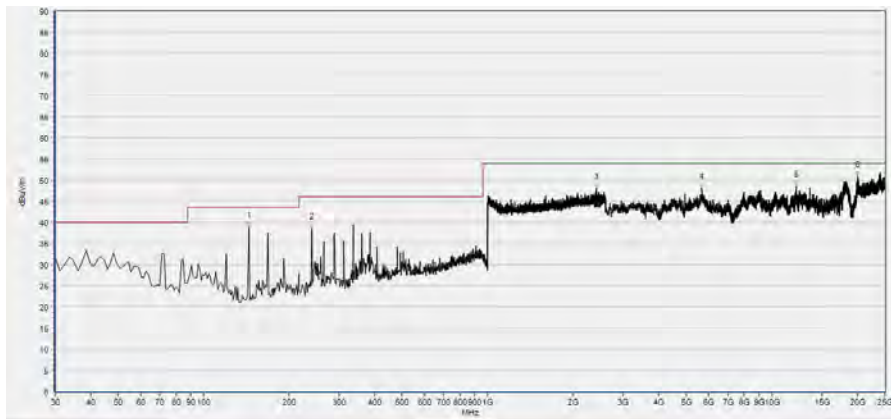

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	38.85	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
240.025	38.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2419.448	48.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5679.542	48.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12209.311	48.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20005.928	50.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 78)

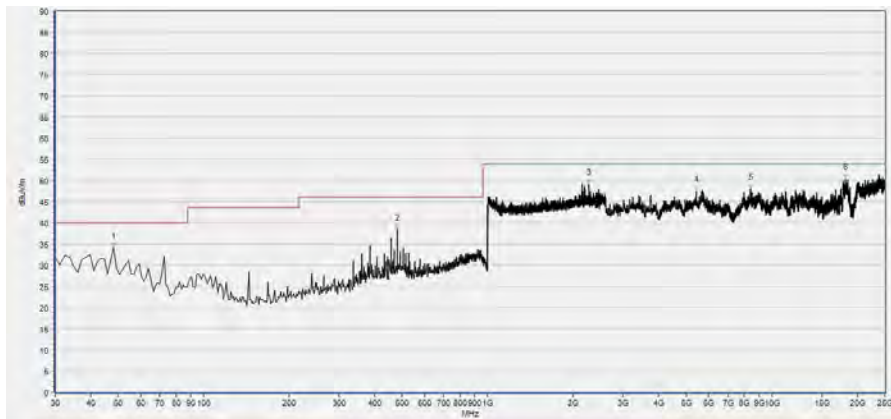


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	34.09	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	38.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2265.146	49.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5410.693	47.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8412.839	47.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18168.794	50.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 78)


$\pi/4$ -DQPSK Mode

Plots for Channel = 0

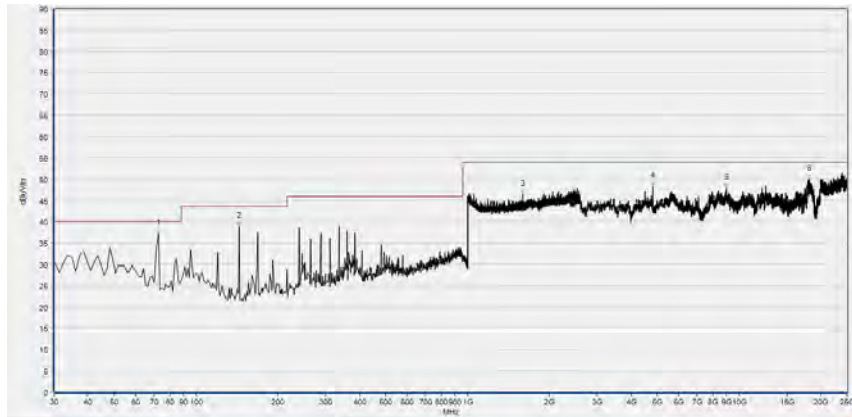

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.491	37.28	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
144.118	38.86	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1597.999	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4803.746	48.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8999.418	47.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18148.427	50.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 0)

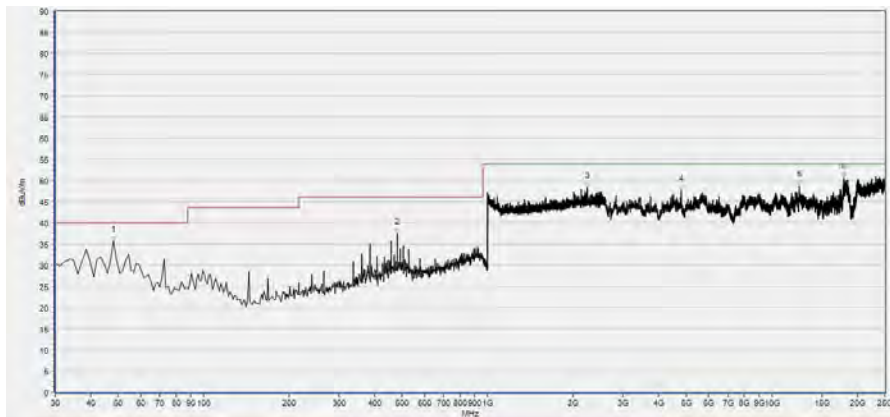

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	35.67	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	37.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2238.255	48.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4803.746	47.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12510.747	48.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17936.607	50.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39

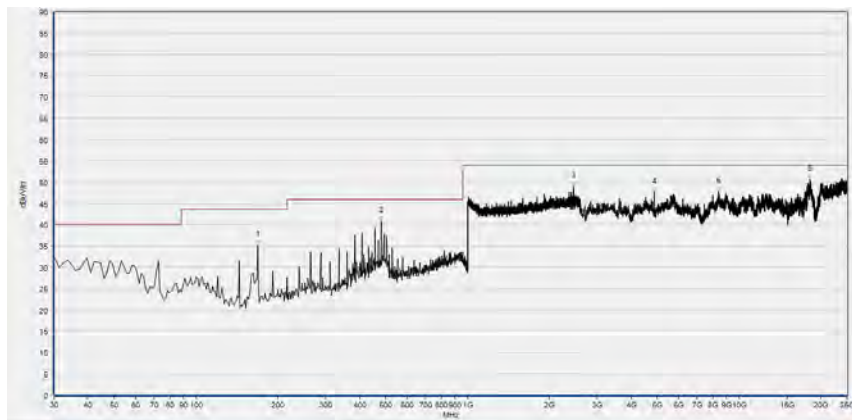

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
168.398	35.19	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
480.401	40.87	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2455.942	48.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4881.142	47.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8404.692	47.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18229.896	50.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)

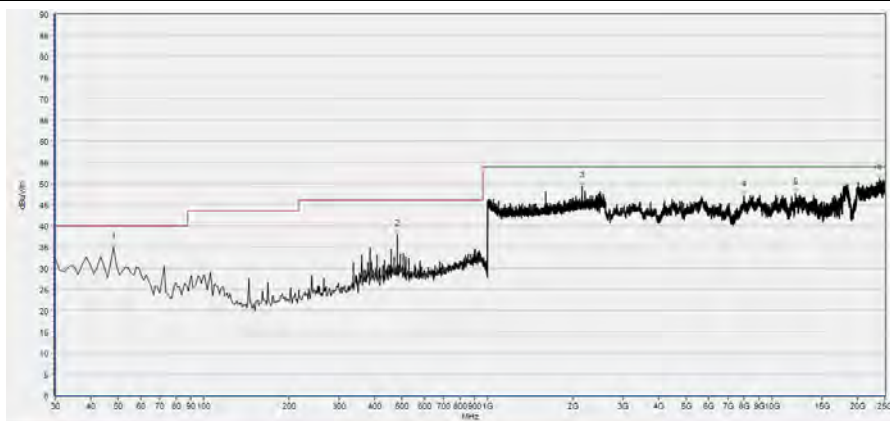

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	34.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	37.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2144.138	49.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7985.125	47.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12135.988	47.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
24018.294	51.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78

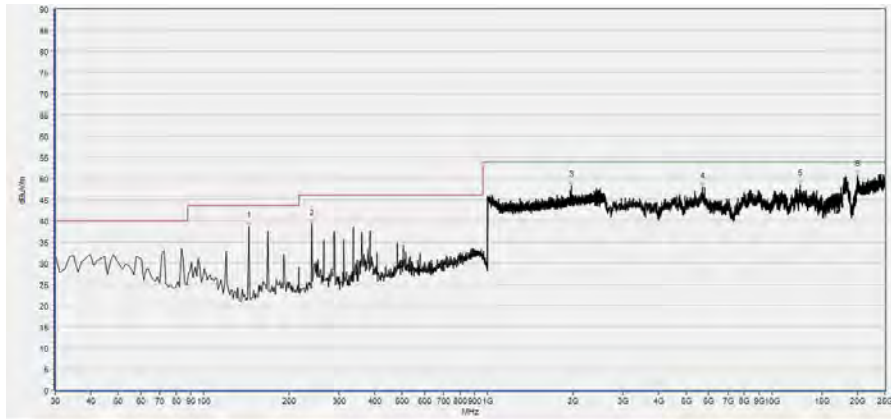

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	38.65	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
240.025	39.17	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1971.909	48.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.836	47.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12588.143	48.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20010.002	50.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 78)

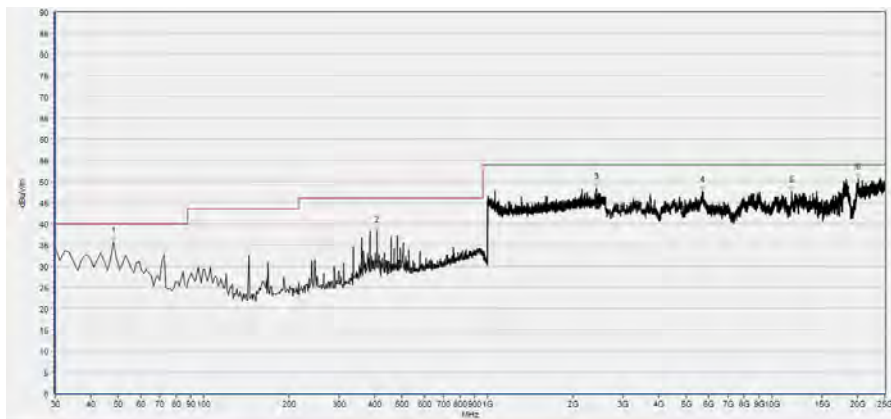


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	35.72	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
407.559	38.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2414.326	48.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5691.762	47.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11749.009	47.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20160.720	50.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0

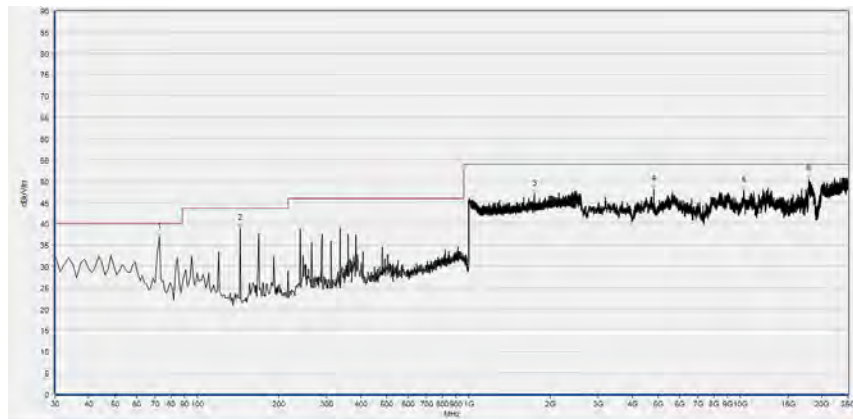

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.491	36.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
144.118	38.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1744.618	46.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4803.746	48.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10343.662	47.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17940.680	50.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 0)

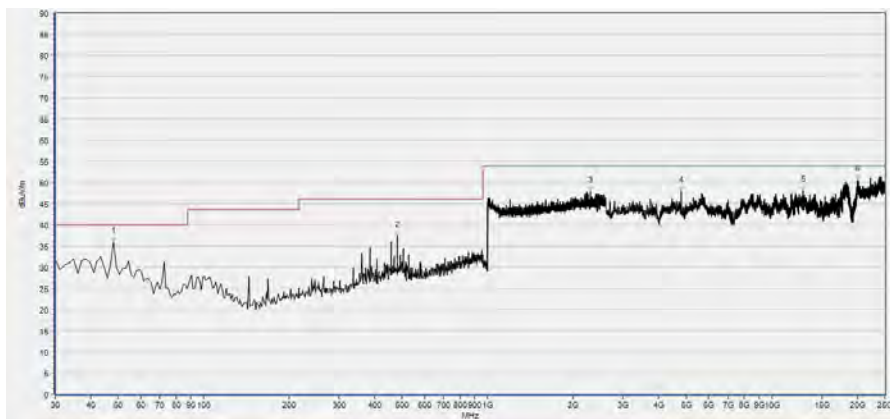

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	35.91	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	37.37	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2292.677	47.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4803.746	47.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12901.800	47.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20099.618	50.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 0)

Plot for Channel = 39

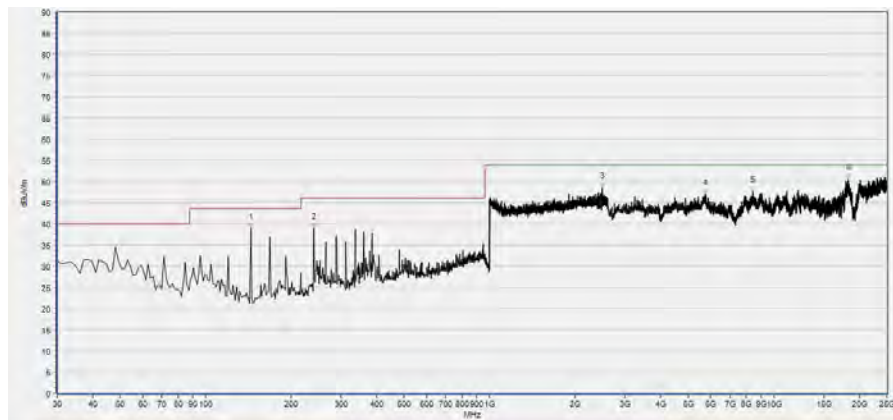

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	38.91	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
240.025	38.89	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2456.675	48.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5736.570	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8457.647	47.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18319.513	50.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 39)

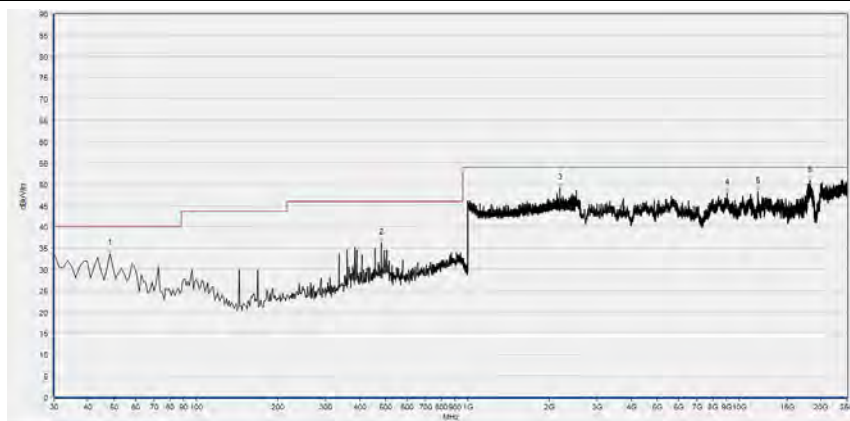

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	33.73	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	36.17	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2194.078	49.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9011.638	48.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11740.862	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18213.602	50.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 39)

Plot for Channel = 78

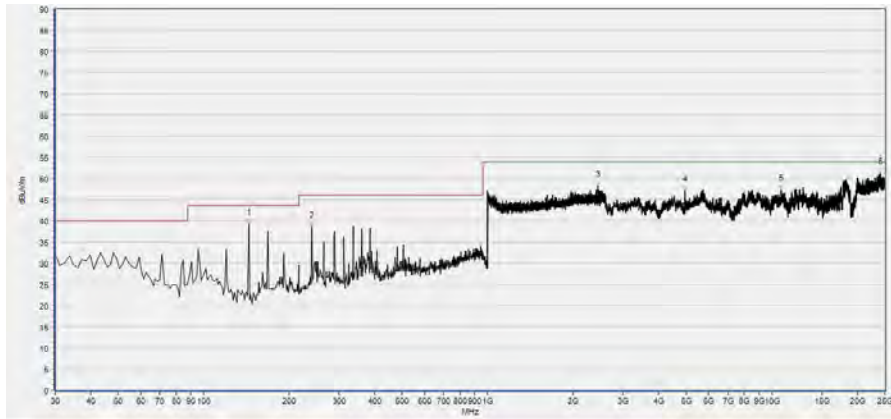

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	39.34	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
240.025	38.65	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2449.540	48.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4958.538	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10779.524	47.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
24038.662	51.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 78)

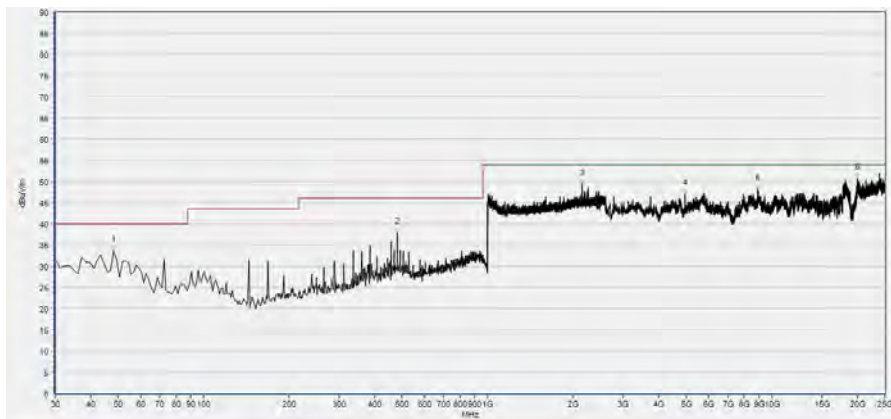

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	33.66	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
480.401	37.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2147.979	49.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4958.538	47.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8938.316	47.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20083.324	50.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2018.04.17	2019.04.16
Directional coupler	17041703	DTO-5-30	ShangHai Huaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2018.11.06	2019.11.05
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————