



Test_Graph_EDR_ANT1_2402_3Mbps_Lower Band Edge Emissions

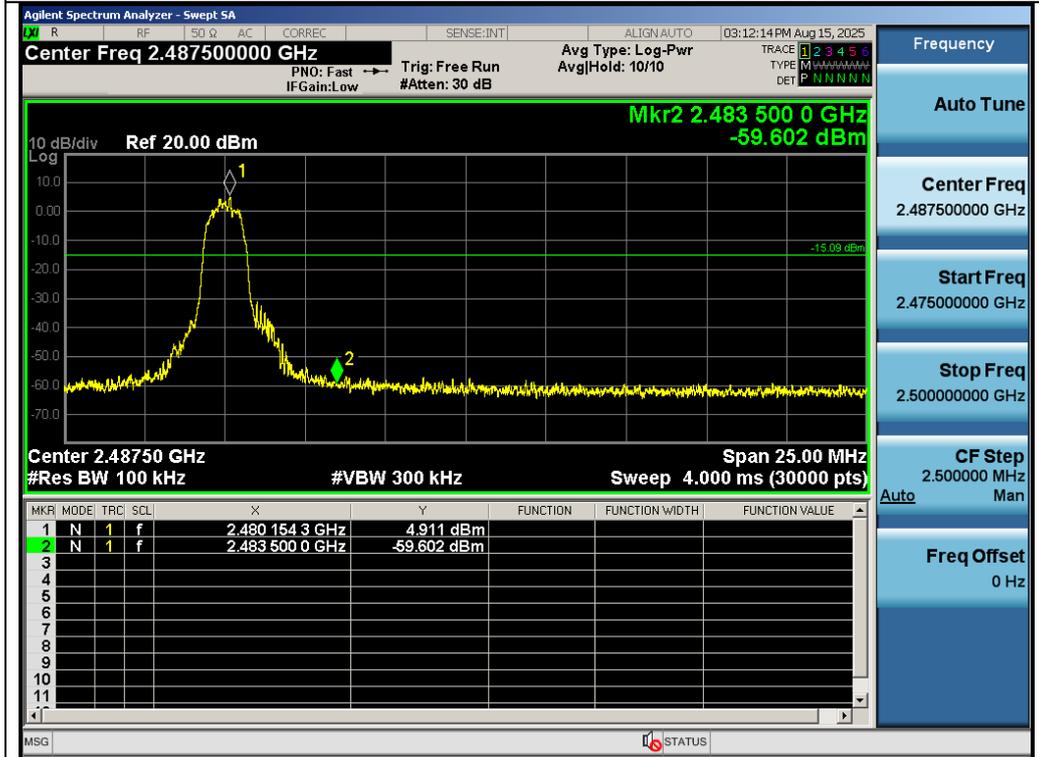


Test_Graph_EDR_ANT1_2480_3Mbps_Higher Band Edge Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

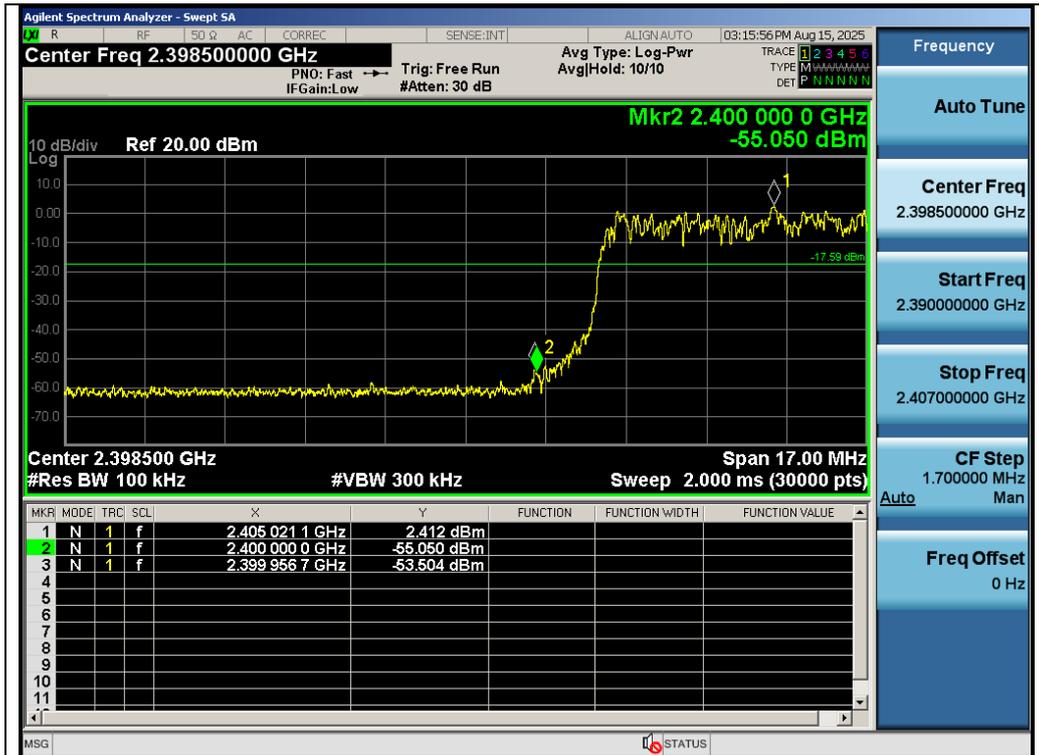

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Lower Band Edge Emissions

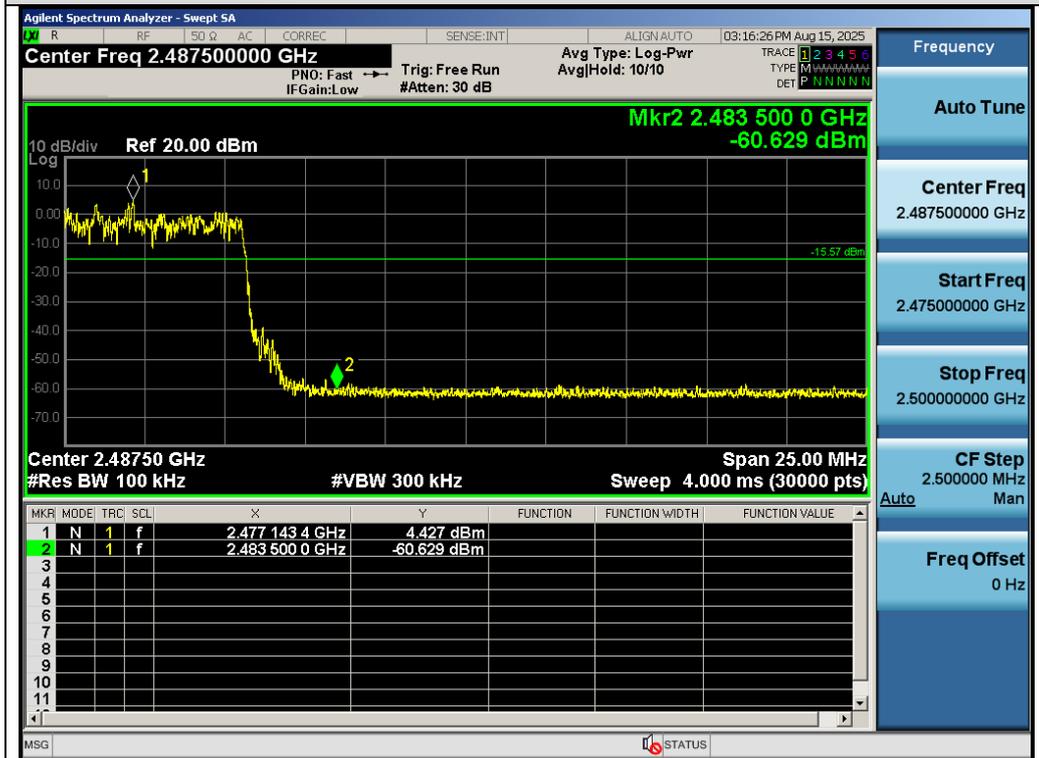

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Higher Band Edge Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

9. Radiated Spurious Emission

9.1 Measurement Limit

- 15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

- **Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as shown in the table above
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

- **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


- **Average Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq [3 \times \text{RBW}]$
4. Detector = Power averaging (rms)
5. Averaging type = power (i.e., rms)
6. Sweep time = auto
7. Perform a trace average of at least 100 traces.
8. The applicable correction factor is $[10 \cdot \log(1 / D)]$, where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

9.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

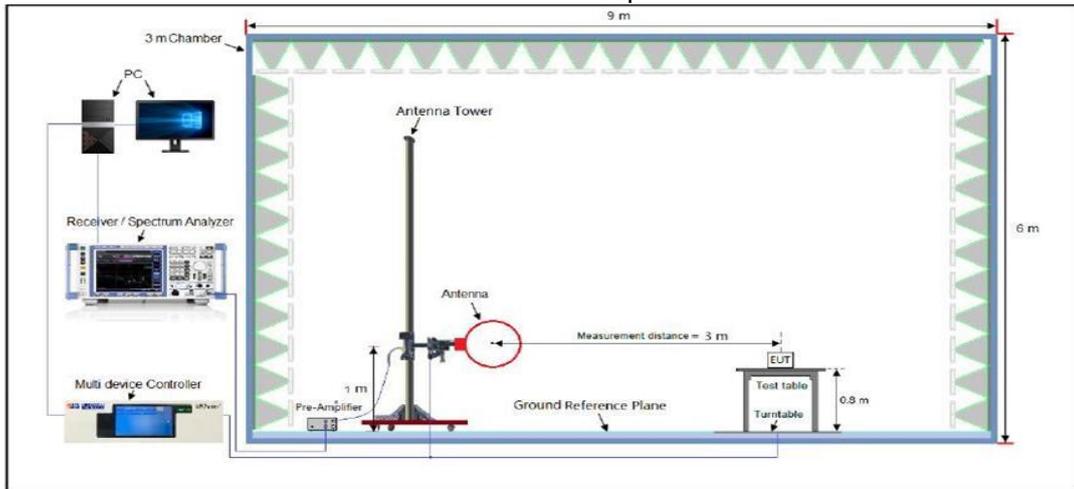

Radiated Emission Test Setup 30MHz-1000MHz

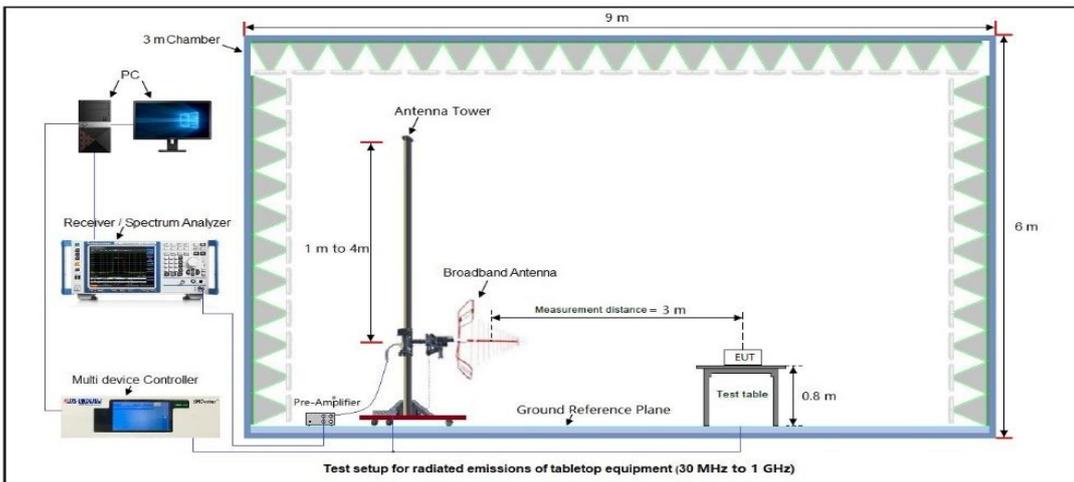

Radiated Emission Test Setup Above 1000MHz

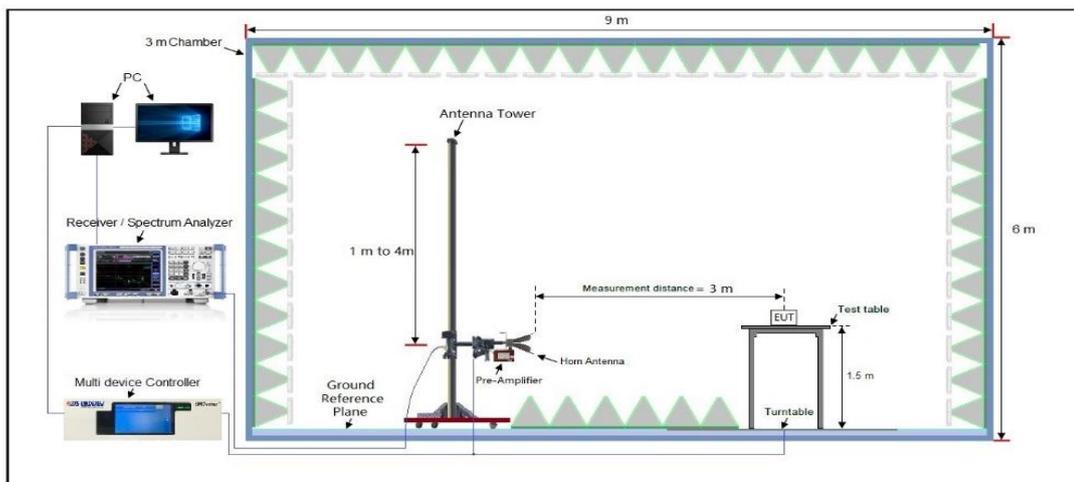

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Left earphone


Radiated Emission Test Results at 30MHz-1GHz			
EUT Name	Wireless Headphone	Model Name	D1101
Temperature	21.5°C	Relative Humidity	53.2%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 8	Antenna Polarity	Horizontal

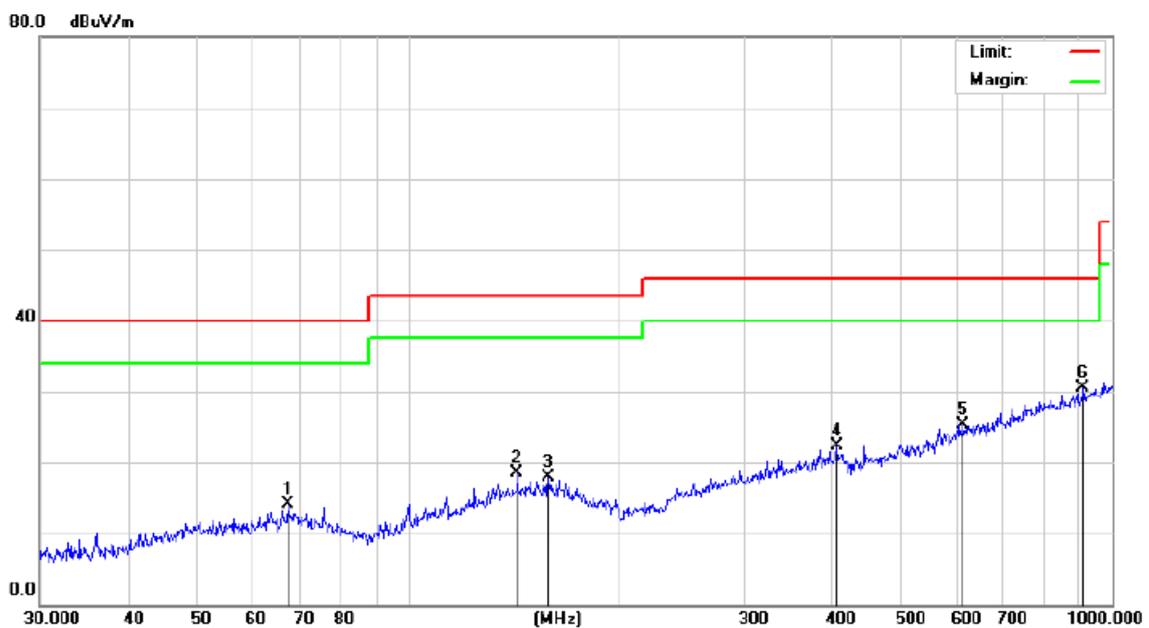

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		67.4381	39.41	-25.24	14.17	40.00	-25.83	peak
2		142.8243	39.40	-20.88	18.52	43.50	-24.98	peak
3		158.1123	38.53	-20.65	17.88	43.50	-25.62	peak
4		406.0880	39.66	-17.40	22.26	46.00	-23.74	peak
5		614.2142	39.04	-13.67	25.37	46.00	-20.63	peak
6	*	909.6666	39.17	-8.73	30.44	46.00	-15.56	peak

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radiated Emission Test Results at 30MHz-1GHz			
EUT Name	Wireless Headphone	Model Name	D1101
Temperature	21.5°C	Relative Humidity	53.2%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 8	Antenna Polarity	Vertical

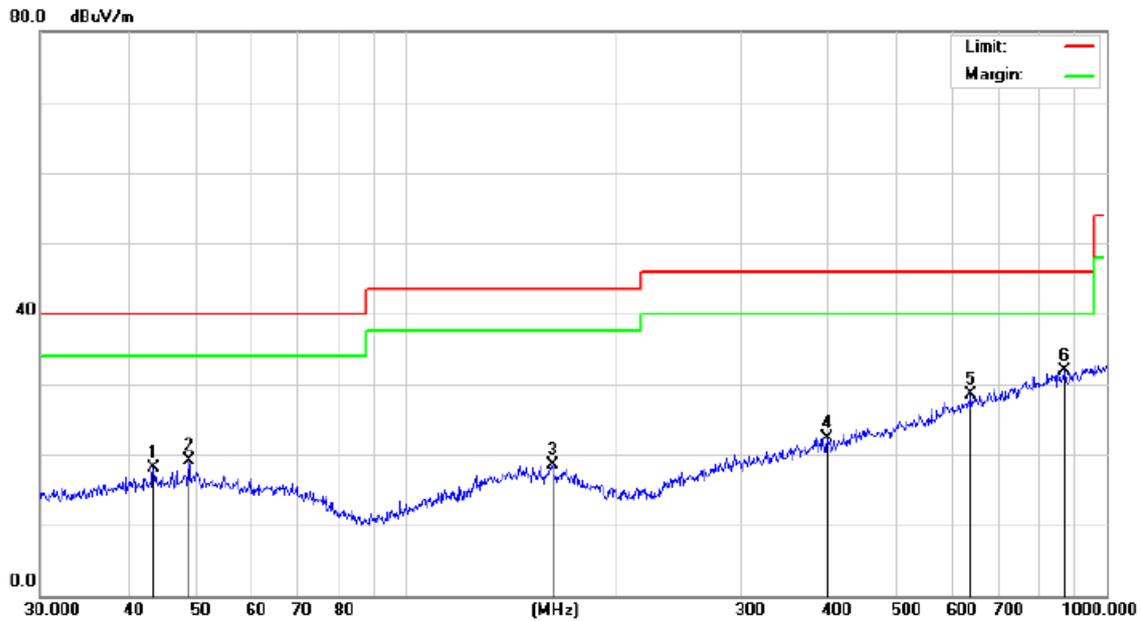

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		43.5057	39.58	-21.55	18.03	40.00	-21.97	peak
2		48.8429	40.27	-21.19	19.08	40.00	-20.92	peak
3		161.4742	38.25	-19.79	18.46	43.50	-25.04	peak
4		399.0302	39.23	-16.93	22.30	46.00	-23.70	peak
5		640.6110	39.00	-10.56	28.44	46.00	-17.56	peak
6	*	869.1302	39.13	-7.25	31.88	46.00	-14.12	peak

RESULT: Pass


Note:

- Factor=Antenna Factor + Cable loss- Pre-amplifier, Margin=Measurement-Limit.
- All test modes had been pre-tested. The mode 8 is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Right earphone


Radiated Emission Test Results at 30MHz-1GHz			
EUT Name	Wireless Headphone	Model Name	D1101
Temperature	21.5°C	Relative Humidity	53.2%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 9	Antenna Polarity	Horizontal

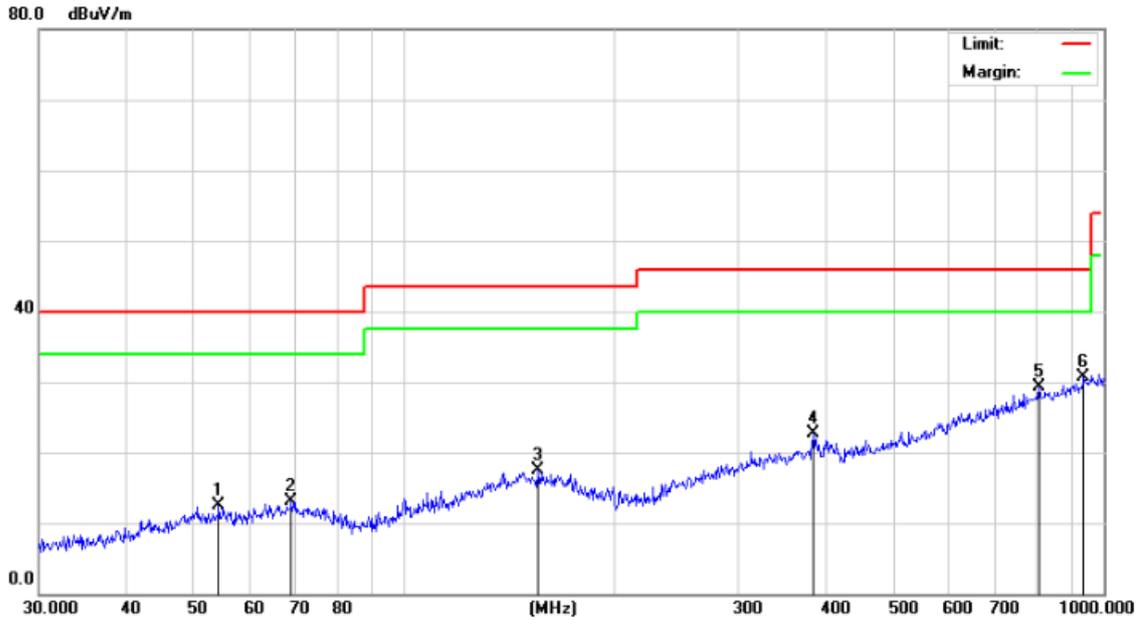

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		54.2610	38.56	-26.13	12.43	40.00	-27.57	peak
2		68.8721	38.29	-25.23	13.06	40.00	-26.94	peak
3		155.3644	38.22	-20.71	17.51	43.50	-25.99	peak
4		383.9318	40.36	-17.70	22.66	46.00	-23.34	peak
5		807.4291	39.04	-9.71	29.33	46.00	-16.67	peak
6	*	935.5463	38.97	-8.30	30.67	46.00	-15.33	peak

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radiated Emission Test Results at 30MHz-1GHz			
EUT Name	Wireless Headphone	Model Name	D1101
Temperature	21.5°C	Relative Humidity	53.2%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 9	Antenna Polarity	Vertical

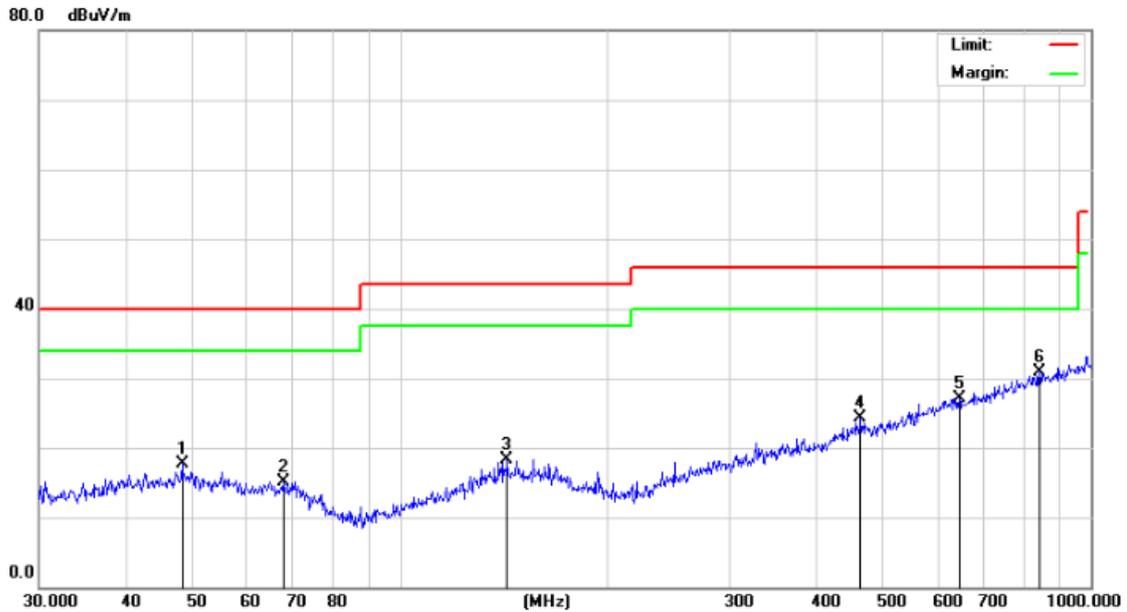

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		48.3318	39.01	-21.21	17.80	40.00	-22.20	peak
2		67.6751	37.50	-22.39	15.11	40.00	-24.89	peak
3		142.8243	38.21	-19.95	18.26	43.50	-25.24	peak
4		463.9696	39.28	-14.90	24.38	46.00	-21.62	peak
5		645.1195	37.66	-10.58	27.08	46.00	-18.92	peak
6	*	842.1295	38.30	-7.30	31.00	46.00	-15.00	peak

RESULT: Pass

Note:


- Factor=Antenna Factor + Cable loss- Pre-amplifier, Margin=Measurement-Limit.
- All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Left earphone

Radiated Emissions Test Results Above 1GHz

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 7	Antenna Polarity	Horizontal

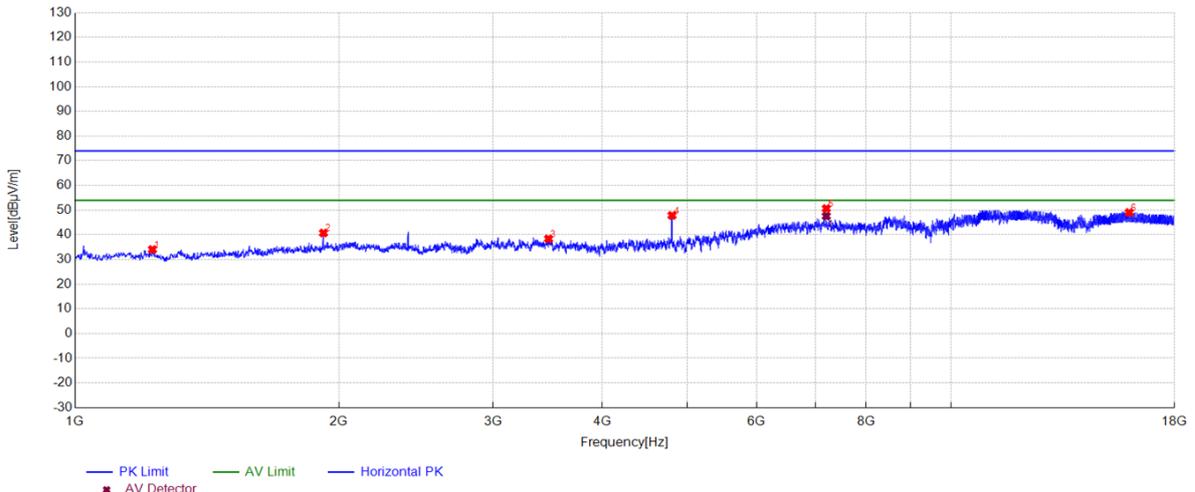


PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1225.548	34.04	-18.09	74.00	39.96	150	18	Horizontal
2	1921.461	40.74	-14.77	74.00	33.26	150	307	Horizontal
3	3471.964	38.36	-11.16	74.00	35.64	150	47	Horizontal
4	4803.720	47.86	-9.25	74.00	26.14	150	330	Horizontal
5	7206.547	50.65	-3.62	74.00	23.35	150	341	Horizontal
6	15979.13	49.03	5.77	74.00	24.97	150	336	Horizontal

AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7205.970	-3.62	47.56	54.00	6.44	150	312.2	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 7	Antenna Polarity	Vertical

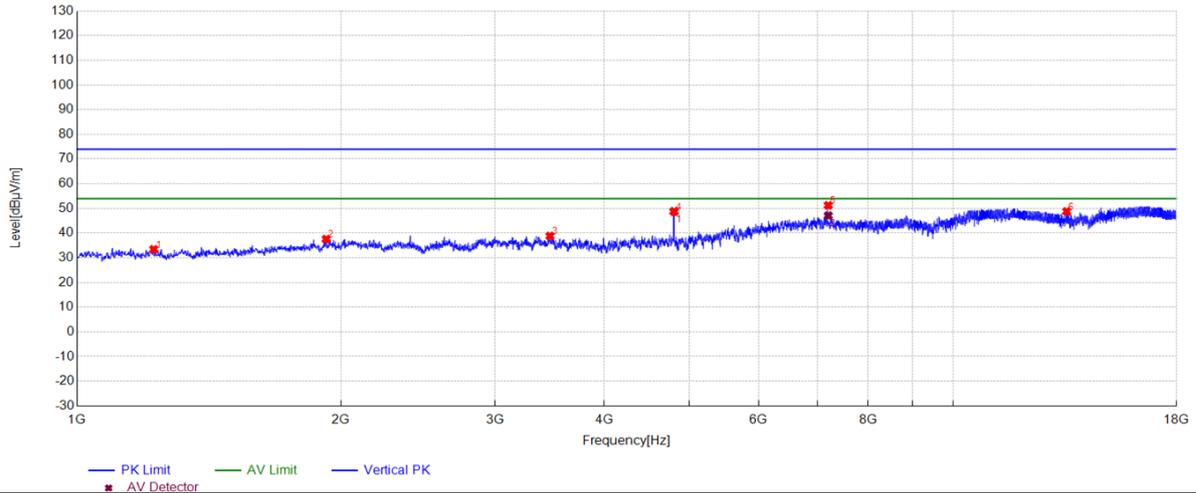

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1223.281	33.43	-18.08	74.00	40.57	150	266	Vertical
2	1924.861	37.55	-14.74	74.00	36.45	150	266	Vertical
3	3466.297	38.84	-11.17	74.00	35.16	150	156	Vertical
4	4803.720	48.63	-9.25	74.00	25.37	150	133	Vertical
5	7205.413	51.24	-3.62	74.00	22.76	150	41	Vertical
6	13485.63	48.78	3.18	74.00	25.22	150	30	Vertical


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4804.008	-9.25	48.81	54.00	5.19	150	133	Vertical
2	7205.990	-3.62	47.08	54.00	6.92	150	41	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 8	Antenna Polarity	Horizontal

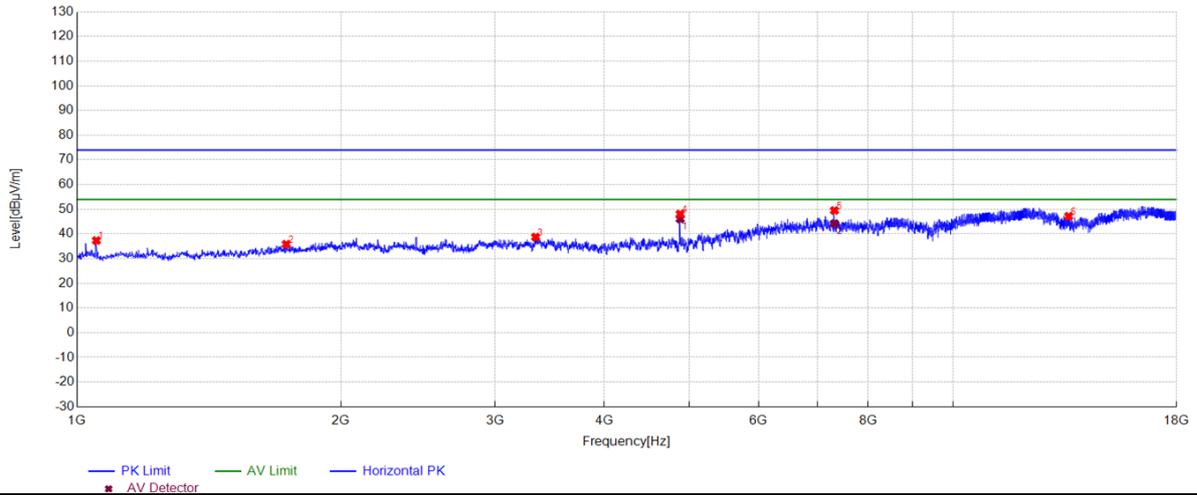


PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1052.136	37.32	-18.24	74.00	36.68	150	359	Horizontal
2	1733.315	35.84	-16.13	74.00	38.16	150	41	Horizontal
3	3338.222	38.72	-11.42	74.00	35.28	150	128	Horizontal
4	4881.925	48.06	-9.21	74.00	25.94	150	359	Horizontal
5	7323.288	49.49	-3.66	74.00	24.51	150	238	Horizontal
6	13555.90	47.14	3.23	74.00	26.86	150	133	Horizontal

AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4881.681	-9.21	46.06	54.00	7.94	150	359	Horizontal
2	7323.434	-3.66	44.19	54.00	9.81	150	238	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 8	Antenna Polarity	Vertical

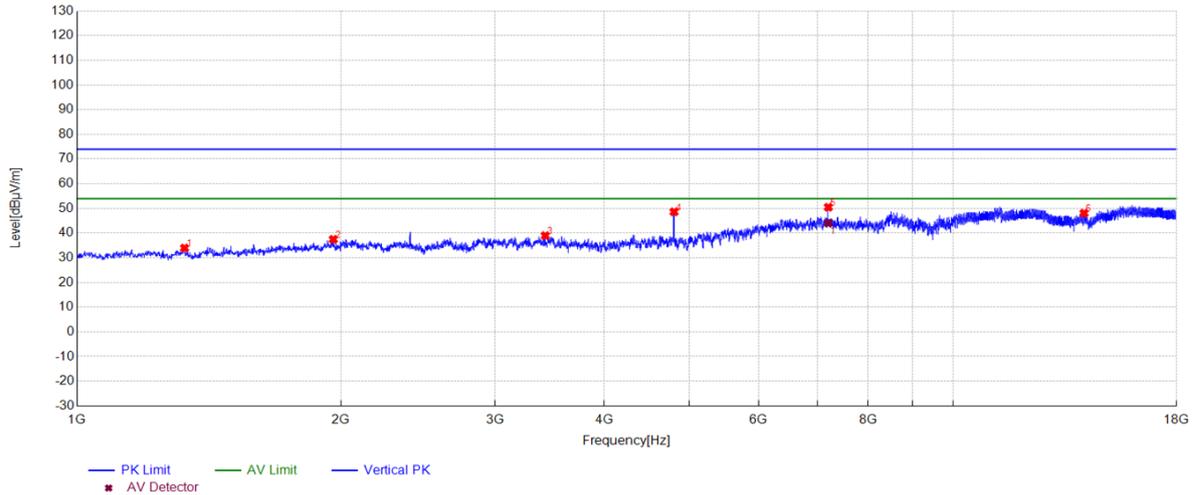

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1326.421	33.95	-17.99	74.00	40.05	150	324	Vertical
2	1961.130	37.46	-14.48	74.00	36.54	150	151	Vertical
3	3424.361	38.97	-11.25	74.00	35.03	150	347	Vertical
4	4803.720	48.60	-9.25	74.00	25.40	150	318	Vertical
5	7206.547	50.49	-3.62	74.00	23.51	150	12	Vertical
6	14115.80	48.06	3.43	74.00	25.94	150	58	Vertical


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7206.475	-3.62	44.04	54.00	9.96	150	43.3	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4℃	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 9	Antenna Polarity	Horizontal

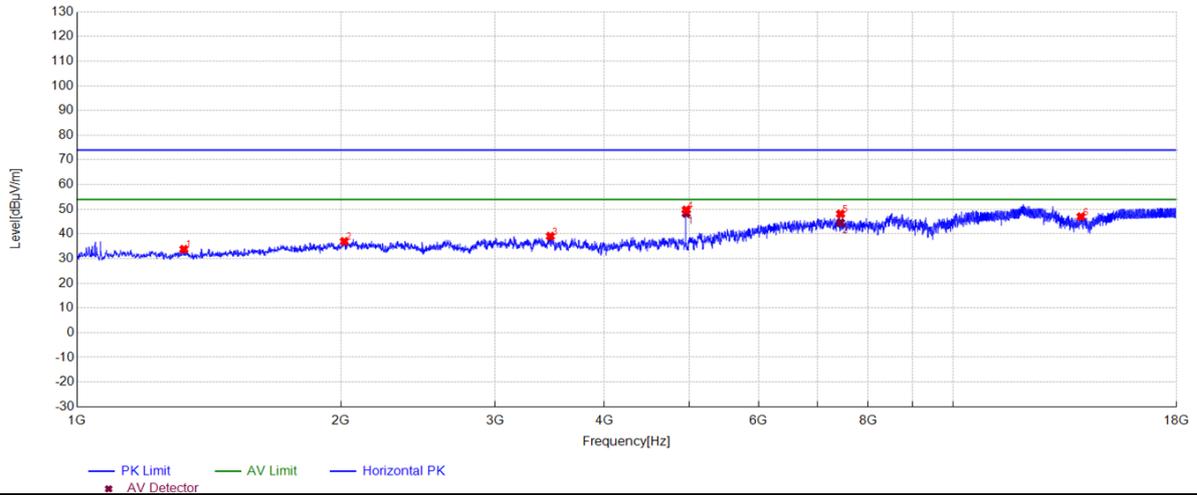


PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1324.154	33.79	-17.99	74.00	40.21	150	319	Horizontal
2	2018.934	36.95	-14.14	74.00	37.05	150	15	Horizontal
3	3469.697	39.08	-11.17	74.00	34.92	150	175	Horizontal
4	4960.130	49.72	-9.16	74.00	24.28	150	358	Horizontal
5	7441.162	48.10	-3.71	74.00	25.90	150	313	Horizontal
6	14001.33	46.99	3.79	74.00	27.01	150	43	Horizontal

AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.981	-9.16	48.30	54.00	5.70	150	358	Horizontal
2	7439.972	-3.71	44.54	54.00	9.46	150	219.9	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 9	Antenna Polarity	Vertical

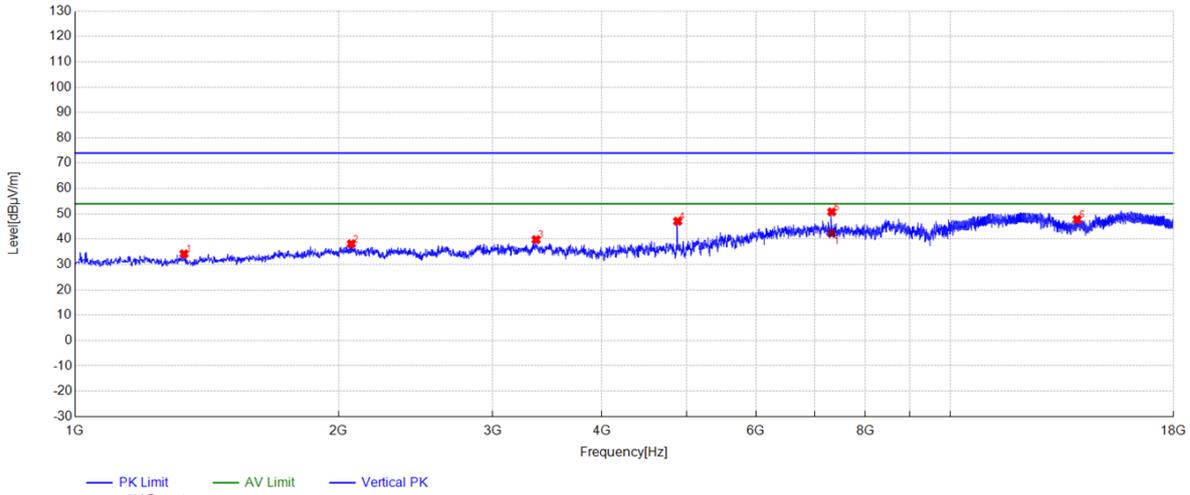

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1332.088	34.20	-17.98	74.00	39.80	150	213	Vertical
2	2068.804	38.16	-13.98	74.00	35.84	150	247	Vertical
3	3364.290	39.79	-11.37	74.00	34.21	150	207	Vertical
4	4883.058	47.06	-9.21	74.00	26.94	150	98	Vertical
5	7323.288	50.76	-3.66	74.00	23.24	150	35	Vertical
6	13966.19	47.76	3.75	74.00	26.24	150	310	Vertical

AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7323.507	-3.66	42.30	54.00	11.70	150	35	Vertical

RESULT: PASS

Note:


1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
2. Factor = Antenna Factor + Cable loss – Pre-amplifier gain, Margin =Limit- Level.
3. The “Factor” value can be calculated automatically by software of measurement system.
4. All test modes had been pre-tested. The mode 8DPSK is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Right earphone

Radiated Emissions Test Results Above 1GHz


EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 7	Antenna Polarity	Horizontal

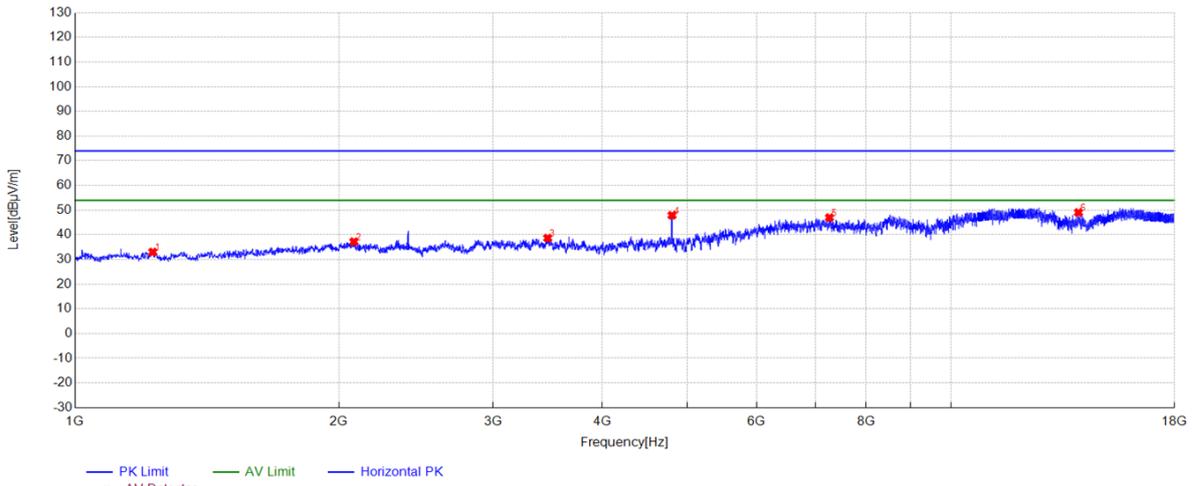

PK Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1226.681	33.03	-18.08	74.00	40.97	150	320	Horizontal
2	2081.272	37.19	-13.93	74.00	36.81	150	109	Horizontal
3	3464.030	38.67	-11.18	74.00	35.33	150	4	Horizontal
4	4803.720	47.91	-9.25	74.00	26.09	150	64	Horizontal
5	7266.617	46.95	-3.64	74.00	27.05	150	247	Horizontal
6	13982.06	49.03	3.78	74.00	24.97	150	196	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 7	Antenna Polarity	Vertical

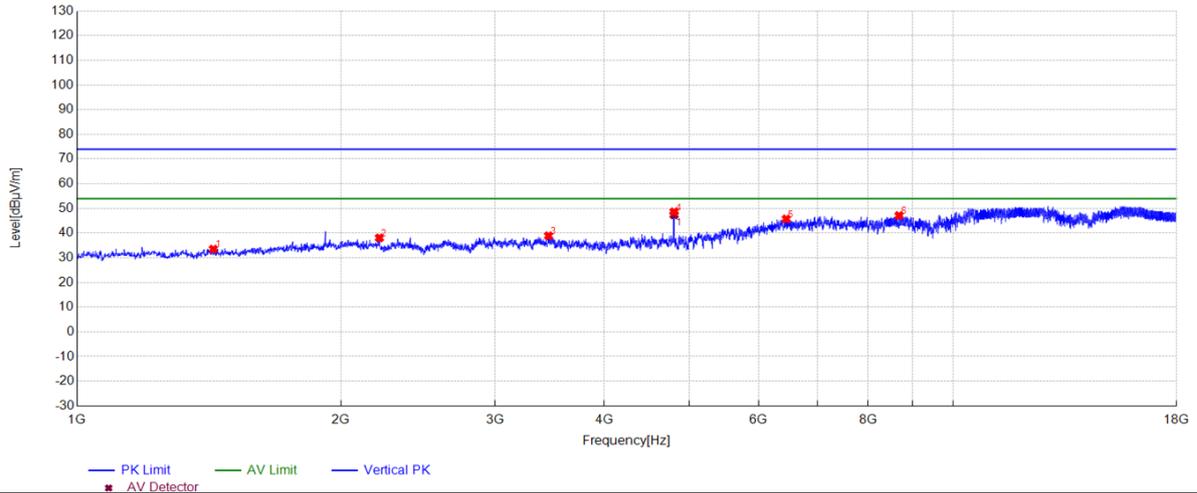

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1430.695	33.51	-17.89	74.00	40.49	150	26	Vertical
2	2213.880	38.05	-13.52	74.00	35.95	150	10	Vertical
3	3453.830	38.91	-11.20	74.00	35.09	150	43	Vertical
4	4803.720	48.60	-9.25	74.00	25.40	150	348	Vertical
5	6451.696	45.73	-5.24	74.00	28.27	150	66	Vertical
6	8677.711	47.10	-2.06	74.00	26.90	150	0	Vertical


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.960	-9.25	47.39	54.00	6.61	150	348	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radiated Emissions Test Results for Above 1GHz


EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 8	Antenna Polarity	Horizontal

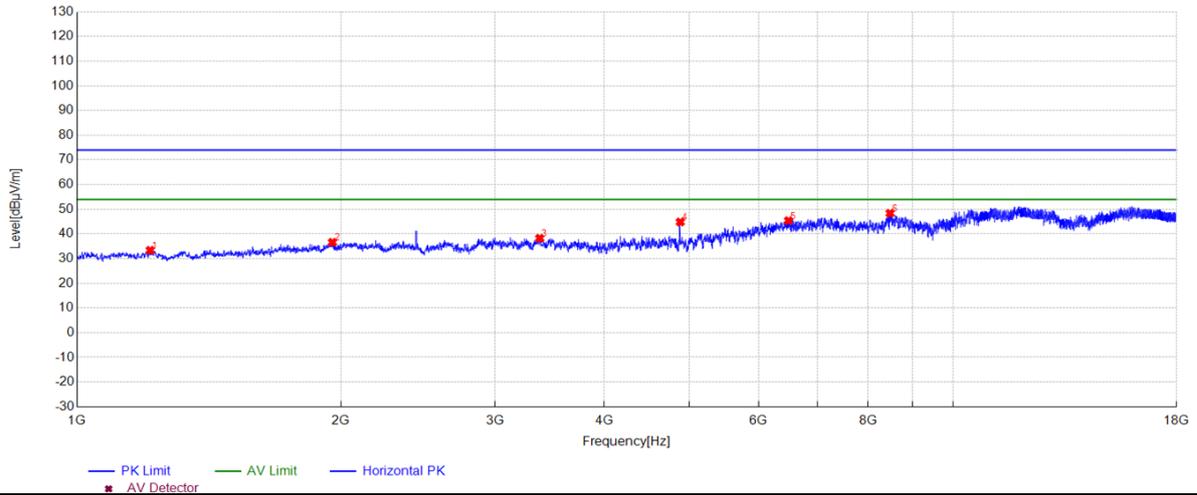

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1211.947	33.38	-18.09	74.00	40.62	150	7	Horizontal
2	1956.597	36.60	-14.51	74.00	37.40	150	78	Horizontal
3	3374.491	38.24	-11.35	74.00	35.76	150	7	Horizontal
4	4883.058	44.84	-9.21	74.00	29.16	150	210	Horizontal
5	6489.099	45.39	-5.21	74.00	28.61	150	95	Horizontal
6	8474.831	48.37	-2.10	74.00	25.63	150	113	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 8	Antenna Polarity	Vertical

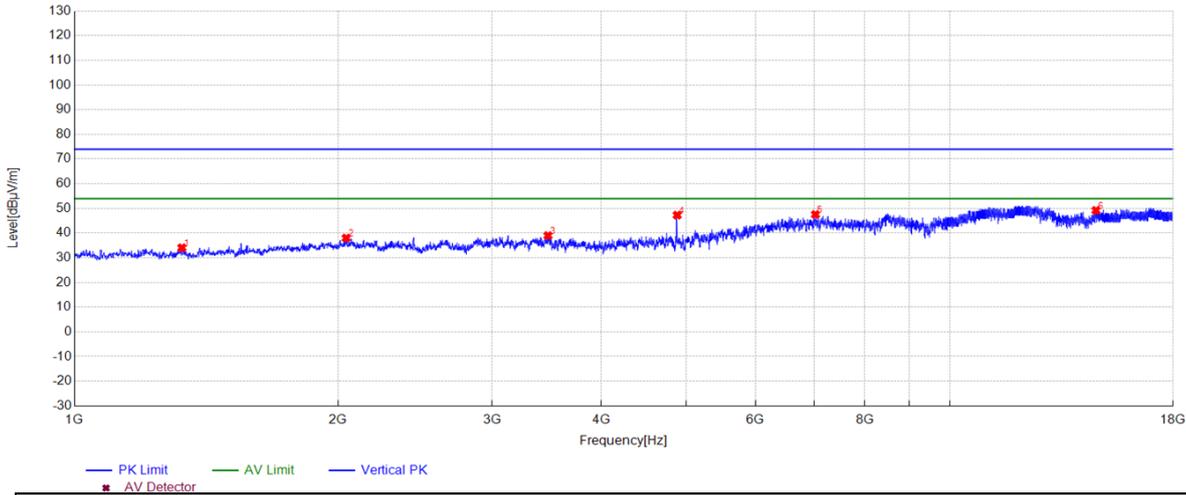


PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1326.421	34.05	-17.99	74.00	39.95	150	175	Vertical
2	2043.869	37.99	-14.06	74.00	36.01	150	216	Vertical
3	3475.365	39.00	-11.16	74.00	35.00	150	18	Vertical
4	4881.925	47.28	-9.21	74.00	26.72	150	36	Vertical
5	7025.201	47.54	-3.55	74.00	26.46	150	222	Vertical
6	14697.24	49.20	2.34	74.00	24.80	150	187	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radiated Emissions Test Results for Above 1GHz


EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 9	Antenna Polarity	Horizontal

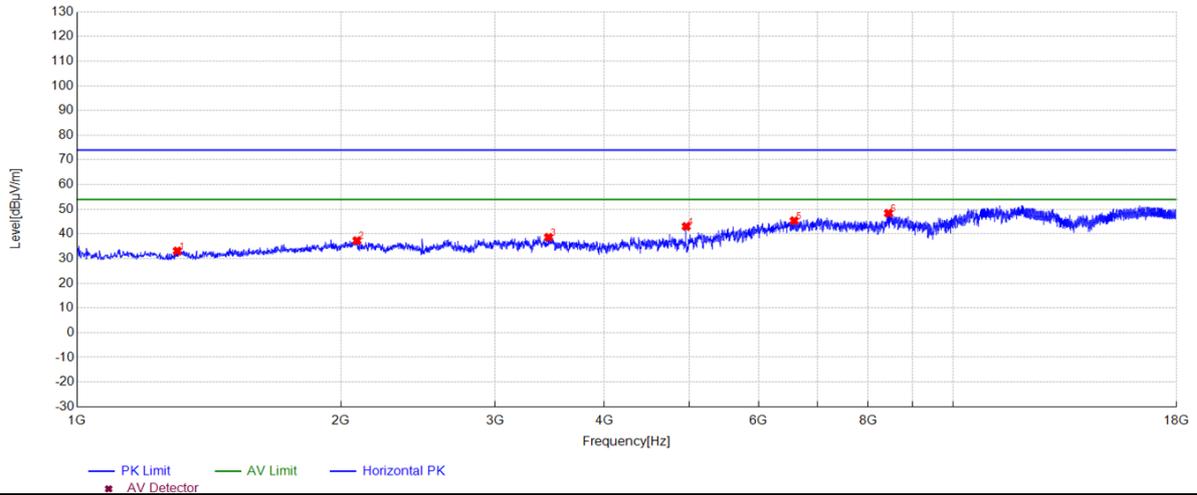

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1301.486	33.11	-18.01	74.00	40.89	150	239	Horizontal
2	2086.939	37.28	-13.92	74.00	36.72	150	342	Horizontal
3	3453.830	38.64	-11.20	74.00	35.36	150	148	Horizontal
4	4960.130	43.02	-9.16	74.00	30.98	150	102	Horizontal
5	6587.705	45.36	-4.91	74.00	28.64	150	182	Horizontal
6	8440.829	48.37	-2.25	74.00	25.63	150	256	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	20.4°C	Relative Humidity	51.8%
Pressure	960hPa	Test Voltage	DC 3.85V
Test Mode	Mode 9	Antenna Polarity	Vertical

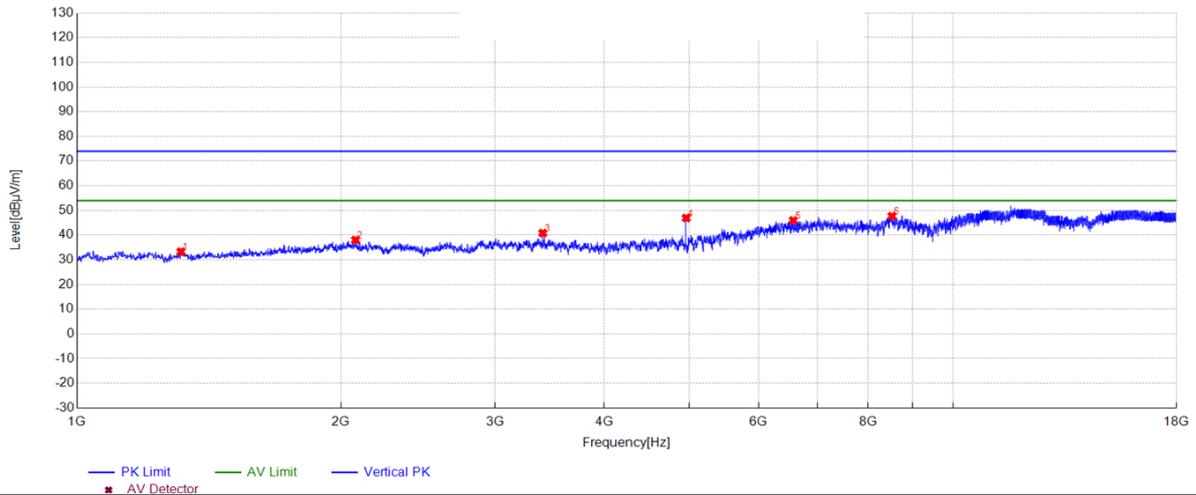

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1313.954	33.28	-18.00	74.00	40.72	150	9	Vertical
2	2079.005	37.99	-13.95	74.00	36.01	150	204	Vertical
3	3401.693	40.81	-11.30	74.00	33.19	150	158	Vertical
4	4960.130	46.93	-9.16	74.00	27.07	150	83	Vertical
5	6570.704	45.94	-4.97	74.00	28.06	150	176	Vertical
6	8517.901	47.68	-2.00	74.00	26.32	150	280	Vertical

RESULT: PASS

Note:

1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
2. Factor = Antenna Factor + Cable loss – Pre-amplifier gain, Margin =Limit- Level.
3. The “Factor” value can be calculated automatically by software of measurement system.
4. All test modes had been pre-tested. The mode 8DPSK is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Left earphone

Band Edge Emission Test Results for Restricted Bands

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	26°C	Relative Humidity	49%
Pressure	960hPa	Test Voltage	DC 3.85V

Bluetooth Tx CH00_2402 MHz_1Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2390.00	38.14	29.99	30.21	8.35	46.27	74	27.73	Peak	Horizontal
2	2390.00	27.57	29.99	30.21	8.35	35.7	54	18.30	AV	Horizontal
3	2390.00	38.47	29.99	30.21	8.35	46.6	74	27.40	Peak	Vertical
4	2390.00	24.77	29.99	30.21	8.35	32.9	54	21.10	AV	Vertical
Bluetooth Tx CH78_2480 MHz_1Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2483.50	39.83	30.25	30.25	8.5	48.33	74	25.67	Peak	Horizontal
2	2483.50	29.38	30.25	30.25	8.5	37.88	54	16.12	AV	Horizontal
3	2483.50	38.73	30.25	30.25	8.5	47.23	74	26.77	Peak	Vertical
4	2483.50	28.06	30.25	30.25	8.5	36.56	54	17.44	AV	Vertical

Bluetooth Tx CH00_2402 MHz_2Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2390.00	36.37	29.99	30.21	8.35	44.5	74	29.50	Peak	Horizontal
2	2390.00	27.16	29.99	30.21	8.35	35.29	54	18.71	AV	Horizontal
3	2390.00	33.05	29.99	30.21	8.35	41.18	74	32.82	Peak	Vertical
4	2390.00	24.00	29.99	30.21	8.35	32.13	54	21.87	AV	Vertical
Bluetooth Tx CH78_2480 MHz_2Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2483.50	40.16	30.25	30.25	8.5	48.66	74	25.34	Peak	Horizontal
2	2483.50	30.09	30.25	30.25	8.5	38.59	54	15.41	AV	Horizontal
3	2483.50	36.04	30.25	30.25	8.5	44.54	74	29.46	Peak	Vertical
4	2483.50	25.87	30.25	30.25	8.5	34.37	54	19.63	AV	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Bluetooth Tx CH00_2402 MHz_3Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2390.00	37.40	29.99	30.21	8.35	45.53	74	28.47	Peak	Horizontal
2	2390.00	27.12	29.99	30.21	8.35	35.25	54	18.75	AV	Horizontal
3	2390.00	32.49	29.99	30.21	8.35	40.62	74	33.38	Peak	Vertical
4	2390.00	25.16	29.99	30.21	8.35	33.29	54	20.71	AV	Vertical
Bluetooth Tx CH78_2480 MHz_3Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2483.50	38.92	30.25	30.25	8.5	47.42	74	26.58	Peak	Horizontal
2	2483.50	29.89	30.25	30.25	8.5	38.39	54	15.61	AV	Horizontal
3	2483.50	37.51	30.25	30.25	8.5	46.01	74	27.99	Peak	Vertical
4	2483.50	27.88	30.25	30.25	8.5	36.38	54	17.62	AV	Vertical

Remark:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Margin = Limit - Emission Level.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=3MHz/Sweep time=Auto/Detector=Average.

RESULT: Pass

Right earphone

Band Edge Emission Test Results for Restricted Bands

EUT Name	Wireless Headphone	Model Name	D1101
Temperature	26°C	Relative Humidity	49%
Pressure	960hPa	Test Voltage	DC 3.85V

Bluetooth Tx CH00_2402 MHz_1Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2390.00	37.47	29.99	30.21	8.35	45.60	74	28.40	Peak	Horizontal
2	2390.00	27.20	29.99	30.21	8.35	35.33	54	18.67	AV	Horizontal
3	2390.00	32.88	29.99	30.21	8.35	41.01	74	32.99	Peak	Vertical
4	2390.00	24.26	29.99	30.21	8.35	32.39	54	21.61	AV	Vertical
Bluetooth Tx CH78_2480 MHz_1Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2483.50	41.22	30.25	30.25	8.5	49.72	74	24.28	Peak	Horizontal
2	2483.50	29.63	30.25	30.25	8.5	38.13	54	15.87	AV	Horizontal
3	2483.50	35.19	30.25	30.25	8.5	43.69	74	30.31	Peak	Vertical
4	2483.50	26.77	30.25	30.25	8.5	35.27	54	18.73	AV	Vertical

Bluetooth Tx CH00_2402 MHz_2Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2390.00	36.56	29.99	30.21	8.35	44.69	74	29.31	Peak	Horizontal
2	2390.00	27.18	29.99	30.21	8.35	35.31	54	18.69	AV	Horizontal
3	2390.00	33.76	29.99	30.21	8.35	41.89	74	32.11	Peak	Vertical
4	2390.00	24.49	29.99	30.21	8.35	32.62	54	21.38	AV	Vertical
Bluetooth Tx CH78_2480 MHz_2Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2483.50	41.45	30.25	30.25	8.5	49.95	74	24.05	Peak	Horizontal
2	2483.50	29.58	30.25	30.25	8.5	38.08	54	15.92	AV	Horizontal
3	2483.50	37.76	30.25	30.25	8.5	46.26	74	27.74	Peak	Vertical
4	2483.50	26.18	30.25	30.25	8.5	34.68	54	19.32	AV	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Bluetooth Tx CH00_2402 MHz_3Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2390.00	35.94	29.99	30.21	8.35	44.07	74	29.93	Peak	Horizontal
2	2390.00	27.05	29.99	30.21	8.35	35.18	54	18.82	AV	Horizontal
3	2390.00	34.39	29.99	30.21	8.35	42.52	74	31.48	Peak	Vertical
4	2390.00	24.76	29.99	30.21	8.35	32.89	54	21.11	AV	Vertical
Bluetooth Tx CH78_2480 MHz_3Mbps										
Item (Mark)	Freq. MHz	Reading dBμV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBμV/m	Limit dBμV/m	Margin dB	Detector	Pol.
1	2483.50	40.10	30.25	30.25	8.5	48.60	74	25.40	Peak	Horizontal
2	2483.50	29.32	30.25	30.25	8.5	37.82	54	16.18	AV	Horizontal
3	2483.50	36.38	30.25	30.25	8.5	44.88	74	29.12	Peak	Vertical
4	2483.50	27.19	30.25	30.25	8.5	35.69	54	18.31	AV	Vertical

Remark:

6. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
7. The other emission levels were very low against the limit.
8. Margin = Limit - Emission Level.
9. The average measurement was not performed when the peak measured data under the limit of average detection.
10. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=3MHz/Sweep time=Auto/Detector=Average.

RESULT: Pass

10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span = The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW \geq RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allow the trace to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

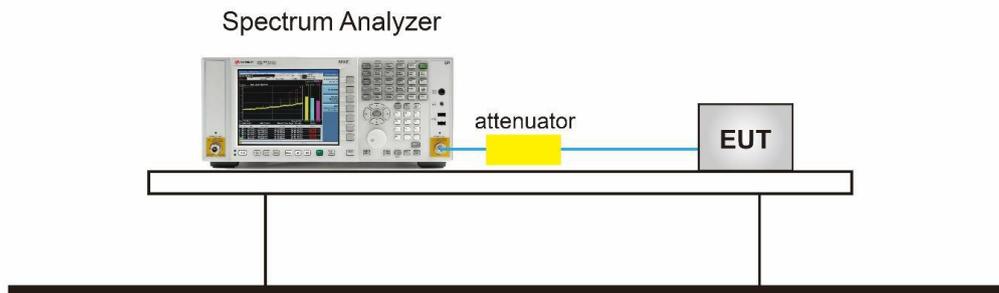


10.4 Measurement Result

Left earphone

Test Data of Number of Hopping Frequency			
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail
8DPSK Hopping	79	≥ 15	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graphs of Number of Hopping Frequency

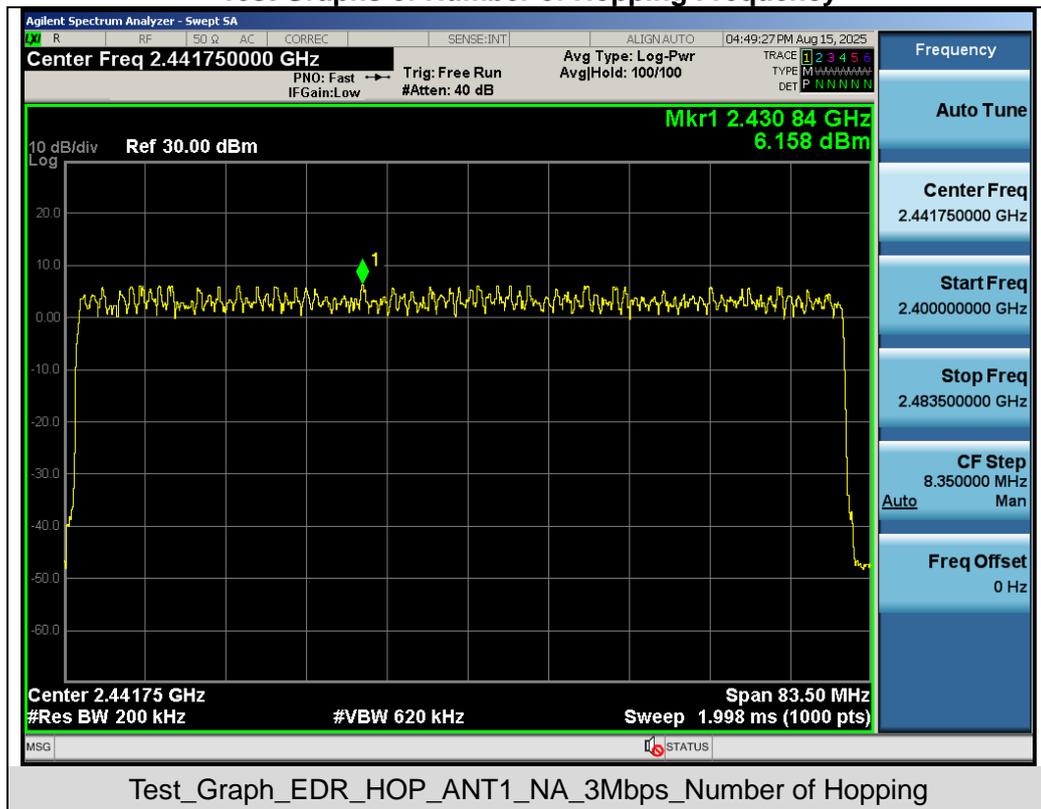

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Right earphone

Test Data of Number of Hopping Frequency			
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail
8DPSK Hopping	79	>=15	Pass

Test Graphs of Number of Hopping Frequency

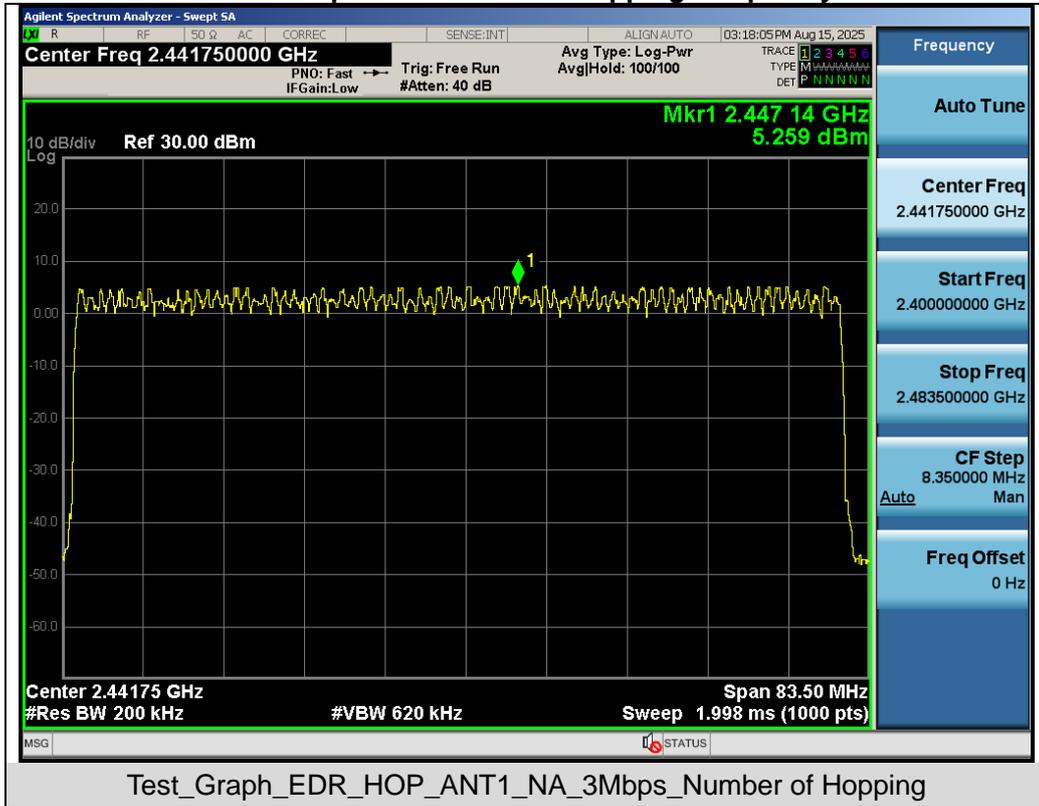

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span = Zero span, centered on a hopping channel.
2. RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
3. VBW \geq RBW
4. Sweep time = As necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = Free Run
7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

11.3 Measurement Setup (Block Diagram of Configuration)

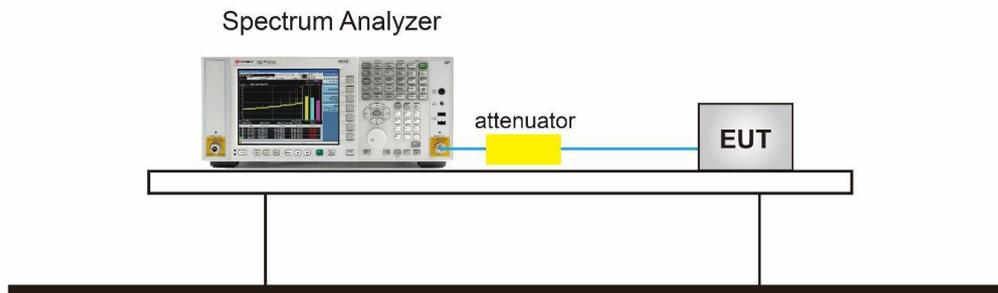


11.4 Measurement Result

Left earphone


Test Data of Dwell Time					
Channel	Time of Pulse for 3DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.893	27.0*4	312.444	400	Pass
2441	2.893	30.0*4	347.160	400	Pass
2480	2.893	32.0*4	370.304	400	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graphs of Dwell Time

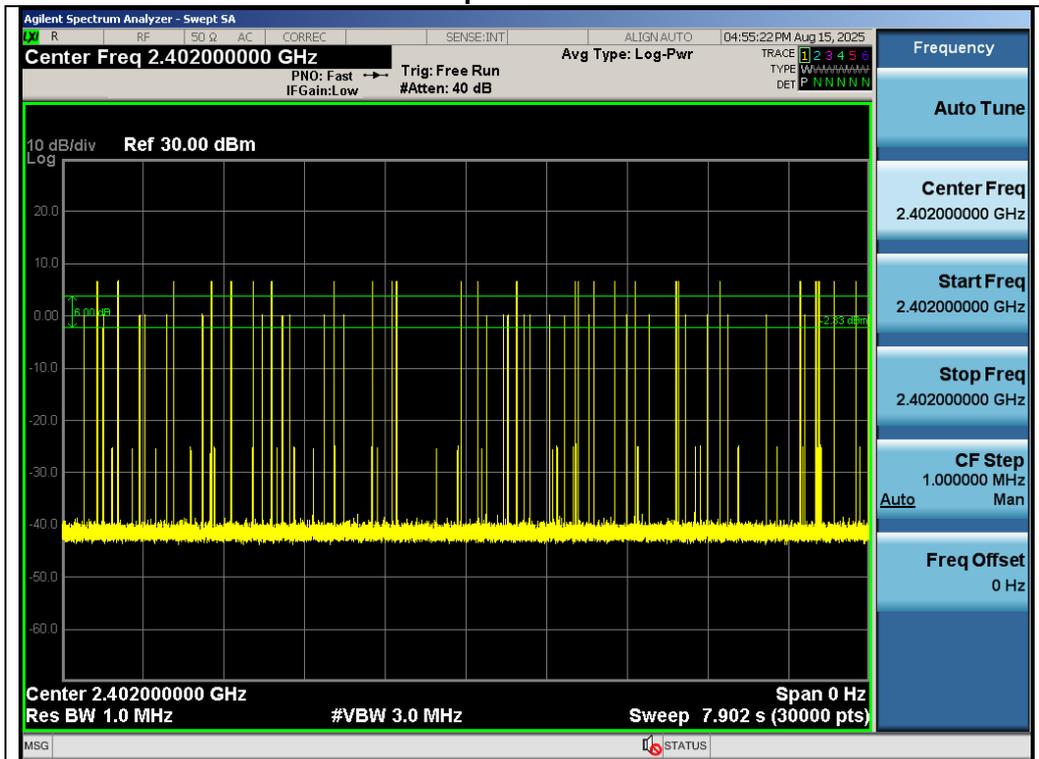


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2402_Number of Burst

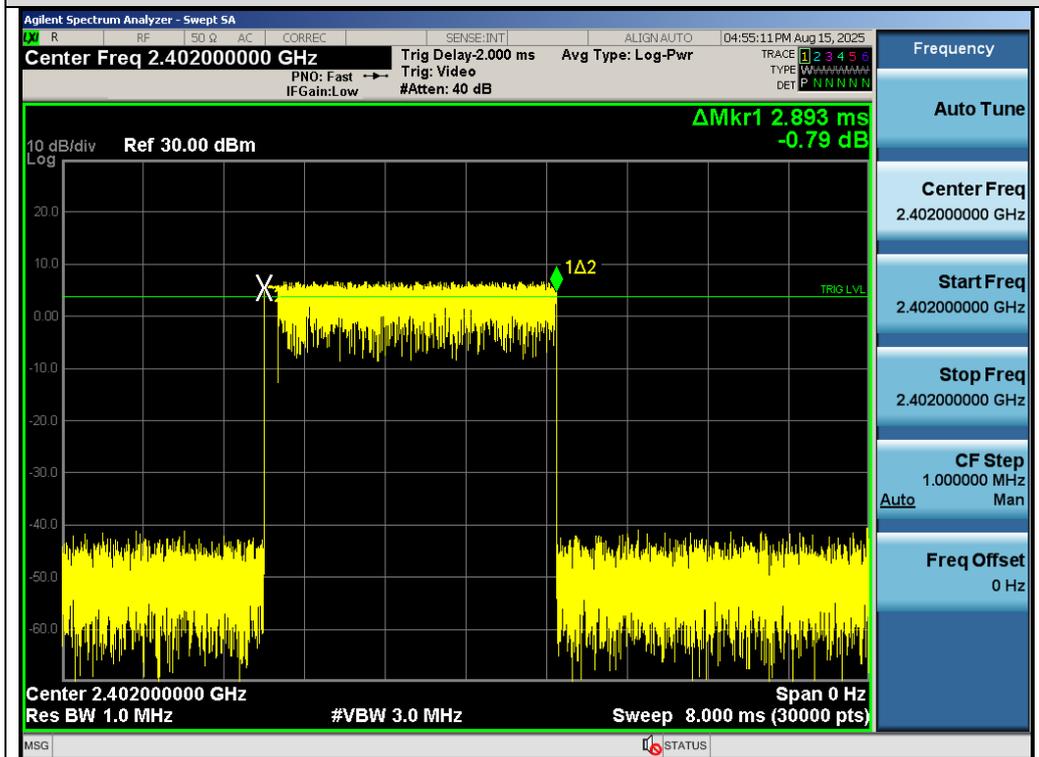


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2402_Time per Burst

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

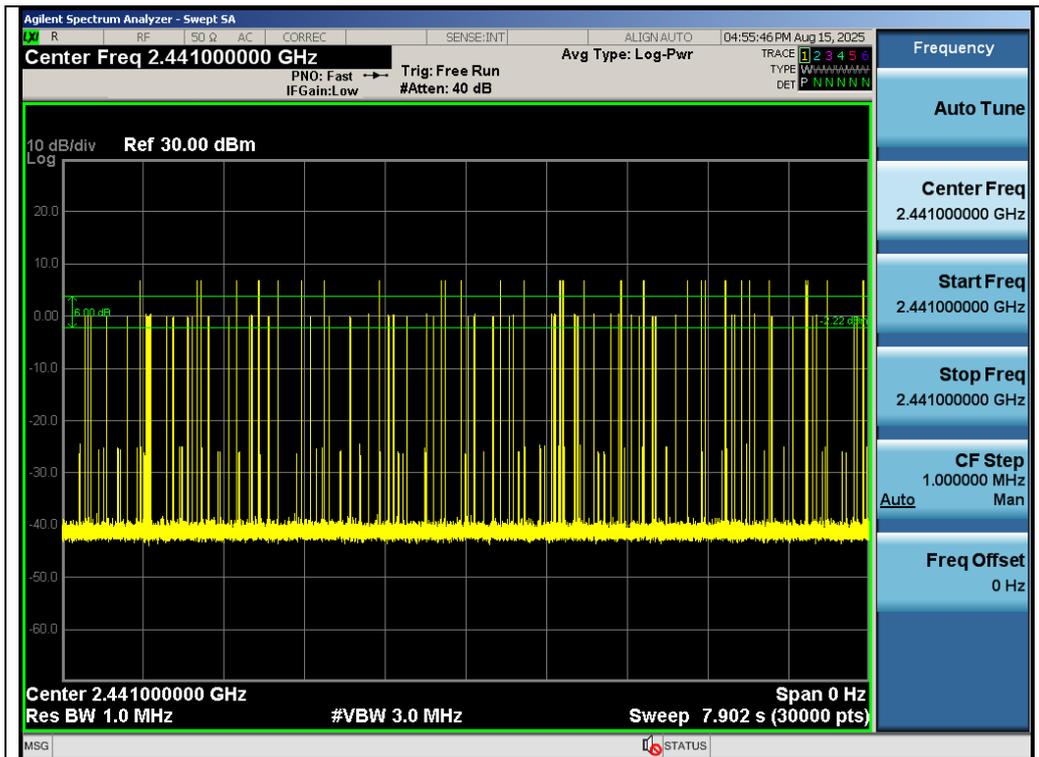


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2441_Number of Burst

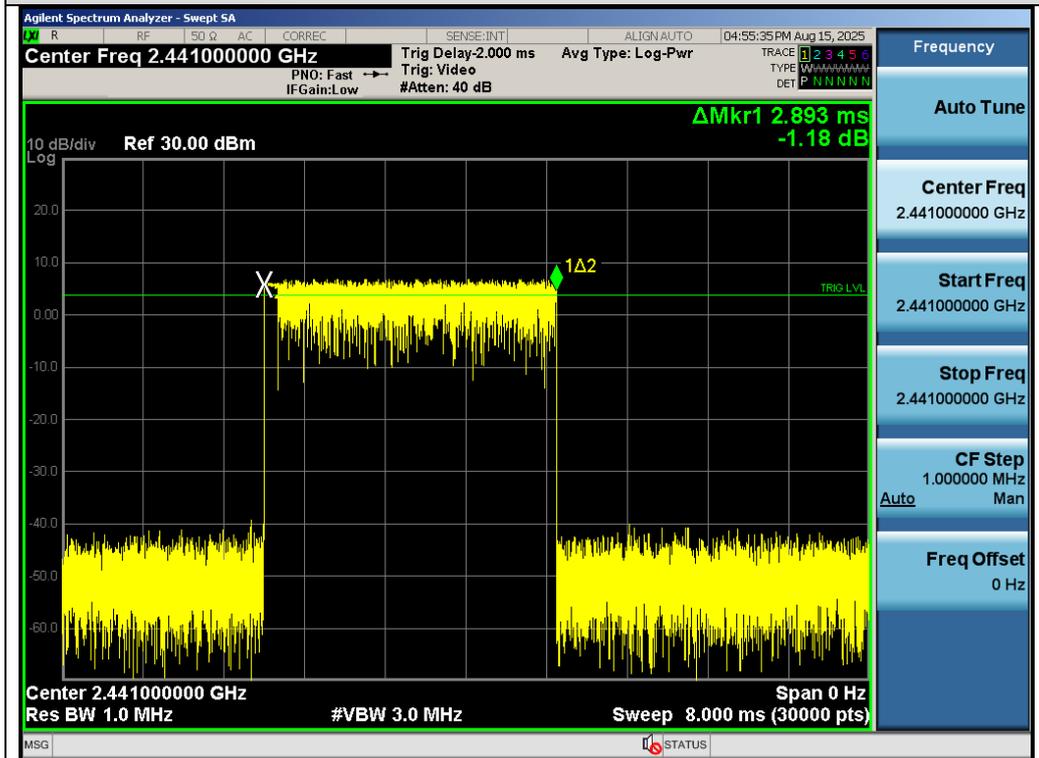


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2441_Time per Burst

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

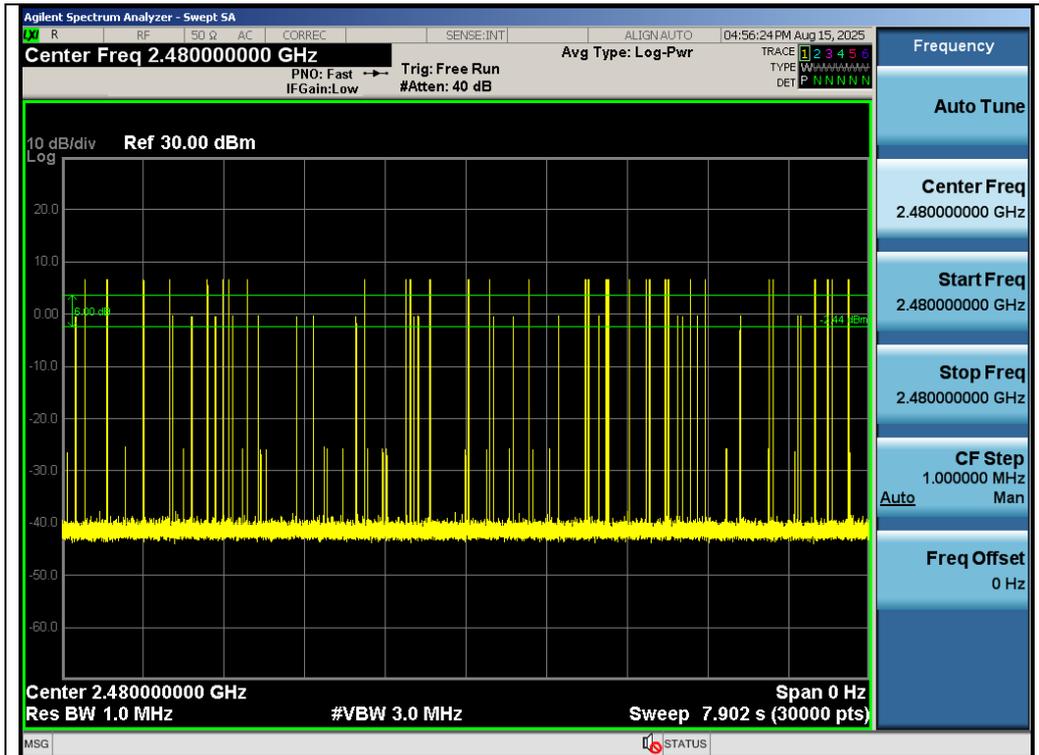

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2480_Number of Burst

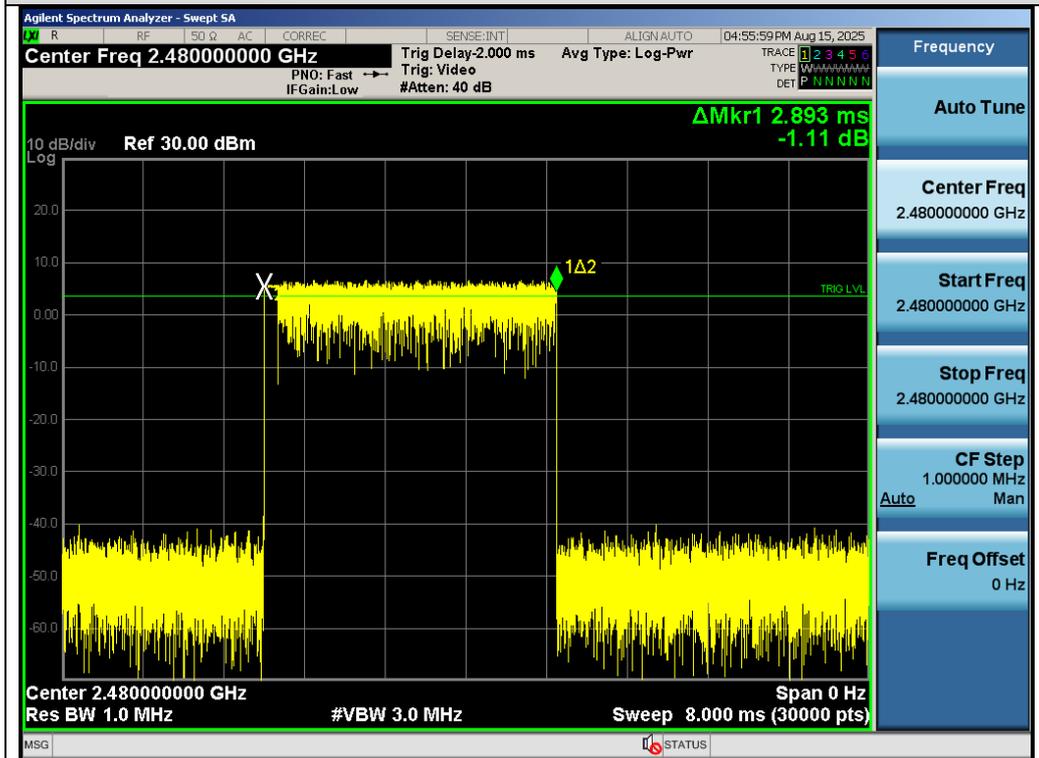

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2480_Time per Burst


Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Right earphone

Test Data of Dwell Time					
Channel	Time of Pulse for 3DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.894	29.0*4	335.704	400	Pass
2441	2.894	33.0*4	382.008	400	Pass
2480	2.894	30.0*4	347.280	400	Pass


Test Graphs of Dwell Time

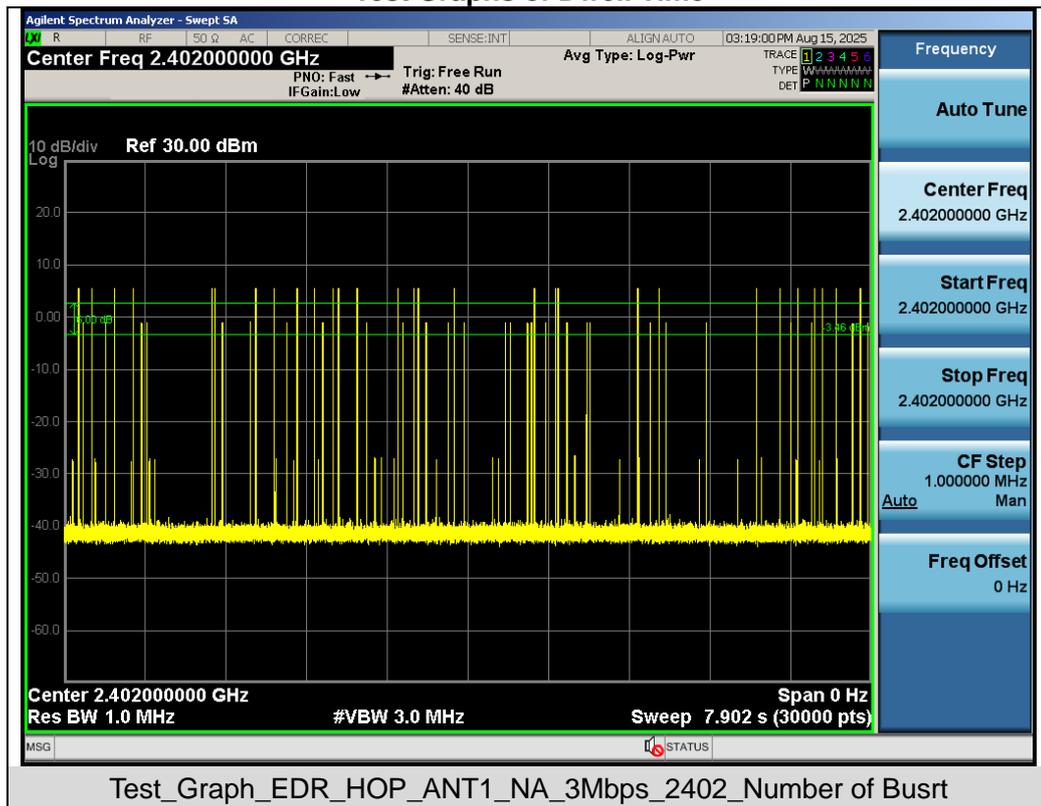

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

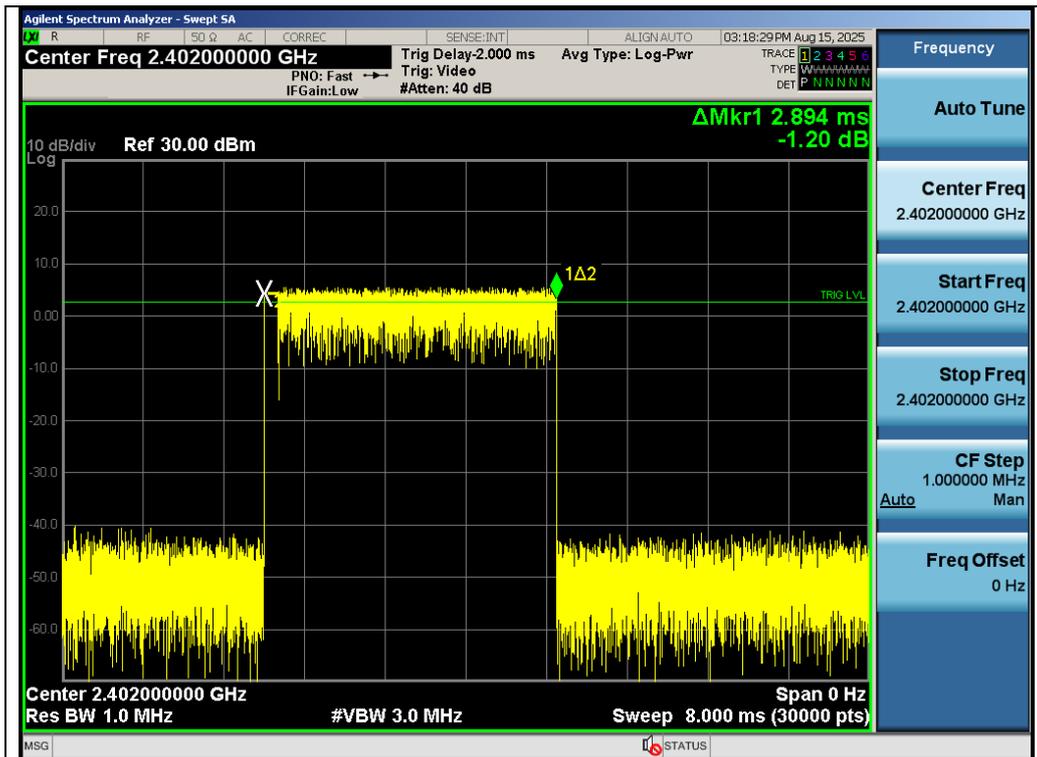


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2402_Time per Burst

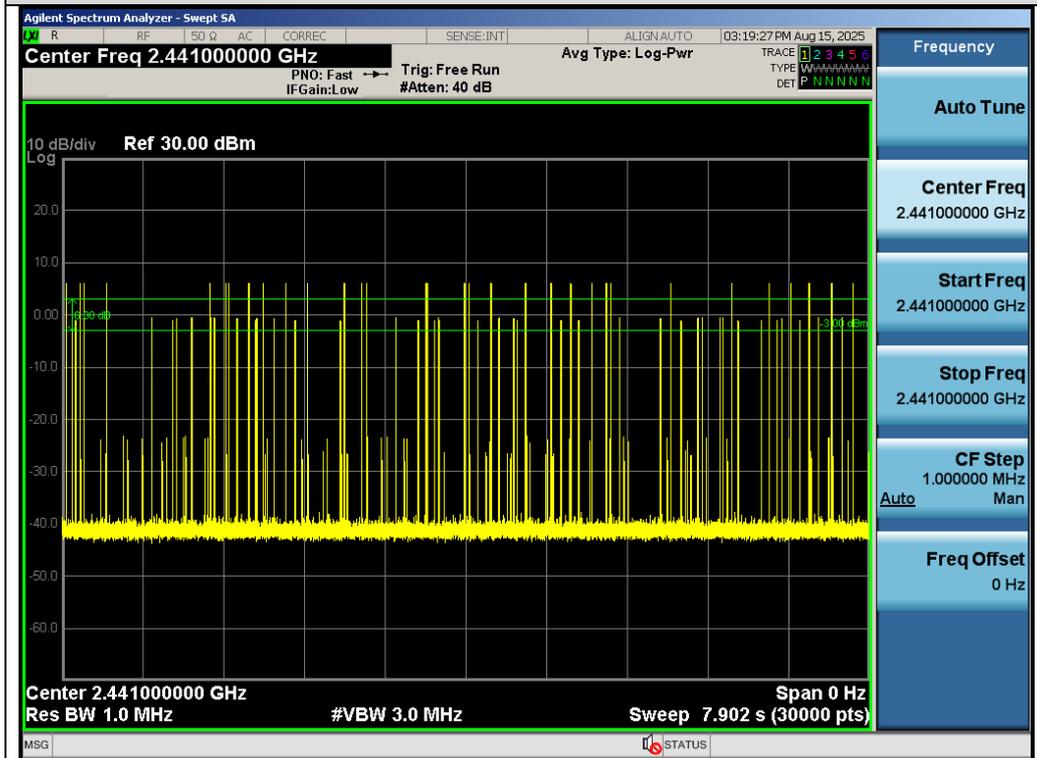


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2441_Number of Burst

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

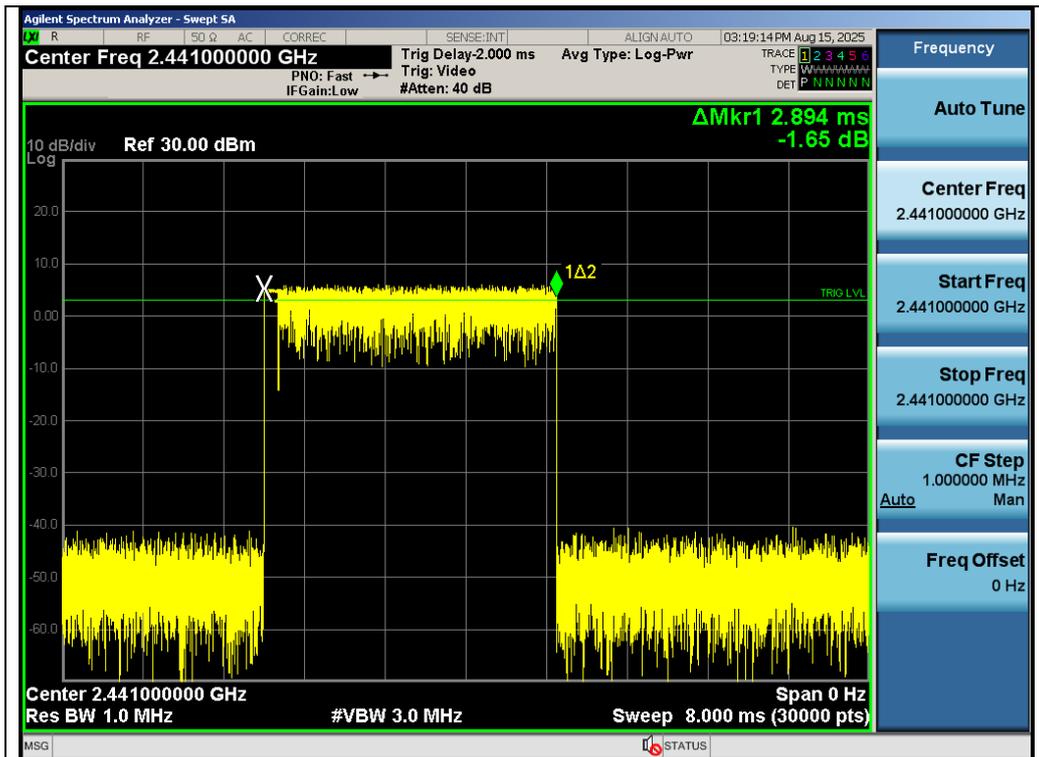


Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2441_Time per Burst

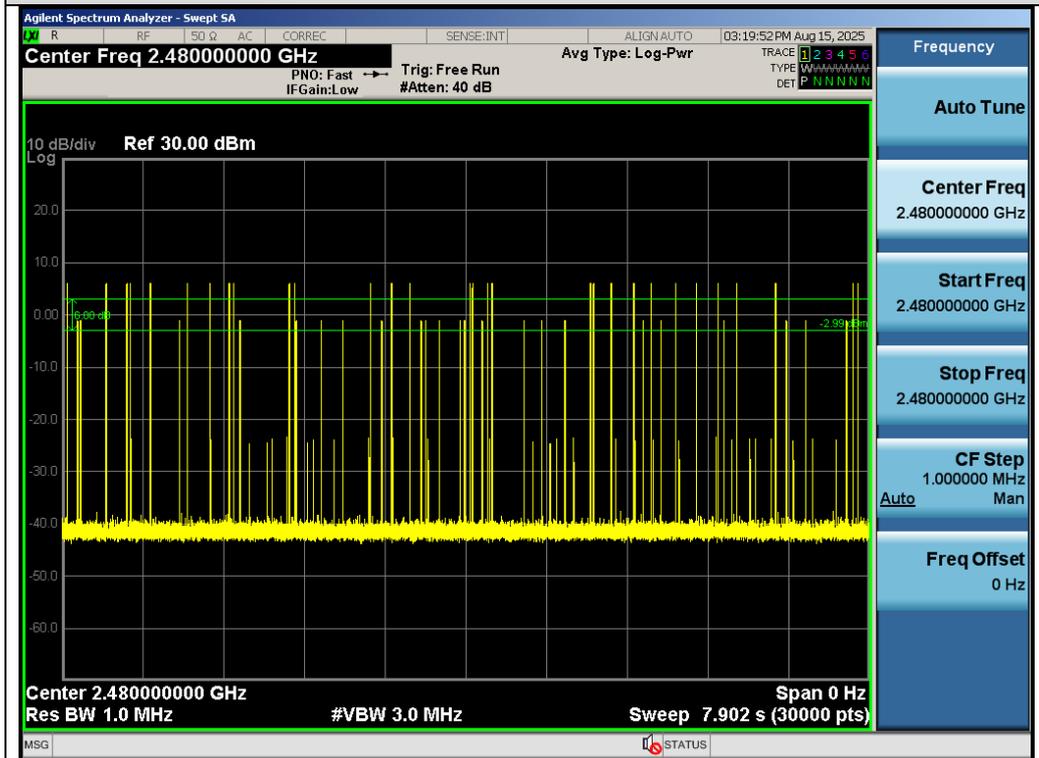

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2480_Number of Burst

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

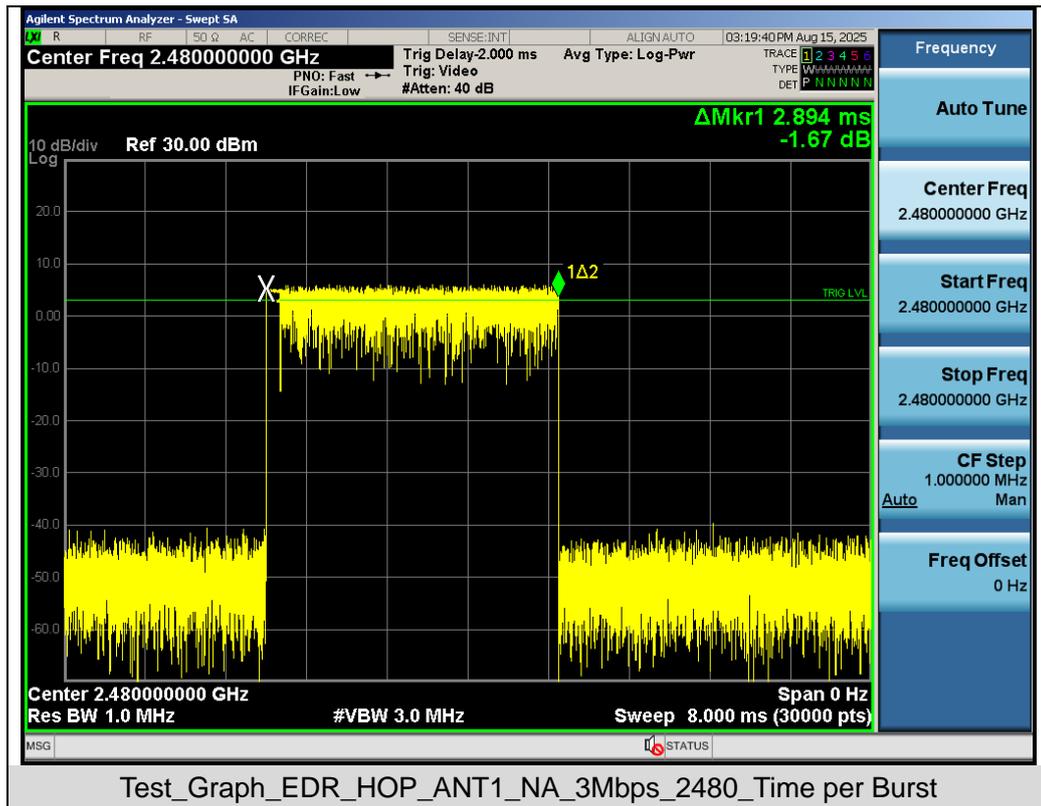

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
 Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

12. Frequency Separation Measurement

12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Wide enough to capture the peaks of two adjacent channels.
2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3. Video (or average) bandwidth (VBW) \geq RBW.
4. Sweep: Auto.
5. Detector function: Peak.
6. Trace: Max hold. g) Allow the trace to stabilize.
7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

12.3 Measurement Setup (Block Diagram of Configuration)

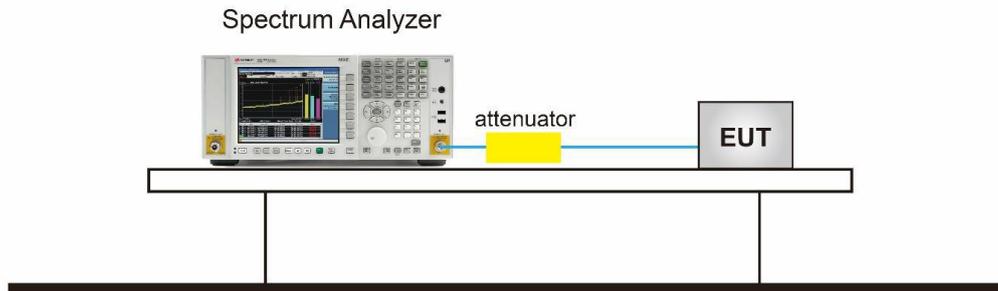


12.4 Measurement Result

Left earphone


Test Data of Frequency Separation			
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail
GFSK	1.037	≥ 0.637	Pass
π /4-DQPSK	1.000	≥ 0.855	Pass
8DPSK	1.000	≥ 0.865	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graphs of Frequency Separation

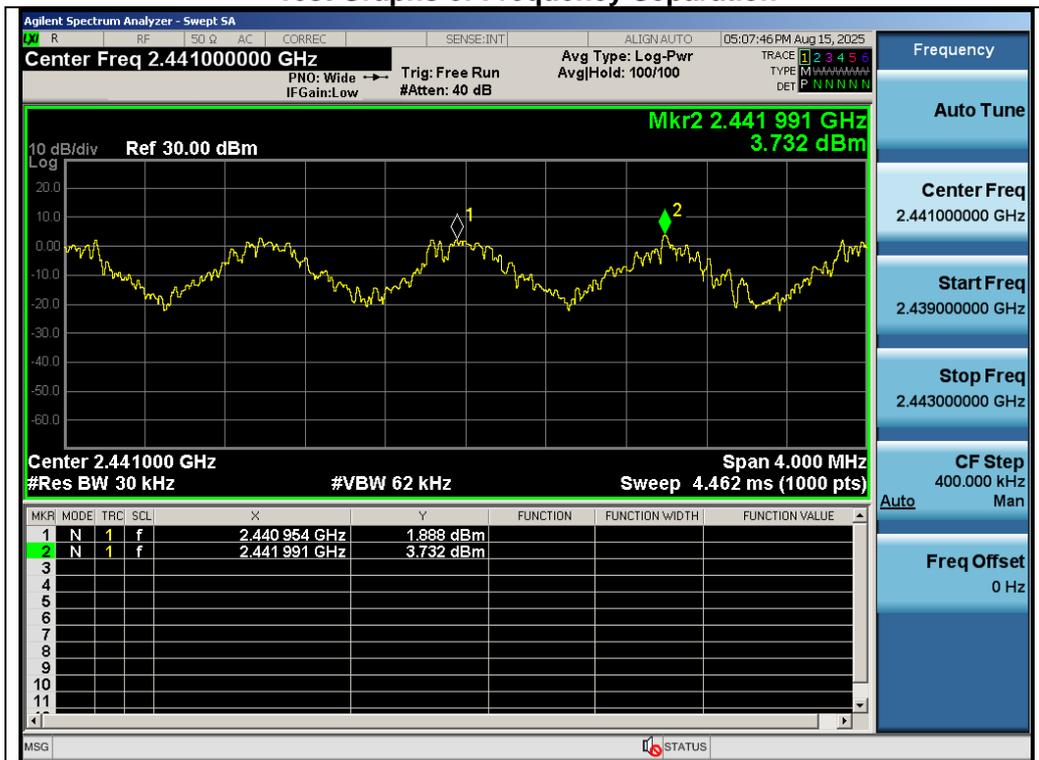


Test_Graph_BR_HOP_ANT1_NA_1Mbps_Hopping Separation

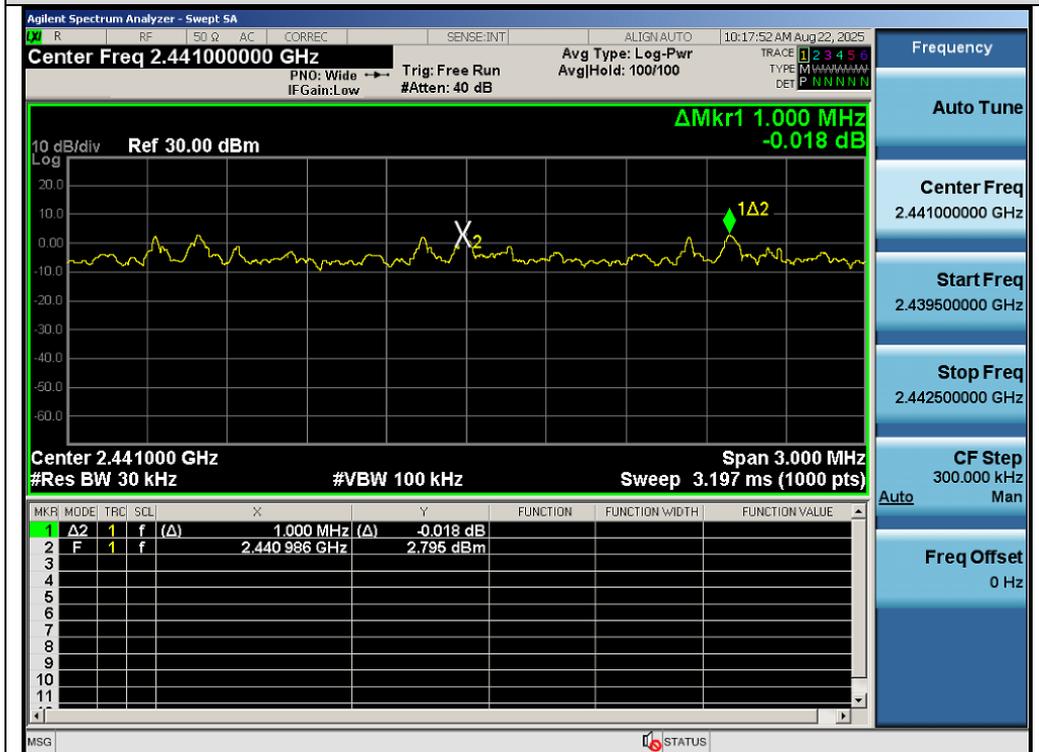

Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Hopping Separation

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

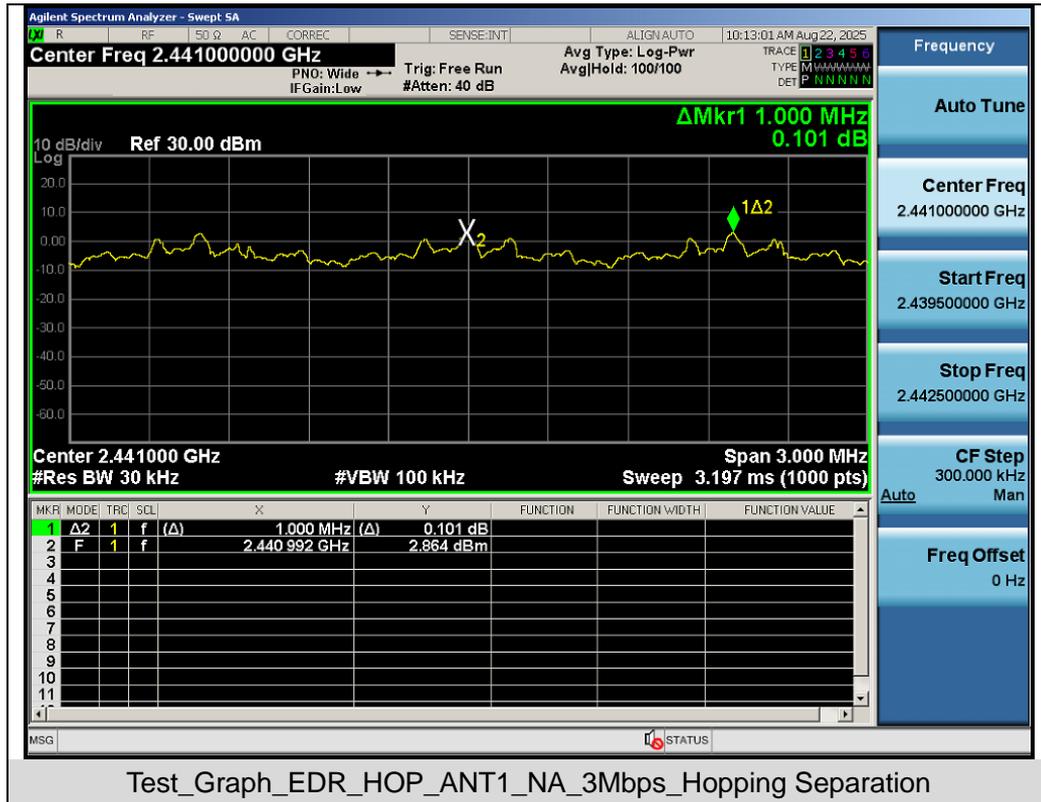


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
 Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/


Right earphone

Test Data of Frequency Separation			
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail
GFSK	1.013	≥0.635	Pass
π /4-DQPSK	1.000	≥0.855	Pass
8DPSK	1.000	≥0.854	Pass


Test Graphs of Frequency Separation

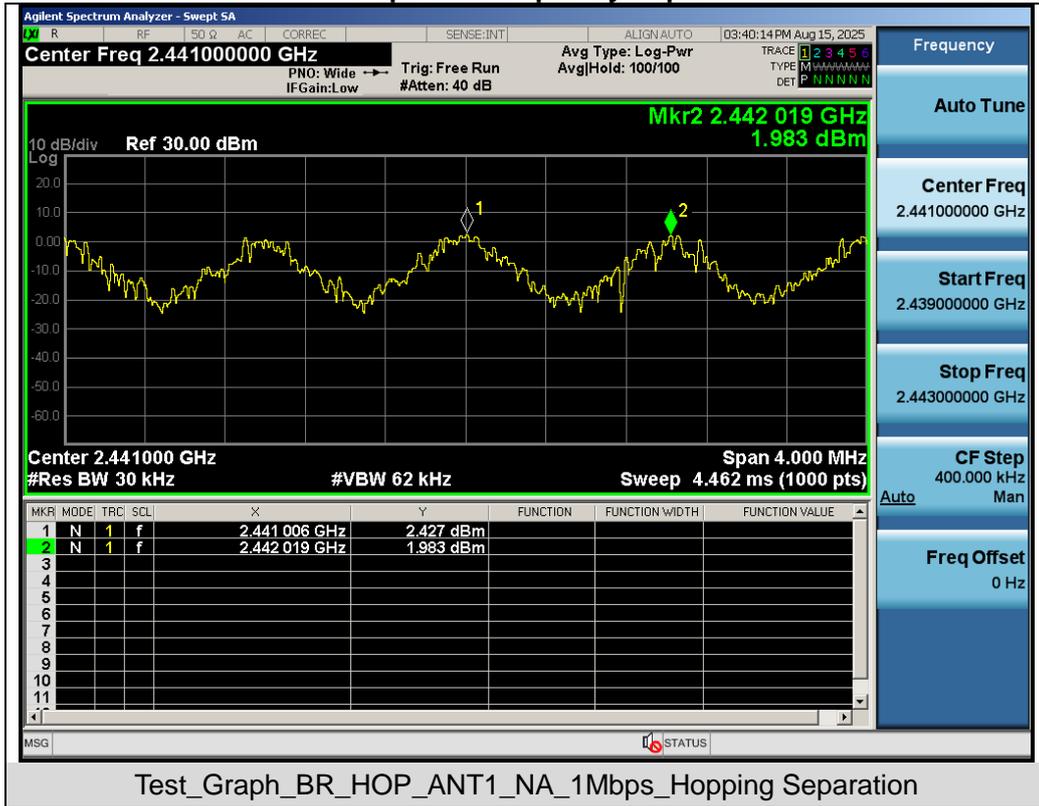

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

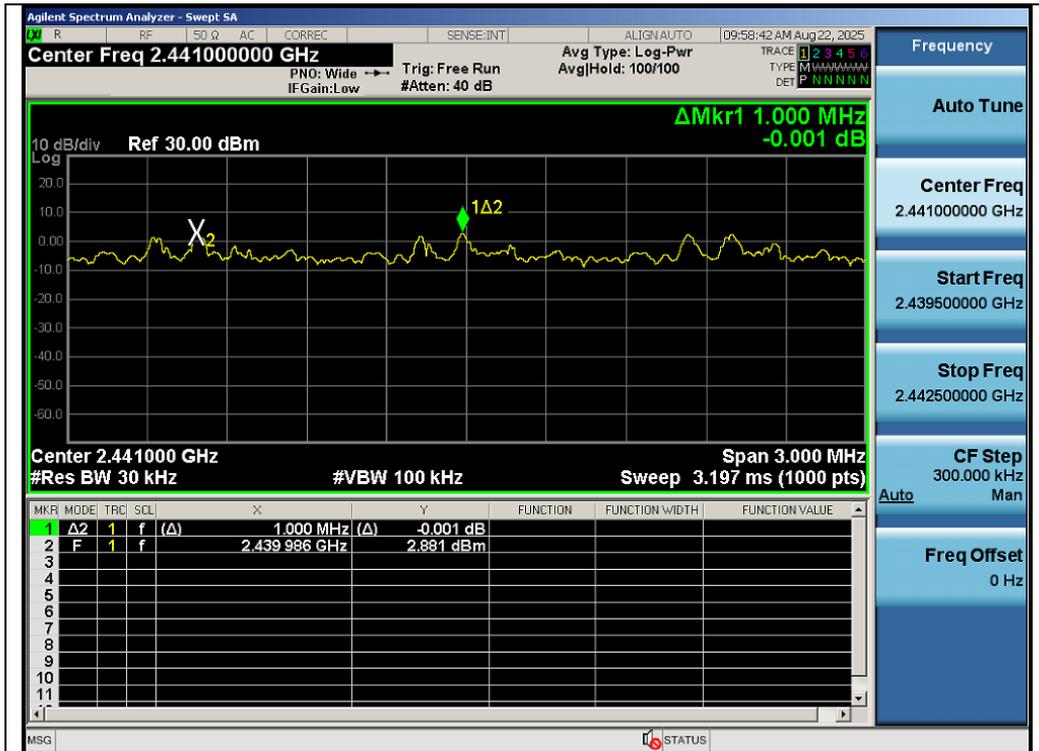

Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Hopping Separation

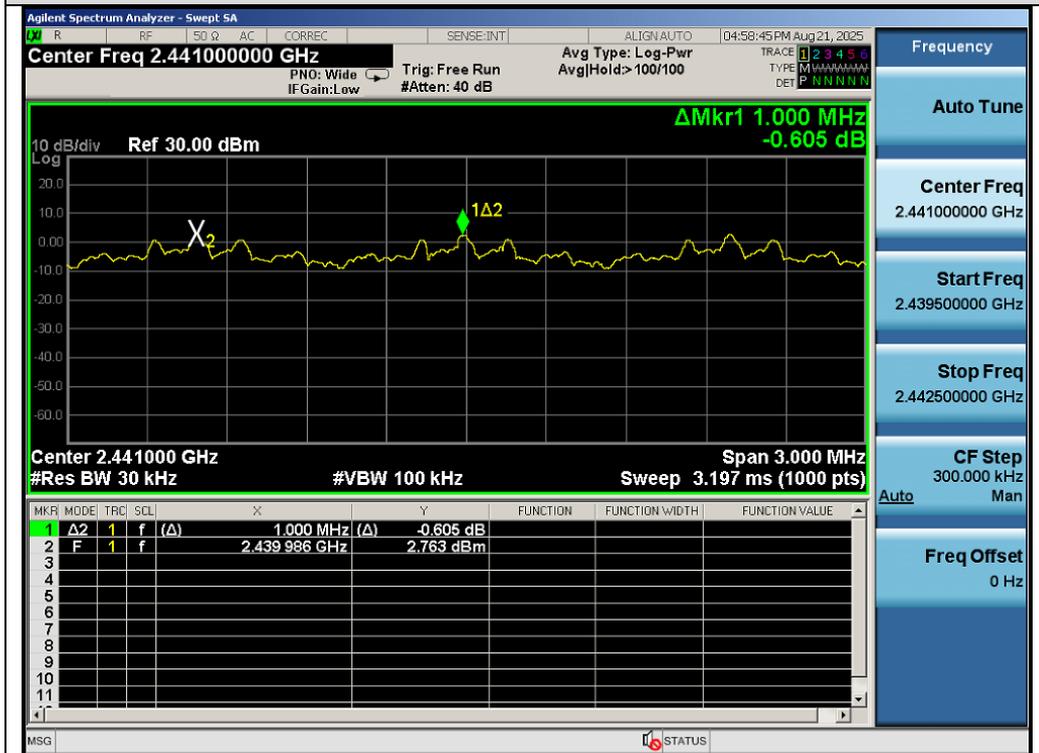

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Hopping Separation

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

13. AC Power Line Conducted Emission Test


13.1 Measurement Limit

Frequency	Maximum RF Line Voltage	
	Q.P. (dB μ V)	Average (dB μ V)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

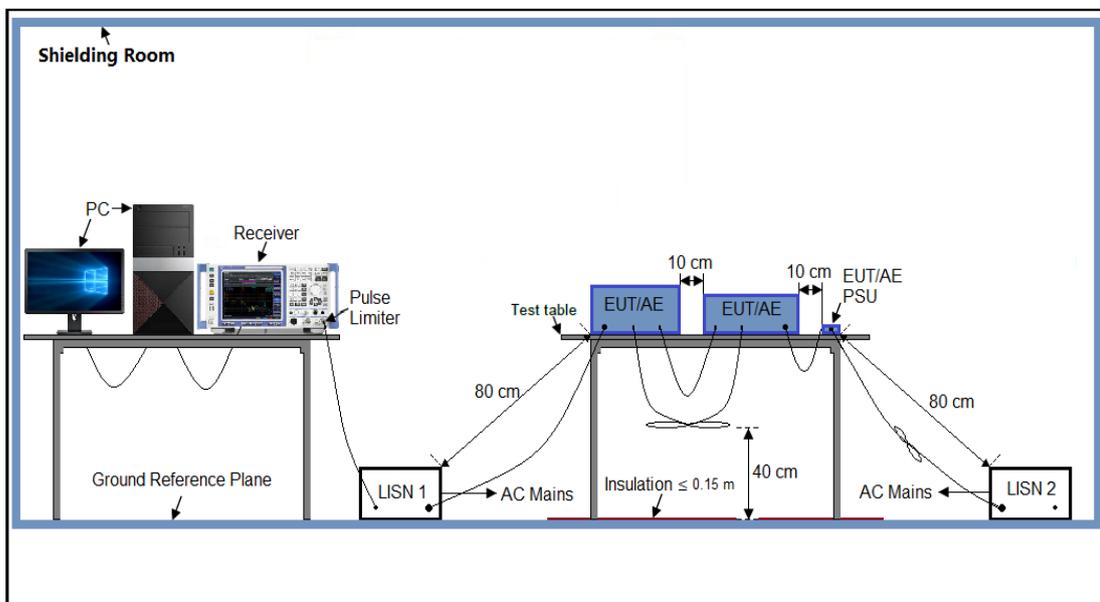

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

13.3 Preliminary Procedure of Line Conducted Emission Test

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipment received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side).
7. Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
8. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
9. During the above scans, the emissions were maximized by cable manipulation.
10. The test mode(s) were scanned during the preliminary test.
11. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
3. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
4. The test data of the worst case condition(s) was reported on the Summary Data page.
5. A conducted emission is calculated by the following equation:
 - Measurement Level (dB μ V) = Receiver reading (dB μ V) + Transd (dB)
 - Transd (dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
 - Margin= Limit-Level

13.5 Measurement Result

N/A

Note: This device is powered by a built-in lithium battery and cannot be directly or indirectly connected to the mains, so it is not suitable for AC power supply disturbance testing.

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110250748AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110250748AP03

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.