



TEST REPORT

APPLICANT : Anker Innovations Limited
PRODUCT NAME : Nebula Astro
MODEL NAME : D2400
BRAND NAME : NEBULA
FCC ID : 2AOKB-D2400
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2020-04-10
TEST DATE : 2020-05-27 to 2020-06-16
ISSUE DATE : 2020-06-28

Edited by: Chen Bilian
Chen Bilian (Rapporteur)
Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3**
- 1.1. Applicant and Manufacturer Information 3**
- 1.2. Equipment Under Test (EUT) Description 3**
- 1.3. Modulation Type and Data Rate of EUT 4**
- 1.4. The Channel Number and Frequency 5**
- 1.5. Test Standards and Results 6**
- 1.6. Environmental Conditions 7**
- 2. 47 CFR Part 15E Requirements 8**
- 2.1. Antenna Requirement 8**
- 2.2. Duty Cycle of the Test Signal 9**
- 2.3. Maximum Conducted Output Power 12**
- 2.4. Emission Bandwidth 14**
- 2.5. Peak Power spectral density 26**
- 2.6. Frequency Stability 38**
- 2.7. Conducted Emission 40**
- 2.8. Restricted Frequency Bands 44**
- 2.9. Radiated Emission 60**
- Annex A Test Uncertainty 81**
- Annex B Testing Laboratory Information 82**

Change History		
Version	Date	Reason for change
1.0	2020-06-28	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited
Applicant Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer:	Anker Innovations Limited
Manufacturer Address:	Room 1318-19 ,Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

1.2. Equipment Under Test (EUT) Description

Product Name:	Nebula Astro	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	V0.3	
Software Version:	msm8909.Astro_V6.0.8-master	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n(HT20), 802.11n(HT40)	
Operating Frequency Range:	5.180 GHz- 5.240 GHz; 5.745GHz- 5.825GHz	
Channel Number:	Refer to 1.4	
Antenna Type:	FPC antenna	
Antenna Gain:	0dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	INR18650F1L(1INR1966)
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	3150mAh
	Rated Voltage:	3.63V

Accessory Information:	AC Adapter	
	Brand Name:	N/A
	Model No.:	TEKA012-0502000UK
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5.0V=2.0A
	Rated Input:	100-240V ~ 0.35A

Note 1: According to the certificate holder, they declared that the models: E1701, E1901, E1902, E1511, only different in lens mount of the appearance structure, correspond sensor & sensor's PCBA and the model name, everything else is the same. The main measuring model is E1701, only the results for E1701 were recorded in this report.

Note 2: WIFI hotspot does not support U-NII band.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation Technology	Modulation Type	Data Rate (Mbps) <small>Note1</small>
OFDM (802.11a)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11ac)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
	256QAM	78

Note1: The worst-case mode (black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



1.4. The Channel Number and Frequency

Frequency Range: 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
Frequency Range: 5745-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the test signal	Jun 9, 2020	Ouyang Feng	PASS	No deviation
3	15.407(a)	Maximum conducted output Power	Jun 9, 2020	Ouyang Feng	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Jun 9, 2020	Ouyang Feng	PASS	No deviation
5	15.407(a)	Maximum Power spectral density	Jun 9, 2020	Ouyang Feng	PASS	No deviation
6	15.407(g)	Frequency Stability	Jun 9, 2020	Ouyang Feng	PASS	No deviation
7	15.207	Conducted Emission	May 27, 2020	Lin Jiayong	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Jun 18, 2020	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Jun 18, 2020	Gao Jianrou	PASS	No deviation

Note1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

Note2: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.

Note3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12.5dB contains two parts that cable loss 2.5dB and Attenuator 10dB.



Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna with the RP-SMA Jack. Please refer to the EUT external and internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

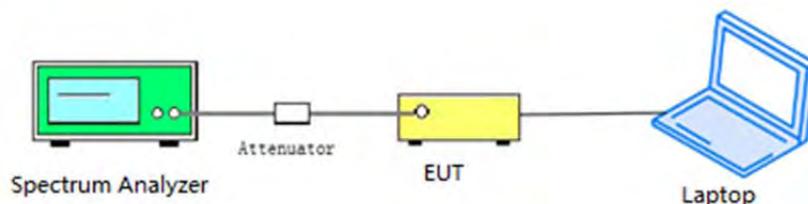

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	87.18	0.60
802.11n(HT20)	86.49	0.63
802.11n(HT40)	77.11	1.13


B. Test Plots

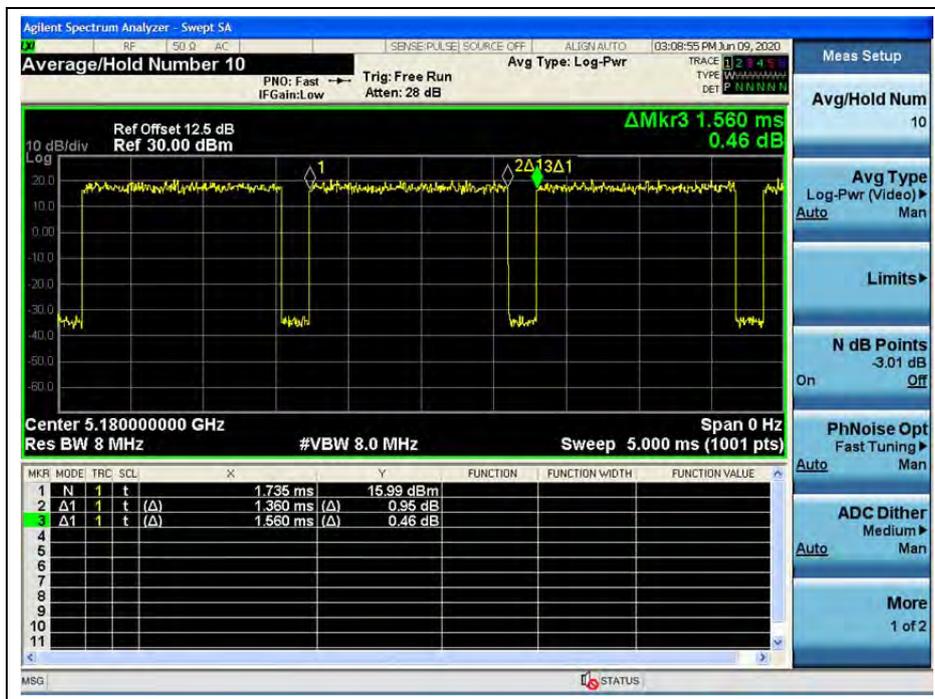

(CH36_5180MHz_802.11a)

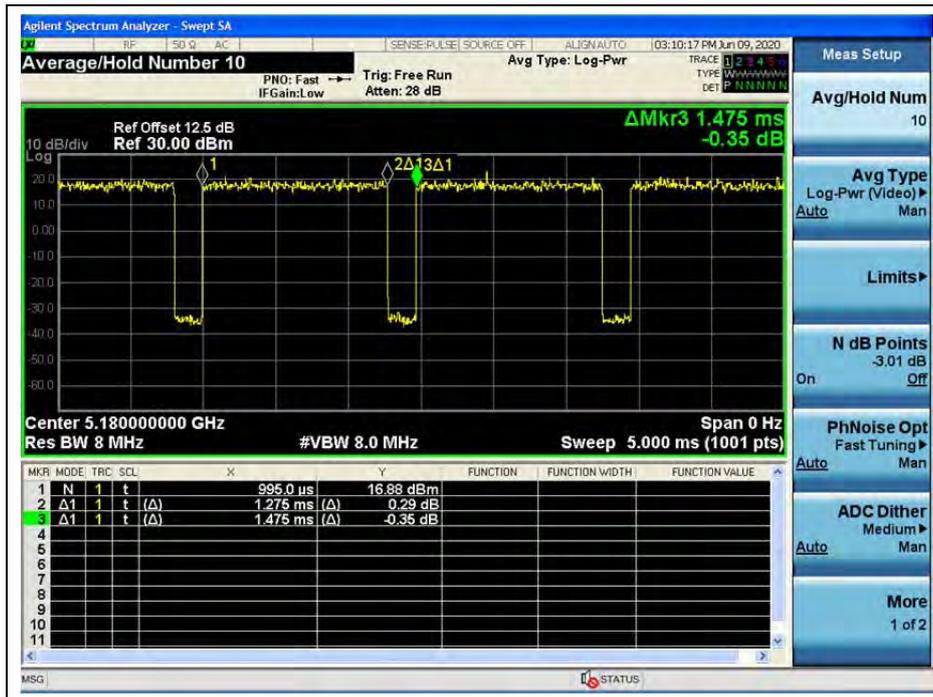

(CH36_5180MHz_802.11n(HT20))

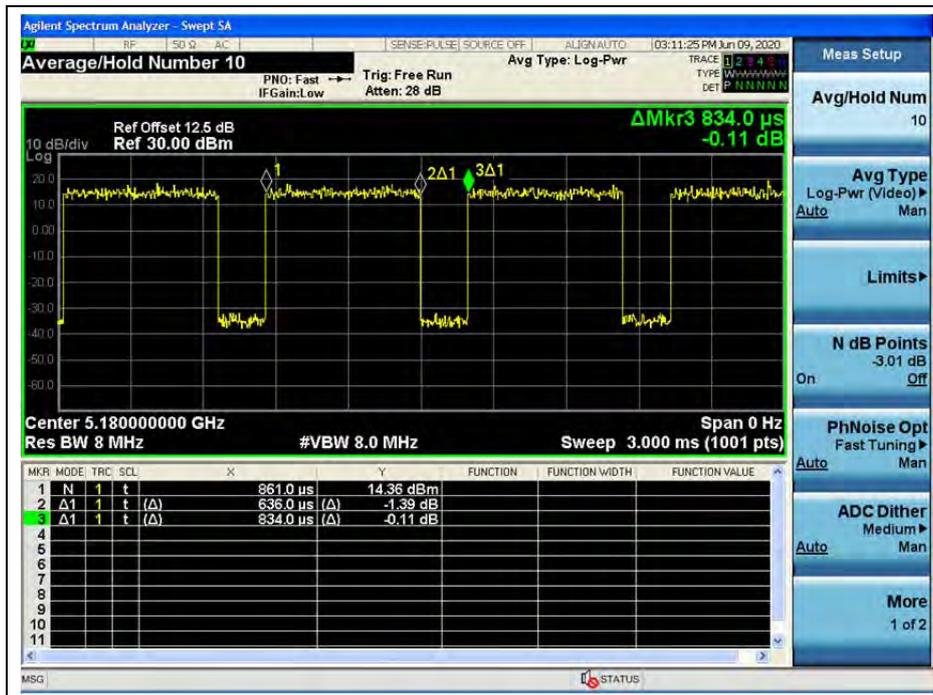

(CH38_5190MHz_802.11n(HT40))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10 \log(N_{\text{ANT}})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.3.2. Test Description

Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

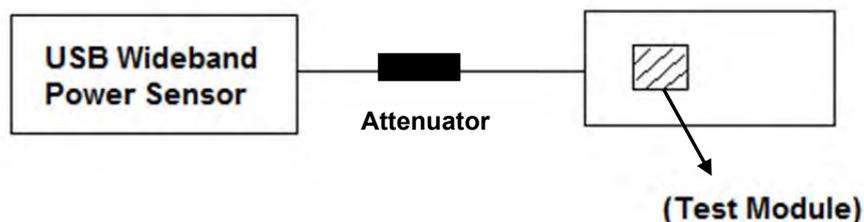

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.



2.3.3. Test Result

Maximum Average Conducted Output Power

802.11a Test mode

Channel	Frequency (MHz)	Average Power (dBm)				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated		dBm	W	
				dBm	W			
36	5180	14.17	0.60	14.77	0.030	24	0.25	PASS
44	5220	14.38		14.98	0.031			
48	5240	15.23		15.83	0.038			
149	5745	16.16		16.76	0.047	30	1	
157	5785	15.74		16.34	0.043			
165	5825	15.41		16.01	0.040			

802.11 n (HT20) Test mode

Channel	Frequency (MHz)	Average Power (dBm)				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated		dBm	W	
				dBm	W			
36	5180	14.11	0.63	14.74	0.030	24	0.25	PASS
44	5220	13.98		14.61	0.029			
48	5240	14.94		15.57	0.036			
149	5745	15.81		16.44	0.044	30	1	
157	5785	15.42		16.05	0.040			
165	5825	14.99		15.62	0.036			

802.11 n (HT40) Test mode

Channel	Frequency (MHz)	Average Power				Limit (dBm)		Verdict
		Measured	Duty Factor	Duty factor Calculated		dBm	W	
				dBm	W			
38	5190	13.08	1.13	14.21	0.026	24	0.25	PASS
46	5230	13.84		14.97	0.031			
151	5755	22.64		23.77	0.238	30	1	
159	5795	15.20		16.33	0.043			


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

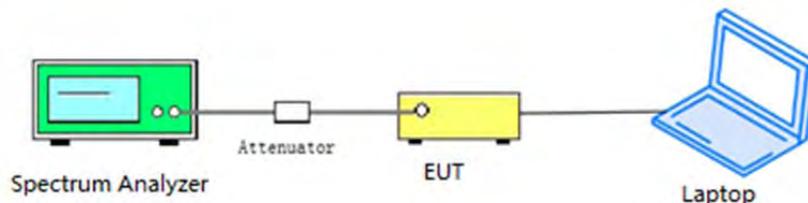

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	24.03
44	5220	24.87
48	5240	22.03
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
149	5745	16.43
157	5785	16.42
165	5825	16.40




B. Test Plots



(Channel 36, 5180MHz, 802.11a,)




(Channel 44, 5220 MHz, 802.11a,)

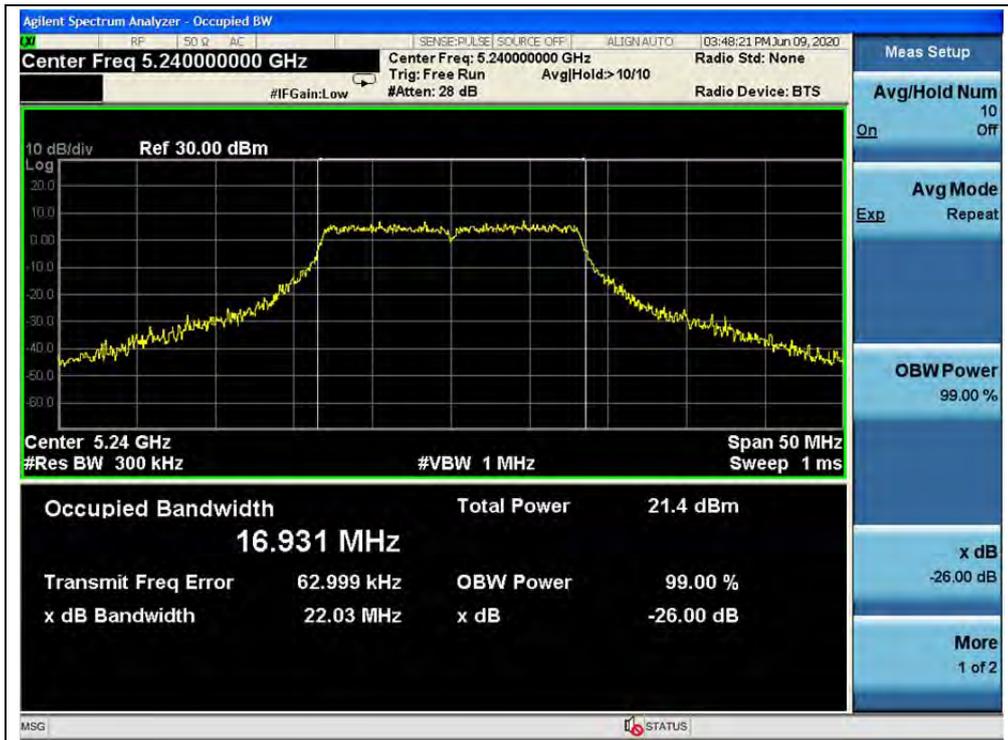


(Channel 48, 5240MHz, 802.11a,)



(Channel 149, 5745MHz, 802.11a)

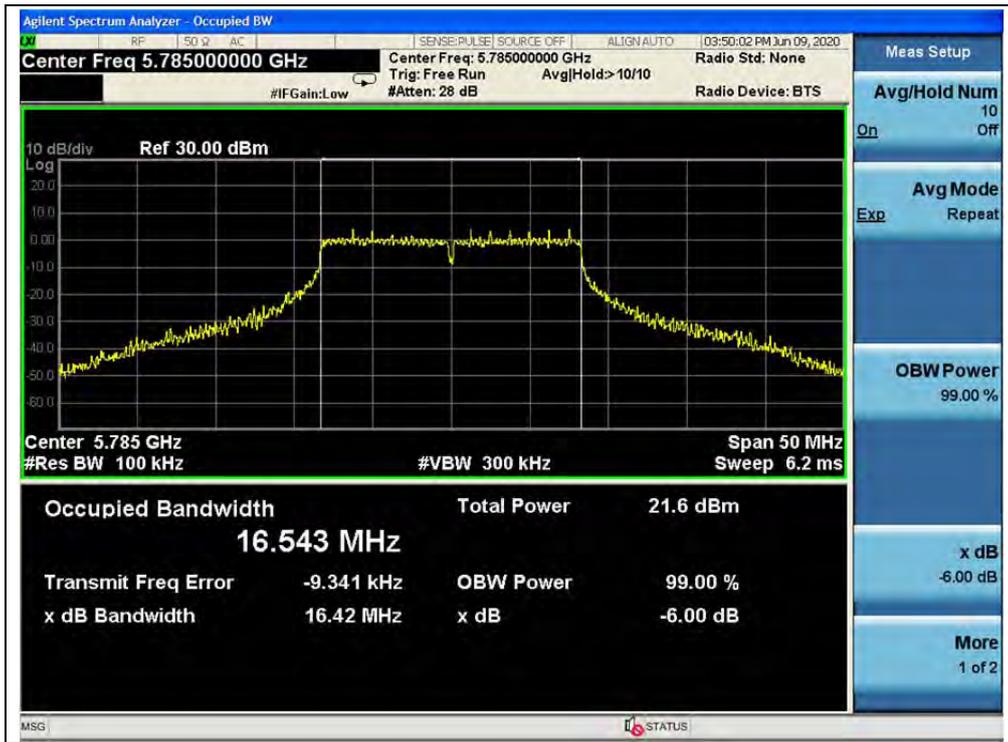

(Channel 157, 5785MHz, 802.11a)

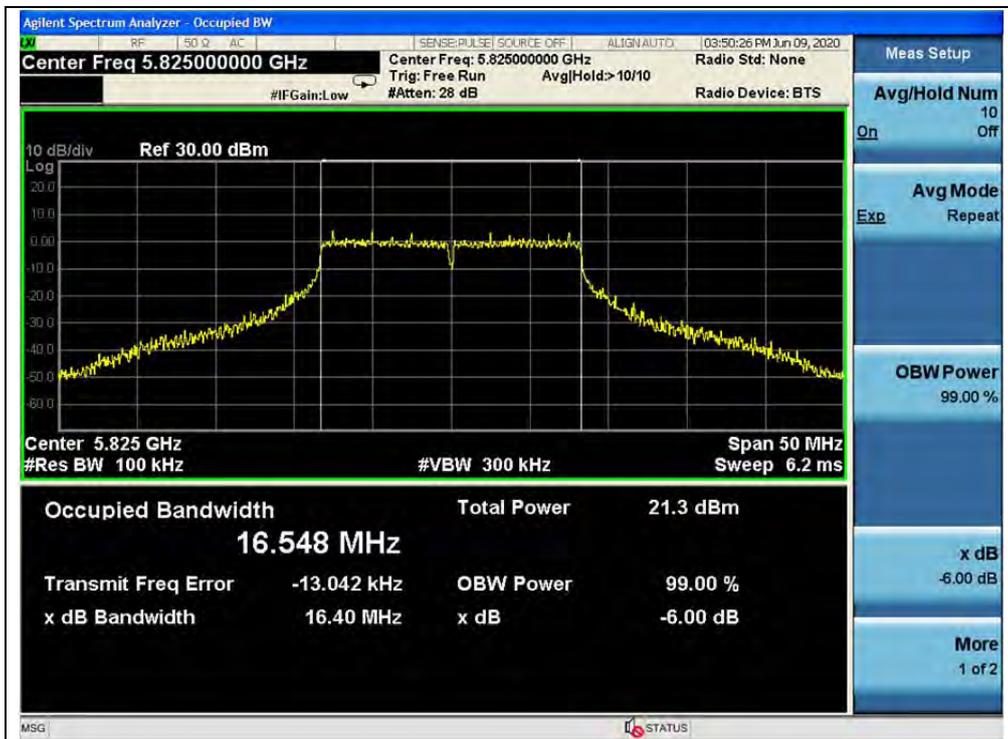

(Channel 165, 5825MHz, 802.11a)




802.11n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	24.47
44	5220	23.18
48	5240	22.92
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
149	5745	17.62
157	5785	17.59
165	5825	17.64

B. Test Plots

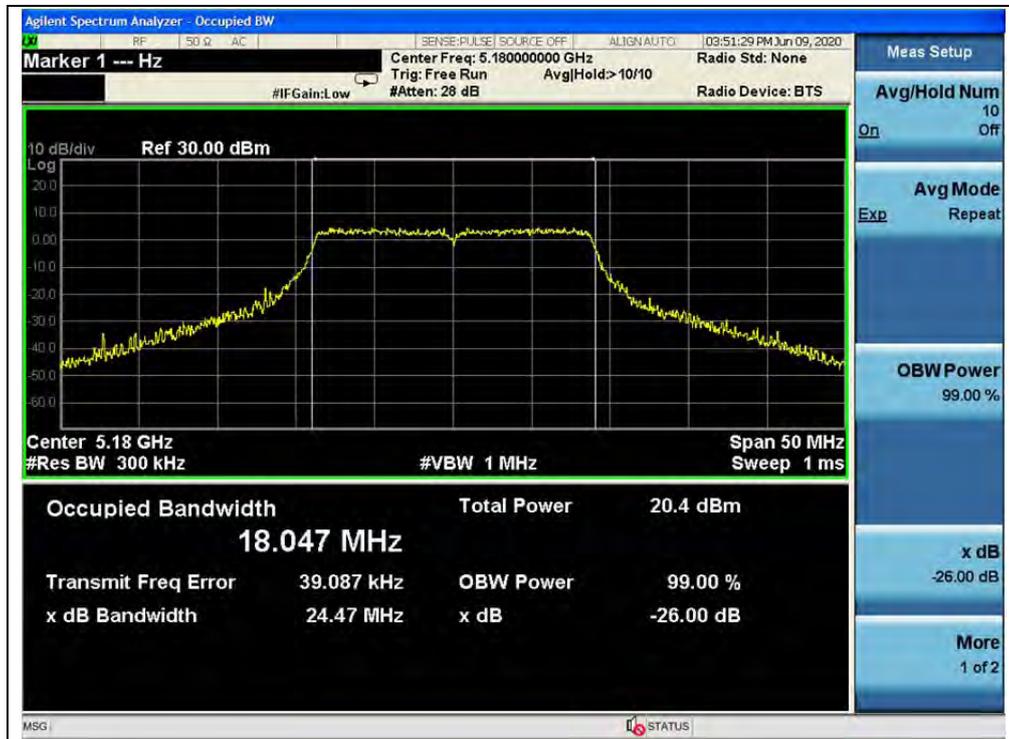


(Channel 36, 5180MHz, 802.11 n (HT20))

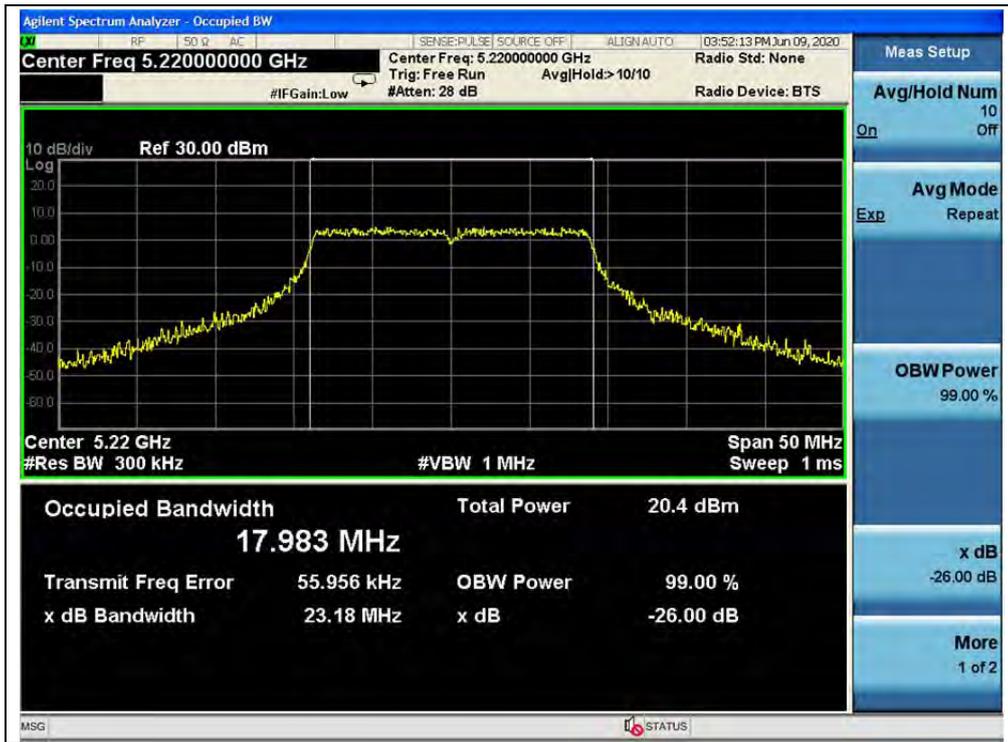

(Channel 44, 5220 MHz, 802.11 n (HT20))




(Channel 48, 5240MHz, 802.11 n (HT20))

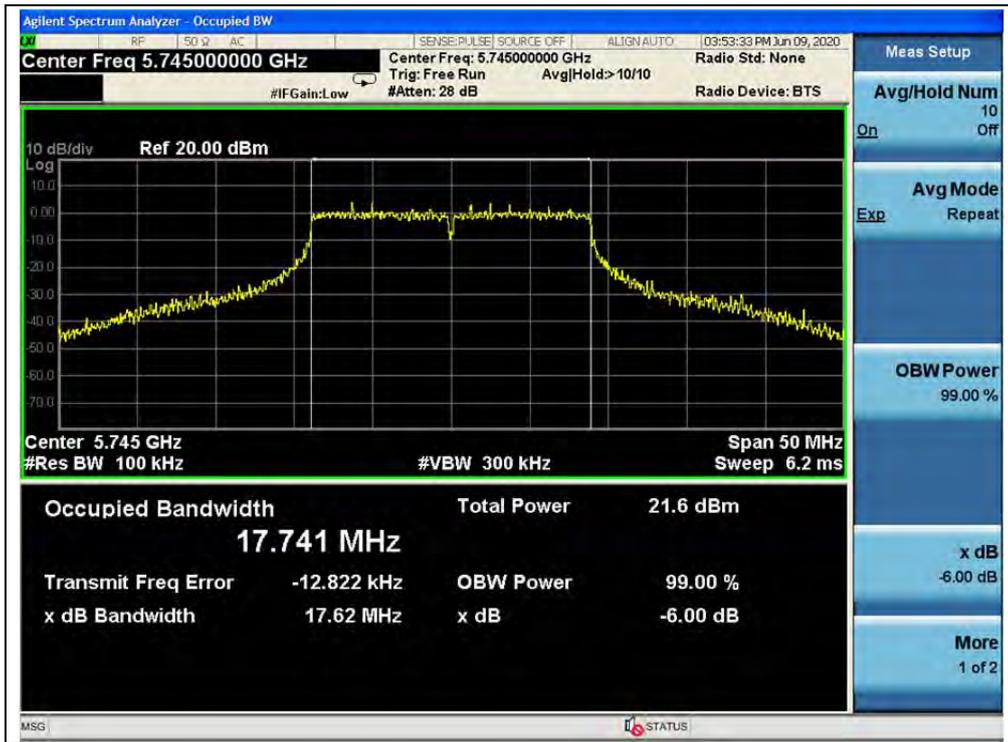

(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))

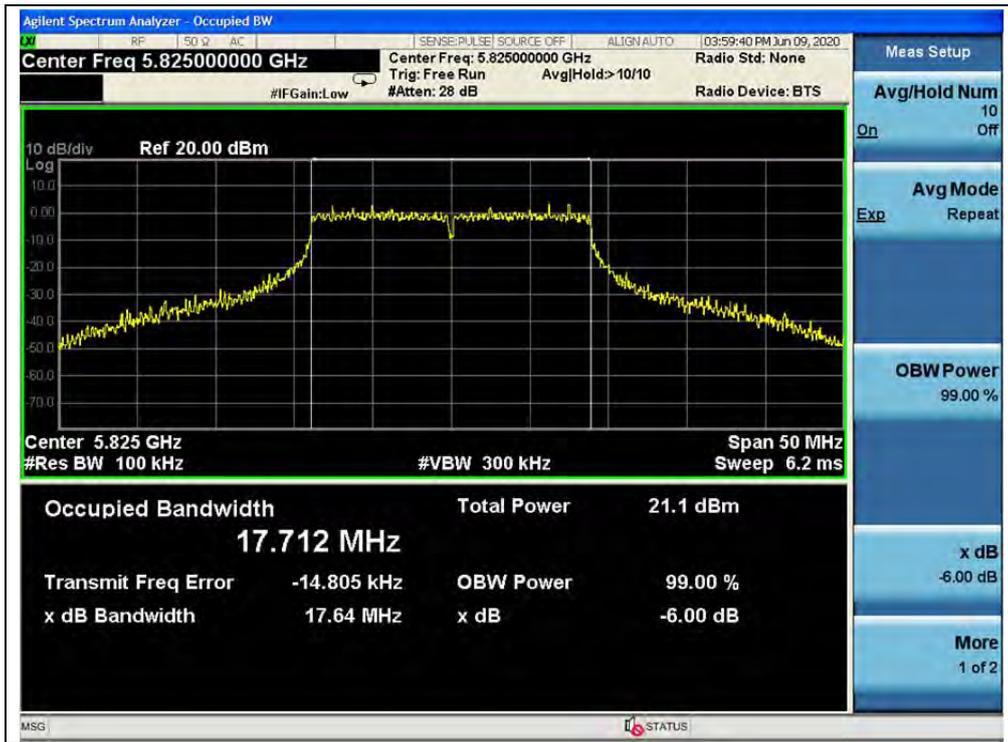

(Channel 165, 5825MHz, 802.11 n (HT20))




802.11n (HT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	43.12
46	5230	44.02
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
151	5755	35.41
159	5795	35.19

B. Test Plots

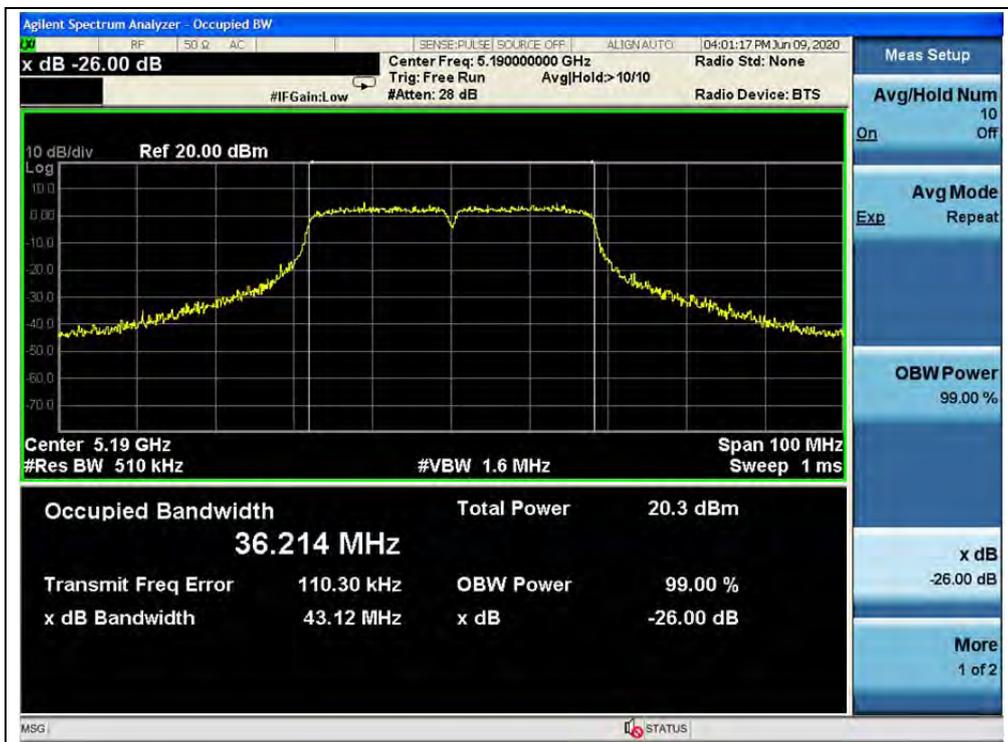


(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230 MHz, 802.11n (HT40))



(Channel 151, 5755 MHz, 802.11n (HT40))

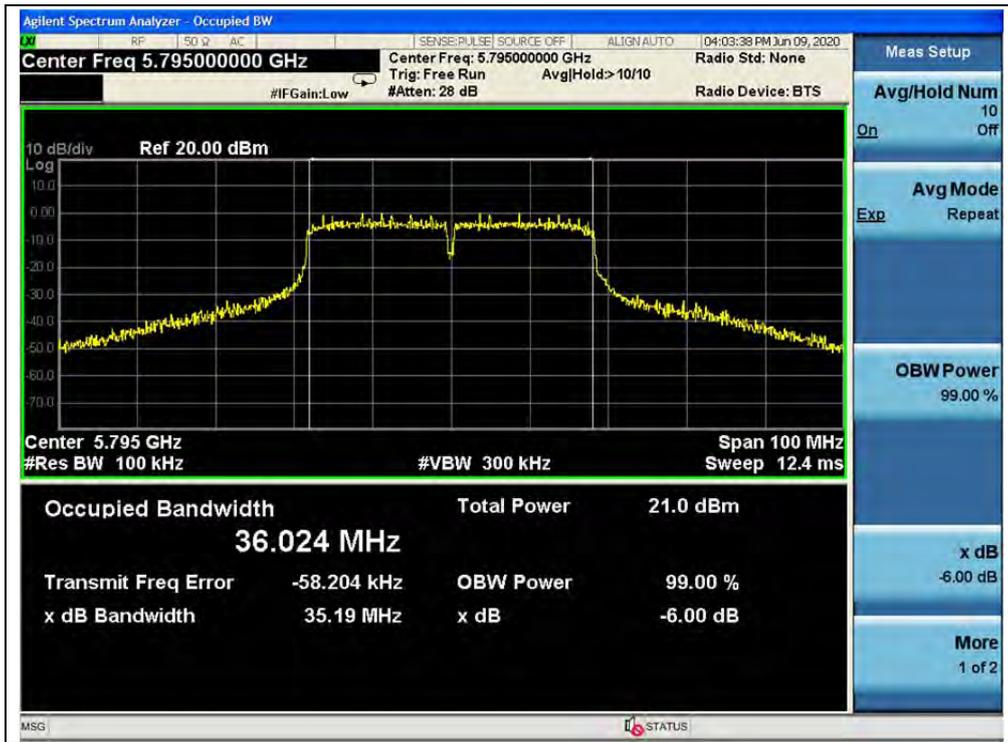

(Channel 159, 5795MHz, 802.11n (HT40))

2.5. Peak Power spectral density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500KHz band.


If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

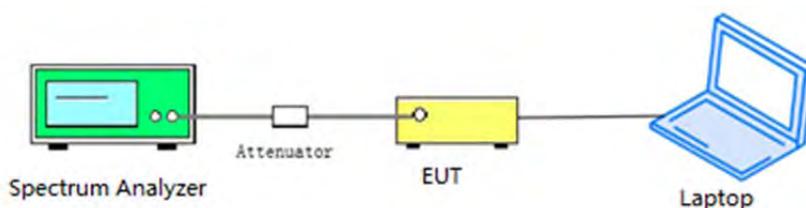

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

**2.5.3. Test Procedure**

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-1 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1 MHz. Set VBW \geq 3 MHz.
- 3) Number of points in sweep \geq 2 Span / RBW. Sweep time = auto.
- 4) Detector = Peak
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result**802.11a Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	2.998	0.60	3.598	11	PASS
44	5220	3.426		4.026		
48	5240	4.484		5.084		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	2.342	0.60	2.942	30	PASS
157	5785	2.094		2.694		
165	5825	1.817		2.417		



B. Test Plots



(Channel 36, 5180MHz, 802.11a,)



(Channel 44, 5220 MHz, 802.11a,)



(Channel 48, 5240MHz, 802.11a,)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	2.673	0.63	3.303	11	PASS
44	5220	3.138		3.768		
48	5240	4.239		4.869		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	2.373	0.63	3.003	30	PASS
157	5785	1.976		2.606		
165	5825	1.669		2.299		

B. Test Plots



(Channel 36, 5180MHz, 802.11 n (HT20))



(Channel 44, 5220 MHz, 802.11 n (HT20))



(Channel 48, 5240MHz, 802.11 n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSS (dBm/MHz)	Duty Factor	Total PPSS (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	-0.549	1.13	0.581	11	PASS
46	5230	-0.269		0.861		
Channel	Frequency (MHz)	Measured PPSS (dBm/500KHz)	Duty Factor	Total PPSS (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
151	5755	-1.186	1.13	-0.056	30	PASS
159	5795	-1.235		-0.105		

B. Test Plots



(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230 MHz, 802.11n (HT40))



(Channel 151, 5755 MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Description

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Freq Dev. (Hz)	Deviation (ppm)
100%	5	+20(Ref)	25	4.826
100%		-30	32	6.178
100%		-20	30	5.792
100%		-10	29	5.598
100%		0	30	5.792
100%		+10	24	4.633
100%		+20	27	5.212
100%		+30	30	5.792
100%		+40	34	6.564
100%		+50	37	7.143
85%		4.25	+20	29
115%	5.75	+20	32	6.178



U-NII-3 (Ch. 149)				
5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Freq Dev. (Hz)	Deviation (ppm)
100%	5	+20(Ref)	31	5.396
100%		-30	22	3.829
100%		-20	24	4.178
100%		-10	36	6.266
100%		0	30	5.222
100%		+10	25	4.352
100%		+20	28	4.874
100%		+30	33	5.744
100%		+40	32	5.570
100%		+50	36	6.266
85%		4.25	+20	30
115%	5.75	+20	29	5.048

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

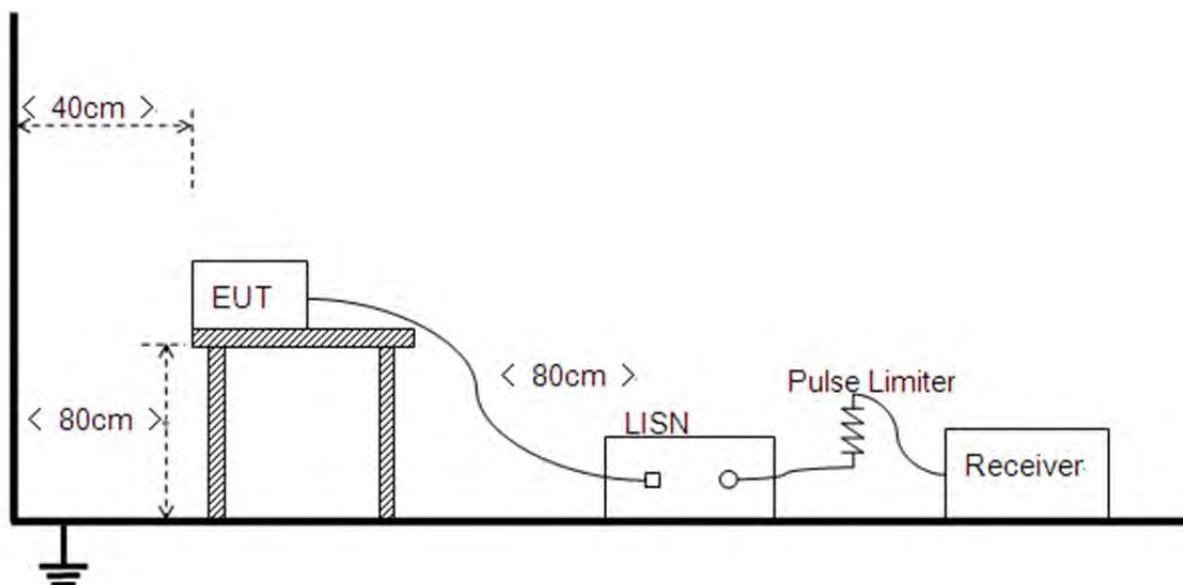

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter +wifi TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

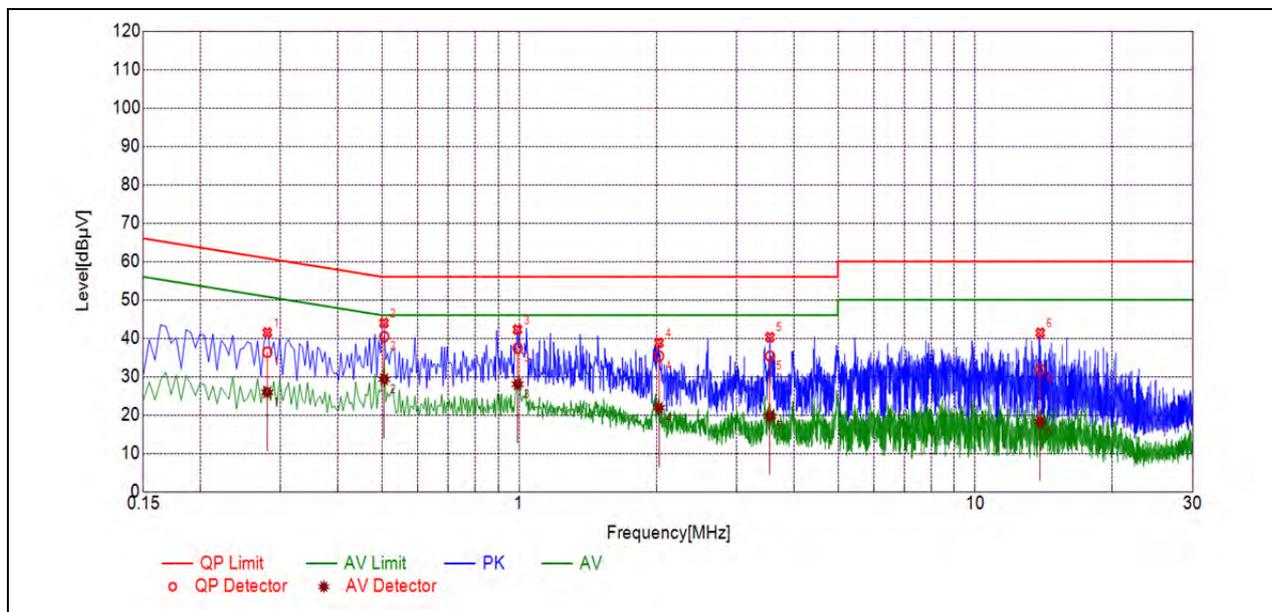

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2804	36.37	25.91	60.80	50.80	Line	PASS
2	0.5059	40.40	29.31	56.00	46.00		PASS
3	0.9924	37.42	28.04	56.00	46.00		PASS
4	2.0255	35.37	21.89	56.00	46.00		PASS
5	3.5494	35.32	19.76	56.00	46.00		PASS
6	13.8824	31.92	18.25	60.00	50.00		PASS

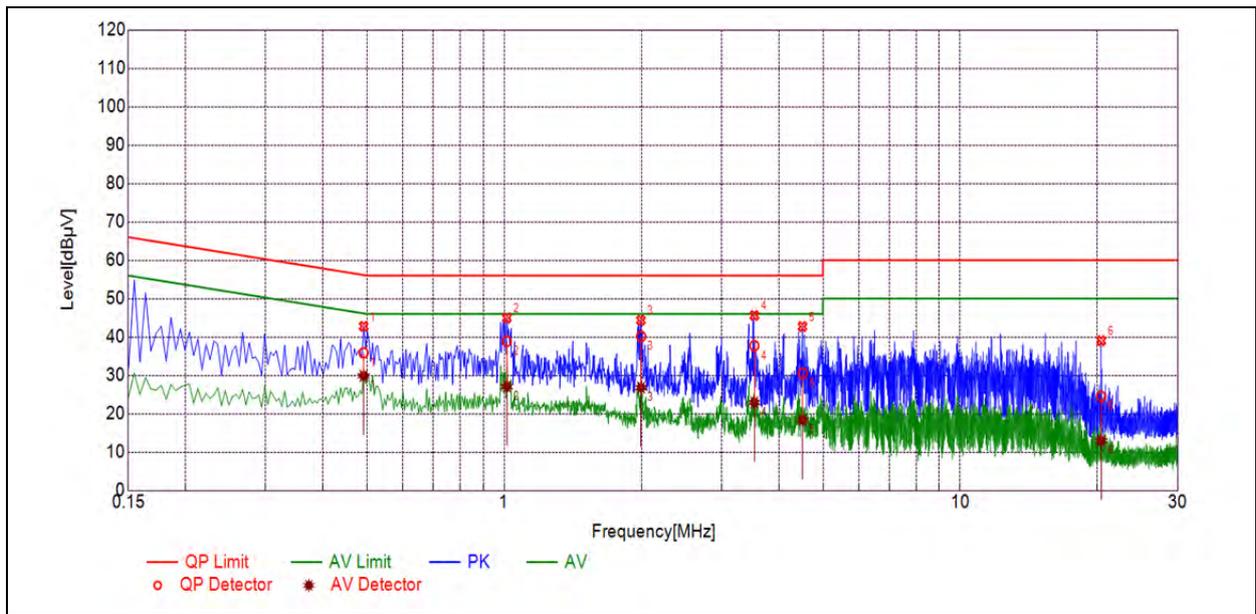

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.4917	35.88	29.87	56.14	46.14	Neutral	PASS
2	1.0136	38.90	27.07	56.00	46.00		PASS
3	1.9962	40.14	26.79	56.00	46.00		PASS
4	3.5351	37.72	22.93	56.00	46.00		PASS
5	4.5148	30.56	18.31	56.00	46.00		PASS
6	20.3781	24.53	12.93	60.00	50.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.407(b)(7), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

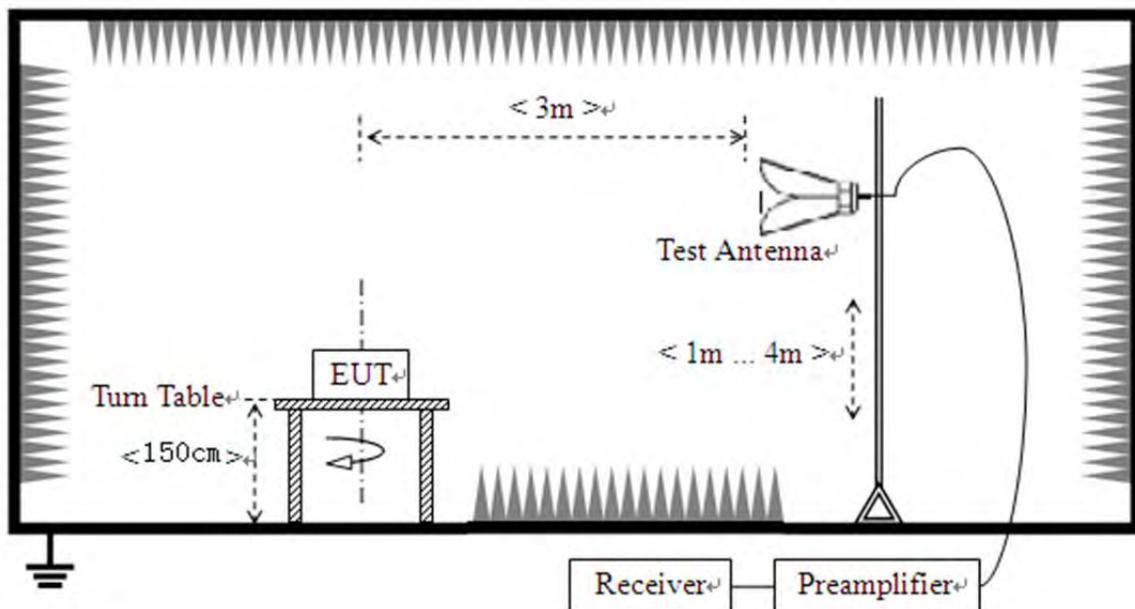

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11a Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dBuV)					
36	5084.92	PK	46.92	-26.92	32.2	52.20	74	PASS
36	5101.92	AV	35.19	-26.92	32.2	40.47	54	PASS
48	5370.52	PK	44.31	-26.92	32.2	49.59	74	PASS
48	5370.52	AV	33.51	-26.92	32.2	38.79	54	PASS
149	5681.50	PK	45.78	-26.23	32.2	51.75	91.54	PASS
149	5683.90	AV	34.63	-26.23	32.2	40.60	54	PASS
165	5925.00	PK	42.91	-26.23	32.2	48.88	68.23	PASS
165	5925.00	AV	34.03	-26.23	32.2	40.00	54	PASS


B. Test Plots:

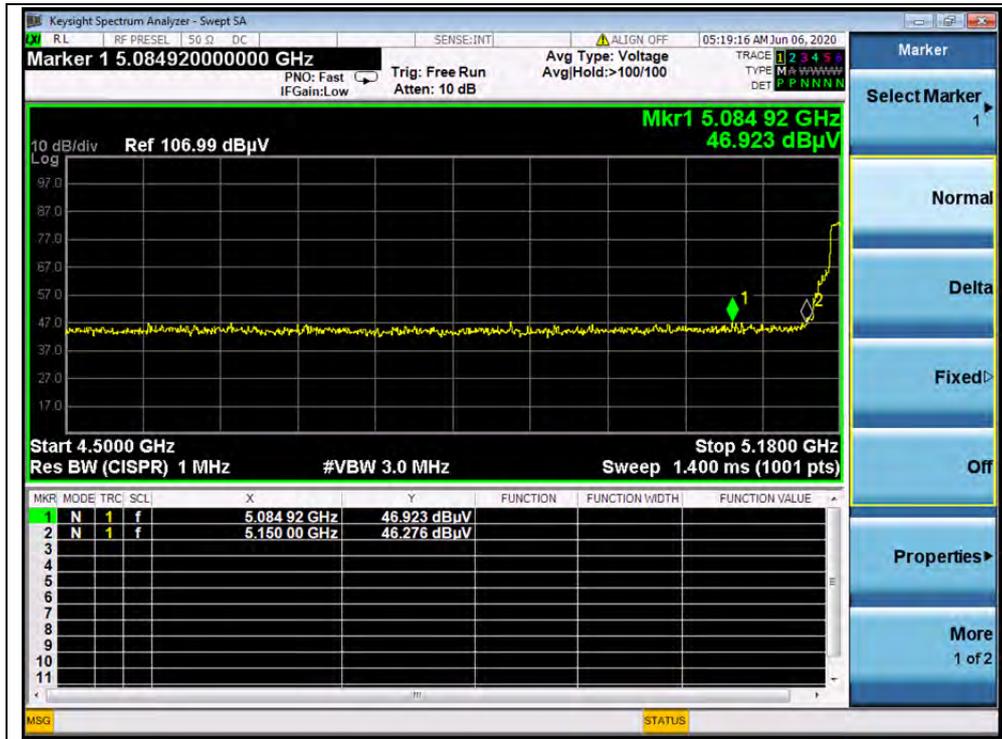


(Channel 36, PEAK, 802.11a)

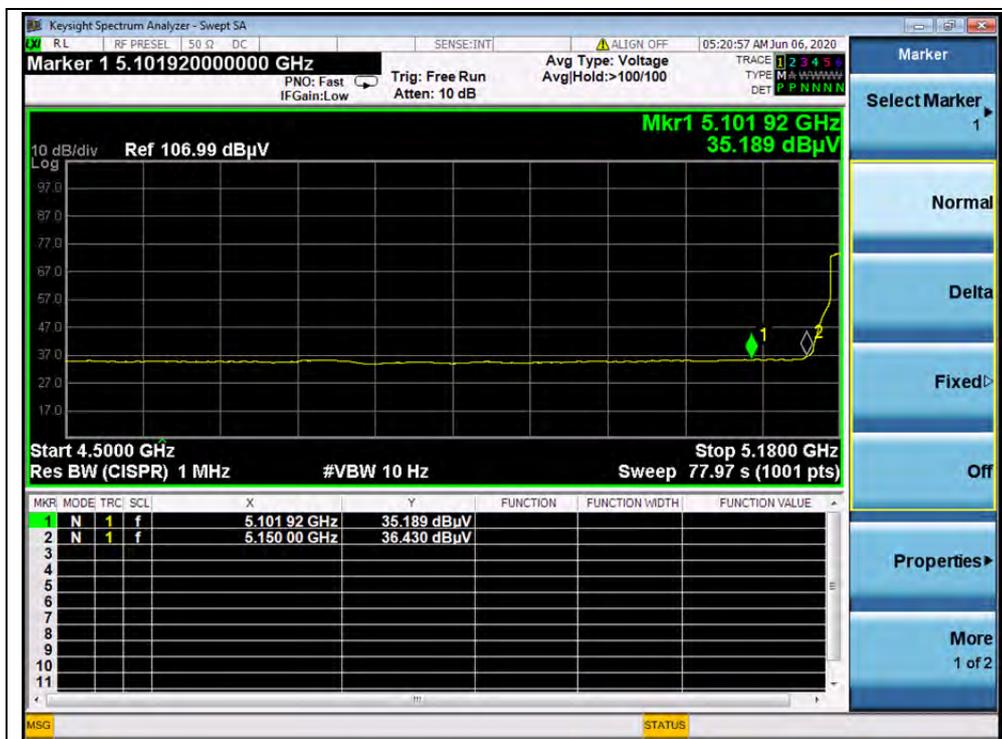


(Channel 36, AVG, 802.11a)

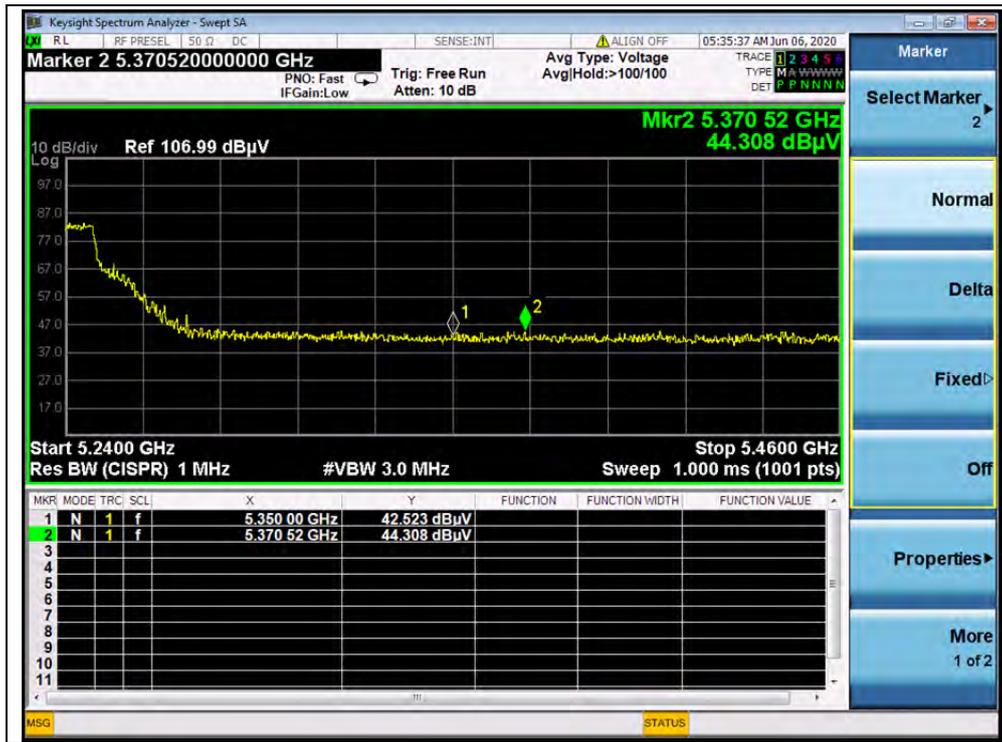

(Channel 48, PEAK, 802.11a)

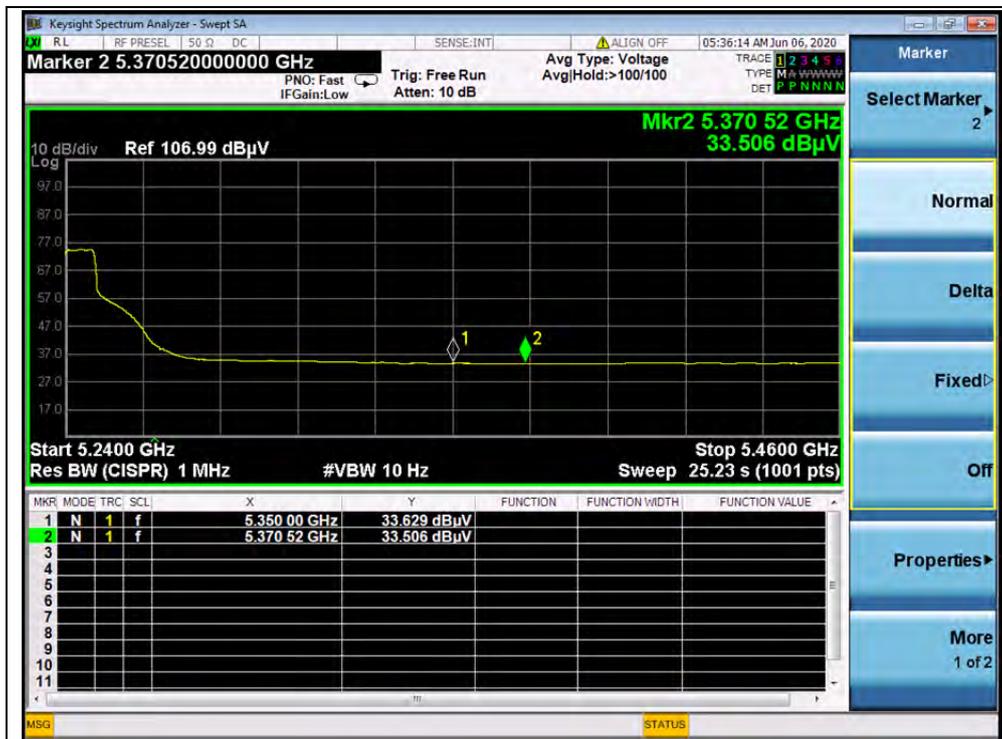


(Channel 48, AVG, 802.11a)

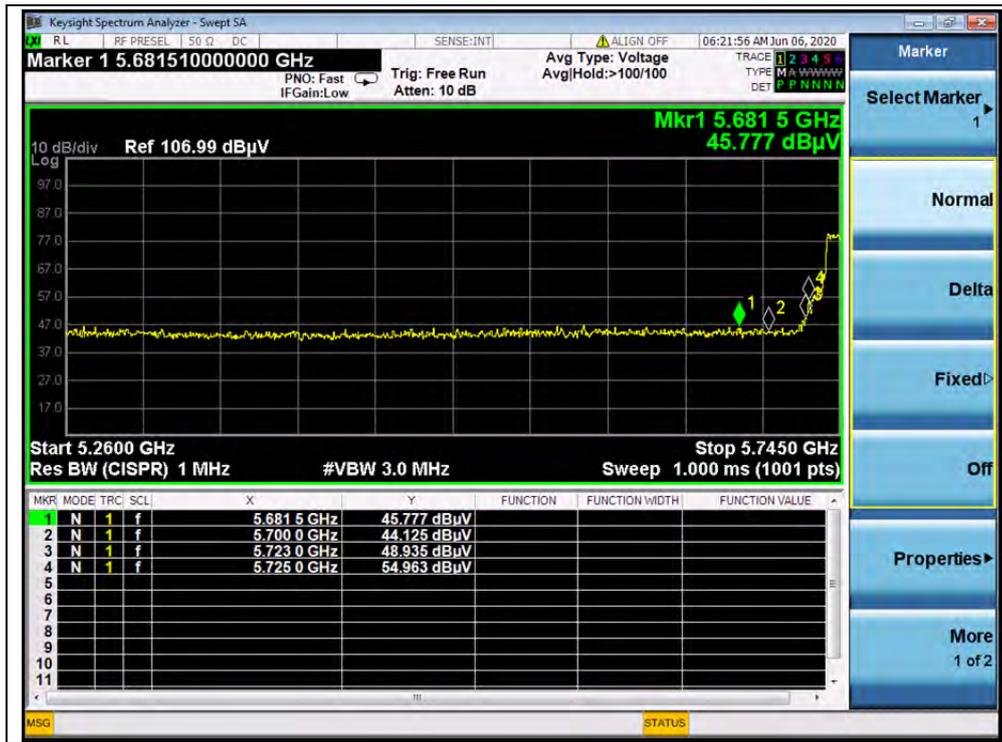

(Channel 149, PEAK, 802.11a)



(Channel 149, AVG, 802.11a)

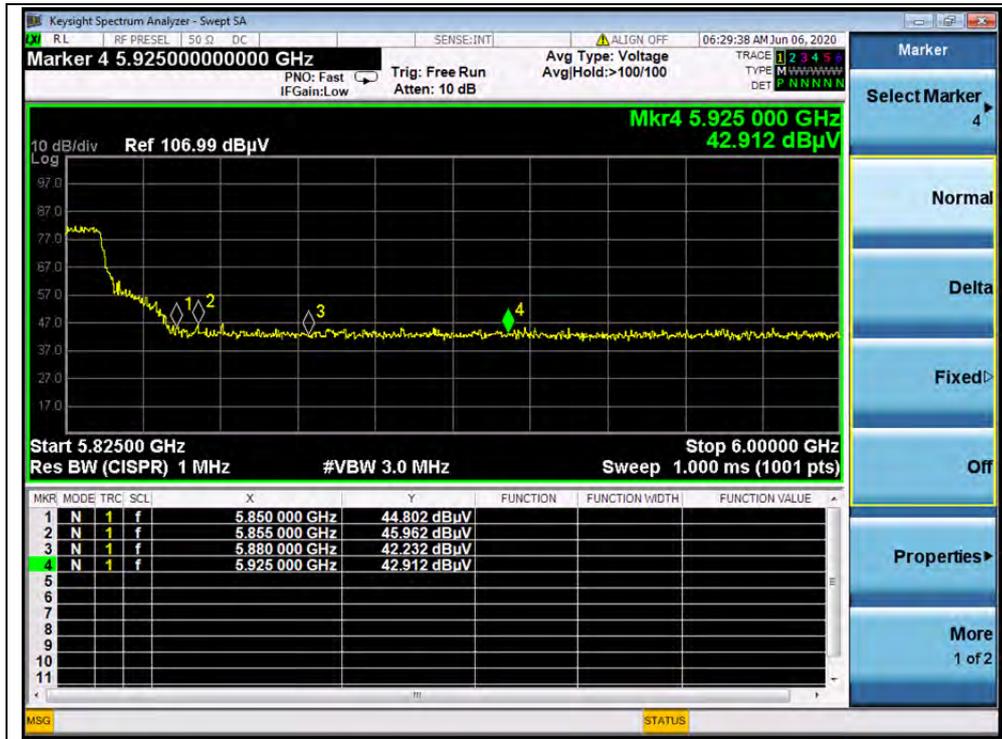

(Channel 165, PEAK, 802.11a)



(Channel 165, AVG, 802.11a)




802.11n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
36	5131.04	PK	47.16	-26.92	32.2	52.44	74	PASS
36	5135.12	AV	35.15	-26.92	32.2	40.43	54	PASS
48	5368.04	PK	44.09	-26.92	32.2	49.37	74	PASS
48	5365.84	AV	33.47	-26.92	32.2	38.75	54	PASS
149	5688.88	PK	43.62	-26.23	32.2	49.59	97.00	PASS
149	5688.88	AV	34.90	-26.23	32.2	40.87	54	PASS
165	5925.00	PK	42.75	-26.23	32.2	48.72	68.23	PASS
165	5925.00	AV	33.98	-26.23	32.2	39.95	54	PASS


B. Test Plots:

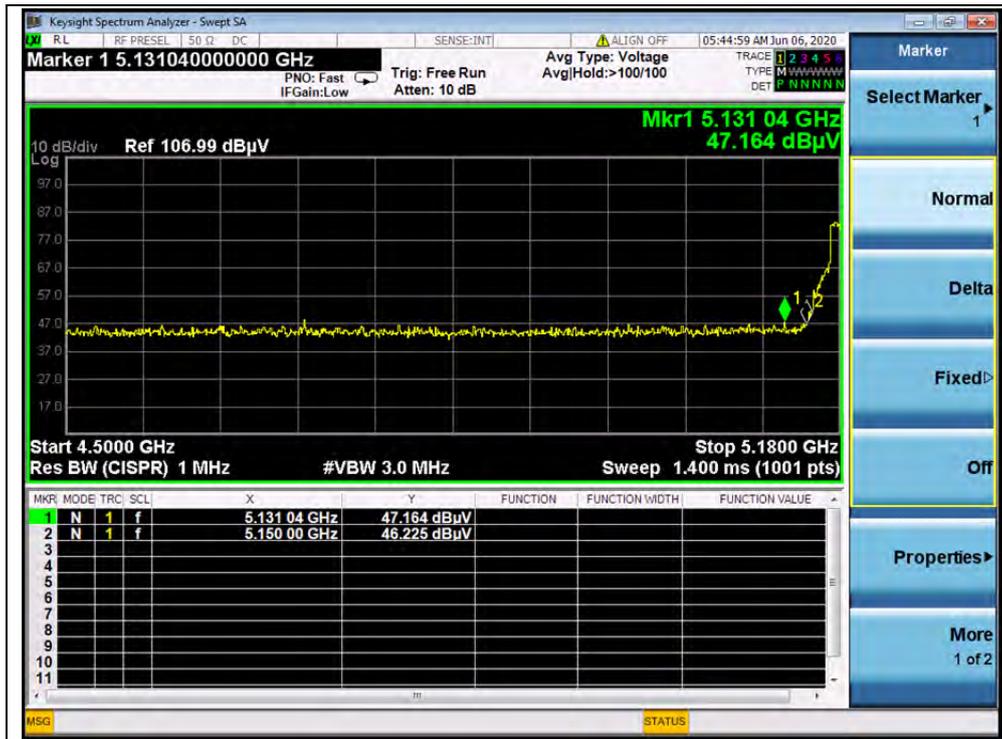


(Channel 36, PEAK, 802.11n (HT20))

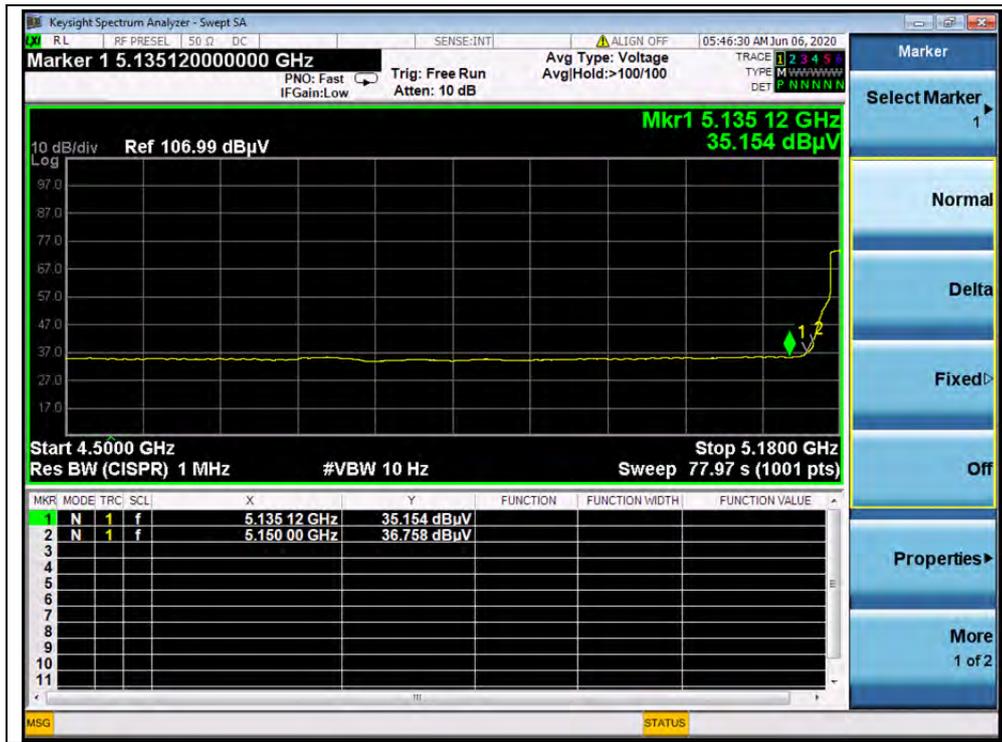


(Channel 36, AVG, 802.11 n (HT20))

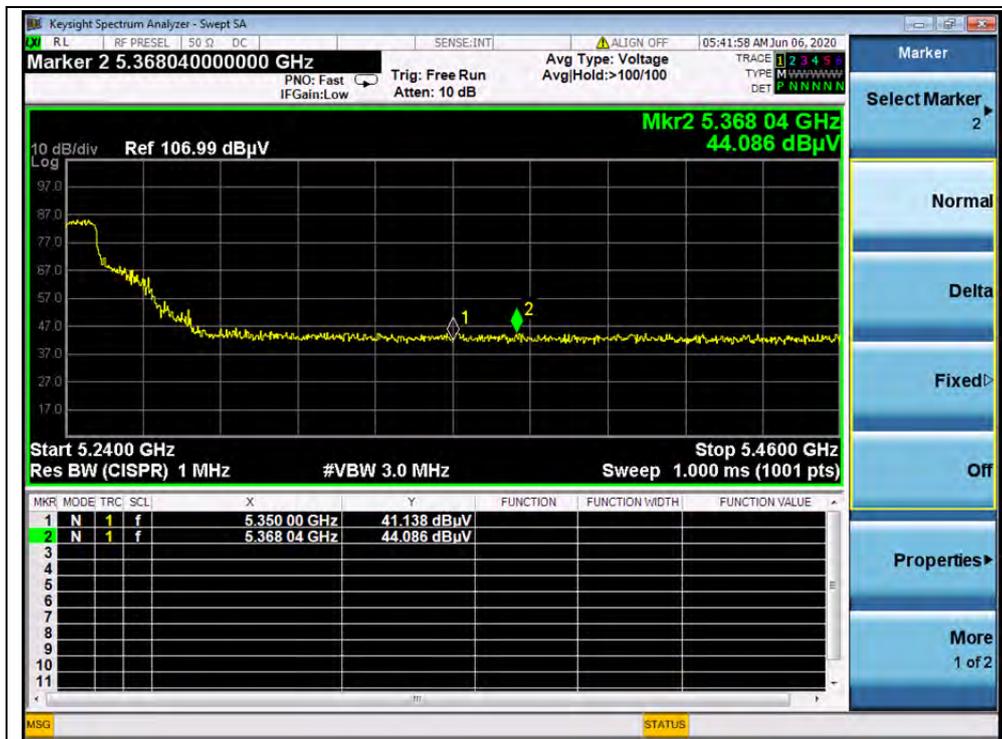


(Channel 48, PEAK, 802.11 n (HT20))

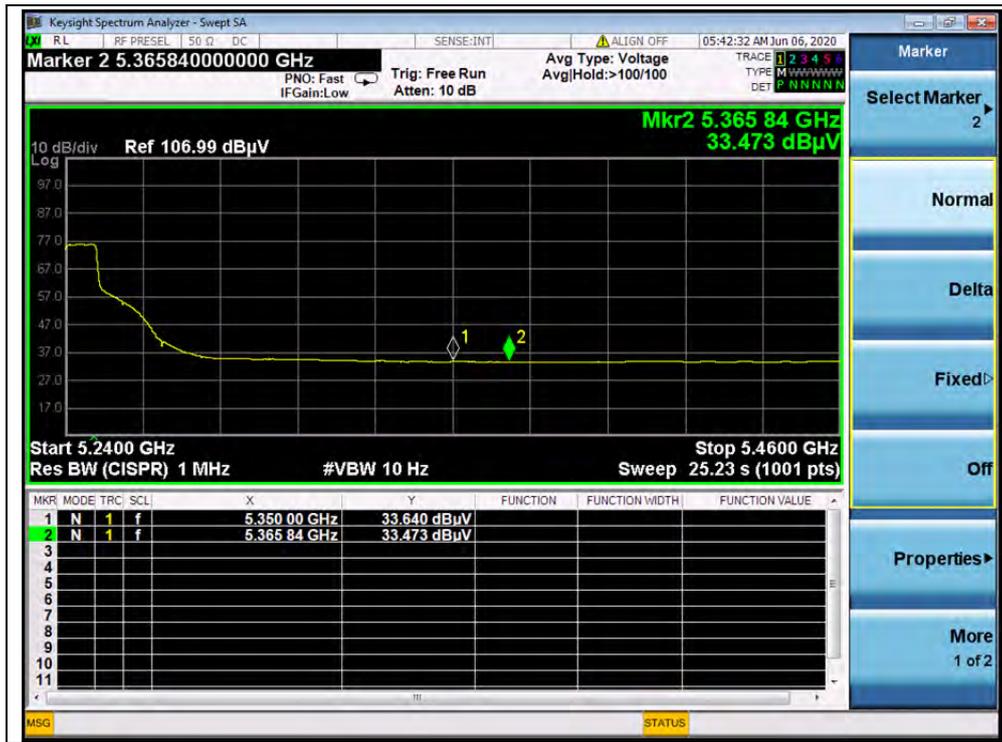


(Channel 48, AVG, 802.11n (HT20))

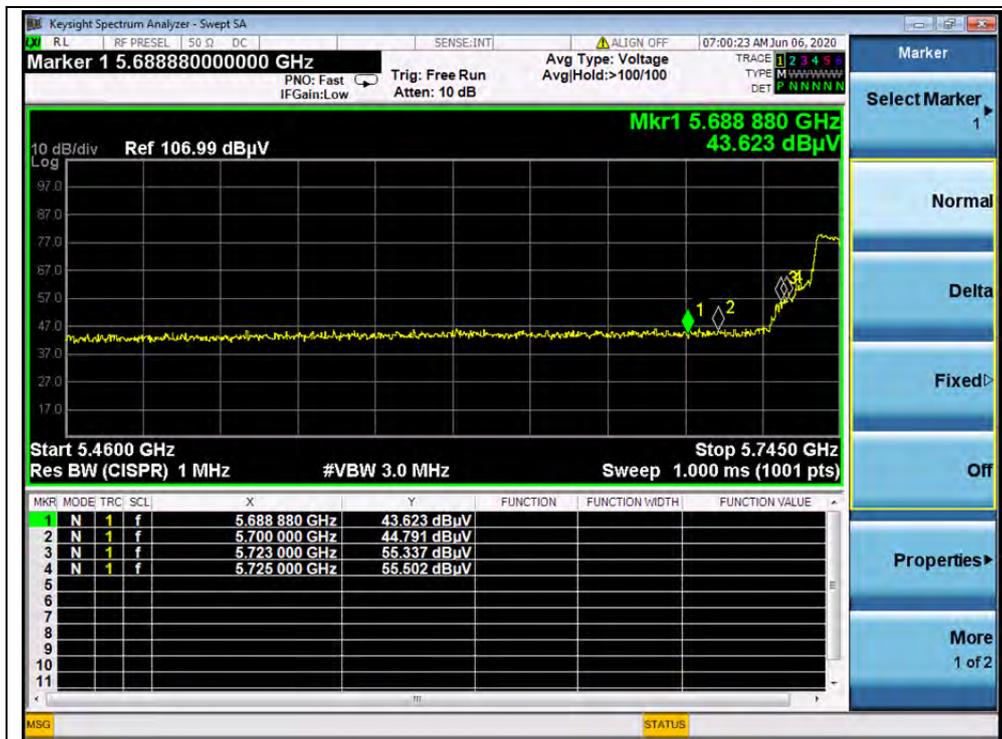


(Channel 149, PEAK, 802.11n (HT20))

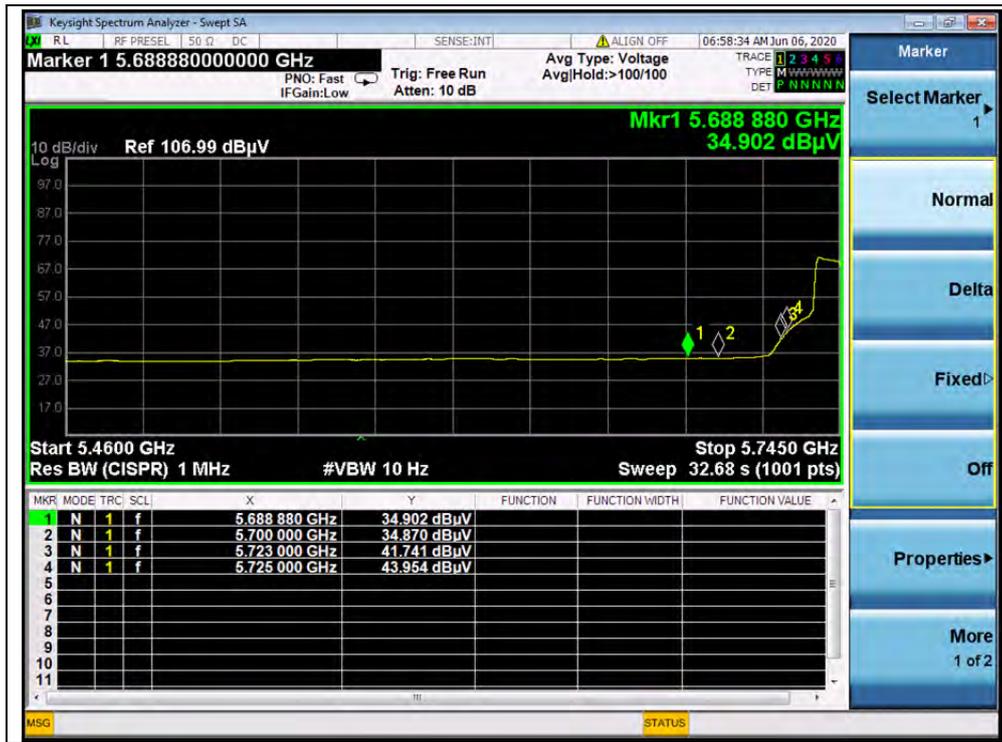

(Channel 149, AVG, 802.11n (HT20))

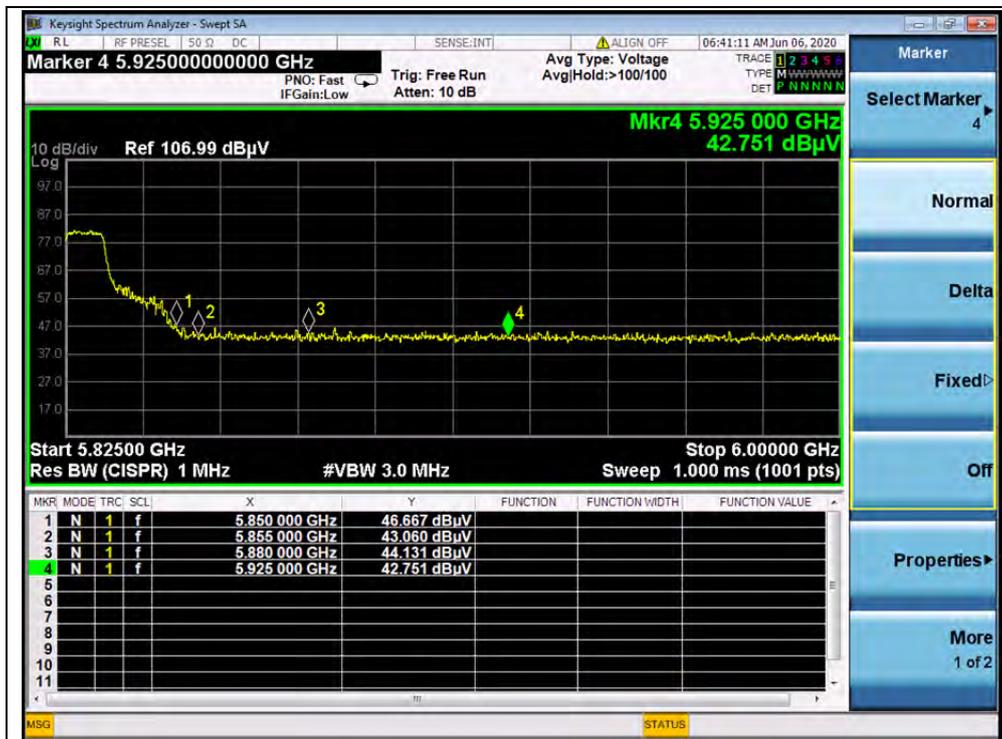

(Channel 165, PEAK, 802.11 n (HT20))

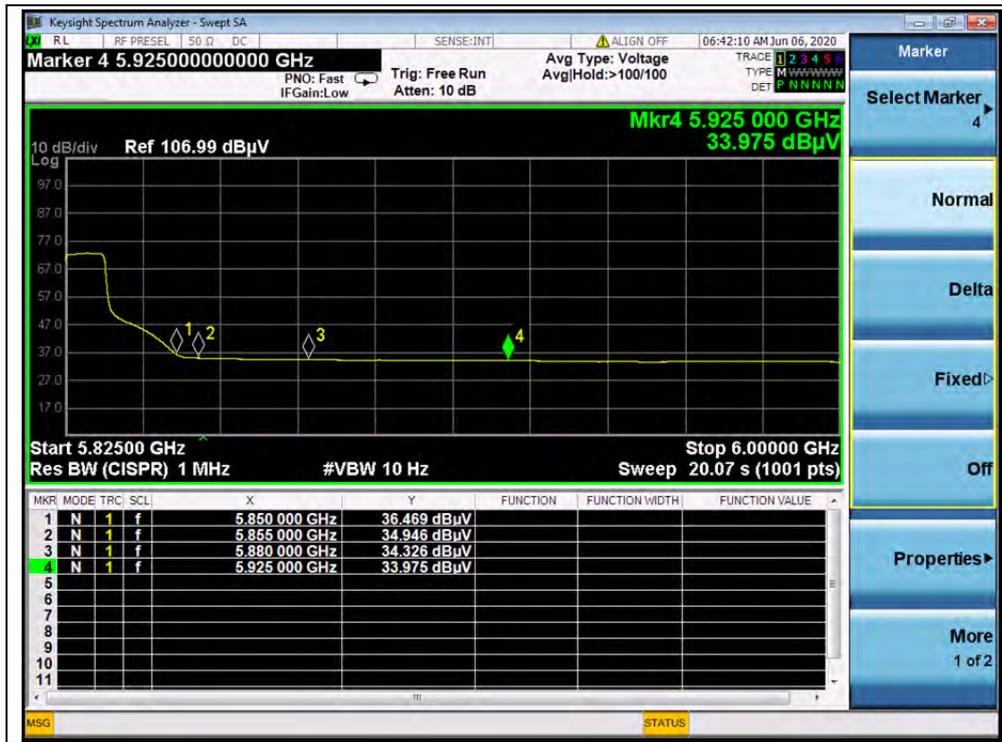

(Channel 165, AVG, 802.11n (HT20))




802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
38	5115.48	PK	47.11	-26.92	32.2	52.39	74	PASS
38	5128.59	AV	35.40	-26.92	32.2	40.68	54	PASS
46	5363.40	PK	41.78	-26.92	32.2	47.06	74	PASS
46	5363.40	AV	33.52	-26.92	32.2	38.80	54	PASS
151	5725.32	PK	54.56	-26.23	32.2	60.53	122.96	PASS
151	5725.32	AV	41.70	-26.23	32.2	47.67	54	PASS
159	5925.00	PK	44.25	-26.23	32.2	50.22	68.23	PASS
159	5925.00	AV	34.04	-26.23	32.2	40.01	54	PASS


B. Test Plots:

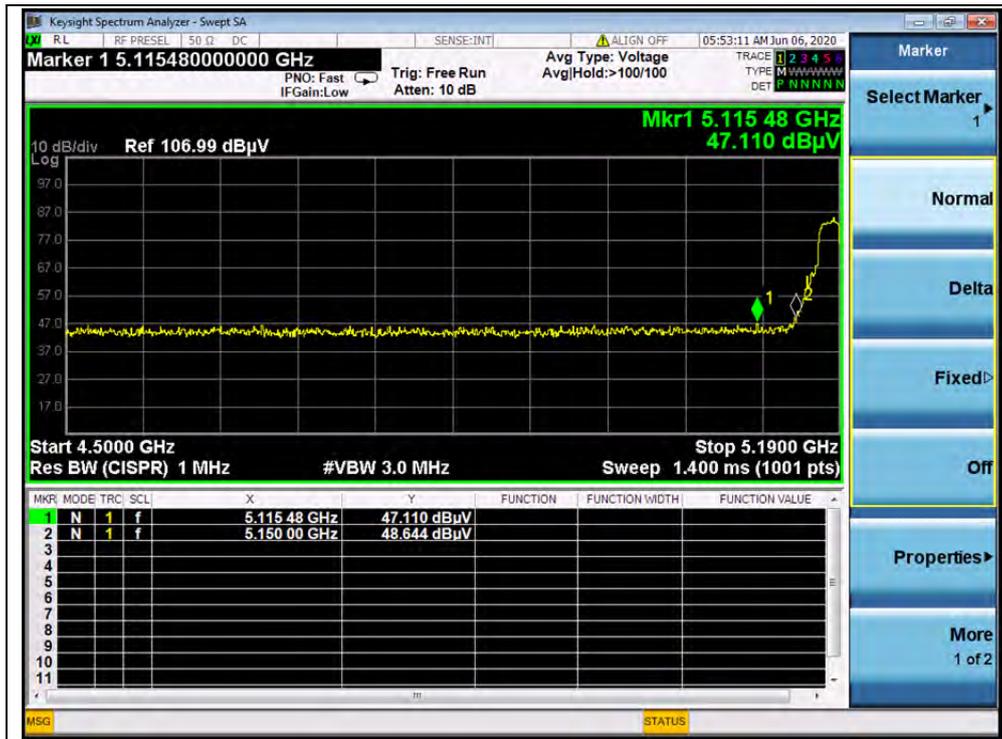


(Channel 38, PEAK, 802.11n (HT40))

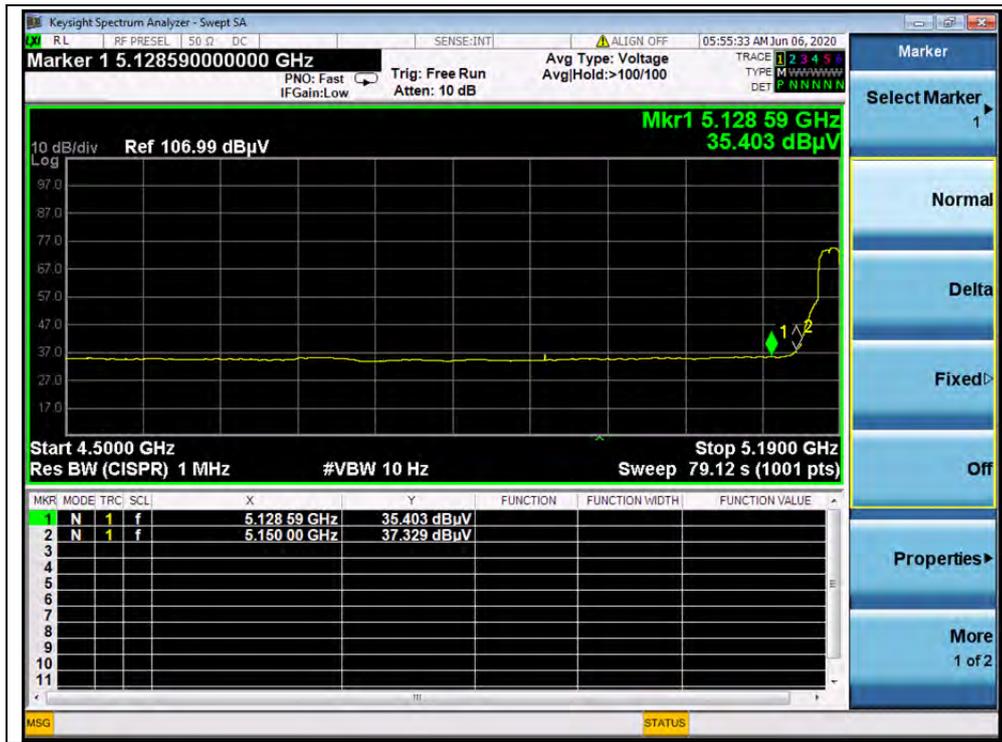


(Channel 38, AVG, 802.11n (HT40))

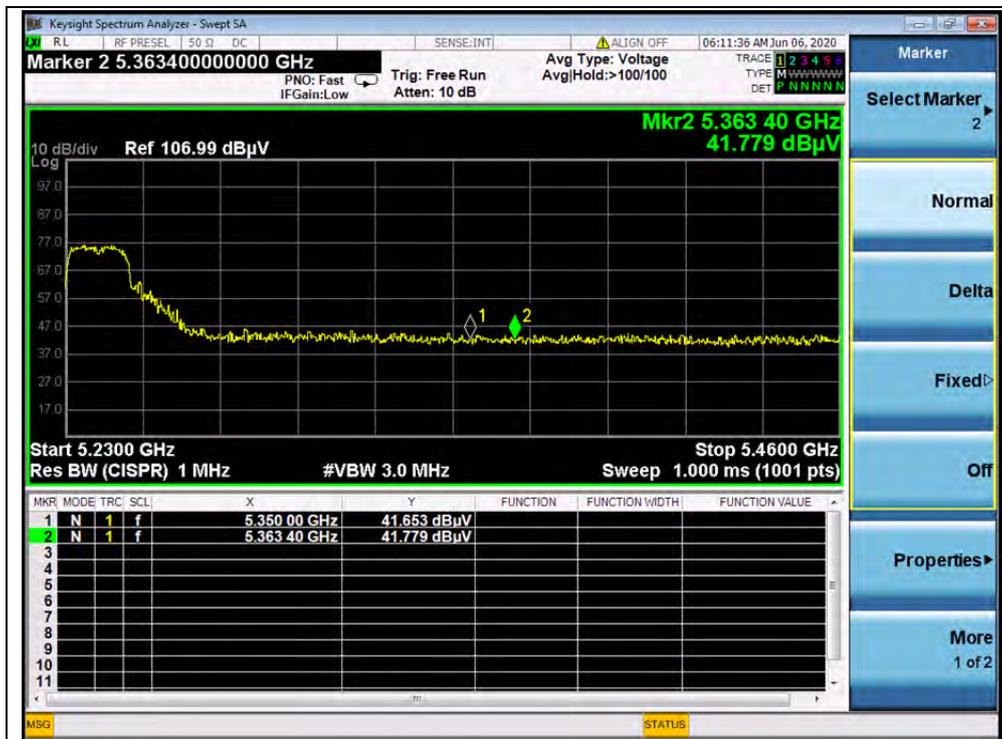


(Channel 46, PEAK, 802.11n (HT40))

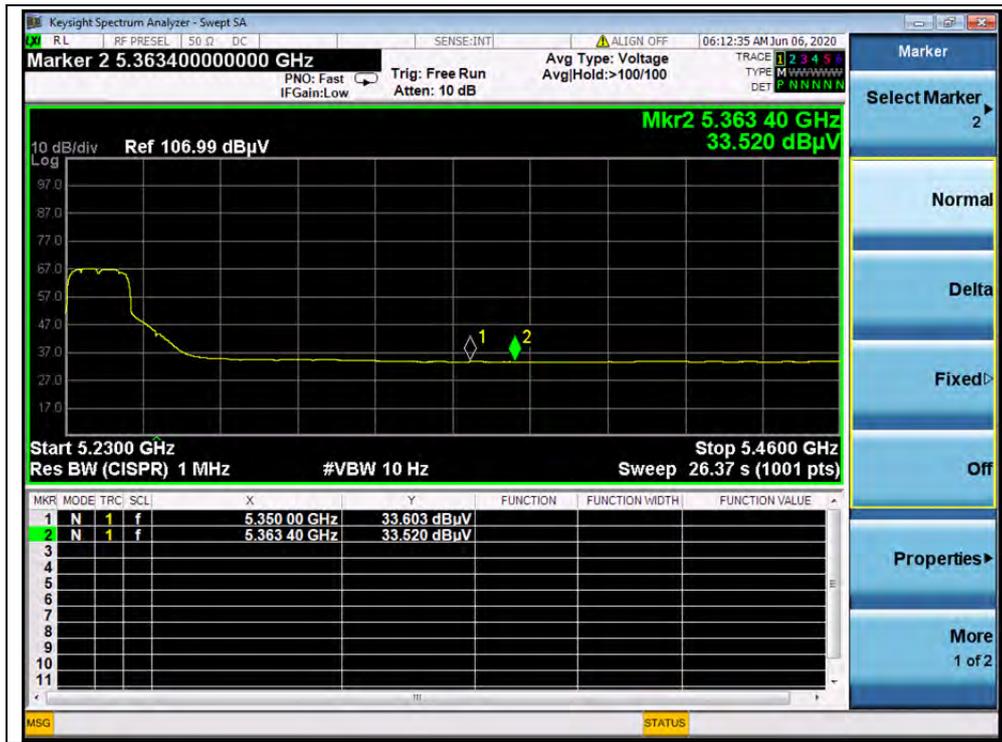


(Channel 46, AVG, 802.11n (HT40))

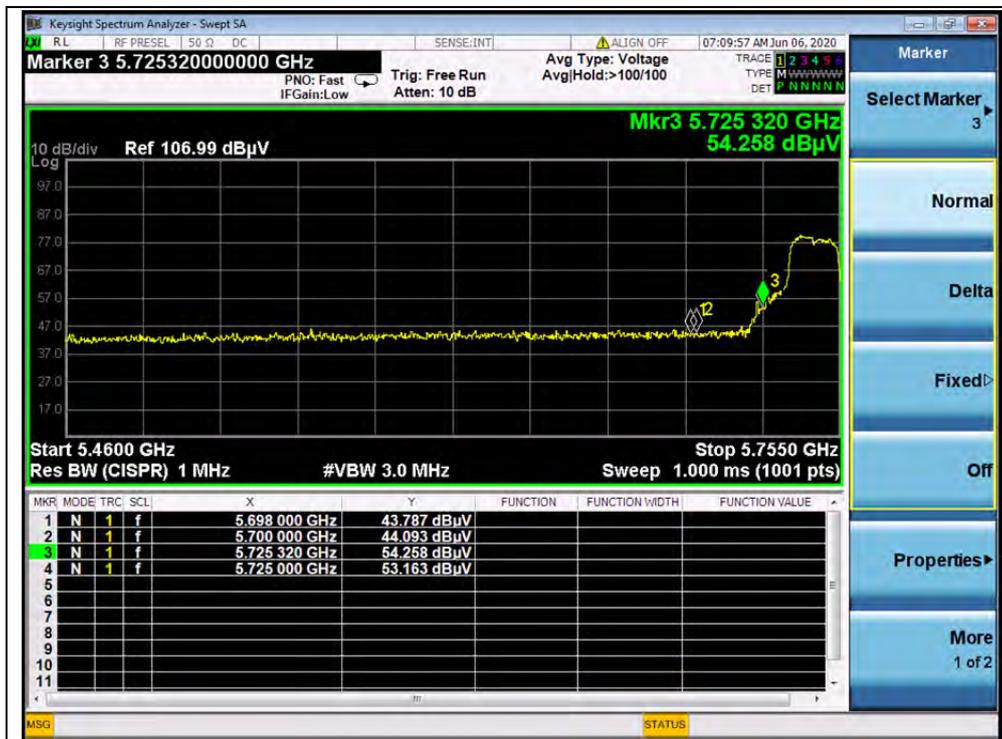


(Channel 151, PEAK, 802.11n (HT40))

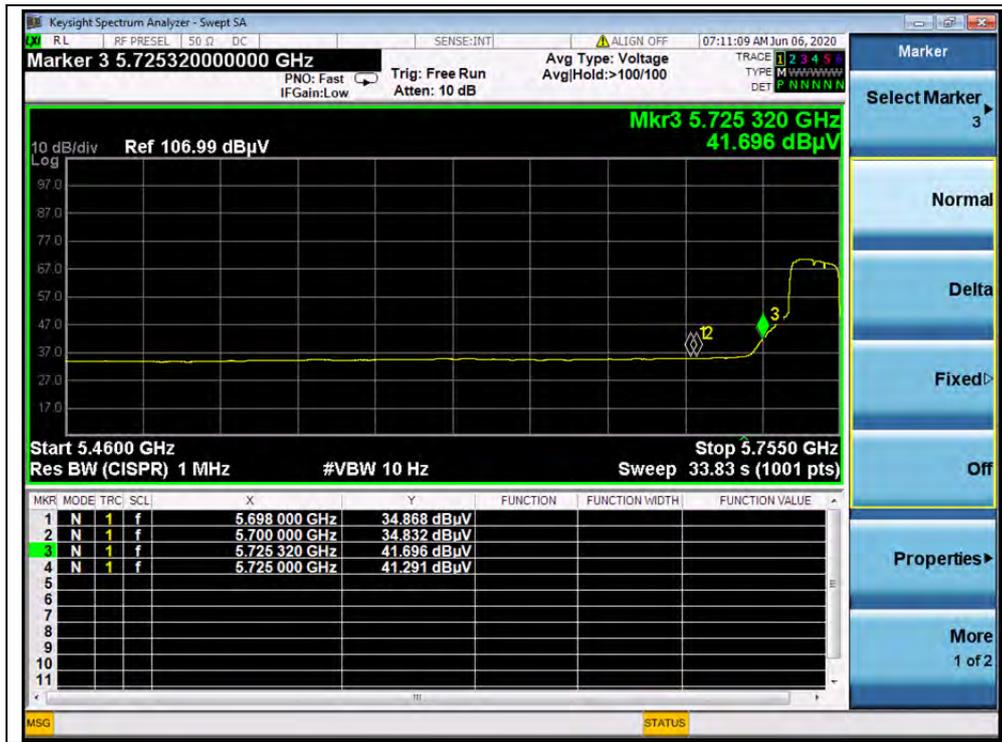

(Channel 151, AVG, 802.11n (HT40))

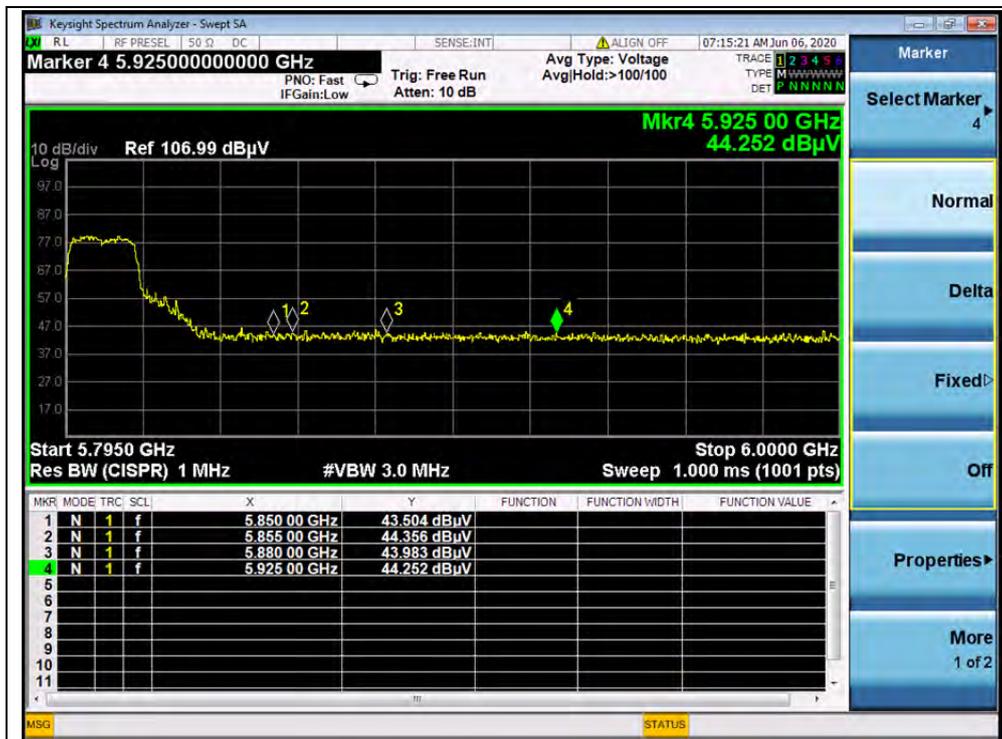

(Channel 159, PEAK, 802.11n (HT40))

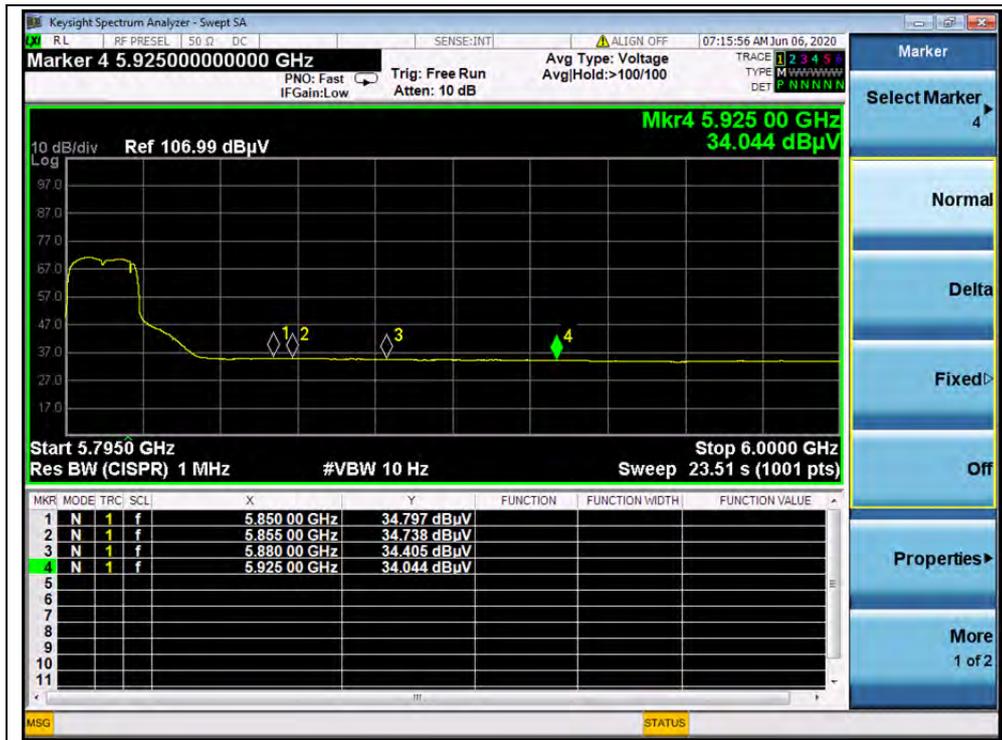

(Channel 159, AVG, 802.11n (HT40))

2.9. Radiated Emission

2.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(eirp) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2. Test Description**Test Setup:**


- 1) For radiated emissions from 9kHz to 30MHz

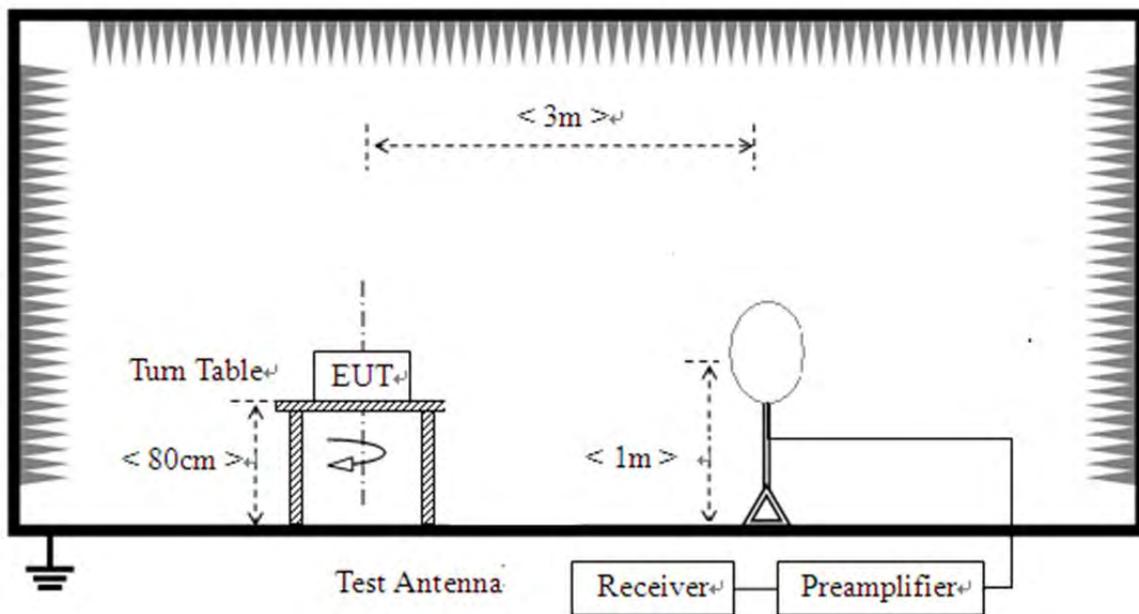

2) For radiated emissions from 30MHz to1GHz

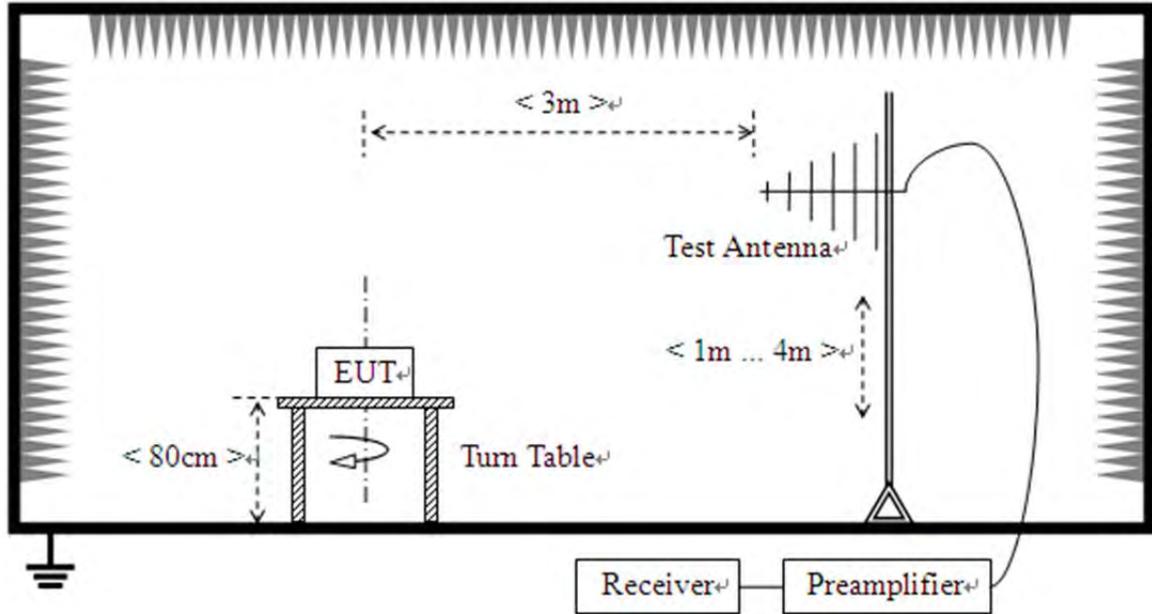

3) For radiated emissions above 1GHz

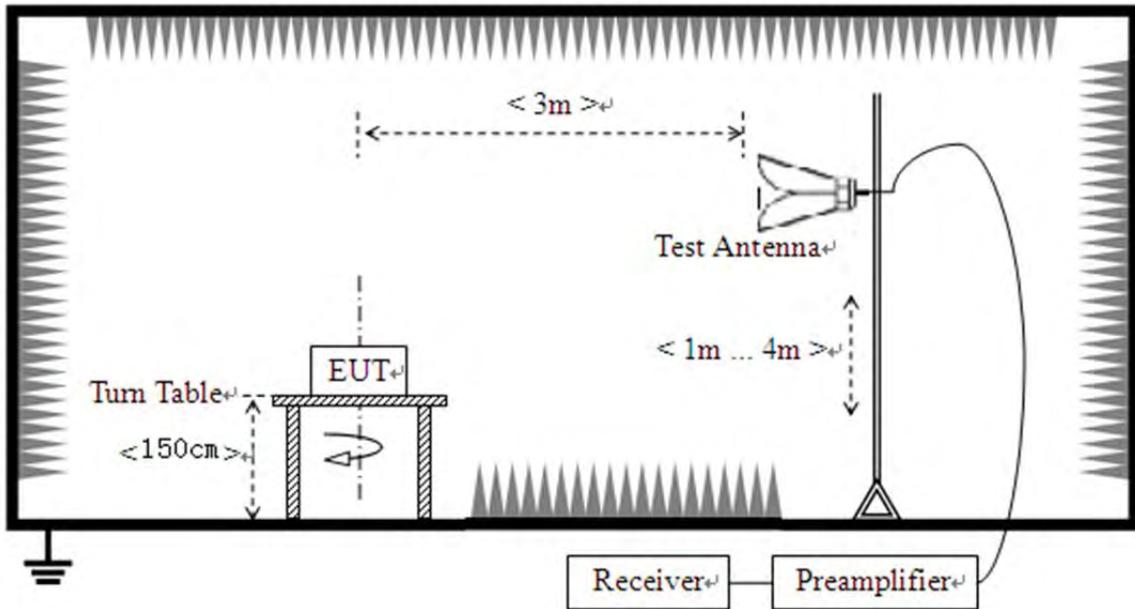

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT



was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.



2.9.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

802.11a Test mode

Plots for Channel = 36

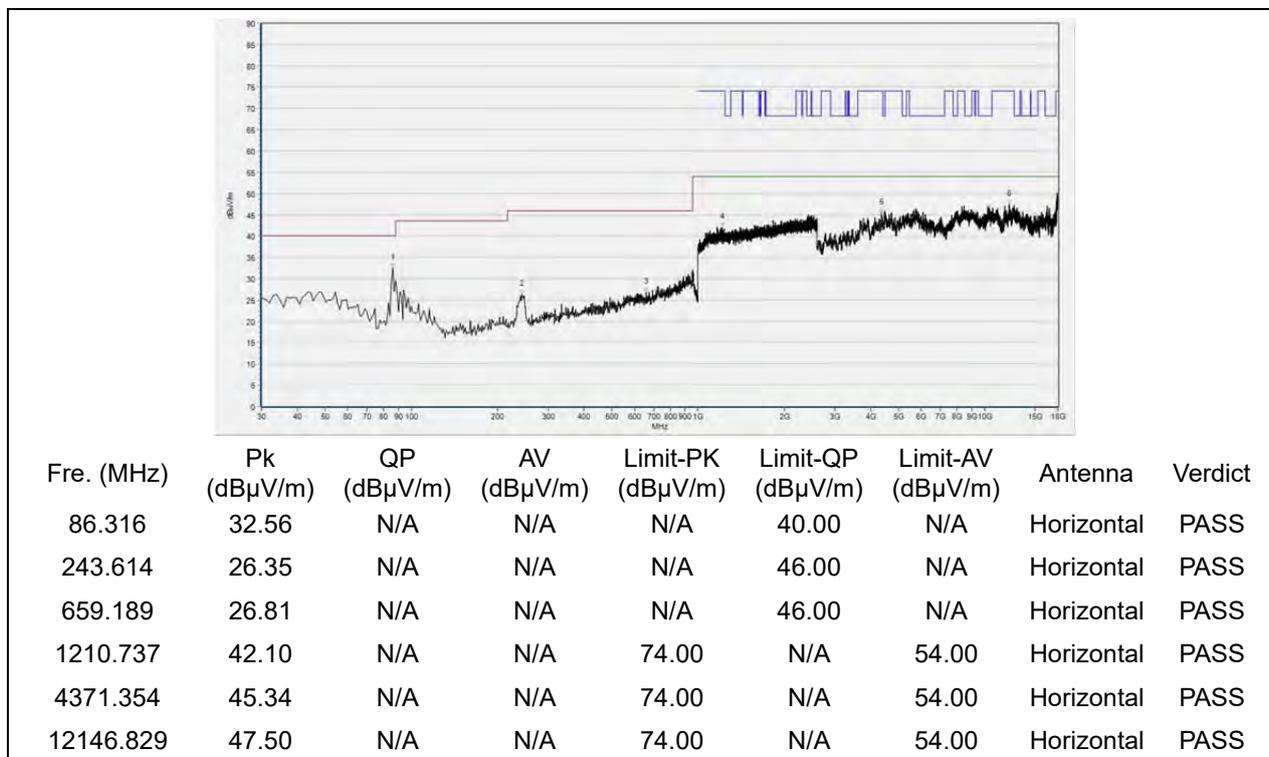


(Antenna Horizontal, 30MHz to 18GHz)

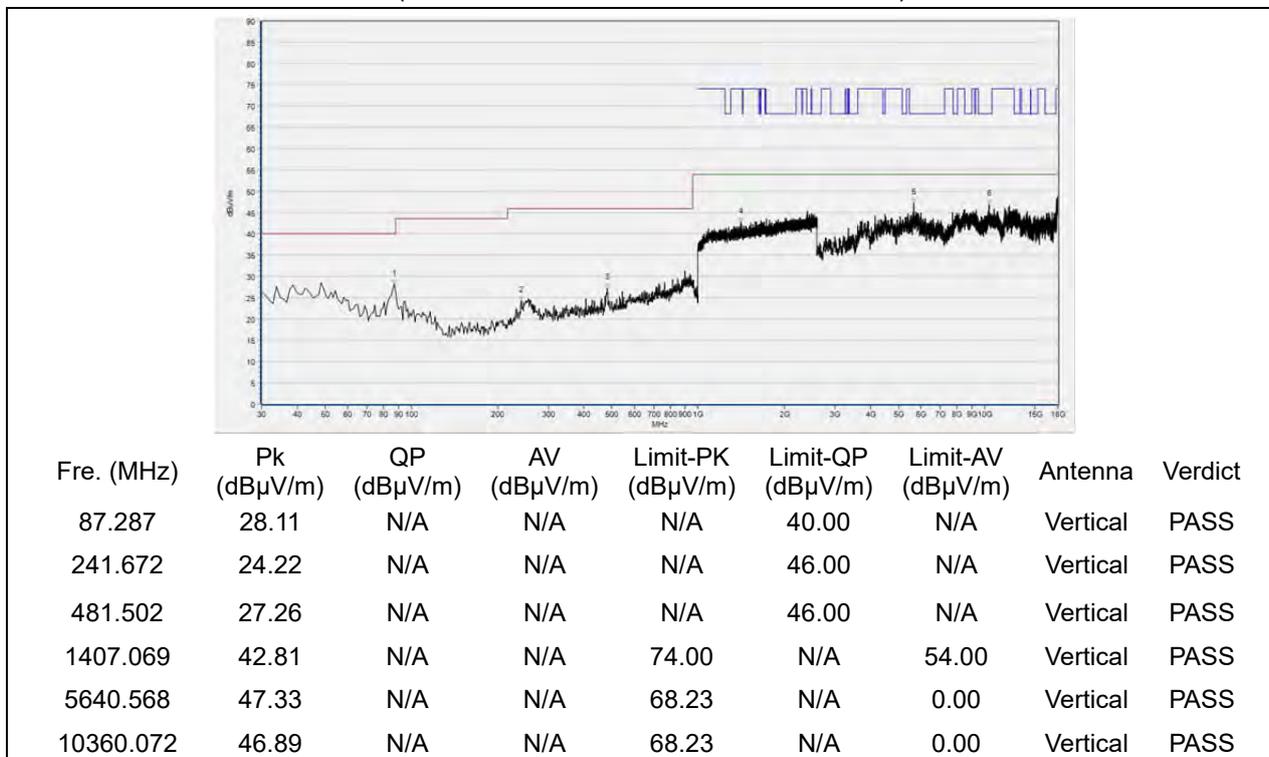


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 44

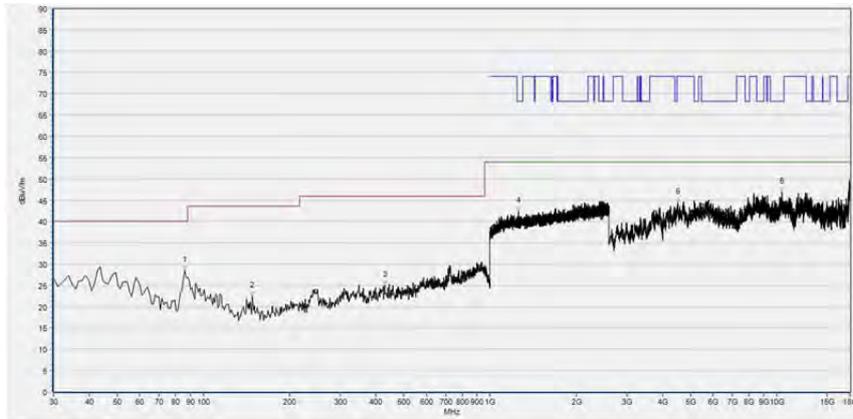

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	28.53	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
148.458	22.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
429.069	24.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1257.152	42.38	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
4513.063	44.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10440.168	46.99	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

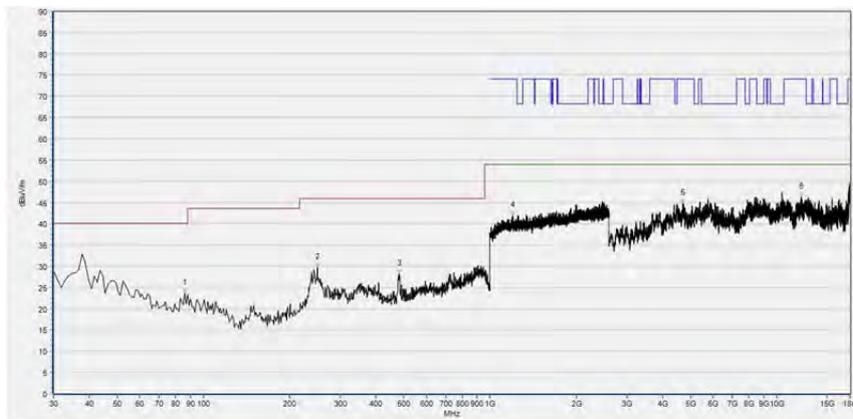

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	23.61	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
249.439	29.69	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
483.443	28.13	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1199.533	41.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4713.303	44.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12146.829	46.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 48

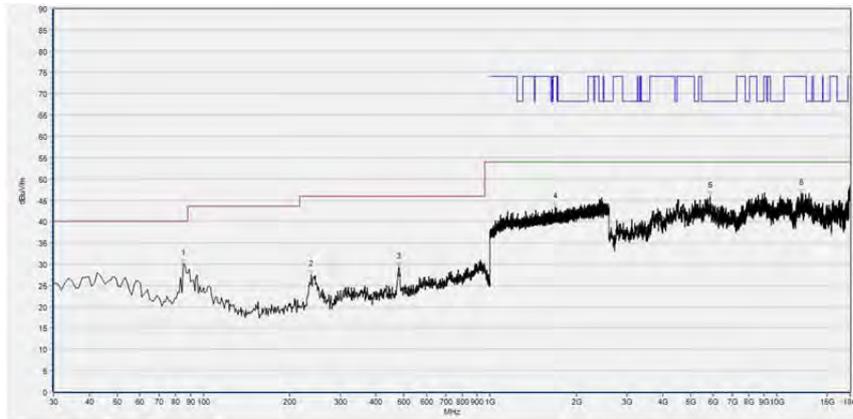

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
85.345	30.07	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
237.788	27.42	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
479.560	29.27	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1686.629	43.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5859.292	45.84	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
12162.232	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

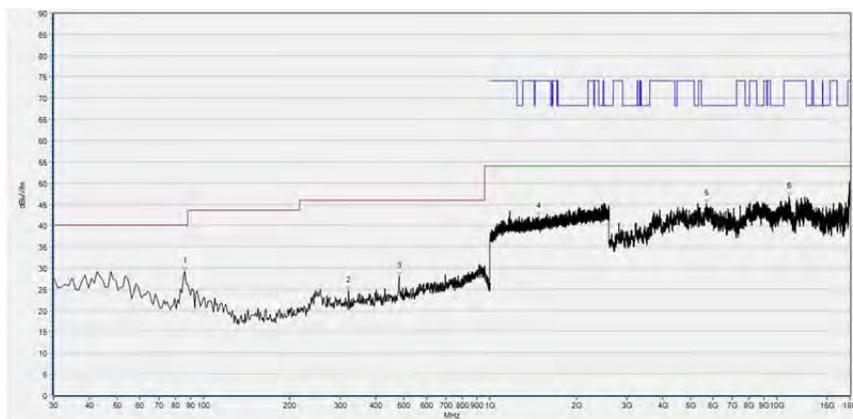

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	29.19	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
321.291	24.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
481.502	28.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1476.425	42.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5683.697	45.10	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
11025.485	46.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 149

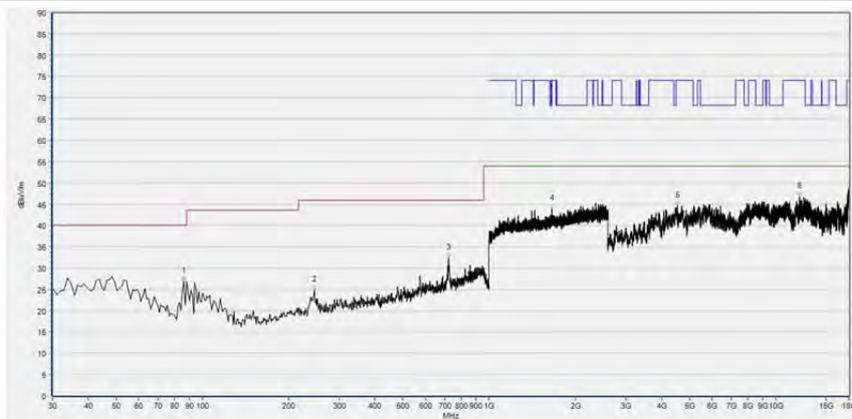

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	26.88	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
246.527	24.83	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
723.273	32.28	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1659.420	43.92	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
4546.949	44.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12122.184	46.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

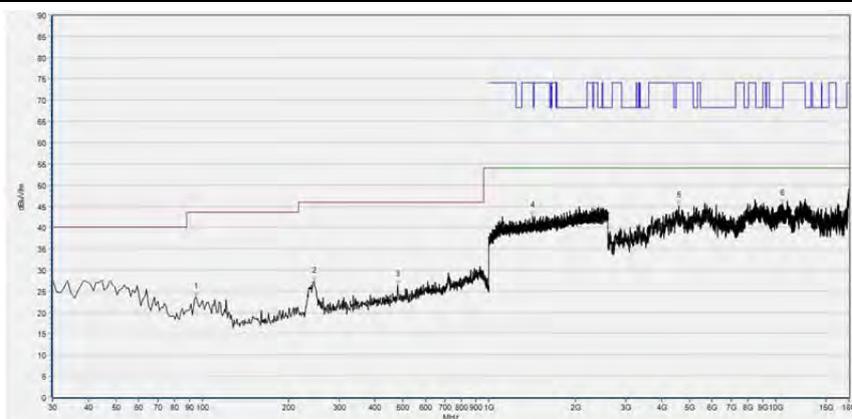


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.055	23.65	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
245.556	27.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
480.531	26.44	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1418.273	42.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4599.320	45.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10511.022	45.63	N/A	N/A	68.23	N/A	0.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 157

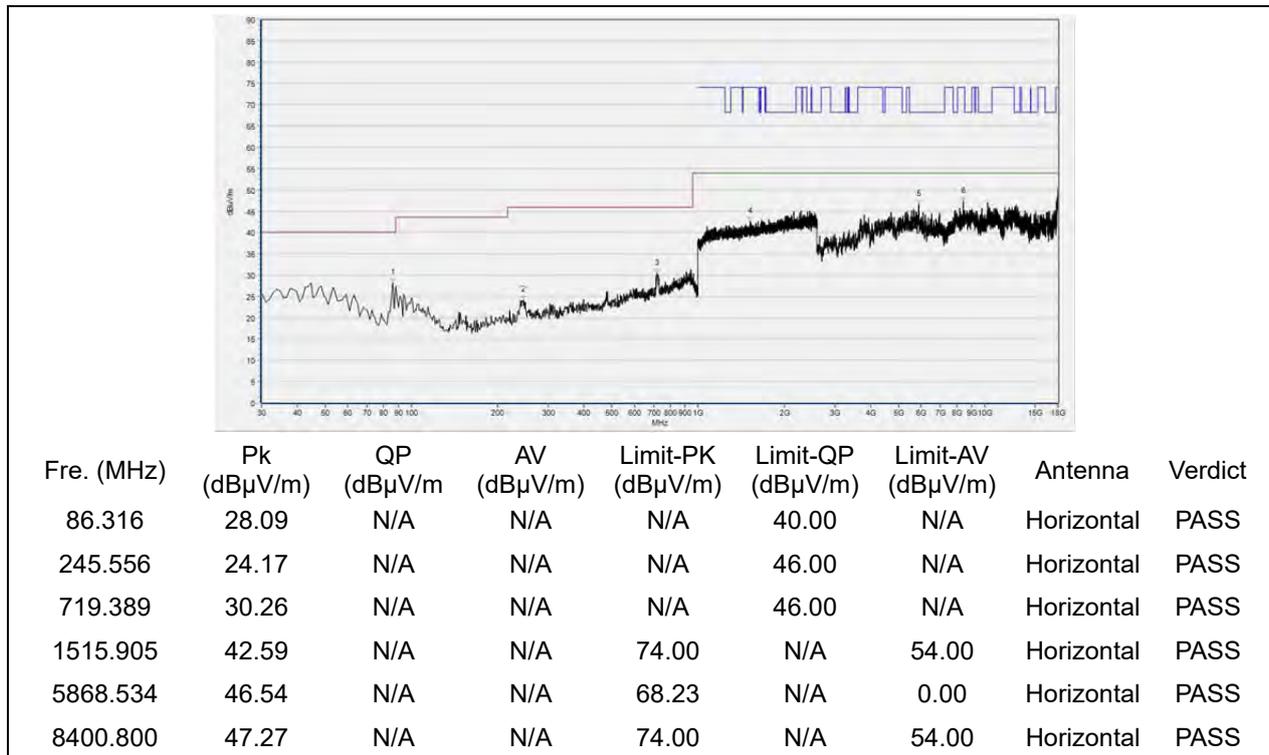


(Antenna Horizontal, 30MHz to 18GHz)

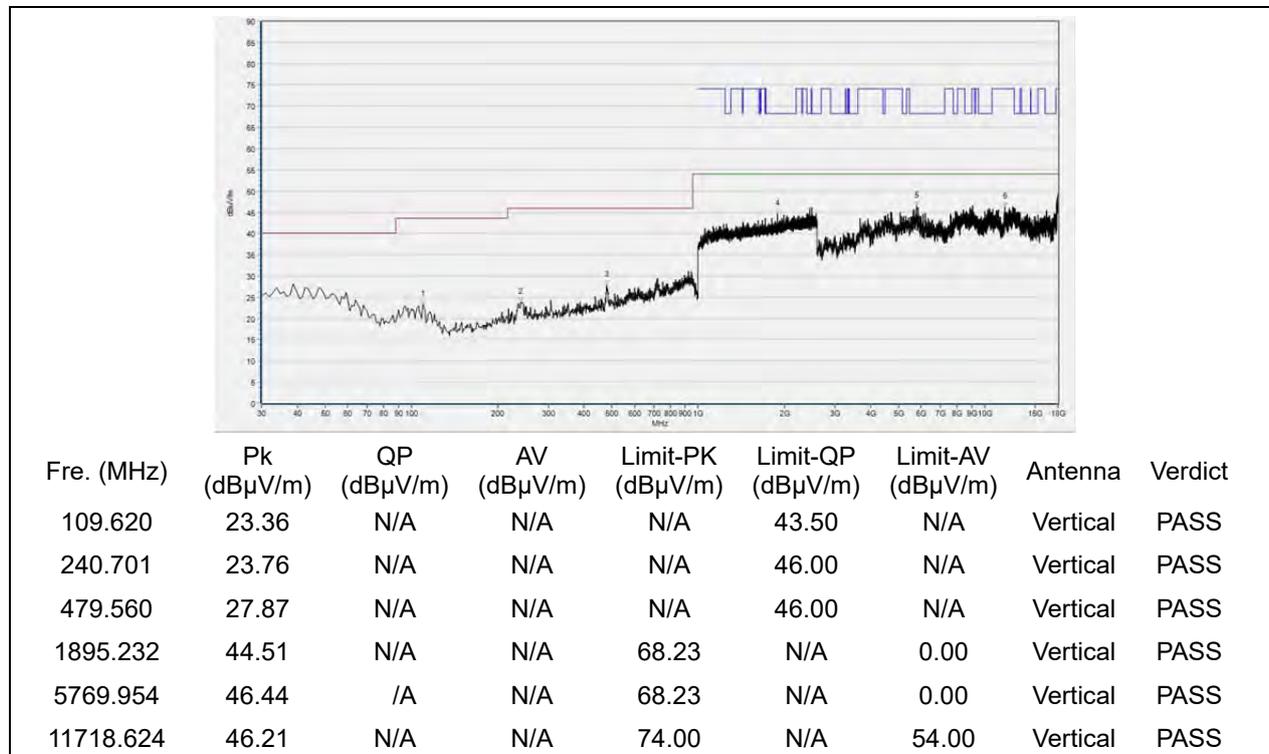


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 165

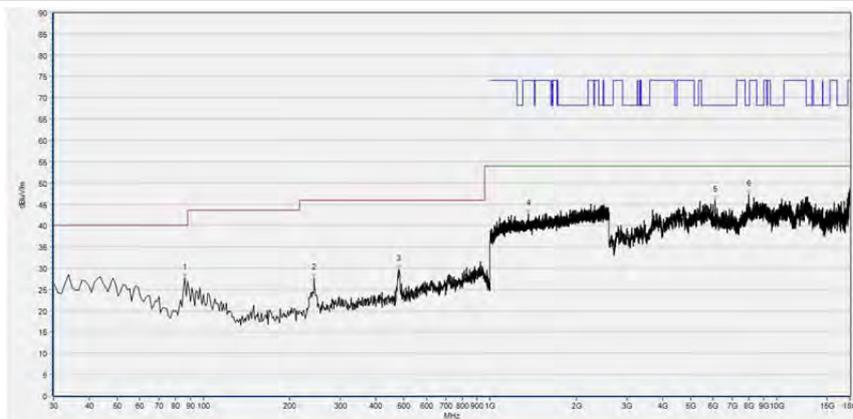

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	27.62	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
243.614	27.66	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
480.531	29.72	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1360.120	42.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6093.419	45.90	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
8006.481	47.26	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

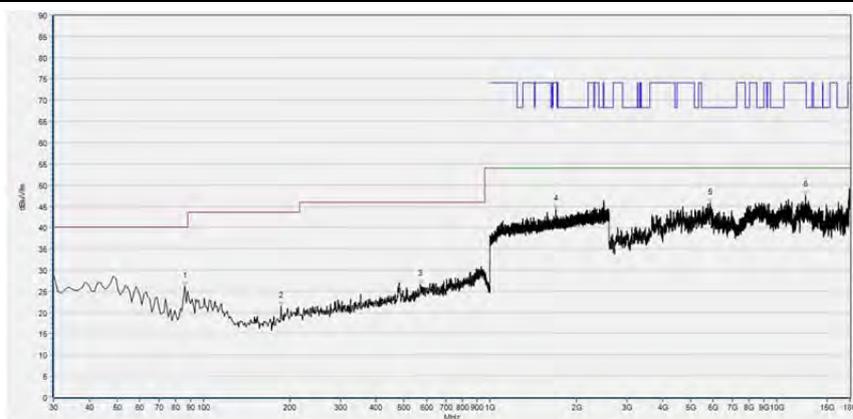


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	26.15	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
186.326	21.51	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
571.802	26.73	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1696.232	44.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5856.211	45.71	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
12608.922	47.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11n (HT20) Test mode

Plots for Channel = 36

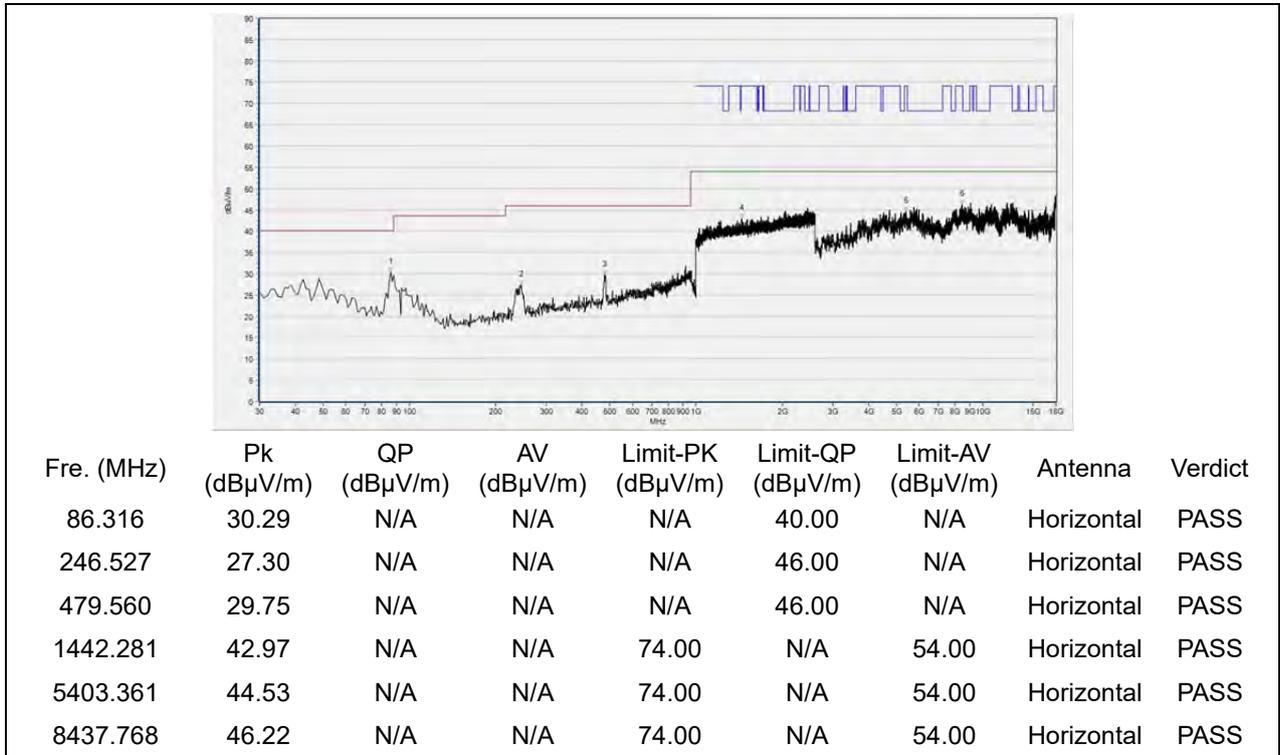


(Antenna Horizontal, 30MHz to 18GHz)

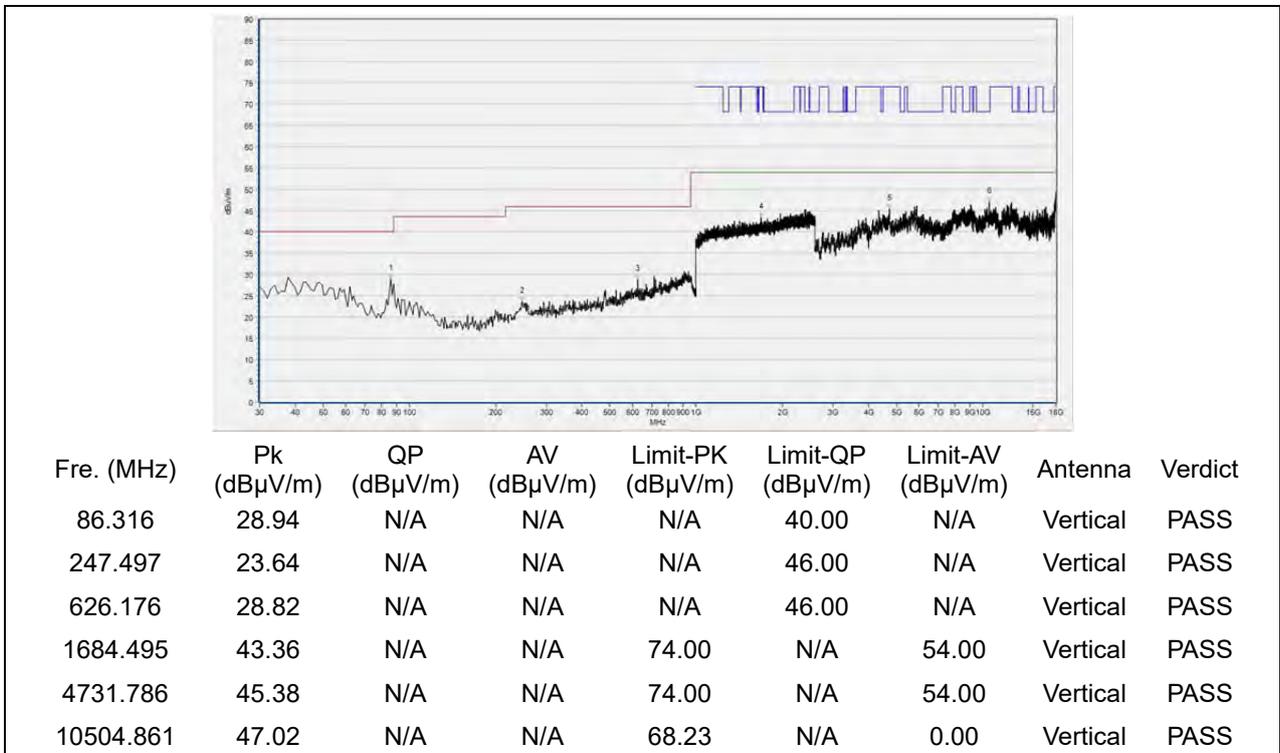


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 44

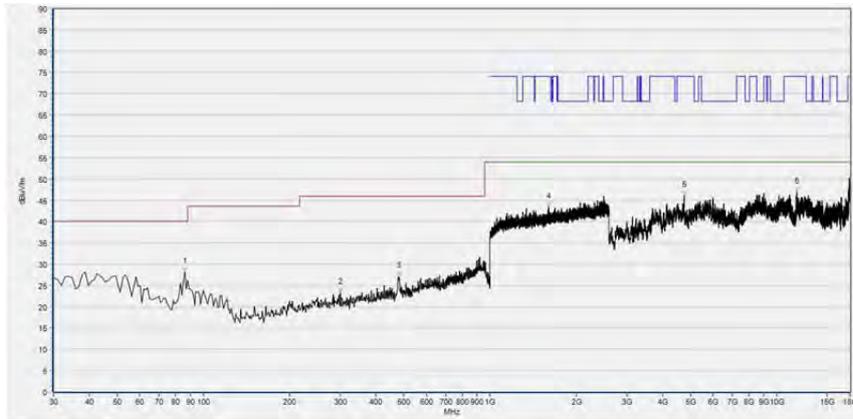

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
86.316	28.13	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
299.930	23.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
479.560	27.18	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1600.200	43.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4747.189	46.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11740.188	46.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

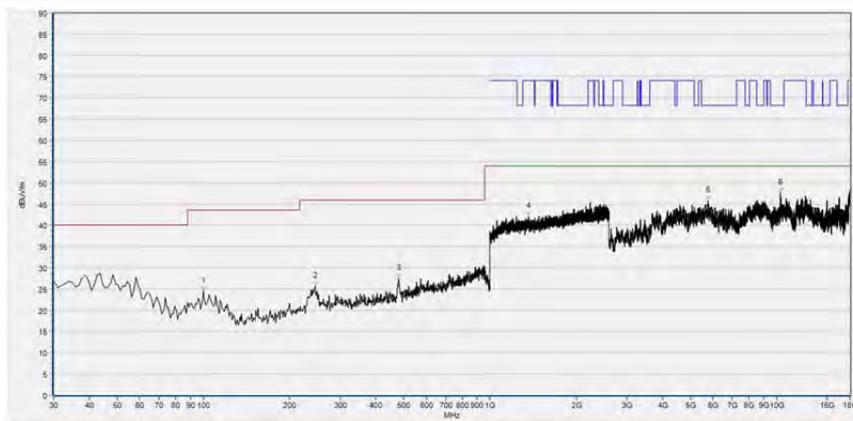

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
99.910	24.46	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
245.556	25.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
480.531	27.46	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1359.587	42.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5766.873	45.7	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
10298.460	47.54	N/A	N/A	68.23	N/A	0.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 48

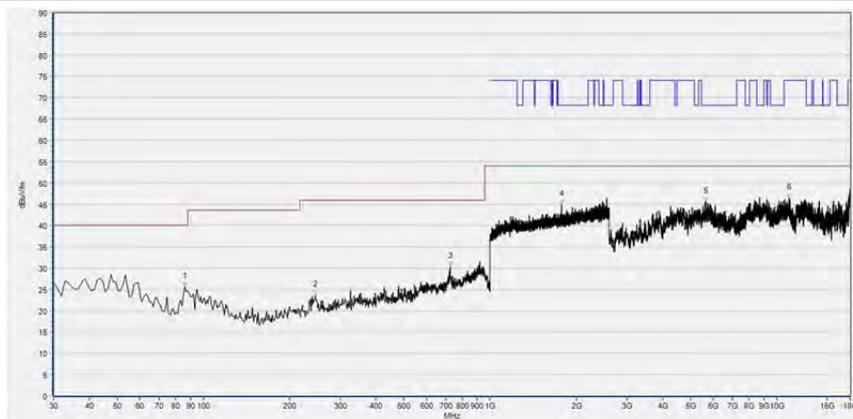

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	25.68	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
245.556	23.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
725.215	30.36	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1775.192	44.95	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
5637.487	45.61	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
11016.243	46.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

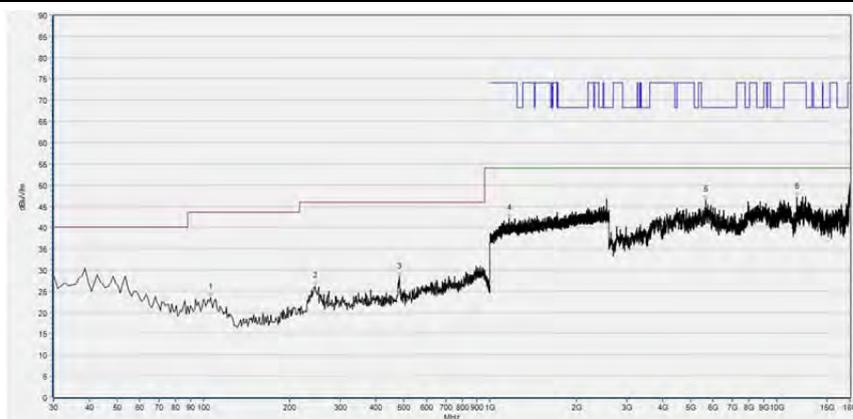

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.736	3.51	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
245.556	26.22	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
483.443	28.29	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1165.922	42.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5646.729	46.45	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
11730.946	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 149

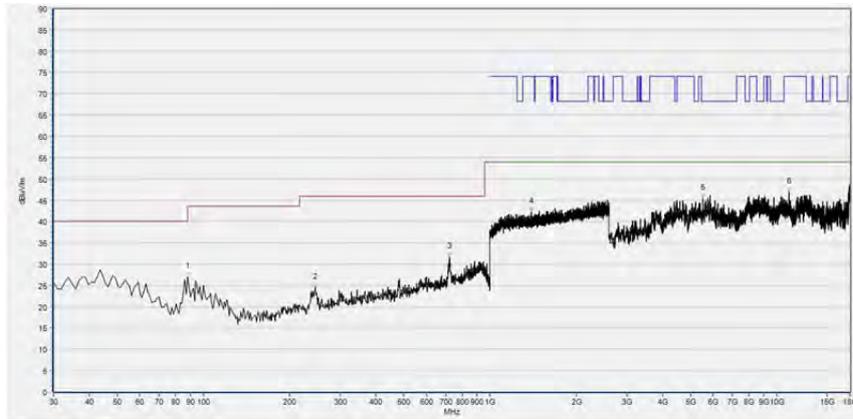

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
88.258	27.02	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
245.556	24.44	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
723.273	31.61	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1394.265	42.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5526.585	45.45	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
11037.808	46.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

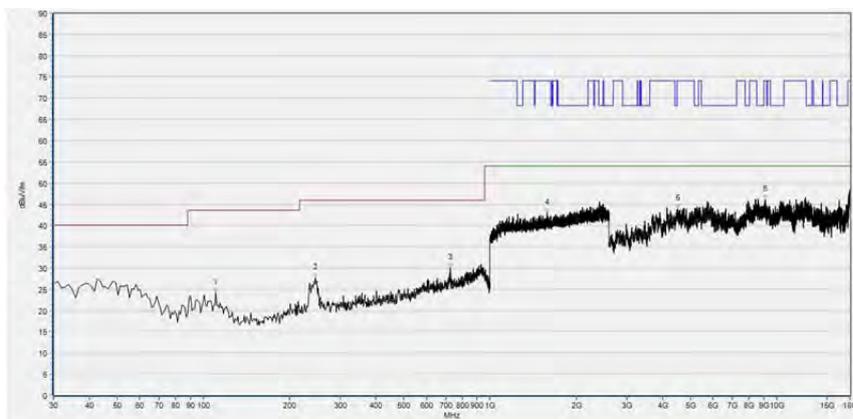

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.591	24.11	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
245.556	27.62	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
728.128	30.02	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1580.994	42.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4516.143	43.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9140.148	46.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 157

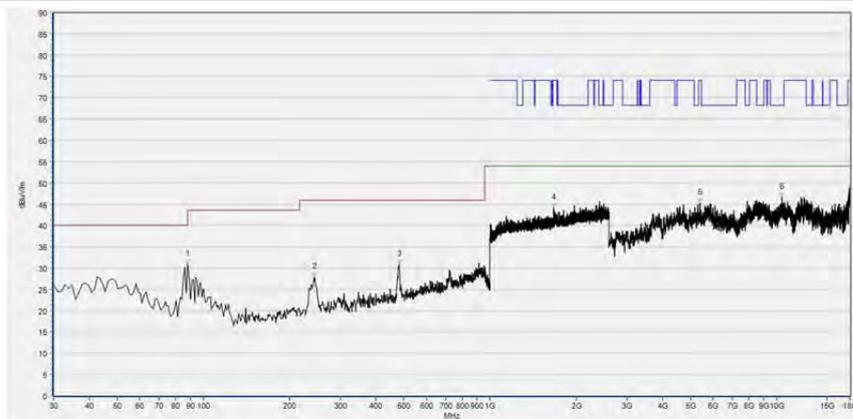

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
88.258	30.78	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
244.585	27.75	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.502	30.88	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1662.621	44.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5403.361	45.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10440.168	46.56	N/A	N/A	68.23	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

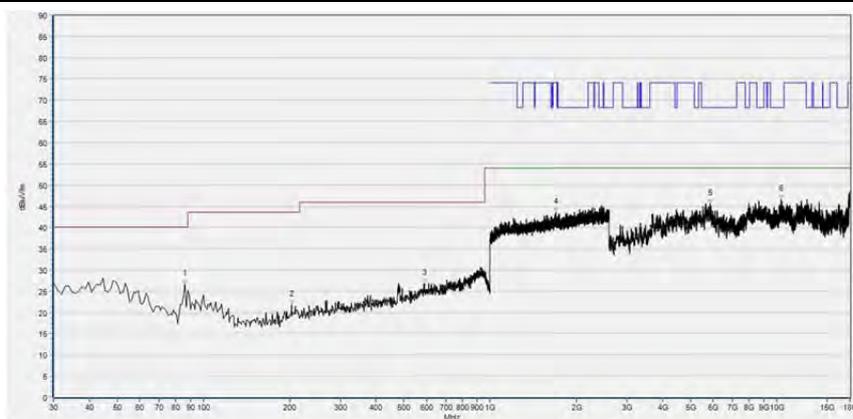

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.316	26.71	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
202.833	21.80	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
589.279	26.82	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1699.433	43.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5865.453	45.58	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
10338.508	46.51	N/A	N/A	68.23	N/A	0.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 165

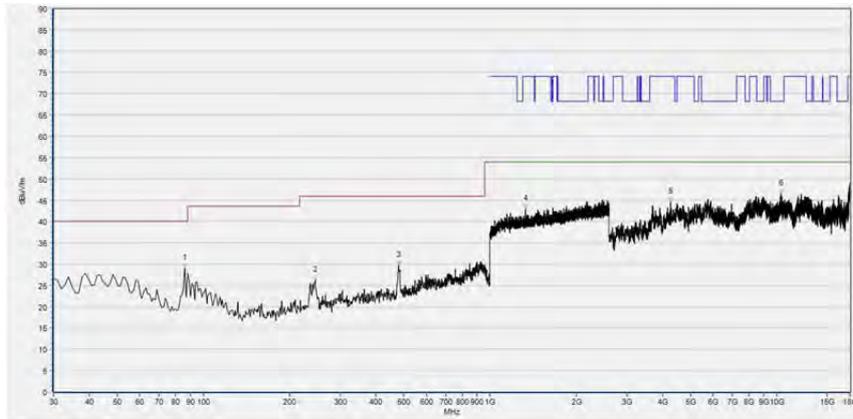

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
86.316	29.01	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
245.556	26.09	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
479.560	29.62	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1327.042	42.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4254.291	44.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10360.072	46.43	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

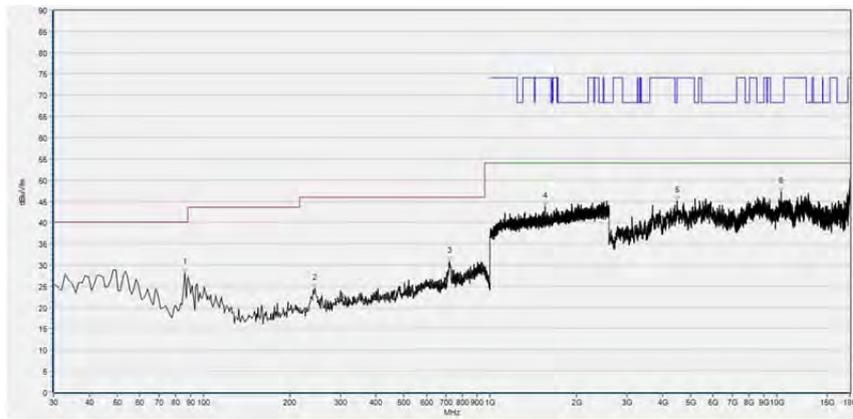


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
86.316	28.08	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
244.585	24.46	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
723.273	30.78	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1554.852	43.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4497.660	45.15	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
10341.588	47.22	N/A	N/A	68.23	N/A	0.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11n (HT40) Test mode

Plots for Channel = 38

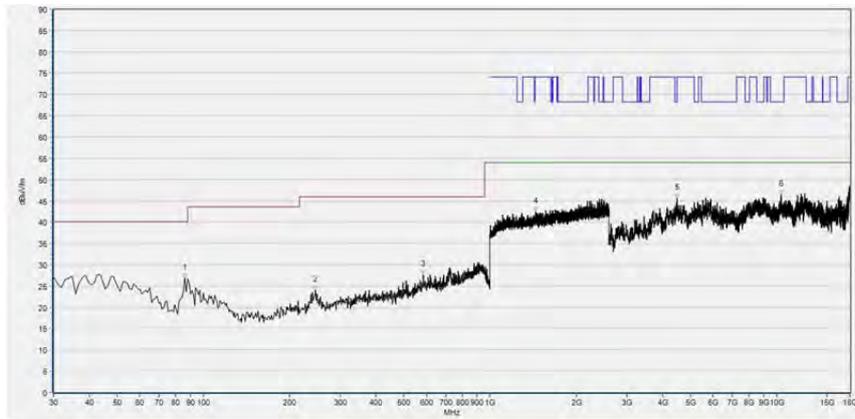

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
86.316	26.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
246.527	23.94	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
584.424	27.64	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1442.281	42.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4491.498	45.51	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
10335.427	46.46	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

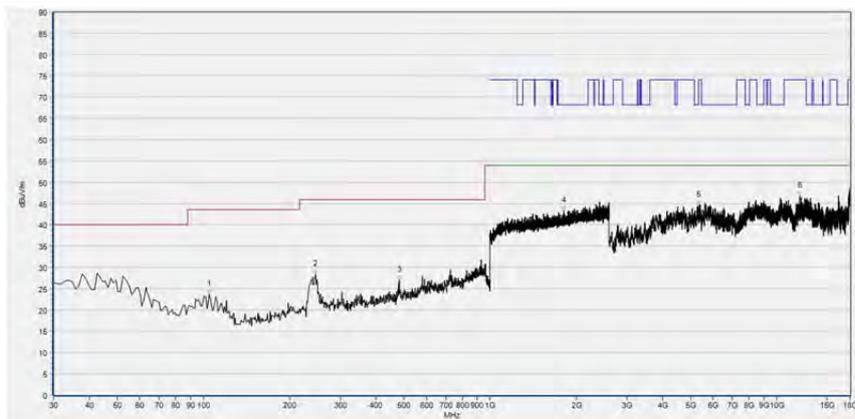

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
104.765	23.60	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
246.527	28.39	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
481.502	26.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1804.001	43.20	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
5320.184	44.55	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
12054.411	46.73	N/A	N/A	68.23	N/A	0.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 46

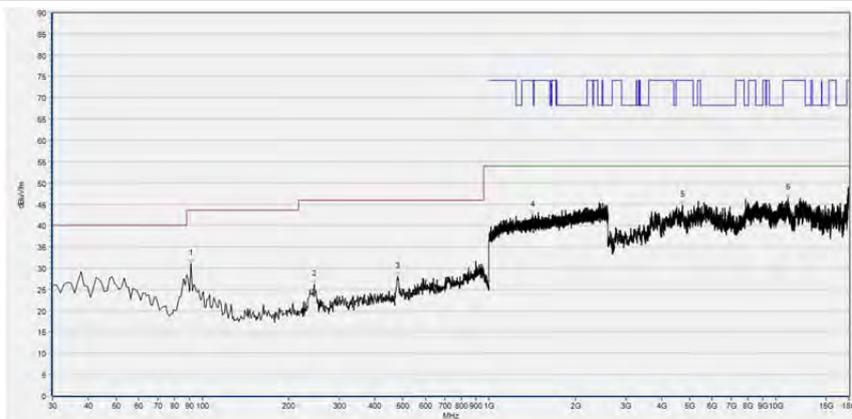

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
91.171	31.07	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
245.556	26.08	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
480.531	28.01	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1416.672	42.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4722.545	44.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11007.001	46.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

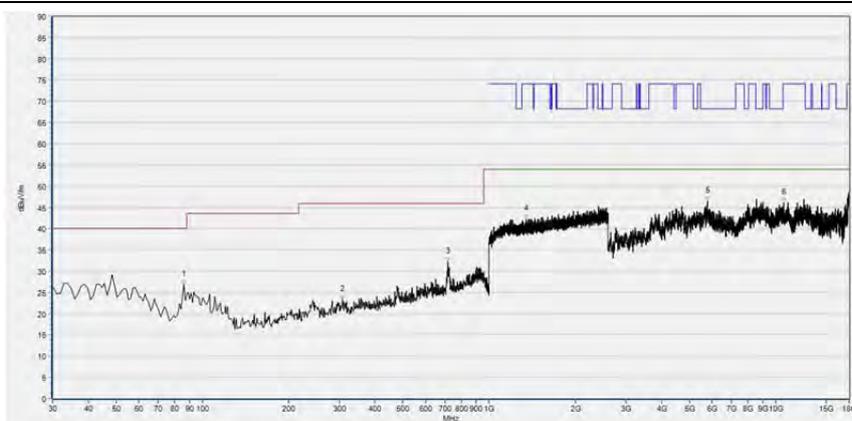

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
86.316	26.83	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
307.698	23.23	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
718.418	32.18	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1344.115	42.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5769.954	46.34	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
10649.650	46.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 151

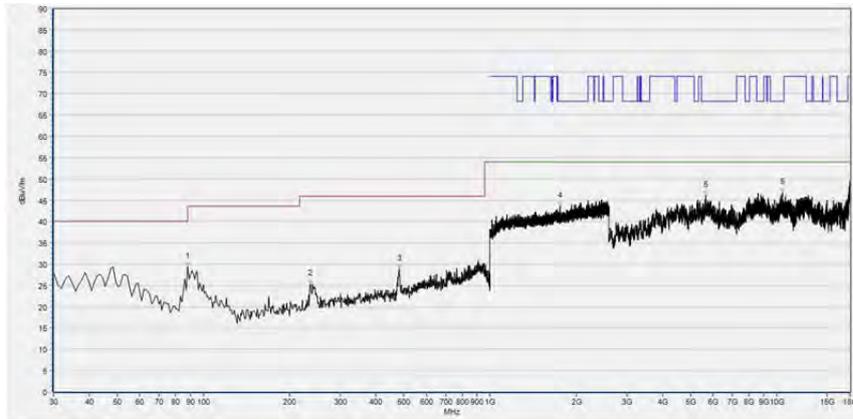

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
88.258	29.32	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
235.846	25.24	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
482.472	28.78	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1751.717	43.55	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
5652.891	46.14	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS
10443.249	46.76	N/A	N/A	68.23	N/A	0.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

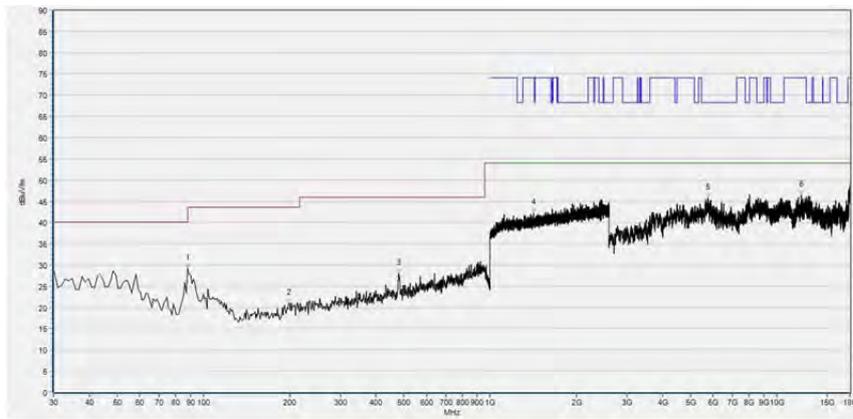


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
88.258	29.19	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
198.949	20.88	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
479.560	27.93	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1417.739	42.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5748.390	45.67	N/A	N/A	68.23	N/A	0.00	Vertical	PASS
12156.071	46.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 159

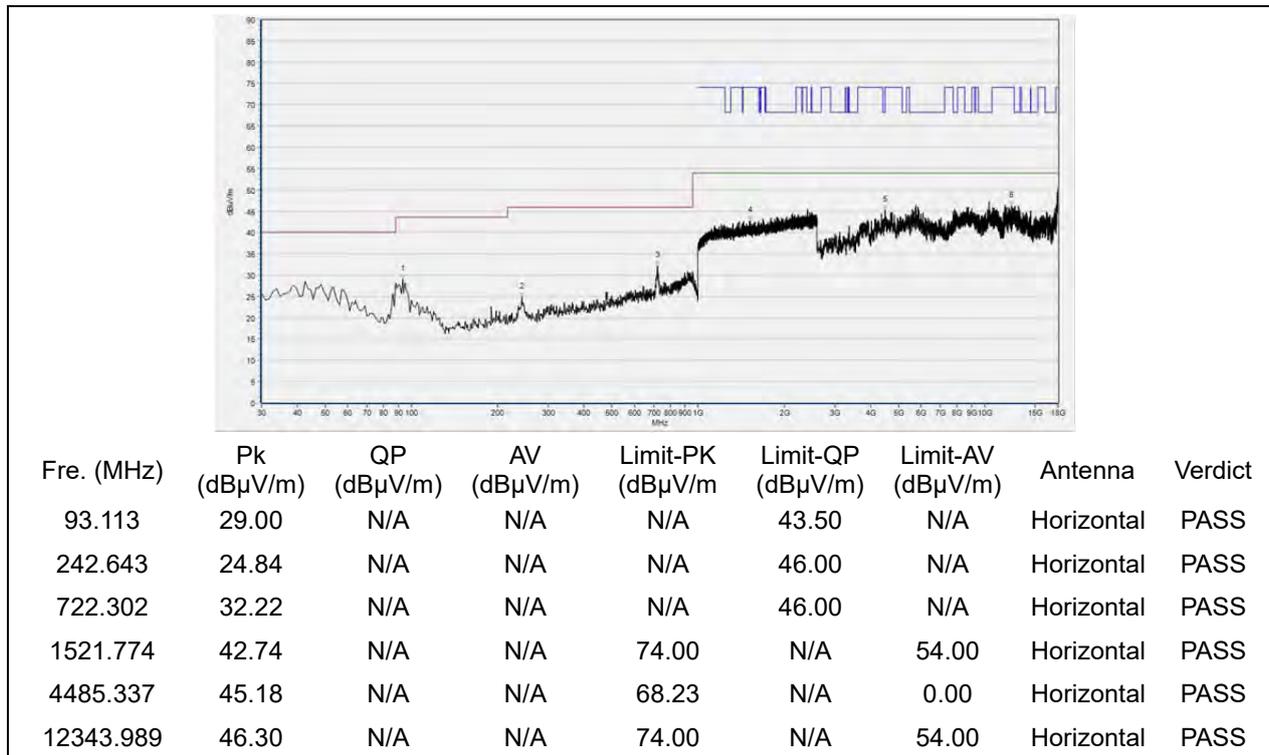

(Antenna Horizontal, 30MHz to 18GHz)

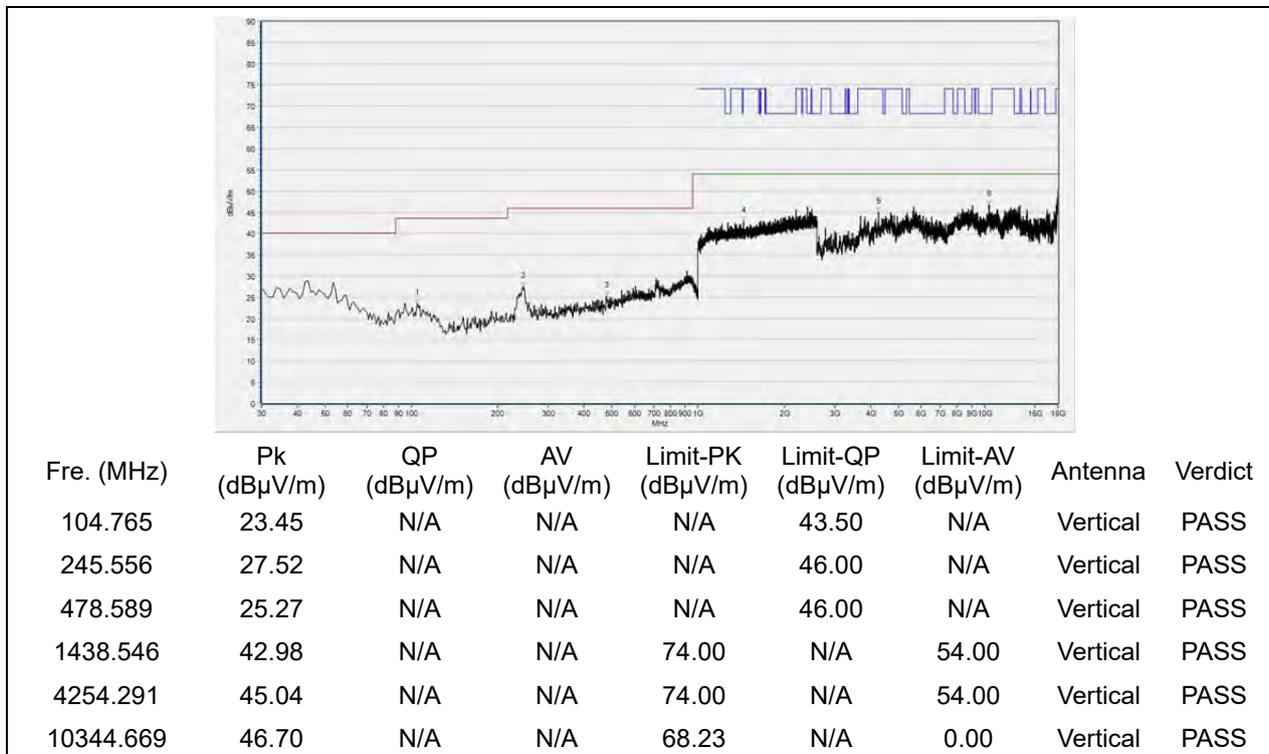

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Attenuator 1	(N/A)	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2019.04.09	2020.04.08
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2019.04.16	2020.04.15
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	YOMA	(N/A)	(N/A)	2019.01.22	2020.01.21
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09
LISN	812744	NSLK 8127	Schwarzbeck	2019.05.08	2020.05.09
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2019.05.08	2020.05.09
Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
Adaptor _{Note}	N/A	NBS65A12 0500M2	N/A	N/A	N/A

Note: The equipment is provided by applicant.

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2019.07.26	2020.07.25
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.08	2020.05.09
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2019.02.15	2020.02.14
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.07.26	2020.07.25
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2020.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
26GHz -40GHz pre-Amplifier	MA05	BBV9721	Rohde& Schwarz	2019.05.08	2020.05.09
Notch Filter	N/A	WRCG-5150-5350	Wainwright	2019.12.01	2020.11.30
Notch Filter	N/A	WRCG-5725-5850	Wainwright	2019.12.01	2020.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

END OF REPORT