



FCC ID: 2AOKB-T8220





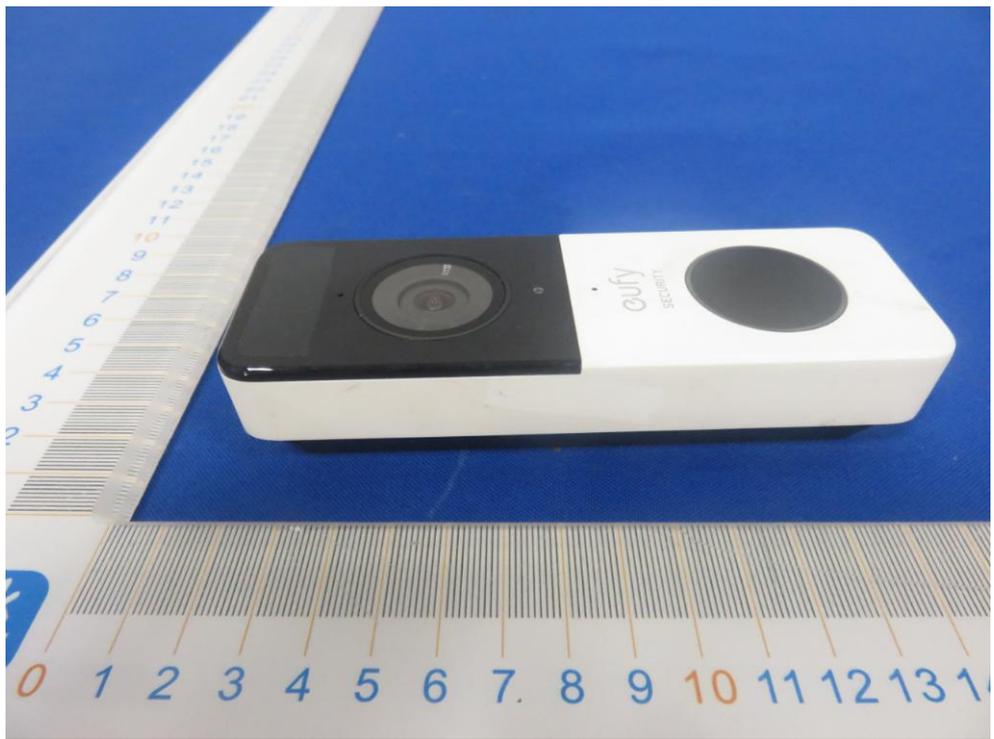

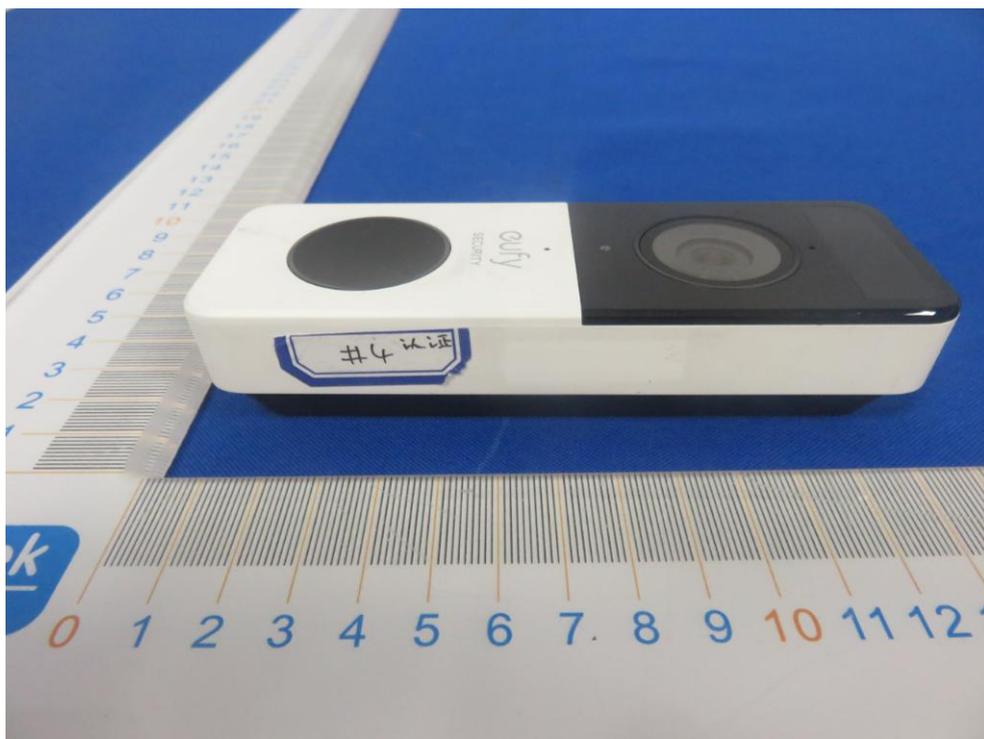



Anbotek
Product Safety
安博检测

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16



540 BoostCell (3.0) (Battery) Kit
Battery (3.0V)
Input: 5V 1A
Output: 3.0V 1A
Capacity: 1000mAh
Charging Time: 2-3 hours
Operating Temperature: 0°C to 40°C
Storage Temperature: -20°C to 60°C
Weight: 15g
Dimensions: 45mm x 25mm x 5mm
CE, RoHS, FCC, PSE, REACH, UN38.3, IEC 60086-0, IEC 60086-1, IEC 60086-2, IEC 60086-3, IEC 60086-4, IEC 60086-5, IEC 60086-6, IEC 60086-7, IEC 60086-8, IEC 60086-9, IEC 60086-10, IEC 60086-11, IEC 60086-12, IEC 60086-13, IEC 60086-14, IEC 60086-15, IEC 60086-16, IEC 60086-17, IEC 60086-18, IEC 60086-19, IEC 60086-20, IEC 60086-21, IEC 60086-22, IEC 60086-23, IEC 60086-24, IEC 60086-25, IEC 60086-26, IEC 60086-27, IEC 60086-28, IEC 60086-29, IEC 60086-30, IEC 60086-31, IEC 60086-32, IEC 60086-33, IEC 60086-34, IEC 60086-35, IEC 60086-36, IEC 60086-37, IEC 60086-38, IEC 60086-39, IEC 60086-40, IEC 60086-41, IEC 60086-42, IEC 60086-43, IEC 60086-44, IEC 60086-45, IEC 60086-46, IEC 60086-47, IEC 60086-48, IEC 60086-49, IEC 60086-50, IEC 60086-51, IEC 60086-52, IEC 60086-53, IEC 60086-54, IEC 60086-55, IEC 60086-56, IEC 60086-57, IEC 60086-58, IEC 60086-59, IEC 60086-60, IEC 60086-61, IEC 60086-62, IEC 60086-63, IEC 60086-64, IEC 60086-65, IEC 60086-66, IEC 60086-67, IEC 60086-68, IEC 60086-69, IEC 60086-70, IEC 60086-71, IEC 60086-72, IEC 60086-73, IEC 60086-74, IEC 60086-75, IEC 60086-76, IEC 60086-77, IEC 60086-78, IEC 60086-79, IEC 60086-80, IEC 60086-81, IEC 60086-82, IEC 60086-83, IEC 60086-84, IEC 60086-85, IEC 60086-86, IEC 60086-87, IEC 60086-88, IEC 60086-89, IEC 60086-90, IEC 60086-91, IEC 60086-92, IEC 60086-93, IEC 60086-94, IEC 60086-95, IEC 60086-96, IEC 60086-97, IEC 60086-98, IEC 60086-99, IEC 60086-100



Mirculisa