

5725-5850MHz:

10M_5755MHz_Chain 0



ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 19:12:57

10M_5795MHz_Chain 0



ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 19:14:20

10M_5815MHz_Chain 0




ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 19:15:39

10M_5755MHz_Chain 1



ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 20:16:49

10M_5795MHz_Chain 1

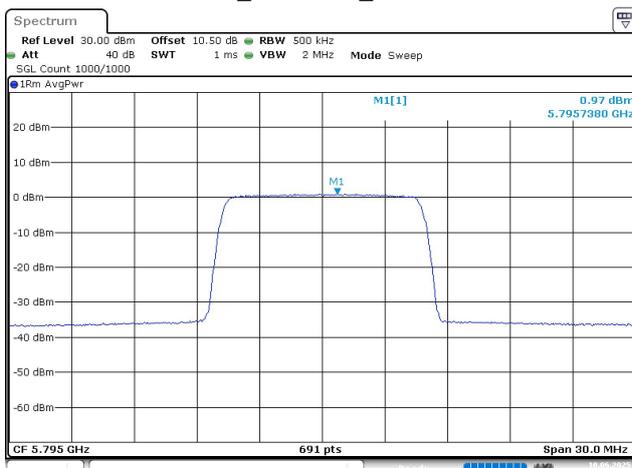


ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 20:17:40

10M_5815MHz_Chain 1




ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 20:18:21

20M_5755MHz_Chain 0

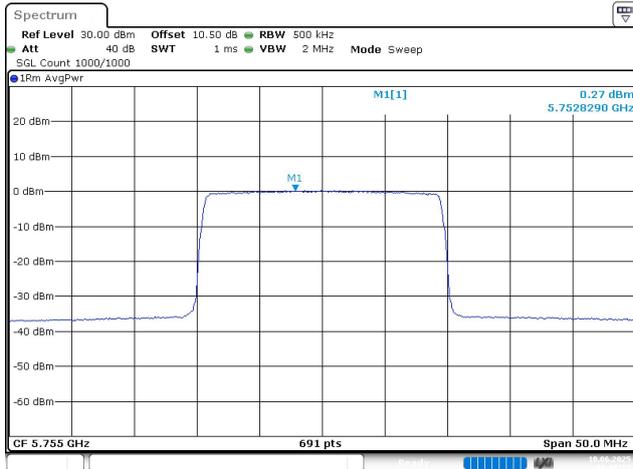

ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 19:47:22

20M_5795MHz_Chain 0

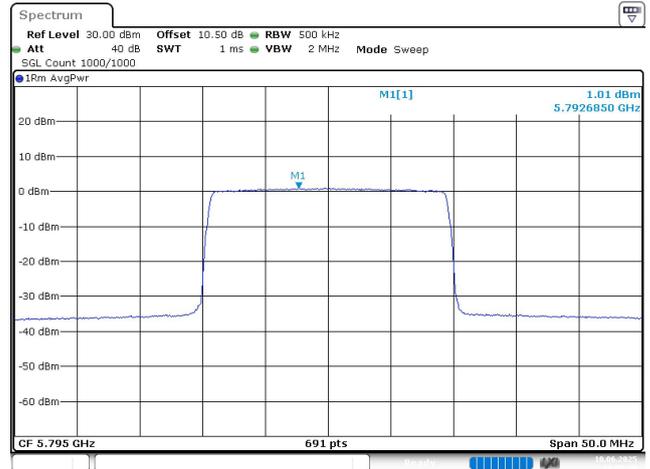


ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 19:48:20

20M_5815MHz_Chain 0



ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 19:49:24

20M_5755MHz_Chain 1

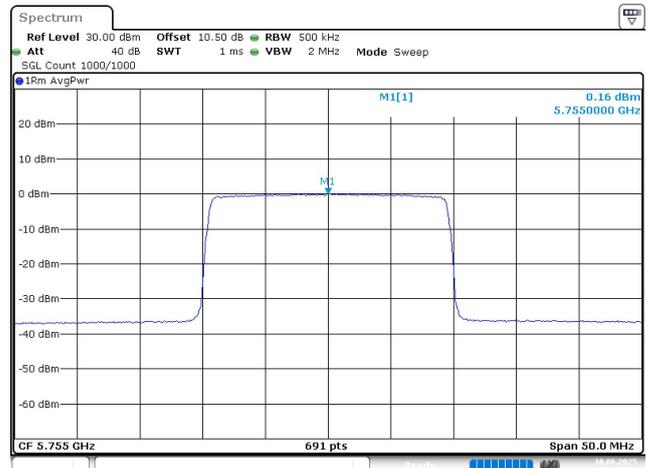

ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 20:11:40

20M_5795MHz_Chain 1



ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 20:13:11

20M_5815MHz_Chain 1



ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 10.JUN.2025 20:13:55

5.8 Duty Cycle

Test Information:

Serial No.:	32DK-1	Test Date:	2025/6/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26	Relative Humidity: (%)	51	ATM Pressure: (kPa)	100.5
-----------------------------	----	----------------------------------	----	-------------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101461	2024/09/05	2025/09/04
Narda	Coaxial Attenuator	773-10	F-08-EM511	2025/06/06	2026/06/05


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	Duty cycle Factor (dB)	1/T (Hz)	VBW Setting (kHz)
10M	5.13	5.43	94.48	0.25	195	0.2
20M	5.13	5.43	94.48	0.25	195	0.2


Test only was performed at Chain 0.

10M_5200MHz_Chain 0

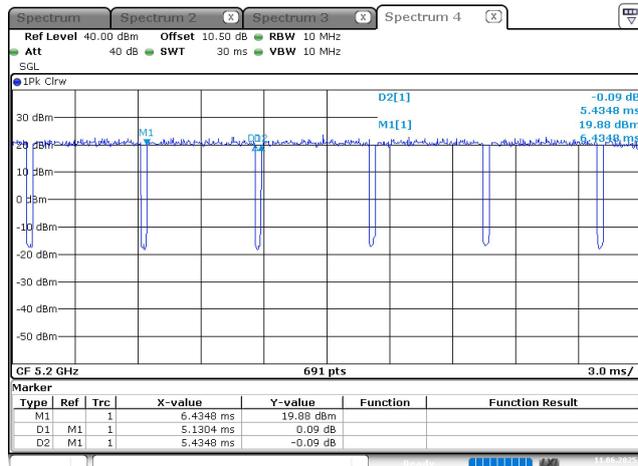

ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 11.JUN.2025 17:34:45

20M_5200MHz_Chain 0

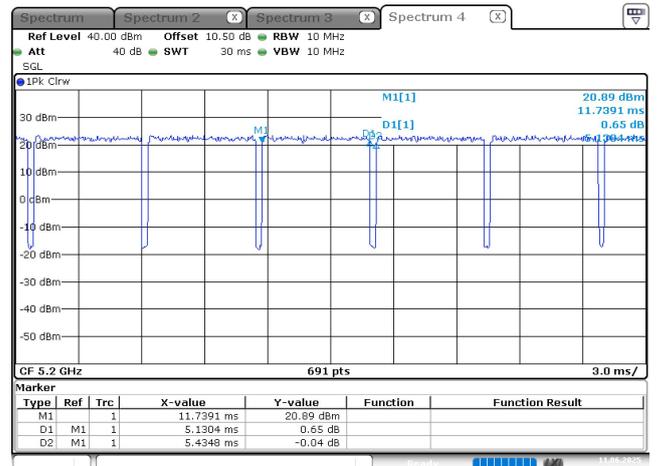

ProjectNo.:2502S56830E-RF Tester:Conor Fu
Date: 11.JUN.2025 17:56:12

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502S56830E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2502S56830E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502S56830E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******