



TEST REPORT

FCC ID: 2AOKDSU0070

Product: SDU-0070

Model No.: SDU-0070-001

Additional Model No.: SDU-0070-002(XXX=002-999)

Trade Mark: ad notam ®

Report No.: FCC18010018A-LE

Issued Date: February 26, 2018

Issued for:

ad notam AG

Obere Giesswiesen 11-13, 78247 Hilzingen, Germany

Issued By:

World Standardization Certification & Testing Group Co.,Ltd.
Building A-B, Baoshi Science & Technology Park, Baoshi Road,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group Co.,Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government..





TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information	6
4.1. TEST ENVIRONMENT AND MODE	6
4.2. DESCRIPTION OF SUPPORT UNITS	6
5. Facilities and Accreditations	7
5.1. FACILITIES	7
5.2. ACCREDITATIONS	7
5.3. MEASUREMENT UNCERTAINTY	8
5.4. MEASUREMENT INSTRUMENTS	9
6. Test Results and Measurement Data	10
6.1. ANTENNA REQUIREMENT	10
6.2. CONDUCTED EMISSION	11
6.3. CONDUCTED OUTPUT POWER	14
6.4. EMISSION BANDWIDTH	18
6.5. POWER SPECTRAL DENSITY	22
6.6. TEST SPECIFICATION	22
6.7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	26
6.8. RADIATED SPURIOUS EMISSION MEASUREMENT	30
7. Appendix A: Photographs of Test Setup	37
8. Appendix B: Photographs of EUT	39



Report No.: FCC18010018A-LE

For Question,
Please Contact with WSCT
www.wsct-cert.com

1. Test Certification

Product:	SDU-0070
Model No.:	SDU-0070-001
Additional Model No.:	SDU-0070-002(XXX=002-999)
Trade Mark:	ad notam®
Applicant:	ad notam AG
Address:	Obere Giesswiesen 11-13, 78247 Hilzingen, Germany
Manufacturer:	Shenzhen KOHO Technology Co., Ltd
Address:	F4, Building 3, Fubilun Dingfeng Hi-Tech Industrial Park, Songgang Blvd, Bao'an District, Shenzhen, China 518105
Date of Test:	February 10, 2018 to February 25, 2018
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 KDB 558074 D01 DTS Meas Guidance v04

The above equipment has been tested by World Standardization Certification & Testing Group Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Wen Quan
(Wen Quan)Date: 2018.02.26Check By: Li Huaibi
(Li Huaibi)Date: 2018.02.26Approved By: Wang Fengbing
(Wang Fengbing)Date: 2018.02.26世标检测认证股份
World Standardization Certification & Testing Group Co., Ltd.ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



Report No.: FCC18010018A-LE

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.





3. EUT Description

Product:	SDU-0070
Model No.:	SDU-0070-001
Additional Model No.:	SDU-0070-xxx(xxx=002-999)
Trade Mark:	ad notam ®
BT Version:	4.0
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	2MHz
Number of Channel:	40
Modulation Technology:	GFSK
Antenna Type:	External antenna
Antenna Gain:	3dBi
Power Supply:	Rechargeable Li-ion Battery DC3.7V
Adapter:	Adapter: LS-PAB90AL-E Input: 100-240V 50/60Hz 1.5A Output: 12V-7A
Remark:	Only the model name, the others are the same, so the test data is executed at SDU-0070-001.

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: Channel 0, 19 & 39 have been tested.



4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) with Fully-charged battery.
The sample was placed (0.1m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	LS-PAB90AL-E	/	/	ADAPTER

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.





5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group Co., Ltd**

Registration Number: 366353

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA

NVLAP (The certificate registration number is NVLAP LAB CODE:600142-0)

Japan

VCCI (The certificate registration number is C-4790, R-3684, G-837)

Canada

INDUSTRY CANADA

(The certificated registration number is 7700A-1)

China

CNAS (The certificated registration number is L3732)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>





5.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$





Report No.: FCC18010018A-LE

5.4 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
EMI Test Receiver	R&S	ESCI	100005	08/19/2017	08/18/2018
LISN	AFJ	LS16	16010222119	08/19/2017	08/18/2018
LISN(EUT)	Mestec	AN3016	04/10040	08/19/2017	08/18/2018
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	08/19/2017	08/18/2018
Coaxial cable	Megalon	LMR400	N/A	08/12/2017	08/11/2018
GPIO cable	Megalon	GPIO	N/A	08/12/2017	08/11/2018
Spectrum Analyzer	R&S	FSU	100114	08/19/2017	08/18/2018
Pre Amplifier	H.P.	HP8447E	2945A02715	10/13/2017	10/12/2018
Pre-Amplifier	CDSI	PAP-1G18-38	--	10/13/2017	10/12/2018
Bi-log Antenna	SUNOL Sciences	JB3	A021907	09/13/2017	09/12/2018
9*6*6 Anechoic	--	--	--	08/21/2017	08/20/2018
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	09/13/2017	09/12/2018
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	08/23/2017	08/22/2018
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	04/25/2017	04/24/2018
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	08/21/2017	08/20/2018
Loop Antenna	EMCO	6502	00042960	08/22/2017	08/21/2018
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	08/19/2017	08/18/2018
Power meter	Anritsu	ML2487A	6K00003613	08/23/2017	08/22/2018
Power sensor	Anritsu	MX248XD	--	08/19/2017	08/18/2018





6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is a External antenna with the RP SMA Connector. it meets the standards, and the best case gain of the antenna is 3dBi.





6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 10cm E.U.T. Adapter Test table/Insulation plane LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														



Report No.: FCC18010018A-LE

6.2.2. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	19.97	10.44	30.41	55.99	-25.58	AVG
2		0.1580	38.53	10.44	48.97	65.56	-16.59	QP
3		0.2140	14.67	10.43	25.10	53.04	-27.94	AVG
4		0.2460	26.34	10.43	36.77	61.89	-25.12	QP
5		0.5299	32.48	10.40	42.88	56.00	-13.12	QP
6	*	0.5299	24.09	10.40	34.49	46.00	-11.51	AVG
7		2.2220	20.65	10.29	30.94	56.00	-25.06	QP
8		2.2420	13.25	10.29	23.54	46.00	-22.46	AVG
9		5.0420	8.88	10.23	19.11	50.00	-30.89	AVG
10		8.1420	17.53	10.20	27.73	60.00	-32.27	QP
11		13.5020	21.77	10.16	31.93	60.00	-28.07	QP
12		13.5020	7.48	10.16	17.64	50.00	-32.36	AVG

Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. = Quasi-Peak


AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz





Report No.: FCC18010018A-LE

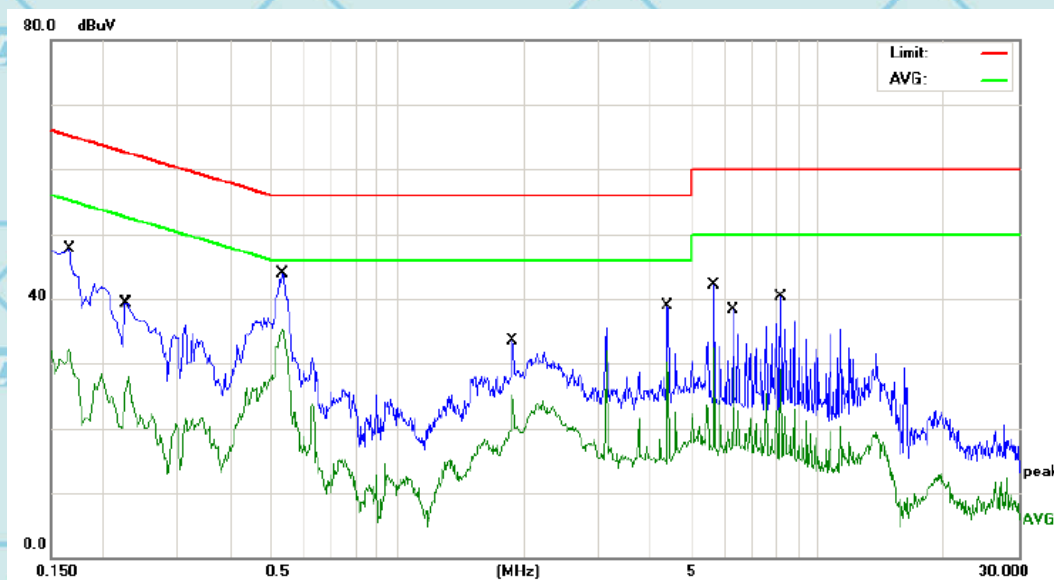Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	37.33	10.44	47.77	65.15	-17.38	QP
2		0.1660	21.73	10.44	32.17	55.15	-22.98	AVG
3		0.2280	28.84	10.43	39.27	62.52	-23.25	QP
4		0.2300	17.63	10.43	28.06	52.45	-24.39	AVG
5		0.5340	33.48	10.40	43.88	56.00	-12.12	QP
6	*	0.5340	24.95	10.40	35.35	46.00	-10.65	AVG
7		1.8820	14.89	10.30	25.19	46.00	-20.81	AVG
8		4.4020	28.60	10.24	38.84	56.00	-17.16	QP
9		4.4020	20.05	10.24	30.29	46.00	-15.71	AVG
10		5.6620	31.78	10.22	42.00	60.00	-18.00	QP
11		6.2900	19.08	10.22	29.30	50.00	-20.70	AVG
12		8.1660	30.02	10.20	40.22	60.00	-19.78	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Q.P. = Quasi-Peak AVG = average


* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.





6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074
Limit:	30dBm
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04. 2. Set spectrum analyzer as following: a) Set the RBW $\geq$ DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.
Test Result:	PASS



6.3.2. Test Data

BT LE mode			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.30	30.00	PASS
Middle	-2.32	30.00	PASS
Highest	-2.70	30.00	PASS


Test plots as follows:




Report No.: FCC18010018A-LE

BT LE mode

Lowest channel

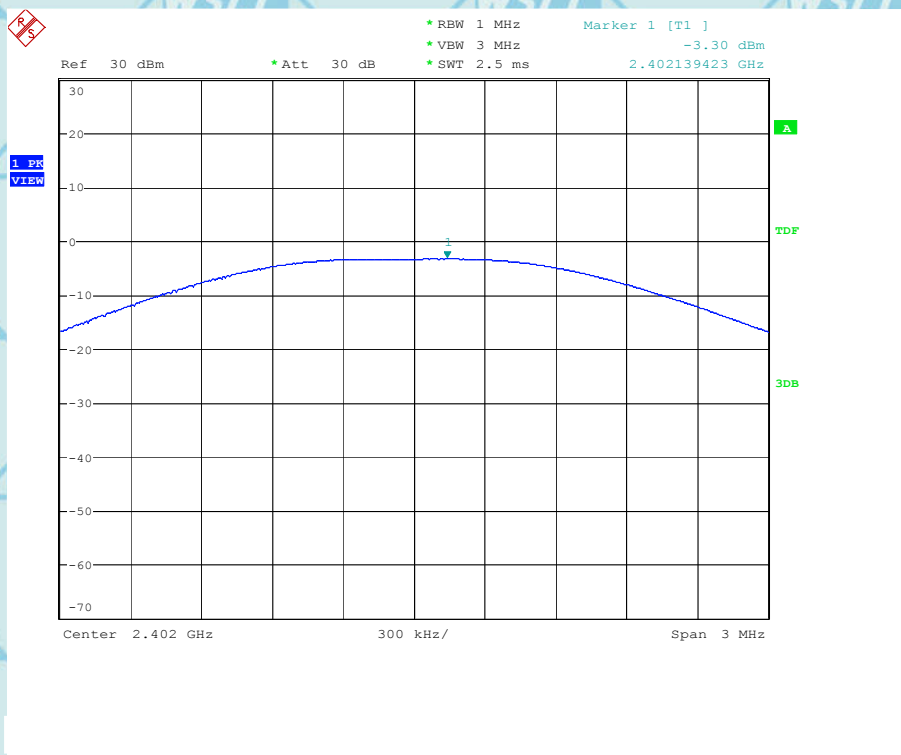

Middle channel

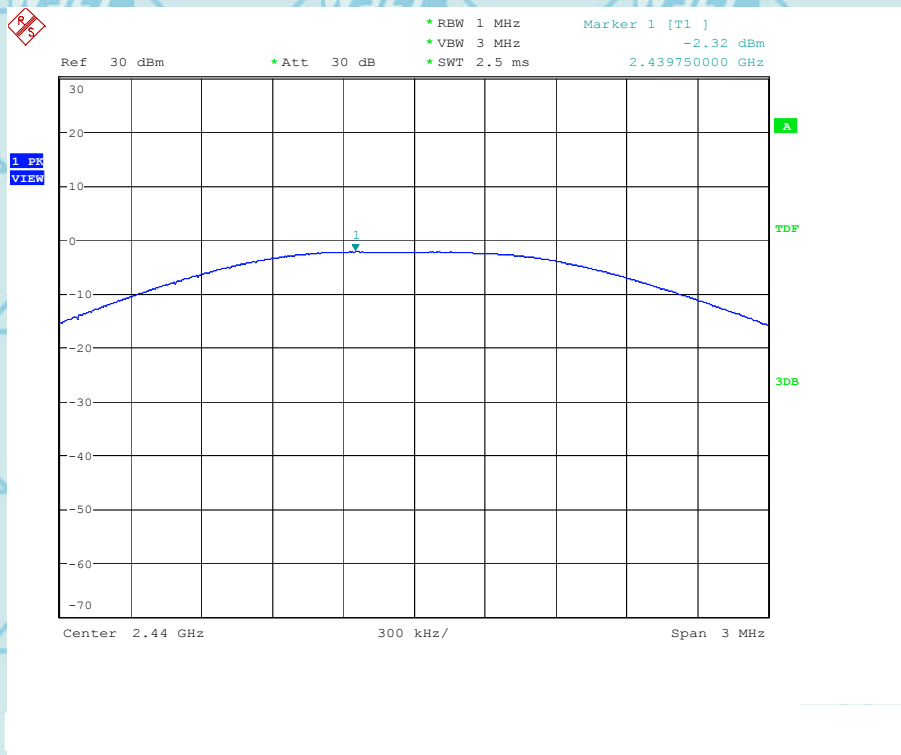




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Highest channel

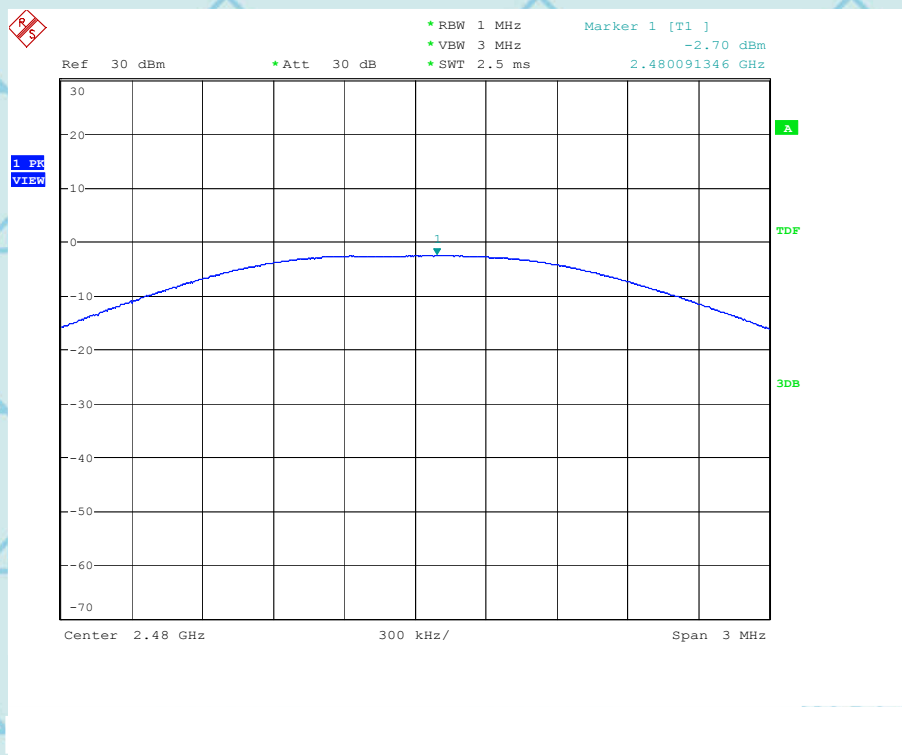


世标检测认证股份
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



6.4. Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS



6.4.2. Test data

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	721.15	>500k	PASS
Middle	721.15	>500k	
Highest	706.73	>500k	


Test plots as follows:




Report No.: FCC18010018A-LE

BT LE mode

Lowest channel

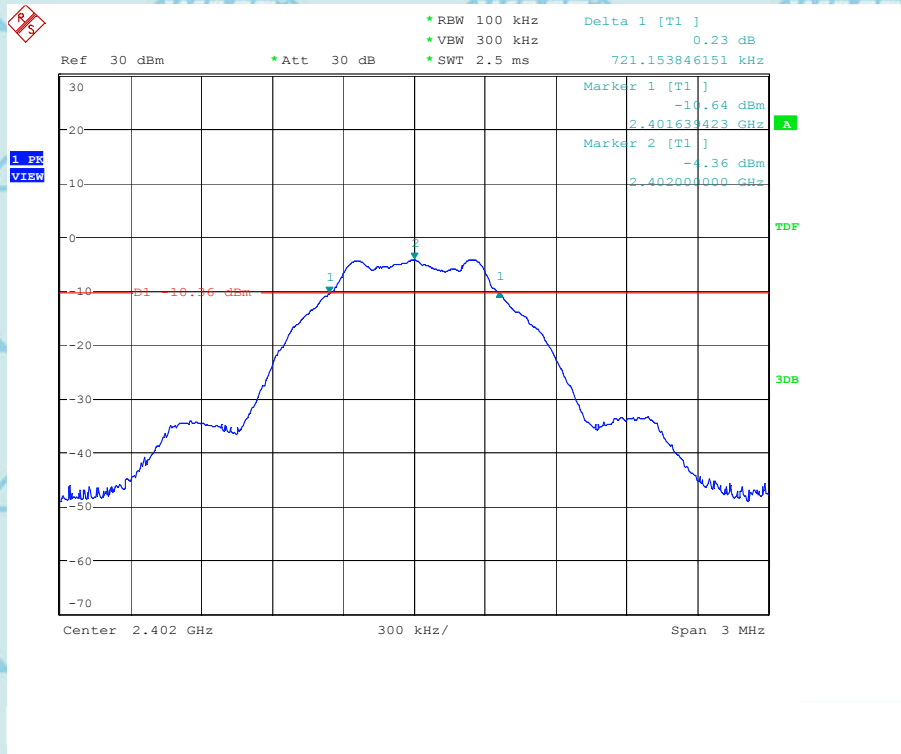

Middle channel

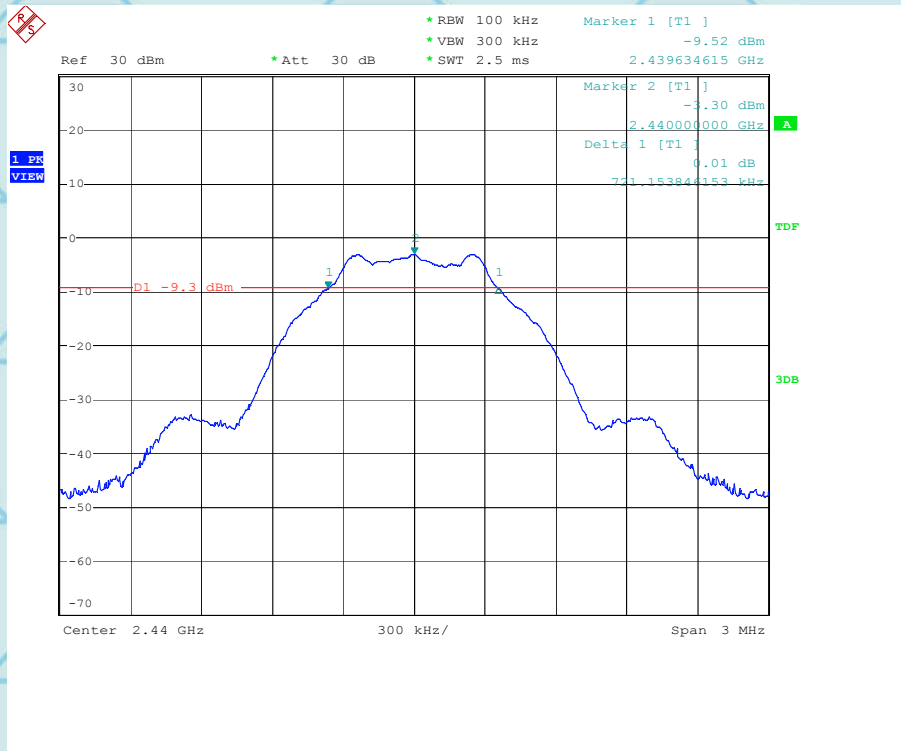




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Highest channel

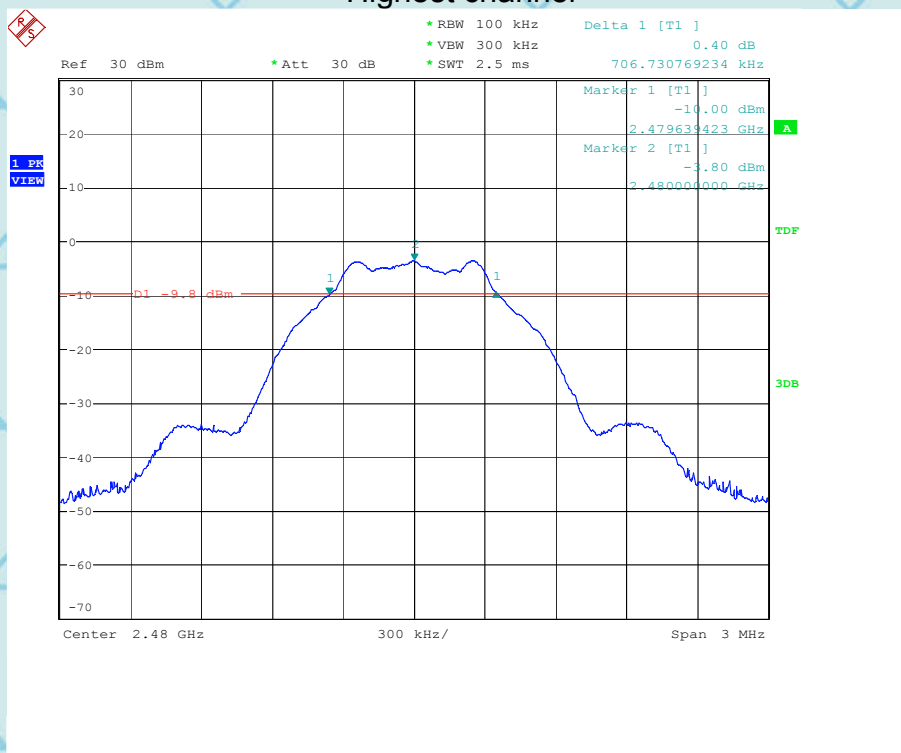


世标检测认证股份
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com [Http://www.wsct-cert.com](http://www.wsct-cert.com)



6.5. Power Spectral Density

6.6. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074
Limit:	The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW) 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

6.6.1. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 27, 2018
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-01	N/A	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



6.6.2. Test data

Test channel	Power Spectral Density (dBm/3kHz)		
	BT LE mode	Limit	Result
Lowest	-19.21	8 dBm/3kHz	PASS
Middle	-18.05	8 dBm/3kHz	
Highest	-18.57	8 dBm/3kHz	

Test plots as follows:







For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE
BT LE mode

Lowest channel

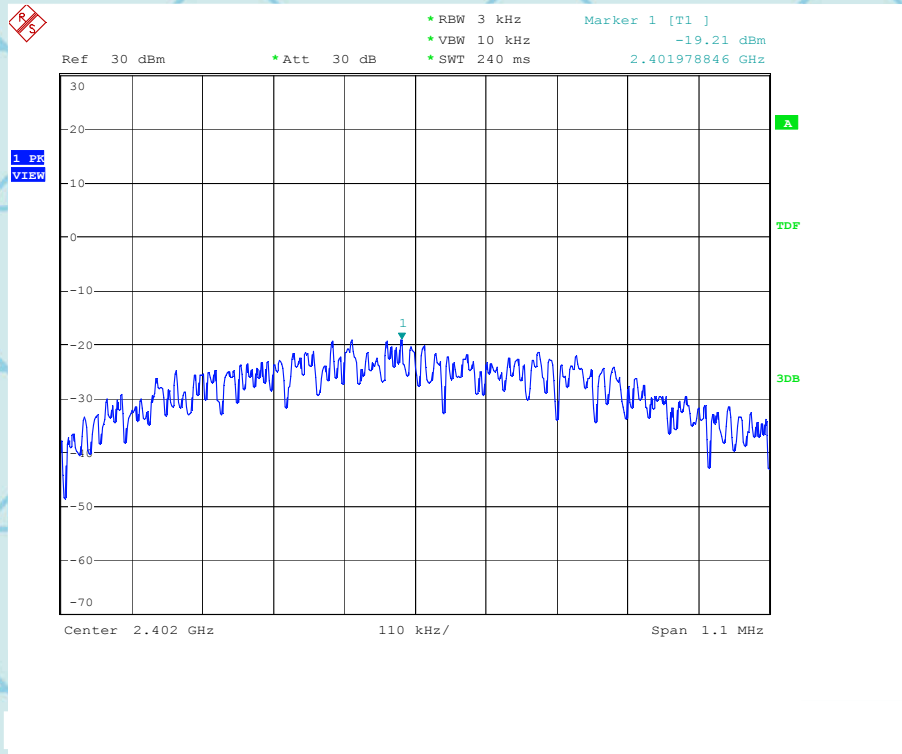

Middle channel

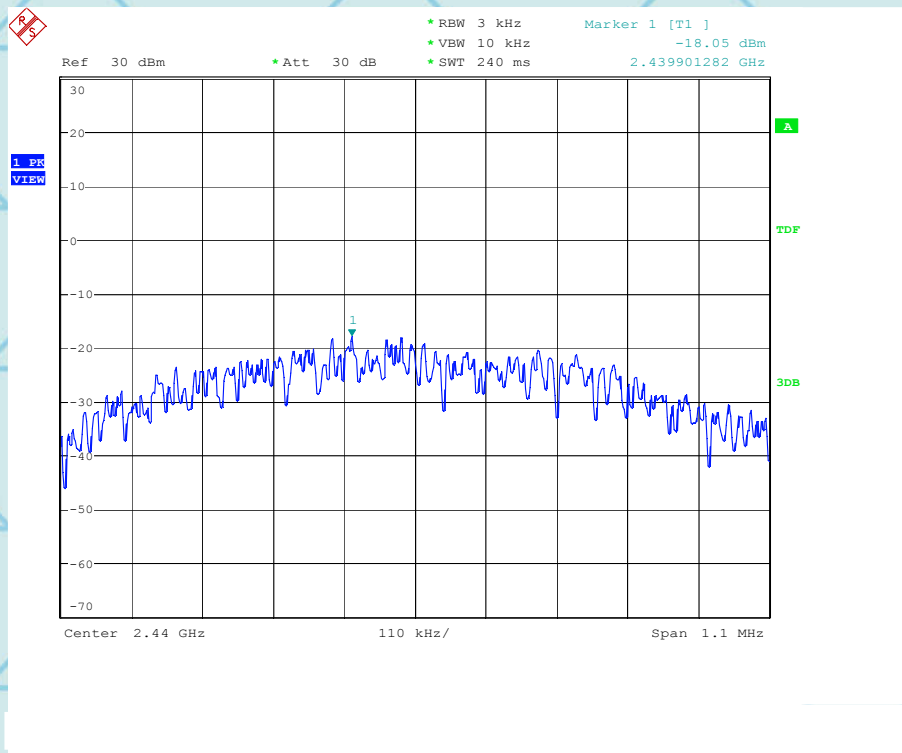




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Highest channel

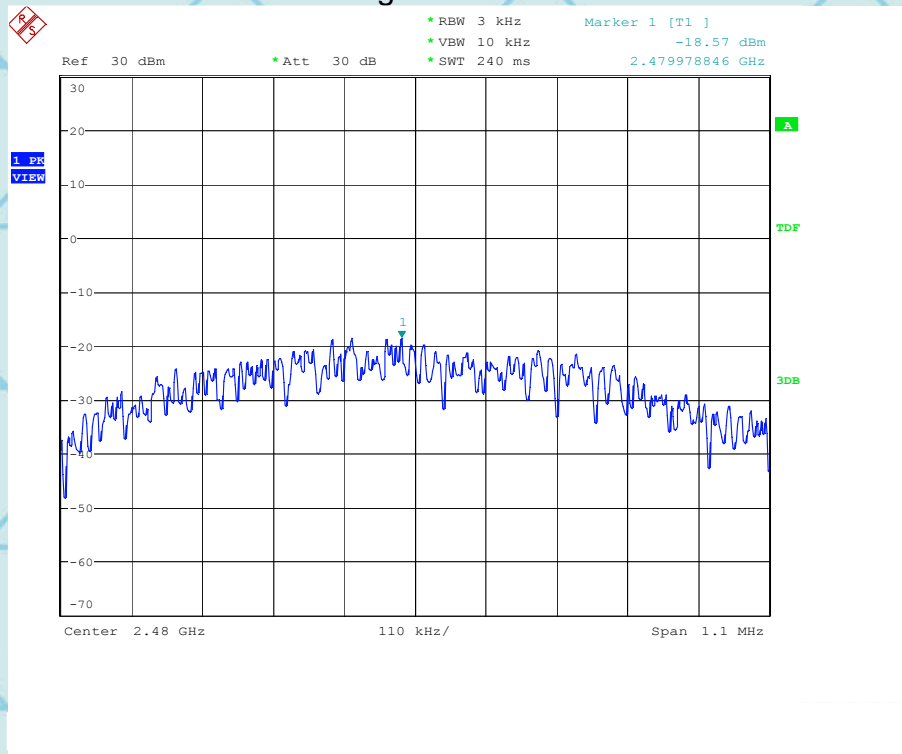


世标检测认证股份
World Standardization Certification & Testing Group Co.,Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



6.7. Conducted Band Edge and Spurious Emission Measurement

6.7.1. Test Specification



Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

6.7.2. Test Data

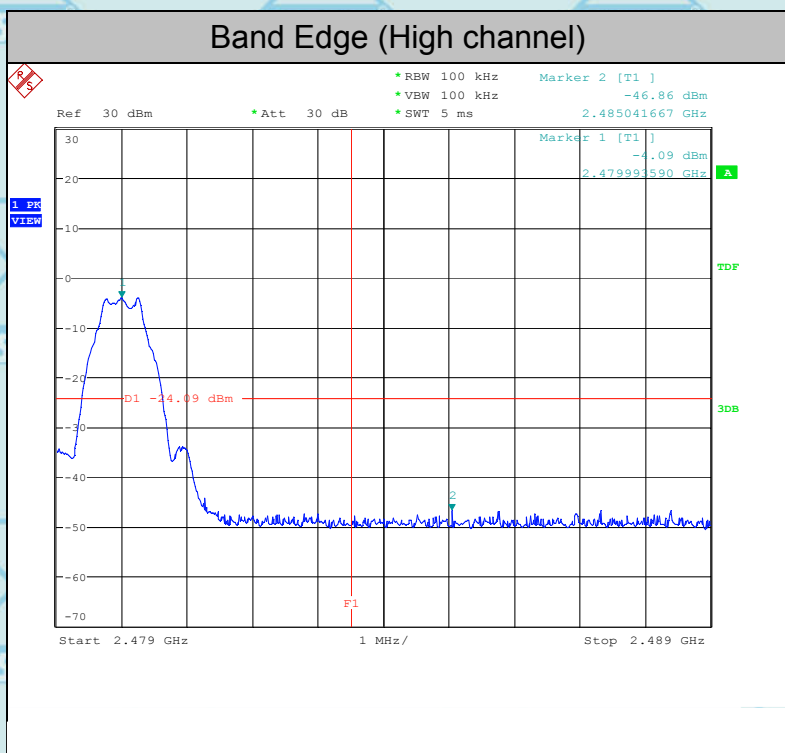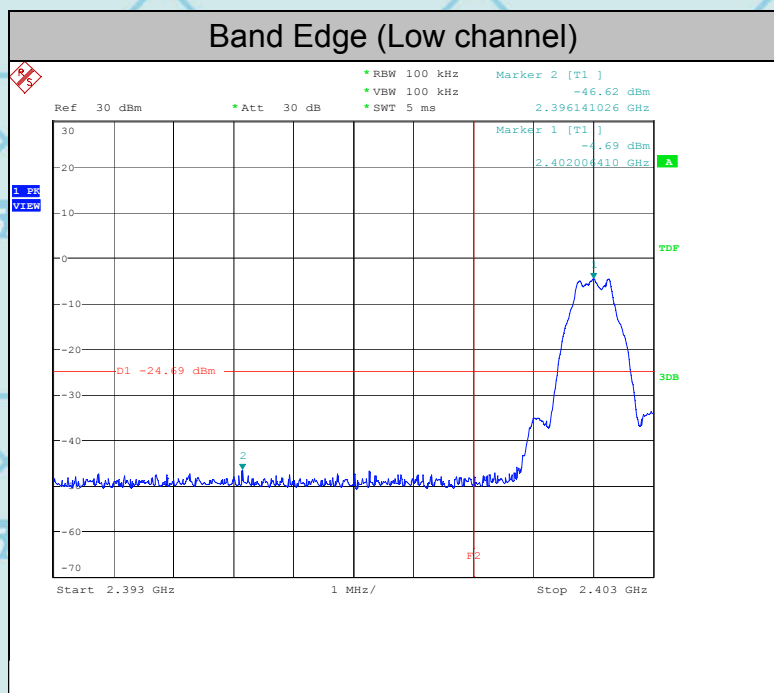

世标检测认证股份
World Standardization Certification & Testing Group Co., Ltd.


ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Spurious Emission (High channel)

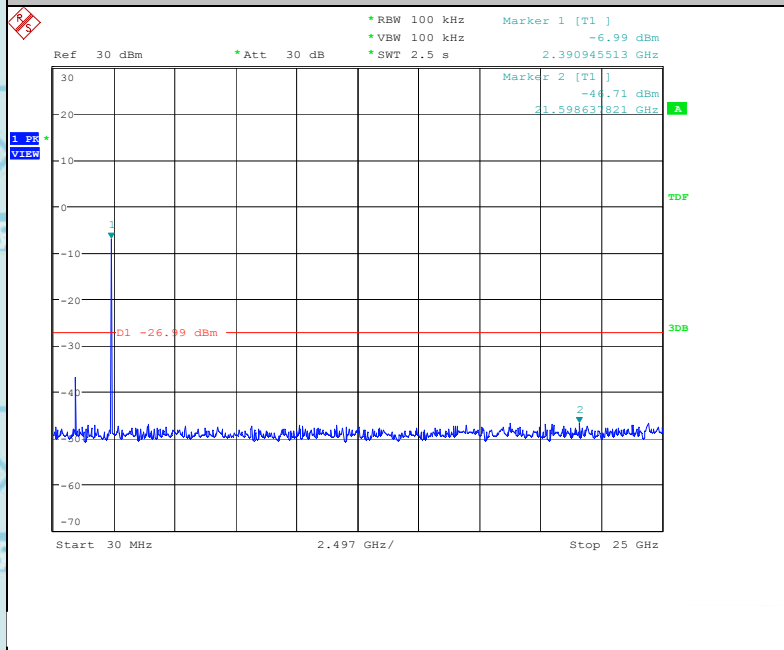

Spurious Emission (Mid channel)

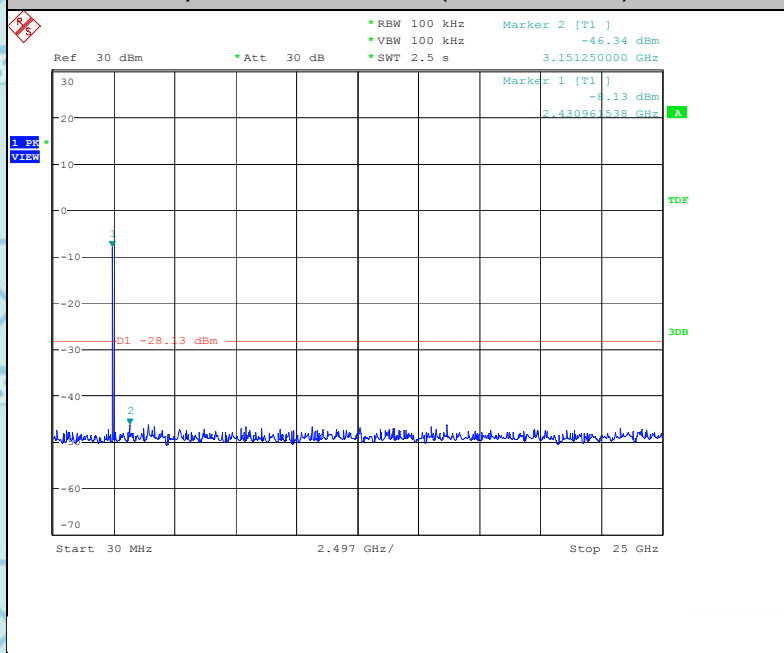




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE


Spurious Emission (High channel)

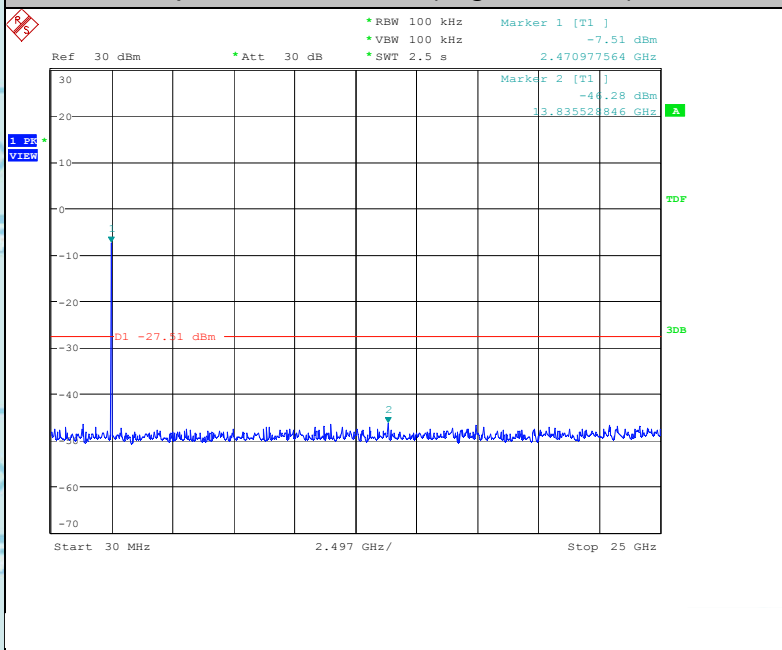



6.8. Radiated Spurious Emission Measurement


6.8.1. Test Specification

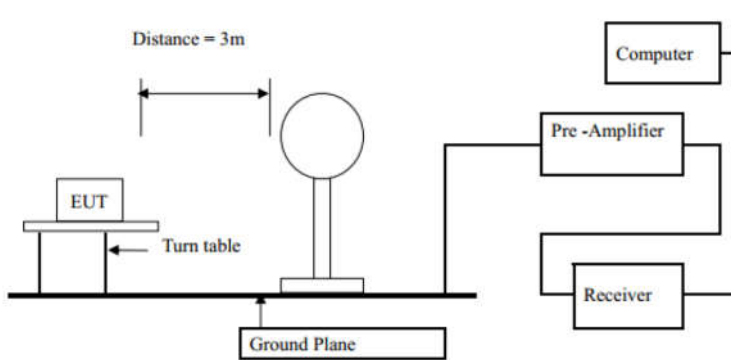Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10: 2013			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Operation mode:	Refer to item 4.1			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:				Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	0.009-0.490	2400/F(KHz)	300	Average
	0.490-1.705	24000/F(KHz)	30	Peak
	1.705-30	30	30	
	30-88	100	3	
Test setup:	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
Test setup:	For radiated emissions below 30MHz			
				
	30MHz to 1GHz			




Report No.: FCC18010018A-LE

For Question,
Contact with WSCT
www.wsct-cert.com

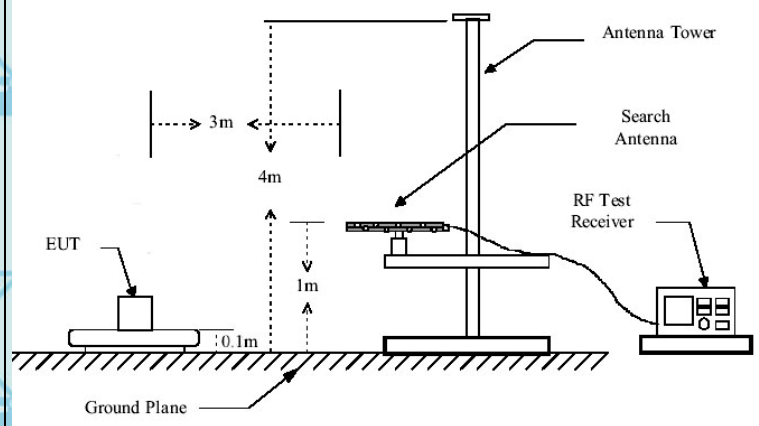

Above 1GHz

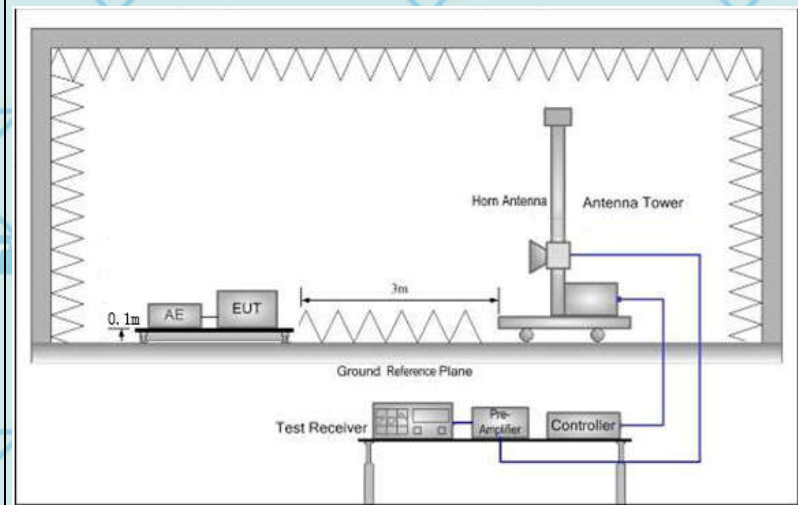

Test Procedure:

- For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final





Report No.: FCC18010018A-LE

 For Question,
 Please Contact with WSCT
www.wsct-cert.com

	measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS






For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

6.8.2. Test Data

Please refer to following diagram for individual
Below 1GHz

Horizontal:

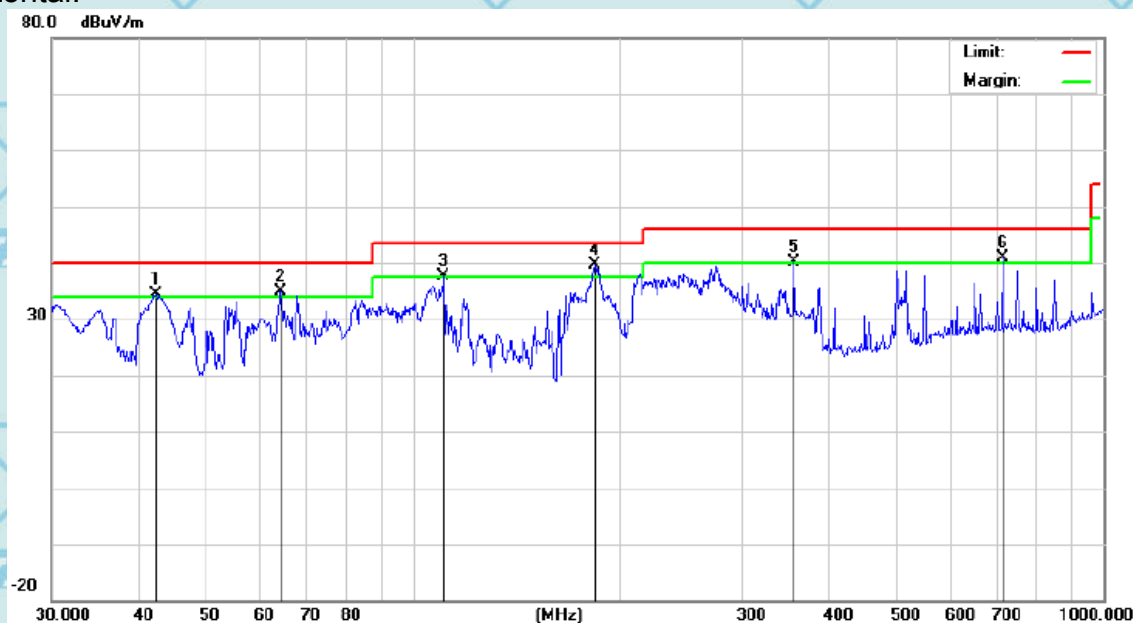


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	42.4508	35.44	-1.04	34.40	40.00	-5.60	QP
2	!	64.4330	41.44	-6.56	34.88	40.00	-5.12	QP
3	!	110.9570	39.58	-1.96	37.62	43.50	-5.88	QP
4	*	183.2005	46.60	-7.08	39.52	43.50	-3.98	QP
5	!	356.6757	41.73	-1.50	40.23	46.00	-5.77	QP
6	!	714.1734	38.46	2.48	40.94	46.00	-5.06	QP





Report No.: FCC18010018A-LE

Vertical:

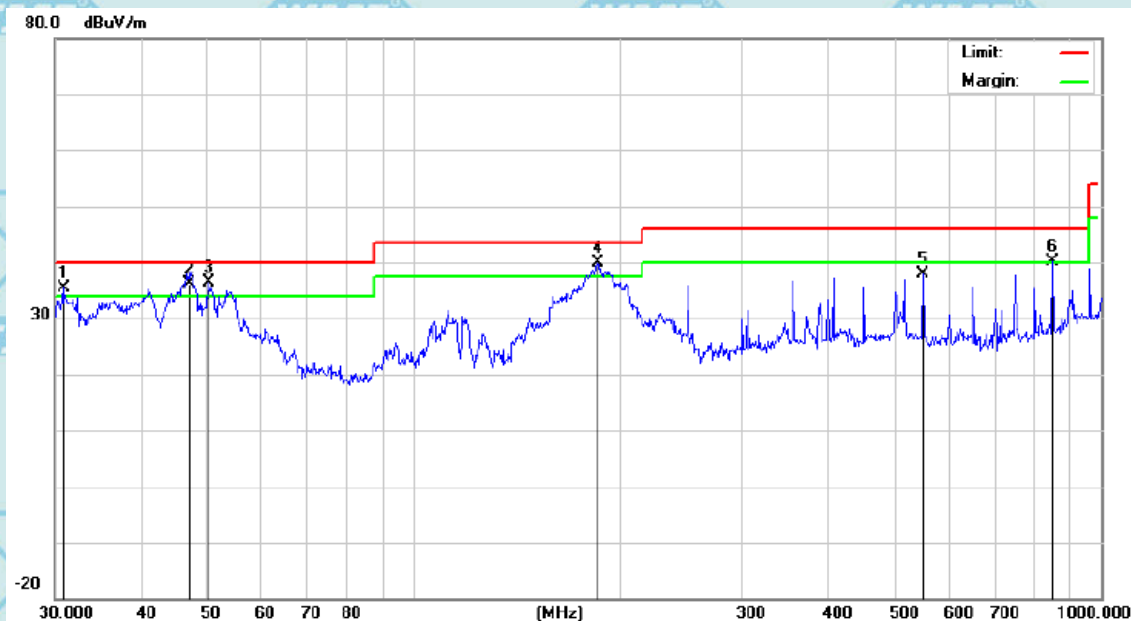

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	30.8535	31.03	4.47	35.50	40.00	-4.50	QP
2	!	47.1599	39.56	-3.33	36.23	40.00	-3.77	QP
3	*	50.2324	41.53	-5.04	36.49	40.00	-3.51	QP
4	!	185.1379	47.03	-7.11	39.92	43.50	-3.58	QP
5		550.9479	37.66	0.22	37.88	46.00	-8.12	QP
6	!	851.0353	35.26	4.75	40.01	46.00	-5.99	QP

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low), and the worst case Mode (Middle channel) was submitted only.





For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Above 1GHz

Freq. (MHz)	Low channel: 2402MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4804	V	60.45	39.56	74	54	-13.55	-14.44
7206	V	58.22	39.49	74	54	-15.78	-14.51
4804	H	59.27	39.48	74	54	-14.73	-14.52
7206	H	58.30	39.30	74	54	-15.70	-14.70

Freq. (MHz)	Middle channel: 2440MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4880	V	58.15	40.94	74	54	-15.85	-13.06
7320	V	59.19	40.70	74	54	-14.81	-13.30
4880	H	58.84	39.76	74	54	-15.16	-14.24
7320	H	59.66	40.66	74	54	-14.34	-13.34

Freq. (MHz)	High channel: 2480 MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4960	V	58.27	39.03	74	54	-15.73	-14.97
7440	V	59.06	40.47	74	54	-14.94	-13.53
4960	H	59.87	40.80	74	54	-14.13	-13.20
7440	H	59.71	40.71	74	54	-14.29	-13.29

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.





Report No.: FCC18010018A-LE

Restricted Bands Requirements


Test result for GFSK Mode (the worst case)

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2390	67.30	-8.73	58.57	74	-15.43	H	PK
2390	48.11	-8.73	39.38	54	-14.62	H	AV
2390	68.27	-8.73	59.54	74	-14.46	V	PK
2390	49.64	-8.73	40.91	54	-13.09	V	AV
High Channel							
2483.5	69.29	-8.17	61.12	74	-12.88	H	PK
2483.5	48.22	-8.17	40.05	54	-13.95	H	AV
2483.5	68.73	-8.17	60.56	74	-13.44	V	PK
2483.5	46.70	-8.17	38.53	54	-15.47	V	AV



Report No.: FCC18010018A-LE


7. Appendix A: Photographs of Test Setup

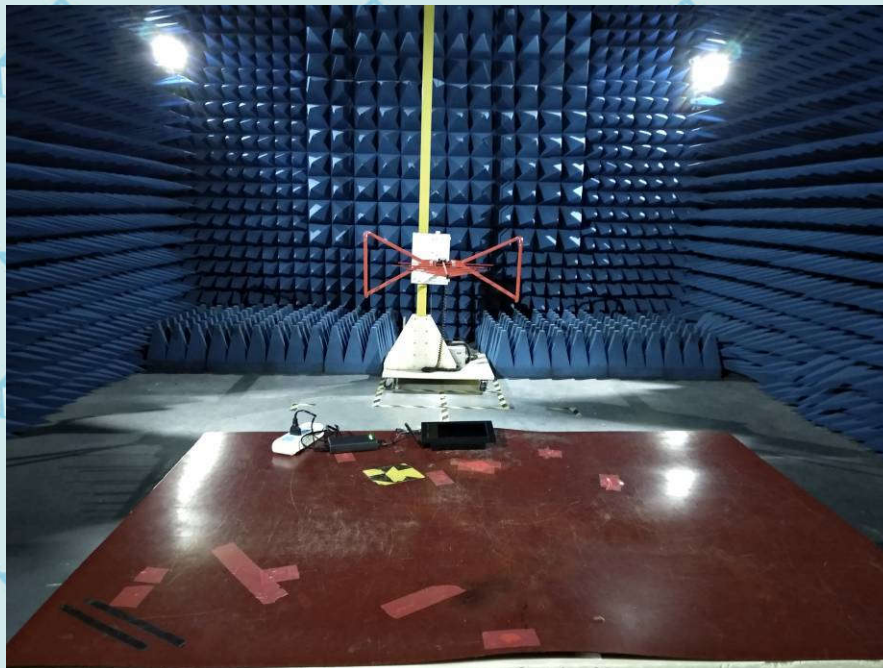



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

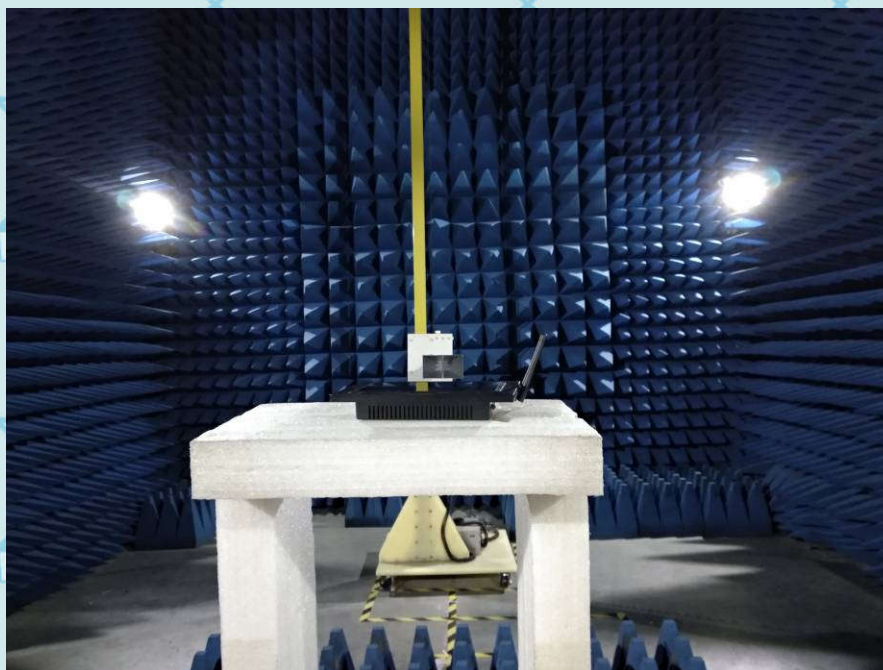

世标检测认证股份
World Standardization Certification & Testing Group Co.,Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



8. Appendix B: Photographs of EUT

Appearance photograph of EUT



Appearance photograph of EUT







For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Appearance photograph of EUT

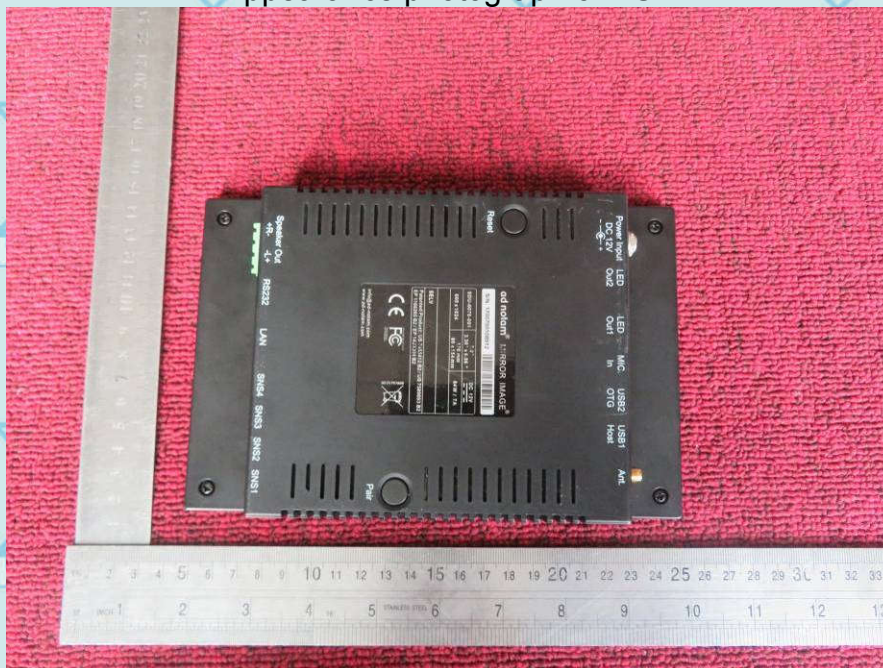

Appearance photograph of EUT

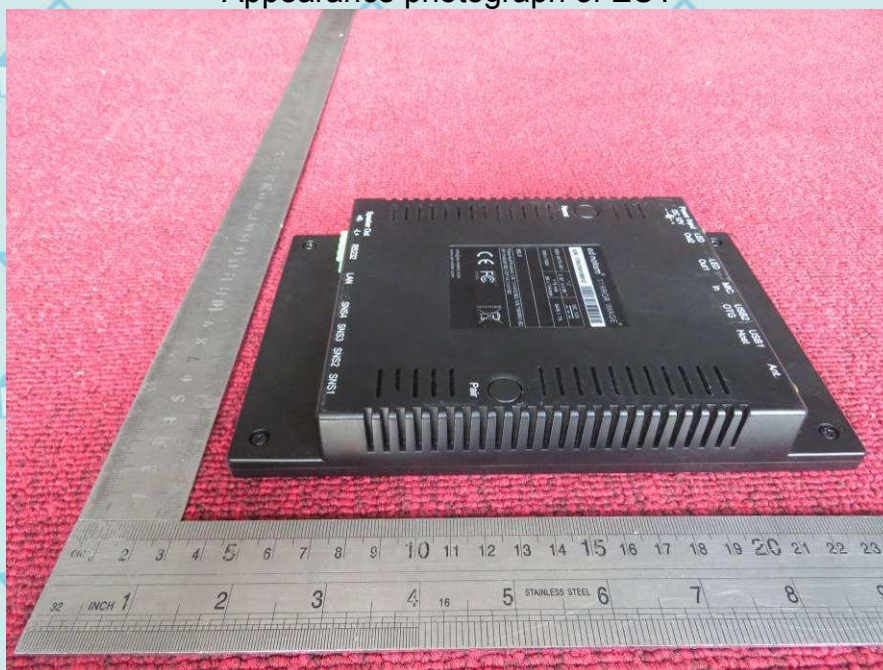




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Appearance photograph of EUT



Appearance photograph of EUT

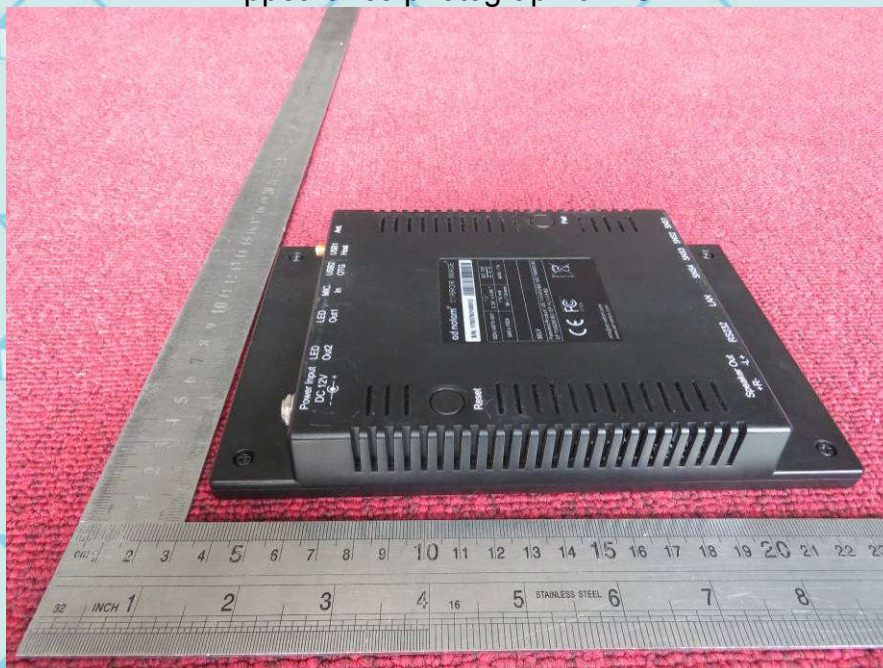




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Appearance photograph of EUT




Internal photograph of EUT

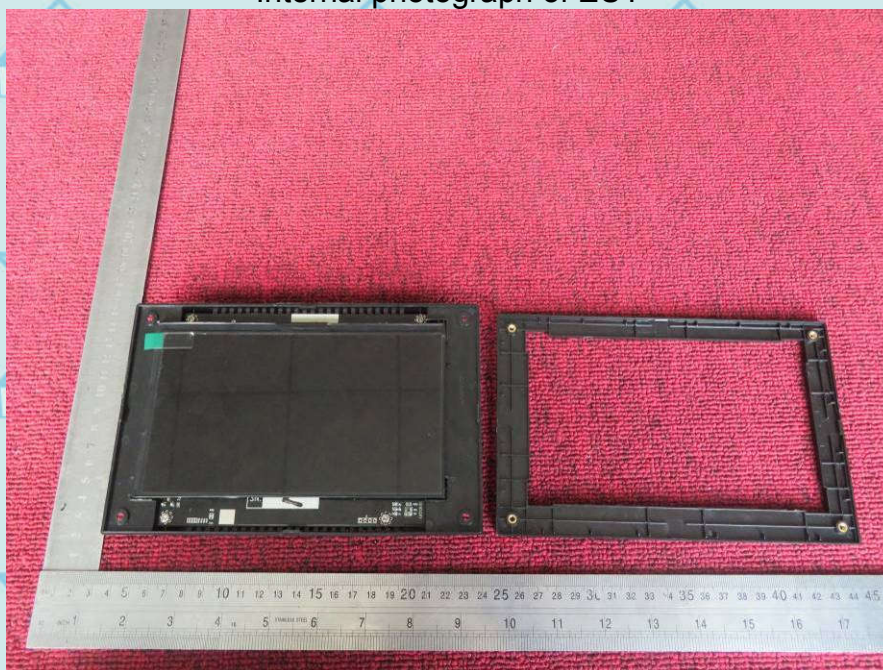




Internal photograph of EUT

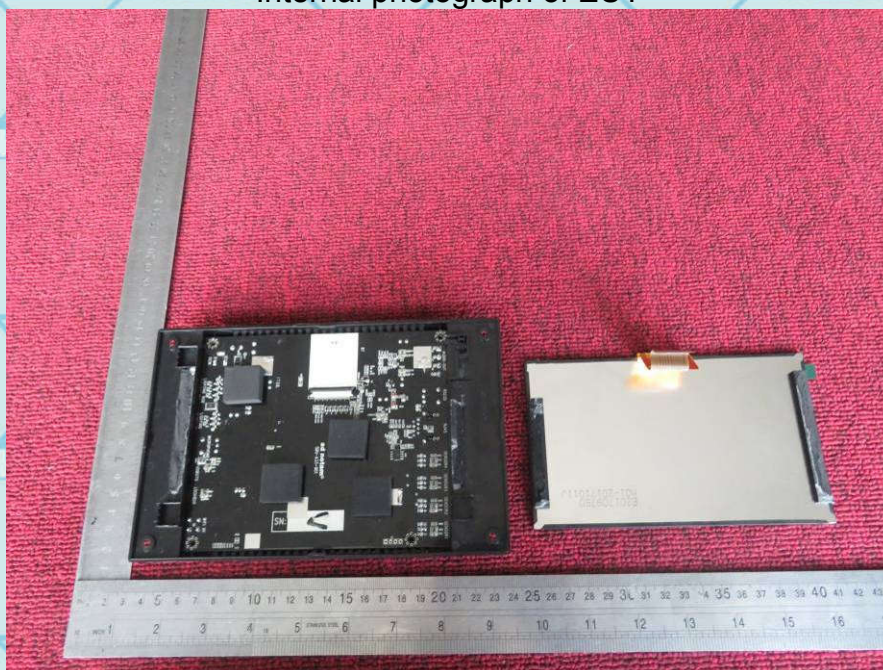


Internal photograph of EUT

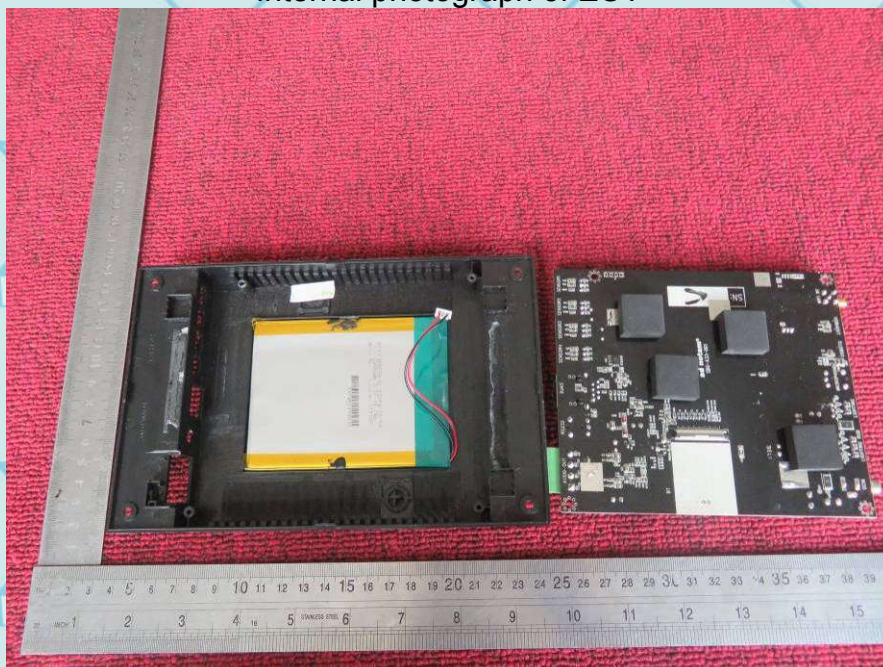



Internal photograph of EUT

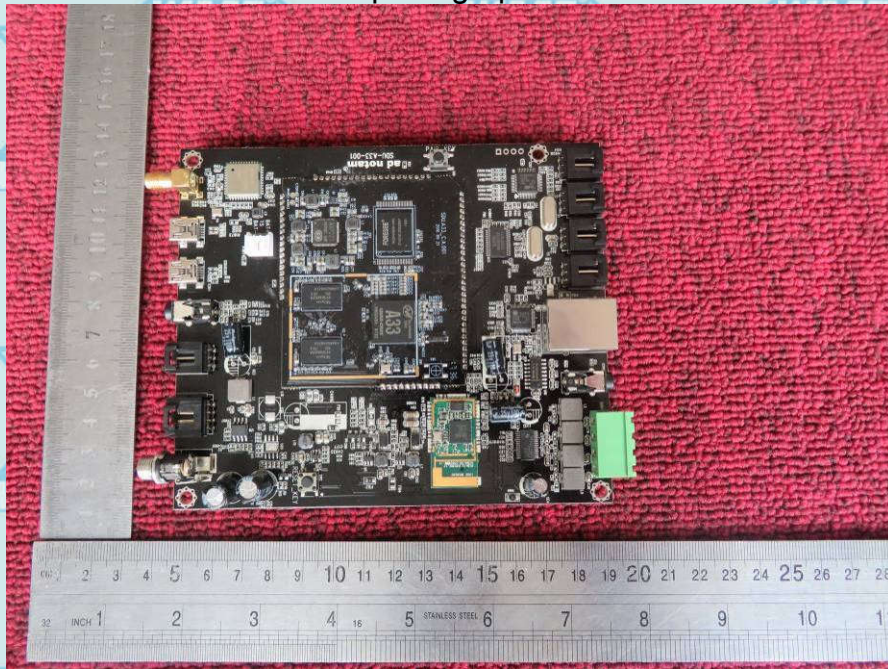

Internal photograph of EUT






For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: FCC18010018A-LE

Internal photograph of EUT




Internal photograph of EUT

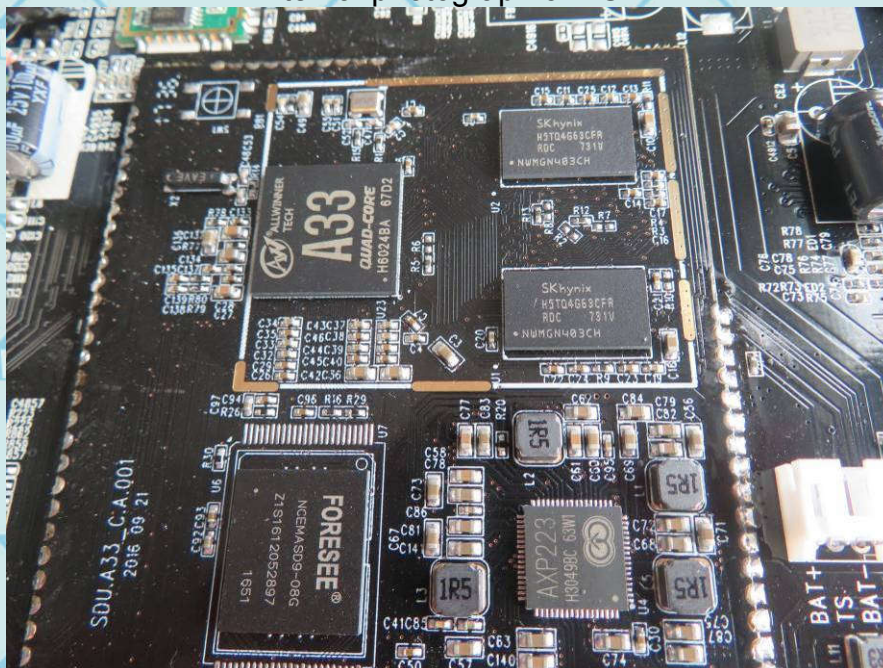




Report No.: FCC18010018A-LE

Internal photograph of EUT

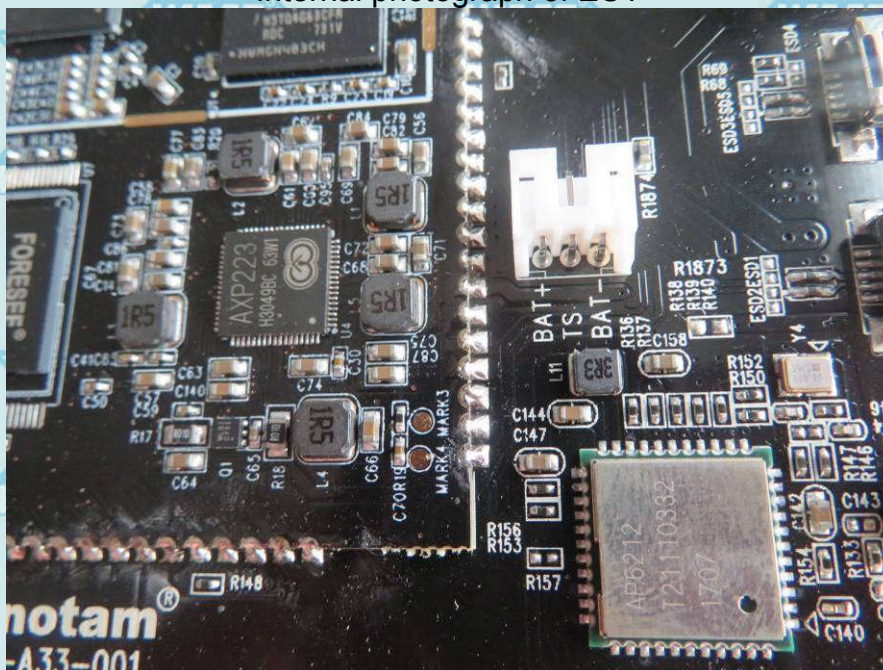


Internal photograph of EUT

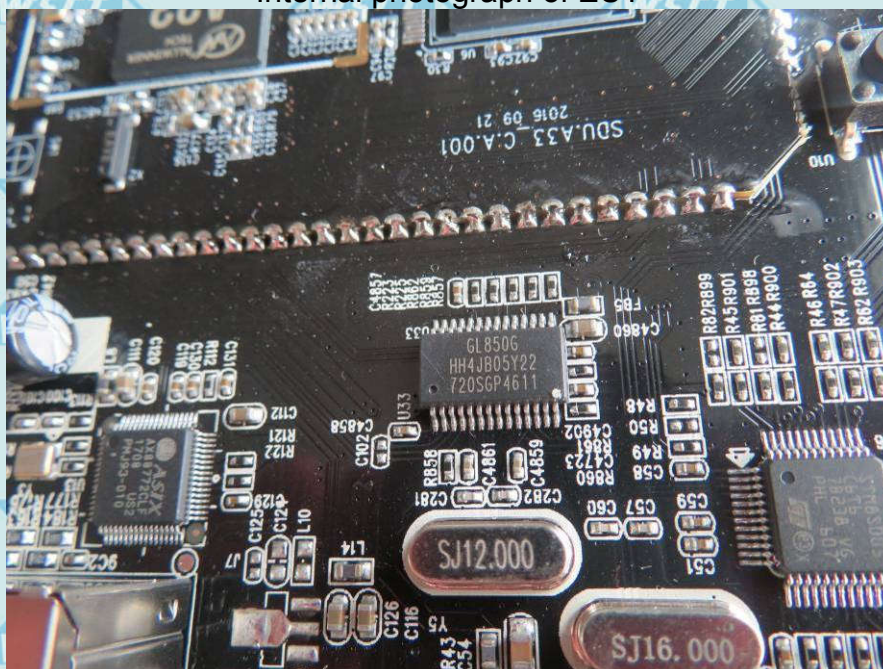



Internal photograph of EUT

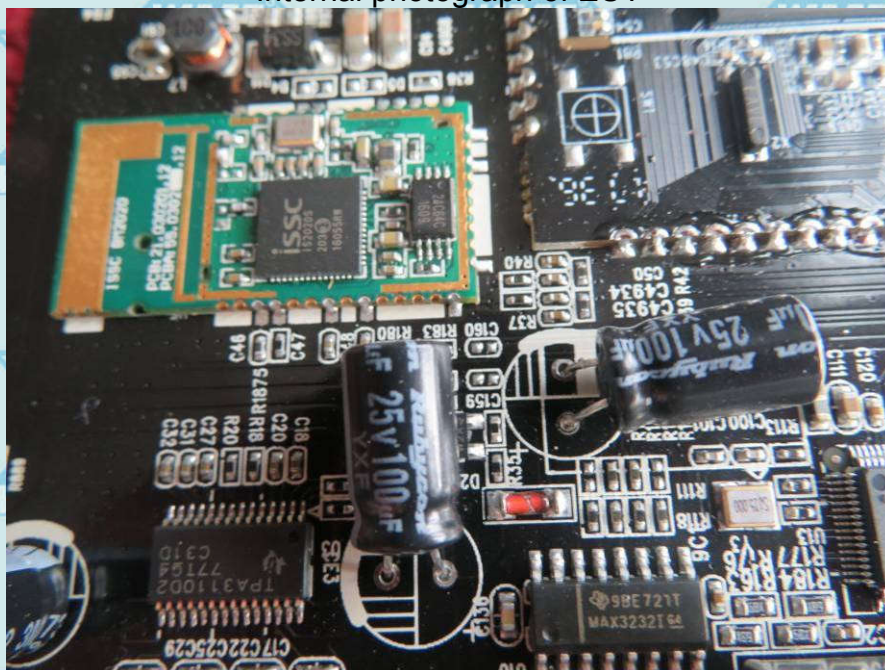

*******END OF REPORT*******