

OLink

秘密级别: 公开
生效时间: 2023年4月1日
保密期限: 长期

Model AL-7663B-WG-A Datasheet

IEEE 802.11 2x2 WiFi 5 Wireless LAN

and

Bluetooth 5.1

USB Combo Module

[SoC MT7663BUN]

for 802.11a/b/g/n/ac + Bluetooth 5.1

Version: 1.2

<Specification may be changed without prior notice>

Sichuan AI-Link Technology Co., Ltd

四川爱联科技股份有限公司

Copyright © Sichuan AI-Link Technology Co., Ltd. All Rights Reserved.

The information and data contained herein is subject to change without notice. While every possible precaution has been taken in the production of this document, it may still contain technical inaccuracies, omissions, and typographical errors, and AI-Link, the document owner, is under no obligation to update or otherwise correct this information. Sichuan AI-Link Technology Co., Ltd. makes no representations or warranties concerning the accuracy or completeness of the contents of this document and assumes no liability of any kind, including the implied warranties of non-infringement, merchantability, or fitness for purposes, concerning the operation or use of AI-Link hardware, software or other products described herein.

No license to any intellectual property rights is granted by this document. Terms and limitations applicable to the purchase or use of AI-Link' s products are outlined in a signed agreement between the parties or AI-Link' s standard terms and conditions of sales.

Any unauthorized copying, alteration, distribution, transmission, performance, display, or other use of this document is strictly prohibited. Reverse engineering or disassembly is also prohibited.

Trademarks

 are trademarks of Sichuan AI-Link Technology Co., Ltd. Other product names used in this document are for identification purposes only and may be trademarks of their respective companies or entities.

Below Space Intentionally Left Blank for Customer Confirmation or Comments

Typed Name	Signature	Date

Please sign and return this page and the front page to our company by email or fax, or by courier to the following address:

Address: Anzhou Industrial Park, Mianyang, Sichuan, P.R.C

Company: Sichuan AI-Link Technology Co., Ltd.

Module Name		AL-7663B-WG-A	
	Designed by	Reviewed by	Approved by
Signature	LIU, Jingshuang	HUANG, Wei	FAN, Xijun
Date	4/1/2023	4/1/2023	4/1/2023

Model AL-7663B-WG-A

➤ Compatible WLAN Standards

IEEE Std. 802.11 a/b/g/n/ac
Bluetooth V2.1/4.2/5.1



➤ SoC

MT7663BUN

➤ Product Size

40.0mmx 46.5mmx 6.0mm

➤ Product Weight

6.9g

	Sichuan AI-Link Technology Co., Ltd.
	Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
	+86-0816-2438701
	http://www.ailinkiot.com
	ai-link@ailinkiot.com



RoHS

Revision Record

Revision	Date	Description	Edited by
V1.0	3/1/2022	Premier Release	LIU, Jingshuang
V1.1	4/1/2023	design optimization: Update the format of the specification: add product weight, add RF Connector Dimension, Optimize Mechanical Dimensions	LIU, Jingshuang
V1.2	4/2/2023	Update packaging diagram	LIU, Jingshuang
<i>* Private Preview Only</i>			

1 General Description

1.1 System Overview

AL-7663B-WG-A module design is based on Mediatek MT7663BUN solution. The MT7663BUN is a highly integrated single chip which has built in a 2x2 dual-band wireless LAN radio and Bluetooth radio. It includes Bluetooth EDR and LE radio which complies with Bluetooth v2.1+EDR, v4.2, and v5.1. The Module is a highly integrated MAC/BBP and 2.4/5GHz PA/LNA single chip which supports a 866.7Mbps PHY rate. The Module is designed to support standard-based features in the areas of security, quality of service, and international regulations, giving end users the greatest performance anytime and in any circumstance. This documentation describes the engineering requirements specification.

1.2 System functions

This WLAN Module design is based on Mediatek MT7663BUN. It is a highly integrated single-chip MIMO(Multiple In Multiple Out) Wireless LAN (WLAN) network interface controller complying with the 802.11 specification and Bluetooth over USB interface. It combines a MAC, a 2T2R capable baseband, and RF in a single chip. An intelligent Wi-Fi/Bluetooth coexistence algorithm is implemented to provide the best harmonized Wi-Fi and Bluetooth radio performance.

1.3 System characteristics

Dimension	Typically, 40.0mmx 46.5mmx 6.0mm
Chipset	MT7663BUN
Operating Frequency	2.4GHz: 2.412~2.462 GHz 5 GHz: 5.180~5.825GHz
Antenna	External Antennas Design
Operating Voltage	5V +/-10% input
PCB Information	4-layers design (1+/-0.15mm)
Peripheral Interface	USB2.0
Operating Temperature	-10°C to +70°C
Storage Temperature	-40°C to +85°C
ESD Protection	HBM: 2000V IEC(Contact discharge): ±4000V IEC(Air discharge): ±8000V

1.3 Diagram

方框图 block:


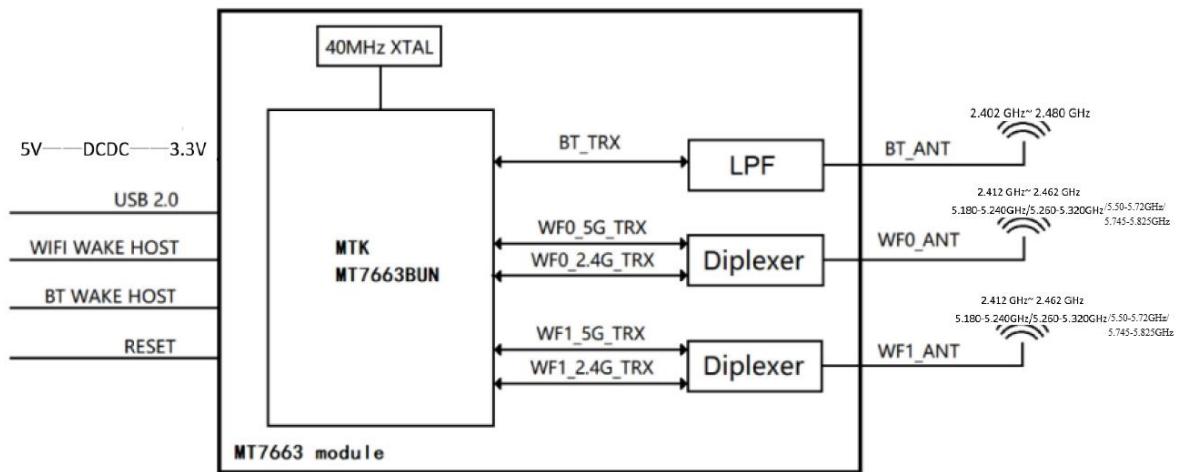


Figure 1 AL-7663B-WG-A Block Diagram

2 Mechanical Dimensions

2.1 Mechanical Outline Drawing

- Typical Dimension (W x L x T): 40.0mmx 46.5mmx 6.0mm
- General tolerance: $\pm 0.3\text{mm}$
- PCB Thickness: 1mm ($+/ - 0.15\text{mm}$)

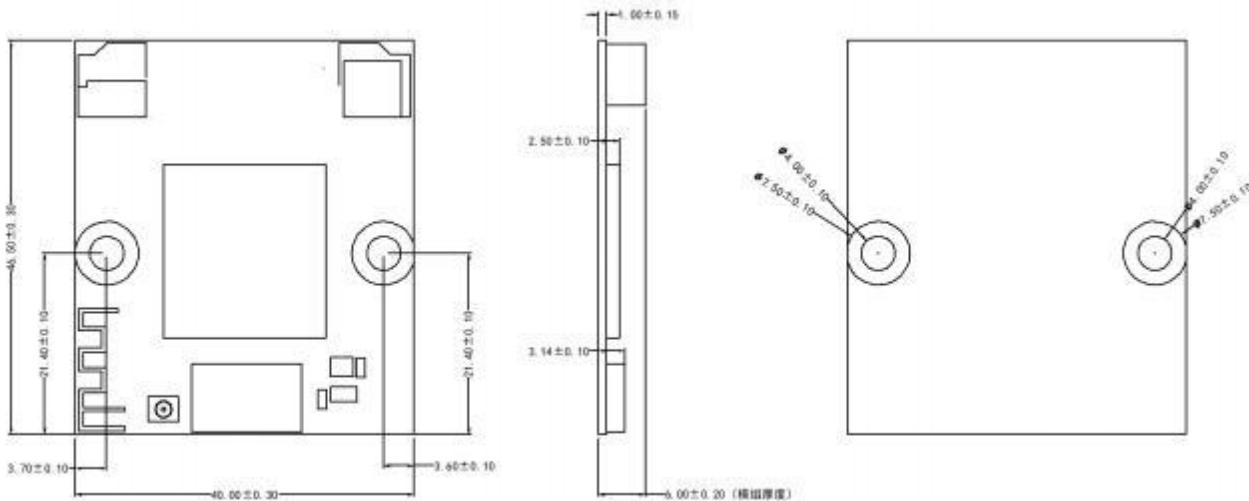

Top View

SIDEView

BOTView

2.2 Product Photos




Bottom View



Top View

2.3 Pin Definitions

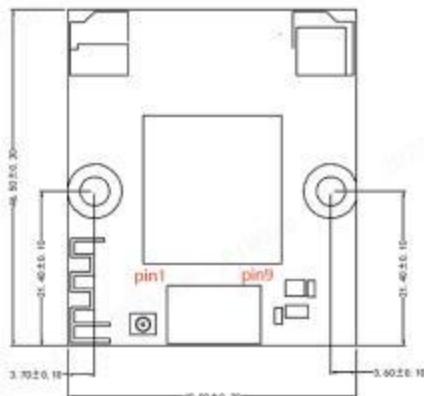

序号	定义	功能
1	RST	Module reset pin, effective at low level, internal 10K pull-up to 3.3V
2	WIFI_WAKE	WIFI wakes up the host, effective at low level, and internal 10k is pulled up to 3.3V
3	GND	ground
4	DP	USB D+
5	DM	USB D-
6	GND	ground
7	BT_WAKE	Bluetooth wake -up, effective at low level, internal 10K pull-up to 3.3V
8	+5V	Module power supply pin, 5V input, requires a load capacity of more than 1.5A
9	+5V	Module power supply pin, 5V input, requires a load capacity of more than 1.5A

2.4 DC characteristics

Input voltage requirements:

DC	Min	Typ	Max	unit
VCC	4.5	5	5.5	V

Input current requirements:

DC	Max (GSM)	Typ (WCDMA)	Typ (LTE)
VCC	700mA	-mA	-mA

3 RF Characteristics

3.1 Wi-Fi Subsystem

Items	Contents
WLAN Standard	IEEE 802.11a/b/g/n/ac
Frequency Range	5.1 GHz ~ 5.9 GHz (5 GHz)
	2.400 GHz ~ 2.497 GHz (2.4 GHz)
Channels	CH1 to CH11 @ 2.4G
	CH36 to CH165 @ 5G
Modulation Mode	11b: DBPSK, DQPSK and CCK and DSSS 11a/g: BPSK, QPSK, 16QAM, 64QAM and OFDM 11n: BPSK, QPSK, 16QAM, 64QAM and OFDM 11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM and OFDM
Output Power	802.11b /1Mbps-11Mbps: 13dBm ± 3dBm
	802.11g /6Mbps-48 Mbps: 13dBm ± 2dBm
	802.11g /54Mbps: 13dBm ± 2dBm
	802.11a /6Mbps-48 Mbps: 15dBm ± 3dBm
	802.11a /54Mbps: 15dBm ± 3dBm
	2.4G 802.11n HT20 / MCS0-MCS6: 17dBm ± 2dBm
	2.4G 802.11n HT20 / MCS7: 17dBm ± 2dBm
	5G 802.11n HT20 / MCS0-MCS6: 16dBm ± 3dBm
	5G 802.11n HT20 / MCS7: 16dBm ± 3dBm
	2.4G 802.11n HT40 / MCS0-MCS6: 17dBm ± 2dBm
	2.4G 802.11n HT40 / MCS7: 17dBm ± 2dBm
	5G 802.11n HT40 / MCS0-MCS6: 16dBm ± 2dBm
	5G 802.11n HT40 / MCS7: 16dBm ± 2dBm
EVM	5G 802.11ac VHT20/VHT40/VHT80 MCS0-MCS6: 17dBm ± 2dBm
	5G 802.11ac VHT20/VHT40/VHT80 MCS7: 17dBm ± 2dBm
	5G 802.11ac VHT20/VHT40/VHT80 MCS8-MCS9: 17dBm ± 2dBm
	802.11b /11Mbps : ≤ -10dBm
Receive Sensitivity	802.11g /54Mbps : ≤ -26dBm
	802.11n HT20 / MCS7: ≤ -26dBm
	802.11n HT40 / MCS7 : ≤ -28dBm
	1Mbps ≤ -76dBm
Receive Sensitivity	11Mbps ≤ -76dBm
	6Mbps ≤ -82dBm
Receive Sensitivity	54Mbps ≤ -65dBm
	MCS0 ≤ -82dBm
Receive Sensitivity	MCS7 ≤ -64dBm
	MCS0 ≤ -79dBm
Receive Sensitivity	MCS7 ≤ -61dBm
	MCS0 ≤ -82dBm
Receive Sensitivity	MCS7 ≤ -64dBm
	MCS0 ≤ -79dBm
Receive Sensitivity	MCS7 ≤ -56dBm
	MCS0 ≤ -82dBm

Receive Sensitivity 11ac, 80MHz $\leq 10\%$	MCS7 $\leq -76\text{dBm}$ MCS7 $\leq -51\text{dBm}$
--	--

3.2 Bluetooth Subsystem

Items	Contents
Channel	BR, EDR: CH0 to CH78
	LE: CH0 to CH39
Modulation	GFSK、 $\pi/4$ -DQPSK、8PSK
TX Power	BR: $13\text{dBm} \pm 3\text{dBm}$
	EDR: $13\text{dBm} \pm 3\text{dBm}$
	LE: $-2\text{dBm} \pm 3\text{dBm}$
RX Characteristics	/
1. Receiver Sensitivity (BER<0.1%)	BR: -92dBm
	EDR: -91dBm
	LE: -95dBm
2. Maximum usable signal (BER<0.1%)	BR: -5dBm
	EDR: -5dBm
	LE: -5dBm

*Note:[1]Typical RF Output Power are tested at room temp. 25°C

4 Interface

4.1 USB Interface

The module supports the USB (USB v2.0 specification) device port, Use USB as the host interface for WIFI and Bluetooth.

5 Software Information

5.1 RF Driver

Driver software supports operating systems: Linux, Microsoft Win7x64, Win10x64.

Test software tool version:

WIFI:customer_package_Ulv2.06_DLLv4.09_E220200304_WinDriverV.0.0.2.5_FWv.10c
0f240

BT: [2.1749.00]WCN Combo Tool for customer

Test driver version:

WiFi: MTKUQA3

BT: MtkUsb_3.0.0.3

5.2 Normal Driver

MT76x3_MP1.4.1

*Note:

The software(driver) package version is subject to change without notice because it may encounter several updates. It is advised to consult with AI-Link for the best right driver package.

6 RF Connector Dimension


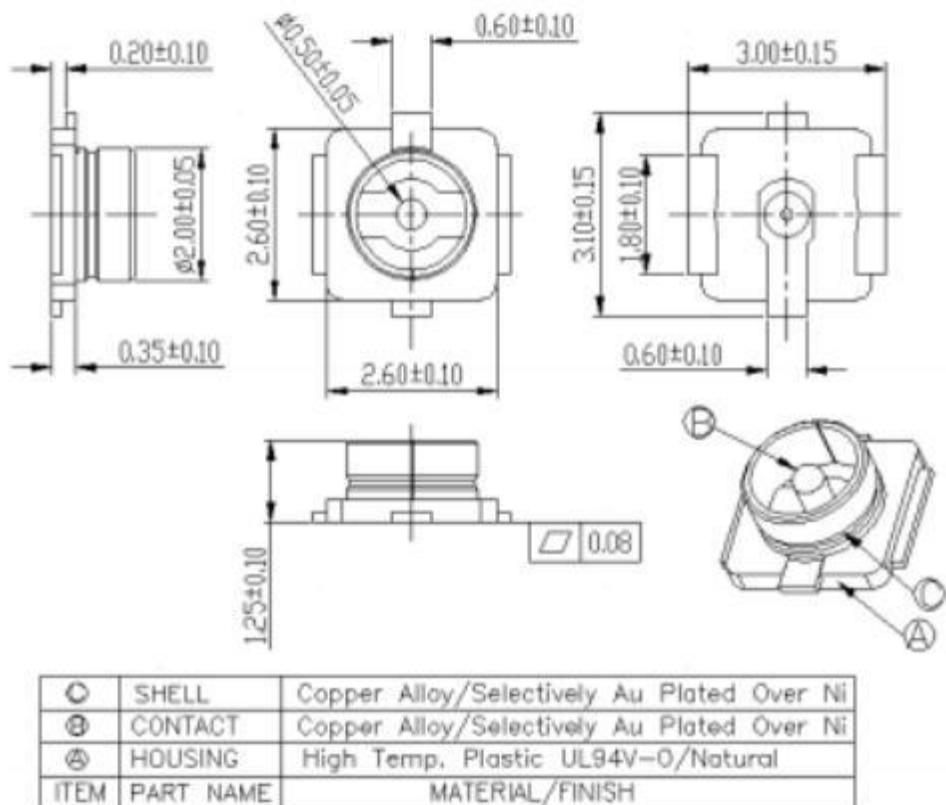


Figure: The dimensions of the connector

I-PEX(Unit: mm)

7 Package, Storage & Dispo

7.1 Package

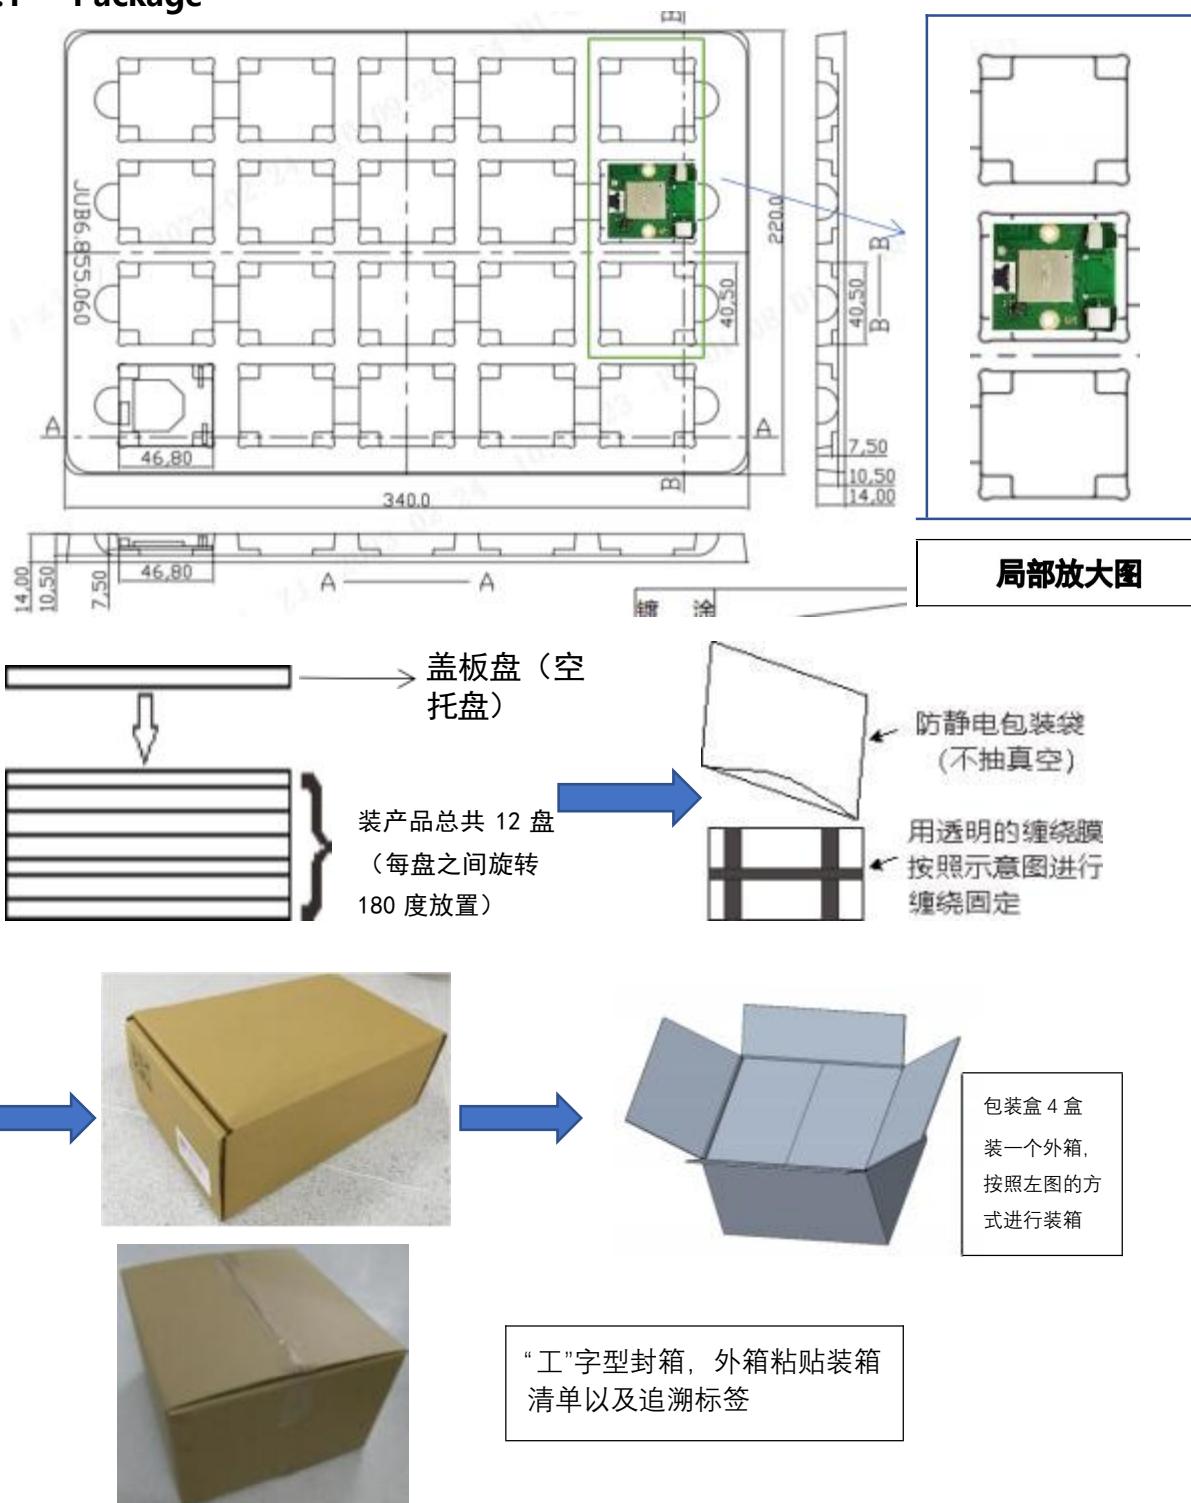

- 1) The product placement direction, label pasting position, and packaging shall be carried out according to the schematic diagram;
- 2) The quantity of products is 12 pieces per layer, with an empty tray on the upper layer, 240 pieces per box, and 960 pieces per box;
- 3) Inner box size: 240mm * 385mm * 140mm, outer box size 495 * 390 * 289mm;
- 4) Other matters not covered shall be executed according to the customer's packaging requirements

7.2 Storage

All electronic components must be stored in a clean, well-ventilated place free of corrosive gas. Unless otherwise specified, the temperature and humidity of the storage place must meet below requirements:

- ✚ Temperature: -40~85°C;
- ✚ Humidity: 20%~75%;
- ✚ Humidity sensitivity grade: MSL 3
- ✚ Container Requirement: products shall be placed in a container well-functioning as an electrostatic shielding.

7.3 Disposal


The waste disposal of this product and the package should comply with the applicable local/regional /state/ international regulations.

8 Appendix

Key Components List

NO .	Name	Model	Specification	Manufacturer
1	IC	MT7663BUN	QFN	MediaTek
2	PCB	JUI7.820.0962 series	FR-4, 4-lay, 1mm	英创力 顺络 科翔 昌盛艺龙 信利 胜宏

9 Reflow Standard Condition

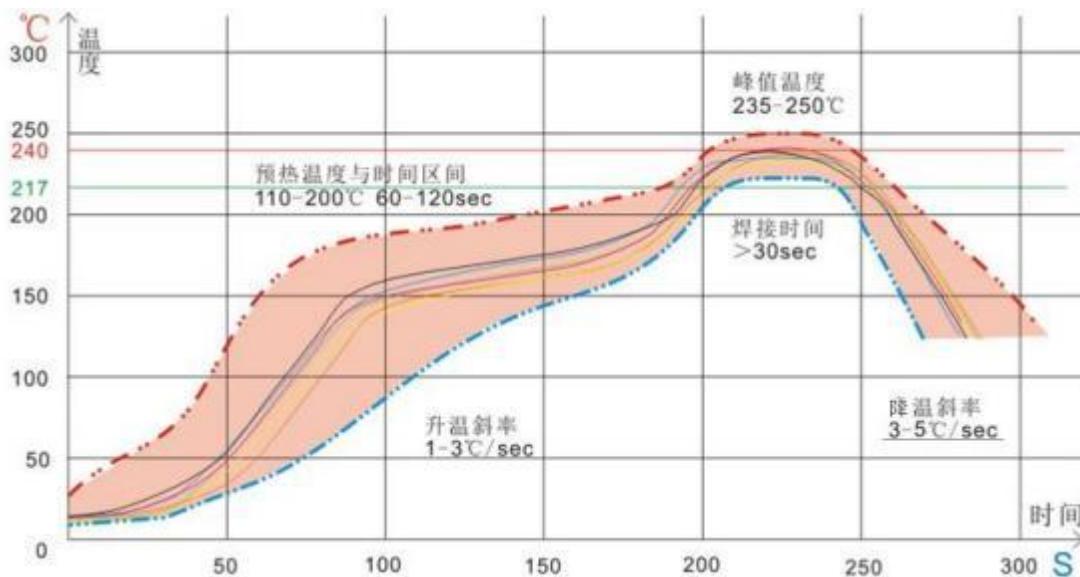

Heating zone: temperature: $< 150 \text{ }^{\circ}\text{C}$, time: between 60 and 90 seconds, the slope is controlled between $1 \sim 3 \text{ }^{\circ}\text{C} / \text{S}$.

Preheating constant temperature zone: temperature: $150 \text{ }^{\circ}\text{C} \sim 200 \text{ }^{\circ}\text{C}$, time: between 60-120 seconds, slope between 0.3-0.8.

Reflow soldering area: peak temperature $235 \text{ }^{\circ}\text{C} \sim 250 \text{ }^{\circ}\text{C}$ (recommended peak temperature $< 245 \text{ }^{\circ}\text{C}$), time 30-70 seconds.

Cold area: temperature: $217 \text{ }^{\circ}\text{C} \sim 170 \text{ }^{\circ}\text{C}$, slope between $3 \sim 5 \text{ }^{\circ}\text{C} / \text{S}$.

The solder is lead-free solder in tin-silver copper alloys/Sn&Ag&Cu Lead-free solder (SAC305).

10 Antenna specification

ANT	TYPE	Antenna Project Code	Part No. & manufacturer	Gain
ANT1	Onboard PIFA Antenna	Metal Antenna	JUI6.604.003series Sichuan Yide Xinguang Electronics Co., Ltd	2.4G :1.99dBi 5G:1.96dBi
ANT2	Onboard PIFA Antenna	Metal Antenna	JUI6.604.004series Sichuan Yide Xinguang Electronics Co., Ltd	2.4G :1.94dBi 5G:1.96dBi
ANT3	External PIFA Antenna	PIFA Antenna	TX- DM150BD113B63M ZHONGSHAN B&T TECHNOLOGY Co..Ltd	2.4G:1.46dBi
			TX- DM200BD113B63M ZHONGSHAN B&T TECHNOLOGY Co..Ltd	2.4G:1.29dBi
			TX- DM270BD113B63M ZHONGSHAN B&T TECHNOLOGY Co..Ltd	2.4G:0.90dBi
			TX- DM350BD113B63M ZHONGSHAN B&T TECHNOLOGY Co..Ltd	2.4G:0.59dBi
			TX- DM400BD113B63M	2.4G:1.04dBi

ZHONGSHAN B&T TECHNOLOGY Co..Ltd	
TX- DM500BD113B63M ZHONGSHAN B&T TECHNOLOGY Co..Ltd	2.4G:0.46dBi
TX- DM100BD113B63M ZHONGSHAN B&T TECHNOLOGY Co..Ltd	2.4G:1.89dBi
TX- DM100BD113Y63M Shenzhen Yishengbang Technology Company Limited	2.4G :3.93dBi
TX- DM150BD113Y63M Shenzhen Yishengbang Technology Company Limited	2.4G :3.93dBi
TX- DM200BD113Y63M Shenzhen Yishengbang Technology Company Limited	2.4G :4.29dBi
TX- DM270BD113Y63M Shenzhen Yishengbang Technology	2.4G :4.32dBi

			Company Limited	
			TX- DM350BD113Y63M Shenzhen Yishengbang Technology Company Limited	2.4G :3.12dBi
			TX- DM400BD113Y63M Shenzhen Yishengbang Technology Company Limited	2.4G :3.02dBi
			TX- DM500BD113Y63M Shenzhen Yishengbang Technology Company Limited	2.4G :3.04dBi

11 Authentication

1、FCC Radiation Exposure Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This Module complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Labelling Instruction for Host Product Integrator

Please notice that if the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains FCC ID: **2AOKI-AL7663BWGA**" any similar wording that expresses the same meaning may be used.

Installation Notice to Host Product Manufacturer

The OEM integrator is responsible for ensuring that the end-user has no manual instruction to remove or install module.

The module is limited to installation in mobile application, a separate approval is required for all other operating configurations, including portable configurations with respect to §2.1093 and difference antenna configurations.

Antenna Change Notice to Host manufacturer

If you desire to increase antenna gain and either change antenna type or use same antenna type certified, a Class II permissive change application is required to be filed by us, or you (host manufacturer) can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

FCC other Parts, Part 15B Compliance Requirements for Host product manufacturer

This modular transmitter is only FCC authorized for the specific rule parts listed on our grant, host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

Host manufacturer in any case shall ensure host product which is installed and operating with the module is in compliant with Part 15B requirements.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*

Integration instructions for host product manufactures according to KDB 996369 D03**OEM Manual v01****11.2 List of applicable FCC rules**

FCC Part 15 Subpart C 15.247

FCC Part 15 Subpart C 15.407

11.3 Specific operational use conditions

The module is a WIFI Module with 2.4G&5G function.

WiFi Specification:

Operation Frequency:

2412~2462MHz; 5180~5240MHz; 5260~5320MHz; 5500~5720MHz; 5745~5825MHz.

Modulation:

BPSK/QPSK/16QAM/64QAM(802.11a)

DBPSK/DQPSK/CCK(802.11b)

BPSK/QPSK/16QAM/64QAM(802.11g)

BPSK/QPSK/16QAM/64QAM(802.11n)

BPSK/QPSK/16QAM/64QAM/256QAM(802.11ac)

Type: WLAN Antennas are Metal Antenna and BT Antenna is PIFA Antenna

Maximum Metal Antenna 1 gain: 1.99dBi@2.4G;1.96dBi@5G

Maximum Metal Antenna 2 gain: 1.94dBi@2.4G;1.96dBi@5G

Maximum PIFA Antenna3 gain: 4.32dBi@2.4G;

The host manufacturer installing this module into their product must ensure that the final composite product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation. The host manufacturer has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as shown in this manual.

11.4 Limited module procedures

Not applicable.

11.5 Trace antenna designs

Not applicable. The module has its own antenna, and doesn't need a host's printed board microstrip trace antenna etc.

11.6 RF exposure considerations

The module must be installed in the host equipment such that at least 20cm is maintained between the antenna and users' body; and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization

11.7 Additional testing, Part 15 Subpart B disclaimer

The modular transmitter is only FCC authorized for FCC Part 15 Subpart C 15.247 and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

Manufacturer's Name: Sichuan AI-Link Technology Co., Ltd.

Sample Description: WIFI Module

Trade Mark: Wireless-tag

Model number: AL-7663B-WG-A;AL-7663B-WG-A(FCC);AL-7663B-WG-A-1(FCC);AL-7663B-WG-A-2(FCC);AL-7663B-WG-A-3(FCC);AL-7663B-WG-A-4(FCC);AL-7663B-WG-A-5(FCC).

This device was tested for operations. To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the charger, including the antenna. Accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.

IMPORTANT NOTES

Co-locating warning:

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

OEM integration instructions:

This device is intended only for OEM integrators under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the external antenna(s) that has been originally tested and certified with this module.

As long as the conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

Validity of using the module certification:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End product labeling:

The final end product must be labeled in a visible area with the following: "Contains Transmitter Module

FCC ID: 2AOKI-AL7663BWGA".

Information that must be placed in the end user manual:

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.