



Test Report No.:
FCCSZ2025-0041-RF

RF Test Report



FCC ID : 2AOKI-M6

NAME OF SAMPLE : 60 GHz radar sensor Module

APPLICANT : Sichuan AI-Link Technology Co.,Ltd.

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.

Applicant		Name: Sichuan AI-Link Technology Co.,Ltd. Address: Anzhou Industrial Park, Mianyang, Sichuan, P.R.C	
Manufacturer		Name: Sichuan AI-Link Technology Co.,Ltd. Address: Anzhou Industrial Park, Mianyang, Sichuan, P.R.C	
Equipment Under Test		Name: 60 GHz radar sensor Module Model/Type: MR60I13I6 Additional Model: N/A BRAND: AI-LINK Serial NO.: N/A Sample NO.: 1-1	
Date of Receipt.	May 19,2025	Date of Testing	May 19,2025~May 23,2025
Test Specification		Test Result	
FCC Part 15, Subpart C (15.255)		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: May 24,2025	
Compiled by:  <u>Liang Jiatong</u> Name Signature		Reviewed by:  <u>Mo Xianbiao</u> Name Signature	
		Approved by:  <u>Dong Sanbi</u> Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 OTHER INFORMATION	8
2.3 TEST MODE	9
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
2.5 DESCRIPTION OF SUPPORT UNITS	10
2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz	11
2.7 RADIATED TEST SETUP	12
3 TEST TYPES AND RESULTS	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT	16
3.3 DUTY CYCLE, OFF TIME REQUIREMENT	29
3.4 BANDWIDTH MEASUREMENT	31
3.5 EIRP POWER MEASUREMENT	33
3.6 FREQUENCY STABILITY	35
3.7 ANTENNA REQUIREMENT	36
4 PHOTOGRAPHS OF TEST SETUP	37
5 PHOTOGRAPHS OF THE EUT	38

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2025-0041-RF	Original release	May 24,2025

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15.255(57-61.56GHz)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	DC power supply
15.255(d)	Transmitter Spurious Emissions	PASS	See section 3.2
15.215(c) 15.255(c)(2)(ii)	Occupied Bandwidth	PASS	See section 3.4
15.255(c)(2)(ii)	Duty cycle, Off Time	PASS	See section 3.3
15.255(c)(2)(ii)	EIRP	PASS	See section 3.5
15.255(f)	Frequency stability	PASS	See section 3.6
15.255(h)	Group Installation	N/A	The test is not applicable since there are no external phase-locking inputs in this EUT
15.203	Antenna Requirement	PASS	See section 3.7



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Radiation Spurious(Below 40GHz)					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2026.5.16
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2025.6.03
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2026.1.22
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2026.3.28
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2026.3.21
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2026.4.22
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2026.4.22
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2026.4.22
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2026.4.22
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2026.4.22
#2 control room	MORI	433	CS0200059	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2026.4.28
Radiation Spurious(Above 40GHz)					/
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2026.4.28
Signal&Spectrum Analyzer	keysight	N9040B	CS0300074	1 year	2025.9.24
SA Expansion Module(40-60GHz)	VDI	N9029AV19	CS0300075	3 year	2025.9.14
SA Expansion Module(60-90GHz)	VDI	N9029AV12	CS0300076	3 year	2025.9.14
SA Expansion Module(90-140GHz)	VDI	N9029AV08	CS0300077	3 year	2025.9.14
SA Expansion Module(140-220GHz)	VDI	N9029AV05	CS0300078	3 year	2025.9.14
Horn antenna(40-60GHz)	CMI	HO19R	CS0300086	3 year	2025.9.14
Horn antenna(60-90GHz)	CMI	HO12R	CS0300088	3 year	2025.9.14
Horn antenna(90-140GHz)	CMI	HO08R	CS0300090	3 year	2025.9.14
Horn antenna(140-220GHz)	CMI	HO05R	CS0300092	3 year	2025.9.14

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement Uncertainty		
No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	$\pm 1.86\%$
2	Radiated emission(9kHz-30MHz)	± 5.6 dB
3	Radiated Emissions(30MHz-1GHz)	± 5.0 dB
4	Radiated Emissions(1GHz-18GHz)	± 4.8 dB
5	Radiated Emissions(18GHz-40GHz)	± 5.1 dB
6	Radiated Emissions(40GHz-60GHz)	± 4.8 dB
7	Radiated Emissions(60GHz-90GHz)	± 4.8 dB
8	Radiated Emissions(90GHz-140GHz)	± 5.0 dB
9	Radiated Emissions(140GHz-220GHz)	± 5.1 dB
10	Radiated Emissions(220GHz-300GHz)	± 4.8 dB
11	Temperature	$\pm 0.73^{\circ}\text{C}$
12	Supply voltages	± 0.37 %
13	Humidity	± 3.9 %
Remark: 95% Confidence Levels, k=2.		

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)

2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	60 GHz radar sensor Module
BRAND	AI-LINK
TEST MODEL	MR60I13I6
ADDITIONAL MODEL	N/A
POWER SUPPLY	DC 5V
MODULATIONTECHNOLOGY	FMCW
FREQUENCY RANGE	60~ 61GHz
PEAK OUTPUT POWER	2.49dBm for TM1
ANTENNA TYPE(Note 4)	AIP antenna
I/O PORTS	Refer to user' s manual
CABLE SUPPLIED	N/A
Note: 1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report. 3. EUT photo refer to report. 4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.	

2.2 OTHER INFORMATION

The EUT only have one channel.

CHANNEL	FREQUENCY (MHz)
1	60500

2.3 TEST MODE

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis (if EUT with antenna diversity architecture) and packet type.

The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

MODE	MODEL	FREQUENCY (GHz)	TEST ITEM
TM1	MR60I13I6	60.5	ALL

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, SUBPART C. SECTION 15.255

KDB 364244 D01 MEAS 15.255 RADARS V01R01

ANSI C63.10-2020

TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

Keysight Application Note 5952-1039

All test items have been performed and recorded as per the above standards.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Configuration during the tests:

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	Laptop	Lenovo	K4e-ARE120	MP20kshe	Lab		
Support Cable							
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by


2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz

The equipment under test was transmitting while connected to its integral antenna and is placed on a turn table. The measurement antenna is in the far field of the EUT per formula $2D^2/\lambda$ where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.


Horn Antenna	Frequency (GHz)	Antenna Dimension A(m)	Wavelength (λ)(m)	Far field $R(m) \geq 2D^2/\lambda$	Measurement Distance(D)(m)
QMS-00880	18	0.08	0.0167	0.77	3
	40	0.08	0.0075	1.71	
HO19R	40	0.046	0.0075	0.56	1
	60	0.046	0.005	0.85	
HO12R	60	0.03	0.005	0.36	1
	90	0.03	0.0033	0.55	
HO8R	90	0.019	0.0033	0.22	1
	140	0.019	0.0021	0.34	
HO5R	140	0.012	0.0021	0.14	1
	220	0.012	0.0014	0.21	
HO3R	220	0.008	0.0014	0.09	1
	330	0.008	0.0009	0.14	

2.7 RADIATED TEST SETUP


Below 30MHz Test Setup:

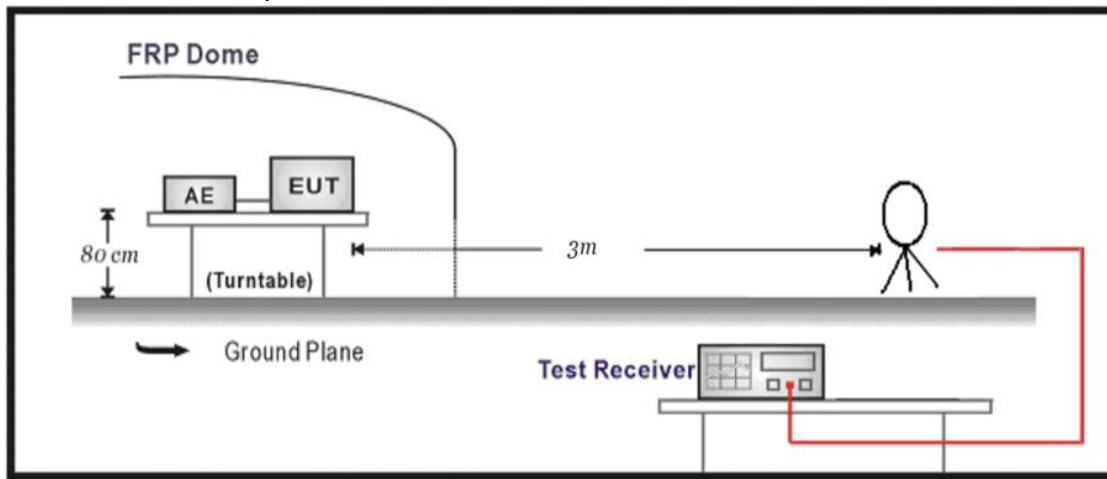


30MHz-1GHz Test Setup:

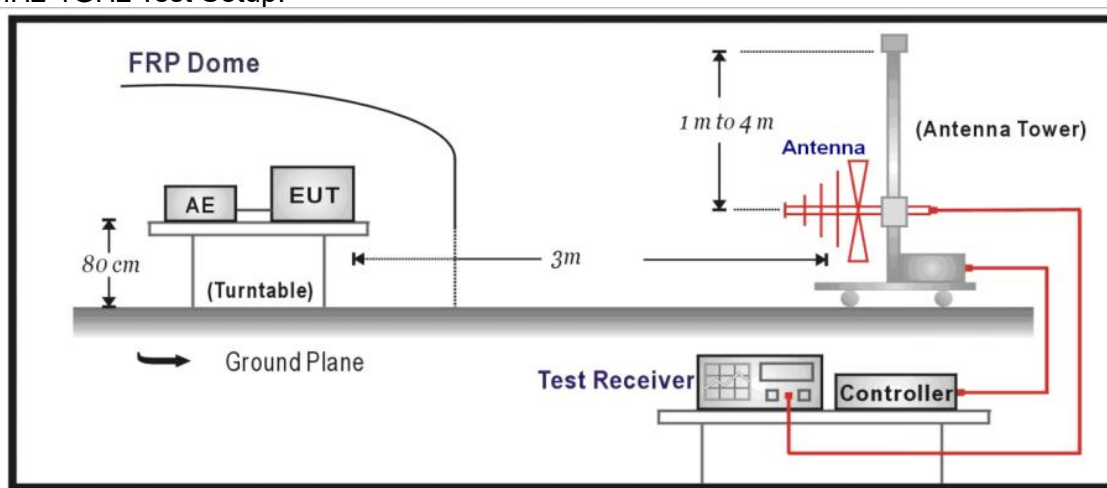

1GHz -40GHz Test Setup:

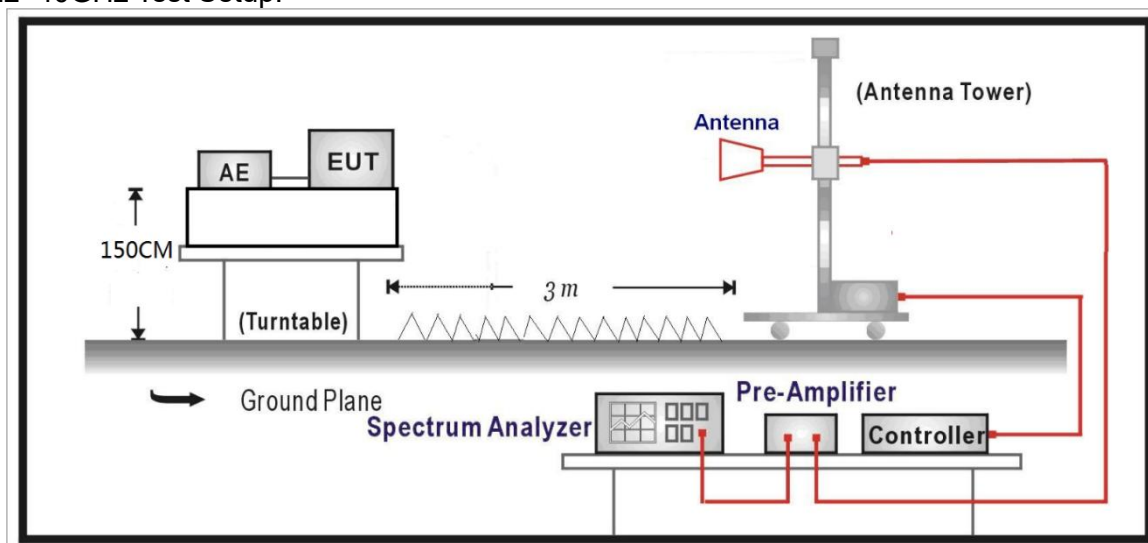

Above 40GHz Test Setup:

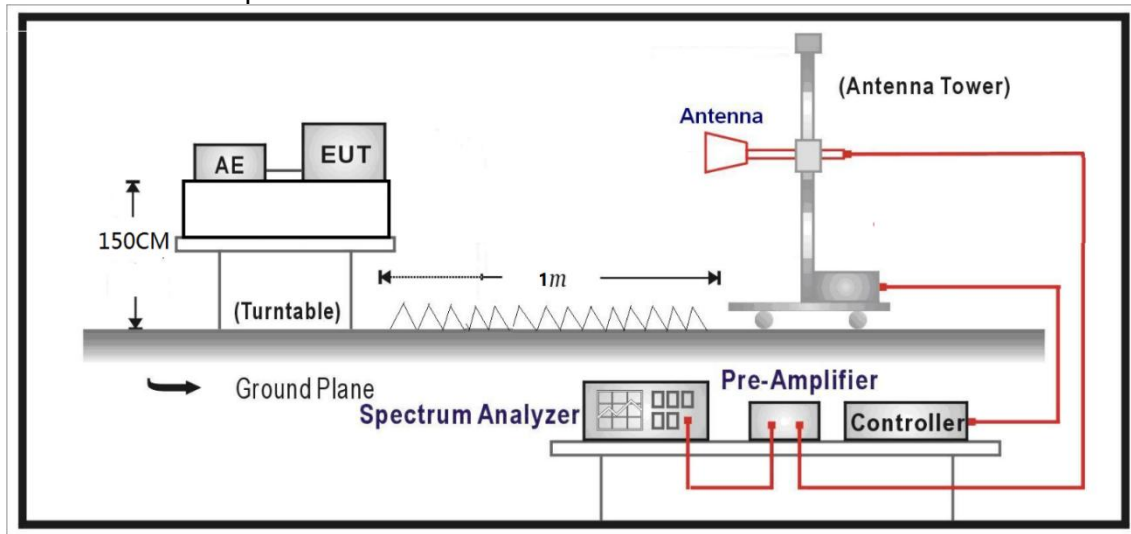

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.2 Measurement procedure

- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.1.3 Test setup

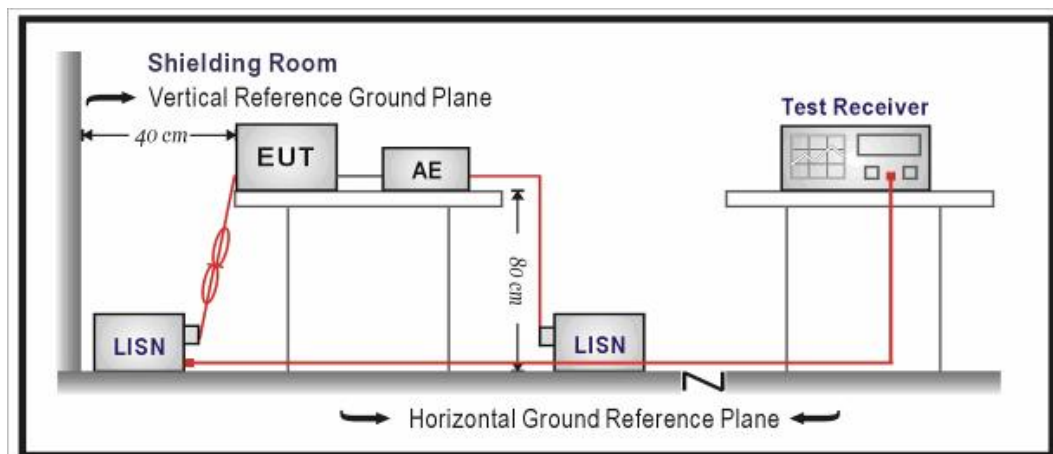

3.1.4 Test results

N/A,DC power supply

3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT

3.2.1 Limit

Below 40 GHz radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90pW/cm² at a distance of 3 meters.

FCC Frequency [GHz]	EIRP
40 - 200	-10dBm
Limit conversion according to ANSI C63.10-2020 9.2.3 (pW/cm ² to dBm):	$EIRP[dBm] = 10 \times \log(4 \times \pi \times d^2 \times PD[W/m^2])$ ----- According to this formula, an emission limit of PD = 90 pW/cm² at a distance of d = 3 m corresponds to an equivalent isotropically radiated power of EIRP = -10 dBm.

3.2.2 Measurement procedure

Measurement of harmonic and spurious emissions below 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

Measurement of harmonic and spurious emissions above 40 GHz

- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer.
- b. Set spectrum analyzer RBW = 1MHz, VBW = 3MHz, average detector.
- c. Maximize all observed emissions. Note the maximum power indicated on the spectrum analyzer. Adjust this reading, if necessary, by the conversion loss of the external mixer used at the frequency under investigation and the external mixer IF cable loss.
- d. Calculate the maximum field strength of the emission at the measurement distance
- e. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit
- f. Repeat the preceding sequence for every emission observed in the frequency band under investigation.

3.2.3 Test setup


See section 2.7 of this report.

3.2.4 Test results(9kHz-30MHz)

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

3.2.5 Test results(30MHz-1GHz)


Test Mode:	TM1	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

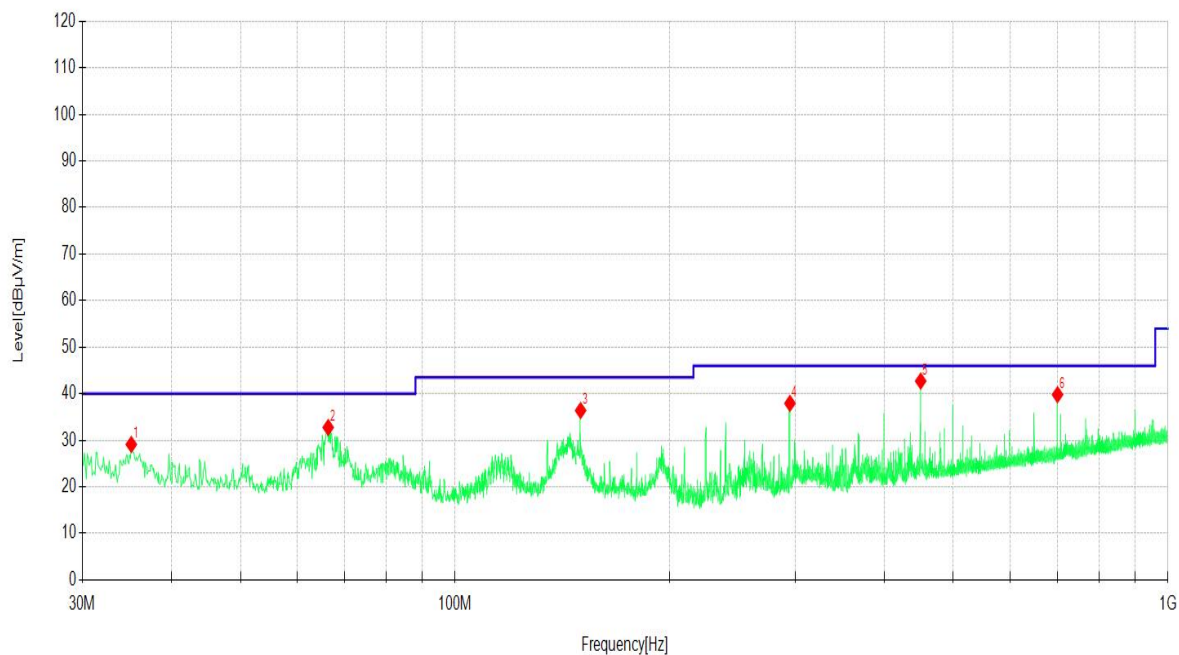

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.14	9.68	19.43	29.11	40.00	10.89	QP	Horizontal
2	66.38	15.25	17.51	32.76	40.00	7.24	QP	Horizontal
3	150.00	15.60	20.79	36.39	43.50	7.11	QP	Horizontal
4	294.93	17.83	20.10	37.93	46.00	8.07	QP	Horizontal
5	449.96	18.73	23.99	42.72	46.00	3.28	QP	Horizontal
6	700.05	11.45	28.36	39.81	46.00	6.19	QP	Horizontal

Remark: 1. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
 2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]

Test Mode:	TM1	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

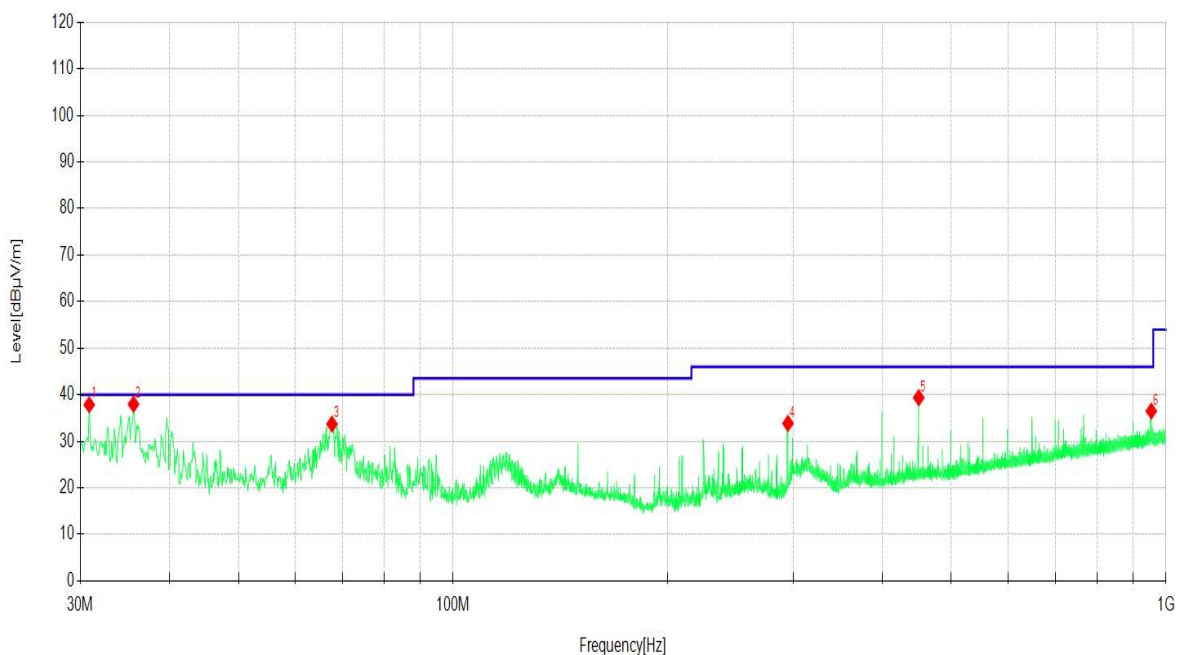


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.87	18.78	19.07	37.85	40.00	2.15	QP	Vertical
2	35.63	18.48	19.48	37.96	40.00	2.04	QP	Vertical
3	67.64	16.49	17.20	33.69	40.00	6.31	QP	Vertical
4	294.93	13.74	20.10	33.84	46.00	12.16	QP	Vertical
5	449.96	15.37	23.99	39.36	46.00	6.64	QP	Vertical
6	953.82	4.98	31.51	36.49	46.00	9.51	QP	Vertical

Remark: 1. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
 2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]

3.2.6 Test results(1GHz-18GHz)


Test Mode:	TM1	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

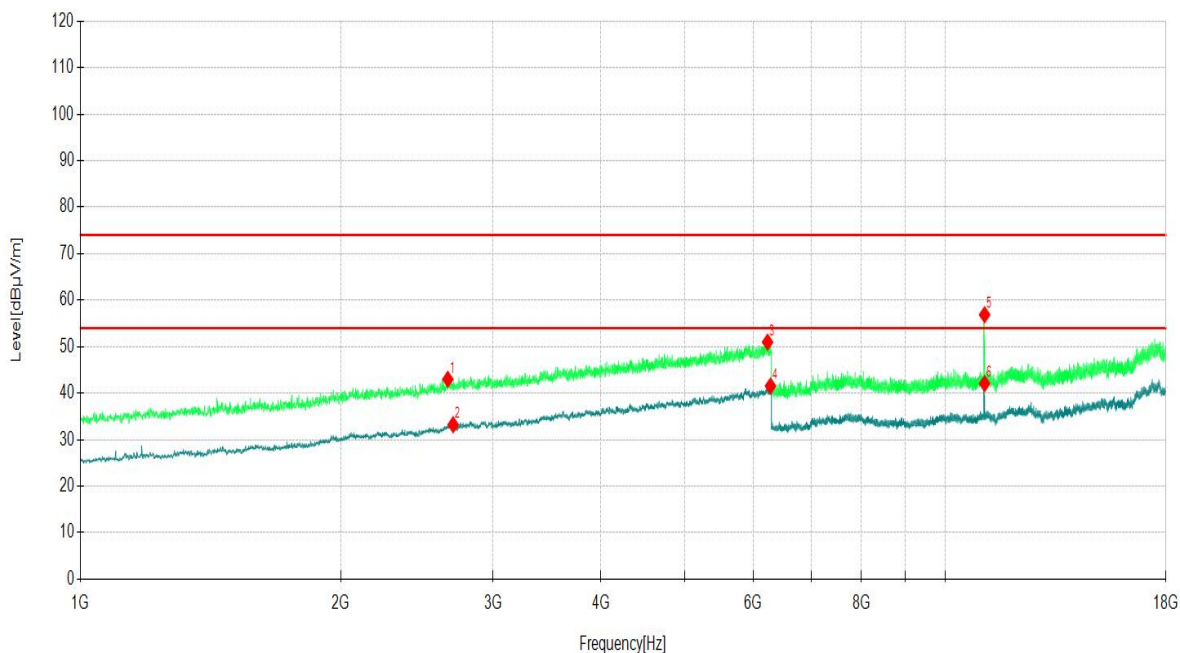

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2660.31	45.91	-2.92	42.99	74.00	31.01	PK	Horizontal
2	2698.32	36.14	-2.92	33.22	54.00	20.78	AV	Horizontal
3	6231.99	43.42	7.56	50.98	74.00	23.02	PK	Horizontal
4	6281.00	34.37	7.16	41.53	54.00	12.47	AV	Horizontal
5	11106.18	44.77	12.10	56.87	74.00	17.13	PK	Horizontal
6	11106.18	29.96	12.10	42.06	54.00	11.94	AV	Horizontal

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
 2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 4. Margin(dB) = Limit(dBuV/m) - Level (dBuV/m)

Test Mode:	TM1	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

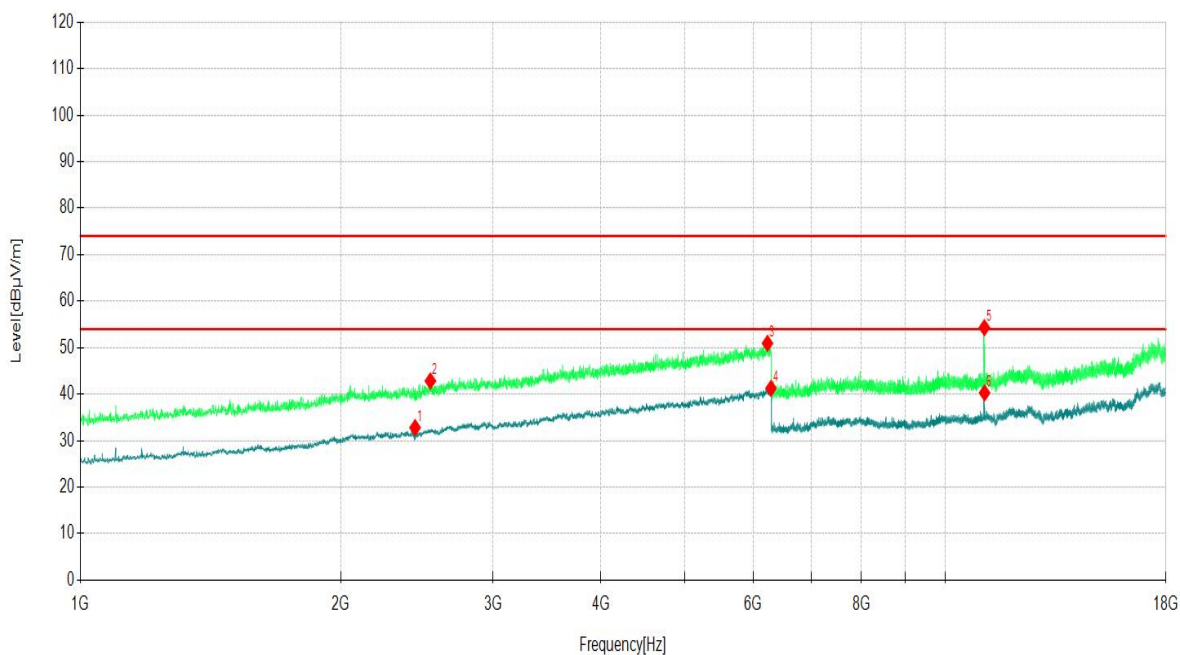


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2438.27	36.40	-3.60	32.80	54.00	21.20	AV	Vertical
2	2539.29	46.30	-3.46	42.84	74.00	31.16	PK	Vertical
3	6230.99	43.40	7.53	50.93	74.00	23.07	PK	Vertical
4	6289.00	33.58	7.67	41.25	54.00	12.75	AV	Vertical
5	11101.30	42.13	12.17	54.30	74.00	19.70	PK	Vertical
6	11106.18	28.18	12.10	40.28	54.00	13.72	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit(dBuV/m) - Level (dBuV/m)

3.2.7 Test results(18GHz-40GHz)


Test Mode:	TM1	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

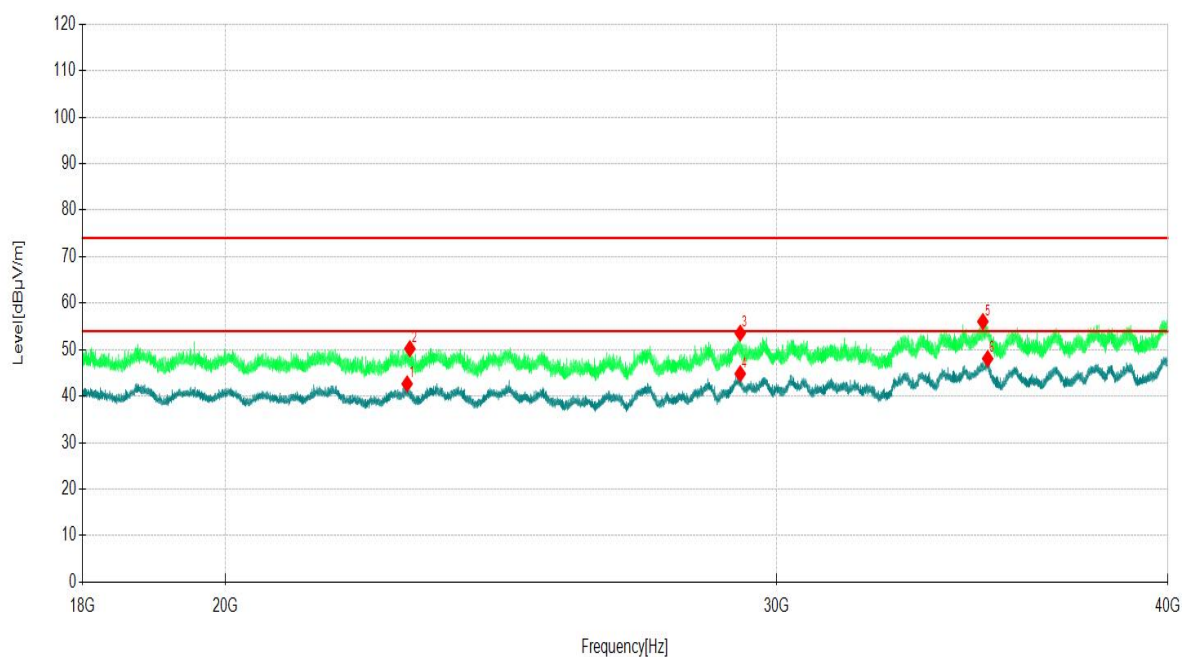

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22857.22	47.17	-4.52	42.65	54.00	11.35	AV	Horizontal
2	22903.22	54.67	-4.47	50.20	74.00	23.80	PK	Horizontal
3	29203.51	55.66	-2.11	53.55	74.00	20.45	PK	Horizontal
4	29203.51	46.93	-2.11	44.82	54.00	9.18	AV	Horizontal
5	34908.77	57.01	-0.97	56.04	74.00	17.96	PK	Horizontal
6	35032.77	49.02	-0.95	48.07	54.00	5.93	AV	Horizontal

Remark:1. The emission levels of other frequencies were greater than 20dB margin.
 2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 4. Margin(dB) = Limit(dBuV/m) - Level (dBuV/m)

Test Mode:	TM1	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

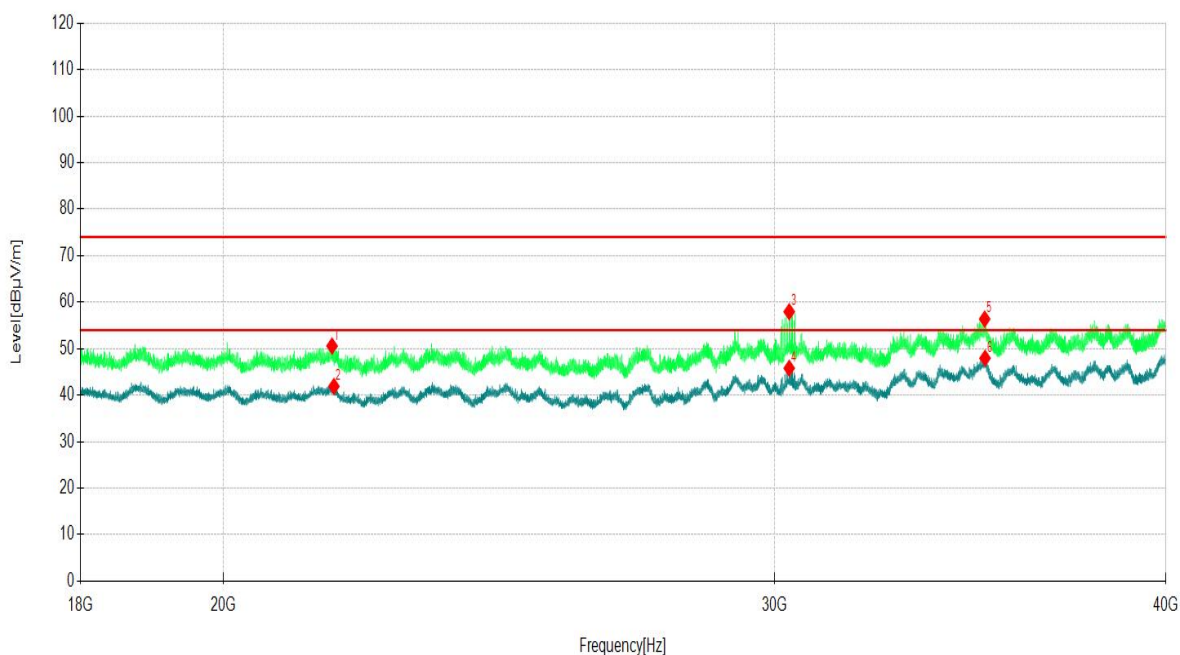


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21661.17	55.45	-4.88	50.57	74.00	23.43	PK	Vertical
2	21691.17	46.66	-4.77	41.89	54.00	12.11	AV	Vertical
3	30319.56	60.92	-2.98	57.94	74.00	16.06	PK	Vertical
4	30319.56	48.77	-2.98	45.79	54.00	8.21	AV	Vertical
5	35006.77	57.32	-0.96	56.36	74.00	17.64	PK	Vertical
6	35016.77	48.90	-0.95	47.95	54.00	6.05	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
 2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 4. Margin(dB) = Limit(dBuV/m) - Level (dBuV/m)

3.2.8 Test results(40GHz-200GHz)

Only showing the highest value, “worst case” (Horizontal polarity-TM1)

Test Mode:	TM1	Frequency Range	40GHz-60GHz
------------	-----	-----------------	-------------

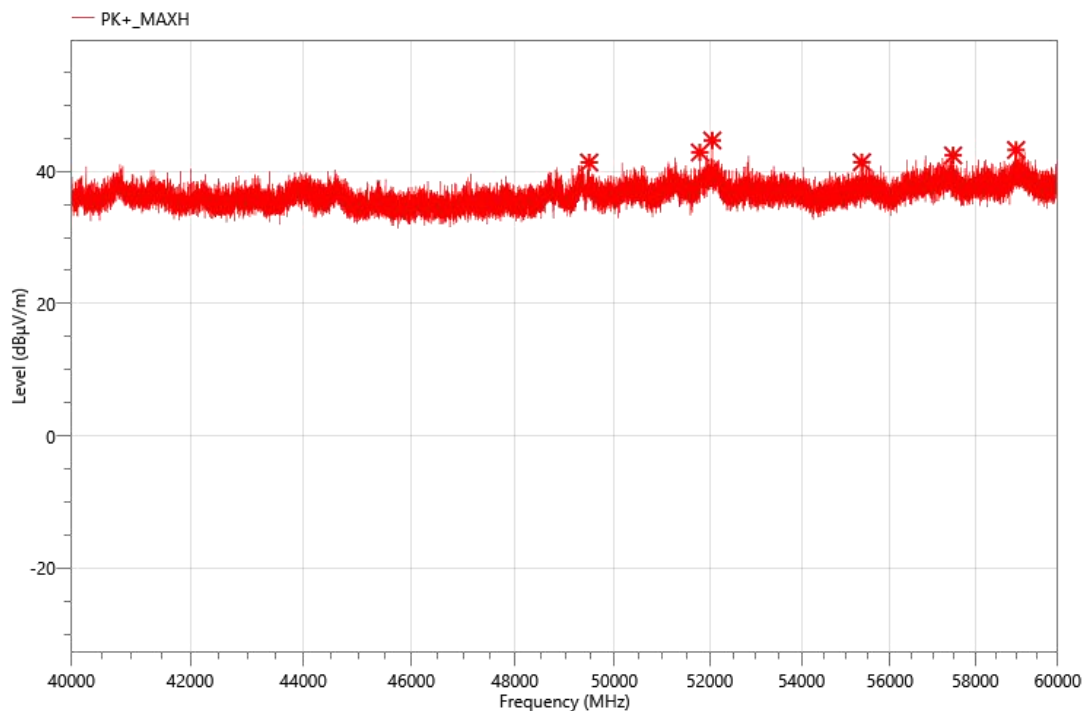


Freq. (MHz)	Reading @1m (dBμV)	Corr. (dB/m)	Meas. @1m (dBμV/m)	Meas. @3m (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
49486.5	23.91	17.43	41.34	31.8	0.001	90	H
51791.5	23.91	18.95	42.86	33.32	0.001	90	H
52055	24.27	20.4	44.67	35.13	0.001	90	H
55357	22.64	18.74	41.38	31.84	0.001	90	H
57473	22.68	19.73	42.41	32.87	0.001	90	H
58981	22.16	21.07	43.23	33.69	0.001	90	H

Note:

1. Meas.@1m(dBμV/m) = Reading@1m(dBμV) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas.@3m = Mea.@1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Test Mode:	TM1	Frequency Range	61.56GHz-90GHz
------------	-----	-----------------	----------------

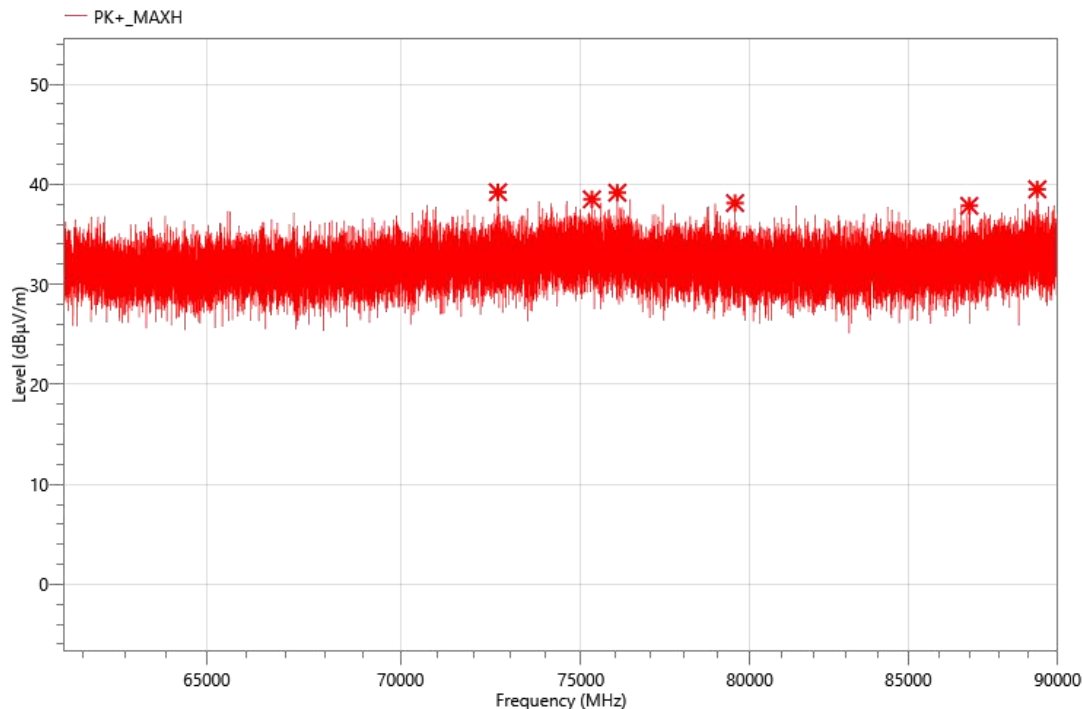


Freq. (MHz)	Reading @1m (dBμV)	Corr. (dB/m)	Meas. @1m (dBμV/m)	Meas. @3m (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
72655.86	15.33	23.88	39.21	29.67	0.001	90	H
75314.29	14.21	24.29	38.5	28.96	0.001	90	H
76048.75	14.76	24.4	39.16	29.62	0.001	90	H
79550.43	14.63	23.5	38.13	28.59	0.001	90	H
87005.97	13.44	24.41	37.85	28.31	0.001	90	H
89296.82	13.94	25.56	39.5	29.96	0.001	90	H

Note:

1. Meas.@1m(dBμV/m) = Reading@1m(dBμV) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas.@3m = Mea.@1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Test Mode:	TM1	Frequency Range	90GHz-140GHz
------------	-----	-----------------	--------------

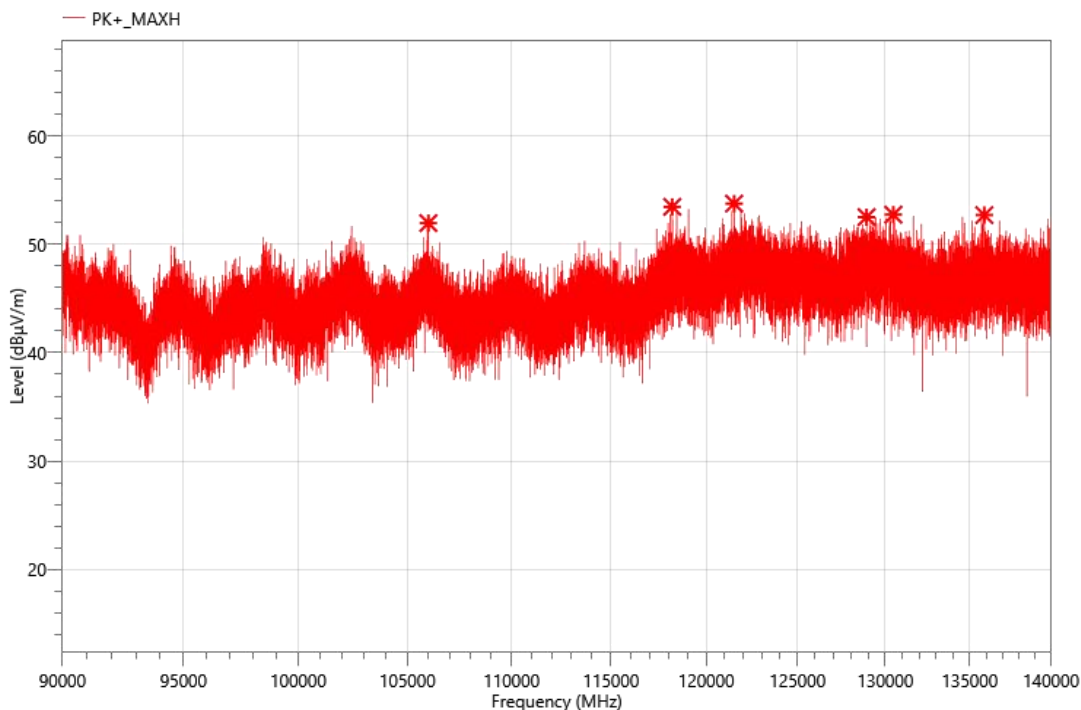


Freq. (MHz)	Reading @1m (dBμV)	Corr. (dB/m)	Meas. @1m (dBμV/m)	Meas. @3m (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
105988.7	24.29	27.69	51.98	42.44	0.005	90	H
118193.7	25.2	28.28	53.48	43.94	0.007	90	H
121508.7	24.72	29.06	53.78	44.24	0.007	90	H
128921.2	23.1	29.43	52.53	42.99	0.005	90	H
130470	23.45	29.31	52.76	43.22	0.006	90	H
135887.5	23.17	29.55	52.72	43.18	0.006	90	H

Note:

1. Meas.@1m(dBμV/m) = Reading@1m(dBμV) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas.@3m = Mea.@1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Test Mode:	TM1	Frequency Range	140GHz-200GHz
------------	-----	-----------------	---------------

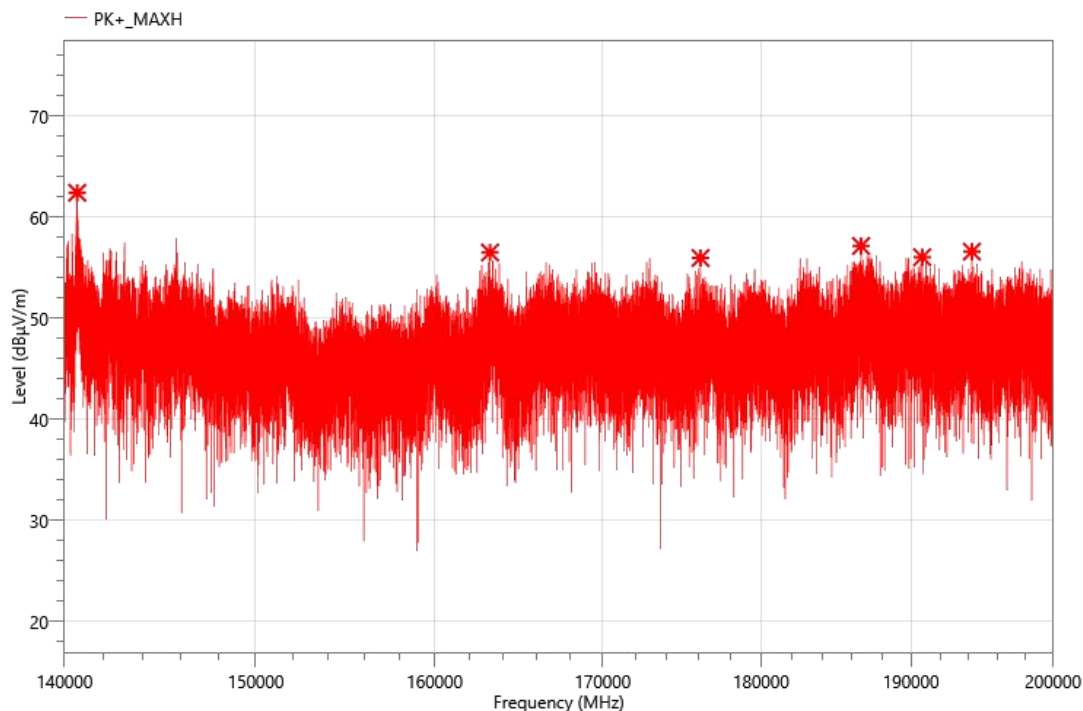

Freq. (MHz)	Reading @1m (dBμV)	Corr. (dB/m)	Meas. @1m (dBμV/m)	Meas. @3m (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
140643.5	31.55	30.88	62.43	52.89	0.052	90	H
163233.5	24.36	32.15	56.51	46.97	0.013	90	H
176111	24.57	31.4	55.97	46.43	0.012	90	H
186612.5	23.99	33.17	57.16	47.62	0.015	90	H
190781	23.36	32.69	56.05	46.51	0.012	90	H
194228	24.47	32.13	56.6	47.06	0.013	90	H

Note:

1. Meas.@1m(dBμV/m) = Reading@1m(dBμV) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas.@3m = Mea.@1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

3.3 DUTY CYCLE, OFF TIME REQUIREMENT

3.3.1 Limit

According to § 15.255(c)(2)(ii)

The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds.

3.3.2 Test Procedure

The duty cycle was tested with the spectrum analyzer set to zero-span.

3.3.3 Test setup

See section 2.7 of this report.

3.3.4 Test results

Burst Period in 33ms(ms)	TX ON Time (ms)	TX OFF Time (ms) *	TX OFF Limit(ms)	Verdict
33	11.97	21.03	≥ 16.5	PASS

*OFF Time(ms) = Burst Period in 33ms(ms)- TX ON Time (ms)

Burst Period (ms)	TX ON Time in a Burst Period(ms)	TX OFF interval Time (ms) *	TX OFF interval Limit(ms)	Verdict
71.9	12.02	59.88	2	PASS

TX OFF interval Time (ms) = Burst Period (ms) - TX ON Time in a Burst Period(ms)



3.4 BANDWIDTH MEASUREMENT

3.4.1 Limits

According to § 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through §15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, **or** whatever bandwidth may otherwise be specified in the **specific rule section** under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

According to KDB 364244 D01 Meas 15.255 Radars v01r01

For pulsed transmitters, the fundamental emission bandwidth is defined at the -10 dB points specified in §15.255(c)(3)

For other than pulsed radar transmitters, the fundamental emission bandwidth is presumed to be “the width of a frequency band such that, below the lower and above the upper-frequency limits, the mean powers emitted are each equal to a specified percentage $\beta/2$ of the total mean power of a given emission. Unless otherwise specified in an ITU–R Recommendation for the appropriate class of emission, the value of $\beta/2$ should be taken as 0.5%,” as defined in §2.1(c) of the FCC rules. This is also known as the 99% occupied bandwidth (OBW).

According to § 15.255(c)(2)(ii)

57.0-61.56 GHz: the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;

3.4.2 Measurement procedure

99% OCCUPIED BANDWIDTH MEASUREMENT PARAMETER	
Detector:	Peak
Resolution bandwidth:	8 MHz (The analyzer limits maximum RBW at 8 MHz.)
Video bandwidth:	50 MHz
Trace-Mode:	Max Hold
Sweep	Auto couple.

Measurement procedures:Bandwidth: ANSI C63.10-2020 6.9 / 9.3


Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower)

3.4.3 Test setup

See section 2.7 of this report.

3.4.4 Test results

Test Mode	99% Occupied Bandwidth Lower(GHz)	99% Occupied Bandwidth Upper(GHz)	99% Occupied Bandwidth (GHz)	Lower limit (GHz)	Upper limit (GHz)	Verdict
TM1	60.00840	60.98205	973.66	57	61.56	Pass

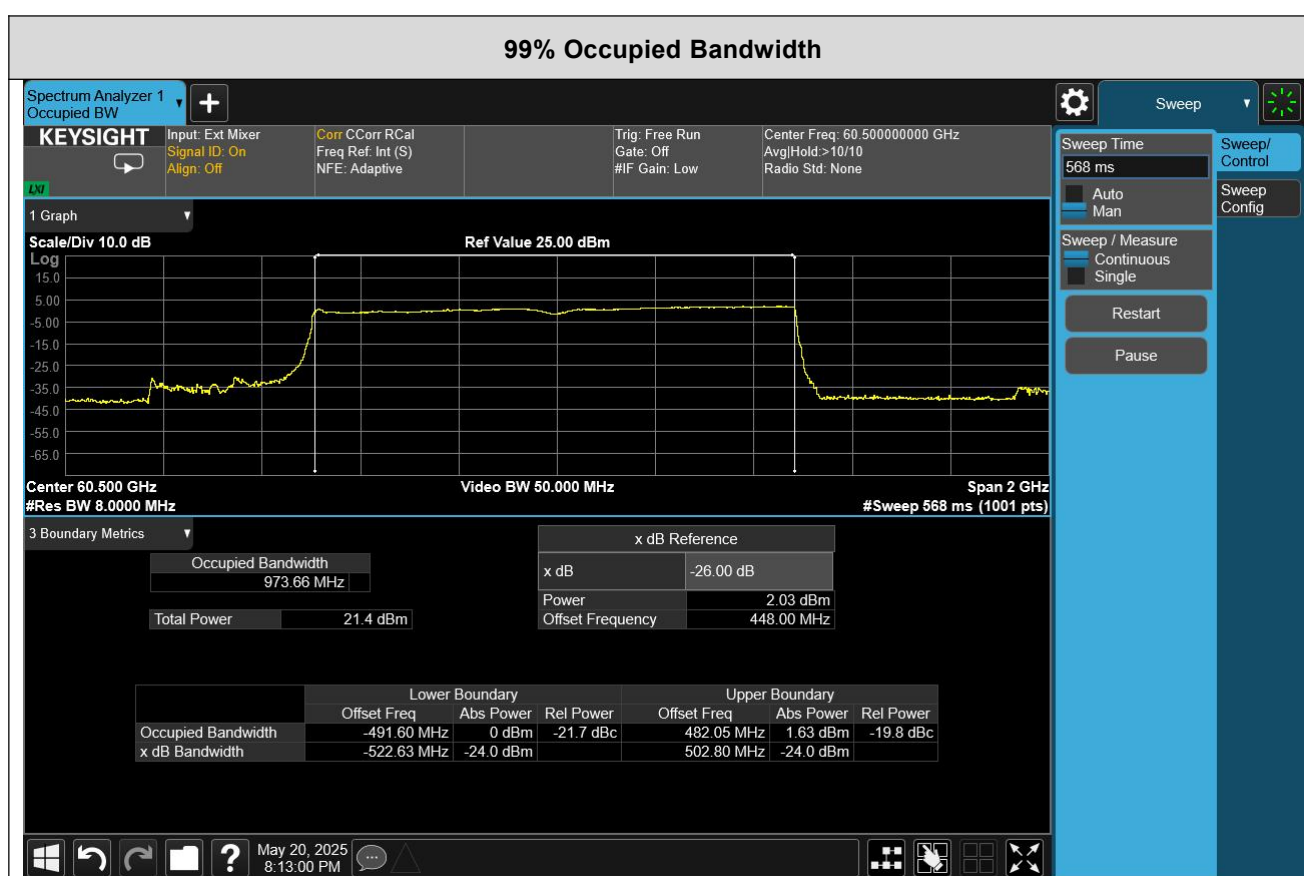

3.5 EIRP POWER MEASUREMENT

3.5.1 Limits

According to § 15.255(c)(2)(ii)

57.0-61.56 GHz: the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm.

3.5.2 Measurement procedure

Test Settings

1. Radiated power measurements are performed using the signal analyzer's swept mode measurement capability for signals with continuous operation.
2. RBW = 10MHz
3. VBW $\geq 3 \times$ RBW
4. Span as required, enough to observe the fundamental spike around 61.5 GHz
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector and Trace mode = Suitable for peak and average measurements respectively over 100 sweeps
7. The trace was allowed to stabilize

Method of measurement:

Refer as TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

FMCW desensitization factor:

Desensitization factor and sweep time considerations for measurements of FMCW signals in ANSI C63.10-2020 Annex L

The derivation of the FMCW desensitization factor is given in Keysight Application Note 5952-1039 Appendix B.


3.5.3 Test setup

See section 2.7 of this report.

3.5.4 Test results

Test Mode:	Level (dBm)	Desensitization factor (dB)	Peak EIRP (dBm)	Peak EIRP Limit(dBm)	Verdict
TM1	2.49	0	2.49	20	PASS

Peak EIRP (dBm) = desensitization factor (dB) + Level(dBm)

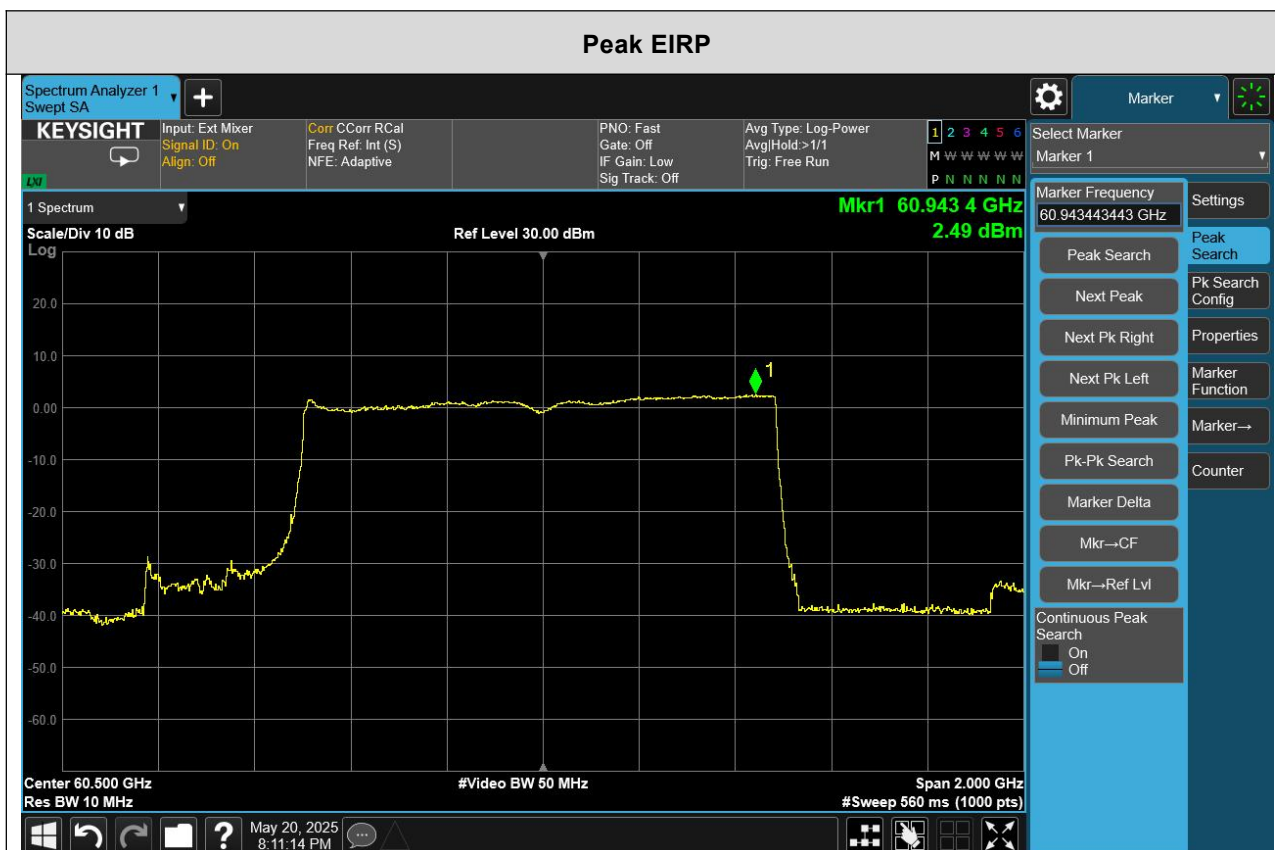

FMCW desensitization factor = $-20 * \text{Log}(\alpha)$

$$\alpha = \frac{1}{\sqrt[4]{1 + \left(\frac{2\ln(2)}{\pi}\right)^2 \left(\frac{F_s}{T_s B^2}\right)^2}}$$

F_s = Sweep width(99%OBW)

T_s = Sweep time(Chirp)

B = 3 dB IF bandwidth(RBW)

3.6 FREQUENCY STABILITY

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency range, 57GHz – 61.56GHz.

3.6.2 Measurement Procedure

Method of measurement: Refer as ANSI C63.10-2020 clause 9.5

3.6.3 Test setup

See section 2.7 of this report.

3.6.4 Test results

TM1

FREQUENCY STABILITY					
Temperature (°C)	Voltage (Volt)	FL (GHz)	FH (GHz)	Limit (GHz)	Result
50	Normal Voltage	60.0225	60.9773	57-61.56GHz	PASS
40		60.0214	60.9779		
30		60.0245	60.9788		
20		60.0205	60.9758		
10		60.0233	60.9773		
0		60.0222	60.9787		
-10		60.0221	60.9774		
-20		60.0220	60.9762		
-30		60.0207	60.9772		
20	115%	60.0240	60.9779		
20	85%	60.0241	60.9781		

3.7 ANTENNA REQUIREMENT

3.7.1 LIMITS

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.7.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is **Antenna in Package** and that no antenna other than that furnished by the responsible party shall be used with the device

4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).

5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>