

TEST REPORT

Applicant: Sichuan AI-Link Technology Co., Ltd
Address: Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Equipment Type: WIFI module
Model Name: WF-R12C-UWD2L (refer section 2.4)
Brand Name: AILINK
FCC ID: 2AOKI-WFR12CUWD2
IC Number: 23460-WFR12CUWD2
47 CFR Part 15 Subpart E
Test Standard: RSS-Gen Issue 5
RSS-247 Issue 2
(refer section 3.1)
Test Date: Mar. 05, 2022 ~ Mar. 18, 2022
Date of Issue: Mar. 24, 2022


ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie zhu

Checked by: Ye Hongji

Approved by: Liao Jianming
(Technical Director)



Revision History		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Mar. 24, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	Administrative Data (GENERAL INFORMATION).....	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Technical Information	6
2.6	Additional Instructions.....	8
2.7	Channel List	10
3	SUMMARY OF TEST RESULTS	13
3.1	Test Standards	13
3.2	Test Verdict	13
4	GENERAL TEST CONFIGURATIONS	14
4.1	Test Environments.....	14
4.2	Test Equipment List.....	14
4.3	Test Software List.....	15
4.4	Measurement Uncertainty.....	15
4.5	Description of Test Setup	16
5	TEST ITEMS	19
5.1	RF Output Power.....	19
5.2	Emission Bandwidth and 6 dB Bandwidth.....	21
5.3	Power Spectral density (PSD)	22

5.4	Conducted Emission.....	23
5.5	Radiated Spurious Emissions and Band Edge (Restricted-band).....	24
ANNEX A	TEST RESULT	29
A.1	RF Output Power.....	29
A.2	Emission Bandwidth & 99% Bandwidth	29
A.3	6 dB Bandwidth	29
A.4	Power Spectral Density	29
A.5	Conducted Emissions	29
A.6	Radiated Spurious Emissions and Band Edge (Restricted-band).....	30
ANNEX B	TEST SETUP PHOTOS	105
ANNEX C	EUT EXTERNAL PHOTOS.....	105
ANNEX D	EUT INTERNAL PHOTOS.....	105

1 Administrative Data (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park Shahe Xi Road, Nanshan District Shenzhen, Guangdong Province, People's Republic of China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park Shahe Xi Road, Nanshan District Shenzhen, Guangdong Province, People's Republic of China
Description	All measurement facilities used to collect the measurement data are located at Block B, 1/F, Baisha Science and Technology Park Shahe Xi Road, Nanshan District Shenzhen, Guangdong Province, People's Republic of China

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Sichuan AI-Link Technology Co., Ltd
Address	Anzhou Industrial Park, Mianyang, Sichuan, P.R.C

2.2 Manufacturer Information

Manufacturer	Sichuan AI-Link Technology Co., Ltd
Address	Anzhou Industrial Park, Mianyang, Sichuan, P.R.C

2.3 Factory Information

Factory	Sichuan AI-Link Technology Co., Ltd
Address	Anzhou Industrial Park, Mianyang, Sichuan, P.R.C

2.4 General Description for Equipment under Test (EUT)

EUT Name	WIFI module
Model Name Under Test	WF-R12C-UWD2L
Series Model Name	WF-R12C-UWD3L
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name.
Serial Number	2022031200001
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	2.4G WIFI 802.11b, 802.11g and 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40) and 802.11ac(VHT20/40/80), U-NII-1/2A/2C/3
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	U-NII-1: 5150 MHz to 5250 MHz, U-NII-2A: 5250 MHz to 5350 MHz, U-NII-2C: 5470 MHz to 5725 MHz, U-NII-3: 5725 MHz to 5850 MHz	
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Modulation technology	OFDM	
Modulation Type	256QAM, 64QAM, 16QAM, BPSK, QPSK	
Product Type	Indoor and Portable	
Transfer Rate (Mbps) (Single RF path)	802.11a: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to VHT-MCS9	
Channel Bandwidth	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80 MHz	
Maximum Output Power	23.69 dBm	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11a Multi Input Multi Output (MIMO) for 802.11n/ac	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated for 802.11a Categorization as Uncorrelated for 802.11n/ac	
Antenna Type	Antenna 0 Antenna 1	PIFA Antenna
Antenna Gain	Model: TX- DM85BD113B 63M	5.52 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
	Model: TX- DM735BD113 B63M	0.97 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Total directional gain	For power spectral density(PSD) measurements	Correlated: 5.52 dBi Formulas: Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain. Uncorrelated: 5.52 dBi

		Formulas: Directional gain = $GANT + 10 \log(NANT/NSS)$ dB. NSS =2, GANT set equal to the gain of the antenna having the highest gain.
	For power measurements	<p>Correlated: 5.52 dBi</p> <p>Formulas: Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.</p> <p>Uncorrelated: Formulas: Directional gain = $GANT + 10 \log(NANT/NSS)$ dB. NSS =2, GANT set equal to the gain of the antenna having the highest gain.</p>
About the Product		The equipment is WIFI module, intended for used with information technology equipment.

Antenna Information:

Antenna Manufacturer	Model	Antenna Type	Antenna Gain
B&T	TX-DM85BD113B63M	PIFA	5.52 dBi
	TX-DM735BD113B63M	PIFA	0.97 dBi
Note: After technology evaluation, the max gain antenna was choose as external antenna for all test.			

2.6 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	MP Tool		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220

U-NII-1 (5150 - 5250 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH36	5180	92.00
11a	CH44	5220	94.00
11a	CH48	5240	94.00
11n (HT20)	CH36	5180	92.00
11n (HT20)	CH44	5220	94.00
11n (HT20)	CH48	5240	94.00
11n (HT40)	CH38	5190	85.00
11n (HT40)	CH46	5230	92.00
11ac (VHT80)	CH42	5210	75.00

U-NII-2A (5250 - 5350 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH52	5260	96.00
11a	CH60	5300	96.00
11a	CH64	5320	93.00
11n (HT20)	CH52	5260	96.00
11n (HT20)	CH60	5300	96.00
11n (HT20)	CH64	5320	93.00
11n (HT40)	CH54	5270	94.00
11n (HT40)	CH62	5310	90.00
11ac (VHT80)	CH58	5290	75.00

U-NII-2C (5470 - 5725 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH100	5500	95.00
11a	CH116	5580	96.00
11a	CH140	5700	80.00
11n (HT20)	CH100	5500	95.00
11n (HT20)	CH116	5580	96.00
11n (HT20)	CH140	5700	79.00
11n (HT40)	CH102	5510	79.00
11n (HT40)	CH118	5590	91.00
11n (HT40)	CH134	5670	92.00
11ac (VHT80)	CH106	5530	69.00
11ac (VHT80)	CH122	5610	78.00

U-NII-3 (5725 - 5850 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH149	5745	96.00
11a	CH157	5785	98.00
11a	CH165	5825	98.00
11n (HT20)	CH149	5745	96.00
11n (HT20)	CH157	5785	98.00
11n (HT20)	CH165	5825	98.00
11n (HT40)	CH151	5755	92.00
11n (HT40)	CH159	5795	94.00
11ac (VHT80)	CH155	5775	73.00

2.7 Channel List

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	58	5290
44	5220	54	5270	106	5530
48	5240	62	5310	122	5610
52	5260	102	5510	138	5690
56	5280	110	5550	155	5775
60	5300	118	5590		
64	5320	126	5630		
100	5500	134	5670		
104	5520	151	5755		
108	5540	159	5795		
112	5560	159	5795		
116	5580				
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

Note: This report equipment will not transmit in the 5600-5650 MHz frequency band when used in Canada. This restriction is to protect weather radars operating in this frequency band.

The Lowest frequency, the middle frequency and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(VHT20)

U-NII-1 (5150 - 5250 MHz)			U-NII-2A (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	52	Low	5260
44	Mid	5220	60	Mid	5300
48	High	5240	64	High	5320

U-NII-2C (5470 - 5725 MHz)			U-NII-3 (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
100	Low	5500	149	Low	5745
116	Mid	5580	157	Mid	5785
140	High	5700	165	High	5825

For 802.11n(HT40)/ac(VHT40)

U-NII-1 (5150 - 5250 MHz)			U-NII-2A (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	54	Low	5270
46	High	5230	62	High	5310

U-NII-2C (5150 - 5250 MHz)			U-NII-3 (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
102	Low	5510	151	Low	5755
118	Mid	5590	159	High	5795
134	High	5670			

For 802.11ac(VHT80)

U-NII-1 (5150 - 5250 MHz)			U-NII-2A (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
42	Mid	5210	58	Mid	5290

U-NII-2C (5470 - 5725 MHz)			U-NII-3 (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
106	Low	5530	155	Mid	5775
122	High	5610			

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Modulation Type	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
				Channel	Channel	Channel	Channel
RF Output Power	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
Emission Bandwidth & 99% Occupied Bandwidth	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
6 dB bandwidth	11a	6	BPSK	N/A	N/A	N/A	165/157/149
	11n(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11n(40 MHz)	13.5		N/A	N/A	N/A	159/151
	11ac(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11ac(40 MHz)	13.5		N/A	N/A	N/A	159/151
	11ac(80 MHz)	29.3		N/A	N/A	N/A	155
Power Spectral Density	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
Radiated Spurious Emissions	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
Band Edge (Restricted-band)	11a	6	BPSK	48/36	64/52	140/100	165/149
	11n(20 MHz)	6.5		48/36	64/52	140/100	165/149
	11n(40 MHz)	13.5		46/38	62/54	134/102	159/151
	11ac(20 MHz)	6.5		48/36	64/52	140/100	165/149
	11ac(40 MHz)	13.5		46/38	62/54	134/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E	Unlicensed National Information Infrastructure Devices
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	KDB Publication 789033 D02v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
5	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
6	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	RSS Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 6.2	--	Pass ^{Note1}
2	RF Output Power	15.407(a)	RSS-247, 6.2	ANNEX A.1	Pass ^{Note 4}
3	Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	RSS-247, 6.2	ANNEX A.2	Pass ^{Note 4}
4	6 dB bandwidth	15.407(e)	RSS-247, 6.2	ANNEX A.3	Pass ^{Note 4}
5	Power Spectral Density	15.407(a)	RSS-247, 6.2	ANNEX A.4	Pass ^{Note 4}
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass ^{Note 4}
7	Radiated Spurious Emissions and Band Edge (Restricted-band)	15.407(b)	RSS-247, 6.2	ANNEX A.6	Pass
8	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	N/A ^{Note2}

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: Only radio communication receivers operating in stand-alone mode within the U-NII-30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note 3: Under all normal operating conditions specified in the user manual, frequency stability can keep radiation within the operating frequency band.

Note 4: Compared with the EUT of test report 200801864SHA-002, the EUT of this report replacement antennas. Other hardware circuit and software are the same as EUT referred in test report 200801864SHA-002. Therefore, only the 1 test items, which include Radiated Spurious Emission and Band Edge (Restricted-band) were tested in this report, other test datas please refer to report 200801864SHA-002, which was issued by Intertek Testing Services Shanghai on Oct. 22, 2020.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2021.06.01	2022.05.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2021.08.09	2022.08.08
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2022.02.09	2023.02.08
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2021.08.24	2022.08.23
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2021.06.01	2022.05.31
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2021.09.13	2022.09.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.10.10	2022.10.09
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.08	2022.06.07
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.04.16	2024.04.15
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.08.20	2024.08.19
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2021.07.02	2023.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2022.02.19	2024.09.03
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.08.15	2024.08.14
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2022.01.04	2023.01.03
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.09.04	2024.09.09
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2021.08.15	2024.08.14
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

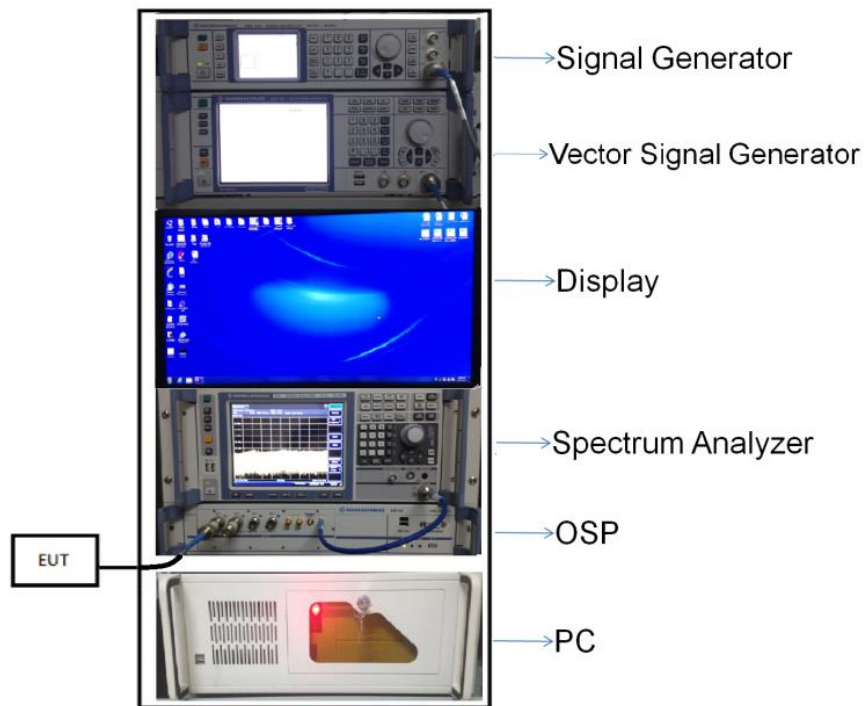


(Diagram 1)

4.5.2 For AC Power Supply Port Test

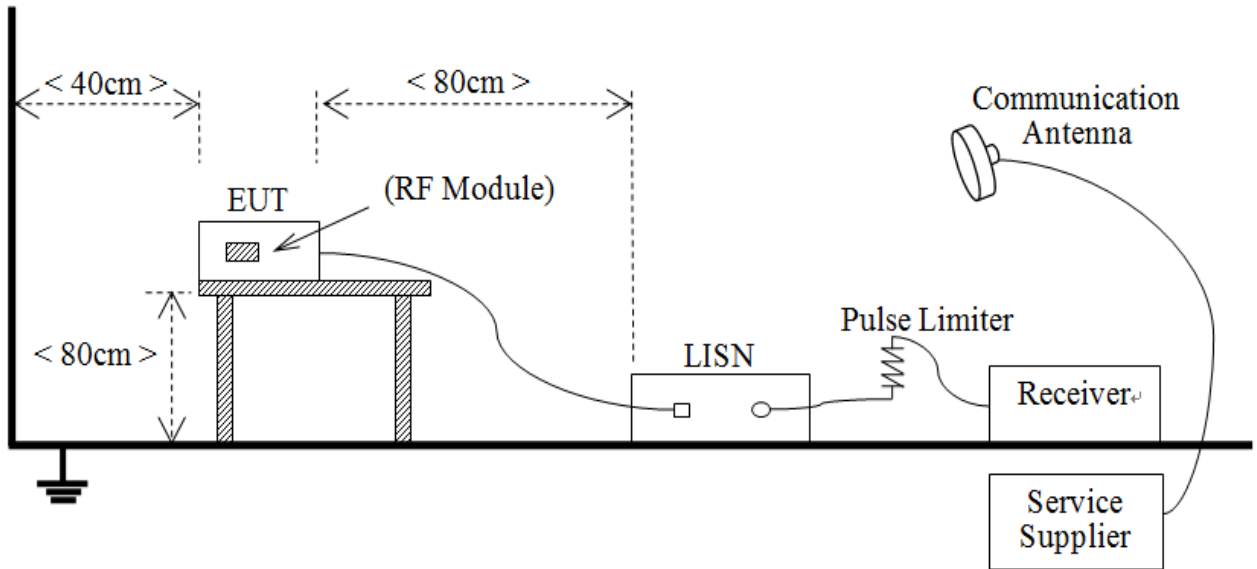


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

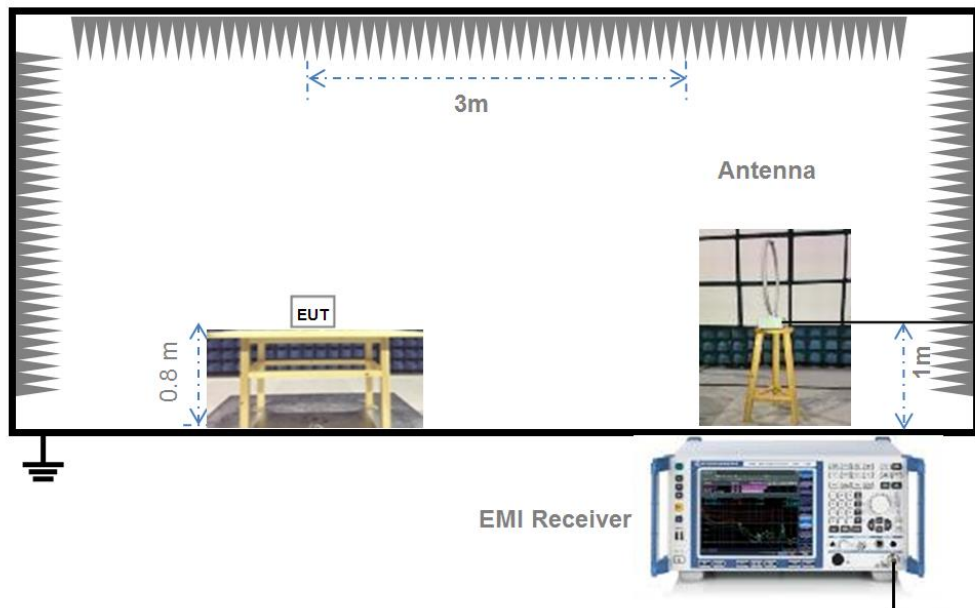


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

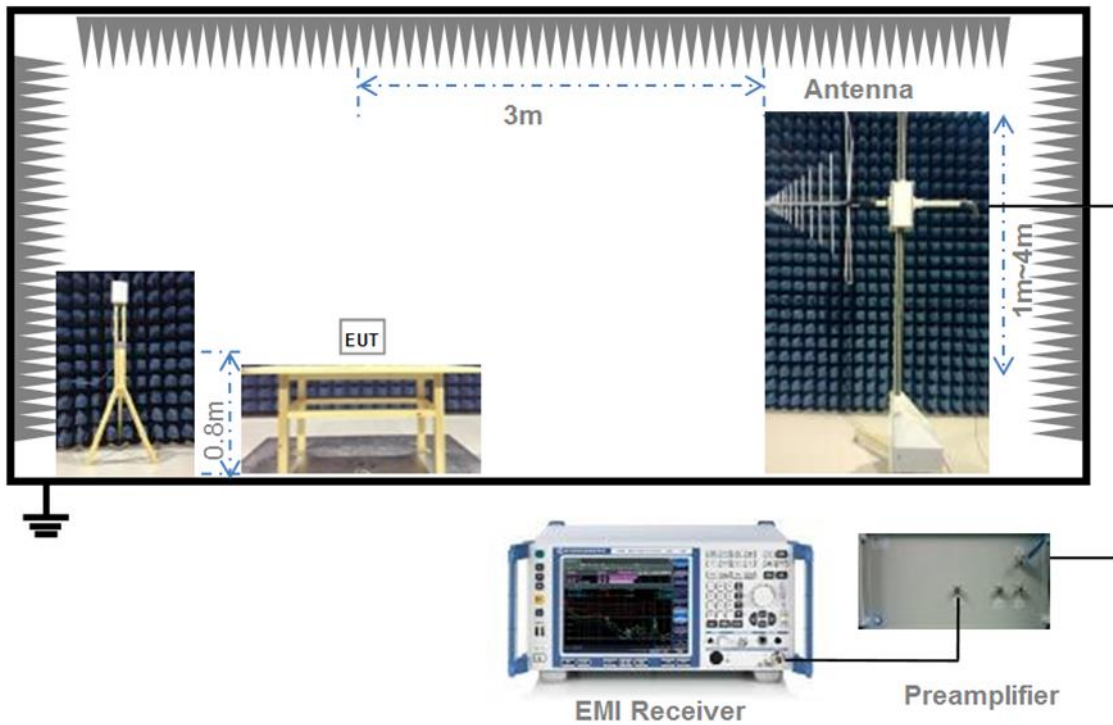

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

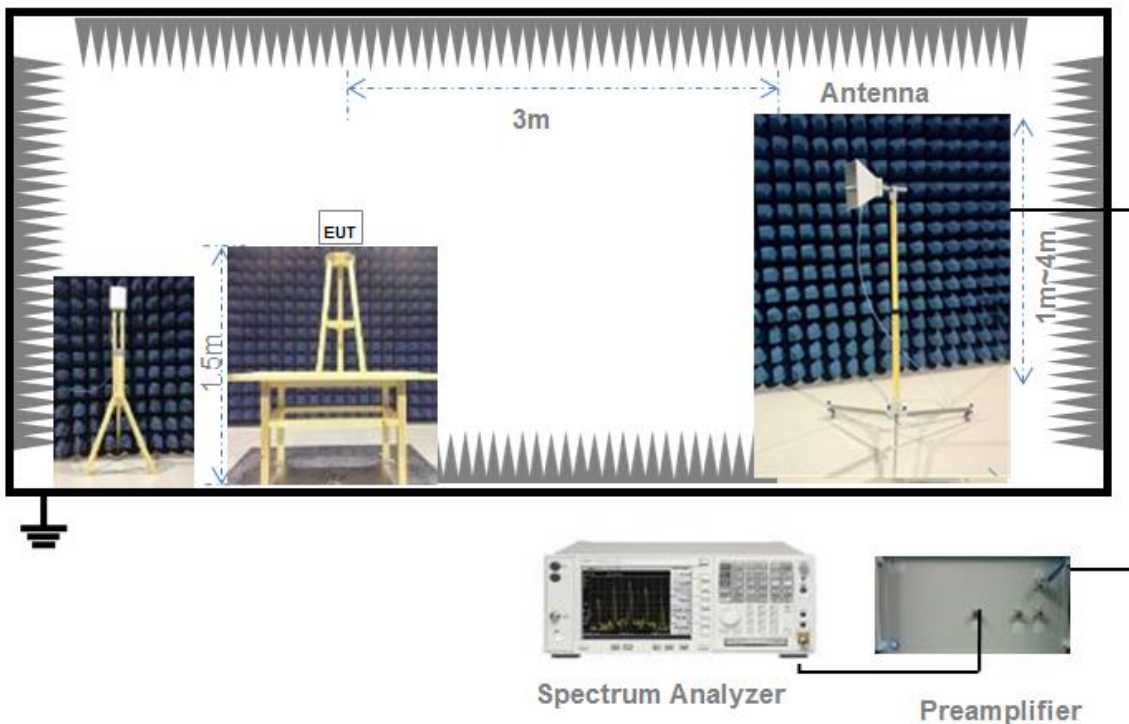

(Diagram 5)

5 TEST ITEMS

5.1 RF Output Power

5.1.1 Test Limit

FCC §15.407(a)

The maximum conducted output power should not exceed:

Frequency Band (MHz)	Limit
5150-5250	250 mW
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 26 dB emissions bandwidth in MHz.	

RSS-247, 6.2

The maximum conducted output power shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 99% emissions bandwidth in MHz.	

The maximum e.i.r.p. shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	200 mW or 10 dBm + 10log B, whichever is less.
5250-5350	1W or 17 dBm + 10log B, whichever is less.
5470-5725	1W or 17 dBm + 10log B, whichever is less.
5725-5850	N/A
Note: Where "B" is the 99% emissions bandwidth in MHz.	

5.1.2 Test Setup

The section 4.5.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

The maximum peak conducted output power may be measured using a broadband Average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

The E.I.R.P used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Emission Bandwidth and 6 dB Bandwidth

5.2.1 Limit

FCC §15.407(a), RSS-247, 6.2

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2.2 Test Setup

The test setup photo please refer to 4.5.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set VBW $\geq 3 \times$ RBW,
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set Span = 1.5 times to 5.0 times the OBW
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = Max hold.
5. Use the 99% power bandwidth function of the instrument.

6 dB bandwidth

1. Set RBW = 100 kHz, VBW = 300 kHz.
2. Detector = Peak. Trace mode = Max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.4 Test Result

Please refer to ANNEX A.2 and ANNEX A.3.

5.3 Power Spectral density (PSD)

5.3.1 Limit

FCC §15.407(a)

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	11 dBm/MHz
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

RSS-247, 6.2

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

The e.i.r.p. spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	10 dBm/MHz
5250-5350	N/A
5470-5725	N/A
5725-5850	N/A

5.3.2 Test Setup

The section 4.5.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.

1. Set RBW = 510 kHz/1 MHz, VBW \geq 3*RBW, Sweep time = Auto, Detector = RMS.
2. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak marker function to determine the maximum amplitude level.
4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.3.4 Test Result

Please refer to ANNEX A.4.

5.4 Conducted Emission

5.4.1 Limit

FCC §15.207, RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the U-NII-150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.4.2 Test Setup

The section 4.5.2 (Diagram 2) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.4.4 Test Result

Please refer to ANNEX A.5.

5.5 Radiated Spurious Emissions and Band Edge (Restricted-band)

5.5.1 Limit

FCC §15.209 & 15.407(b), RSS-247, 6.2

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note¹: The Limit for radiated test was performed according to FCC Part 15C

Note²: The tighter limit applies at the band edge.

Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5150 - 5250	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5250 - 5350	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5470 - 5725	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5725 - 5850	<p>All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength.

5.5.2 Test Setup

The section 4.5.3-4.5.5 (Diagram 3 - Diagram 5) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)

c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).

e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

f) Compare the resultant electric field strength level to the applicable limit.

g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International

Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB

averaging shall not be used.

g) Sweep time = auto.

h) Perform a trace average of at least 100 traces.

i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.

2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.

3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5.4 Test Result

Please refer to ANNEX A.6.

ANNEX A TEST RESULT

A.1 RF Output Power

The Output Power please refer to report 200801864SHA-002, which was issued by Intertek Testing Services Shanghai on Oct. 22, 2020, **section 5.4 Test Results of Maximum conducted output power and e.i.r.p.**

A.2 Emission Bandwidth & 99% Bandwidth

The Emission Bandwidth & 99% Bandwidth please refer to report 200801864SHA-002, which was issued by Intertek Testing Services Shanghai on Oct. 22, 2020, **section 3.4 The results of 26 dB Bandwidth & 99% Occupied Bandwidth.**

A.3 6 dB Bandwidth

The 6 dB Bandwidth please refer to report 200801864SHA-002, which was issued by Intertek Testing Services Shanghai on Oct. 22, 2020, **section 4.4 The results of Minimum 6dB Bandwidth.**

A.4 Power Spectral Density

The Power Spectral Density please refer to report 200801864SHA-002, which was issued by Intertek Testing Services Shanghai on Oct. 22, 2020, **section 6.4 Test Results of Power spectrum density.**

A.5 Conducted Emissions

The Conducted Emissions please refer to report 200801864SHA-002, which was issued by Intertek Testing Services Shanghai on Oct. 22, 2020, **section 8.5 Test Results of Power line conducted emission.**

A.6 Radiated Spurious Emissions and Band Edge (Restricted-band)

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, According the ANSI C63.4, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Note⁵: For Multiple transmitter output, the quantity $10 \log(NANT)$ dB is added to each spectrum value before comparing to the emission limit. When testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(NANT)$ if the measurements are made relative to the in-band emissions on the individual outputs.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

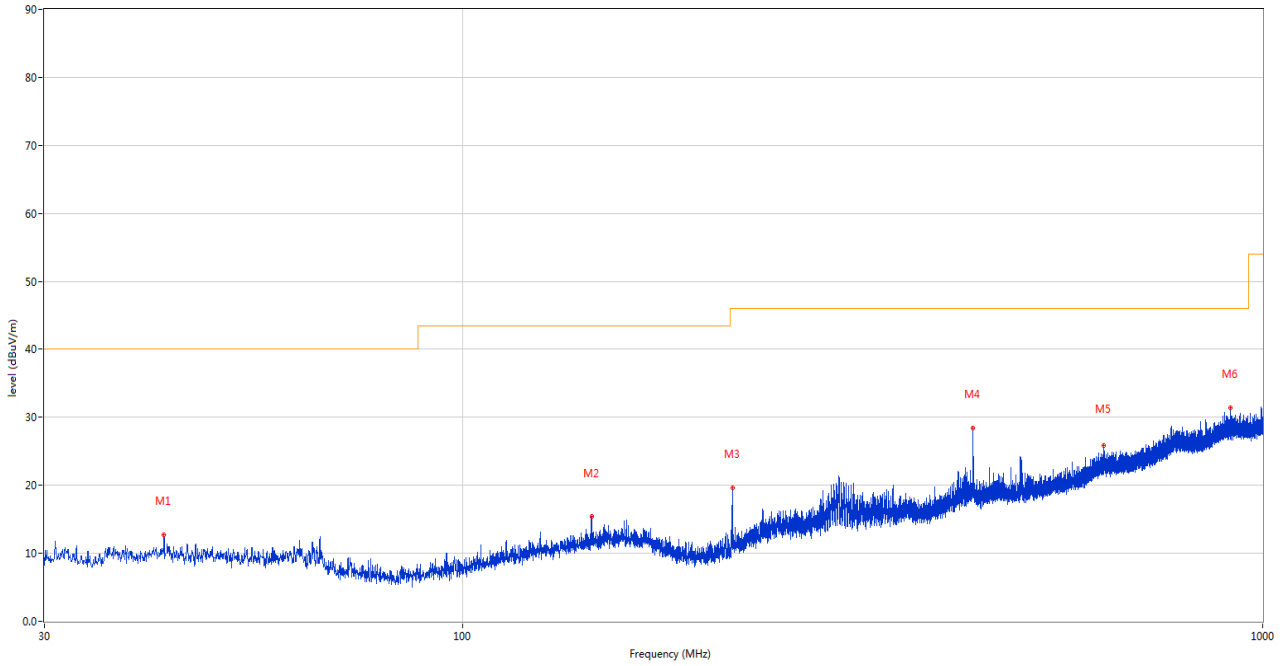

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.319	12.67	-25.91	40.0	-27.33	Peak	263.00	100	Horizontal	Pass
2	144.896	15.48	-24.57	43.5	-28.02	Peak	168.00	200	Horizontal	Pass
3	217.307	19.59	-27.12	46.0	-26.41	Peak	337.00	100	Horizontal	Pass
4	434.635	28.37	-19.87	46.0	-17.63	Peak	281.00	200	Horizontal	Pass
5	632.225	25.79	-13.50	46.0	-20.21	Peak	55.00	100	Horizontal	Pass
6	911.294	31.39	-7.77	46.0	-14.61	Peak	263.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

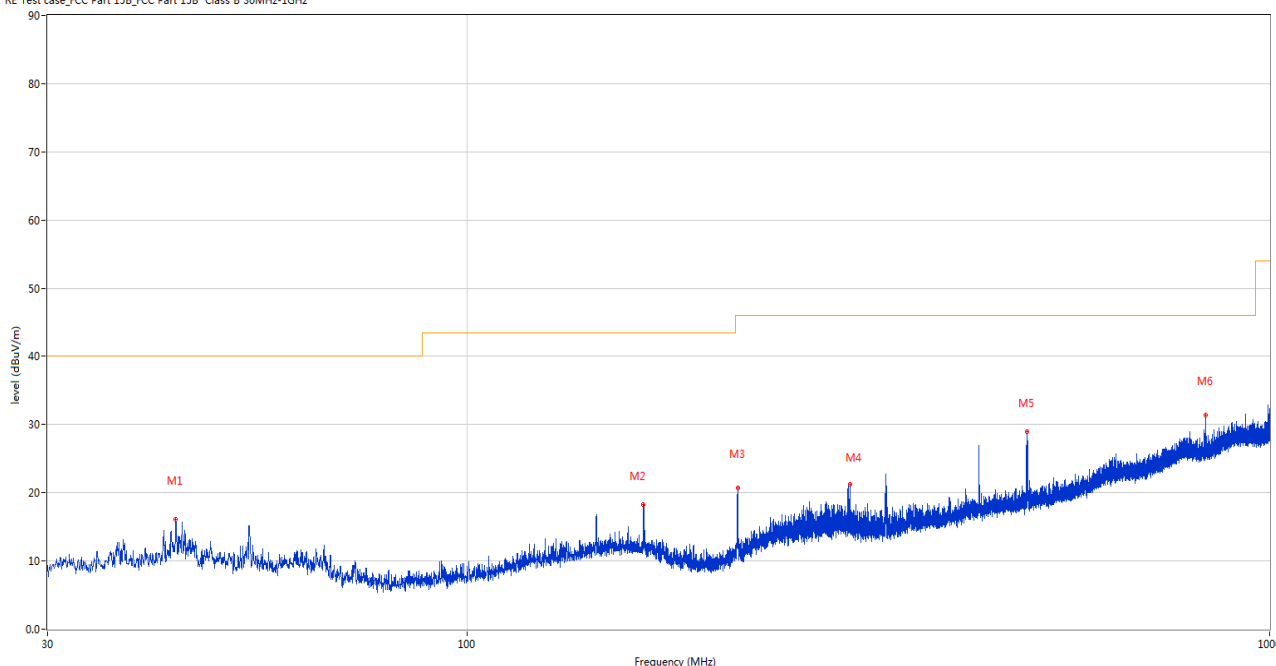

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.337	16.09	-25.98	40.0	-23.91	Peak	204.00	100	Vertical	Pass
2	165.897	18.27	-24.60	43.5	-25.23	Peak	100.00	200	Vertical	Pass
3	217.258	20.75	-27.12	46.0	-25.25	Peak	240.00	100	Vertical	Pass
4	300.048	21.30	-23.95	46.0	-24.70	Peak	107.00	100	Vertical	Pass
5	498.461	28.94	-18.37	46.0	-17.06	Peak	262.00	200	Vertical	Pass
6	832.966	31.43	-10.18	46.0	-14.57	Peak	70.00	100	Vertical	Pass

Note 1: The spurious above 18G is noise only, do not show on the report.

Note 2: All models have been tested, and the report shows only the worst.

11a, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	38.59	-17.31	74.0	-35.41	Peak	31.00	150	Horizontal	Pass
1**	1330.000	28.91	-17.31	54.0	-25.09	AV	31.00	150	Horizontal	Pass
2	4320.000	47.32	-4.60	74.0	-26.68	Peak	331.00	150	Horizontal	Pass
2**	4320.000	38.29	-4.60	54.0	-15.71	AV	331.00	150	Horizontal	Pass
3	5177.750	107.33	-2.42	--	--	Peak	267.00	150	Horizontal	N/A
3**	5177.750	99.74	-2.42	--	--	AV	267.00	150	Horizontal	N/A
4	7456.500	51.73	1.14	74.0	-22.27	Peak	331.00	150	Horizontal	Pass
4**	7456.500	42.90	1.14	54.0	-11.10	AV	331.00	150	Horizontal	Pass
5	11358.725	48.57	-4.44	74.0	-25.43	Peak	156.00	150	Horizontal	Pass
5**	11358.725	38.51	-4.44	54.0	-15.49	AV	156.00	150	Horizontal	Pass
6	15953.549	50.61	-0.23	74.0	-23.39	Peak	226.00	150	Horizontal	Pass
6**	15953.549	41.87	-0.23	54.0	-12.13	AV	226.00	150	Horizontal	Pass

11a, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.100	42.20	-17.33	74.0	-31.80	Peak	210.00	150	Vertical	Pass
1**	1330.100	32.75	-17.33	54.0	-21.25	AV	210.00	150	Vertical	Pass
2	4127.000	46.34	-5.71	74.0	-27.66	Peak	85.00	150	Vertical	Pass
2**	4127.000	37.04	-5.71	54.0	-16.96	AV	85.00	150	Vertical	Pass
3	5183.250	106.10	-2.11	--	--	Peak	206.00	150	Vertical	N/A
3**	5183.250	98.53	-2.11	--	--	AV	206.00	150	Vertical	N/A
4	7397.750	51.86	-0.43	74.0	-22.14	Peak	2.00	150	Vertical	Pass
4**	7397.750	41.59	-0.43	54.0	-12.41	AV	2.00	150	Vertical	Pass
5	11182.975	49.17	-4.17	74.0	-24.83	Peak	169.00	150	Vertical	Pass
5**	11182.975	39.19	-4.17	54.0	-14.81	AV	169.00	150	Vertical	Pass
6	15571.875	50.46	-0.84	74.0	-23.54	Peak	224.00	150	Vertical	Pass
6**	15571.875	40.25	-0.84	54.0	-13.75	AV	224.00	150	Vertical	Pass

11a, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1495.400	37.55	-17.41	74.0	-36.45	Peak	335.00	150	Horizontal	Pass
1**	1495.400	27.81	-17.41	54.0	-26.19	AV	335.00	150	Horizontal	Pass
2	4265.000	47.14	-4.82	74.0	-26.86	Peak	114.00	150	Horizontal	Pass
2**	4265.000	37.55	-4.82	54.0	-16.45	AV	114.00	150	Horizontal	Pass
3	5222.500	107.76	-3.45	--	--	Peak	81.00	150	Horizontal	N/A
3**	5222.500	100.31	-3.45	--	--	AV	81.00	150	Horizontal	N/A
4	7402.500	51.60	-0.19	74.0	-22.40	Peak	24.00	150	Horizontal	Pass
4**	7402.500	41.34	-0.19	54.0	-12.66	AV	24.00	150	Horizontal	Pass
5	12450.275	48.86	-2.15	74.0	-25.14	Peak	307.00	150	Horizontal	Pass
5**	12450.275	39.56	-2.15	54.0	-14.44	AV	307.00	150	Horizontal	Pass
6	16006.313	50.49	-0.14	74.0	-23.51	Peak	100.00	150	Horizontal	Pass
6**	16006.313	40.62	-0.14	54.0	-13.38	AV	100.00	150	Horizontal	Pass

11a, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.600	44.72	-17.12	74.0	-29.28	Peak	218.00	150	Vertical	Pass
1**	1328.600	34.97	-17.12	54.0	-19.03	AV	218.00	150	Vertical	Pass
2	4015.250	46.29	-5.69	74.0	-27.71	Peak	108.00	150	Vertical	Pass
2**	4015.250	36.29	-5.69	54.0	-17.71	AV	108.00	150	Vertical	Pass
3	5214.750	106.52	-3.39	--	--	Peak	198.00	150	Vertical	N/A
3**	5214.750	98.72	-3.39	--	--	AV	198.00	150	Vertical	N/A
4	7524.750	51.52	0.85	74.0	-22.48	Peak	323.00	150	Vertical	Pass
4**	7524.750	42.73	0.85	54.0	-11.27	AV	323.00	150	Vertical	Pass
5	11950.576	48.57	-3.64	74.0	-25.43	Peak	177.00	150	Vertical	Pass
5**	11950.576	40.03	-3.64	54.0	-13.97	AV	177.00	150	Vertical	Pass
6	16047.263	50.88	-0.10	74.0	-23.12	Peak	1.00	150	Vertical	Pass
6**	16047.263	41.74	-0.10	54.0	-12.26	AV	1.00	150	Vertical	Pass

11a, U-NII-1, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.800	37.96	-17.29	74.0	-36.04	Peak	185.00	150	Horizontal	Pass
1**	1497.800	28.02	-17.29	54.0	-25.98	AV	185.00	150	Horizontal	Pass
2	4182.500	46.47	-4.98	74.0	-27.53	Peak	348.00	150	Horizontal	Pass
2**	4182.500	37.60	-4.98	54.0	-16.40	AV	348.00	150	Horizontal	Pass
3	5235.750	108.89	-3.31	--	--	Peak	75.00	150	Horizontal	N/A
3**	5235.750	102.34	-3.31	--	--	AV	75.00	150	Horizontal	N/A
4	7524.500	52.66	0.87	74.0	-21.34	Peak	341.00	150	Horizontal	Pass
4**	7524.500	42.69	0.87	54.0	-11.31	AV	341.00	150	Horizontal	Pass
5	12444.575	49.14	-2.23	74.0	-24.86	Peak	122.00	150	Horizontal	Pass
5**	12444.575	39.56	-2.23	54.0	-14.44	AV	122.00	150	Horizontal	Pass
6	15704.700	50.75	0.00	74.0	-23.25	Peak	352.00	150	Horizontal	Pass
6**	15704.700	41.44	0.00	54.0	-12.56	AV	352.00	150	Horizontal	Pass

11a, U-NII-1, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.000	45.16	-17.43	74.0	-28.84	Peak	217.00	150	Vertical	Pass
1**	1331.000	36.09	-17.43	54.0	-17.91	AV	217.00	150	Vertical	Pass
2	4319.750	46.87	-4.60	74.0	-27.13	Peak	125.00	150	Vertical	Pass
2**	4319.750	37.72	-4.60	54.0	-16.28	AV	125.00	150	Vertical	Pass
3	5236.250	108.04	-3.31	--	--	Peak	199.00	150	Vertical	N/A
3**	5236.250	100.33	-3.31	--	--	AV	199.00	150	Vertical	N/A
4	7508.000	51.95	0.34	74.0	-22.05	Peak	69.00	150	Vertical	Pass
4**	7508.000	43.14	0.34	54.0	-10.86	AV	69.00	150	Vertical	Pass
5	11786.225	48.57	-3.66	74.0	-25.43	Peak	359.00	150	Vertical	Pass
5**	11786.225	39.49	-3.66	54.0	-14.51	AV	359.00	150	Vertical	Pass
6	15713.100	51.17	-0.17	74.0	-22.83	Peak	158.00	150	Vertical	Pass
6**	15713.100	43.73	-0.17	54.0	-10.27	AV	158.00	150	Vertical	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.300	37.67	-17.48	74.0	-36.33	Peak	342.00	150	Horizontal	Pass
1**	1493.300	27.02	-17.48	54.0	-26.98	AV	342.00	150	Horizontal	Pass
2	4258.750	47.15	-4.55	74.0	-26.85	Peak	36.00	150	Horizontal	Pass
2**	4258.750	38.17	-4.55	54.0	-15.83	AV	36.00	150	Horizontal	Pass
3	5184.250	107.30	-2.24	--	--	Peak	71.00	150	Horizontal	N/A
3**	5184.250	99.91	-2.24	--	--	AV	71.00	150	Horizontal	N/A
4	7515.500	52.21	0.88	74.0	-21.79	Peak	201.00	150	Horizontal	Pass
4**	7515.500	42.77	0.88	54.0	-11.23	AV	201.00	150	Horizontal	Pass
5	11455.863	48.93	-3.92	74.0	-25.07	Peak	336.00	150	Horizontal	Pass
5**	11455.863	38.79	-3.92	54.0	-15.21	AV	336.00	150	Horizontal	Pass
6	15706.800	51.13	-0.04	74.0	-22.87	Peak	360.00	150	Horizontal	Pass
6**	15706.800	41.20	-0.04	54.0	-12.80	AV	360.00	150	Horizontal	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.700	44.54	-17.50	74.0	-29.46	Peak	219.00	150	Vertical	Pass
1**	1331.700	35.79	-17.50	54.0	-18.21	AV	219.00	150	Vertical	Pass
2	4305.250	47.06	-4.21	74.0	-26.94	Peak	215.00	150	Vertical	Pass
2**	4305.250	38.01	-4.21	54.0	-15.99	AV	215.00	150	Vertical	Pass
3	5181.250	105.85	-2.16	--	--	Peak	198.00	150	Vertical	N/A
3**	5181.250	98.86	-2.16	--	--	AV	198.00	150	Vertical	N/A
4	7460.000	52.58	1.14	74.0	-21.42	Peak	215.00	150	Vertical	Pass
4**	7460.000	43.13	1.14	54.0	-10.87	AV	215.00	150	Vertical	Pass
5	12043.201	48.79	-3.36	74.0	-25.21	Peak	7.00	150	Vertical	Pass
5**	12043.201	38.47	-3.36	54.0	-15.53	AV	7.00	150	Vertical	Pass
6	15716.775	51.07	-0.25	74.0	-22.93	Peak	214.00	150	Vertical	Pass
6**	15716.775	41.44	-0.25	54.0	-12.56	AV	214.00	150	Vertical	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.500	37.28	-17.24	74.0	-36.72	Peak	156.00	150	Horizontal	Pass
1**	1329.500	27.85	-17.24	54.0	-26.15	AV	156.00	150	Horizontal	Pass
2	4188.000	46.79	-5.07	74.0	-27.21	Peak	75.00	150	Horizontal	Pass
2**	4188.000	37.01	-5.07	54.0	-16.99	AV	75.00	150	Horizontal	Pass
3	5218.500	107.61	-3.47	--	--	Peak	265.00	150	Horizontal	N/A
3**	5218.500	100.33	-3.47	--	--	AV	265.00	150	Horizontal	N/A
4	7516.000	52.44	0.93	74.0	-21.56	Peak	141.00	150	Horizontal	Pass
4**	7516.000	44.01	0.93	54.0	-9.99	AV	141.00	150	Horizontal	Pass
5	11693.600	48.62	-4.23	74.0	-25.38	Peak	303.00	150	Horizontal	Pass
5**	11693.600	38.67	-4.23	54.0	-15.33	AV	303.00	150	Horizontal	Pass
6	16132.050	50.94	-0.65	74.0	-23.06	Peak	156.00	150	Horizontal	Pass
6**	16132.050	41.01	-0.65	54.0	-12.99	AV	156.00	150	Horizontal	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.400	39.41	-17.37	74.0	-34.59	Peak	202.00	150	Vertical	Pass
1**	1330.400	27.84	-17.37	54.0	-26.16	AV	202.00	150	Vertical	Pass
2	4321.500	47.75	-4.72	74.0	-26.25	Peak	0.00	150	Vertical	Pass
2**	4321.500	37.50	-4.72	54.0	-16.50	AV	0.00	150	Vertical	Pass
3	5222.500	106.28	-3.45	--	--	Peak	199.00	150	Vertical	N/A
3**	5222.500	98.90	-3.45	--	--	AV	199.00	150	Vertical	N/A
4	7513.500	52.19	0.68	74.0	-21.81	Peak	307.00	150	Vertical	Pass
4**	7513.500	43.70	0.68	54.0	-10.30	AV	307.00	150	Vertical	Pass
5	11808.312	48.37	-3.48	74.0	-25.63	Peak	191.00	150	Vertical	Pass
5**	11808.312	38.52	-3.48	54.0	-15.48	AV	191.00	150	Vertical	Pass
6	15819.675	51.41	-0.73	74.0	-22.59	Peak	186.00	150	Vertical	Pass
6**	15819.675	40.85	-0.73	54.0	-13.15	AV	186.00	150	Vertical	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.600	39.81	-17.26	74.0	-34.19	Peak	33.00	150	Horizontal	Pass
1**	1329.600	28.85	-17.26	54.0	-25.15	AV	33.00	150	Horizontal	Pass
2	4285.000	46.68	-4.68	74.0	-27.32	Peak	68.00	150	Horizontal	Pass
2**	4285.000	38.55	-4.68	54.0	-15.45	AV	68.00	150	Horizontal	Pass
3	5234.250	107.70	-3.27	--	--	Peak	76.00	150	Horizontal	N/A
3**	5234.250	100.80	-3.27	--	--	AV	76.00	150	Horizontal	N/A
4	7512.250	52.35	0.52	74.0	-21.65	Peak	149.00	150	Horizontal	Pass
4**	7512.250	44.13	0.52	54.0	-9.87	AV	149.00	150	Horizontal	Pass
5	11213.612	48.36	-4.10	74.0	-25.64	Peak	65.00	150	Horizontal	Pass
5**	11213.612	38.29	-4.10	54.0	-15.71	AV	65.00	150	Horizontal	Pass
6	16027.312	50.55	-0.12	74.0	-23.45	Peak	282.00	150	Horizontal	Pass
6**	16027.312	40.78	-0.12	54.0	-13.22	AV	282.00	150	Horizontal	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.700	44.57	-17.27	74.0	-29.43	Peak	227.00	150	Vertical	Pass
1**	1329.700	33.20	-17.27	54.0	-20.80	AV	227.00	150	Vertical	Pass
2	3995.500	46.14	-6.28	74.0	-27.86	Peak	356.00	150	Vertical	Pass
2**	3995.500	35.95	-6.28	54.0	-18.05	AV	356.00	150	Vertical	Pass
3	5238.000	107.43	-3.23	--	--	Peak	201.00	150	Vertical	N/A
3**	5238.000	99.41	-3.23	--	--	AV	201.00	150	Vertical	N/A
4	7455.750	52.63	1.15	74.0	-21.37	Peak	42.00	150	Vertical	Pass
4**	7455.750	42.88	1.15	54.0	-11.12	AV	42.00	150	Vertical	Pass
5	12423.200	48.95	-2.56	74.0	-25.05	Peak	6.00	150	Vertical	Pass
5**	12423.200	39.69	-2.56	54.0	-14.31	AV	6.00	150	Vertical	Pass
6	16042.800	51.08	-0.11	74.0	-22.92	Peak	252.00	150	Vertical	Pass
6**	16042.800	42.09	-0.11	54.0	-11.91	AV	252.00	150	Vertical	Pass

11n40, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.100	39.43	-17.44	74.0	-34.57	Peak	192.00	150	Horizontal	Pass
1**	1331.100	27.45	-17.44	54.0	-26.55	AV	192.00	150	Horizontal	Pass
2	4135.250	46.30	-5.51	74.0	-27.70	Peak	0.00	150	Horizontal	Pass
2**	4135.250	37.09	-5.51	54.0	-16.91	AV	0.00	150	Horizontal	Pass
3	5191.500	103.28	-2.70	--	--	Peak	76.00	150	Horizontal	N/A
3**	5191.500	95.72	-2.70	--	--	AV	76.00	150	Horizontal	N/A
4	7515.000	52.37	0.84	74.0	-21.63	Peak	350.00	150	Horizontal	Pass
4**	7515.000	42.96	0.84	54.0	-11.04	AV	350.00	150	Horizontal	Pass
5	10884.912	48.55	-4.83	74.0	-25.45	Peak	344.00	150	Horizontal	Pass
5**	10884.912	37.95	-4.83	54.0	-16.05	AV	344.00	150	Horizontal	Pass
6	16040.700	50.36	-0.11	74.0	-23.64	Peak	44.00	150	Horizontal	Pass
6**	16040.700	41.44	-0.11	54.0	-12.56	AV	44.00	150	Horizontal	Pass

11n40, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.300	43.70	-17.52	74.0	-30.30	Peak	209.00	150	Vertical	Pass
1**	1333.300	31.88	-17.52	54.0	-22.12	AV	209.00	150	Vertical	Pass
2	3992.250	47.12	-6.24	74.0	-26.88	Peak	28.00	150	Vertical	Pass
2**	3992.250	35.83	-6.24	54.0	-18.17	AV	28.00	150	Vertical	Pass
3	5195.500	102.69	-3.12	--	--	Peak	201.00	150	Vertical	N/A
3**	5195.500	94.78	-3.12	--	--	AV	201.00	150	Vertical	N/A
4	7476.000	52.11	0.61	74.0	-21.89	Peak	137.00	150	Vertical	Pass
4**	7476.000	43.15	0.61	54.0	-10.85	AV	137.00	150	Vertical	Pass
5	12053.175	48.65	-3.35	74.0	-25.35	Peak	53.00	150	Vertical	Pass
5**	12053.175	38.50	-3.35	54.0	-15.50	AV	53.00	150	Vertical	Pass
6	15709.425	50.44	-0.09	74.0	-23.56	Peak	224.00	150	Vertical	Pass
6**	15709.425	41.17	-0.09	54.0	-12.83	AV	224.00	150	Vertical	Pass

11n40, U-NII-1, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.800	40.24	-17.15	74.0	-33.76	Peak	188.00	150	Horizontal	Pass
1**	1328.800	29.24	-17.15	54.0	-24.76	AV	188.00	150	Horizontal	Pass
2	4013.750	45.99	-5.64	74.0	-28.01	Peak	285.00	150	Horizontal	Pass
2**	4013.750	37.26	-5.64	54.0	-16.74	AV	285.00	150	Horizontal	Pass
3	5235.500	105.71	-3.30	--	--	Peak	71.00	150	Horizontal	N/A
3**	5235.500	97.65	-3.30	--	--	AV	71.00	150	Horizontal	N/A
4	7453.500	52.07	1.06	74.0	-21.93	Peak	112.00	150	Horizontal	Pass
4**	7453.500	43.97	1.06	54.0	-10.03	AV	112.00	150	Horizontal	Pass
5	11063.276	48.90	-4.93	74.0	-25.10	Peak	19.00	150	Horizontal	Pass
5**	11063.276	39.63	-4.93	54.0	-14.37	AV	19.00	150	Horizontal	Pass
6	15773.213	50.54	-0.84	74.0	-23.46	Peak	338.00	150	Horizontal	Pass
6**	15773.213	40.69	-0.84	54.0	-13.31	AV	338.00	150	Horizontal	Pass

11n40, U-NII-1, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.800	43.41	-17.16	74.0	-30.59	Peak	214.00	150	Vertical	Pass
1**	1327.800	28.72	-17.16	54.0	-25.28	AV	214.00	150	Vertical	Pass
2	4223.250	46.55	-5.43	74.0	-27.45	Peak	28.00	150	Vertical	Pass
2**	4223.250	36.91	-5.43	54.0	-17.09	AV	28.00	150	Vertical	Pass
3	5240.500	104.00	-3.24	--	--	Peak	201.00	150	Vertical	N/A
3**	5240.500	96.68	-3.24	--	--	AV	201.00	150	Vertical	N/A
4	7451.750	51.90	0.86	74.0	-22.10	Peak	209.00	150	Vertical	Pass
4**	7451.750	43.83	0.86	54.0	-10.17	AV	209.00	150	Vertical	Pass
5	12421.300	49.00	-2.59	74.0	-25.00	Peak	75.00	150	Vertical	Pass
5**	12421.300	39.41	-2.59	54.0	-14.59	AV	75.00	150	Vertical	Pass
6	16017.338	51.11	-0.13	74.0	-22.89	Peak	242.00	150	Vertical	Pass
6**	16017.338	41.49	-0.13	54.0	-12.51	AV	242.00	150	Vertical	Pass

11ac80, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.400	39.19	-17.22	74.0	-34.81	Peak	58.00	150	Horizontal	Pass
1**	1327.400	30.61	-17.22	54.0	-23.39	AV	58.00	150	Horizontal	Pass
2	4256.250	46.95	-4.79	74.0	-27.05	Peak	176.00	150	Horizontal	Pass
2**	4256.250	38.17	-4.79	54.0	-15.83	AV	176.00	150	Horizontal	Pass
3	5234.500	99.30	-3.28	--	--	Peak	76.00	150	Horizontal	N/A
3**	5234.500	91.73	-3.28	--	--	AV	76.00	150	Horizontal	N/A
4	7470.250	52.05	0.66	74.0	-21.95	Peak	118.00	150	Horizontal	Pass
4**	7470.250	42.99	0.66	54.0	-11.01	AV	118.00	150	Horizontal	Pass
5	12427.237	48.54	-2.50	74.0	-25.46	Peak	90.00	150	Horizontal	Pass
5**	12427.237	39.23	-2.50	54.0	-14.77	AV	90.00	150	Horizontal	Pass
6	16012.349	50.63	-0.14	74.0	-23.37	Peak	206.00	150	Horizontal	Pass
6**	16012.349	40.77	-0.14	54.0	-13.23	AV	206.00	150	Horizontal	Pass

11ac80, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.300	44.78	-17.09	74.0	-29.22	Peak	219.00	150	Vertical	Pass
1**	1328.300	37.75	-17.09	54.0	-16.25	AV	219.00	150	Vertical	Pass
2	4295.500	46.78	-4.43	74.0	-27.22	Peak	268.00	150	Vertical	Pass
2**	4295.500	38.63	-4.43	54.0	-15.37	AV	268.00	150	Vertical	Pass
3	5199.250	97.12	-3.24	--	--	Peak	209.00	150	Vertical	N/A
3**	5199.250	89.23	-3.24	--	--	AV	209.00	150	Vertical	N/A
4	7509.500	52.12	0.53	74.0	-21.88	Peak	29.00	150	Vertical	Pass
4**	7509.500	43.51	0.53	54.0	-10.49	AV	29.00	150	Vertical	Pass
5	12441.962	48.81	-2.27	74.0	-25.19	Peak	353.00	150	Vertical	Pass
5**	12441.962	39.76	-2.27	54.0	-14.24	AV	353.00	150	Vertical	Pass
6	15844.875	50.66	-0.76	74.0	-23.34	Peak	8.00	150	Vertical	Pass
6**	15844.875	40.10	-0.76	54.0	-13.90	AV	8.00	150	Vertical	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.700	40.29	-17.13	74.0	-33.71	Peak	192.00	150	Horizontal	Pass
1**	1328.700	29.16	-17.13	54.0	-24.84	AV	192.00	150	Horizontal	Pass
2	4312.250	47.42	-4.29	74.0	-26.58	Peak	127.00	150	Horizontal	Pass
2**	4312.250	37.97	-4.29	54.0	-16.03	AV	127.00	150	Horizontal	Pass
3	5261.250	108.00	-3.79	--	--	Peak	78.00	150	Horizontal	N/A
3**	5261.250	100.37	-3.79	--	--	AV	78.00	150	Horizontal	N/A
4	7532.500	51.87	0.63	74.0	-22.13	Peak	61.00	150	Horizontal	Pass
4**	7532.500	41.66	0.63	54.0	-12.34	AV	61.00	150	Horizontal	Pass
5	12431.988	48.95	-2.43	74.0	-25.05	Peak	122.00	150	Horizontal	Pass
5**	12431.988	39.96	-2.43	54.0	-14.04	AV	122.00	150	Horizontal	Pass
6	15771.638	50.43	-0.85	74.0	-23.57	Peak	36.00	150	Horizontal	Pass
6**	15771.638	40.78	-0.85	54.0	-13.22	AV	36.00	150	Horizontal	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.300	41.95	-17.22	74.0	-32.05	Peak	204.00	150	Vertical	Pass
1**	1329.300	33.94	-17.22	54.0	-20.06	AV	204.00	150	Vertical	Pass
2	4250.500	46.71	-5.01	74.0	-27.29	Peak	201.00	150	Vertical	Pass
2**	4250.500	38.77	-5.01	54.0	-15.23	AV	201.00	150	Vertical	Pass
3	5265.000	105.80	-3.66	--	--	Peak	208.00	150	Vertical	N/A
3**	5265.000	99.52	-3.66	--	--	AV	208.00	150	Vertical	N/A
4	7461.500	52.26	1.12	74.0	-21.74	Peak	4.00	150	Vertical	Pass
4**	7461.500	42.95	1.12	54.0	-11.05	AV	4.00	150	Vertical	Pass
5	11317.401	48.98	-4.17	74.0	-25.02	Peak	44.00	150	Vertical	Pass
5**	11317.401	38.81	-4.17	54.0	-15.19	AV	44.00	150	Vertical	Pass
6	15780.300	50.97	-0.81	74.0	-23.03	Peak	132.00	150	Vertical	Pass
6**	15780.300	41.44	-0.81	54.0	-12.56	AV	132.00	150	Vertical	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.500	39.78	-17.24	74.0	-34.22	Peak	155.00	150	Horizontal	Pass
1**	1329.500	29.83	-17.24	54.0	-24.17	AV	155.00	150	Horizontal	Pass
2	4254.750	46.50	-4.83	74.0	-27.50	Peak	85.00	150	Horizontal	Pass
2**	4254.750	37.36	-4.83	54.0	-16.64	AV	85.00	150	Horizontal	Pass
3	5296.500	107.63	-3.52	--	31.63	Peak	76.00	150	Horizontal	N/A
3**	5296.500	101.28	-3.52	--	101.28	AV	76.00	150	Horizontal	N/A
4	7542.250	52.15	0.59	74.0	-21.85	Peak	61.00	150	Horizontal	Pass
4**	7542.250	42.34	0.59	54.0	-11.66	AV	61.00	150	Horizontal	Pass
5	12515.826	49.08	-2.36	74.0	-24.92	Peak	91.00	150	Horizontal	Pass
5**	12515.826	38.47	-2.36	54.0	-15.53	AV	91.00	150	Horizontal	Pass
6	15709.162	50.77	-0.09	74.0	-23.23	Peak	162.00	150	Horizontal	Pass
6**	15709.162	40.89	-0.09	54.0	-13.11	AV	162.00	150	Horizontal	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.300	44.81	-17.22	74.0	-29.19	Peak	209.00	150	Vertical	Pass
1**	1329.300	28.72	-17.22	54.0	-25.28	AV	209.00	150	Vertical	Pass
2	3976.000	46.00	-6.29	74.0	-28.00	Peak	38.00	150	Vertical	Pass
2**	3976.000	35.44	-6.29	54.0	-18.56	AV	38.00	150	Vertical	Pass
3	5303.250	106.02	-3.63	--	--	Peak	210.00	150	Vertical	N/A
3**	5303.250	98.56	-3.63	--	--	AV	210.00	150	Vertical	N/A
4	7459.000	52.15	1.15	74.0	-21.85	Peak	311.00	150	Vertical	Pass
4**	7459.000	43.06	1.15	54.0	-10.94	AV	311.00	150	Vertical	Pass
5	11955.088	48.54	-3.64	74.0	-25.46	Peak	66.00	150	Vertical	Pass
5**	11955.088	39.19	-3.64	54.0	-14.81	AV	66.00	150	Vertical	Pass
6	15971.401	50.10	-0.20	74.0	-23.90	Peak	6.00	150	Vertical	Pass
6**	15971.401	40.85	-0.20	54.0	-13.15	AV	6.00	150	Vertical	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.000	39.09	-17.54	74.0	-34.91	Peak	28.00	150	Horizontal	Pass
1**	1333.000	27.67	-17.54	54.0	-26.33	AV	28.00	150	Horizontal	Pass
2	4185.250	46.46	-4.82	74.0	-27.54	Peak	27.00	150	Horizontal	Pass
2**	4185.250	37.89	-4.82	54.0	-16.11	AV	27.00	150	Horizontal	Pass
3	5318.500	106.80	-3.51	--	--	Peak	76.00	150	Horizontal	N/A
3**	5318.500	99.33	-3.51	--	--	AV	76.00	150	Horizontal	N/A
4	7460.750	51.93	1.14	74.0	-22.07	Peak	36.00	150	Horizontal	Pass
4**	7460.750	43.18	1.14	54.0	-10.82	AV	36.00	150	Horizontal	Pass
5	12287.112	48.68	-2.56	74.0	-25.32	Peak	166.00	150	Horizontal	Pass
5**	12287.112	39.07	-2.56	54.0	-14.93	AV	166.00	150	Horizontal	Pass
6	16033.350	51.07	-0.12	74.0	-22.93	Peak	192.00	150	Horizontal	Pass
6**	16033.350	41.45	-0.12	54.0	-12.55	AV	192.00	150	Horizontal	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.400	45.73	-17.22	74.0	-28.27	Peak	207.00	150	Vertical	Pass
1**	1327.400	28.09	-17.22	54.0	-25.91	AV	207.00	150	Vertical	Pass
2	4252.750	46.77	-5.01	74.0	-27.23	Peak	44.00	150	Vertical	Pass
2**	4252.750	37.49	-5.01	54.0	-16.51	AV	44.00	150	Vertical	Pass
3	5317.250	105.68	-3.35	--	--	Peak	208.00	150	Vertical	N/A
3**	5317.250	98.95	-3.35	--	--	AV	208.00	150	Vertical	N/A
4	7511.250	52.44	0.50	74.0	-21.56	Peak	76.00	150	Vertical	Pass
4**	7511.250	43.63	0.50	54.0	-10.37	AV	76.00	150	Vertical	Pass
5	12423.437	48.96	-2.56	74.0	-25.04	Peak	125.00	150	Vertical	Pass
5**	12423.437	39.43	-2.56	54.0	-14.57	AV	125.00	150	Vertical	Pass
6	16025.475	51.27	-0.13	74.0	-22.73	Peak	228.00	150	Vertical	Pass
6**	16025.475	41.56	-0.13	54.0	-12.44	AV	228.00	150	Vertical	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.200	39.19	-17.10	74.0	-34.81	Peak	229.00	150	Horizontal	Pass
1**	1328.200	28.73	-17.10	54.0	-25.27	AV	229.00	150	Horizontal	Pass
2	3860.750	45.39	-6.83	74.0	-28.61	Peak	203.00	150	Horizontal	Pass
2**	3860.750	37.16	-6.83	54.0	-16.84	AV	203.00	150	Horizontal	Pass
3	5255.000	108.12	-3.90	--	--	Peak	78.00	150	Horizontal	N/A
3**	5255.000	100.65	-3.90	--	--	AV	78.00	150	Horizontal	N/A
4	7458.750	51.98	1.15	74.0	-22.02	Peak	268.00	150	Horizontal	Pass
4**	7458.750	43.04	1.15	54.0	-10.96	AV	268.00	150	Horizontal	Pass
5	11449.687	48.39	-3.87	74.0	-25.61	Peak	216.00	150	Horizontal	Pass
5**	11449.687	38.69	-3.87	54.0	-15.31	AV	216.00	150	Horizontal	Pass
6	16028.363	51.18	-0.12	74.0	-22.82	Peak	36.00	150	Horizontal	Pass
6**	16028.363	41.55	-0.12	54.0	-12.45	AV	36.00	150	Horizontal	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.500	42.99	-17.48	74.0	-31.01	Peak	205.00	150	Vertical	Pass
1**	1331.500	35.79	-17.48	54.0	-18.21	AV	205.00	150	Vertical	Pass
2	3993.250	46.39	-6.25	74.0	-27.61	Peak	36.00	150	Vertical	Pass
2**	3993.250	35.50	-6.25	54.0	-18.50	AV	36.00	150	Vertical	Pass
3	5257.750	106.80	-4.02	--	--	Peak	208.00	150	Vertical	N/A
3**	5257.750	99.51	-4.02	--	--	AV	208.00	150	Vertical	N/A
4	7455.000	52.44	1.17	74.0	-21.56	Peak	135.00	150	Vertical	Pass
4**	7455.000	43.41	1.17	54.0	-10.59	AV	135.00	150	Vertical	Pass
5	11790.975	48.18	-3.61	74.0	-25.82	Peak	262.00	150	Vertical	Pass
5**	11790.975	39.15	-3.61	54.0	-14.85	AV	262.00	150	Vertical	Pass
6	15775.575	51.06	-0.83	74.0	-22.94	Peak	359.00	150	Vertical	Pass
6**	15775.575	42.51	-0.83	54.0	-11.49	AV	359.00	150	Vertical	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.900	37.51	-17.16	74.0	-36.49	Peak	345.00	150	Horizontal	Pass
1**	1328.900	27.67	-17.16	54.0	-26.33	AV	345.00	150	Horizontal	Pass
2	4269.500	46.86	-4.82	74.0	-27.14	Peak	53.00	150	Horizontal	Pass
2**	4269.500	37.08	-4.82	54.0	-16.92	AV	53.00	150	Horizontal	Pass
3	5295.250	108.56	-3.50	--	--	Peak	78.00	150	Horizontal	N/A
3**	5295.250	100.07	-3.50	--	--	AV	78.00	150	Horizontal	N/A
4	7508.750	51.47	0.44	74.0	-22.53	Peak	4.00	150	Horizontal	Pass
4**	7508.750	43.32	0.44	54.0	-10.68	AV	4.00	150	Horizontal	Pass
5	12458.588	48.83	-2.21	74.0	-25.17	Peak	331.00	150	Horizontal	Pass
5**	12458.588	39.78	-2.21	54.0	-14.22	AV	331.00	150	Horizontal	Pass
6	15949.350	51.54	-0.24	74.0	-22.46	Peak	360.00	150	Horizontal	Pass
6**	15949.350	40.98	-0.24	54.0	-13.02	AV	360.00	150	Horizontal	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	42.90	-17.31	74.0	-31.10	Peak	224.00	150	Vertical	Pass
1**	1330.000	28.93	-17.31	54.0	-25.07	AV	224.00	150	Vertical	Pass
2	3982.500	45.78	-6.11	74.0	-28.22	Peak	46.00	150	Vertical	Pass
2**	3982.500	36.41	-6.11	54.0	-17.59	AV	46.00	150	Vertical	Pass
3	5292.250	106.78	-3.22	--	--	Peak	209.00	150	Vertical	N/A
3**	5292.250	99.29	-3.22	--	--	AV	209.00	150	Vertical	N/A
4	7464.000	51.74	0.94	74.0	-22.26	Peak	13.00	150	Vertical	Pass
4**	7464.000	43.12	0.94	54.0	-10.88	AV	13.00	150	Vertical	Pass
5	11197.225	48.94	-4.07	74.0	-25.06	Peak	88.00	150	Vertical	Pass
5**	11197.225	38.27	-4.07	54.0	-15.73	AV	88.00	150	Vertical	Pass
6	15953.287	50.84	-0.23	74.0	-23.16	Peak	218.00	150	Vertical	Pass
6**	15953.287	41.51	-0.23	54.0	-12.49	AV	218.00	150	Vertical	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.400	37.99	-17.09	74.0	-36.01	Peak	236.00	150	Horizontal	Pass
1**	1328.400	28.38	-17.09	54.0	-25.62	AV	236.00	150	Horizontal	Pass
2	3727.000	45.18	-7.12	74.0	-28.82	Peak	250.00	150	Horizontal	Pass
2**	3727.000	34.98	-7.12	54.0	-19.02	AV	250.00	150	Horizontal	Pass
3	5318.500	106.57	-3.51	--	--	Peak	78.00	150	Horizontal	N/A
3**	5318.500	99.93	-3.51	--	--	AV	78.00	150	Horizontal	N/A
4	7475.000	52.20	0.66	74.0	-21.80	Peak	29.00	150	Horizontal	Pass
4**	7475.000	43.25	0.66	54.0	-10.75	AV	29.00	150	Horizontal	Pass
5	12441.725	49.12	-2.28	74.0	-24.88	Peak	297.00	150	Horizontal	Pass
5**	12441.725	39.62	-2.28	54.0	-14.38	AV	297.00	150	Horizontal	Pass
6	16039.388	51.04	-0.11	74.0	-22.96	Peak	90.00	150	Horizontal	Pass
6**	16039.388	41.41	-0.11	54.0	-12.59	AV	90.00	150	Horizontal	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.400	41.04	-17.09	74.0	-32.96	Peak	222.00	150	Vertical	Pass
1**	1328.400	35.65	-17.09	54.0	-18.35	AV	222.00	150	Vertical	Pass
2	4189.000	47.49	-5.14	74.0	-26.51	Peak	357.00	150	Vertical	Pass
2**	4189.000	36.69	-5.14	54.0	-17.31	AV	357.00	150	Vertical	Pass
3	5318.750	106.21	-3.54	--	--	Peak	209.00	150	Vertical	N/A
3**	5318.750	97.65	-3.54	--	--	AV	209.00	150	Vertical	N/A
4	7472.250	52.05	0.74	74.0	-21.95	Peak	360.00	150	Vertical	Pass
4**	7472.250	42.67	0.74	54.0	-11.33	AV	360.00	150	Vertical	Pass
5	11302.912	48.57	-4.03	74.0	-25.43	Peak	215.00	150	Vertical	Pass
5**	11302.912	38.61	-4.03	54.0	-15.39	AV	215.00	150	Vertical	Pass
6	16140.188	50.98	-0.57	74.0	-23.02	Peak	0.00	150	Vertical	Pass
6**	16140.188	40.37	-0.57	54.0	-13.63	AV	0.00	150	Vertical	Pass

11n40, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1547.800	37.20	-17.66	74.0	-36.80	Peak	46.00	150	Horizontal	Pass
1**	1547.800	27.70	-17.66	54.0	-26.30	AV	46.00	150	Horizontal	Pass
2	4316.500	47.20	-4.60	74.0	-26.80	Peak	360.00	150	Horizontal	Pass
2**	4316.500	37.59	-4.60	54.0	-16.41	AV	360.00	150	Horizontal	Pass
3	5271.500	105.51	-3.27	--	--	Peak	78.00	150	Horizontal	N/A
3**	5271.500	97.46	-3.27	--	--	AV	78.00	150	Horizontal	N/A
4	7509.250	51.85	0.50	74.0	-22.15	Peak	61.00	150	Horizontal	Pass
4**	7509.250	43.12	0.50	54.0	-10.88	AV	61.00	150	Horizontal	Pass
5	11460.850	49.14	-3.97	74.0	-24.86	Peak	169.00	150	Horizontal	Pass
5**	11460.850	38.85	-3.97	54.0	-15.15	AV	169.00	150	Horizontal	Pass
6	16030.463	51.08	-0.12	74.0	-22.92	Peak	231.00	150	Horizontal	Pass
6**	16030.463	41.89	-0.12	54.0	-12.11	AV	231.00	150	Horizontal	Pass

11n40, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.700	43.54	-17.27	74.0	-30.46	Peak	198.00	150	Vertical	Pass
1**	1329.700	35.40	-17.27	54.0	-18.60	AV	198.00	150	Vertical	Pass
2	4313.500	46.56	-4.34	74.0	-27.44	Peak	36.00	150	Vertical	Pass
2**	4313.500	39.23	-4.34	54.0	-14.77	AV	36.00	150	Vertical	Pass
3	5271.750	104.14	-3.27	--	--	Peak	209.00	150	Vertical	N/A
3**	5271.750	97.15	-3.27	--	--	AV	209.00	150	Vertical	N/A
4	7500.500	51.52	-0.50	74.0	-22.48	Peak	144.00	150	Vertical	Pass
4**	7500.500	41.97	-0.50	54.0	-12.03	AV	144.00	150	Vertical	Pass
5	11800.475	48.54	-3.53	74.0	-25.46	Peak	113.00	150	Vertical	Pass
5**	11800.475	38.91	-3.53	54.0	-15.09	AV	113.00	150	Vertical	Pass
6	15717.037	50.43	-0.25	74.0	-23.57	Peak	160.00	150	Vertical	Pass
6**	15717.037	41.25	-0.25	54.0	-12.75	AV	160.00	150	Vertical	Pass

11n40, U-NII-2A, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.200	38.09	-17.10	74.0	-35.91	Peak	104.00	150	Horizontal	Pass
1**	1328.200	28.18	-17.10	54.0	-25.82	AV	104.00	150	Horizontal	Pass
2	4366.000	47.34	-4.15	74.0	-26.66	Peak	235.00	150	Horizontal	Pass
2**	4366.000	38.18	-4.15	54.0	-15.82	AV	235.00	150	Horizontal	Pass
3	5318.250	105.09	-3.48	--	--	Peak	80.00	150	Horizontal	N/A
3**	5318.250	96.73	-3.48	--	--	AV	80.00	150	Horizontal	N/A
4	7568.000	51.76	-0.04	74.0	-22.24	Peak	169.00	150	Horizontal	Pass
4**	7568.000	42.75	-0.04	54.0	-11.25	AV	169.00	150	Horizontal	Pass
5	12454.787	49.03	-2.18	74.0	-24.97	Peak	228.00	150	Horizontal	Pass
5**	12454.787	39.65	-2.18	54.0	-14.35	AV	228.00	150	Horizontal	Pass
6	15473.175	50.67	-0.47	74.0	-23.33	Peak	303.00	150	Horizontal	Pass
6**	15473.175	40.51	-0.47	54.0	-13.49	AV	303.00	150	Horizontal	Pass

11n40, U-NII-2A, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.700	45.05	-17.41	74.0	-28.95	Peak	221.00	150	Vertical	Pass
1**	1330.700	36.37	-17.41	54.0	-17.63	AV	221.00	150	Vertical	Pass
2	4031.250	46.27	-6.41	74.0	-27.73	Peak	95.00	150	Vertical	Pass
2**	4031.250	36.11	-6.41	54.0	-17.89	AV	95.00	150	Vertical	Pass
3	5306.250	103.33	-3.33	--	--	Peak	209.00	150	Vertical	N/A
3**	5306.250	96.14	-3.33	--	--	AV	209.00	150	Vertical	N/A
4	7508.000	52.56	0.34	74.0	-21.44	Peak	19.00	150	Vertical	Pass
4**	7508.000	43.88	0.34	54.0	-10.12	AV	19.00	150	Vertical	Pass
5	11189.625	48.62	-4.12	74.0	-25.38	Peak	74.00	150	Vertical	Pass
5**	11189.625	38.89	-4.12	54.0	-15.11	AV	74.00	150	Vertical	Pass
6	16041.224	50.32	-0.11	74.0	-23.68	Peak	192.00	150	Vertical	Pass
6**	16041.224	41.65	-0.11	54.0	-12.35	AV	192.00	150	Vertical	Pass

11ac80, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.800	38.41	-17.29	74.0	-35.59	Peak	209.00	150	Vertical	Pass
1**	1329.800	27.24	-17.29	54.0	-26.76	AV	209.00	150	Vertical	Pass
2	4305.250	46.91	-4.21	74.0	-27.09	Peak	298.00	150	Vertical	Pass
2**	4305.250	37.87	-4.21	54.0	-16.13	AV	298.00	150	Vertical	Pass
3	5265.000	96.97	-3.66	--	--	Peak	76.00	150	Vertical	N/A
3**	5265.000	88.82	-3.66	--	--	AV	76.00	150	Vertical	N/A
4	7459.000	51.81	1.15	74.0	-22.19	Peak	332.00	150	Vertical	Pass
4**	7459.000	44.35	1.15	54.0	-9.65	AV	332.00	150	Vertical	Pass
5	12359.075	48.65	-2.84	74.0	-25.35	Peak	8.00	150	Vertical	Pass
5**	12359.075	38.01	-2.84	54.0	-15.99	AV	8.00	150	Vertical	Pass
6	15710.474	50.68	-0.12	74.0	-23.32	Peak	271.00	150	Vertical	Pass
6**	15710.474	42.02	-0.12	54.0	-11.98	AV	271.00	150	Vertical	Pass

11ac80, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.900	44.74	-17.30	74.0	-29.26	Peak	219.00	150	Vertical	Pass
1**	1329.900	32.99	-17.30	54.0	-21.01	AV	219.00	150	Vertical	Pass
2	4201.250	47.27	-5.46	74.0	-26.73	Peak	0.00	150	Vertical	Pass
2**	4201.250	36.61	-5.46	54.0	-17.39	AV	0.00	150	Vertical	Pass
3	5274.750	96.16	-3.11	--	--	Peak	258.00	150	Vertical	N/A
3**	5274.750	88.03	-3.11	--	--	AV	258.00	150	Vertical	N/A
4	7464.000	51.95	0.94	74.0	-22.05	Peak	233.00	150	Vertical	Pass
4**	7464.000	42.99	0.94	54.0	-11.01	AV	233.00	150	Vertical	Pass
5	11300.300	48.22	-4.01	74.0	-25.78	Peak	329.00	150	Vertical	Pass
5**	11300.300	38.66	-4.01	54.0	-15.34	AV	329.00	150	Vertical	Pass
6	15710.474	50.15	-0.12	74.0	-23.85	Peak	52.00	150	Vertical	Pass
6**	15710.474	40.45	-0.12	54.0	-13.55	AV	52.00	150	Vertical	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.700	37.86	-17.17	74.0	-36.14	Peak	136.00	150	Horizontal	Pass
1**	1327.700	31.70	-17.17	54.0	-22.30	AV	136.00	150	Horizontal	Pass
2	4078.750	46.06	-5.76	74.0	-27.94	Peak	12.00	150	Horizontal	Pass
2**	4078.750	37.06	-5.76	54.0	-16.94	AV	12.00	150	Horizontal	Pass
3	5501.250	100.10	-3.16	--	--	Peak	282.00	150	Horizontal	N/A
3**	5501.250	92.95	-3.16	--	--	AV	282.00	150	Horizontal	N/A
4	7471.750	51.98	0.78	74.0	-22.02	Peak	144.00	150	Horizontal	Pass
4**	7471.750	43.21	0.78	54.0	-10.79	AV	144.00	150	Horizontal	Pass
5	11323.575	48.66	-4.23	74.0	-25.34	Peak	76.00	150	Horizontal	Pass
5**	11323.575	38.52	-4.23	54.0	-15.48	AV	76.00	150	Horizontal	Pass
6	15943.838	50.67	-0.35	74.0	-23.33	Peak	158.00	150	Horizontal	Pass
6**	15943.838	41.11	-0.35	54.0	-12.89	AV	158.00	150	Horizontal	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.300	43.61	-17.23	74.0	-30.39	Peak	230.00	150	Vertical	Pass
1**	1327.300	31.76	-17.23	54.0	-22.24	AV	230.00	150	Vertical	Pass
2	4247.750	46.62	-5.29	74.0	-27.38	Peak	108.00	150	Vertical	Pass
2**	4247.750	37.87	-5.29	54.0	-16.13	AV	108.00	150	Vertical	Pass
3	5501.750	98.45	-3.15	--	--	Peak	216.00	150	Vertical	N/A
3**	5501.750	90.30	-3.15	--	--	AV	216.00	150	Vertical	N/A
4	7507.500	51.95	0.27	74.0	-22.05	Peak	184.00	150	Vertical	Pass
4**	7507.500	44.25	0.27	54.0	-9.75	AV	184.00	150	Vertical	Pass
5	12464.287	48.60	-2.24	74.0	-25.40	Peak	280.00	150	Vertical	Pass
5**	12464.287	38.68	-2.24	54.0	-15.32	AV	280.00	150	Vertical	Pass
6	15853.013	50.44	-0.79	74.0	-23.56	Peak	54.00	150	Vertical	Pass
6**	15853.013	40.90	-0.79	54.0	-13.10	AV	54.00	150	Vertical	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	39.05	-17.53	74.0	-34.95	Peak	326.00	150	Vertical	Pass
1**	1494.000	27.72	-17.53	54.0	-26.28	AV	326.00	150	Vertical	Pass
2	4359.750	48.01	-4.25	74.0	-25.99	Peak	309.00	150	Vertical	Pass
2**	4359.750	37.34	-4.25	54.0	-16.66	AV	309.00	150	Vertical	Pass
3	5576.500	102.83	-2.90	--	--	Peak	101.00	150	Vertical	N/A
3**	5576.500	94.43	-2.90	--	--	AV	101.00	150	Vertical	N/A
4	7491.250	51.45	-0.38	74.0	-22.55	Peak	184.00	150	Vertical	Pass
4**	7491.250	42.88	-0.38	54.0	-11.12	AV	184.00	150	Vertical	Pass
5	12042.963	49.36	-3.36	74.0	-24.64	Peak	216.00	150	Vertical	Pass
5**	12042.963	38.99	-3.36	54.0	-15.01	AV	216.00	150	Vertical	Pass
6	16048.312	50.77	-0.10	74.0	-23.23	Peak	24.00	150	Vertical	Pass
6**	16048.312	41.18	-0.10	54.0	-12.82	AV	24.00	150	Vertical	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.400	39.84	-17.23	74.0	-34.16	Peak	330.00	150	Vertical	Pass
1**	1329.400	31.83	-17.23	54.0	-22.17	AV	330.00	150	Vertical	Pass
2	3999.000	46.40	-5.94	74.0	-27.60	Peak	341.00	150	Vertical	Pass
2**	3999.000	36.94	-5.94	54.0	-17.06	AV	341.00	150	Vertical	Pass
3	5577.000	99.64	-2.89	--	--	Peak	250.00	150	Vertical	N/A
3**	5577.000	91.92	-2.89	--	--	AV	250.00	150	Vertical	N/A
4	7459.750	51.69	1.14	74.0	-22.31	Peak	67.00	150	Vertical	Pass
4**	7459.750	44.03	1.14	54.0	-9.97	AV	67.00	150	Vertical	Pass
5	12034.888	48.31	-3.41	74.0	-25.69	Peak	51.00	150	Vertical	Pass
5**	12034.888	39.78	-3.41	54.0	-14.22	AV	51.00	150	Vertical	Pass
6	15755.099	50.59	-0.92	74.0	-23.41	Peak	338.00	150	Vertical	Pass
6**	15755.099	40.30	-0.92	54.0	-13.70	AV	338.00	150	Vertical	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.200	39.06	-17.45	74.0	-34.94	Peak	33.00	150	Horizontal	Pass
1**	1331.200	27.64	-17.45	54.0	-26.36	AV	33.00	150	Horizontal	Pass
2	4226.500	46.39	-5.23	74.0	-27.61	Peak	183.00	150	Horizontal	Pass
2**	4226.500	36.82	-5.23	54.0	-17.18	AV	183.00	150	Horizontal	Pass
--	5701.500	106.73	-2.86	--	--	Peak	274.00	150	Horizontal	N/A
--	5701.500	99.00	-2.86	--	--	AV	274.00	150	Horizontal	N/A
4	7512.000	52.23	0.49	74.0	-21.77	Peak	348.00	150	Horizontal	Pass
4**	7512.000	43.10	0.49	54.0	-10.90	AV	348.00	150	Horizontal	Pass
5	11796.675	49.08	-3.56	74.0	-24.92	Peak	110.00	150	Horizontal	Pass
5**	11796.675	38.90	-3.56	54.0	-15.10	AV	110.00	150	Horizontal	Pass
6	15811.537	50.78	-0.73	74.0	-23.22	Peak	222.00	150	Horizontal	Pass
6**	15811.537	40.63	-0.73	54.0	-13.37	AV	222.00	150	Horizontal	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.100	41.01	-17.11	74.0	-32.99	Peak	195.00	150	Vertical	Pass
1**	1328.100	34.81	-17.11	54.0	-19.19	AV	195.00	150	Vertical	Pass
2	4246.000	47.62	-5.01	74.0	-26.38	Peak	159.00	150	Vertical	Pass
2**	4246.000	37.36	-5.01	54.0	-16.64	AV	159.00	150	Vertical	Pass
3	5697.250	103.99	-2.85	--	--	Peak	259.00	150	Vertical	N/A
3**	5697.250	95.45	-2.85	--	--	AV	259.00	150	Vertical	N/A
4	7689.750	52.39	1.62	74.0	-21.61	Peak	142.00	150	Vertical	Pass
4**	7689.750	43.04	1.62	54.0	-10.96	AV	142.00	150	Vertical	Pass
5	11402.900	49.67	-4.19	74.0	-24.33	Peak	17.00	150	Vertical	Pass
5**	11402.900	39.71	-4.19	54.0	-14.29	AV	17.00	150	Vertical	Pass
6	16037.812	50.55	-0.11	74.0	-23.45	Peak	127.00	150	Vertical	Pass
6**	16037.812	41.64	-0.11	54.0	-12.36	AV	127.00	150	Vertical	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.200	37.78	-17.34	74.0	-36.22	Peak	67.00	150	Vertical	Pass
1**	1330.200	27.82	-17.34	54.0	-26.18	AV	67.00	150	Vertical	Pass
2	4278.000	47.24	-4.75	74.0	-26.76	Peak	178.00	150	Vertical	Pass
2**	4278.000	37.36	-4.75	54.0	-16.64	AV	178.00	150	Vertical	Pass
3	5496.750	99.95	-3.26	--	--	Peak	95.00	150	Vertical	N/A
3**	5496.750	91.37	-3.26	--	--	AV	95.00	150	Vertical	N/A
4	7452.750	51.96	0.98	74.0	-22.04	Peak	195.00	150	Vertical	Pass
4**	7452.750	43.03	0.98	54.0	-10.97	AV	195.00	150	Vertical	Pass
5	11944.401	48.97	-3.61	74.0	-25.03	Peak	0.00	150	Vertical	Pass
5**	11944.401	38.58	-3.61	54.0	-15.42	AV	0.00	150	Vertical	Pass
6	15781.875	50.63	-0.80	74.0	-23.37	Peak	88.00	150	Vertical	Pass
6**	15781.875	40.51	-0.80	54.0	-13.49	AV	88.00	150	Vertical	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.100	42.35	-17.54	74.0	-31.65	Peak	213.00	150	Vertical	Pass
1**	1332.100	28.22	-17.54	54.0	-25.78	AV	213.00	150	Vertical	Pass
2	4222.750	46.20	-5.39	74.0	-27.80	Peak	19.00	150	Vertical	Pass
2**	4222.750	37.90	-5.39	54.0	-16.10	AV	19.00	150	Vertical	Pass
3	5501.750	98.50	-3.15	--	--	Peak	216.00	150	Vertical	N/A
3**	5501.750	90.43	-3.15	--	--	AV	216.00	150	Vertical	N/A
4	7463.500	51.78	1.01	74.0	-22.22	Peak	216.00	150	Vertical	Pass
4**	7463.500	43.73	1.01	54.0	-10.27	AV	216.00	150	Vertical	Pass
5	11786.225	48.21	-3.66	74.0	-25.79	Peak	74.00	150	Vertical	Pass
5**	11786.225	38.80	-3.66	54.0	-15.20	AV	74.00	150	Vertical	Pass
6	15701.550	50.47	0.07	74.0	-23.53	Peak	140.00	150	Vertical	Pass
6**	15701.550	41.31	0.07	54.0	-12.69	AV	140.00	150	Vertical	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.200	38.69	-17.20	74.0	-35.31	Peak	67.00	150	Horizontal	Pass
1**	1329.200	28.07	-17.20	54.0	-25.93	AV	67.00	150	Horizontal	Pass
2	4016.250	46.16	-5.73	74.0	-27.84	Peak	91.00	150	Horizontal	Pass
2**	4016.250	35.98	-5.73	54.0	-18.02	AV	91.00	150	Horizontal	Pass
3	5581.000	102.06	-2.71	--	--	Peak	282.00	150	Horizontal	N/A
3**	5581.000	94.41	-2.71	--	--	AV	282.00	150	Horizontal	N/A
4	7509.500	52.47	0.53	74.0	-21.53	Peak	250.00	150	Horizontal	Pass
4**	7509.500	43.81	0.53	54.0	-10.19	AV	250.00	150	Horizontal	Pass
5	11683.625	49.18	-4.29	74.0	-24.82	Peak	261.00	150	Horizontal	Pass
5**	11683.625	37.95	-4.29	54.0	-16.05	AV	261.00	150	Horizontal	Pass
6	15827.812	50.12	-0.74	74.0	-23.88	Peak	240.00	150	Horizontal	Pass
6**	15827.812	41.34	-0.74	54.0	-12.66	AV	240.00	150	Horizontal	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.500	45.93	-17.10	74.0	-28.07	Peak	209.00	150	Vertical	Pass
1**	1328.500	38.57	-17.10	54.0	-15.43	AV	209.00	150	Vertical	Pass
2	4307.000	46.98	-4.16	74.0	-27.02	Peak	297.00	150	Vertical	Pass
2**	4307.000	38.85	-4.16	54.0	-15.15	AV	297.00	150	Vertical	Pass
3	5575.750	99.58	-2.96	--	--	Peak	214.00	150	Vertical	N/A
3**	5575.750	91.78	-2.96	--	--	AV	214.00	150	Vertical	N/A
4	7463.250	51.61	1.04	74.0	-22.39	Peak	356.00	150	Vertical	Pass
4**	7463.250	42.57	1.04	54.0	-11.43	AV	356.00	150	Vertical	Pass
5	11548.724	48.40	-4.38	74.0	-25.60	Peak	340.00	150	Vertical	Pass
5**	11548.724	38.66	-4.38	54.0	-15.34	AV	340.00	150	Vertical	Pass
6	15817.312	50.38	-0.73	74.0	-23.62	Peak	172.00	150	Vertical	Pass
6**	15817.312	42.43	-0.73	54.0	-11.57	AV	172.00	150	Vertical	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1165.800	38.01	-18.20	74.0	-35.99	Peak	237.00	150	Horizontal	Pass
1**	1165.800	26.42	-18.20	54.0	-27.58	AV	237.00	150	Horizontal	Pass
2	4298.500	48.70	-4.68	74.0	-25.30	Peak	339.00	150	Horizontal	Pass
2**	4298.500	38.22	-4.68	54.0	-15.78	AV	339.00	150	Horizontal	Pass
3	5693.000	107.86	-2.90	--	--	Peak	145.00	150	Horizontal	N/A
3**	5693.000	100.69	-2.90	--	--	AV	145.00	150	Horizontal	N/A
4	7453.750	52.72	1.09	74.0	-21.28	Peak	61.00	150	Horizontal	Pass
4**	7453.750	43.48	1.09	54.0	-10.52	AV	61.00	150	Horizontal	Pass
5	11807.600	49.72	-3.48	74.0	-24.28	Peak	19.00	150	Horizontal	Pass
5**	11807.600	39.11	-3.48	54.0	-14.89	AV	19.00	150	Horizontal	Pass
6	15807.337	51.30	-0.72	74.0	-22.70	Peak	257.00	150	Horizontal	Pass
6**	15807.337	41.61	-0.72	54.0	-12.39	AV	257.00	150	Horizontal	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.500	42.10	-17.39	74.0	-31.90	Peak	233.00	150	Vertical	Pass
1**	1330.500	30.42	-17.39	54.0	-23.58	AV	233.00	150	Vertical	Pass
2	4295.000	47.74	-4.43	74.0	-26.26	Peak	112.00	150	Vertical	Pass
2**	4295.000	38.26	-4.43	54.0	-15.74	AV	112.00	150	Vertical	Pass
3	5694.500	105.58	-2.79	--	--	Peak	205.00	150	Vertical	N/A
3**	5694.500	98.56	-2.79	--	--	AV	205.00	150	Vertical	N/A
4	7476.000	52.76	0.61	74.0	-21.24	Peak	4.00	150	Vertical	Pass
4**	7476.000	43.65	0.61	54.0	-10.35	AV	4.00	150	Vertical	Pass
5	11805.938	49.04	-3.50	74.0	-24.96	Peak	54.00	150	Vertical	Pass
5**	11805.938	40.06	-3.50	54.0	-13.94	AV	54.00	150	Vertical	Pass
6	16149.900	52.10	-0.47	74.0	-21.90	Peak	329.00	150	Vertical	Pass
6**	16149.900	41.73	-0.47	54.0	-12.27	AV	329.00	150	Vertical	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.700	40.20	-17.13	74.0	-33.80	Peak	232.00	150	Horizontal	Pass
1**	1328.700	29.29	-17.13	54.0	-24.71	AV	232.00	150	Horizontal	Pass
2	4285.750	47.57	-4.62	74.0	-26.43	Peak	305.00	150	Horizontal	Pass
2**	4285.750	38.65	-4.62	54.0	-15.35	AV	305.00	150	Horizontal	Pass
3	5519.000	96.67	-2.97	--	--	Peak	263.00	150	Horizontal	N/A
3**	5519.000	89.75	-2.97	--	--	AV	263.00	150	Horizontal	N/A
4	7463.000	52.74	1.08	74.0	-21.26	Peak	137.00	150	Horizontal	Pass
4**	7463.000	43.89	1.08	54.0	-10.11	AV	137.00	150	Horizontal	Pass
5	11796.437	49.17	-3.57	74.0	-24.83	Peak	29.00	150	Horizontal	Pass
5**	11796.437	39.70	-3.57	54.0	-14.30	AV	29.00	150	Horizontal	Pass
6	15946.200	50.90	-0.31	74.0	-23.10	Peak	311.00	150	Horizontal	Pass
6**	15946.200	41.67	-0.31	54.0	-12.33	AV	311.00	150	Horizontal	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.400	42.41	-17.09	74.0	-31.59	Peak	24.00	150	Vertical	Pass
1**	1328.400	33.57	-17.09	54.0	-20.43	AV	24.00	150	Vertical	Pass
2	4065.250	46.15	-5.96	74.0	-27.85	Peak	348.00	150	Vertical	Pass
2**	4065.250	35.69	-5.96	54.0	-18.31	AV	348.00	150	Vertical	Pass
3	5506.500	95.81	-3.21	--	--	Peak	205.00	150	Vertical	N/A
3**	5506.500	86.89	-3.21	--	--	AV	205.00	150	Vertical	N/A
4	7523.250	53.19	0.91	74.0	-20.81	Peak	36.00	150	Vertical	Pass
4**	7523.250	44.32	0.91	54.0	-9.68	AV	36.00	150	Vertical	Pass
5	11658.450	48.74	-4.43	74.0	-25.26	Peak	88.00	150	Vertical	Pass
5**	11658.450	39.27	-4.43	54.0	-14.73	AV	88.00	150	Vertical	Pass
6	15467.924	50.96	-0.39	74.0	-23.04	Peak	318.00	150	Vertical	Pass
6**	15467.924	41.48	-0.39	54.0	-12.52	AV	318.00	150	Vertical	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	39.29	-17.31	74.0	-34.71	Peak	80.00	150	Horizontal	Pass
1**	1330.000	29.28	-17.31	54.0	-24.72	AV	80.00	150	Horizontal	Pass
2	4208.000	47.44	-5.33	74.0	-26.56	Peak	339.00	150	Horizontal	Pass
2**	4208.000	38.08	-5.33	54.0	-15.92	AV	339.00	150	Horizontal	Pass
3	5600.250	102.13	-2.96	--	--	Peak	147.00	150	Horizontal	N/A
3**	5600.250	93.95	-2.96	--	--	AV	147.00	150	Horizontal	N/A
4	7471.750	52.43	0.78	74.0	-21.57	Peak	280.00	150	Horizontal	Pass
4**	7471.750	42.86	0.78	54.0	-11.14	AV	280.00	150	Horizontal	Pass
5	12300.888	49.29	-2.44	74.0	-24.71	Peak	29.00	150	Horizontal	Pass
5**	12300.888	41.89	-2.44	54.0	-12.11	AV	29.00	150	Horizontal	Pass
6	16069.313	51.56	-0.44	74.0	-22.44	Peak	332.00	150	Horizontal	Pass
6**	16069.313	42.40	-0.44	54.0	-11.60	AV	332.00	150	Horizontal	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.400	44.78	-17.37	74.0	-29.22	Peak	224.00	150	Vertical	Pass
1**	1330.400	28.99	-17.37	54.0	-25.01	AV	224.00	150	Vertical	Pass
2	4303.750	48.08	-4.28	74.0	-25.92	Peak	21.00	150	Vertical	Pass
2**	4303.750	40.48	-4.28	54.0	-13.52	AV	21.00	150	Vertical	Pass
3	5597.750	99.79	-2.84	--	--	Peak	205.00	150	Vertical	N/A
3**	5597.750	92.36	-2.84	--	--	AV	205.00	150	Vertical	N/A
4	7507.750	52.79	0.31	74.0	-21.21	Peak	45.00	150	Vertical	Pass
4**	7507.750	44.55	0.31	54.0	-9.45	AV	45.00	150	Vertical	Pass
5	12299.463	49.43	-2.44	74.0	-24.57	Peak	279.00	150	Vertical	Pass
5**	12299.463	39.97	-2.44	54.0	-14.03	AV	279.00	150	Vertical	Pass
6	15560.588	50.73	-0.68	74.0	-23.27	Peak	334.00	150	Vertical	Pass
6**	15560.588	41.09	-0.68	54.0	-12.91	AV	334.00	150	Vertical	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1225.000	37.72	-17.98	74.0	-36.28	Peak	29.00	150	Horizontal	Pass
1**	1225.000	28.41	-17.98	54.0	-25.59	AV	29.00	150	Horizontal	Pass
2	4152.500	46.62	-6.00	74.0	-27.38	Peak	232.00	150	Horizontal	Pass
2**	4152.500	37.40	-6.00	54.0	-16.60	AV	232.00	150	Horizontal	Pass
3	5675.500	104.28	-3.29	--	--	Peak	147.00	150	Horizontal	N/A
3**	5675.500	97.22	-3.29	--	--	AV	147.00	150	Horizontal	N/A
4	7540.750	52.60	0.59	74.0	-21.40	Peak	257.00	150	Horizontal	Pass
4**	7540.750	43.23	0.59	54.0	-10.77	AV	257.00	150	Horizontal	Pass
5	11212.188	49.70	-4.09	74.0	-24.30	Peak	145.00	150	Horizontal	Pass
5**	11212.188	41.90	-4.09	54.0	-12.10	AV	145.00	150	Horizontal	Pass
6	15729.637	51.53	-0.52	74.0	-22.47	Peak	108.00	150	Horizontal	Pass
6**	15729.637	41.75	-0.52	54.0	-12.25	AV	108.00	150	Horizontal	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.300	43.81	-17.23	74.0	-30.19	Peak	202.00	150	Vertical	Pass
1**	1327.300	33.44	-17.23	54.0	-20.56	AV	202.00	150	Vertical	Pass
2	4133.250	47.07	-5.65	74.0	-26.93	Peak	188.00	150	Vertical	Pass
2**	4133.250	36.93	-5.65	54.0	-17.07	AV	188.00	150	Vertical	Pass
3	5675.000	102.90	-3.29	--	--	Peak	205.00	150	Vertical	N/A
3**	5675.000	95.23	-3.29	--	--	AV	205.00	150	Vertical	N/A
4	7455.000	53.05	1.17	74.0	-20.95	Peak	205.00	150	Vertical	Pass
4**	7455.000	44.23	1.17	54.0	-9.77	AV	205.00	150	Vertical	Pass
5	11787.888	49.43	-3.64	74.0	-24.57	Peak	227.00	150	Vertical	Pass
5**	11787.888	40.67	-3.64	54.0	-13.33	AV	227.00	150	Vertical	Pass
6	15860.100	50.64	-0.85	74.0	-23.36	Peak	360.00	150	Vertical	Pass
6**	15860.100	41.11	-0.85	54.0	-12.89	AV	360.00	150	Vertical	Pass

11ac80, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.800	40.25	-17.29	74.0	-33.75	Peak	29.00	150	Horizontal	Pass
1**	1329.800	29.93	-17.29	54.0	-24.07	AV	29.00	150	Horizontal	Pass
2	4308.250	47.36	-4.22	74.0	-26.64	Peak	186.00	150	Horizontal	Pass
2**	4308.250	38.74	-4.22	54.0	-15.26	AV	186.00	150	Horizontal	Pass
3	5529.500	91.51	-2.89	--	--	Peak	136.00	150	Horizontal	N/A
3**	5529.500	84.12	-2.89	--	--	AV	136.00	150	Horizontal	N/A
4	7455.750	53.63	1.15	74.0	-20.37	Peak	356.00	150	Horizontal	Pass
4**	7455.750	44.92	1.15	54.0	-9.08	AV	356.00	150	Horizontal	Pass
5	11790.975	49.34	-3.61	74.0	-24.66	Peak	237.00	150	Horizontal	Pass
5**	11790.975	40.22	-3.61	54.0	-13.78	AV	237.00	150	Horizontal	Pass
6	15946.200	50.76	-0.31	74.0	-23.24	Peak	360.00	150	Horizontal	Pass
6**	15946.200	41.86	-0.31	54.0	-12.14	AV	360.00	150	Horizontal	Pass

11ac80, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.300	45.77	-17.22	74.0	-28.23	Peak	225.00	150	Vertical	Pass
1**	1329.300	38.10	-17.22	54.0	-15.90	AV	225.00	150	Vertical	Pass
2	4228.250	47.47	-5.24	74.0	-26.53	Peak	339.00	150	Vertical	Pass
2**	4228.250	38.29	-5.24	54.0	-15.71	AV	339.00	150	Vertical	Pass
3	5512.250	89.60	-3.13	--	--	Peak	198.00	150	Vertical	N/A
3**	5512.250	81.92	-3.13	--	--	AV	198.00	150	Vertical	N/A
4	7516.500	53.30	0.93	74.0	-20.70	Peak	139.00	150	Vertical	Pass
4**	7516.500	43.74	0.93	54.0	-10.26	AV	139.00	150	Vertical	Pass
5	11183.213	49.54	-4.17	74.0	-24.46	Peak	352.00	150	Vertical	Pass
5**	11183.213	39.17	-4.17	54.0	-14.83	AV	352.00	150	Vertical	Pass
6	16055.400	52.28	-0.19	74.0	-21.72	Peak	164.00	150	Vertical	Pass
6**	16055.400	42.26	-0.19	54.0	-11.74	AV	164.00	150	Vertical	Pass

11ac80, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.400	39.71	-17.23	74.0	-34.29	Peak	70.00	150	Horizontal	Pass
1**	1329.400	27.69	-17.23	54.0	-26.31	AV	70.00	150	Horizontal	Pass
2	4200.500	47.01	-5.45	74.0	-26.99	Peak	62.00	150	Horizontal	Pass
2**	4200.500	37.55	-5.45	54.0	-16.45	AV	62.00	150	Horizontal	Pass
3	5632.750	99.95	-2.23	--	--	Peak	137.00	150	Horizontal	N/A
3**	5632.750	92.27	-2.23	--	--	AV	137.00	150	Horizontal	N/A
4	7459.500	52.73	1.14	74.0	-21.27	Peak	360.00	150	Horizontal	Pass
4**	7459.500	44.42	1.14	54.0	-9.58	AV	360.00	150	Horizontal	Pass
5	11295.313	49.33	-4.03	74.0	-24.67	Peak	141.00	150	Horizontal	Pass
5**	11295.313	39.09	-4.03	54.0	-14.91	AV	141.00	150	Horizontal	Pass
6	15711.000	51.95	-0.13	74.0	-22.05	Peak	218.00	150	Horizontal	Pass
6**	15711.000	42.33	-0.13	54.0	-11.67	AV	218.00	150	Horizontal	Pass

11ac80, U-NII-2C, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1326.700	44.19	-17.32	74.0	-29.81	Peak	219.00	150	Vertical	Pass
1**	1326.700	27.97	-17.32	54.0	-26.03	AV	219.00	150	Vertical	Pass
2	4314.500	48.02	-4.43	74.0	-25.98	Peak	298.00	150	Vertical	Pass
2**	4314.500	38.45	-4.43	54.0	-15.55	AV	298.00	150	Vertical	Pass
3	5628.750	97.94	-2.18	--	--	Peak	205.00	150	Vertical	N/A
3**	5628.750	90.06	-2.18	--	--	AV	205.00	150	Vertical	N/A
4	7453.500	52.32	1.06	74.0	-21.68	Peak	255.00	150	Vertical	Pass
4**	7453.500	44.10	1.06	54.0	-9.90	AV	255.00	150	Vertical	Pass
5	11773.400	48.92	-3.77	74.0	-25.08	Peak	181.00	150	Vertical	Pass
5**	11773.400	39.47	-3.77	54.0	-14.53	AV	181.00	150	Vertical	Pass
6	15780.563	51.11	-0.80	74.0	-22.89	Peak	329.00	150	Vertical	Pass
6**	15780.563	40.88	-0.80	54.0	-13.12	AV	329.00	150	Vertical	Pass

11a, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.500	37.31	-17.90	74.0	-36.69	Peak	163.00	150	Horizontal	Pass
1**	1199.500	27.64	-17.90	54.0	-26.36	AV	163.00	150	Horizontal	Pass
2	4136.000	47.66	-5.55	74.0	-26.34	Peak	0.00	150	Horizontal	Pass
2**	4136.000	37.55	-5.55	54.0	-16.45	AV	0.00	150	Horizontal	Pass
3	5750.250	109.17	-2.77	--	--	Peak	146.00	150	Horizontal	N/A
3**	5750.250	101.90	-2.77	--	--	AV	146.00	150	Horizontal	N/A
4	7461.500	52.81	1.12	74.0	-21.19	Peak	272.00	150	Horizontal	Pass
4**	7461.500	44.39	1.12	54.0	-9.61	AV	272.00	150	Horizontal	Pass
5	11214.800	49.44	-4.10	74.0	-24.56	Peak	353.00	150	Horizontal	Pass
5**	11214.800	41.43	-4.10	54.0	-12.57	AV	353.00	150	Horizontal	Pass
6	16024.688	52.08	-0.13	74.0	-21.92	Peak	160.00	150	Horizontal	Pass
6**	16024.688	43.04	-0.13	54.0	-10.96	AV	160.00	150	Horizontal	Pass

11a, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.900	44.93	-17.14	74.0	-29.07	Peak	221.00	150	Vertical	Pass
1**	1327.900	31.12	-17.14	54.0	-22.88	AV	221.00	150	Vertical	Pass
2	4302.750	47.46	-4.35	74.0	-26.54	Peak	264.00	150	Vertical	Pass
2**	4302.750	38.29	-4.35	54.0	-15.71	AV	264.00	150	Vertical	Pass
3	5739.000	106.59	-3.13	--	--	Peak	205.00	150	Vertical	N/A
3**	5739.000	98.98	-3.13	--	--	AV	205.00	150	Vertical	N/A
4	7510.500	53.18	0.53	74.0	-20.82	Peak	146.00	150	Vertical	Pass
4**	7510.500	43.98	0.53	54.0	-10.02	AV	146.00	150	Vertical	Pass
5	11199.838	50.56	-4.05	74.0	-23.44	Peak	182.00	150	Vertical	Pass
5**	11199.838	39.97	-4.05	54.0	-14.03	AV	182.00	150	Vertical	Pass
6	15541.687	50.50	-0.58	74.0	-23.50	Peak	347.00	150	Vertical	Pass
6**	15541.687	42.51	-0.58	54.0	-11.49	AV	347.00	150	Vertical	Pass

11a, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.900	37.36	-17.87	74.0	-36.64	Peak	328.00	150	Horizontal	Pass
1**	1197.900	27.30	-17.87	54.0	-26.70	AV	328.00	150	Horizontal	Pass
2	5073.500	49.80	-3.09	74.0	-24.20	Peak	281.00	150	Horizontal	Pass
2**	5073.500	39.98	-3.09	54.0	-14.02	AV	281.00	150	Horizontal	Pass
3	5779.500	109.27	-2.79	--	--	Peak	154.00	150	Horizontal	N/A
3**	5779.500	102.82	-2.79	--	--	AV	154.00	150	Horizontal	N/A
4	7508.750	52.39	0.44	74.0	-21.61	Peak	68.00	150	Horizontal	Pass
4**	7508.750	43.79	0.44	54.0	-10.21	AV	68.00	150	Horizontal	Pass
5	11210.050	49.74	-4.08	74.0	-24.26	Peak	195.00	150	Horizontal	Pass
5**	11210.050	39.79	-4.08	54.0	-14.21	AV	195.00	150	Horizontal	Pass
6	15454.276	50.96	-0.19	74.0	-23.04	Peak	3.00	150	Horizontal	Pass
6**	15454.276	41.85	-0.19	54.0	-12.15	AV	3.00	150	Horizontal	Pass

11a, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.300	44.59	-17.22	74.0	-29.41	Peak	212.00	150	Vertical	Pass
1**	1329.300	37.74	-17.22	54.0	-16.26	AV	212.00	150	Vertical	Pass
2	4248.000	47.90	-5.31	74.0	-26.10	Peak	117.00	150	Vertical	Pass
2**	4248.000	38.16	-5.31	54.0	-15.84	AV	117.00	150	Vertical	Pass
3	5786.250	107.43	-3.10	--	--	Peak	203.00	150	Vertical	N/A
3**	5786.250	100.48	-3.10	--	--	AV	203.00	150	Vertical	N/A
4	7466.500	52.33	0.86	74.0	-21.67	Peak	212.00	150	Vertical	Pass
4**	7466.500	44.08	0.86	54.0	-9.92	AV	212.00	150	Vertical	Pass
5	11819.000	49.28	-3.41	74.0	-24.72	Peak	78.00	150	Vertical	Pass
5**	11819.000	39.10	-3.41	54.0	-14.90	AV	78.00	150	Vertical	Pass
6	16081.125	52.00	-0.65	74.0	-22.00	Peak	87.00	150	Vertical	Pass
6**	16081.125	42.57	-0.65	54.0	-11.43	AV	87.00	150	Vertical	Pass

11a, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.500	41.09	-17.48	74.0	-32.91	Peak	232.00	150	Horizontal	Pass
1**	1331.500	27.57	-17.48	54.0	-26.43	AV	232.00	150	Horizontal	Pass
2	4177.250	47.11	-5.25	74.0	-26.89	Peak	212.00	150	Horizontal	Pass
2**	4177.250	37.36	-5.25	54.0	-16.64	AV	212.00	150	Horizontal	Pass
3	5818.500	109.64	-2.87	--	--	Peak	262.00	150	Horizontal	N/A
3**	5818.500	102.84	-2.87	--	--	AV	262.00	150	Horizontal	N/A
4	7463.000	52.66	1.08	74.0	-21.34	Peak	360.00	150	Horizontal	Pass
4**	7463.000	44.84	1.08	54.0	-9.16	AV	360.00	150	Horizontal	Pass
5	11809.738	49.77	-3.47	74.0	-24.23	Peak	360.00	150	Horizontal	Pass
5**	11809.738	40.37	-3.47	54.0	-13.63	AV	360.00	150	Horizontal	Pass
6	15964.313	51.33	-0.21	74.0	-22.67	Peak	242.00	150	Horizontal	Pass
6**	15964.313	41.39	-0.21	54.0	-12.61	AV	242.00	150	Horizontal	Pass

11a, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.300	45.20	-17.36	74.0	-28.80	Peak	209.00	150	Vertical	Pass
1**	1330.300	35.85	-17.36	54.0	-18.15	AV	209.00	150	Vertical	Pass
2	4236.000	47.60	-5.10	74.0	-26.40	Peak	111.00	150	Vertical	Pass
2**	4236.000	37.87	-5.10	54.0	-16.13	AV	111.00	150	Vertical	Pass
3	5820.750	107.48	-2.87	--	--	Peak	203.00	150	Vertical	N/A
3**	5820.750	99.25	-2.87	--	--	AV	203.00	150	Vertical	N/A
4	7455.000	52.94	1.17	74.0	-21.06	Peak	68.00	150	Vertical	Pass
4**	7455.000	44.90	1.17	54.0	-9.10	AV	68.00	150	Vertical	Pass
5	12202.325	49.37	-2.98	74.0	-24.63	Peak	175.00	150	Vertical	Pass
5**	12202.325	39.45	-2.98	54.0	-14.55	AV	175.00	150	Vertical	Pass
6	15725.438	51.90	-0.43	74.0	-22.10	Peak	185.00	150	Vertical	Pass
6**	15725.438	41.99	-0.43	54.0	-12.01	AV	185.00	150	Vertical	Pass

11n20, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.500	37.05	-17.90	74.0	-36.95	Peak	218.00	150	Horizontal	Pass
1**	1199.500	27.47	-17.90	54.0	-26.53	AV	218.00	150	Horizontal	Pass
2	4287.500	47.85	-4.50	74.0	-26.15	Peak	291.00	150	Horizontal	Pass
2**	4287.500	39.49	-4.50	54.0	-14.51	AV	291.00	150	Horizontal	Pass
3	5750.500	108.60	-2.76	--	--	Peak	148.00	150	Horizontal	N/A
3**	5750.500	100.71	-2.76	--	--	AV	148.00	150	Horizontal	N/A
4	7516.250	52.73	0.94	74.0	-21.27	Peak	112.00	150	Horizontal	Pass
4**	7516.250	43.95	0.94	54.0	-10.05	AV	112.00	150	Horizontal	Pass
5	11797.151	50.25	-3.56	74.0	-23.75	Peak	111.00	150	Horizontal	Pass
5**	11797.151	40.81	-3.56	54.0	-13.19	AV	111.00	150	Horizontal	Pass
6	15581.850	51.42	-0.99	74.0	-22.58	Peak	350.00	150	Horizontal	Pass
6**	15581.850	41.63	-0.99	54.0	-12.37	AV	350.00	150	Horizontal	Pass

11n20, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.200	45.06	-17.53	74.0	-28.94	Peak	210.00	150	Vertical	Pass
1**	1333.200	30.19	-17.53	54.0	-23.81	AV	210.00	150	Vertical	Pass
2	4319.250	48.33	-4.59	74.0	-25.67	Peak	33.00	150	Vertical	Pass
2**	4319.250	37.97	-4.59	54.0	-16.03	AV	33.00	150	Vertical	Pass
3	5751.750	106.79	-2.72	--	--	Peak	203.00	150	Vertical	N/A
3**	5751.750	99.19	-2.72	--	--	AV	203.00	150	Vertical	N/A
4	7519.250	52.90	0.84	74.0	-21.10	Peak	75.00	150	Vertical	Pass
4**	7519.250	44.49	0.84	54.0	-9.51	AV	75.00	150	Vertical	Pass
5	11488.874	49.20	-4.21	74.0	-24.80	Peak	17.00	150	Vertical	Pass
5**	11488.874	39.85	-4.21	54.0	-14.15	AV	17.00	150	Vertical	Pass
6	15717.037	51.93	-0.25	74.0	-22.07	Peak	46.00	150	Vertical	Pass
6**	15717.037	41.94	-0.25	54.0	-12.06	AV	46.00	150	Vertical	Pass

11n20, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.300	39.28	-17.56	74.0	-34.72	Peak	201.00	150	Horizontal	Pass
1**	1332.300	30.79	-17.56	54.0	-23.21	AV	201.00	150	Horizontal	Pass
2	4278.750	47.25	-4.71	74.0	-26.75	Peak	0.00	150	Horizontal	Pass
2**	4278.750	37.63	-4.71	54.0	-16.37	AV	0.00	150	Horizontal	Pass
3	5778.000	108.28	-2.65	--	--	Peak	164.00	150	Horizontal	N/A
3**	5778.000	100.83	-2.65	--	--	AV	164.00	150	Horizontal	N/A
4	7455.250	52.14	1.16	74.0	-21.86	Peak	139.00	150	Horizontal	Pass
4**	7455.250	43.63	1.16	54.0	-10.37	AV	139.00	150	Horizontal	Pass
5	11799.525	48.94	-3.54	74.0	-25.06	Peak	255.00	150	Horizontal	Pass
5**	11799.525	39.44	-3.54	54.0	-14.56	AV	255.00	150	Horizontal	Pass
6	15550.875	51.00	-0.53	74.0	-23.00	Peak	28.00	150	Horizontal	Pass
6**	15550.875	41.40	-0.53	54.0	-12.60	AV	28.00	150	Horizontal	Pass

11n20, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.200	44.04	-17.53	74.0	-29.96	Peak	217.00	150	Vertical	Pass
1**	1333.200	27.89	-17.53	54.0	-26.11	AV	217.00	150	Vertical	Pass
2	4018.000	46.80	-5.97	74.0	-27.20	Peak	299.00	150	Vertical	Pass
2**	4018.000	36.57	-5.97	54.0	-17.43	AV	299.00	150	Vertical	Pass
3	5780.750	105.66	-2.95	--	--	Peak	223.00	150	Vertical	N/A
3**	5780.750	97.98	-2.95	--	--	AV	223.00	150	Vertical	N/A
4	7459.250	52.46	1.14	74.0	-21.54	Peak	257.00	150	Vertical	Pass
4**	7459.250	43.72	1.14	54.0	-10.28	AV	257.00	150	Vertical	Pass
5	12368.338	49.17	-2.86	74.0	-24.83	Peak	329.00	150	Vertical	Pass
5**	12368.338	38.70	-2.86	54.0	-15.30	AV	329.00	150	Vertical	Pass
6	15709.950	51.50	-0.11	74.0	-22.50	Peak	49.00	150	Vertical	Pass
6**	15709.950	41.50	-0.11	54.0	-12.50	AV	49.00	150	Vertical	Pass

11n20, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.900	41.25	-17.32	74.0	-32.75	Peak	224.00	150	Horizontal	Pass
1**	1496.900	27.91	-17.32	54.0	-26.09	AV	224.00	150	Horizontal	Pass
2	4243.250	48.25	-5.37	74.0	-25.75	Peak	147.00	150	Horizontal	Pass
2**	4243.250	37.16	-5.37	54.0	-16.84	AV	147.00	150	Horizontal	Pass
3	5820.500	107.78	-2.84	--	--	Peak	71.00	150	Horizontal	N/A
3**	5820.500	98.92	-2.84	--	--	AV	71.00	150	Horizontal	N/A
4	7459.000	52.94	1.15	74.0	-21.06	Peak	113.00	150	Horizontal	Pass
4**	7459.000	43.93	1.15	54.0	-10.07	AV	113.00	150	Horizontal	Pass
5	12621.750	50.14	-2.48	74.0	-23.86	Peak	284.00	150	Horizontal	Pass
5**	12621.750	39.27	-2.48	54.0	-14.73	AV	284.00	150	Horizontal	Pass
6	15710.737	51.01	-0.12	74.0	-22.99	Peak	85.00	150	Horizontal	Pass
6**	15710.737	40.89	-0.12	54.0	-13.11	AV	85.00	150	Horizontal	Pass

11n20, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.900	40.86	-17.52	74.0	-33.14	Peak	236.00	150	Vertical	Pass
1**	1331.900	28.27	-17.52	54.0	-25.73	AV	236.00	150	Vertical	Pass
2	3986.250	47.64	-6.21	74.0	-26.36	Peak	46.00	150	Vertical	Pass
2**	3986.250	36.21	-6.21	54.0	-17.79	AV	46.00	150	Vertical	Pass
3	5820.500	106.09	-2.84	--	--	Peak	196.00	150	Vertical	N/A
3**	5820.500	98.51	-2.84	--	--	AV	196.00	150	Vertical	N/A
4	7453.500	52.62	1.06	74.0	-21.38	Peak	342.00	150	Vertical	Pass
4**	7453.500	43.87	1.06	54.0	-10.13	AV	342.00	150	Vertical	Pass
5	12201.850	48.78	-2.98	74.0	-25.22	Peak	326.00	150	Vertical	Pass
5**	12201.850	39.65	-2.98	54.0	-14.35	AV	326.00	150	Vertical	Pass
6	15454.537	50.75	-0.20	74.0	-23.25	Peak	0.00	150	Vertical	Pass
6**	15454.537	39.31	-0.20	54.0	-14.69	AV	0.00	150	Vertical	Pass

11n40, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.500	39.62	-17.20	74.0	-34.38	Peak	228.00	150	Horizontal	Pass
1**	1327.500	27.72	-17.20	54.0	-26.28	AV	228.00	150	Horizontal	Pass
2	3921.250	46.34	-6.13	74.0	-27.66	Peak	205.00	150	Horizontal	Pass
2**	3921.250	35.87	-6.13	54.0	-18.13	AV	205.00	150	Horizontal	Pass
3	5759.250	104.80	-2.37	--	--	Peak	156.00	150	Horizontal	N/A
3**	5759.250	96.82	-2.37	--	--	AV	156.00	150	Horizontal	N/A
4	7750.000	49.56	-0.78	74.0	-24.44	Peak	230.00	150	Horizontal	Pass
4**	7750.000	42.16	-0.78	54.0	-11.84	AV	230.00	150	Horizontal	Pass
5	11119.799	49.25	-4.49	74.0	-24.75	Peak	67.00	150	Horizontal	Pass
5**	11119.799	38.77	-4.49	54.0	-15.23	AV	67.00	150	Horizontal	Pass
6	15957.488	51.37	-0.22	74.0	-22.63	Peak	28.00	150	Horizontal	Pass
6**	15957.488	42.16	-0.22	54.0	-11.84	AV	28.00	150	Horizontal	Pass

11n40, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.700	41.42	-17.41	74.0	-32.58	Peak	221.00	150	Vertical	Pass
1**	1330.700	33.09	-17.41	54.0	-20.91	AV	221.00	150	Vertical	Pass
2	4309.000	47.49	-4.27	74.0	-26.51	Peak	4.00	150	Vertical	Pass
2**	4309.000	38.41	-4.27	54.0	-15.59	AV	4.00	150	Vertical	Pass
3	5765.500	102.52	-2.37	--	--	Peak	235.00	150	Vertical	N/A
3**	5765.500	94.96	-2.37	--	--	AV	235.00	150	Vertical	N/A
4	7457.250	52.93	1.14	74.0	-21.07	Peak	201.00	150	Vertical	Pass
4**	7457.250	43.73	1.14	54.0	-10.27	AV	201.00	150	Vertical	Pass
5	11690.750	49.24	-4.25	74.0	-24.76	Peak	140.00	150	Vertical	Pass
5**	11690.750	39.09	-4.25	54.0	-14.91	AV	140.00	150	Vertical	Pass
6	15707.588	51.04	-0.06	74.0	-22.96	Peak	212.00	150	Vertical	Pass
6**	15707.588	42.35	-0.06	54.0	-11.65	AV	212.00	150	Vertical	Pass

11n40, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1121.900	36.46	-18.34	74.0	-37.54	Peak	359.00	150	Horizontal	Pass
1**	1121.900	26.06	-18.34	54.0	-27.94	AV	359.00	150	Horizontal	Pass
2	4261.500	47.69	-4.50	74.0	-26.31	Peak	115.00	150	Horizontal	Pass
2**	4261.500	38.07	-4.50	54.0	-15.93	AV	115.00	150	Horizontal	Pass
3	5786.000	105.13	-3.11	--	--	Peak	158.00	150	Horizontal	N/A
3**	5786.000	97.24	-3.11	--	--	AV	158.00	150	Horizontal	N/A
4	7503.000	52.84	-0.44	74.0	-21.16	Peak	124.00	150	Horizontal	Pass
4**	7503.000	43.21	-0.44	54.0	-10.79	AV	124.00	150	Horizontal	Pass
5	12184.750	49.90	-3.04	74.0	-24.10	Peak	164.00	150	Horizontal	Pass
5**	12184.750	39.22	-3.04	54.0	-14.78	AV	164.00	150	Horizontal	Pass
6	16026.263	51.14	-0.12	74.0	-22.86	Peak	0.00	150	Horizontal	Pass
6**	16026.263	42.17	-0.12	54.0	-11.83	AV	0.00	150	Horizontal	Pass

11n40, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.700	40.69	-17.27	74.0	-33.31	Peak	228.00	150	Vertical	Pass
1**	1329.700	34.60	-17.27	54.0	-19.40	AV	228.00	150	Vertical	Pass
2	4278.750	47.04	-4.71	74.0	-26.96	Peak	156.00	150	Vertical	Pass
2**	4278.750	38.16	-4.71	54.0	-15.84	AV	156.00	150	Vertical	Pass
3	5803.500	102.65	-3.00	--	--	Peak	230.00	150	Vertical	N/A
3**	5803.500	95.04	-3.00	--	--	AV	230.00	150	Vertical	N/A
4	7452.500	52.60	0.95	74.0	-21.40	Peak	198.00	150	Vertical	Pass
4**	7452.500	43.63	0.95	54.0	-10.37	AV	198.00	150	Vertical	Pass
5	11719.012	49.34	-4.11	74.0	-24.66	Peak	165.00	150	Vertical	Pass
5**	11719.012	38.66	-4.11	54.0	-15.34	AV	165.00	150	Vertical	Pass
6	15697.087	50.74	0.02	74.0	-23.26	Peak	0.00	150	Vertical	Pass
6**	15697.087	40.52	0.02	54.0	-13.48	AV	0.00	150	Vertical	Pass

11ac80, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.500	39.01	-17.24	74.0	-34.99	Peak	221.00	150	Horizontal	Pass
1**	1329.500	30.78	-17.24	54.0	-23.22	AV	221.00	150	Horizontal	Pass
2	4289.000	47.53	-4.53	74.0	-26.47	Peak	97.00	150	Horizontal	Pass
2**	4289.000	37.70	-4.53	54.0	-16.30	AV	97.00	150	Horizontal	Pass
3	5778.250	98.03	-2.67	--	--	Peak	157.00	150	Horizontal	N/A
3**	5778.250	90.21	-2.67	--	--	AV	157.00	150	Horizontal	N/A
4	7467.250	52.46	0.91	74.0	-21.54	Peak	70.00	150	Horizontal	Pass
4**	7467.250	43.20	0.91	54.0	-10.80	AV	70.00	150	Horizontal	Pass
5	11212.425	49.06	-4.09	74.0	-24.94	Peak	118.00	150	Horizontal	Pass
5**	11212.425	39.83	-4.09	54.0	-14.17	AV	118.00	150	Horizontal	Pass
6	15836.213	50.01	-0.75	74.0	-23.99	Peak	0.00	150	Horizontal	Pass
6**	15836.213	40.15	-0.75	54.0	-13.85	AV	0.00	150	Horizontal	Pass

11ac80, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.000	40.36	-17.27	74.0	-33.64	Peak	284.00	150	Vertical	Pass
1**	1327.000	29.25	-17.27	54.0	-24.75	AV	284.00	150	Vertical	Pass
2	4278.000	47.41	-4.75	74.0	-26.59	Peak	12.00	150	Vertical	Pass
2**	4278.000	37.92	-4.75	54.0	-16.08	AV	12.00	150	Vertical	Pass
3	5789.500	95.29	-3.29	--	--	Peak	228.00	150	Vertical	N/A
3**	5789.500	87.19	-3.29	--	--	AV	228.00	150	Vertical	N/A
4	7459.500	52.83	1.14	74.0	-21.17	Peak	188.00	150	Vertical	Pass
4**	7459.500	44.29	1.14	54.0	-9.71	AV	188.00	150	Vertical	Pass
5	12303.263	49.63	-2.46	74.0	-24.37	Peak	209.00	150	Vertical	Pass
5**	12303.263	40.03	-2.46	54.0	-13.97	AV	209.00	150	Vertical	Pass
6	15777.937	49.82	-0.82	74.0	-24.18	Peak	0.00	150	Vertical	Pass
6**	15777.937	41.36	-0.82	54.0	-12.64	AV	0.00	150	Vertical	Pass


A.6.2 Band Edge (Restricted-band)

Test Band	Mode	Channel	Verdict
U-NII-1	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
802.11ac(VHT80)	Middle	Pass	
U-NII-2A	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
802.11ac(VHT80)	Middle	Pass	
U-NII-2C	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
802.11ac(VHT80)	Low	Pass	
	High	Pass	
	High	Pass	
U-NII-3	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass

		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
	802.11ac(VHT80)	Middle	Pass


Test Data and Plots

U-NII-1 11a CH36

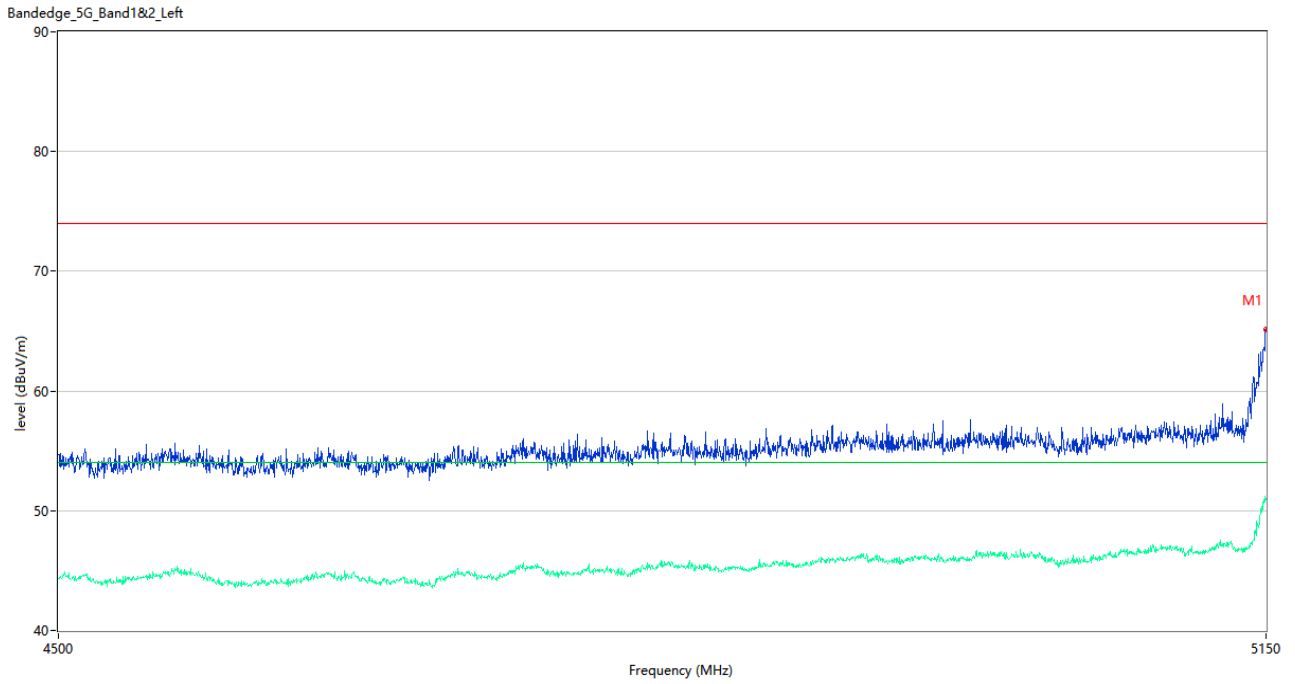


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	65.15	3.94	74.0	-8.85	Peak	47.00	150	Horizontal	Pass
1**	5150.000	50.99	3.94	54.0	-3.01	AV	47.00	150	Horizontal	Pass

U-NII-1 11a CH48

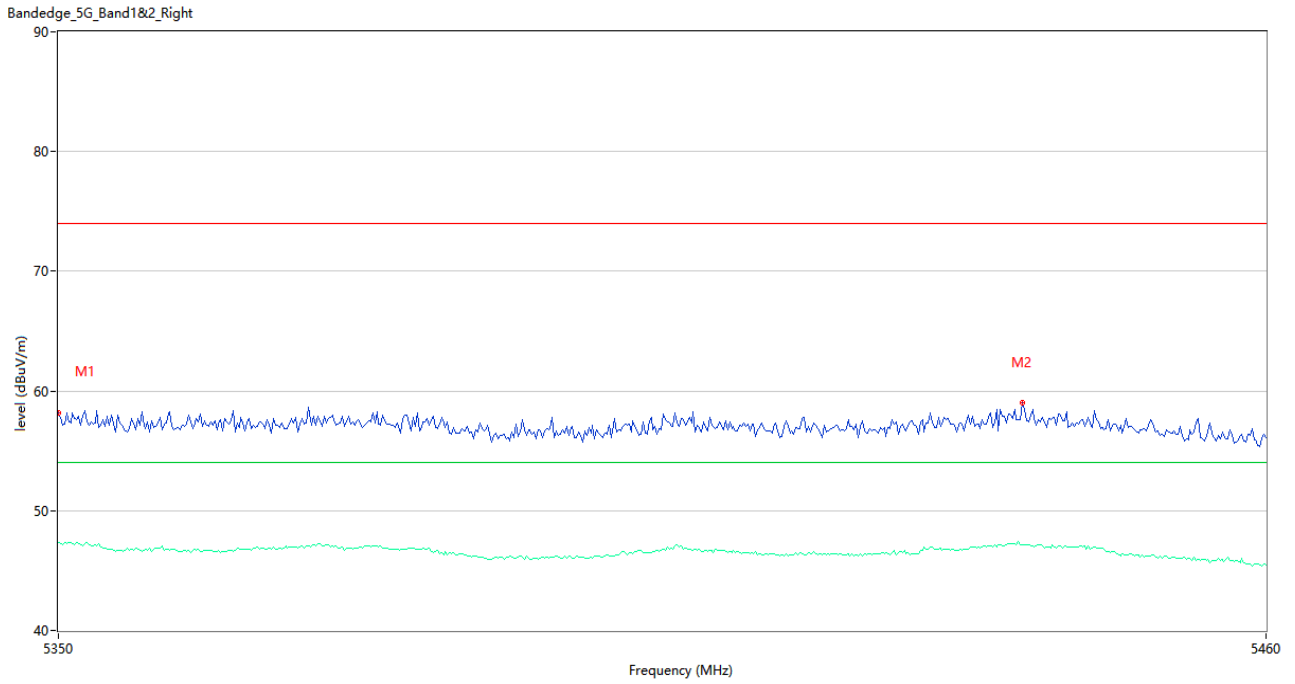


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	58.20	3.96	74.0	-15.80	Peak	49.00	150	Horizontal	Pass
1**	5350.000	47.26	3.96	54.0	-6.74	AV	49.00	150	Horizontal	Pass
2	5437.634	59.05	5.11	74.0	-14.95	Peak	54.00	150	Horizontal	Pass
2**	5437.634	47.16	5.11	54.0	-6.84	AV	54.00	150	Horizontal	Pass

U-NII-1 11n20 CH36

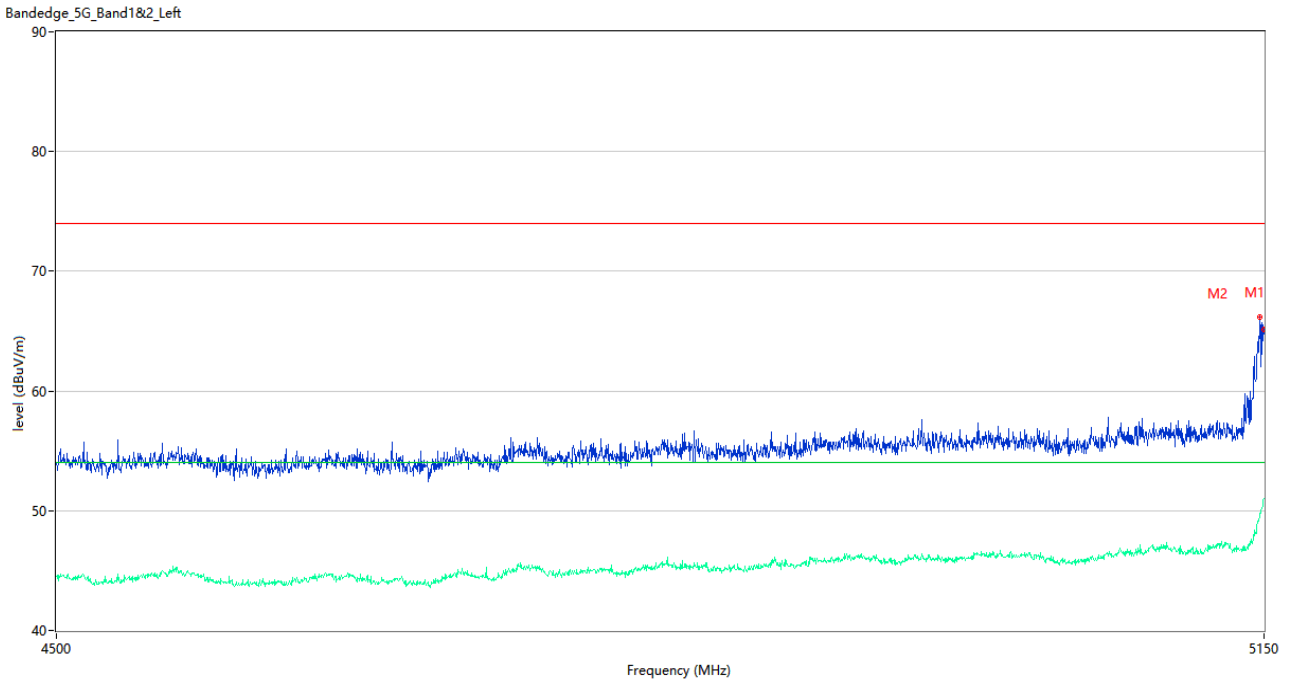


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	65.16	3.94	74.0	-8.84	Peak	40.00	150	Horizontal	Pass
1**	5150.000	51.05	3.94	54.0	-2.95	AV	40.00	150	Horizontal	N/A
1***	5150.000	50.054	3.94	54.0	-3.946	AV	40.00	150	Horizontal	Pass
2	5147.725	66.18	3.91	74.0	-7.82	Peak	42.00	150	Horizontal	Pass
2**	5147.725	49.80	3.91	54.0	-4.20	AV	42.00	150	Horizontal	Pass

U-NII-1 11n20 CH48

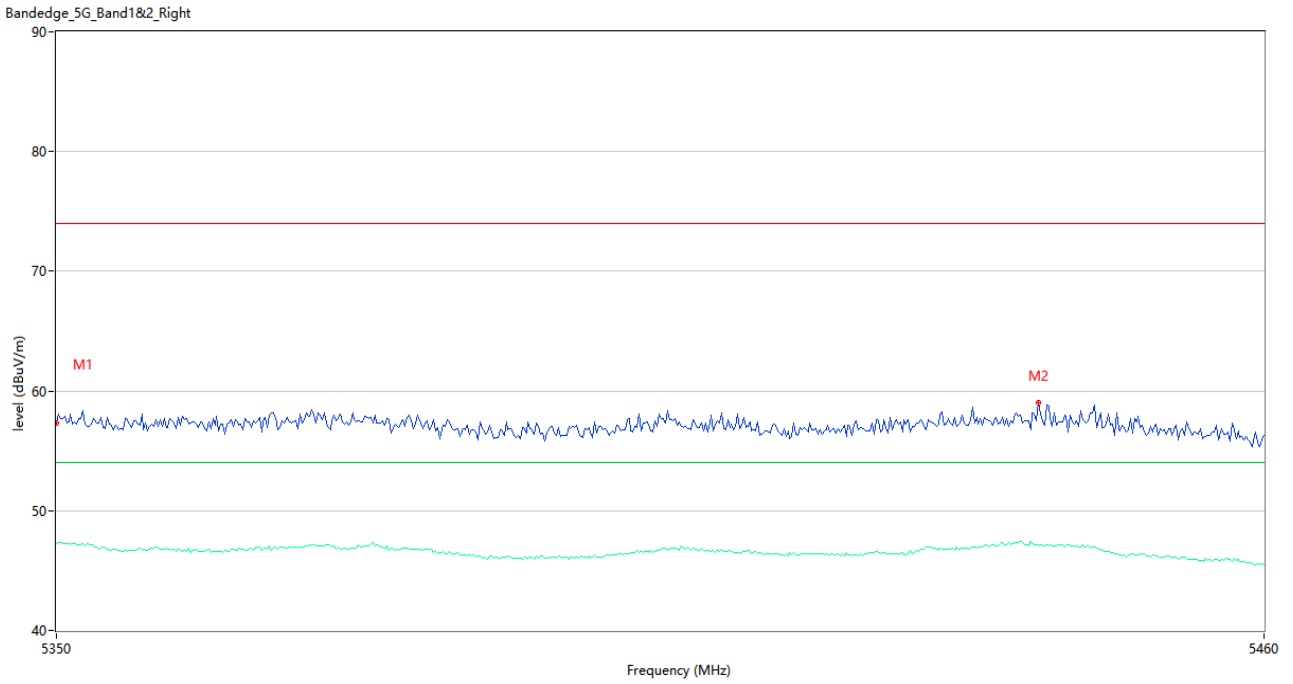


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	57.37	3.96	74.0	-16.63	Peak	274.00	150	Horizontal	Pass
1**	5350.000	47.23	3.96	54.0	-6.77	AV	274.00	150	Horizontal	Pass
2	5439.283	58.98	5.00	74.0	-15.02	Peak	286.00	150	Horizontal	Pass
2**	5439.283	47.02	5.00	54.0	-6.98	AV	286.00	150	Horizontal	Pass

U-NII-1 11n40 CH38

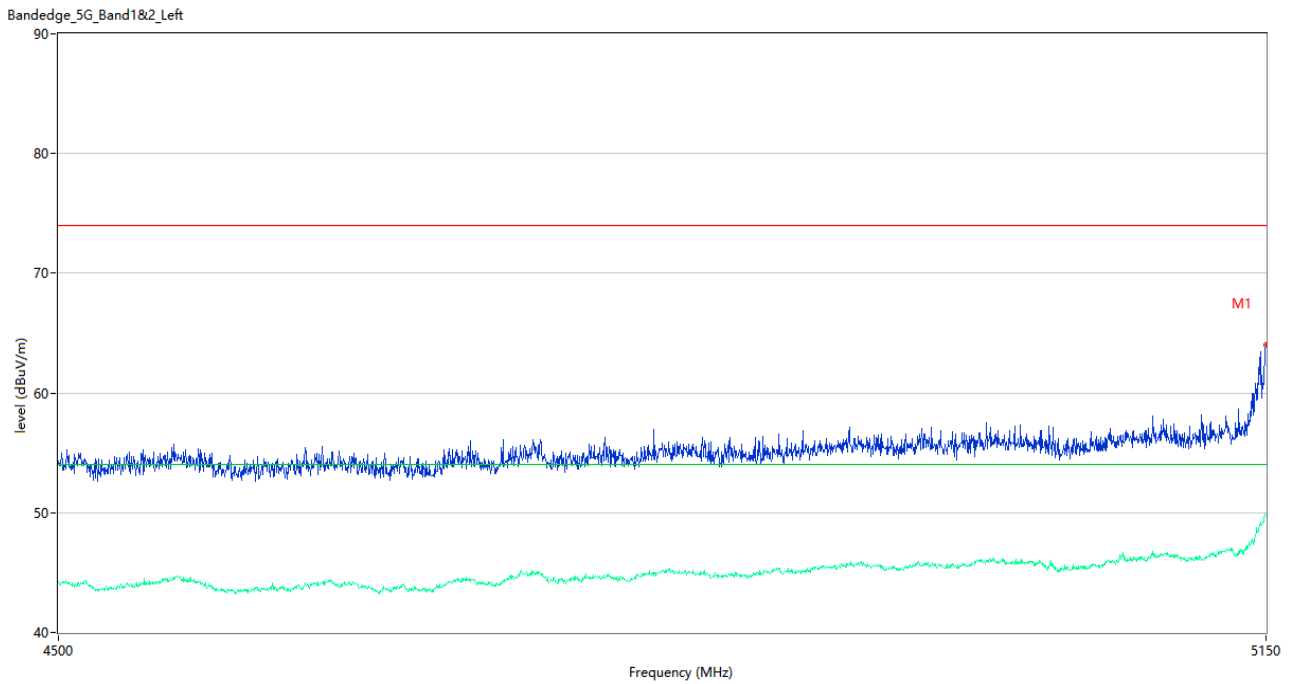


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	64.00	3.94	74.0	-10.00	Peak	40.00	150	Horizontal	Pass
1**	5150.000	49.57	3.94	54.0	-4.43	AV	40.00	150	Horizontal	Pass

U-NII-1 11n40 CH46

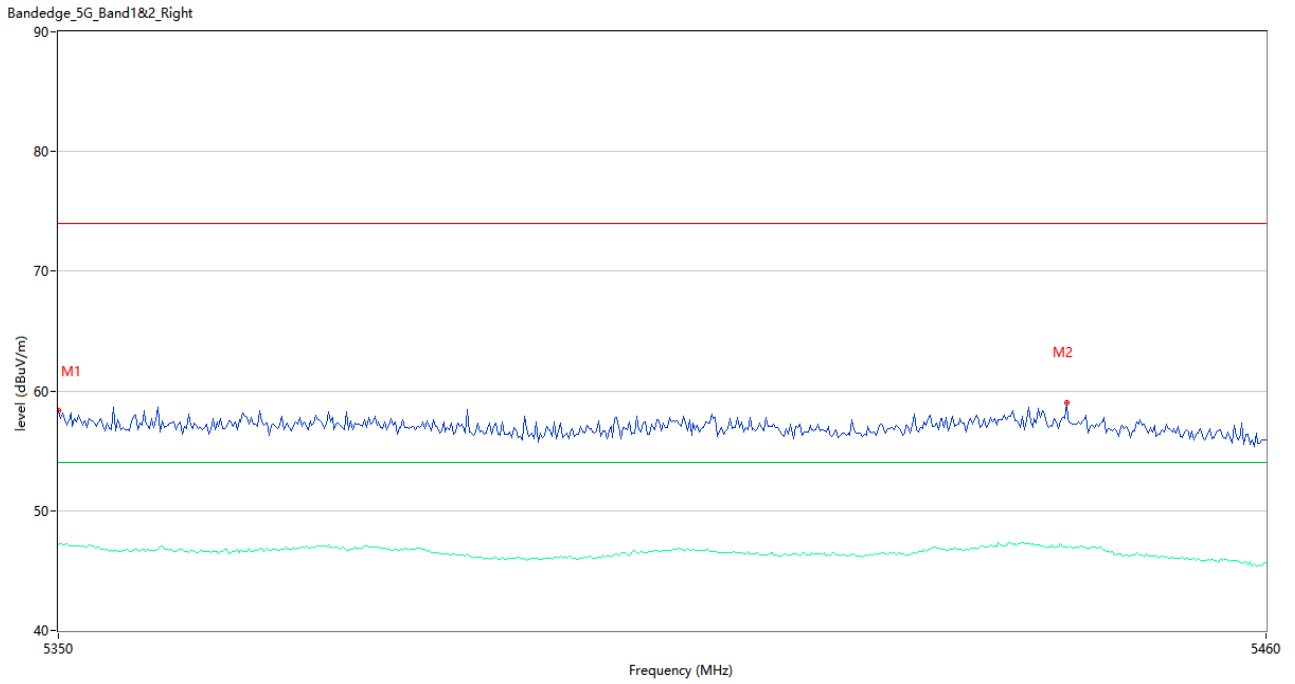


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	58.40	3.96	74.0	-15.60	Peak	360.00	150	Horizontal	Pass
1**	5350.000	47.13	3.96	54.0	-6.87	AV	360.00	150	Horizontal	Pass
2	5441.667	59.06	4.96	74.0	-14.94	Peak	300.00	150	Horizontal	Pass
2**	5441.667	47.01	4.96	54.0	-6.99	AV	300.00	150	Horizontal	Pass

U-NII-1 11ac80 CH42

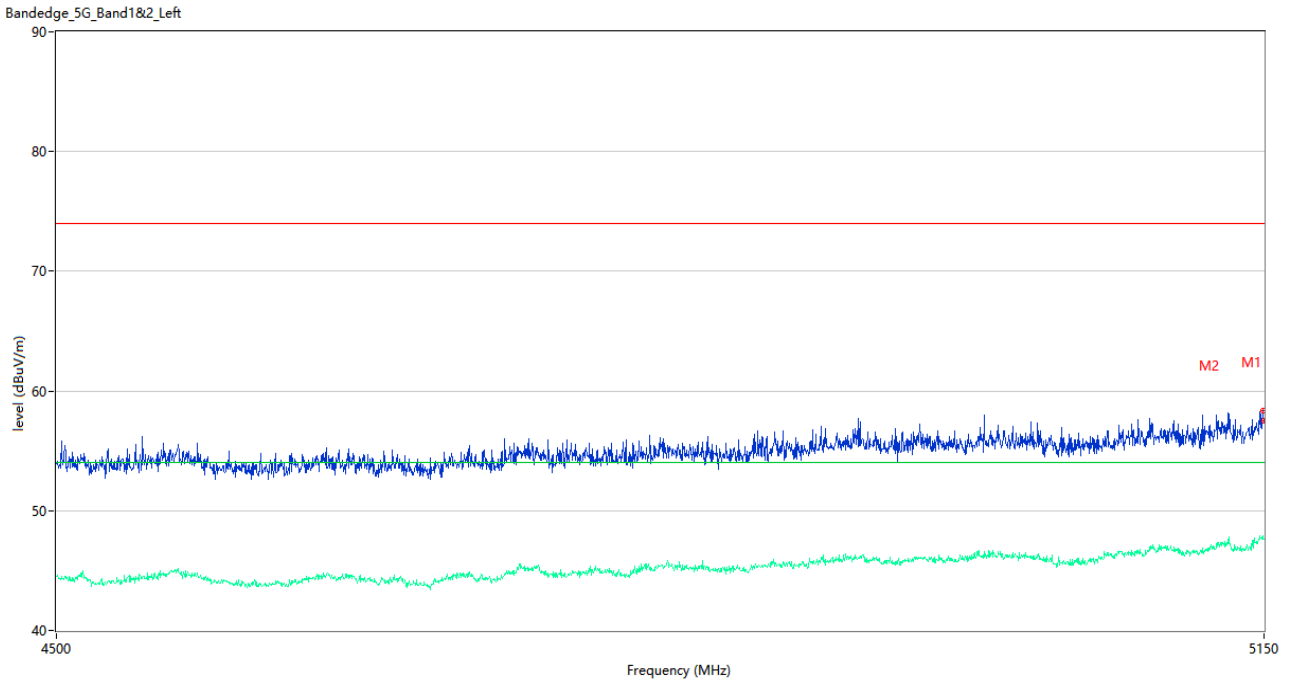


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	56.79	3.94	74.0	-17.21	Peak	340.00	150	Horizontal	Pass
1**	5150.000	47.45	3.94	54.0	-6.55	AV	340.00	150	Horizontal	Pass
2	5149.350	58.32	3.93	74.0	-15.68	Peak	342.00	150	Horizontal	Pass
2**	5149.350	47.92	3.93	54.0	-6.08	AV	342.00	150	Horizontal	Pass

U-NII-1 11ac80 CH42

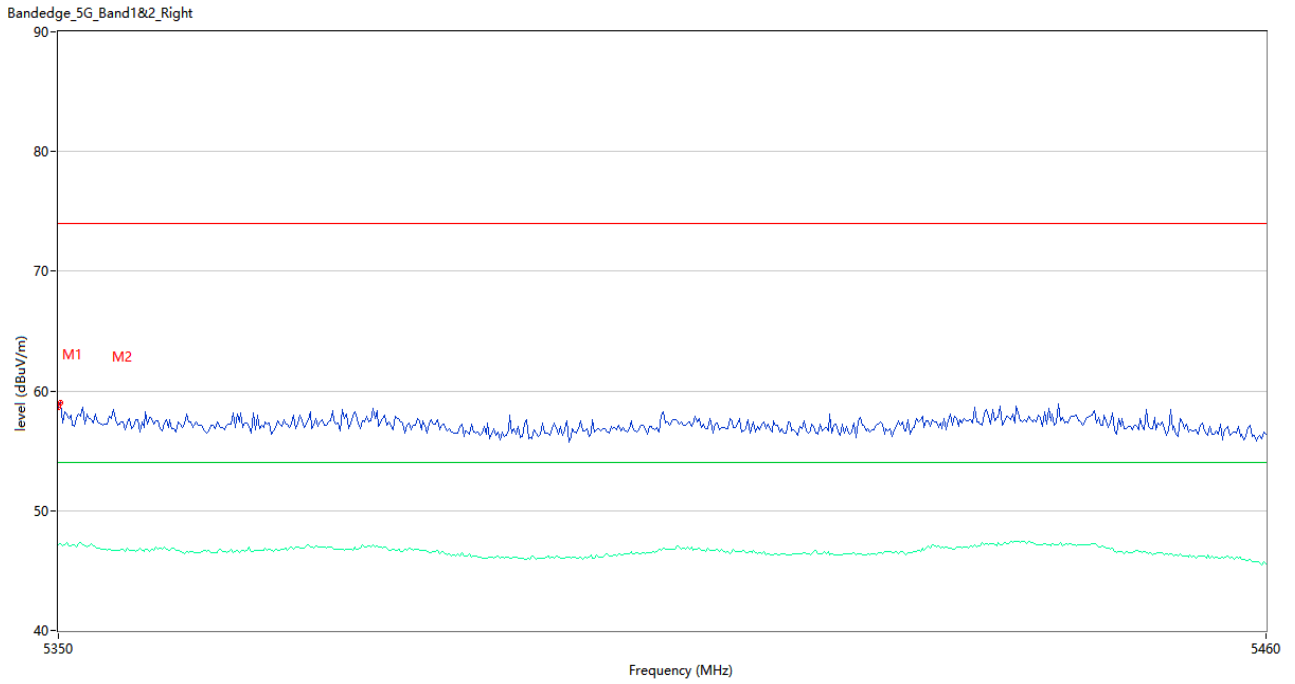


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	58.63	3.96	74.0	-15.37	Peak	222.00	150	Horizontal	Pass
1**	5350.000	47.18	3.96	54.0	-6.82	AV	222.00	150	Horizontal	Pass
2	5350.183	59.00	3.96	74.0	-15.00	Peak	180.00	150	Horizontal	Pass
2**	5350.183	47.22	3.96	54.0	-6.78	AV	180.00	150	Horizontal	Pass

U-NII-2A 11a CH52

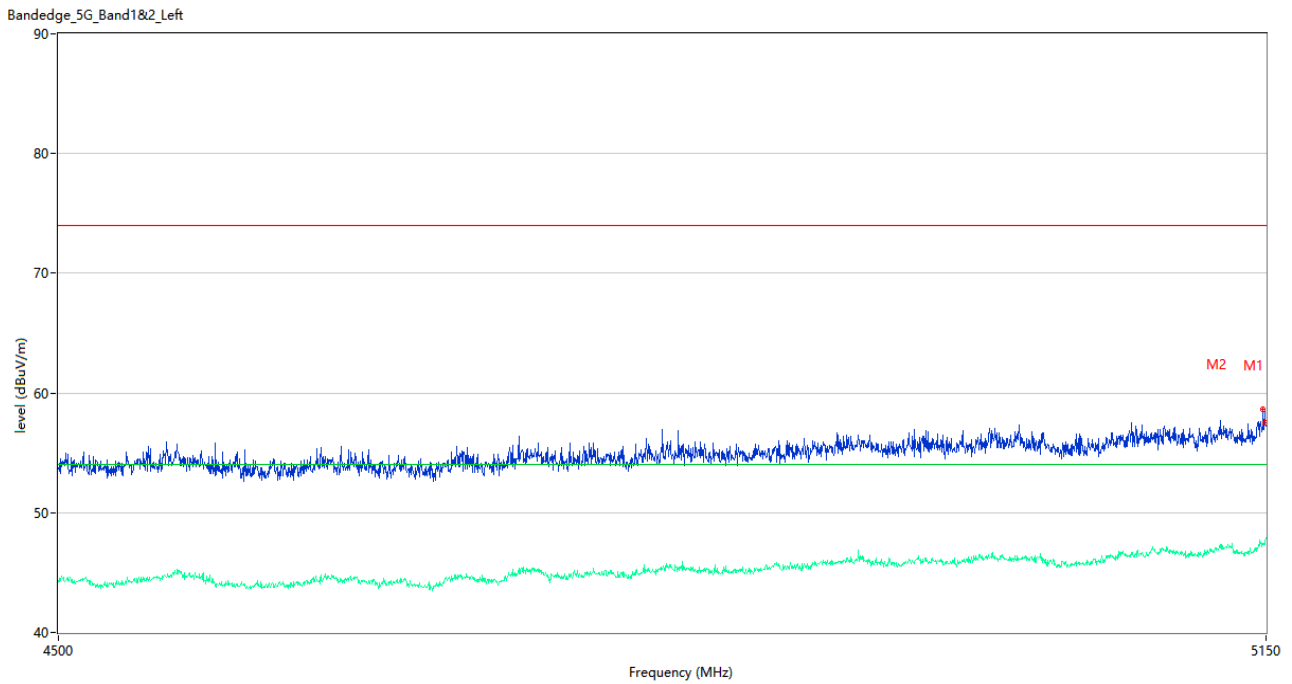


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5149.675	57.53	3.94	74.0	-16.47	Peak	271.00	150	Horizontal	Pass
1**	5149.675	47.34	3.94	54.0	-6.66	AV	271.00	150	Horizontal	Pass
2	5148.375	58.68	3.92	74.0	-15.32	Peak	97.00	150	Horizontal	Pass
2**	5148.375	47.33	3.92	54.0	-6.67	AV	97.00	150	Horizontal	Pass

U-NII-2A 11a CH64

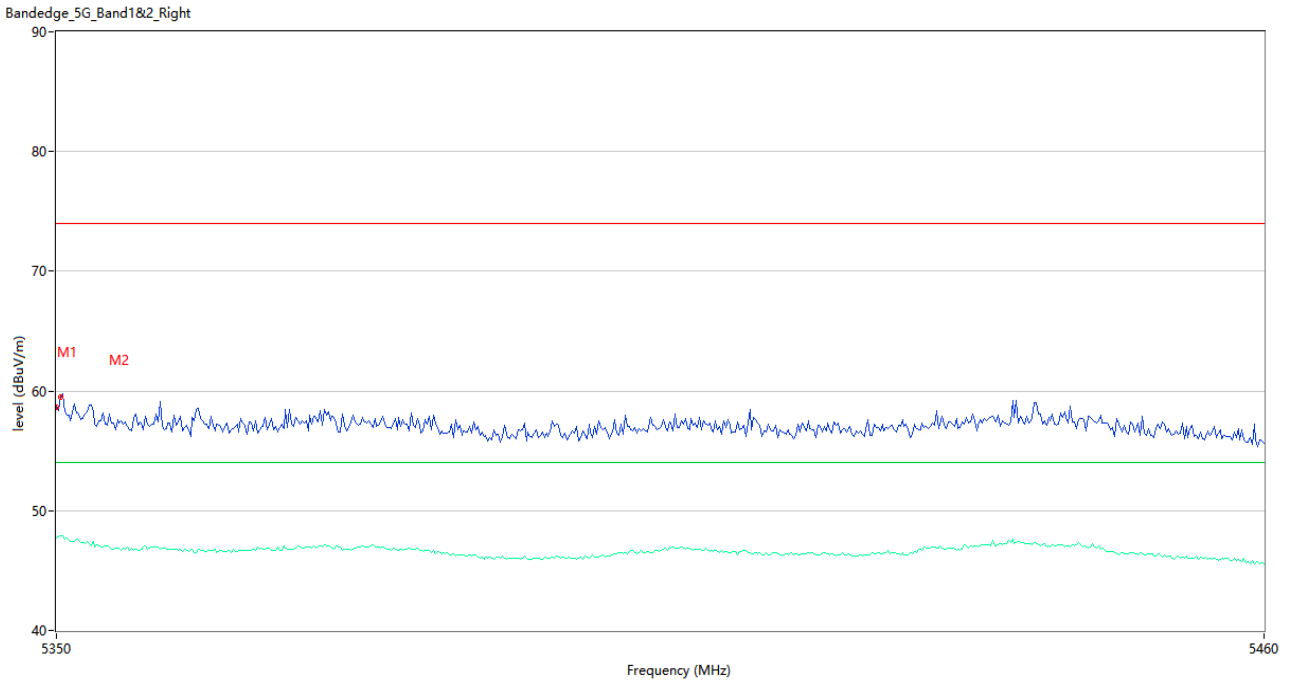


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	58.66	3.96	74.0	-15.34	Peak	106.00	150	Horizontal	Pass
1**	5350.000	47.74	3.96	54.0	-6.26	AV	106.00	150	Horizontal	Pass
2	5350.367	59.52	3.96	74.0	-14.48	Peak	143.00	150	Horizontal	Pass
2**	5350.367	47.91	3.96	54.0	-6.09	AV	143.00	150	Horizontal	Pass

U-NII-2A 11n20 CH52

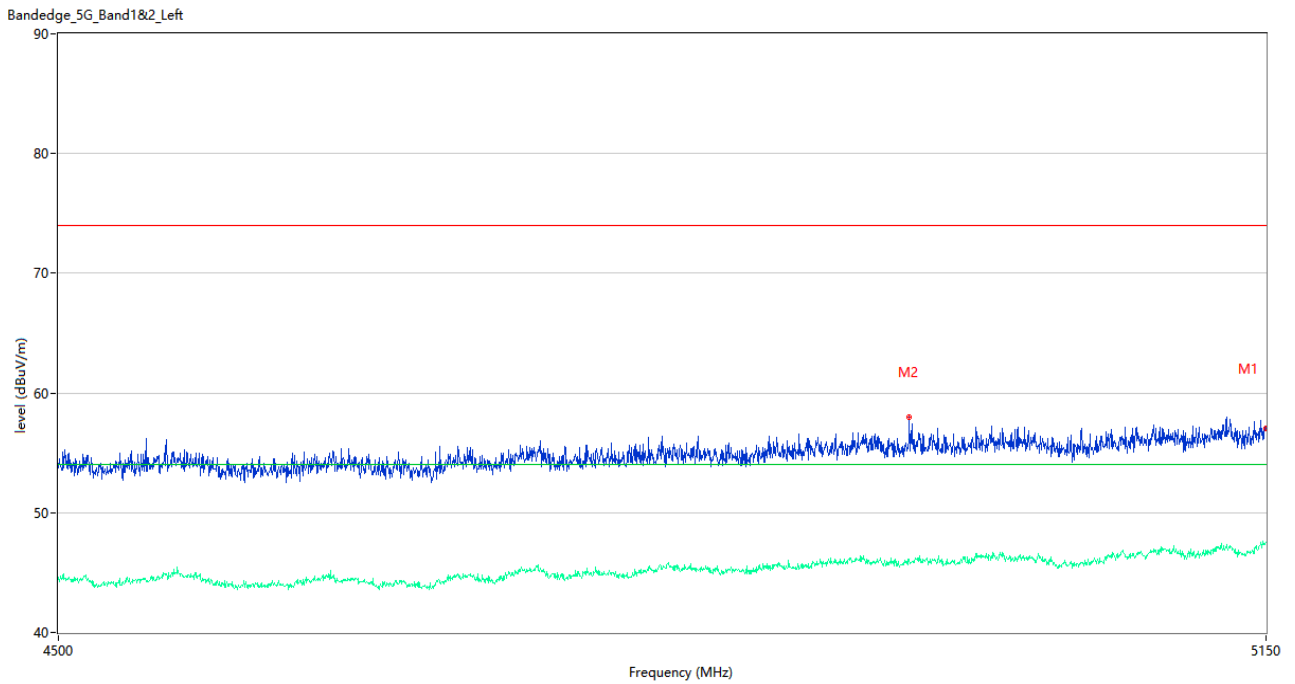


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	57.04	3.94	74.0	-16.96	Peak	0.00	150	Horizontal	Pass
1**	5150.000	47.51	3.94	54.0	-6.49	AV	0.00	150	Horizontal	Pass
2	4948.825	57.99	3.28	74.0	-16.01	Peak	41.00	150	Horizontal	Pass
2**	4948.825	45.79	3.28	54.0	-8.21	AV	41.00	150	Horizontal	Pass

U-NII-2A 11n20 CH64

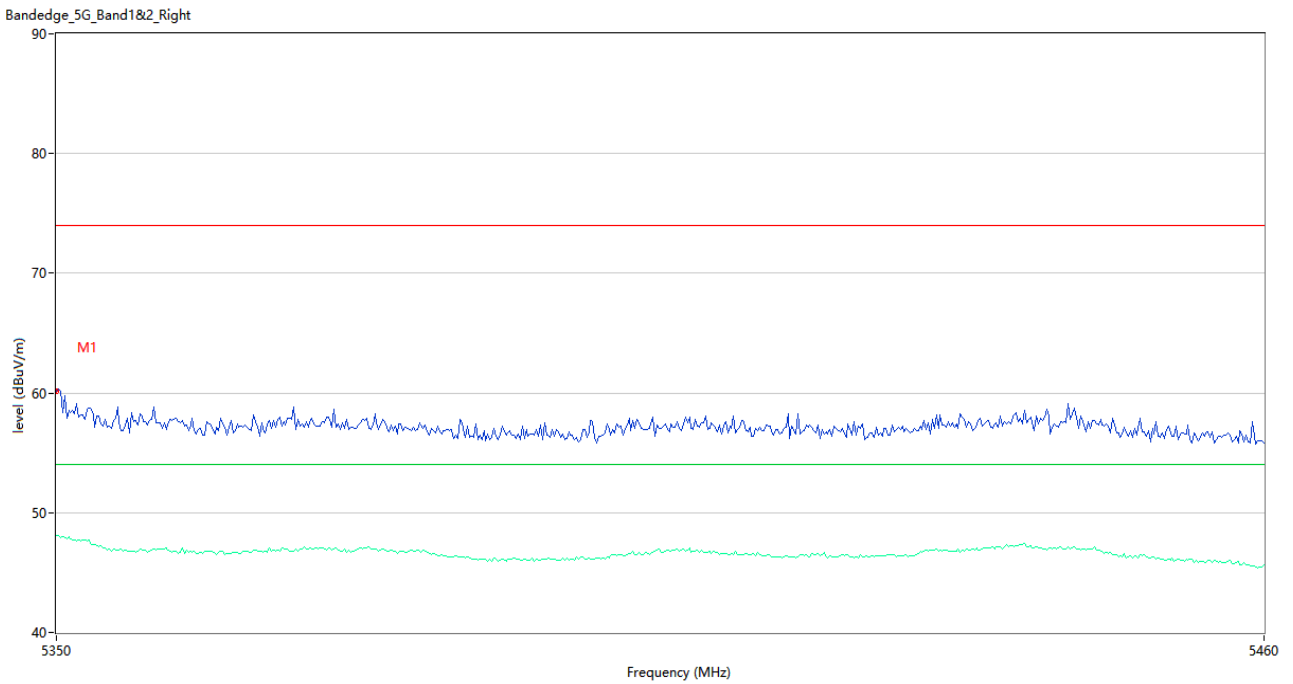


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	60.11	3.96	74.0	-13.89	Peak	173.00	150	Horizontal	Pass
1**	5350.000	48.13	3.96	54.0	-5.87	AV	173.00	150	Horizontal	Pass

U-NII-2A 11n40 CH54

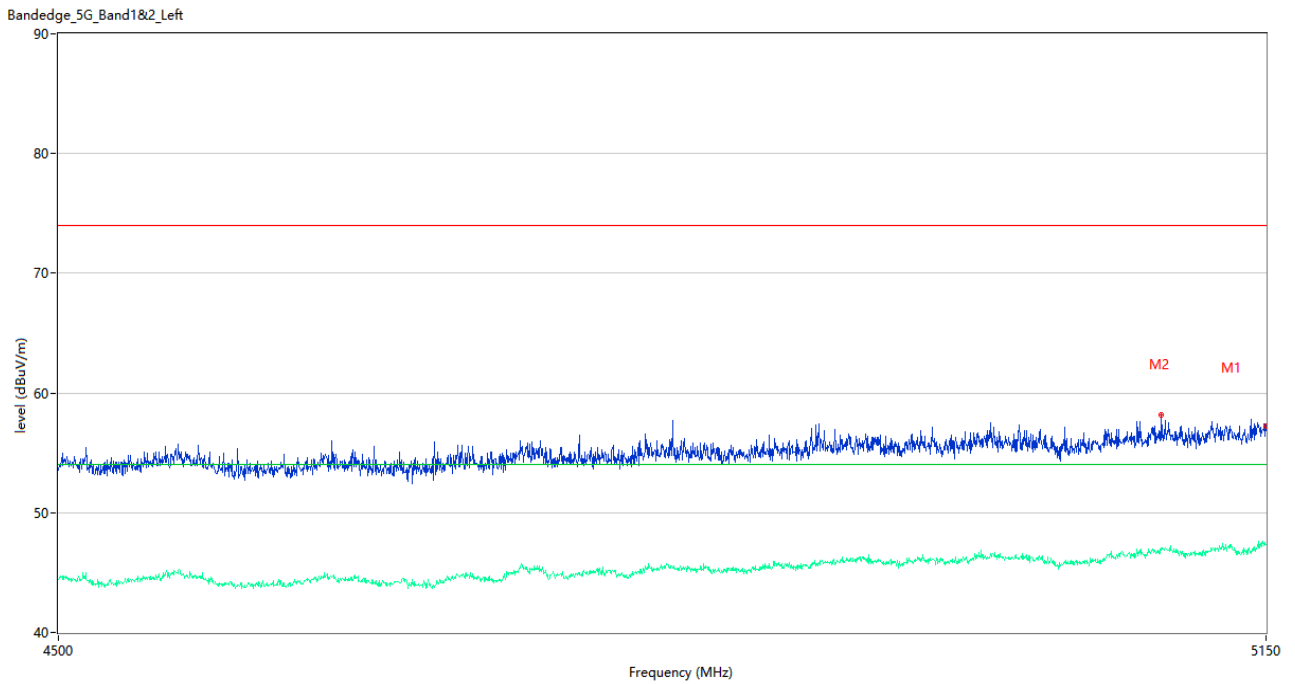


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	57.24	3.94	74.0	-16.76	Peak	192.00	150	Horizontal	Pass
1**	5150.000	47.31	3.94	54.0	-6.69	AV	192.00	150	Horizontal	Pass
2	5090.200	58.18	4.09	74.0	-15.82	Peak	286.00	150	Horizontal	Pass
2**	5090.200	47.02	4.09	54.0	-6.98	AV	286.00	150	Horizontal	Pass

U-NII-2A 11n40 CH62

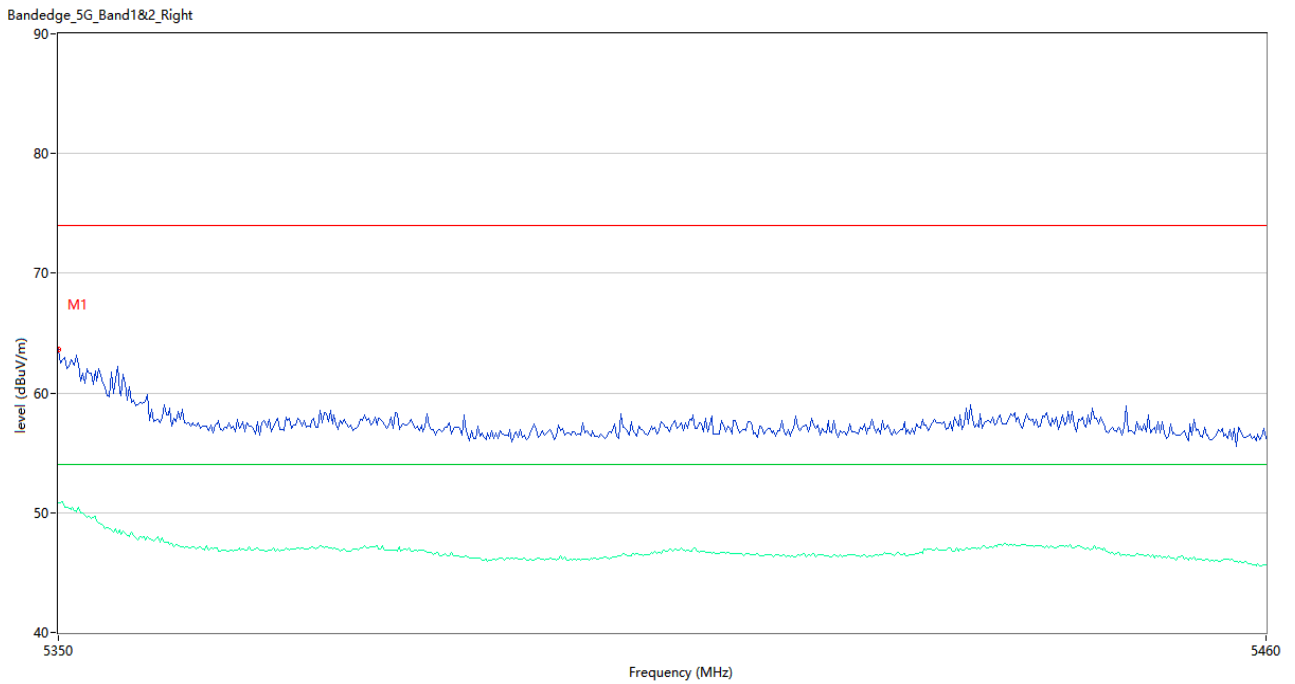


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	63.62	3.96	74.0	-10.38	Peak	50.00	150	Horizontal	Pass
1**	5350.000	50.86	3.96	54.0	-3.14	AV	50.00	150	Horizontal	Pass

U-NII-2A 11ac80 CH58

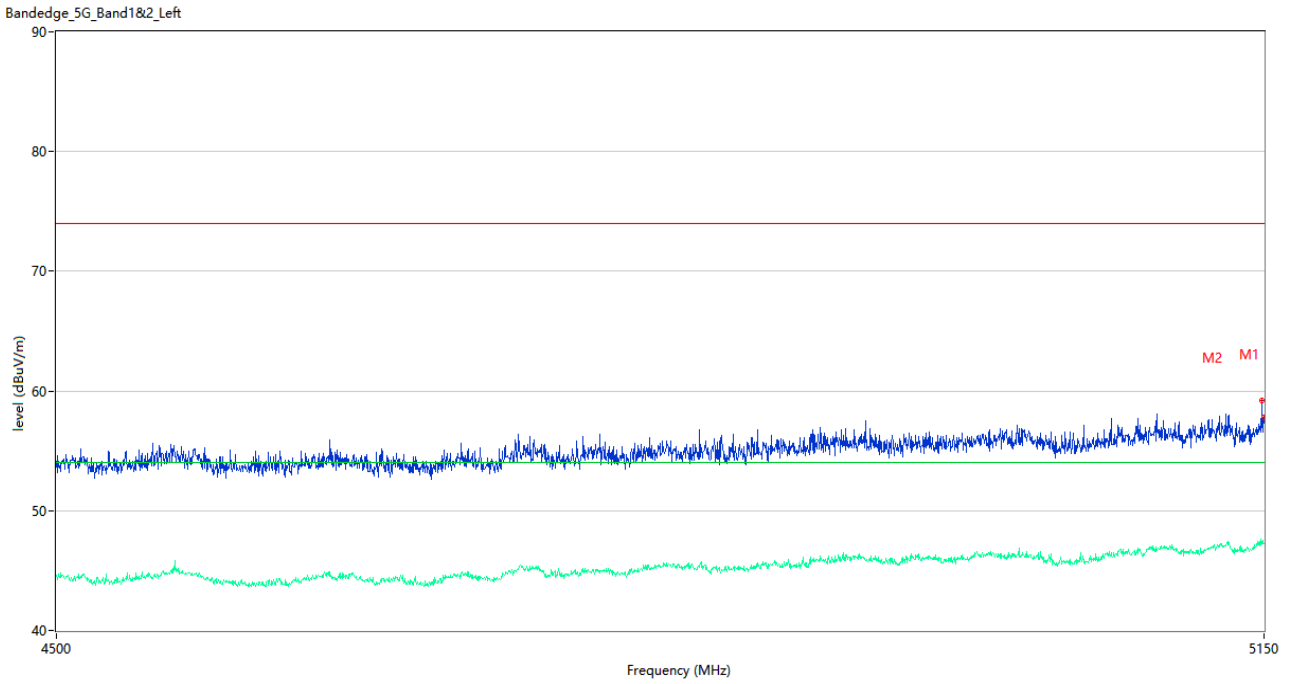


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	57.76	3.94	74.0	-16.24	Peak	27.00	150	Horizontal	Pass
1**	5150.000	47.24	3.94	54.0	-6.76	AV	27.00	150	Horizontal	Pass
2	5149.025	59.24	3.93	74.0	-14.76	Peak	180.00	150	Horizontal	Pass
2**	5149.025	47.47	3.93	54.0	-6.53	AV	180.00	150	Horizontal	Pass

U-NII-2A 11ac80 CH58

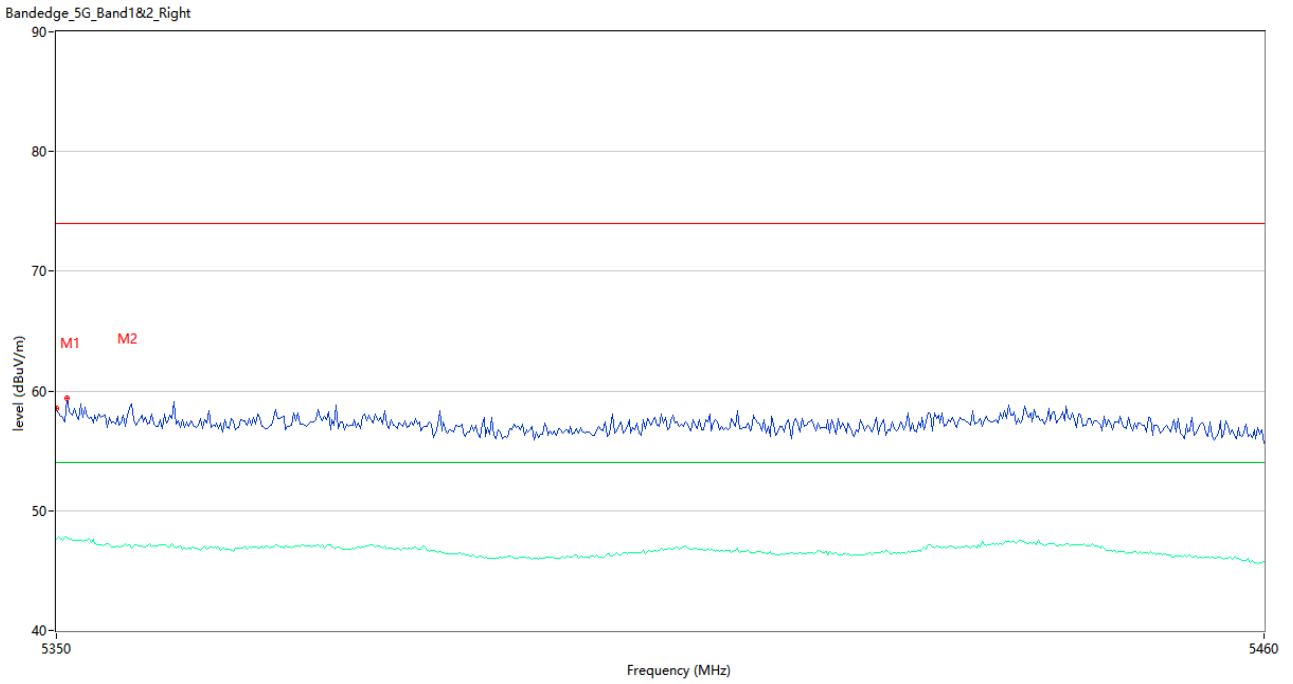


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	57.04	3.96	74.0	-16.96	Peak	334.00	150	Horizontal	Pass
1**	5350.000	47.10	3.96	54.0	-6.90	AV	334.00	150	Horizontal	Pass
2	5350.917	59.40	3.95	74.0	-14.60	Peak	285.00	150	Horizontal	Pass
2**	5350.917	47.68	3.95	54.0	-6.32	AV	285.00	150	Horizontal	Pass

U-NII-2C 11a CH100

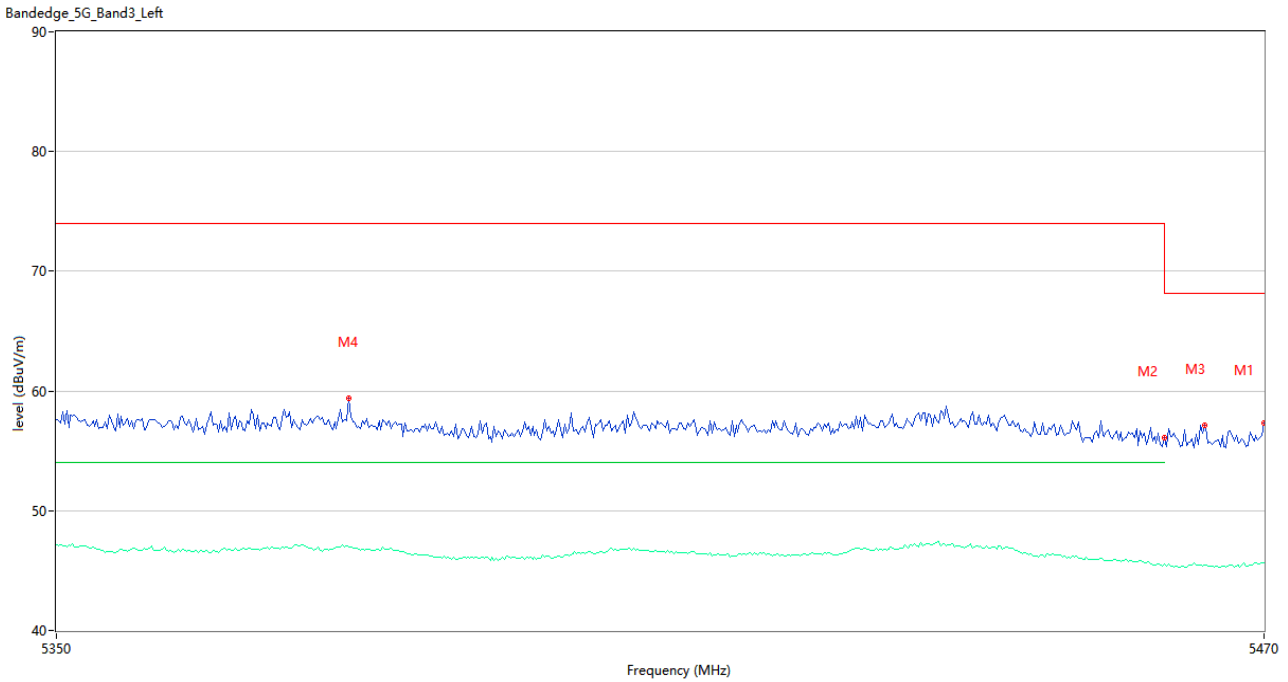


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5470.000	56.46	3.80	68.2	-11.74	Peak	64.00	150	Horizontal	Pass
1**	5470.000	45.54	3.80	--	--	AV	64.00	150	Horizontal	N/A
2	5460.000	55.17	4.23	74.0	-18.83	Peak	113.00	150	Horizontal	Pass
2**	5460.000	45.45	4.23	54.0	-8.55	AV	113.00	150	Horizontal	Pass
3	5464.000	57.18	4.19	68.2	-11.02	Peak	130.00	150	Horizontal	Pass
3**	5464.000	45.44	4.19	--	--	AV	130.00	150	Horizontal	N/A
4	5378.800	59.37	4.12	74.0	-14.63	Peak	314.00	150	Horizontal	Pass
4**	5378.800	46.92	4.12	54.0	-7.08	AV	314.00	150	Horizontal	Pass

U-NII-2C 11a CH140

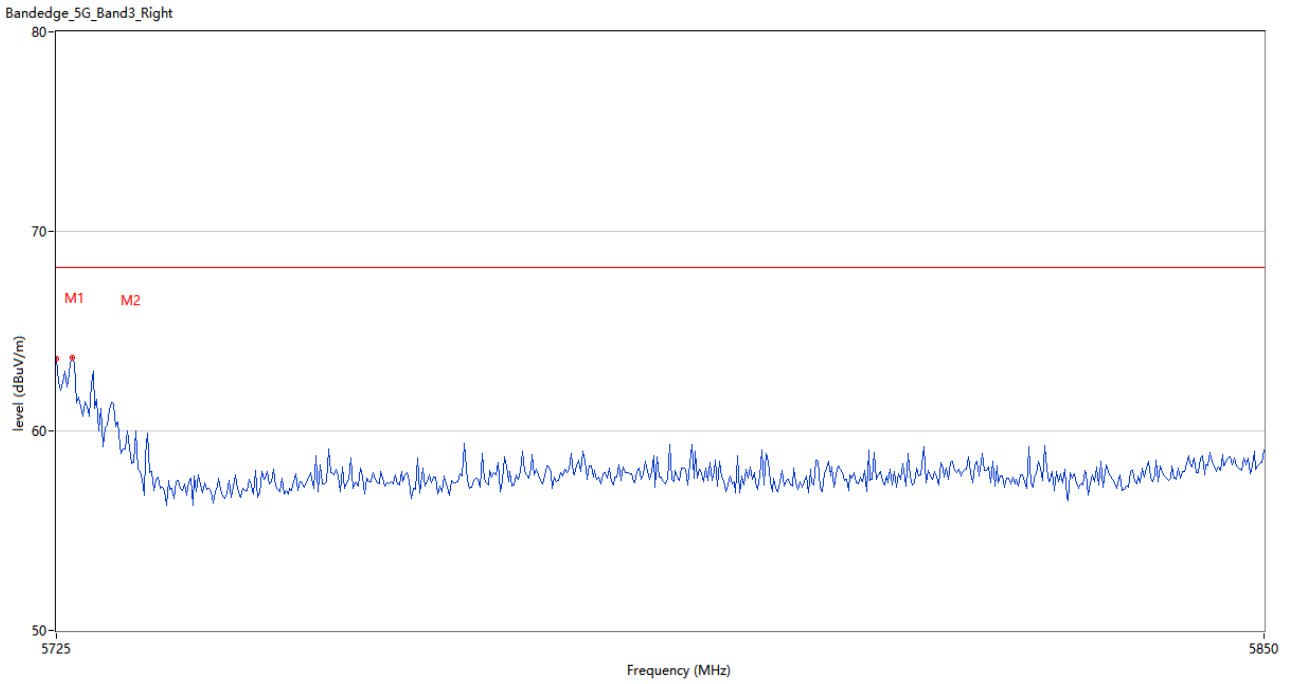


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	63.62	4.45	68.2	-4.58	Peak	163.00	150	Horizontal	Pass
2	5726.667	63.67	4.32	68.2	-4.53	Peak	163.00	150	Horizontal	Pass

U-NII-2C 11n20 CH100

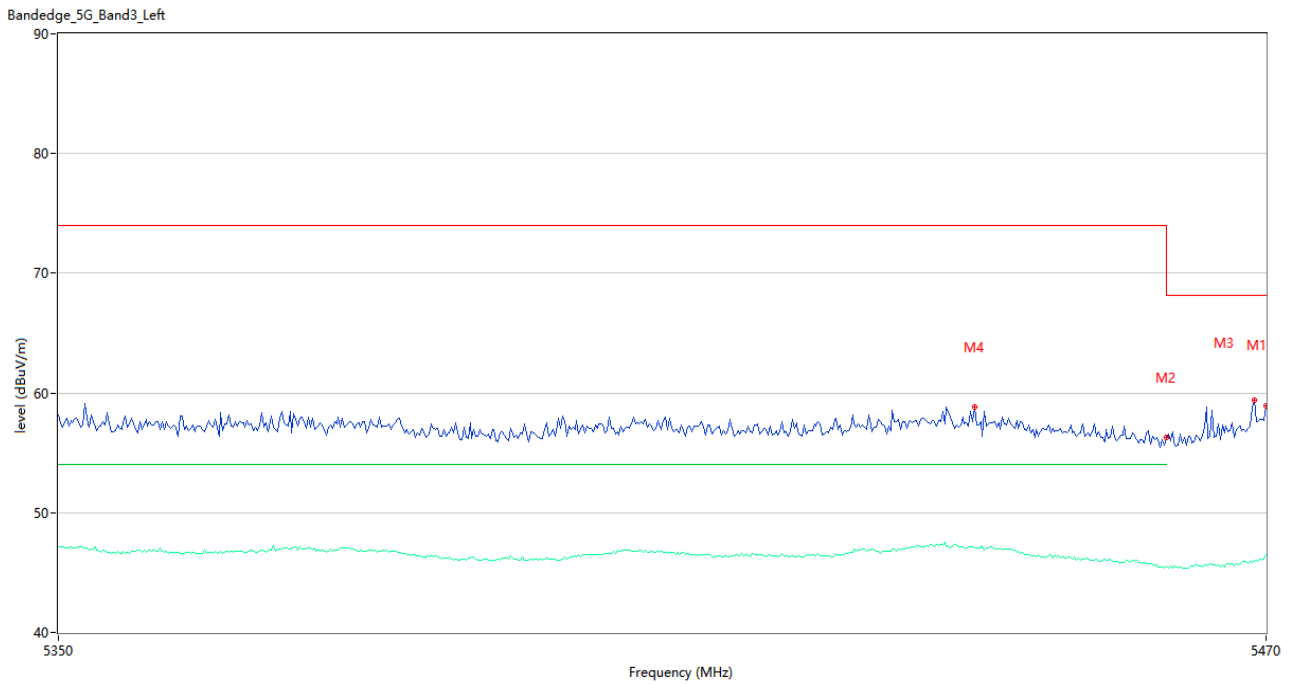


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5470.000	58.89	3.80	68.2	-9.31	Peak	150.00	150	Horizontal	Pass
1**	5470.000	46.46	3.80	--	--	AV	150.00	150	Horizontal	N/A
2	5460.000	55.90	4.23	74.0	-18.10	Peak	50.00	150	Horizontal	Pass
2**	5460.000	45.55	4.23	54.0	-8.45	AV	50.00	150	Horizontal	Pass
3	5468.800	59.42	3.86	68.2	-8.78	Peak	157.00	150	Horizontal	Pass
3**	5468.800	45.97	3.86	--	--	AV	157.00	150	Horizontal	N/A
4	5440.800	58.81	4.94	74.0	-15.19	Peak	160.00	150	Horizontal	Pass
4**	5440.800	47.08	4.94	54.0	-6.92	AV	160.00	150	Horizontal	Pass

U-NII-2C 11n20 CH140

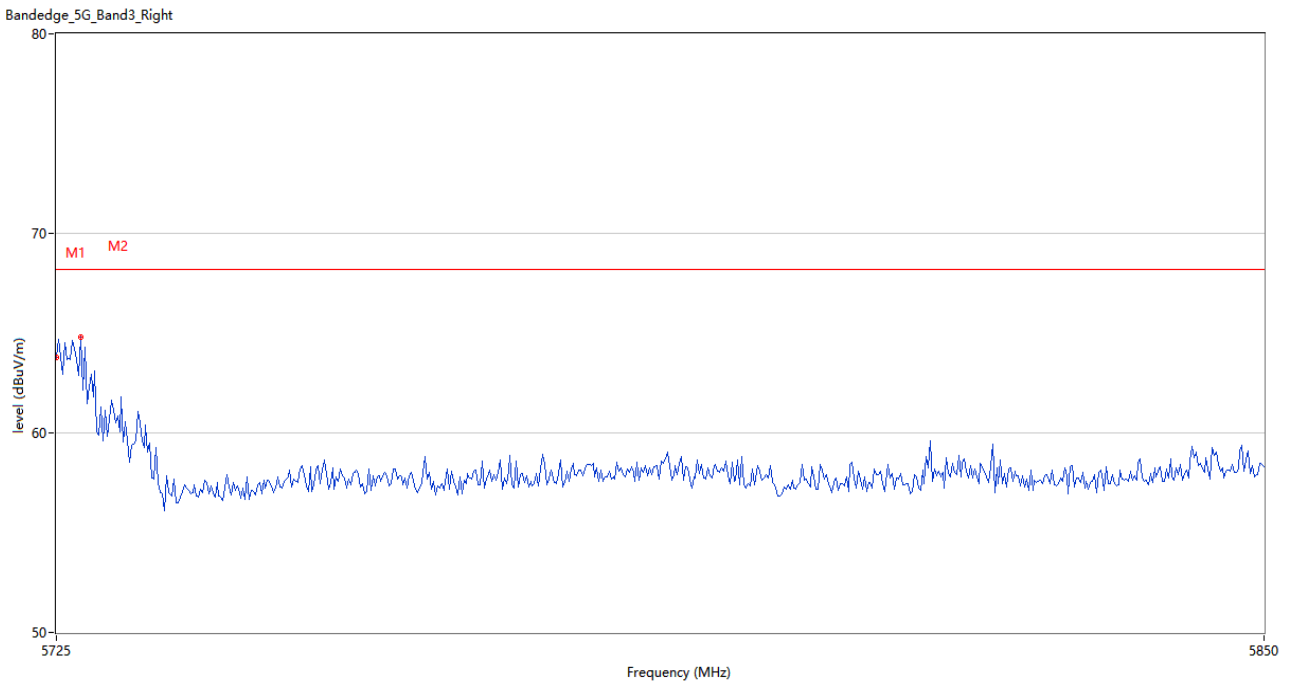


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	63.79	4.45	68.2	-4.41	Peak	159.00	150	Horizontal	Pass
2	5727.500	64.79	4.21	68.2	-3.41	Peak	161.00	150	Horizontal	Pass

U-NII-2C 11n40 CH102

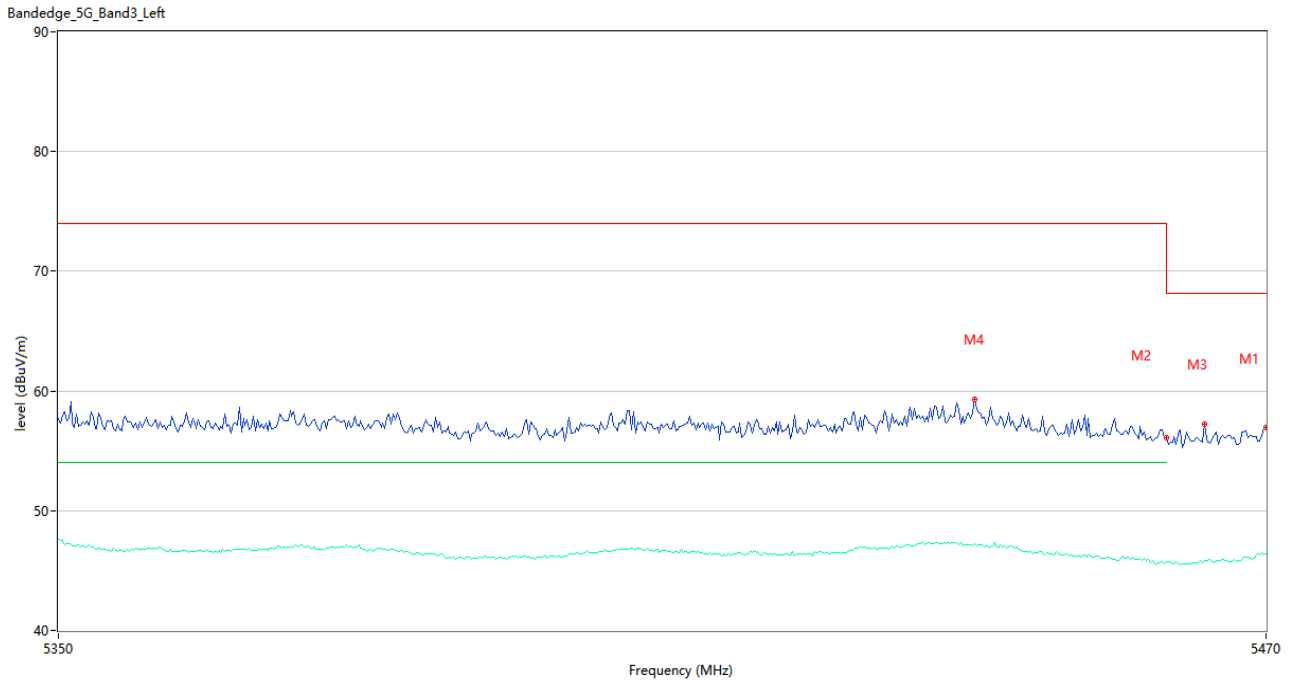


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5470.000	56.23	3.80	68.2	-11.97	Peak	151.00	150	Horizontal	Pass
1**	5470.000	46.42	3.80	--	--	AV	151.00	150	Horizontal	N/A
2	5460.000	56.00	4.23	74.0	-18.00	Peak	323.00	150	Horizontal	Pass
2**	5460.000	45.75	4.23	54.0	-8.25	AV	323.00	150	Horizontal	Pass
3	5463.800	57.25	4.22	68.2	-10.95	Peak	190.00	150	Horizontal	Pass
3**	5463.800	45.84	4.22	--	--	AV	190.00	150	Horizontal	N/A
4	5440.800	59.26	4.94	74.0	-14.74	Peak	310.00	150	Horizontal	Pass
4**	5440.800	47.25	4.94	54.0	-6.75	AV	310.00	150	Horizontal	Pass

U-NII-2C 11n40 CH134

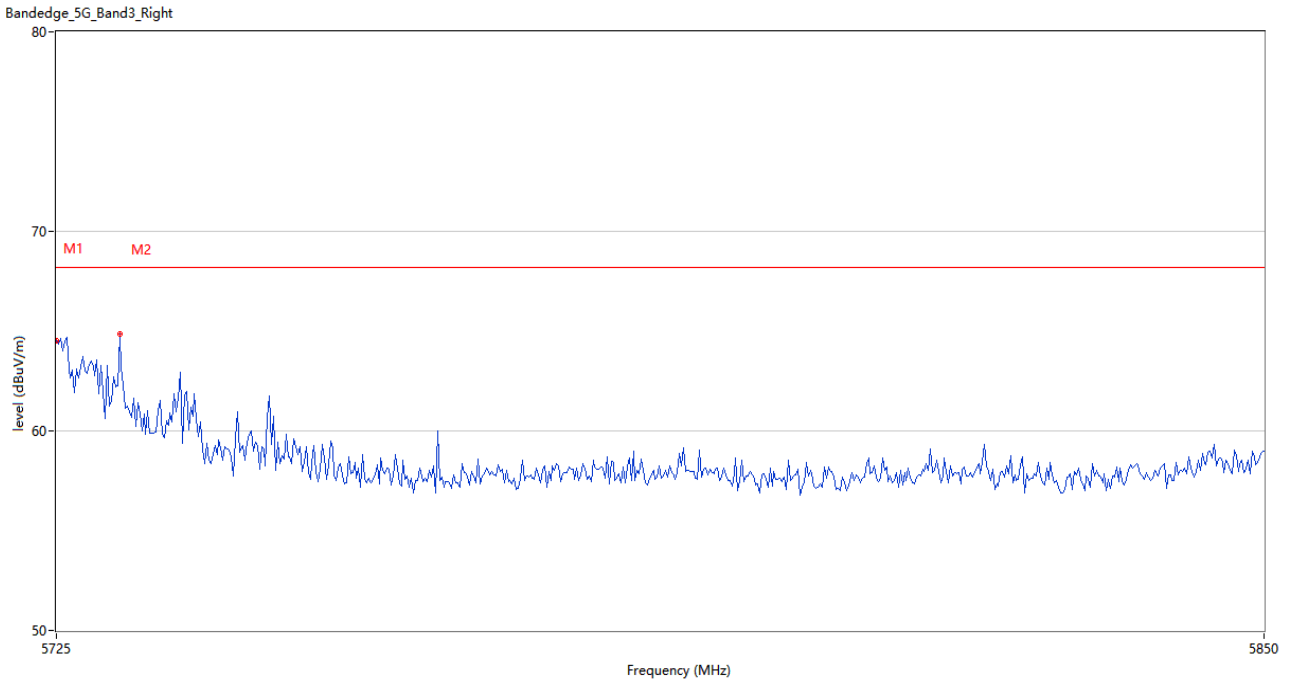


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	64.49	4.45	68.2	-3.71	Peak	163.00	150	Horizontal	Pass
2	5731.459	64.86	4.26	68.2	-3.34	Peak	161.00	150	Horizontal	Pass

U-NII-2C 11ac80 CH106

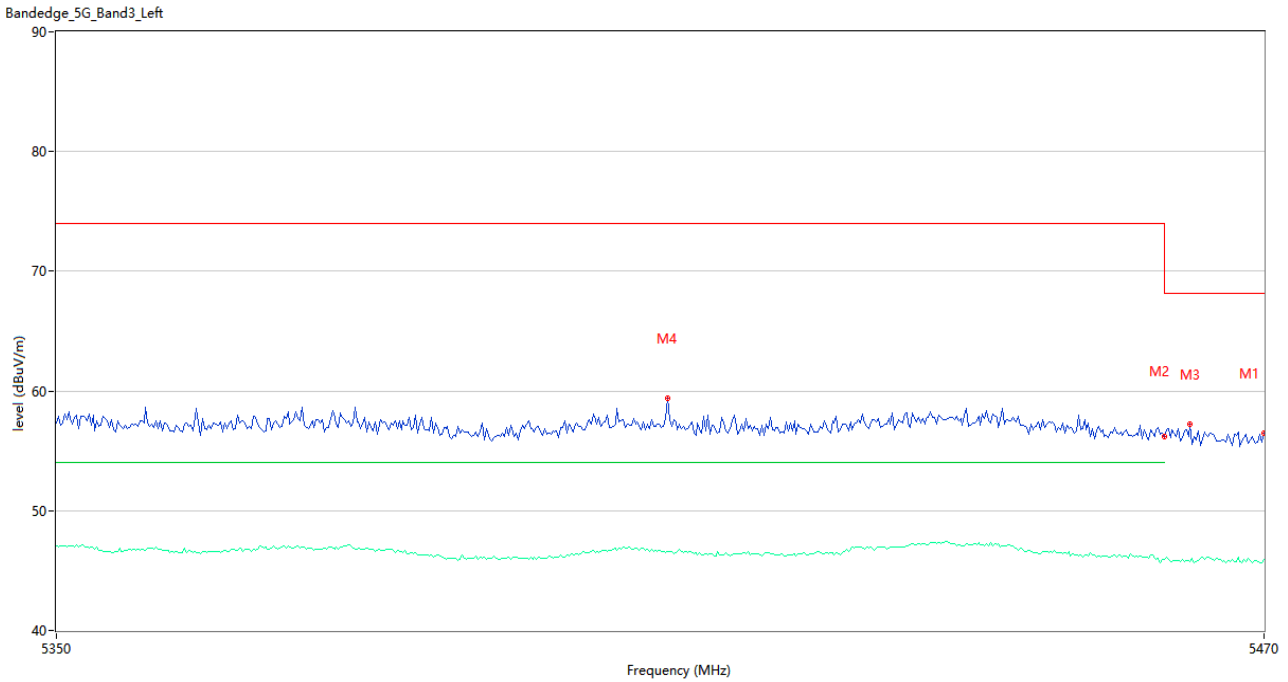


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5470.000	56.47	3.80	68.2	-11.73	Peak	192.00	150	Horizontal	Pass
1**	5470.000	45.90	3.80	--	--	AV	192.00	150	Horizontal	N/A
2	5460.000	56.18	4.23	74.0	-17.82	Peak	115.00	150	Horizontal	Pass
2**	5460.000	45.94	4.23	54.0	-8.06	AV	115.00	150	Horizontal	Pass
3	5462.600	57.24	4.21	68.2	-10.96	Peak	125.00	150	Horizontal	Pass
3**	5462.600	45.74	4.21	--	--	AV	125.00	150	Horizontal	N/A
4	5410.400	59.38	3.89	74.0	-14.62	Peak	211.00	150	Horizontal	Pass
4**	5410.400	46.61	3.89	54.0	-7.39	AV	211.00	150	Horizontal	Pass

U-NII-2C 11ac80 CH122

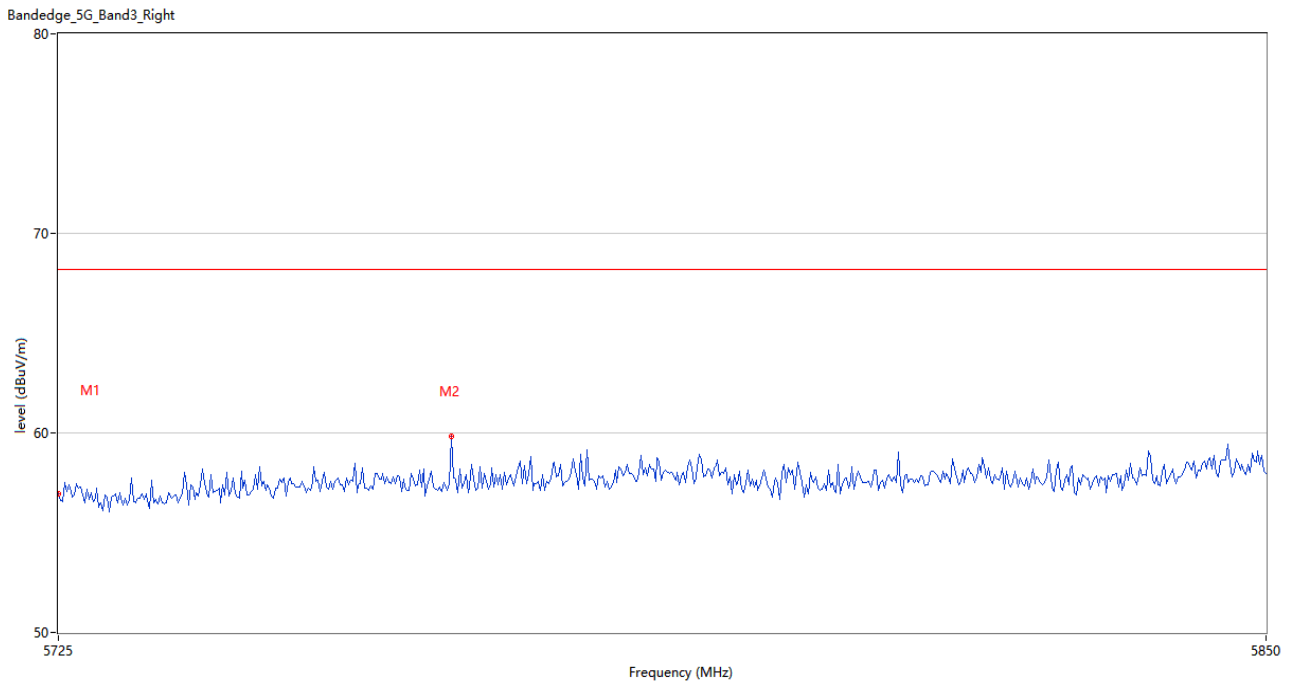


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	56.95	4.45	68.2	-11.25	Peak	311.00	150	Horizontal	Pass
2	5765.416	59.80	4.67	68.2	-8.40	Peak	100.00	150	Horizontal	Pass

U-NII-3 11a CH149

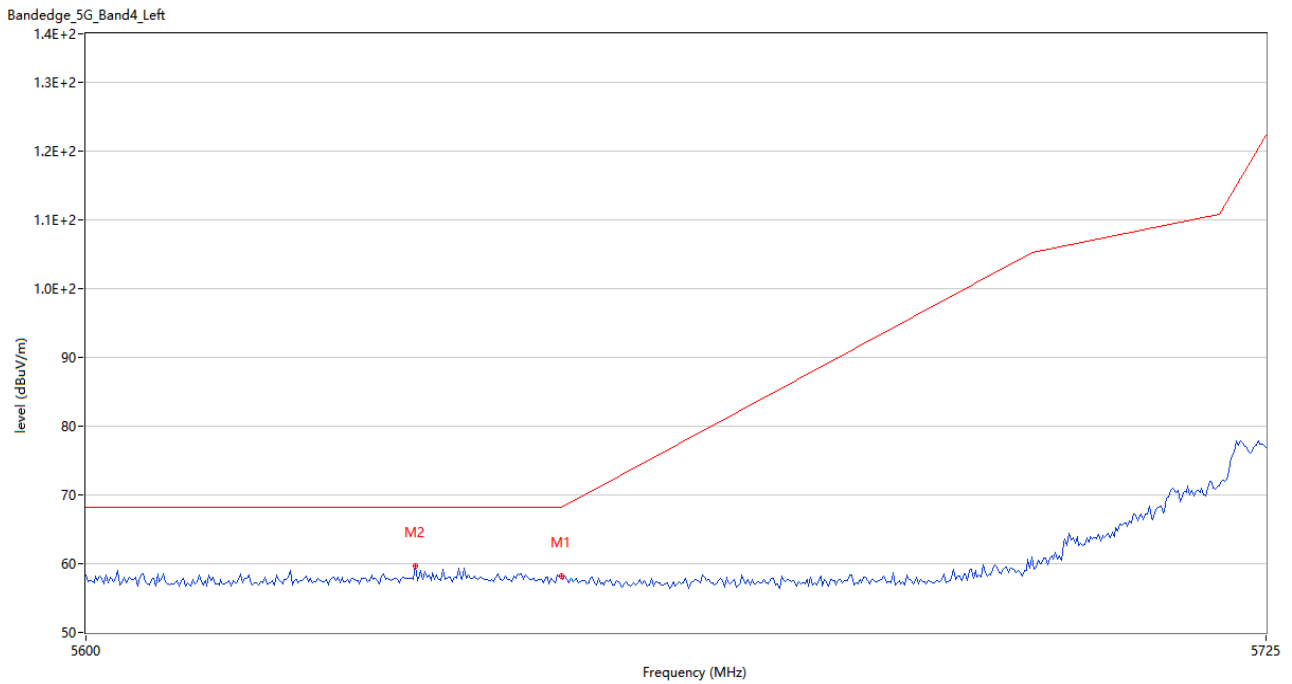


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	58.11	4.91	68.2	-10.09	Peak	33.00	150	Horizontal	Pass
2	5634.584	59.65	5.45	68.2	-8.55	Peak	56.00	150	Horizontal	Pass

U-NII-3 11a CH165

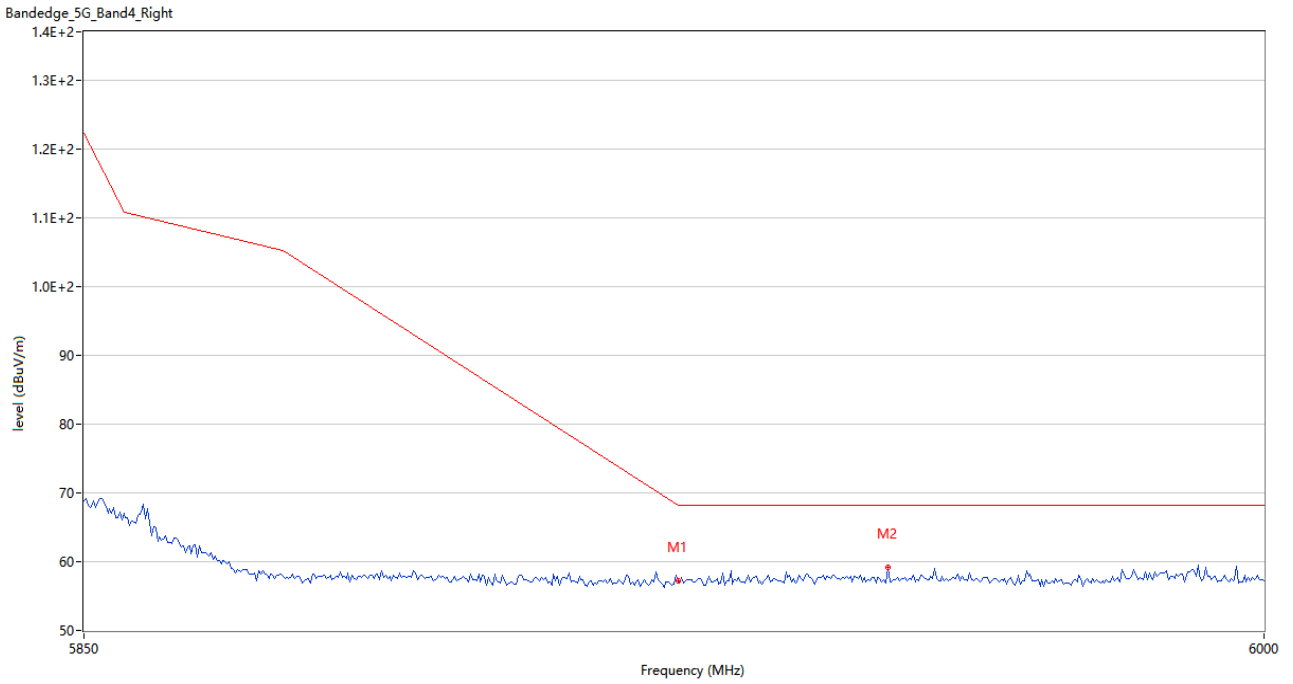


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.19	4.25	68.2	-11.01	Peak	250.00	150	Horizontal	Pass
2	5951.750	59.10	4.55	68.2	-9.10	Peak	34.00	150	Horizontal	Pass

U-NII-3 11n20 CH149

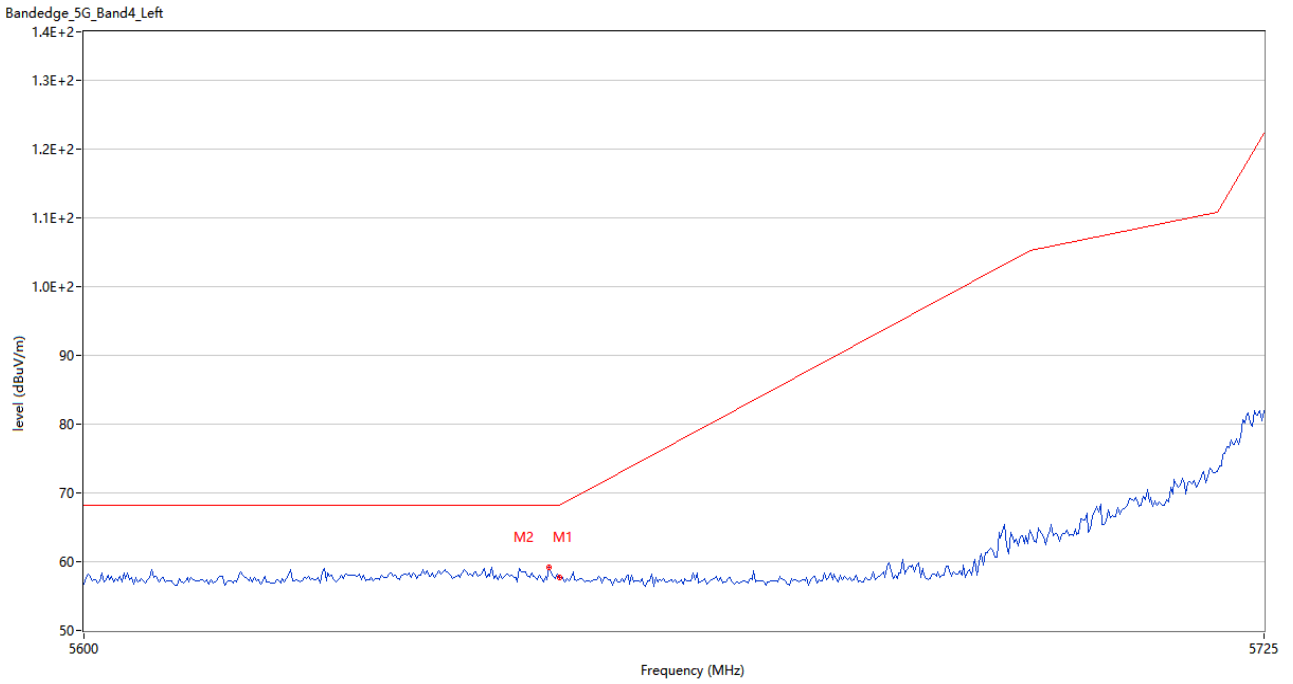


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	57.78	4.91	68.2	-10.42	Peak	29.00	150	Horizontal	Pass
2	5648.958	59.11	4.90	68.2	-9.09	Peak	56.00	150	Horizontal	Pass

U-NII-3 11n20 CH165

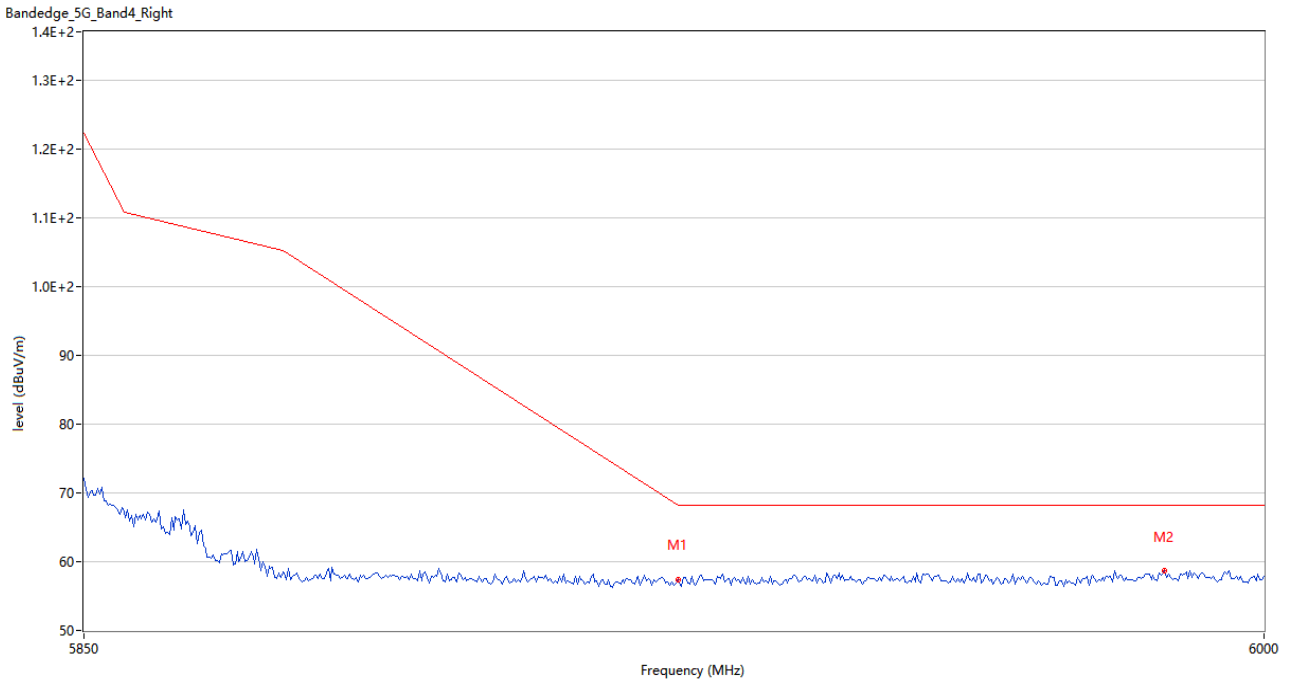


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.36	4.25	68.2	-10.84	Peak	224.00	150	Horizontal	Pass
2	5987.250	58.68	5.03	68.2	-9.52	Peak	141.00	150	Horizontal	Pass

U-NII-3 11n40 CH151

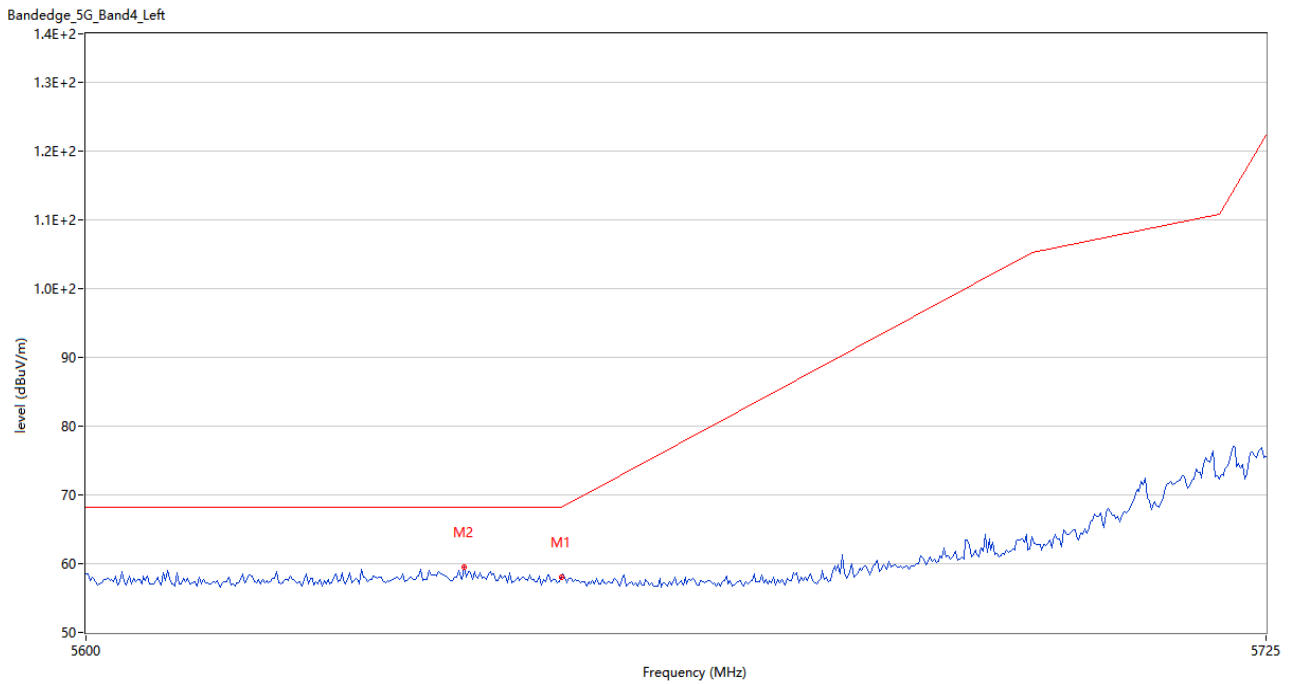


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	57.98	4.91	68.2	-10.22	Peak	33.00	150	Horizontal	Pass
2	5639.792	59.51	5.40	68.2	-8.69	Peak	174.00	150	Horizontal	Pass

U-NII-3 11n40 CH159

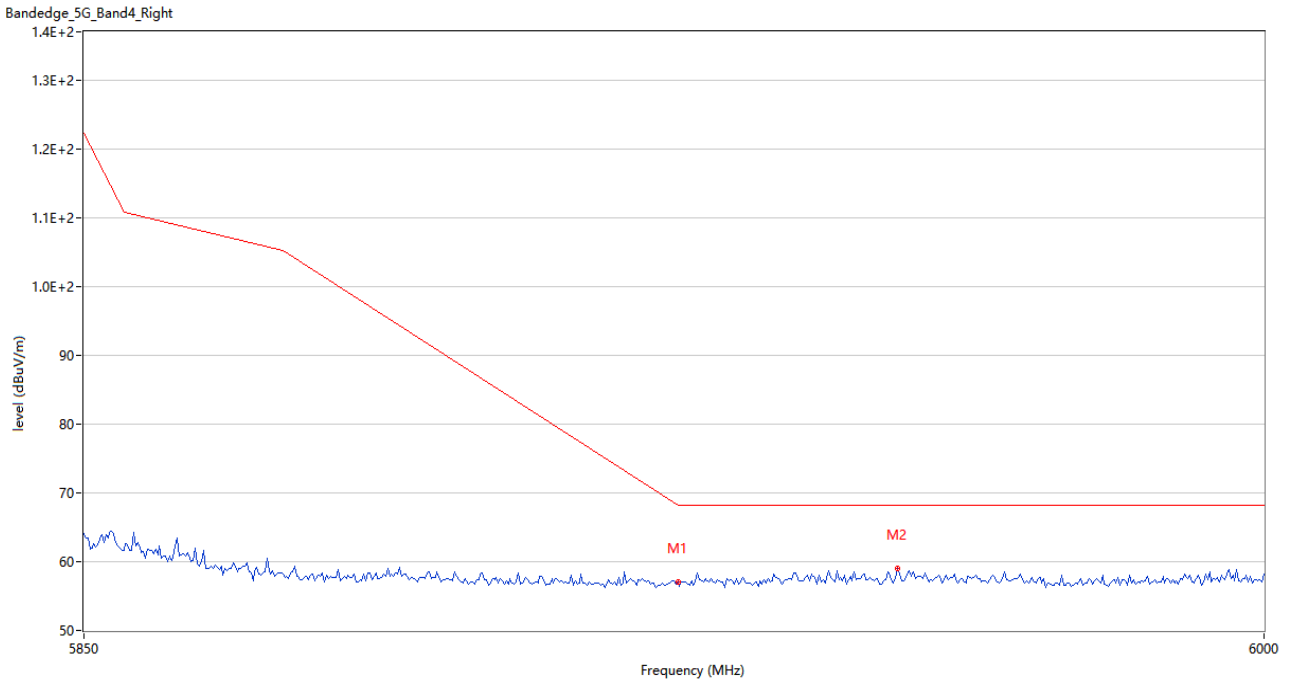


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.03	4.25	68.2	-11.17	Peak	133.00	150	Horizontal	Pass
2	5953.000	58.99	4.54	68.2	-9.21	Peak	54.00	150	Horizontal	Pass

U-NII-3 11ac80 CH155

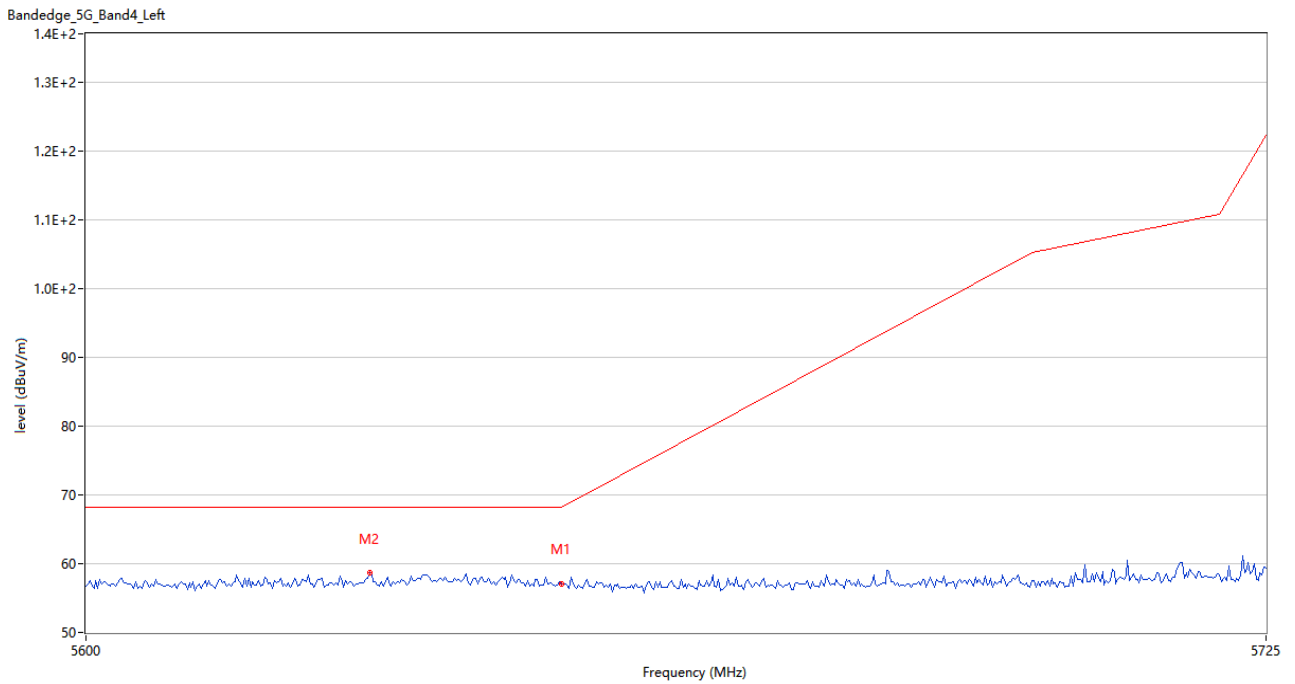

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	56.58	4.91	68.2	-11.62	Peak	307.00	150	Horizontal	Pass
2	5629.792	58.64	5.17	68.2	-9.56	Peak	341.00	150	Horizontal	Pass

U-NII-3 11ac80 CH155

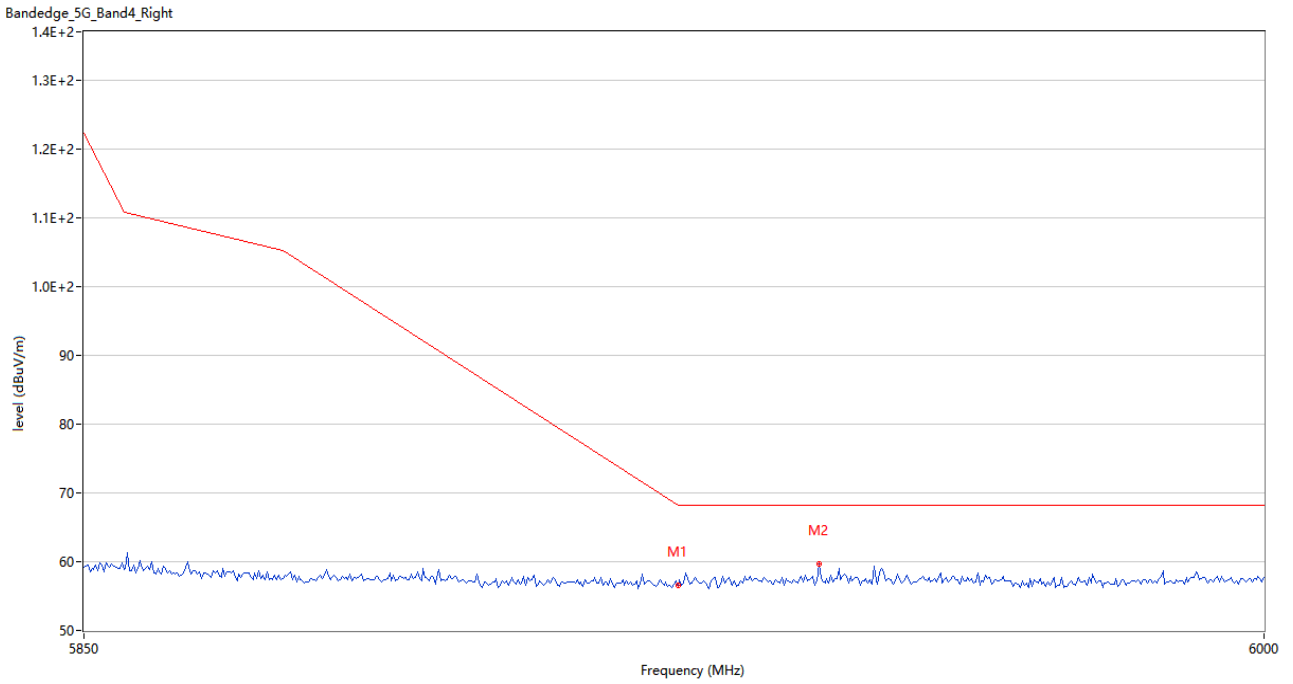

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	56.54	4.25	68.2	-11.66	Peak	80.00	150	Horizontal	Pass
2	5943.000	59.70	4.67	68.2	-8.50	Peak	159.00	150	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2230023-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2230023-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2230023-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the laboratory.
6. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--