

Report on the Radio Testing

For

Gas Control Equipment Limited

on

Zeno Clarity 4G

Report no. TRA-047787-47-05C

10 March 2021



---

Report Number: TRA-047787-47-05C  
Issue: C

REPORT ON THE TESTING OF A  
Gas Control Equipment Limited  
Zeno Clarity 4G  
WITH RESPECT TO SPECIFICATIONS  
47CFR PARTS 22H, 24E, 27

TEST DATE: 2020-06-23 to 2020-12-02

Written by:

Steven Garwell  
Radio Test Engineer

Approved by:

John Charters  
Department Manager- Radio

Date: 10 March 2021

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

## 1 Revision Record

<b><i>Issue Number</i></b>	<b><i>Issue Date</i></b>	<b><i>Revision History</i></b>
A	2020-08-04	Original
B	2021-03-08	Added results for GSM850, GSM1900, WCDMA bands 2, 4 and 5 and updated conducted power results – general updates.
C	2021-03-10	Updated GSM power measurements in section 12 and RSE in section 11

## 2 Summary

TEST REPORT NUMBER: TRA-047787-47-05C

WORKS ORDER NUMBER: TRA-047787-01

PURPOSE OF TEST: Class II Permissive Change

TEST SPECIFICATION(S): 47CFR Parts 22H, 24E, 27

EQUIPMENT UNDER TEST (EUT): Zeno Clarity 4G containing  
FCCID: 2AOL9-RS500C4G1

EUT SERIAL NUMBER: ZC101001

MANUFACTURER/AGENT: Gas Control Limited

ADDRESS: Farrington Way  
Eastwood  
Nottingham  
Nottinghamshire  
NG16 3AG  
United Kingdom

CLIENT CONTACT: Will Turner  
☎ 01942 292962  
✉ will.turner@gcegroup.com

ORDER NUMBER: UK-1929

TEST DATE: 2020-06-23 to 2020-12-02

TESTED BY: Steven Garwell  
Element

## 2.1 Test Summary

<b>Test Method and Description</b>	<b>Requirement Clause</b>	<b>Applicable to this equipment</b>	<b>Result / Note</b>
	<b>47CFR</b>		
Spurious emissions	24.238, 24.232, 22.917, 22.913, 27.53, 2.1051	<input checked="" type="checkbox"/>	PASS
Output power	22.913, 24.232, 27.50	<input checked="" type="checkbox"/>	<i>Information Only</i>

### Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### 3 Contents

1	Revision Record .....	3
2	Summary .....	4
2.1	Test Summary .....	5
3	Contents .....	6
4	Introduction .....	7
5	Glossary of Terms .....	8
6	Equipment Under Test.....	9
6.1	EUT Identification .....	9
6.2	System Equipment.....	9
6.3	EUT Mode of Operation.....	9
6.3.1	Transmission .....	9
6.4	EUT Description .....	9
7	EUT Radio Parameters.....	10
7.1	General.....	10
7.2	Antennas .....	10
8	Modifications.....	11
9	EUT Test Setup .....	12
9.1	Block Diagram .....	12
9.2	General Set-up Photograph.....	13
9.1	Measurement software .....	13
10	General Technical Parameters .....	14
10.1	Normal Conditions .....	14
11	Radiated emissions .....	15
11.1	Definitions.....	15
11.2	Test Parameters .....	15
11.3	Test Limits .....	16
11.4	Test Method.....	17
11.5	Test Equipment .....	18
11.6	Test Results.....	19
12	RF output power (mean output power) .....	31
12.1	Definition.....	31
12.2	Test Parameters .....	31
12.3	Test Limit .....	31
12.4	Test Method.....	34
12.5	Test Equipment .....	34
12.6	Test Results.....	35
13	Measurement Uncertainty.....	37

## 4 Introduction

This report TRA-047787-47-05C presents the results of the Radio testing on a Gas Control Equipment Limited, Zeno Clarity 4G to the selected parts of specifications FCC CFR 47 Parts 22H, 24E & 27.

The Zeno Clarity 4G contains a cellular module FCCID: 2AOL9-RS500C4G1.

The testing was carried out for Gas Control equipment Limited by Element, at the address detailed below.

<input type="checkbox"/>	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input checked="" type="checkbox"/>	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

### FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## 5 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment Under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen Before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 6 Equipment Under Test

### 6.1 EUT Identification

- Name: Zeno Clarity 4G
- Serial Number: ZC101001
- Model Number: RS-00500C
- Software Revision: Not Stated
- Build Level / Revision Number: Prototype

#### Module Details: LTE

- Manufacturer: Gas Control Equipment Limited
- Model Number: RS500C4G1
- FCC ID: 2AOL9-RS500C4G1

### 6.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

- 1: CMW 500 Wideband Communications Tester – Serial Number: 112969
- 2: Laptop

### 6.3 EUT Mode of Operation

#### 6.3.1 Transmission

The mode of operation for transmitter tests was as follows:

EUT was operated with worst case modes of operation for each cellular band as derived from original filing reports.

### 6.4 EUT Description

The EUT is a portable oxygen concentrator for patients requiring supplementary oxygen. The device has multiple wireless connections. This report covers limited testing of the LTE module only.

## 7 EUT Radio Parameters

### 7.1 General

Radio:	GSM	WCDMA	LTE
<b>Band(s) / Frequencies of operation:</b>	GSM850, GSM1900	2,4 and 5	2, 4, 5, 7 and 12
<b>Modulation type:</b>	GMSK, 8PSK	QPSK	OFDM
<b>Channel bandwidth:</b>	200 kHz	5 MHz	10 MHz
<b>Declared output power:</b>	30 dBm	24 dBm	24 dBm
<b>Nominal Supply Voltage:</b>	24 Vdc	24 Vdc	24 Vdc

### 7.2 Antennas

<b>Manufacturer:</b>	Antenova
<b>Type:</b>	2 x Moseni Antenna for LTE applications
<b>Model number:</b>	SRFL029
<b>Frequency ranges:</b>	698 MHz – 798 MHz 824 MHz – 960 MHz 1710 MHz – 2170 MHz 2300 MHz – 2400 MHz 2500 MHz – 2690 MHz
<b>Impedance:</b>	50 Ω
<b>Polarisation:</b>	Linear
<b>Connector type:</b>	IPEX
<b>Length:</b>	110.0 x 20.0 x 0.15 (mm)
<b>Dimensions (Antenna):</b>	< 0.5 g
<b>Environmental limits:</b>	-40°C to +85°C
<b>Mounting:</b>	FPC Self-adhesive 3M 468P


## **8 Modifications**

No modifications were performed during this assessment.

## 9 EUT Test Setup

### 9.1 *Block Diagram*

The following diagram shows basic EUT interconnections:

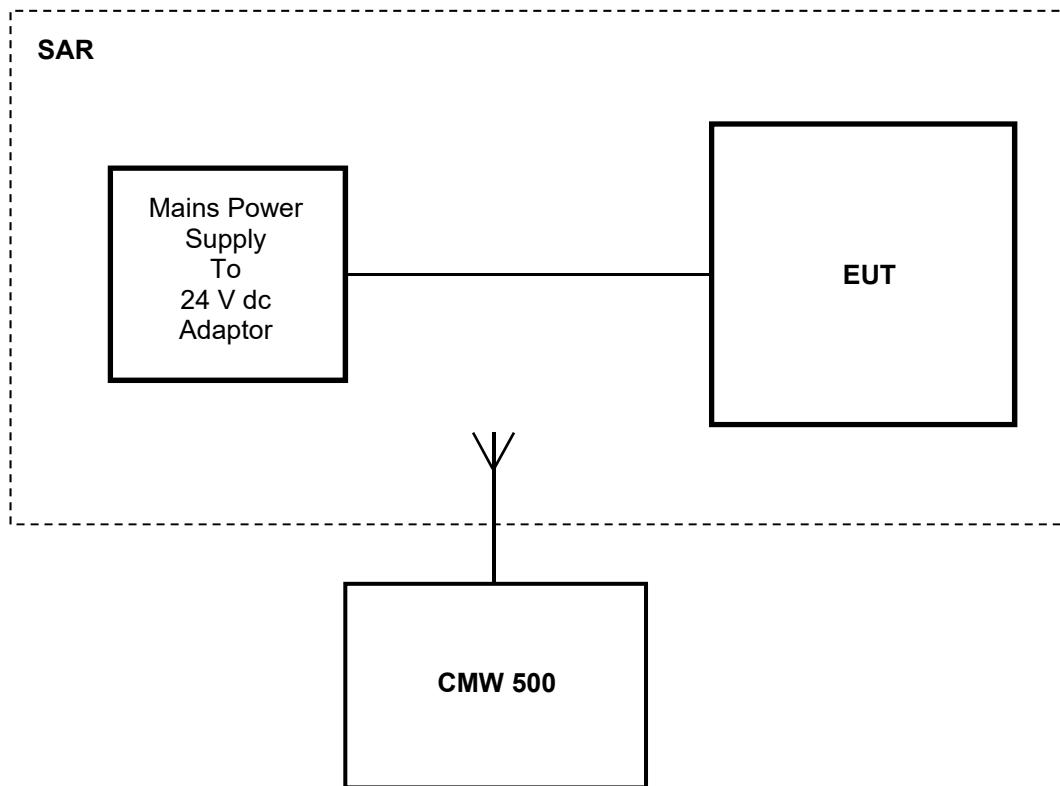

## 9.2 General Set-up Photograph

The following photographs shows basic EUT set-up:



## 9.1 Measurement software

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5 (See Note)  
Element Transmitter Bench Test (See Note)  
ETS Lindgren EMpower V1.0.4.2

Note:

The version of the Element software used is recorded in the results sheets contained within this report.

## 10 General Technical Parameters

### 10.1 *Normal Conditions*

The Zeno Clarity 4G was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was mains via a 24 Vdc adaptor.

## 11 Radiated emissions

### 11.1 Definitions

*Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

*Intermodulation products*

Emissions of two or more electromagnetic waves transmitted simultaneously through a nonlinear electronic system.

### 11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	SK03 Radio Chamber
Test Standard and Clause:	TIA 603-D, clause 2.2.12
EUT Operating Channels Tested:	Mid
Deviations From Standard:	N/A
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: Peak

### Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 53 %RH	20%RH to 75%RH (as declared)
Supply: 24 Vdc	24 Vdc (as declared)

### 11.3 Test Limits

#### FCC 47CFR22

22.917(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

#### FCC 47CFR24

24.238(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

#### FCC 47CFR27

27.53(c) For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

27.53(f) For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

27.53(g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB.

Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53(h) *AWS emission limits—*(1) *General protection levels.* Except as otherwise specified below, for operations in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz, and 2180–2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii the emissions from the EUT were measured on a spectrum analyzer / EMI receiver. The EUT was rotated in three orthogonal planes and the measurement antenna height scanned (below 1GHz, from 1 to 4 m; above 1GHz as necessary) in order to maximise emissions.

The measurements were performed with EUT set at its maximum gain. All modulation schemes, data rates and power settings were used to observe the worst-case configuration at each frequency.

The EUT was substituted with a known generator and antenna and for the same level achieved at the analyser, the effective radiated power was recorded.


Pre-scan plots are shown with a peak detector and 100kHz RBW.

The following formula may be used to convert field strength (FS) in volts/metre to transmitter output power (TP) in watts:

$$TP = (FS \times D)^2 / (30 \times G)$$

where D is the distance in metres between the two antennas and G is the antenna numerical gain referenced to isotropic gain.

**Figure viii Test Setup**

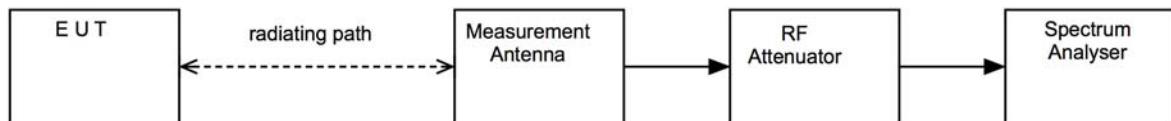

## Test Setup Photograph




### 11.5 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Due For Calibration
EMI Receiver	R&S	ESR26	U489	2020-12-18
Bilog	Chase	CBL611/A	U573	2021-09-19
Log Periodic Ant	Schwarzbeck	UALP 9108	U028	2021-07-02
Pre Amp	Watkins Johnson	6201-69	U372	2021-02-26
Pre Amp	Agilent	8449	L572	2021-10-19
1-18GHz Horn	EMCO	3115	L139	2021-07-16
1-18GHz Horn	EMCO	3115	U223	2021-11-05
Horn 18-26GHz (&U330)	Flann	20240-20	L300	2022-04-23
High Pass Filter	Atlantic Microwave	AFH-07000	U558	2021-01-22
High Pass Filter	MiniCircuits	VHF-1500+	U519	2021-01-22
High Pass Filter	BSC	SH4141	REF977	2021-01-22
Radio Chamber - PP	Rainford EMC	ATS	REF940	2021-12-09


## 11.6 Test Results

GSM BAND: 850 (GPRS): UL ARFCN: 190; FREQ: 836.5 MHz


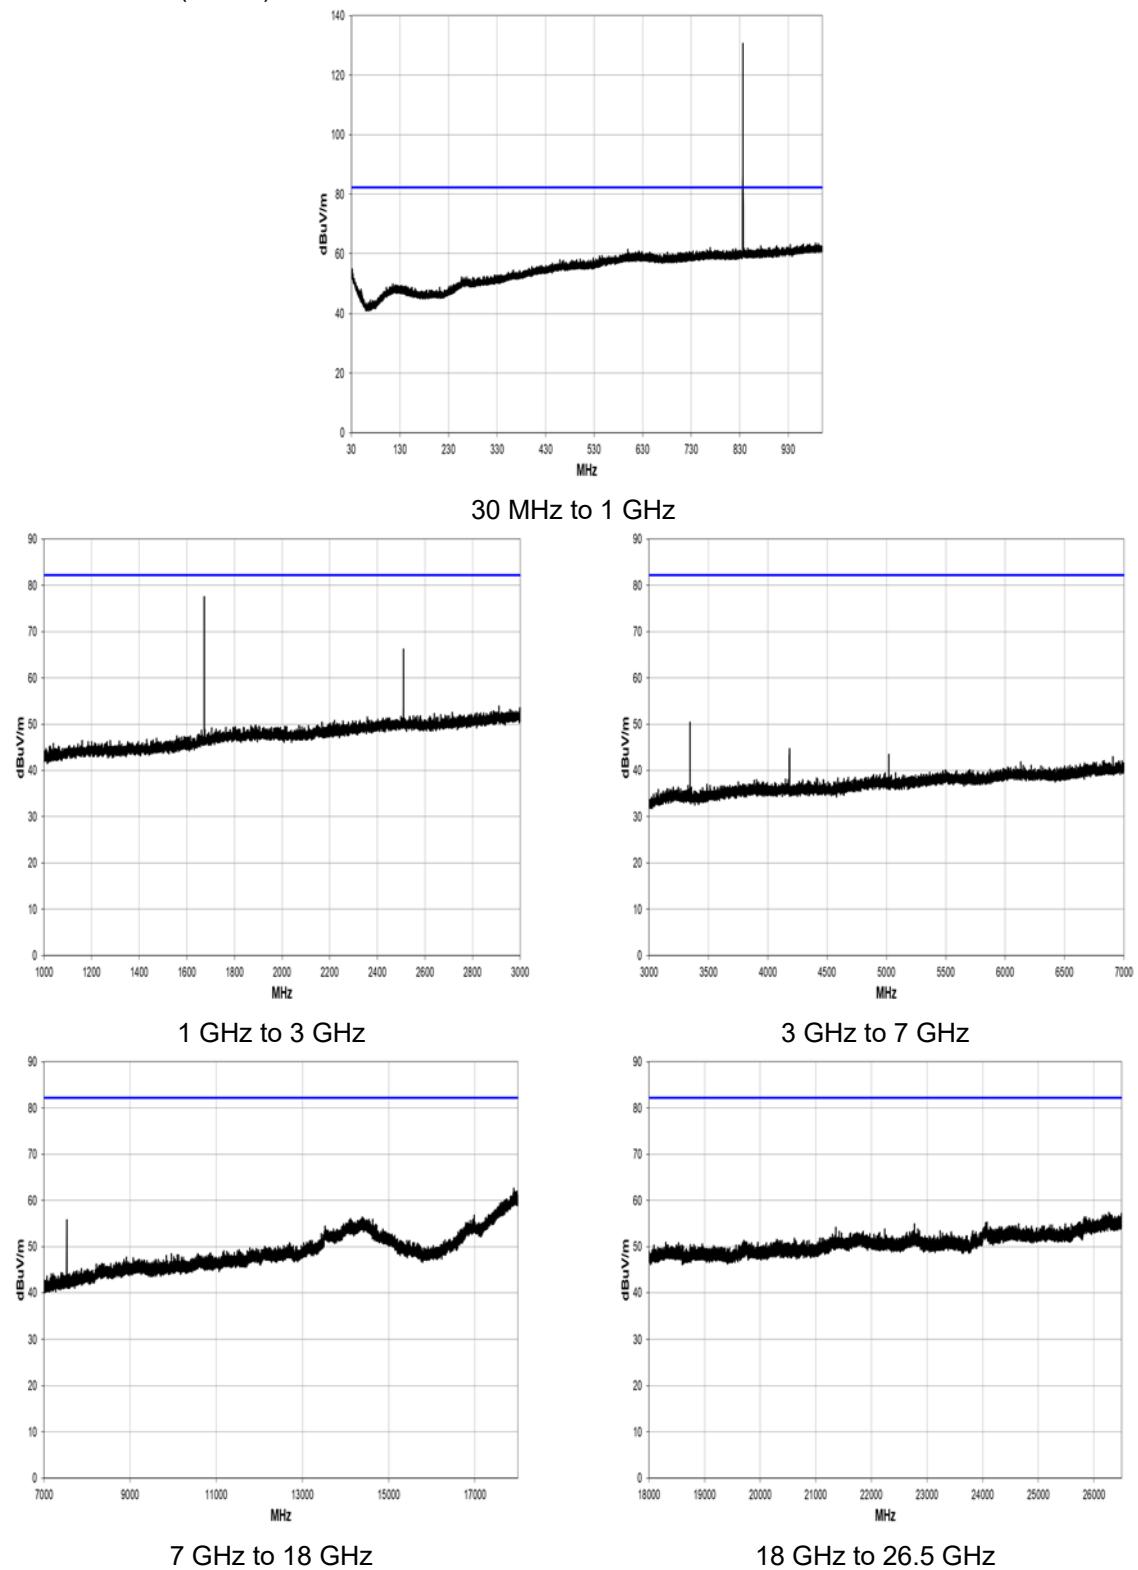


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
1673.275	70.3	-6.9	1.68	155.9	3.0	16.0	Horz	PK	0.0	79.4	82.2	-2.8
1673.308	70.3	-6.9	1.73	81.9	3.0	16.0	Vert	PK	0.0	79.4	82.2	-2.8



GSM BAND: 850 (EDGE): UL ARFCN: 190; FREQ: 836.5 MHz

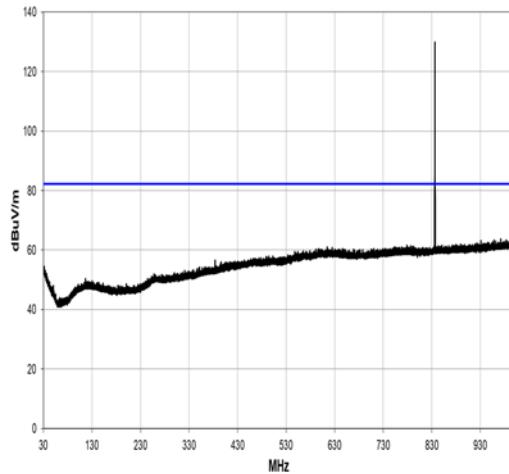

30 MHz to 1 GHz

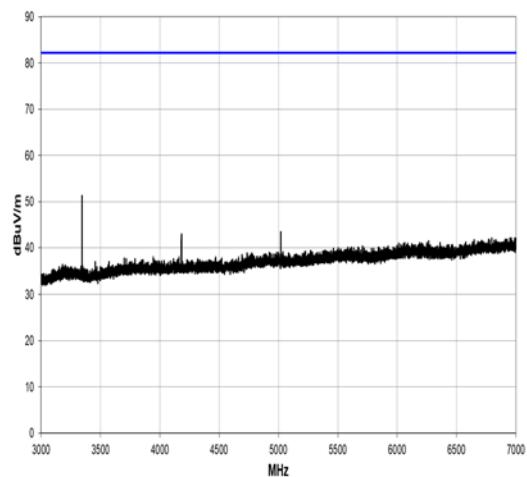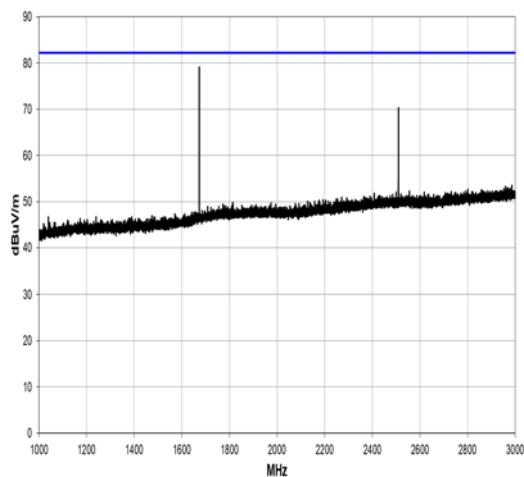

1 GHz to 3 GHz

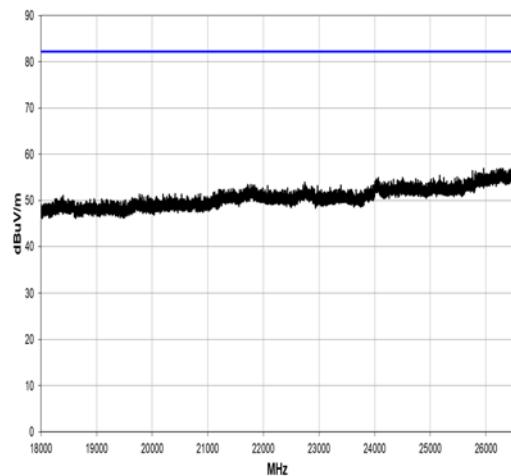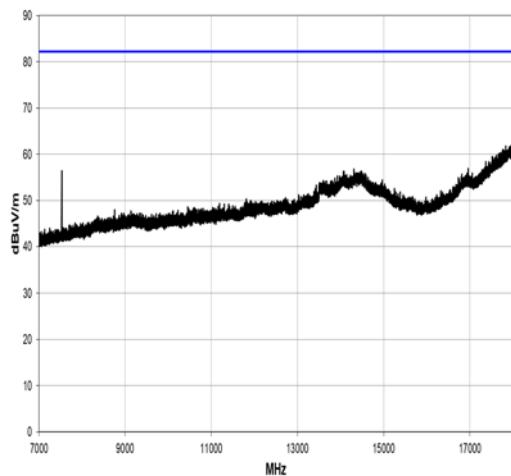


7 GHz to 18 GHz



18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
1673.333	70.8	-6.9	1.8	90.0	3.0	16.0	Vert	PK	0.0	79.9	82.2	-2.3
1673.108	70.6	-6.9	1.69	222.1	3.0	16.0	Horz	PK	0.0	79.7	82.2	-2.5



GSM BAND: 1900 (GPRS): UL ARFCN: 661; FREQ: 1880 MHz

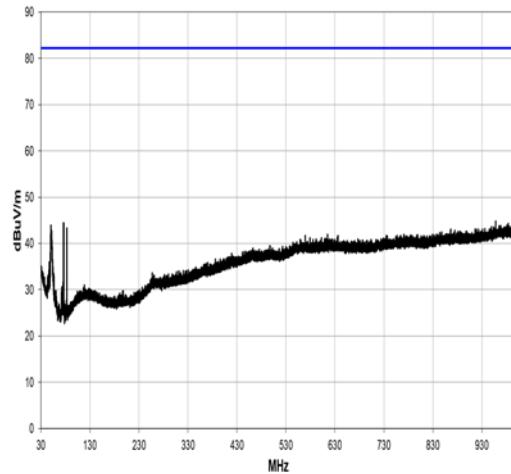

30 MHz to 1 GHz

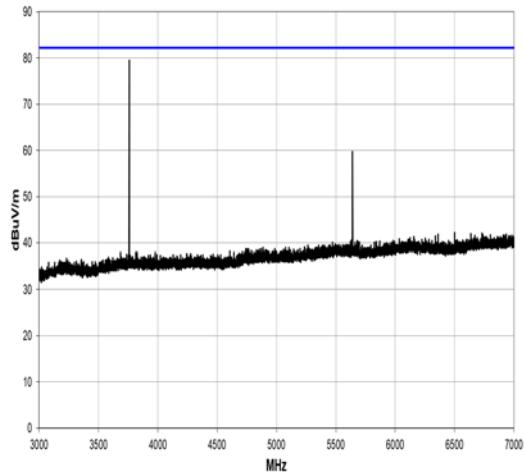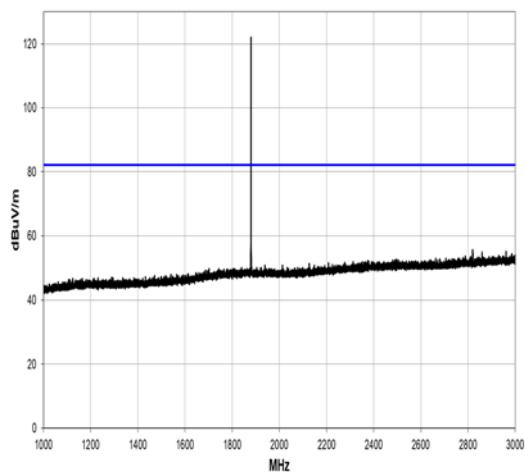

1 GHz to 3 GHz

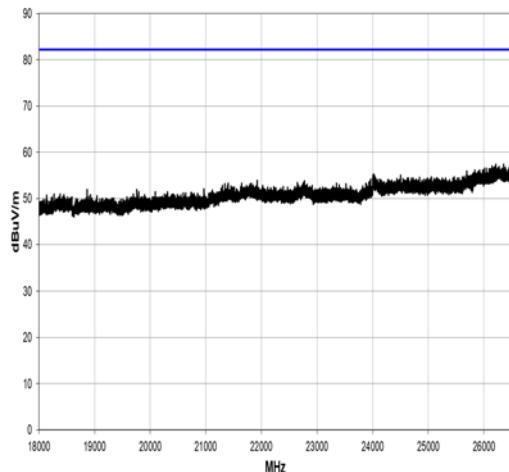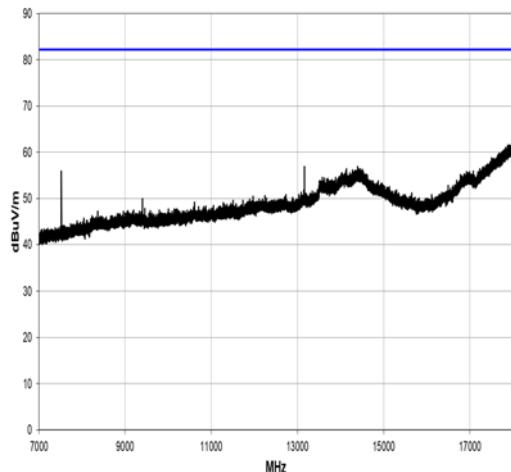


7 GHz to 18 GHz



18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
3760.066	78.5	1.8	1.88	97.9	3.0	0.0	Horz	PK	0.0	80.3	82.2	-1.9
3759.991	72.6	1.8	1.46	153.1	3.0	0.0	Vert	PK	0.0	74.4	82.2	-7.8



GSM BAND: 1900 (EDGE): UL ARFCN: 661; FREQ: 1880 MHz

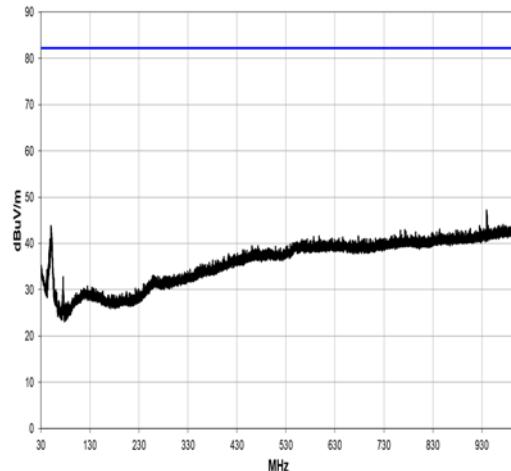

30 MHz to 1 GHz

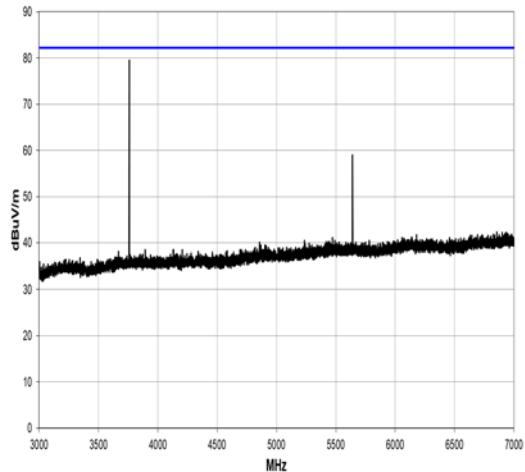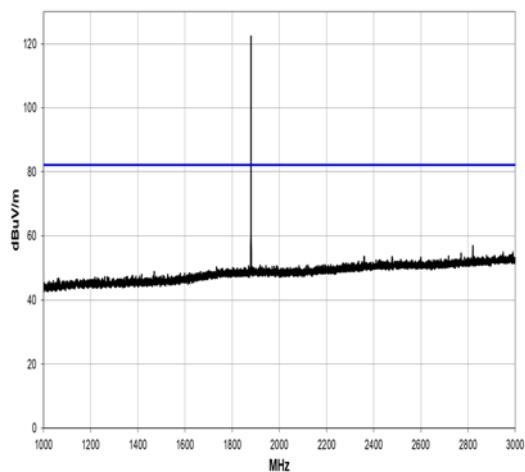

1 GHz to 3 GHz

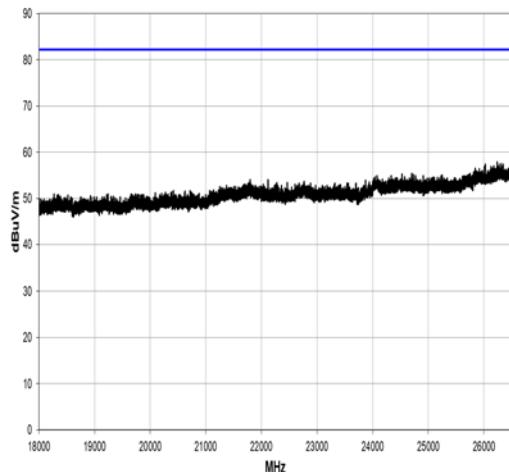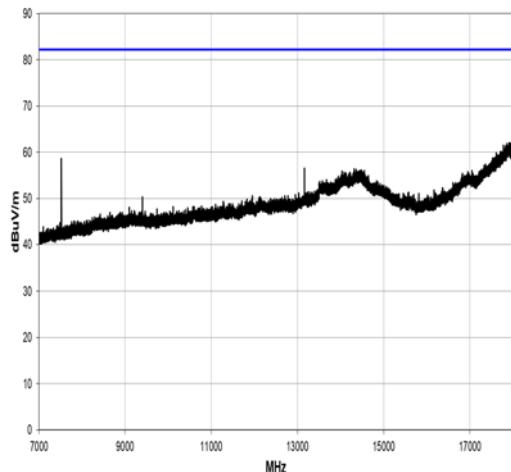


7 GHz to 18 GHz

18 GHz to 26.5 GHz


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
3760.000	77.0	1.8	1.51	117.1	3.0	0.0	Horz	PK	0.0	78.8	82.2	-3.4
3760.050	73.9	1.8	1.42	90.1	3.0	0.0	Vert	PK	0.0	75.7	82.2	-6.5

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7520.017	54.6	8.2	1.5	194.0	3.0	0.0	Vert	PK	0.0	62.8	82.2	-19.4


WCDMA BAND: 2; UL ARFCN: 9400; FREQ: 1880 MHz

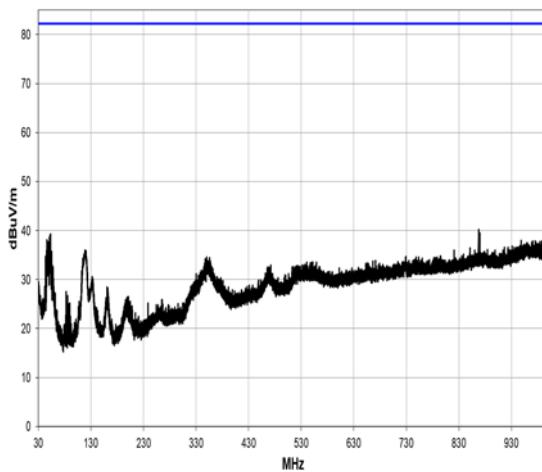


30 MHz to 1 GHz

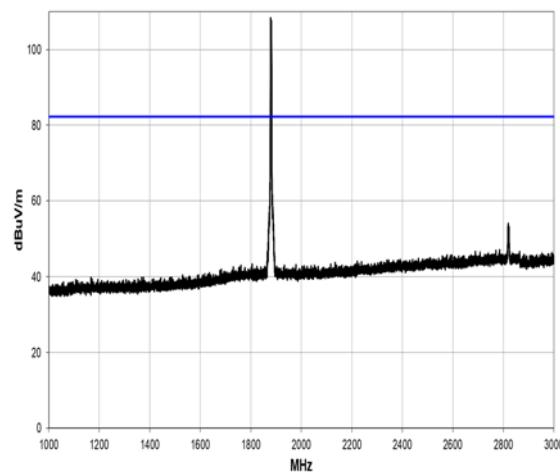


1 GHz to 3 GHz

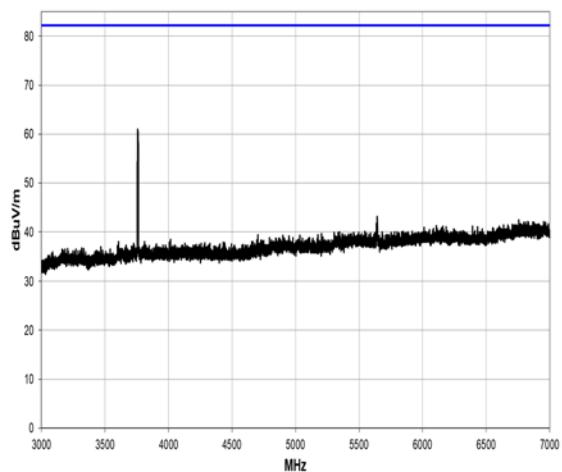

3 GHz to 7 GHz

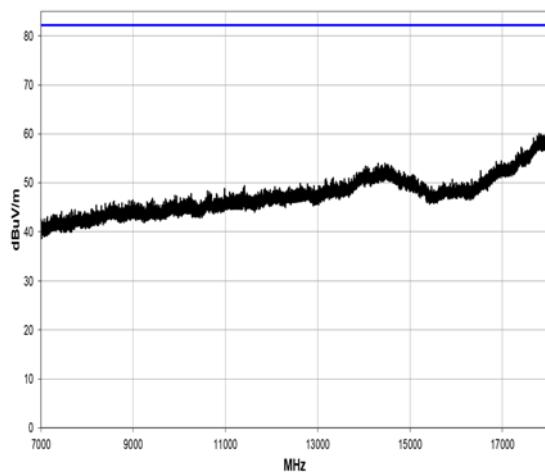

7 GHz to 18 GHz





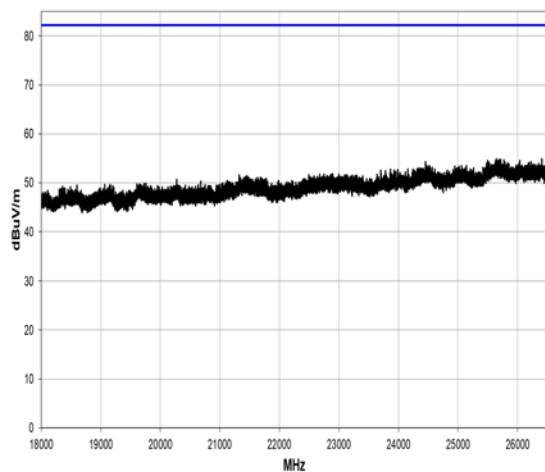


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2818.299	59.1	-2.4	1.5	124.8	3.0	10.0	Horz	PK	0.0	66.7	82.2	-15.5


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
3762.354	68.7	1.7	1.24	188.9	3.0	0.0	Horz	PK	0.0	70.4	82.2	-11.8
3762.437	66.6	1.7	1.52	187.8	3.0	0.0	Vert	PK	0.0	68.3	82.2	-13.9

WCDMA BAND: 4; UL ARFCN: 1413; FREQ: 1732.6 MHz

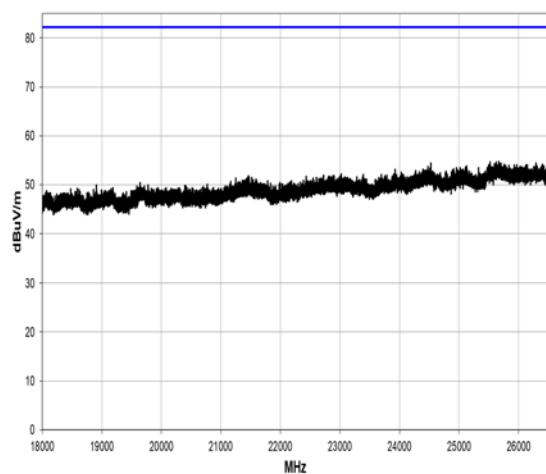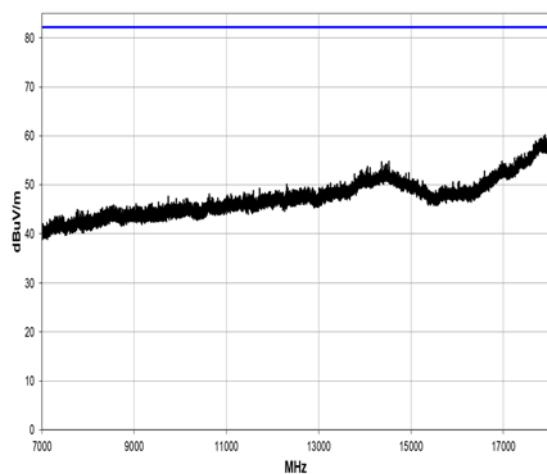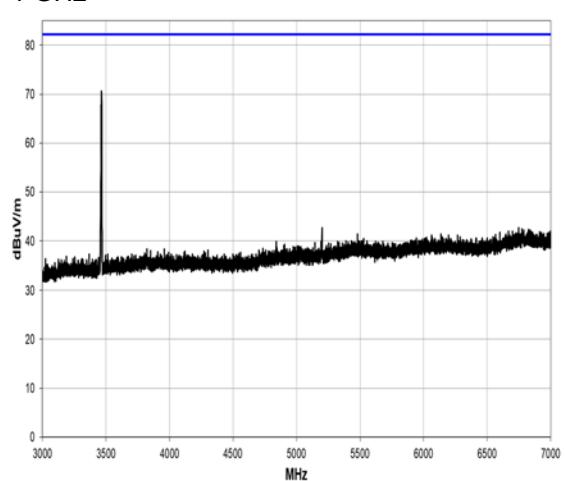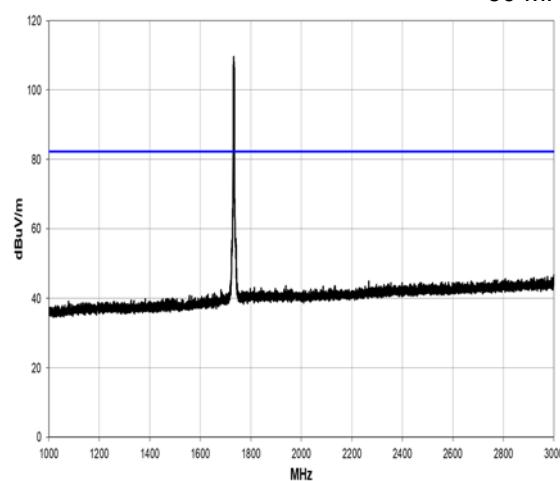
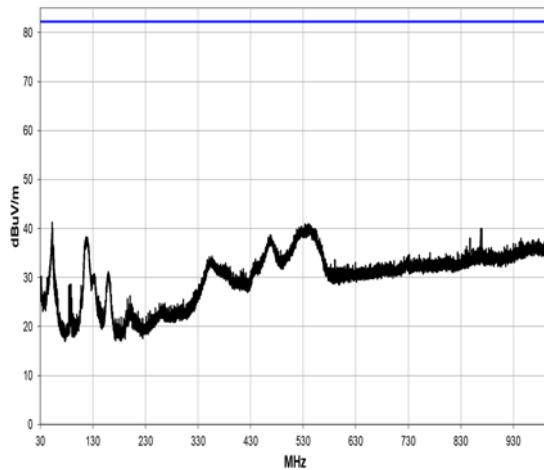


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
3467.175	77.5	0.3	1.5	33.0	3.0	0.0	Vert	PK	0.0	77.8	82.2	-4.4
3467.175	76.7	0.3	1.35	99.9	3.0	0.0	Horz	PK	0.0	77.0	82.2	-5.2



WCDMA BAND: 5; UL ARFCN: 4183; FREQ: 836.6 MHz

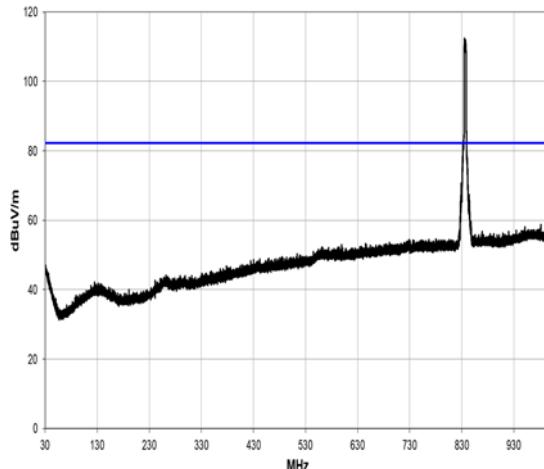

30 MHz to 1 GHz

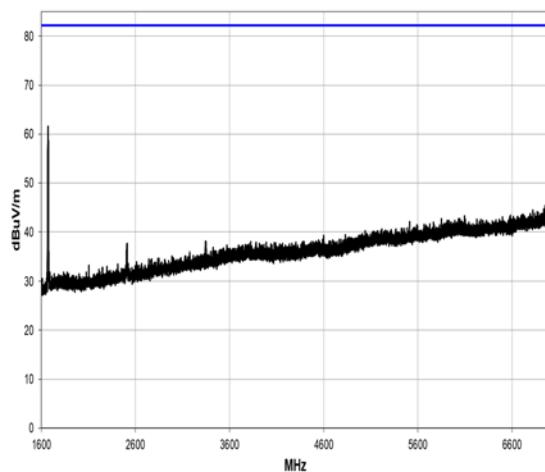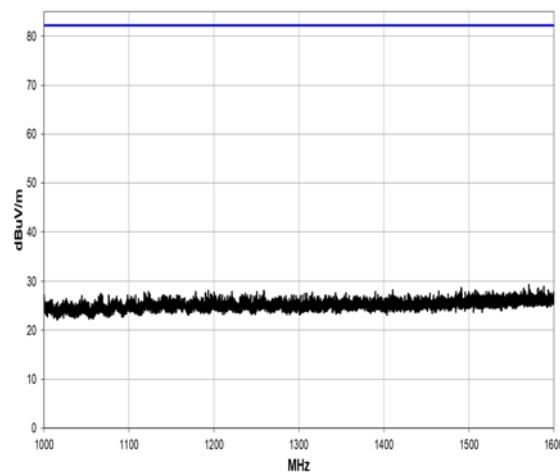

1 GHz to 1.6 GHz

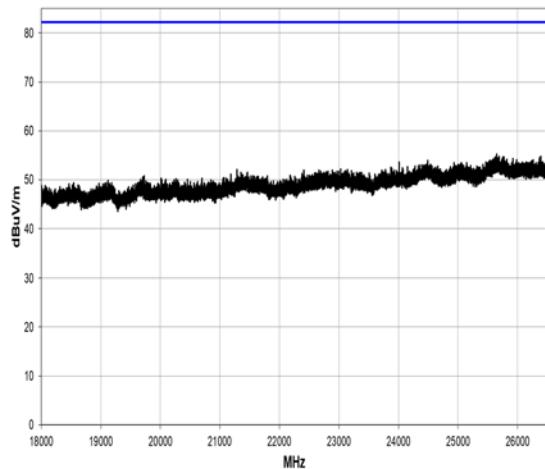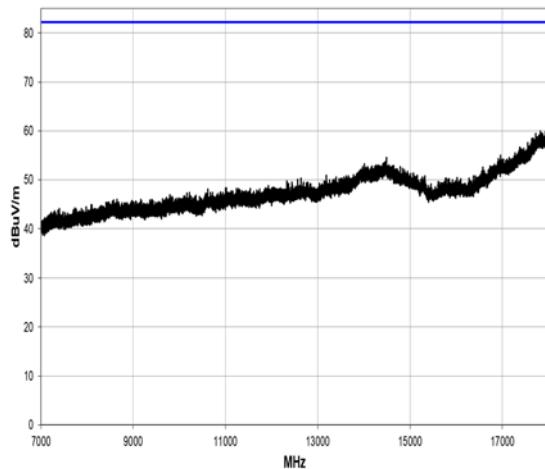


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
1671.155	78.3	-5.8	2.33	165.8	3.0	0.0	Horz	PK	0.0	72.5	82.2	-9.7
1671.197	78.1	-5.8	1.88	69.8	3.0	0.0	Vert	PK	0.0	72.3	82.2	-9.9


LTE BAND: 2; UL ARFCN: 18900; FREQ: 1880 MHz

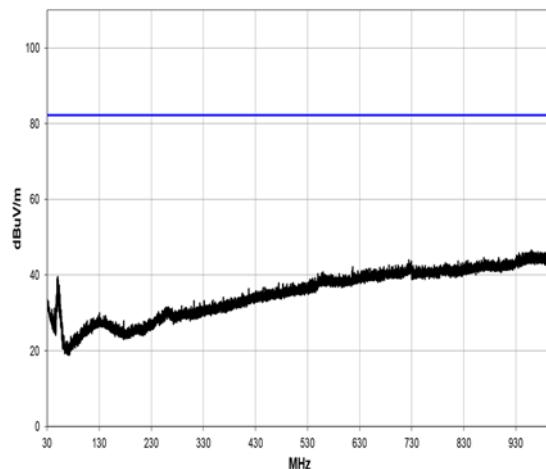


30 MHz to 1 GHz

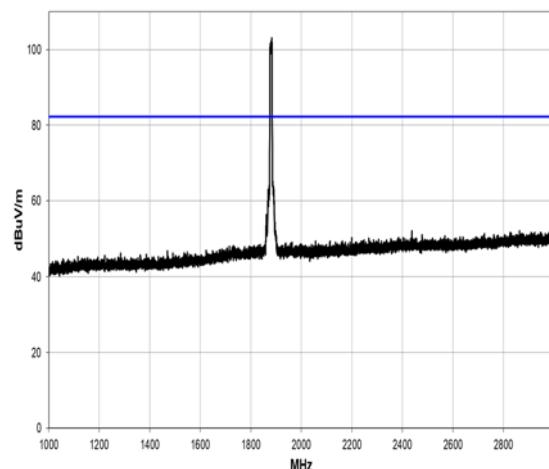


1 GHz to 3 GHz

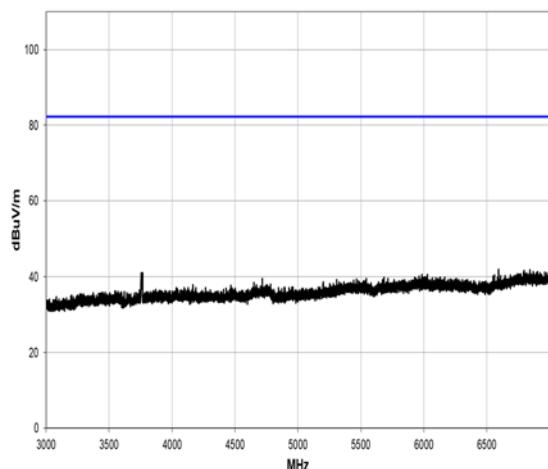

3 GHz to 7 GHz

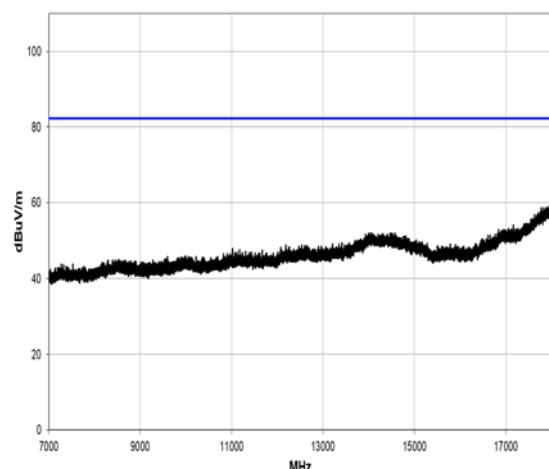


7 GHz to 18 GHz

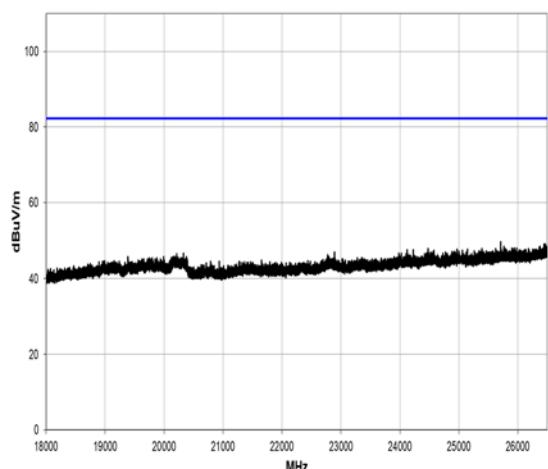


18 GHz to 26.5 GHz

UL ARFCN: 18900; FREQ: 1880 MHz					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
No significant emissions within 20 dB of the limit				PASS	


LTE BAND: 4; UL ARFCN: 20175; FREQ: 1732.5 MHz

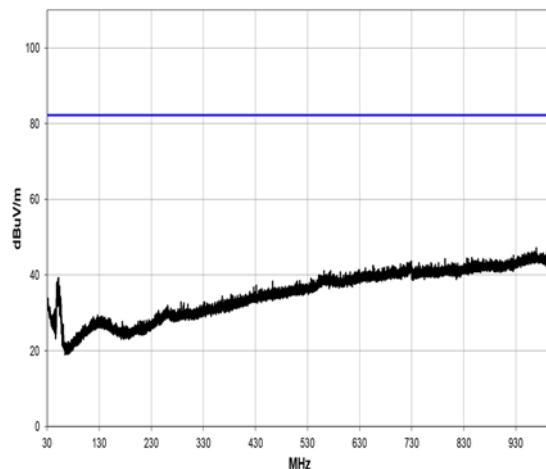


30 MHz to 1 GHz

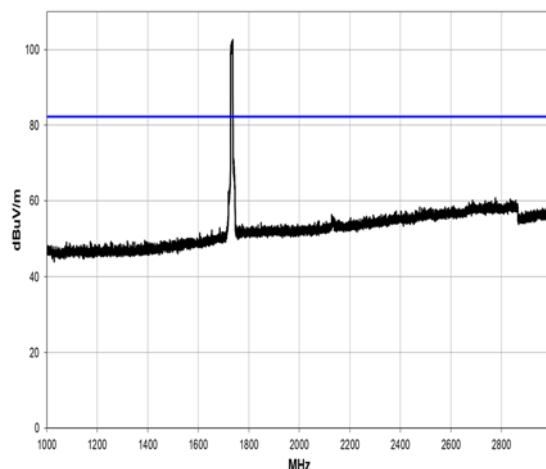


1 GHz to 3 GHz

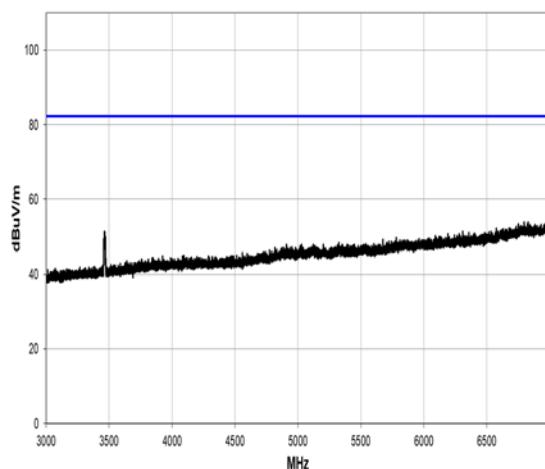

3 GHz to 7 GHz

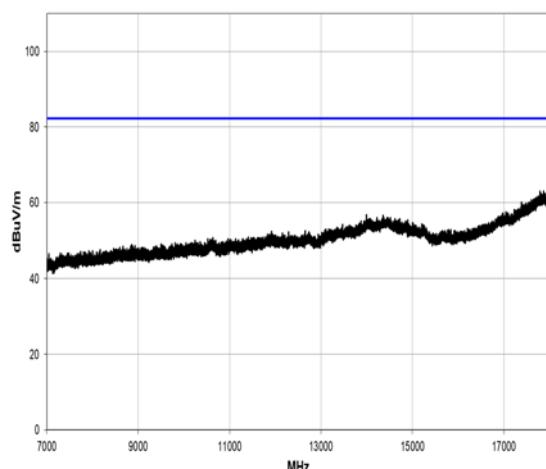


7 GHz to 18 GHz

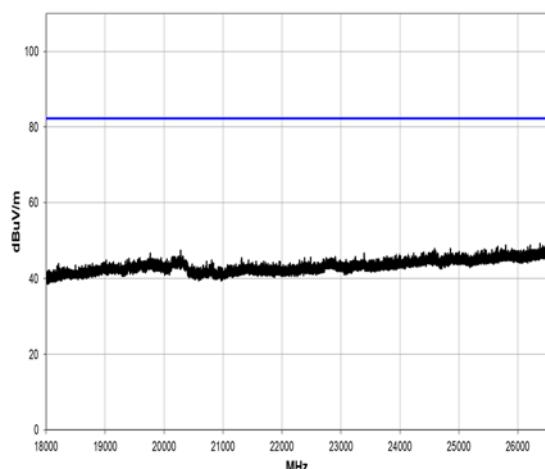


18 GHz to 26.5 GHz

UL ARFCN: 20175; FREQ: 1732.5 MHz					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
No significant emissions within 20 dB of the limit				PASS	


LTE BAND: 5; UL ARFCN: 20525; FREQ: 836.5 MHz

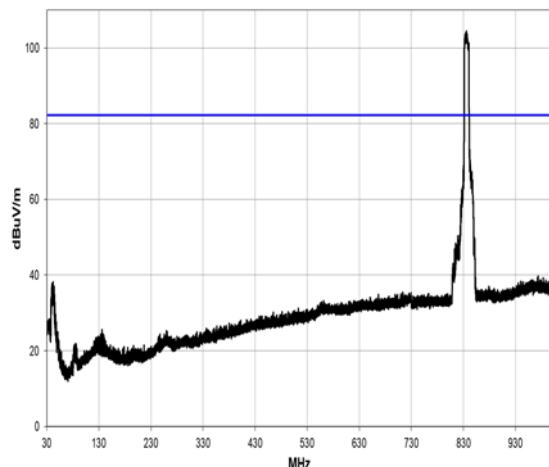


30 MHz to 1 GHz

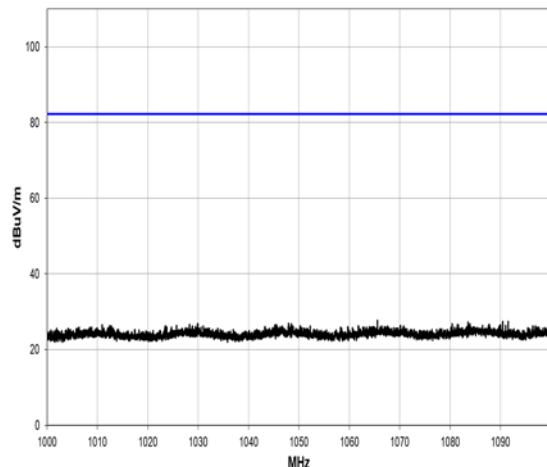


1 GHz to 1.1 GHz

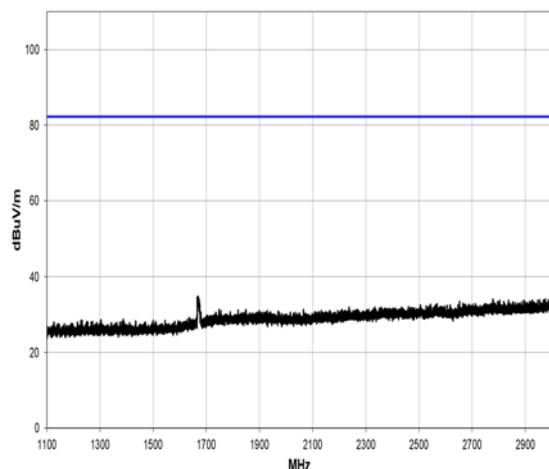


1.1 GHz to 3 GHz

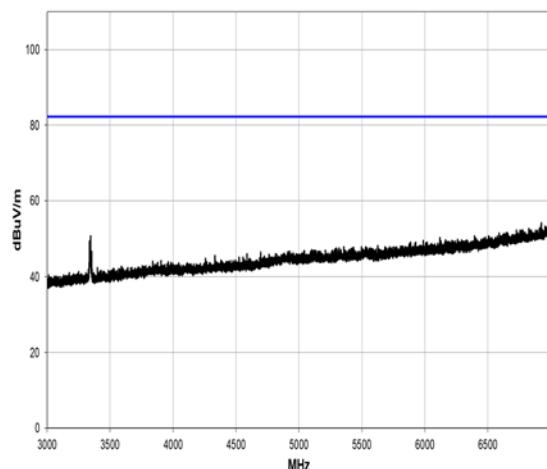

3 GHz to 7 GHz

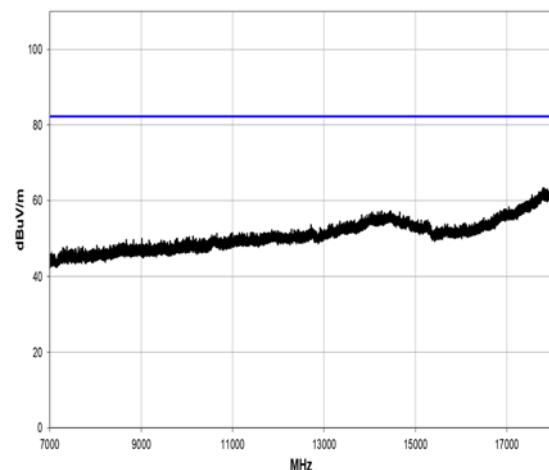


7 GHz to 18 GHz

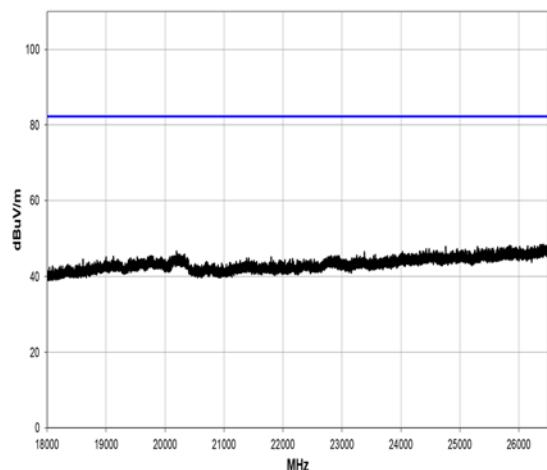


18 GHz to 26.5 GHz

UL ARFCN: 20525; FREQ: 836.5 MHz					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
No significant emissions within 20 dB of the limit				PASS	


LTE BAND: 7; UL ARFCN: 21100; FREQ: 2535 MHz

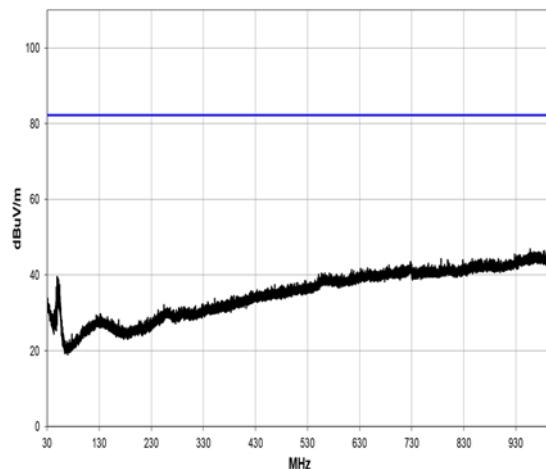


30 MHz to 1 GHz

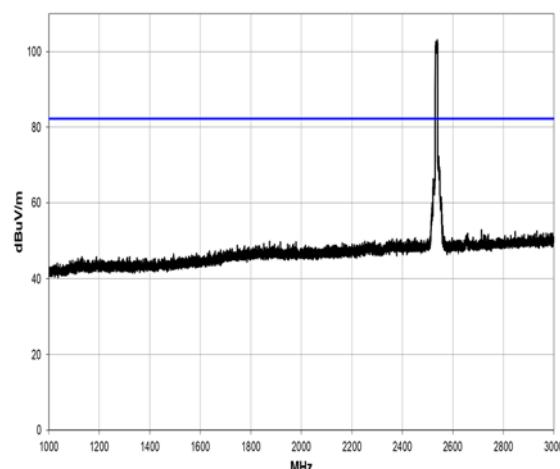


1 GHz to 3 GHz

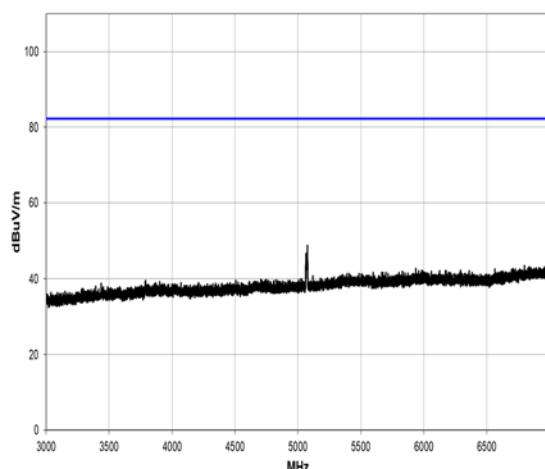

3 GHz to 7 GHz

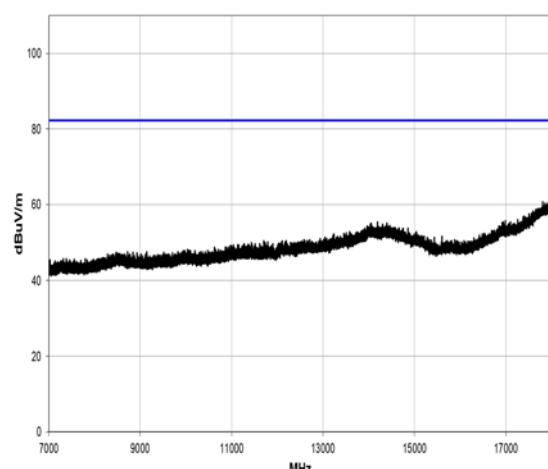


7 GHz to 18 GHz

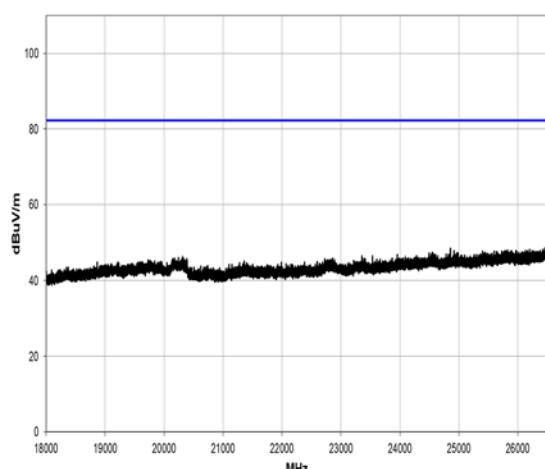


18 GHz to 26.5 GHz

UL ARFCN: 21100; FREQ: 2535 MHz					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
No significant emissions within 20 dB of the limit				PASS	


LTE BAND: 12; UL ARFCN: 23095; FREQ: 707.5 MHz

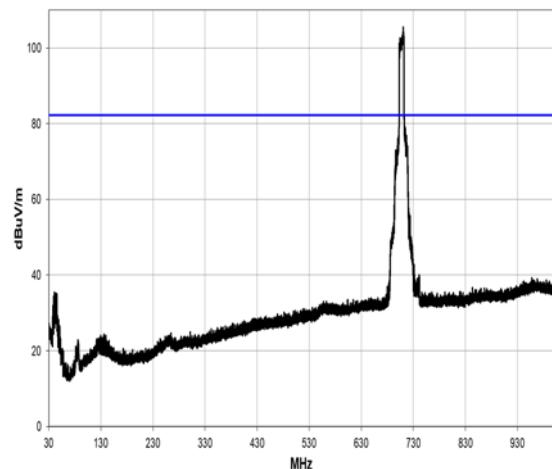


30 MHz to 1 GHz

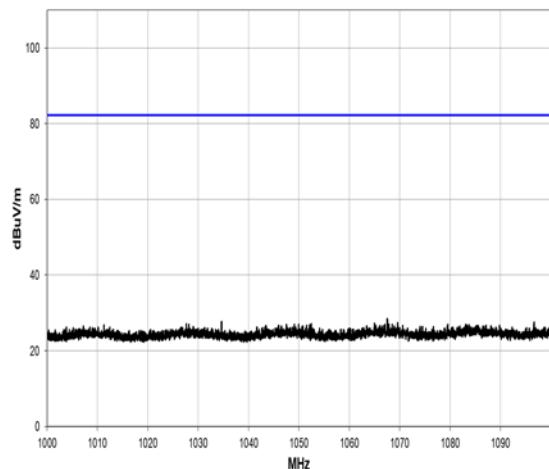


1 GHz to 1.1 GHz

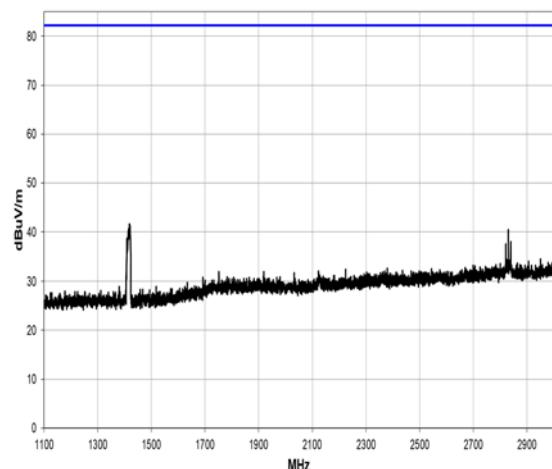


1.1 GHz to 3 GHz

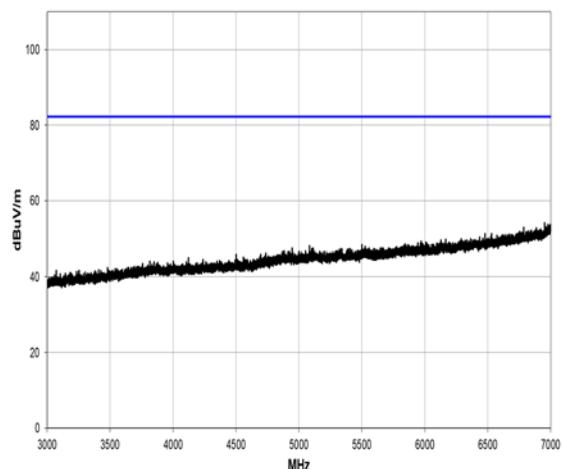

3 GHz to 7 GHz

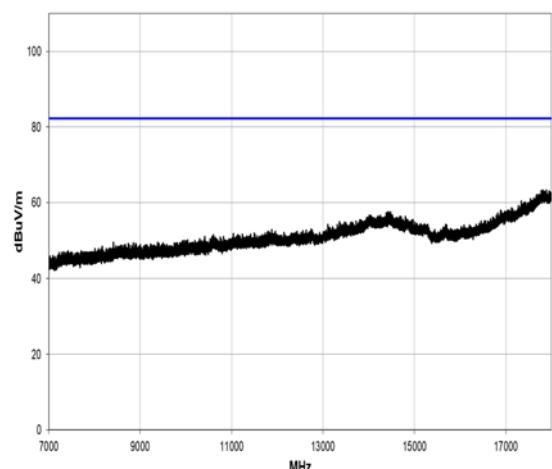

7 GHz to 18 GHz

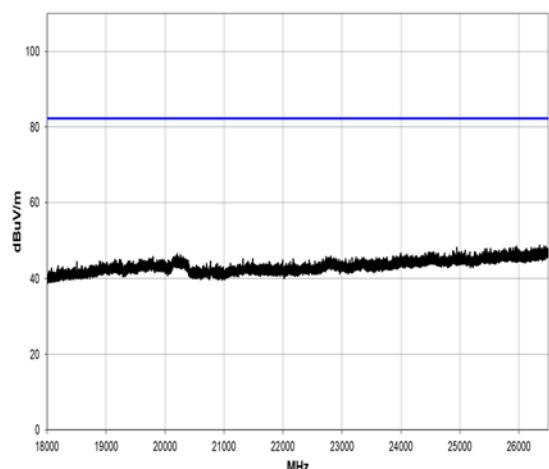

18 GHz to 26.5 GHz

UL ARFCN: 23095; FREQ: 707.5 MHz					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
No significant emissions within 20 dB of the limit				PASS	

## 12 RF output power (mean output power)

### 12.1 Definition

The average power supplied to the antenna transmission line by a transmitter during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation taken under normal operating conditions

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	SK03 Radio Chamber
Test Standard and Clause:	KDB 935210 D05 v01, clause 3.5 KDB 971168, clause 5.2
EUT Channels Measured:	Mid
Deviations From Standard:	None
Measurement BW:	10 MHz
Measurement Detector:	Mean
Voltage Extreme Environment Test Range:	Mains Power = 85 % and 115 % of Nominal (FCC only requirement); Battery Power = new battery.

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 53 % RH	20 % RH to 75 % RH (as declared)

### 12.3 Test Limit

#### FCC 47CFR22

22.913(a) *Maximum ERP*. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. However, for those systems operating in areas more than 72 km (45 miles) from international borders that:

- (1) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or,
- (2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949,

the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

#### FCC 47CFR24

##### 24.232(a)

- (1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

##### 24.232(b)

- (1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

- (2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the

Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

24.232(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

*FCC 47CFR27*

27.50(a) The following power limits and related requirements apply to stations transmitting in the 2305–2320 MHz band or the 2345–2360 MHz band.

(1) *Base and fixed stations.*

- (i) For base and fixed stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band:
  - (A) The average equivalent isotropically radiated power (EIRP) must not exceed 2,000 watts within any 5 megahertz of authorized bandwidth and must not exceed 400 watts within any 1 megahertz of authorized bandwidth.
- (ii) For base and fixed stations transmitting in the 2315–2320 MHz band or the 2345–2350 MHz band, the peak EIRP must not exceed 2,000 watts.

27.50(b) The following power and antenna height limits apply to transmitters operating in the 746–758 MHz, 775–788 MHz and 805–806 MHz bands:

- (1) Fixed and base stations transmitting a signal in the 757–758 and 775–776 MHz bands must not exceed an effective radiated power (ERP) of 1000 watts and an antenna height of 305 m height above average terrain (HAAT), except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.
- (2) Fixed and base stations transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth of 1 MHz or less must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.
- (3) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth of 1 MHz or less must not exceed an ERP of 2000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts ERP in accordance with Table 2 of this section.
- (4) Fixed and base stations transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.
- (5) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section.
- (9) Control stations and mobile stations transmitting in the 746–757 MHz, 776–788 MHz, and 805–806 MHz bands and fixed stations transmitting in the 787–788 MHz and 805–806 MHz bands are limited to 30 watts ERP.

27.50(c) The following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band

- (1) Fixed and base stations transmitting a signal with an emission bandwidth of 1 MHz or less must not exceed an effective radiated power (ERP) of 1000 watts and an antenna height of 305 m height above average terrain (HAAT), except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section;
- (2) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal with an emission bandwidth of 1 MHz or less must not exceed an ERP of 2000 watts and an antenna height of 305 m HAAT, except that antenna heights greater

than 305 m HAAT are permitted if power levels are reduced below 2000 watts ERP in accordance with Table 2 of this section;

(3) Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section;

(4) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section;

(7) A licensee authorized to operate in the 710–716 or 740–746 MHz bands may operate a fixed or base station at an ERP up to a total of 50 kW within its authorized, 6 megahertz spectrum block if the licensee complies with the provisions of §27.55(b). The antenna height for such stations is limited only to the extent required to satisfy the requirements of § 27.55(b).

(9) Control and mobile stations are limited to 30 watts ERP;

(12) A licensee authorized to operate in the 716–722 or 722–728 MHz bands may operate a fixed or base station at an ERP up to a total of 50 kW within its authorized, 6 megahertz spectrum block if the licensee complies with the provisions of §27.55(b), obtains written concurrences from all affected licensees in the 698–746 MHz bands within 120 km of the proposed high power site, and files a copy of each written concurrences with the Wireless Telecommunications Bureau on FCC Form 601. The antenna height for such stations is limited only to the extent required to satisfy the requirements of § 27.55(b).

27.50(d) The following power and antenna height requirements apply to stations transmitting in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz and 2180–2200 MHz bands:

(1) The power of each fixed or base station transmitting in the 1995–2000 MHz, 2110–2155 MHz, 2155–2180 MHz or 2180–2200 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to:

- (i) An equivalent isotropically radiated power (EIRP) of 3280 watts when transmitting with an emission bandwidth of 1 MHz or less;
- (ii) An EIRP of 3280 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(2) The power of each fixed or base station transmitting in the 1995–2000 MHz, the 2110–2155 MHz 2155–2180 MHz band, or 2180–2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

- (i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;
- (ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(4) Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710–1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.


(9) Fixed, mobile and portable (handheld) stations operating in the 1915–1920 MHz band are limited to 300 milliwatts EIRP.

## 12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iv Test Setup**

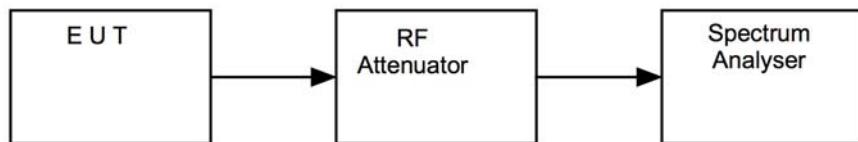

## 12.5 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU46	REF910	2021-11-16
Attenuator	AtlanTechRF Microwave	20dB SMA	U632	Cal in use
Attenuator	AtlanTechRF Microwave	10dB SMA	U633	Cal in use
Attenuator	Radiall	6dB	U332	Cal in use

## 12.6 Test Results

<b>GSM850 (GPRS); UL ARFCN: 190; FREQ: 836.5 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
836.5	32.15	1.641	PASS

<b>GSM850 (EDGE); UL ARFCN: 190; FREQ: 836.5 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
836.5	27.79	0.601	PASS

<b>GSM1900 (GPRS); ; UL ARFCN: 661; FREQ: 1880 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
1880	29.17	0.826	PASS

<b>GSM1900 (EDGE); ; UL ARFCN: 661; FREQ: 1880 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
1880	24.47	0.280	PASS

<b>WCDMA; BAND: 2; UL ARFCN: 9400; FREQ: 1880 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
1880	22.30	0.170	PASS

<b>WCDMA; BAND: 4; UL ARFCN: 1413; FREQ: 1732.6 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
1732.6	22.10	0.162	PASS

<b>WCDMA; BAND: 5; UL ARFCN: 4183; FREQ: 836.6 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
836.6	22.20	0.166	PASS

<b>LTE; BAND: 2; UL ARFCN: 18900; FREQ: 1880 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
1880	21.16	0.131	PASS

<b>LTE; BAND: 4; UL ARFCN: 20175; FREQ: 1732.5 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
1732.5	20.30	0.107	PASS

<b>LTE; BAND: 5; UL ARFCN: 20525; FREQ: 836.5 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
836.5	20.96	0.125	PASS

<b>LTE; BAND: 7; UL ARFCN: 21100; FREQ: 2535 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
2535	21.16	0.131	PASS

<b>LTE; BAND: 12; UL ARFCN: 23095; FREQ: 707.5 MHz; Power setting: High</b>			
<b>Channel Frequency (MHz)</b>	<b>Output Power (dBm)</b>	<b>Max. Power (W)</b>	<b>Result</b>
707.5	21.30	0.135	PASS

## 13 Measurement Uncertainty

### Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

#### [1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**  
Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

#### [2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**  
Uncertainty in test result (Spectrum Analyser) = **2.48dB**