

Nemko Korea Co., Ltd.

165-51, Yurim-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17042, Republic of Korea
TEL:+82 31 330-1700 FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION

Project No. : NK-24-R-256 **Dates of receipt :** June 13, 2024

Applicant : Olive Union inc **Dates of Issue :** August 28, 2024
5, 6th floor, 24, Banpo-daero 28-gil,
Seocho-gu, Seoul, Korea, Republic of **Test Site :**
Nemko Korea Co., Ltd.

FCC ID :	2AOLH-OU0P030303
Applicant :	Olive Union inc
Brand Name :	Olive Air

Model: OU0P030303

Additional Model(s): OU0P030103, OU0P030203, OU0P030403,
OU0P030503, OU0P030603, OU0P030703,
OU0P030803, OU0P030903, OU0P031003,
OU0P031103, OU0P031203

EUT Type: Hearing Aids

Classification: FCC Part 15 Digital Transmission System (DTS)

Date of Test: August 9, 2024 ~ August 21, 2024

Applied Standard: FCC 47 CFR Part 15.247

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.
This test report is prepared according to the requirements of ISO / IEC 17025



Tested By : Jaehyong Lee
Test Engineer

Reviewed By : Hoonpyo Lee
Technical Manager

**Revision History**

Rev.	Issue Date	Revisions	Revised By
00	August 28, 2024	Initial issue	Jaehyong Lee

TABLE OF CONTENTS

1. INTRODUCTION	4
1.1 Test facility	4
1.2 Accreditation and listing	4
2. EUT INFORMATION & TEST CONDITIONS	5
2.1 EUT Information	5
2.2 Operation During Test.....	6
2.3 Support Equipment	8
2.4 Setup Drawing.....	9
3. ANTENNA REQUIREMENTS	10
4. SUMMARY OF TEST RESULTS	11
5. TEST METHODOLOGY	11
6. DESCRIPTION OF TESTS	12
6.1 Duty Cycle	12
6.2 6 dB Bandwidth	13
6.3 Peak Output Power	14
6.4 Power Spectral Density	15
6.5 Band Edge / Conducted Spurious Emissions	16
6.6 Radiated Emissions	17
6.7 AC Line Conducted Emissions.....	18
7. TEST DATA	19
7.1 Duty Cycle	19
7.2 6 dB Bandwidth	22
7.3 Peak Output Power	27
7.4 Power Spectral Density	32
7.5 Band Edge / Conducted Spurious Emissions	37
7.6 Radiated Spurious Emissions	46
7.7 Radiated Band Edge	53
7.8 Radiated Emissions_Below 1GHz	57
7.9 AC Line Conducted Emissions.....	58
8. TEST EQUIPMENT	59
9. ACCURACY OF MEASUREMENT & DECISION RULE	60
9.1 Uncertainty Calculation	60
9.2 Decision rule.....	60

1. INTRODUCTION

1.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014), the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating.

These measurement tests were conducted at **Nemko Korea Co., Ltd.**

The site address 165-51, Yurim-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17042, Rep. of Korea.

1.2 Accreditation and listing

Accreditation type		Accreditation number
	CAB Accreditation for DOC	Designation No. KR0026
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)	Registration No. KT155
	Canada IC Registered site	Site No. 29506
	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
	EMC CBTL	TL124
	KCC(RRL)Designated Lab.	Registration No. KR0026

2. EUT INFORMATION & TEST CONDITIONS

2.1 EUT Information

2.1.1 Specifications

EUT Type	Hearing Aids
Model Name	OU0P030303
Frequency of Operation	2 402 MHz ~ 2 480 MHz
Peak Output Power (Conducted)	Left_Bluetooth: 6.59 dBm Left_Bluetooth LE: 6.33 dBm Right_Bluetooth: 6.64 dBm Right_Bluetooth LE: 6.41 dBm
Number of Channels	Bluetooth: 79 CH Bluetooth LE: 40 CH
Modulations	Bluetooth: GFSK, π/4DQPSK, 8DPSK Bluetooth LE: GFSK
Antenna Gain (peak)	Left: -4.12 dBi Right: -3.46 dBi
Antenna Setup	1TX / 1RX
EUT Test Voltage	DC 3.85 V
Temperature Range	0 °C ~ +50 °C
Remarks	-

2.2 Operation During Test

The EUT is the transceiver which is Bluetooth v5.1 supporting Bluetooth BR/EDR/LE-1Mbps /LE-2Mbps/LE-Coded mode.

The Laptop PC was used to control the EUT to transmit the wanted TX channel continuously (duty cycle < 98%) by the testing program (RTLTAPP V5.2.2.93).

The operating voltage of EUT was 3.85 Vdc supplied from DC power supply.

The EUT was tested at the lowest, middle and the highest channels with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

2.2.1 Table of Test power setting

- Left

Frequency	Mode	Modulation	Power setting Level
2 402 MHz ~ 2 480 MHz	BLE 1Mbps	GFSK	40
2 402 MHz ~ 2 480 MHz	BLE 2Mbps	GFSK	37
2 402 MHz ~ 2 480 MHz	BLE 125kbps	GFSK	40
2 402 MHz ~ 2 480 MHz	BLE 500kbps	GFSK	40

- Right

Frequency	Mode	Modulation	Power setting Level
2 402 MHz ~ 2 480 MHz	BLE 1Mbps	GFSK	43
2 402 MHz ~ 2 480 MHz	BLE 2Mbps	GFSK	3A
2 402 MHz ~ 2 480 MHz	BLE 125kbps	GFSK	43
2 402 MHz ~ 2 480 MHz	BLE 500kbps	GFSK	43

2.2.2 Table of Test frequency

Frequency band	Modulation	Test Channel (CH)	Frequency (MHz)
2.4 GHz	GFSK	0	2 402
		19	2 440
		39	2 480

2.2.3 Antenna Information

Frequency band	Modulation	Antenna TX mode	Support CDD	Support MIMO
2.4 GHz	GFSK	<input checked="" type="checkbox"/> 1TX, <input type="checkbox"/> 2TX	<input type="checkbox"/> Yes, <input checked="" type="checkbox"/> No	<input type="checkbox"/> Yes, <input checked="" type="checkbox"/> No

2.2.4 Additional Information Related to Testing

The cable and attenuator loss from 30 MHz to 26.5 GHz was reflected in spectrum analyzer with correction factor for all conducted testing.

2.2.5 Worst-case Configuration and Mode

Radiated emission below 1GHz was performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The emissions (Band-edge & spurious emissions) were investigated in three orthogonal orientations X, Y and Z.

Accordingly, the orientation was determined and tested as shown in the table below:

- **Left**

Test Items	X	Y	Z
Band-edge	O	-	-
Spurious emissions	O	-	-

- **Right**

Test Items	X	Y	Z
Band-edge	O	-	-
Spurious emissions	O	-	-

BLE 1Mbps, BLE 500kbps, BLE 125kbps mode peak power were all investigated, BLE 500kbps power were the worst case. Radiated emission and conducted test plots were based on this mode to showing compliance.

2.2.6 Additional model covered by this report

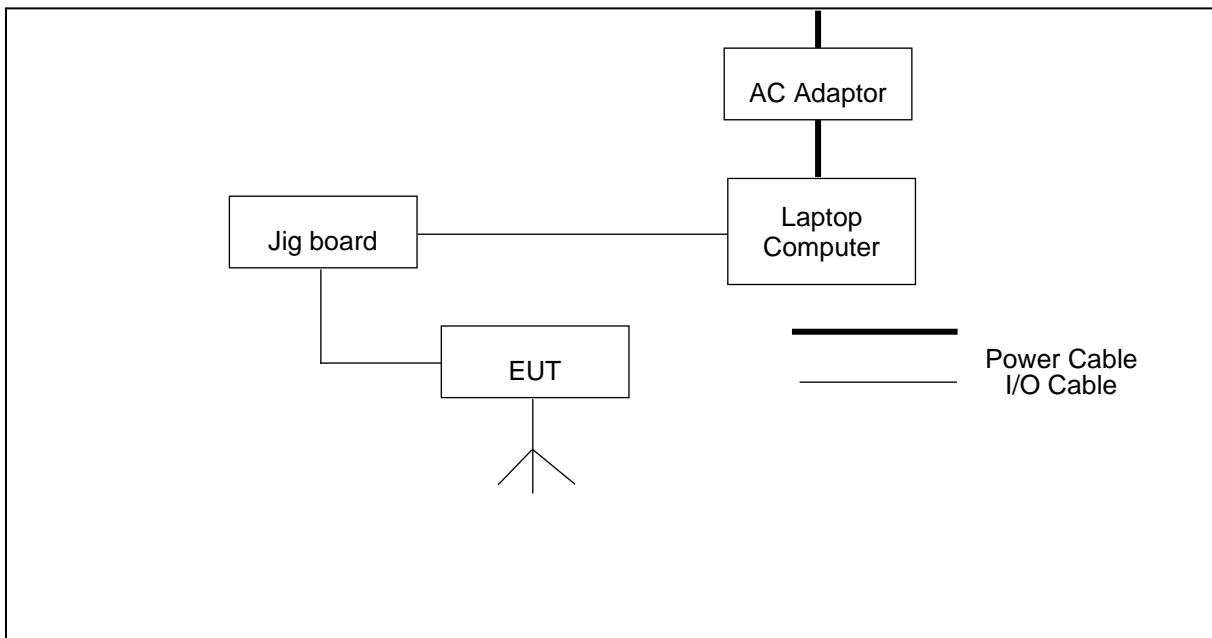
- The variant models shell use materials and electric circuits that are the same as the basic model.
- The difference between basic and variant models are product color as below table.

Basic model name		Description (product color)	
OU0P030303		Black	
Variant model name	Description	Variant model name	Description
OU0P030301	Natural	OU0P030308	Pink
OU0P030302	White	OU0P030309	Sliver
OU0P030304	Orange	OU0P030310	Yellow
OU0P030305	Blue	OU0P030311	Gold
OU0P030306	Red	OU0P030312	Green
OU0P030307	Grey	-	

2.3 Support Equipment

EUT	Olive Union inc Model : OU0P030303	S/N: N/A Identical Proto-type
Laptop Computer	LG Model : LG15Z90N	FCC DOC S/N : 003NZSJ038878
AC Adapter	APD Shenzhen DK Inc. Model : WA-48B19FS	FCC DOC S/N : AKDS764889301B539

2.4 Setup Drawing



3. ANTENNA REQUIREMENTS

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

§15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the EUT and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

The transmitter has permanently attached FPCB antenna (Internal antenna) on board.

Used Antenna	
Model name	2 402 MHz ~ 2 480 MHz
	Max. peak gain (dBi)
Olive Air Earbuds Antenna Left	-4.12
Olive Air Earbuds Antenna Right	-3.46

4. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	Test Limit	Test Condition	Result	Remark
6dB Bandwidth	15.247(a)(2)	> 500 kHz	Conducted	Complies	-
Peak Output Power	15.247(b)(3)	< 1 Watt		Complies	-
Power Spectral Density	15.247(e)	< 8 dBm/3 kHz		Complies	-
Band Edge / Conducted Spurious Emission	15.247(d)	≥ 20 dBc		Complies	-
Radiated Spurious Emission	15.205, 15.209	< 74 dB μ V/m (PK) < 54 dB μ V/m (AV) Radiated limits detailed in 15.209	Radiated	Complies	-
AC Line Conducted Emission	15.207	FCC 15.207 Limits	Line Conducted	Complies	-

5. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

6. DESCRIPTION OF TESTS

6.1 Duty Cycle

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 11.6

Test Procedure

EUTs Duty Cycle is measured at middle channel with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

RBW \geq OBW

RBW \geq VBW

Span = zero span

Detector = Peak

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100.

6.2 6 dB Bandwidth

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 11.8.2 Option 2
KDB 558074 D01 v05r02, Section 8.2

Test Procedure

- 6 dB Bandwidth (DTS Chanel Bandwidth)

EUTs 6 dB bandwidth is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

RBW = 100 kHz

VBW > 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow trace to fully stabilize.

The bandwidth measurement function on the spectrum analyzer is used to measure the 6 dB bandwidth.

6.3 Peak Output Power

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 11.9.1.1
KDB 558074 D01 v05r02, Section 8.3.1.1

Test Procedure

EUTs Maximum Peak Conducted Output Power is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

RBW \geq DTS bandwidth

VBW \geq 3 x RBW

Span \geq 3 x RBW

Sweep time = auto couple

Detector = peak

Trace mode = max hold

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

6.4 Power Spectral Density

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 11.10.2 Method PKPSD
KDB 558074 D01 v05r02, Section 8.4

Test Procedure

EUTs Power Spectral Density is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

Center frequency = DTS channel center frequency

Span = 1.5 times the DTS channel bandwidth

RBW \geq 3 kHz

VBW \geq 3 x RBW

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow the trace to stabilize.

The peak search function on the spectrum analyzer is used to determine the maximum amplitude level within the RBW.

6.5 Band Edge / Conducted Spurious Emissions

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 11.11.3
KDB 558074 D01 v05r02, Section 8.5, Section 8.7.2

Test Procedure

EUTs Conducted spurious emissions are measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

1) Reference Level

Center frequency = DTS channel center frequency

Span $\geq 1.5 \times$ DTS bandwidth

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

2) Unwanted Emissions

Set the center frequency and span to encompass frequency range to be measured.

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

6.6 Radiated Emissions

Test Measurement Method

ANSI C63.10-2013, Section 6.6.4.3, Section 11.11, Section 11.12
KDB 558074 D01 v05r02, Section 8.6, Section 8.7

Test Procedure

The measurement was performed at the test site that is specified in accordance with ANSI C63.10-2013. The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna and 30 to 1000 MHz using Trilog broadband test antenna. Above 1 GHz, Horn antenna was used. For emissions testing at below 1GHz, the test equipment was placed on turntable with 0.8 m above ground. For emission measurements above 1 GHz, the test equipment was placed on turntable with 1.5 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The final maximized level was recorded.

At frequencies below 1000 MHz, measurements performed using the CISPR quasi-peak detection. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in ANSI 63.10-2013 section 11.12. Peak emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Trace mode = max hold. Average emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 10 kHz, Detector = Peak, Trace mode = max hold. Allow max hold to run for at least 50 times (1/duty cycle) traces.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

Radiated Emissions Limits per 47 CFR 15.209(a)

6.7 AC Line Conducted Emissions

Test Measurement Method

ANSI C63.10-2013, Section 6.2

Test Procedure

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure. It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6. A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room. Rohde & Schwarz (ENV216) of the 50 ohm/50 μ H Line Impedance Stabilization Network (LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN. Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ". If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1 meter length. Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time. The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCI). The detector functions were set to CISPR quasi-peak mode & average mode. The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

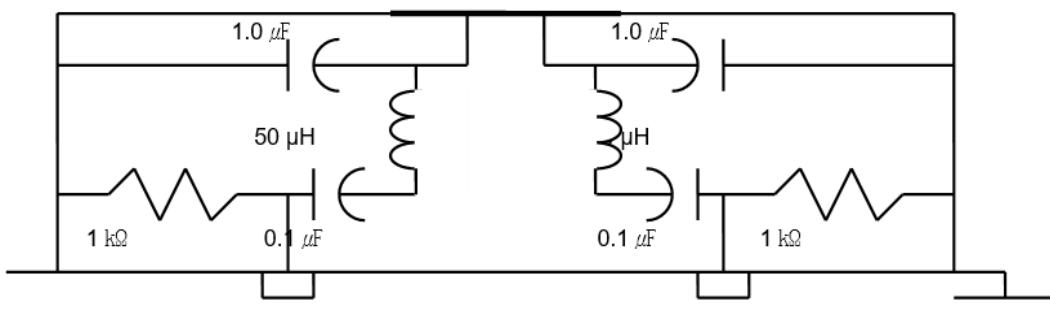


Fig. 2. LISN Schematic Diagram

7. TEST DATA

7.1 Duty Cycle

For reporting purposes only.

Result

- **Left**


Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum CBW [kHz]
BLE (500kbps)	1.072	1.875	0.572	57.16	2.43	0.93
BLE (2Mbps)	0.208	0.625	0.333	33.26	4.78	4.81

- **Right**


Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum CBW [kHz]
BLE (500kbps)	1.071	1.875	0.571	57.13	2.43	0.93
BLE (2Mbps)	0.208	0.625	0.332	33.23	4.78	4.81

PLOTS OF EMISSIONS

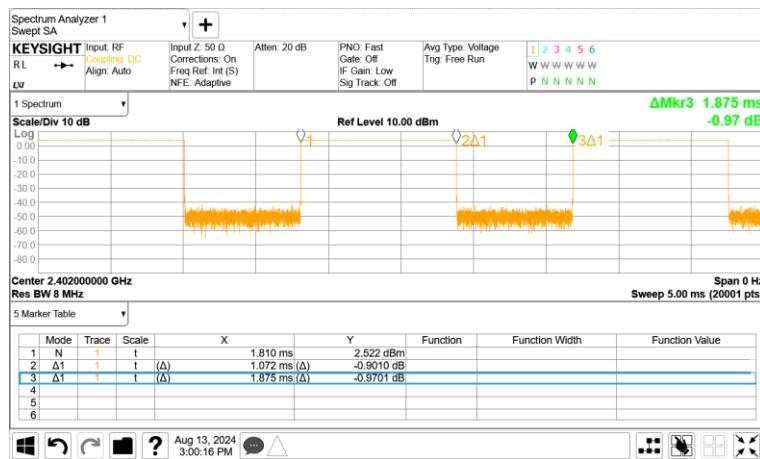
Left, Duty Cycle, BLE 500kbps, Lowest Channel (2 402 MHz)



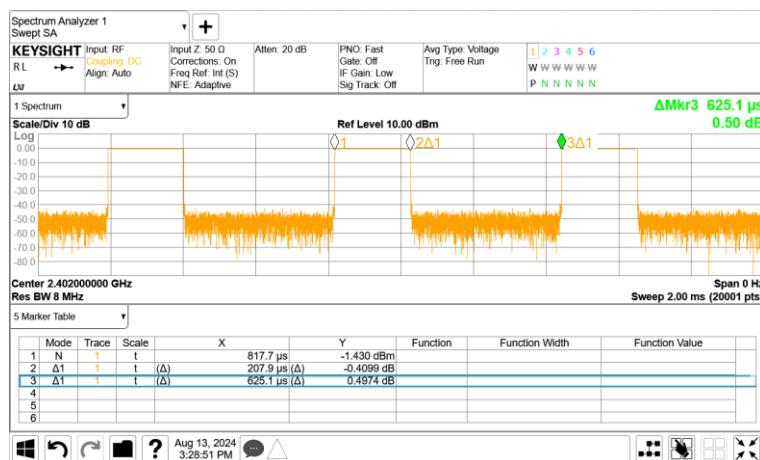Left, Duty Cycle, BLE 2Mbps, Lowest Channel (2 402 MHz)



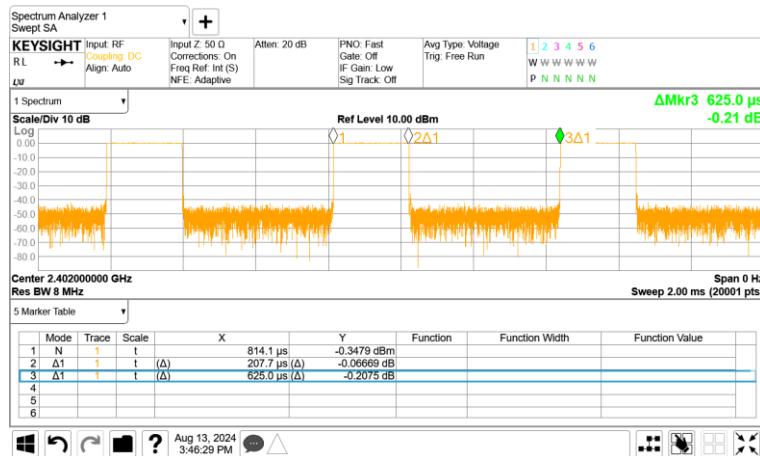Right, Duty Cycle, BLE 500kbps, Lowest Channel (2 402 MHz)

Right, Duty Cycle, BLE 2Mbps, Lowest Channel (2 402 MHz)


7.2 6 dB Bandwidth

FCC §15.247(a)(2)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

- Left_6 dB Bandwidth_BLE 500kbps

Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Bandwidth Limit (kHz)
LE 500kbps	0	2 402	0.659	500
	19	2 440	0.664	500
	39	2 480	0.662	500

- Left_6 dB Bandwidth_BLE 2Mbps

Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Bandwidth Limit (kHz)
LE 2Mbps	0	2 402	0.962	500
	19	2 440	1.115	500
	39	2 480	0.959	500

- Right_6 dB Bandwidth_BLE 2Mbps

Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Bandwidth Limit (kHz)
LE 500kbps	0	2 402	0.660	500
	19	2 440	0.654	500
	39	2 480	0.657	500

- Right_6 dB Bandwidth_BLE 2Mbps

Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Bandwidth Limit (kHz)
LE 2Mbps	0	2 402	1.102	500
	19	2 440	1.118	500
	39	2 480	0.966	500

PLOTS OF EMISSIONS

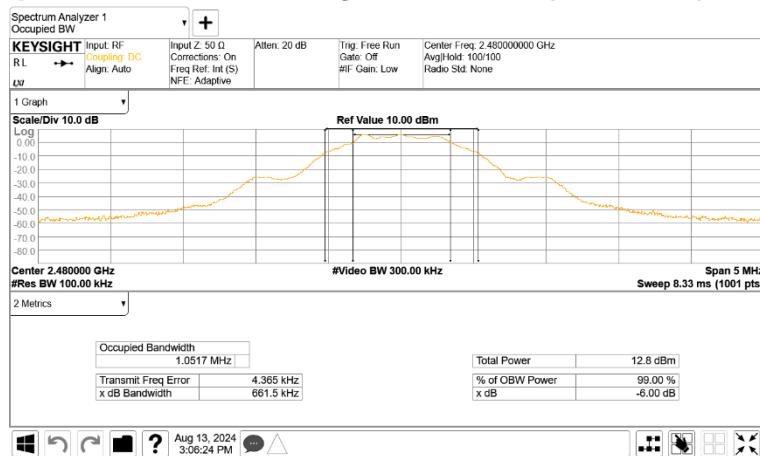
Left, LE 500kbps, 6 dB Bandwidth, Lowest Channel (2 402 MHz)

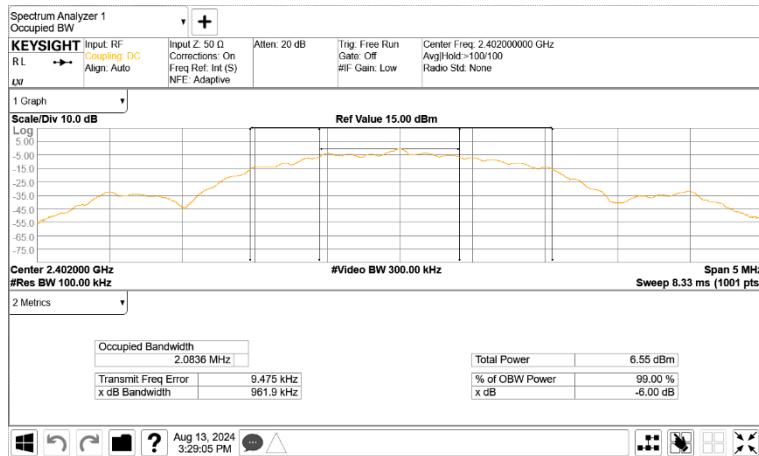
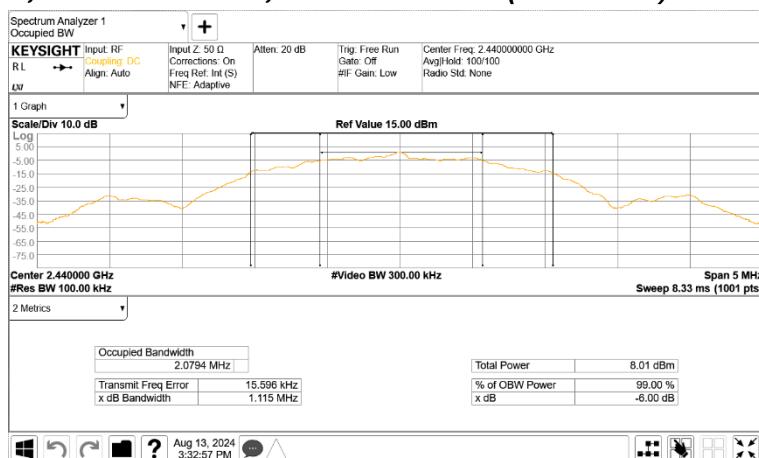
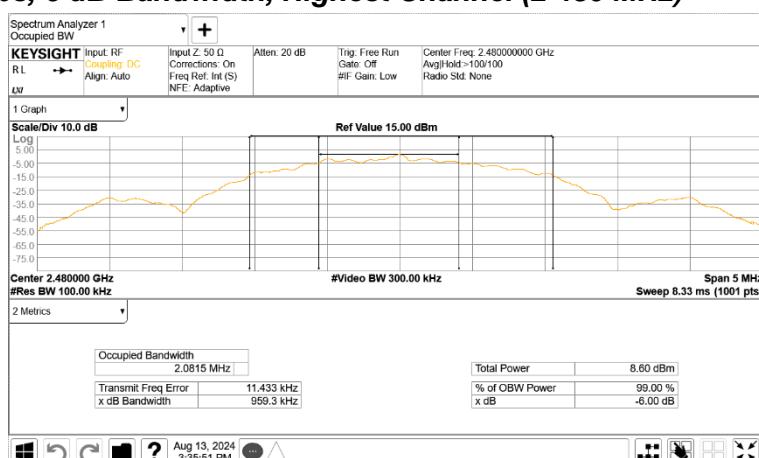


Left, LE 500kbps, 6 dB Bandwidth, Middle Channel (2 440 MHz)




Left, LE 500kbps, 6 dB Bandwidth, Highest Channel (2 480 MHz)



Left, LE 2Mbps, 6 dB Bandwidth, Lowest Channel (2 402 MHz)

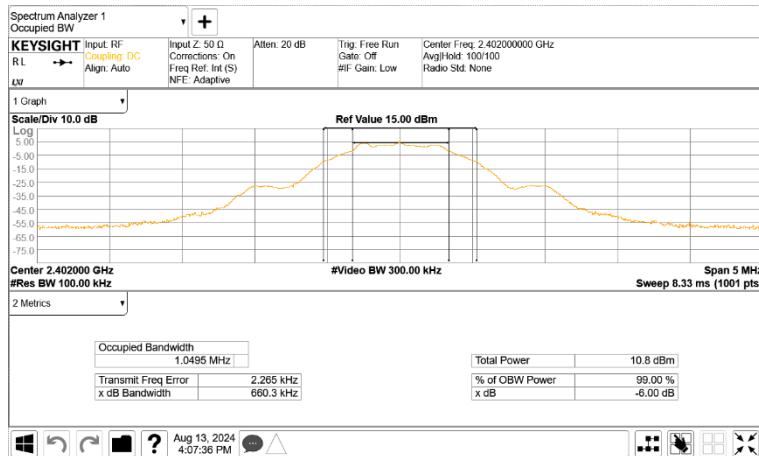Left, LE 2Mbps, 6 dB Bandwidth, Middle Channel (2 440 MHz)

Left, LE 2Mbps, 6 dB Bandwidth, Highest Channel (2 480 MHz)


Right, LE 500kbps, 6 dB Bandwidth, Lowest Channel (2 402 MHz)



Right, LE 500kbps, 6 dB Bandwidth, Middle Channel (2 440 MHz)



Right, LE 500kbps, 6 dB Bandwidth, Highest Channel (2 480 MHz)



Right, LE 2Mbps, 6 dB Bandwidth, Lowest Channel (2 402 MHz)



Right, LE 2Mbps, 6 dB Bandwidth, Middle Channel (2 440 MHz)



Right, LE 2Mbps, 6 dB Bandwidth, Highest Channel (2 480 MHz)



7.3 Peak Output Power

FCC §15.247(b)(3)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

- Left

Bluetooth Mode & Data Rate	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
LE 500kbps	2 402	4.39	30.00
	2 440	5.66	30.00
	2 480	6.33	30.00
LE 2Mbps	2 402	-0.21	30.00
	2 440	1.19	30.00
	2 480	1.78	30.00

- Right

Bluetooth Mode & Data Rate	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
LE 500kbps	2 402	4.33	30.00
	2 440	5.73	30.00
	2 480	6.41	30.00
LE 2Mbps	2 402	0.16	30.00
	2 440	1.58	30.00
	2 480	2.27	30.00

Notes:

1. The following equation was used for spectrum offset:

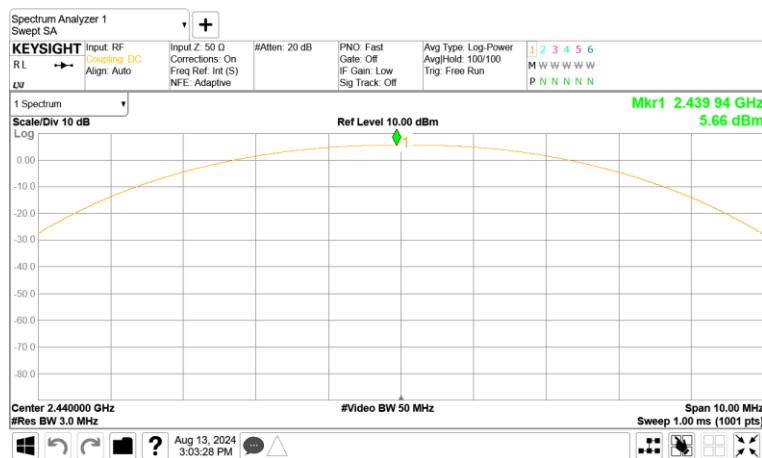
$$\text{Spectrum offset (dB)} = \text{Attenuator (dB)} + \text{Cable Loss (dB)} + \text{SMA Type Connector Loss (dB)}$$

PLOTS OF EMISSIONS

Left, LE 500kbps, Peak Output Power, Lowest Channel (2 402 MHz)



Left, LE 500kbps, Peak Output Power, Middle Channel (2 440 MHz)




Left, LE 500kbps, Peak Output Power, Highest Channel (2 480 MHz)




Left, LE 2Mbps, Peak Output Power, Lowest Channel (2 402 MHz)



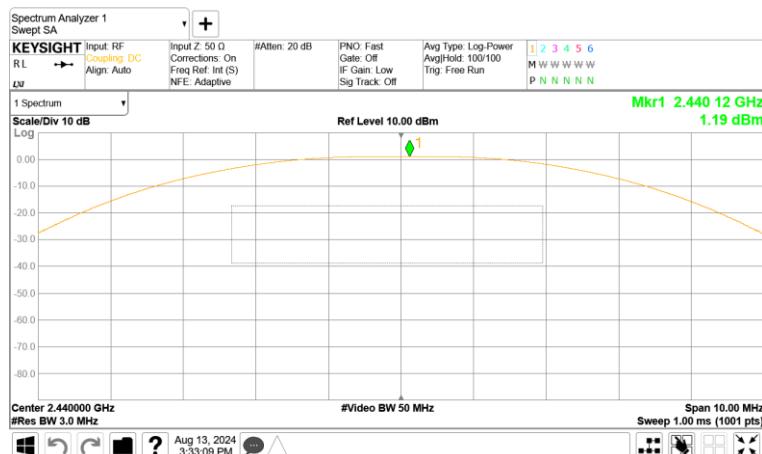
Left, LE 2Mbps, Peak Output Power, Middle Channel (2 440 MHz)






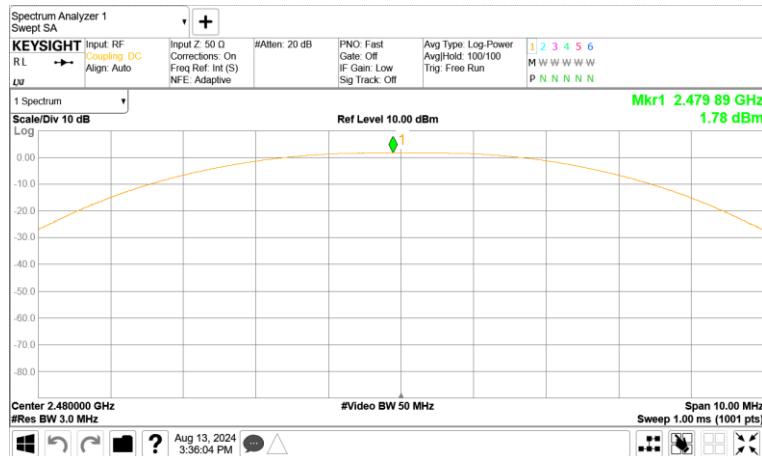Left, LE 2Mbps, Peak Output Power, Highest Channel (2 480 MHz)



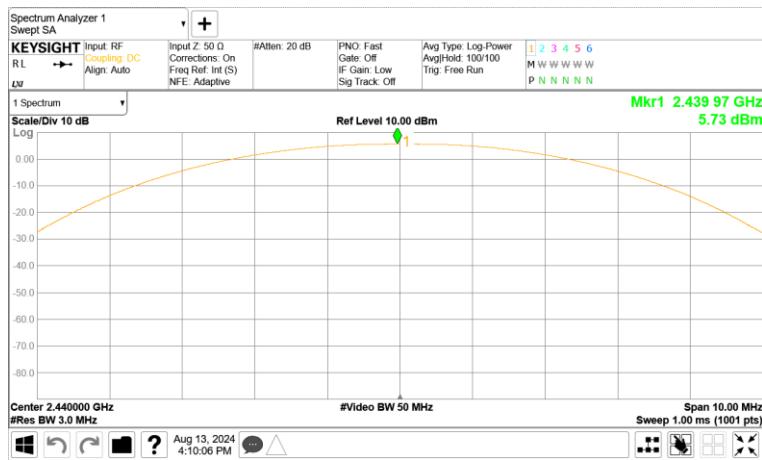Right, LE 500kbps, Peak Output Power, Lowest Channel (2 402 MHz)

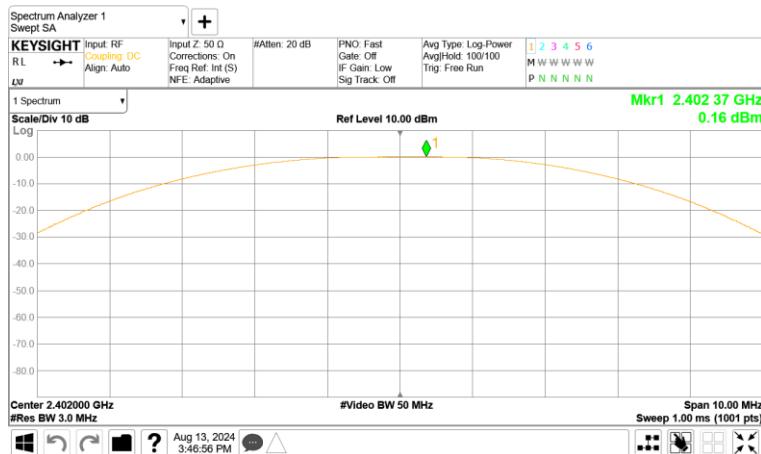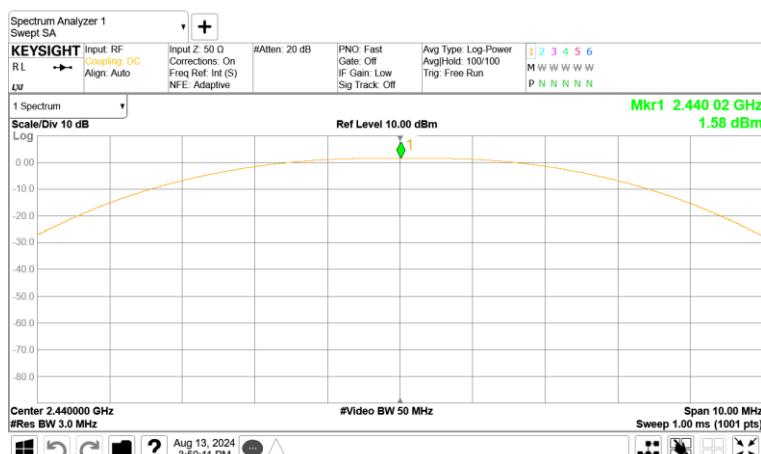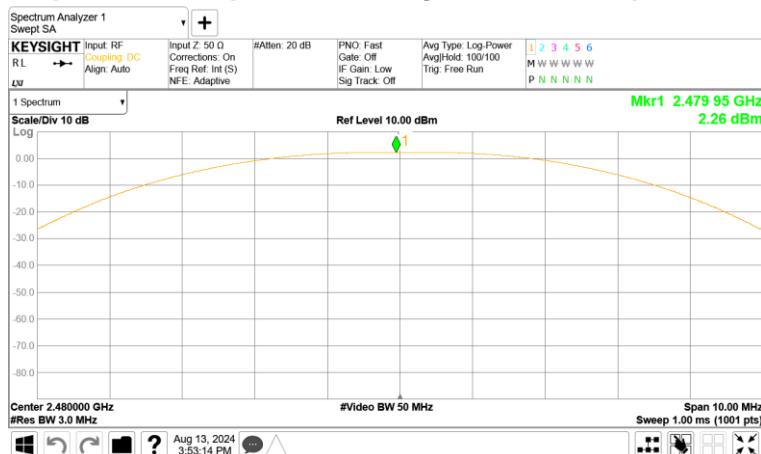Right, LE 500kbps, Peak Output Power, Middle Channel (2 440 MHz)

Right, LE 500kbps, Peak Output Power, Highest Channel (2 480 MHz)


Right, LE 2Mbps, Peak Output Power, Lowest Channel (2 402 MHz)

Right, LE 2Mbps, Peak Output Power, Middle Channel (2 440 MHz)

Right, LE 2Mbps, Peak Output Power, Highest Channel (2 480 MHz)


7.4 Power Spectral Density

FCC §15.247(e)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

- Left

Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	Measured PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Margin (dB)
LE 500kbps	0	2 402	-2.08	8.00	-10.08
	19	2 440	-0.82	8.00	-8.82
	39	2 480	-0.17	8.00	-8.17
LE 2Mbps	0	2 402	-17.24	8.00	-25.24
	19	2 440	-16.50	8.00	-24.50
	39	2 480	-15.68	8.00	-23.68

- Right

Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	Measured PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Margin (dB)
LE 500kbps	0	2 402	-2.11	8.00	-10.11
	19	2 440	-0.76	8.00	-8.76
	39	2 480	-0.08	8.00	-8.08
LE 2Mbps	0	2 402	-17.28	8.00	-25.28
	19	2 440	-15.43	8.00	-23.43
	39	2 480	-14.76	8.00	-22.76

Notes:

1. The following equation was used for spectrum offset:

Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)

PLOTS OF EMISSIONS

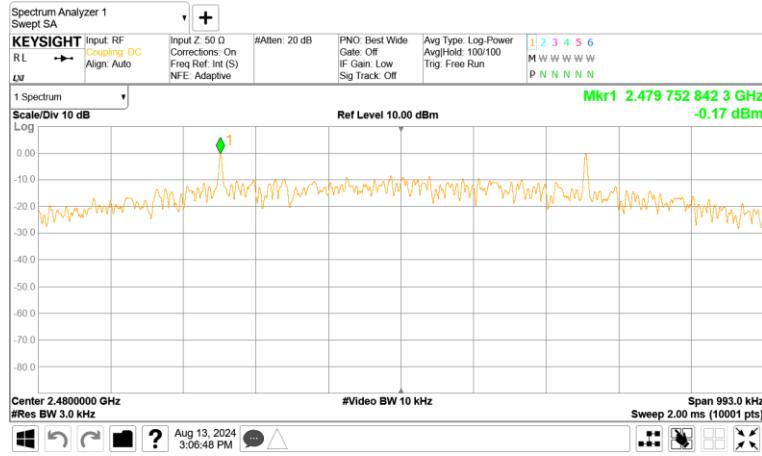
Left, LE 500kbps, Power Spectral Density, Lowest Channel (2 402 MHz)



Left, LE 500kbps, Power Spectral Density, Middle Channel (2 440 MHz)



Left, LE 500kbps, Power Spectral Density, Highest Channel (2 480 MHz)




Left, LE 2Mbps, Power Spectral Density, Lowest Channel (2 402 MHz)





Left, LE 2Mbps, Power Spectral Density, Middle Channel (2 440 MHz)



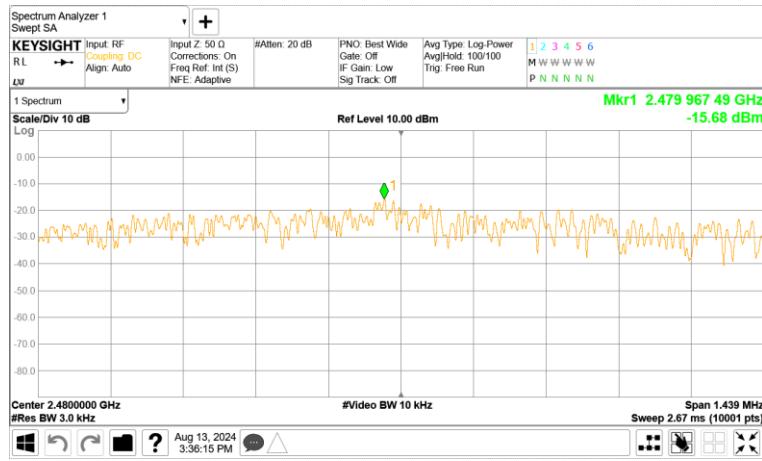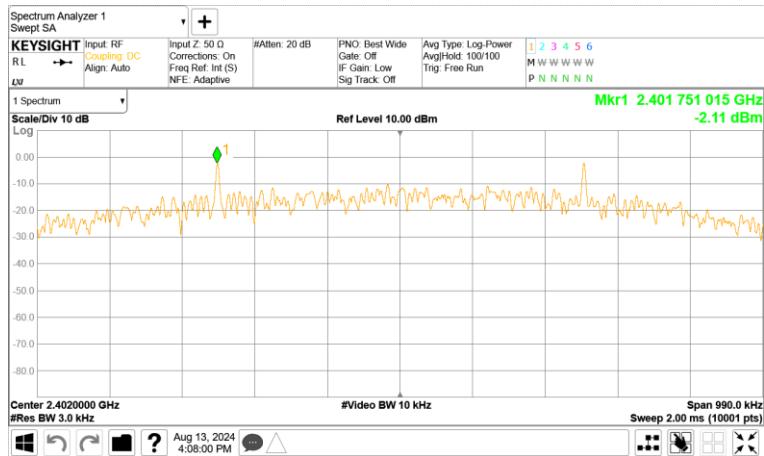Left, LE 2Mbps, Power Spectral Density, Highest Channel (2 480 MHz)



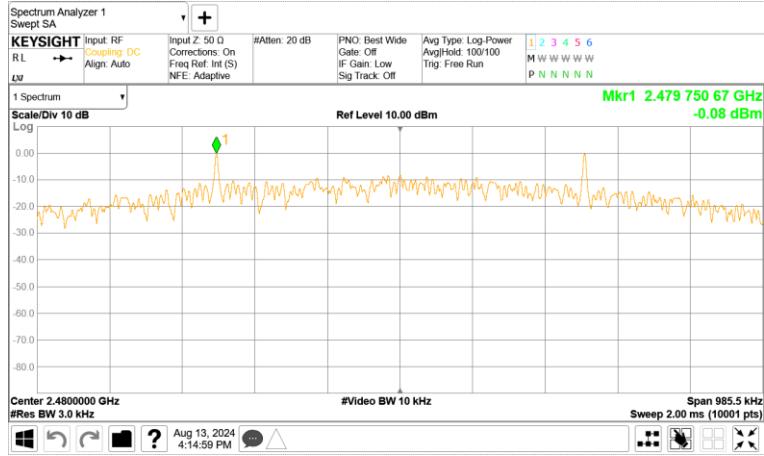Right, LE 500kbps, Power Spectral Density, Lowest Channel (2 402 MHz)

Right, LE 500kbps, Power Spectral Density, Middle Channel (2 440 MHz)

Right, LE 500kbps, Power Spectral Density, Highest Channel (2 480 MHz)


Right, LE 2Mbps, Power Spectral Density, Lowest Channel (2 402 MHz)

Right, LE 2Mbps, Power Spectral Density, Middle Channel (2 440 MHz)

Right, LE 2Mbps, Power Spectral Density, Highest Channel (2 480 MHz)


7.5 Band Edge / Conducted Spurious Emissions

FCC §15.247(d)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

- Left & Right


Bluetooth Mode & Data Rate	Channel No.	Frequency (MHz)	Conducted Spurious Emissions (dBc)	Limit (dBc)
LE 500kbps	0	2 402	More than 20 dBc	20
	19	2 440	More than 20 dBc	20
	39	2 480	More than 20 dBc	20
LE 2Mbps	0	2 402	More than 20 dBc	20
	19	2 440	More than 20 dBc	20
	39	2 480	More than 20 dBc	20

Notes:


The cable and attenuator loss from 30 MHz to 26.5 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.

PLOTS OF EMISSIONS (Band Edge)

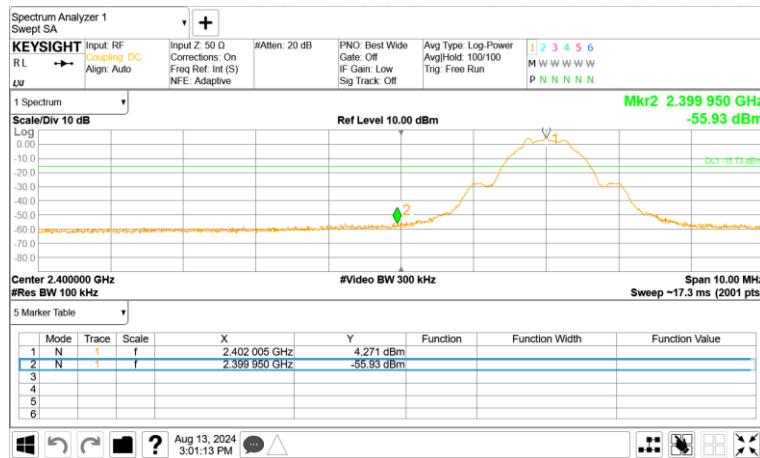
Left, LE 500kbps, Band Edge, Lowest Channel (2 402 MHz)




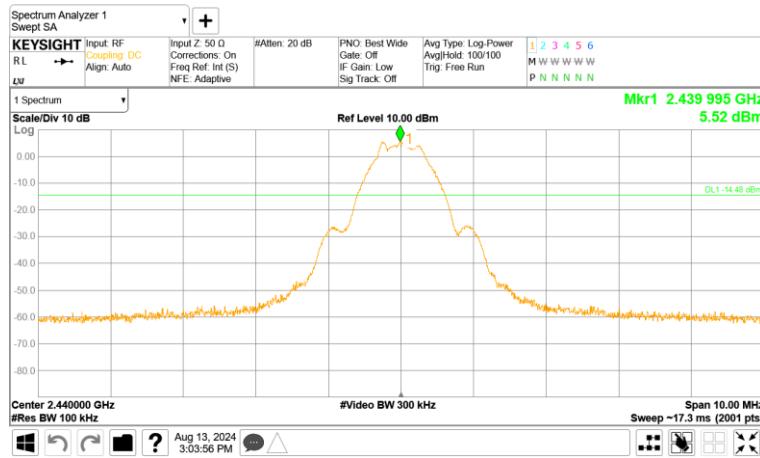Left, LE 500kbps, Reference Level, Middle Channel (2 440 MHz)





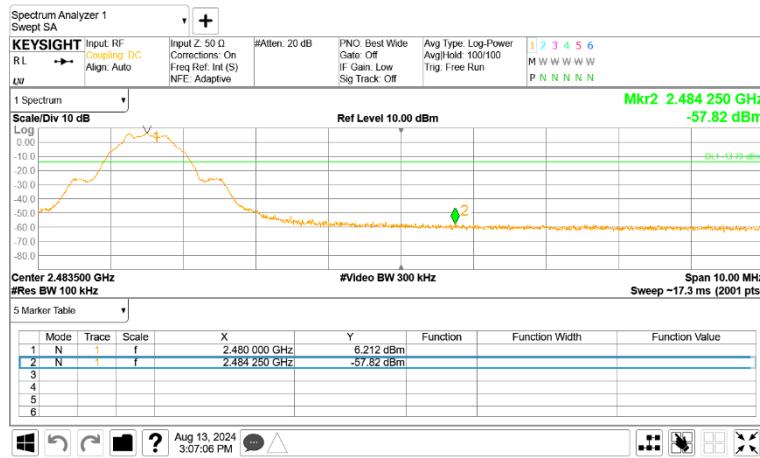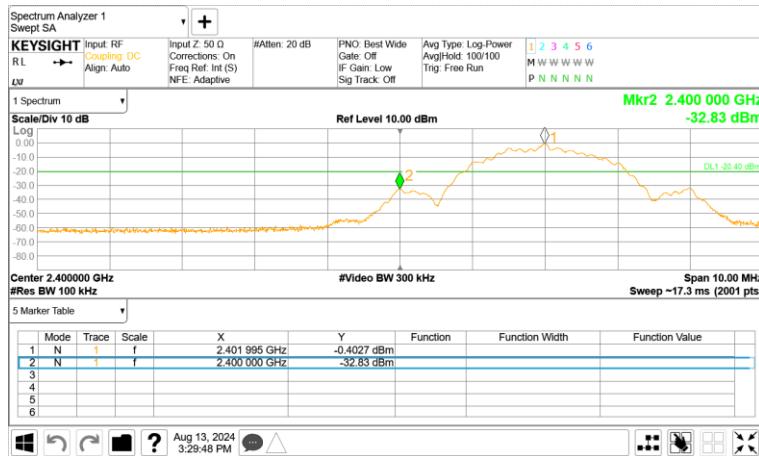Left, LE 500kbps, Band Edge, Highest Channel (2 480 MHz)




Left, LE 2Mbps, Band Edge, Lowest Channel (2 402 MHz)

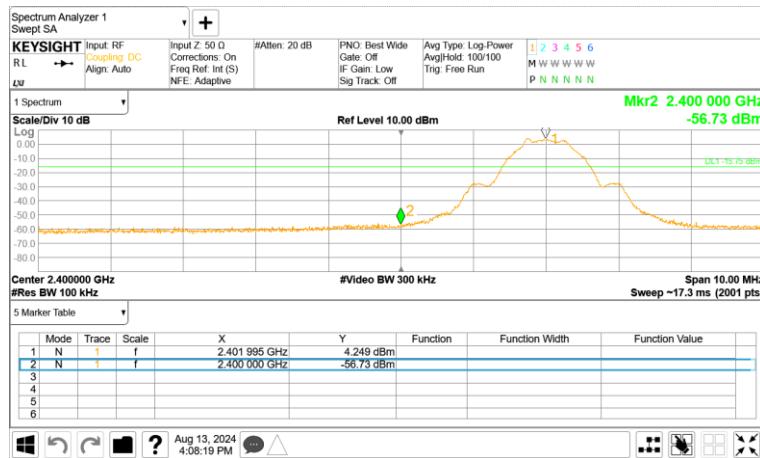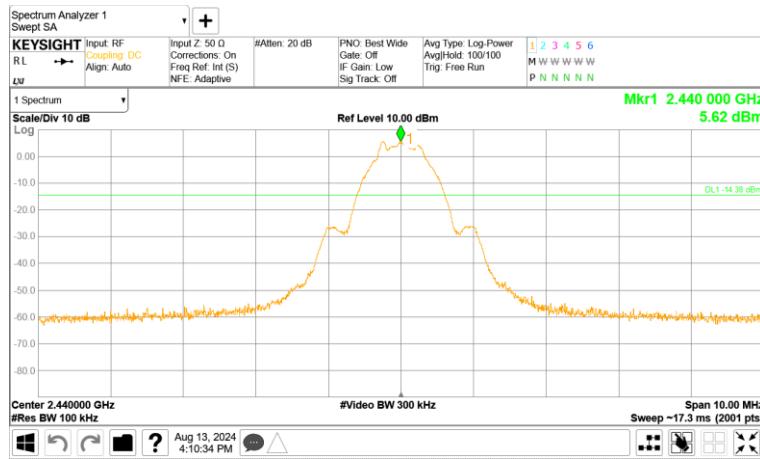Left, LE 2Mbps, Reference Level, Middle Channel (2 440 MHz)

Left, LE 2Mbps, Band Edge, Highest Channel (2 480 MHz)


Right, LE 500kbps, Band Edge, Lowest Channel (2 402 MHz)

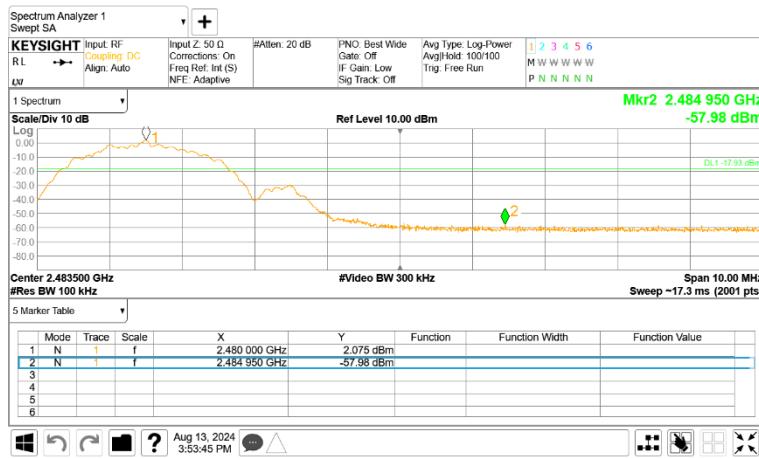Right, LE 500kbps, Reference Level, Middle Channel (2 440 MHz)

Right, LE 500kbps, Band Edge, Highest Channel (2 480 MHz)


Right, LE 2Mbps, Band Edge, Lowest Channel (2 402 MHz)

Right, LE 2Mbps, Reference Level, Middle Channel (2 440 MHz)

Right, LE 2Mbps, Band Edge, Highest Channel (2 480 MHz)


PLOTS OF EMISSIONS (Conducted Spurious Emissions)

Left, LE 500kbps, Conducted Spurious Emissions, Lowest Channel (2 402 MHz)



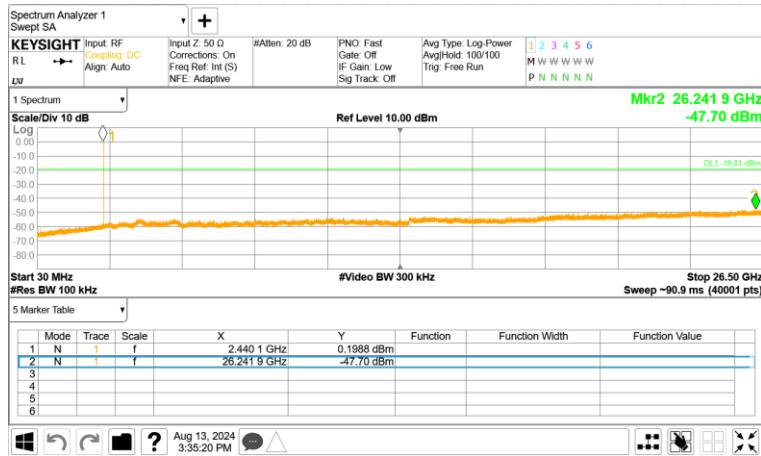
Left, LE 500kbps, Conducted Spurious Emissions, Middle Channel (2 440 MHz)



Left, LE 500kbps, Conducted Spurious Emissions, Highest Channel (2 480 MHz)




Left, LE 2Mbps, Conducted Spurious Emissions, Lowest Channel (2 402 MHz)

Left, LE 2Mbps, Conducted Spurious Emissions, Middle Channel (2 440 MHz)

Left, LE 2Mbps, Conducted Spurious Emissions, Highest Channel (2 480 MHz)

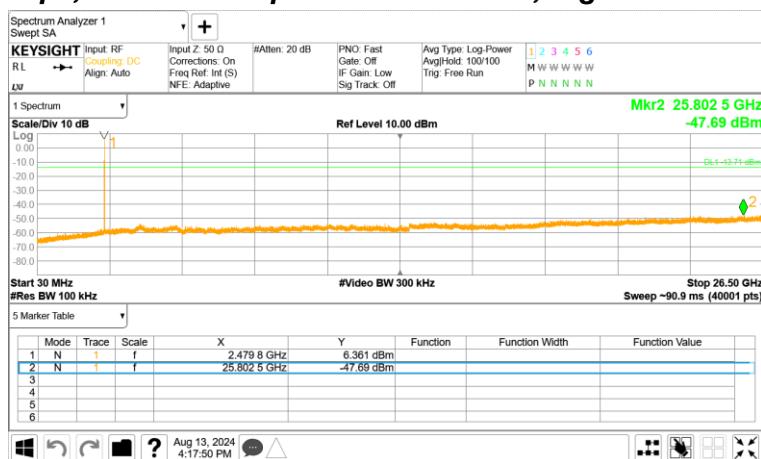

Right, LE 500kbps, Conducted Spurious Emissions, Lowest Channel (2 402 MHz)

Right, LE 500kbps, Conducted Spurious Emissions, Middle Channel (2 440 MHz)

Right, LE 500kbps, Conducted Spurious Emissions, Highest Channel (2 480 MHz)


Right, LE 2Mbps, Conducted Spurious Emissions, Lowest Channel (2 402 MHz)

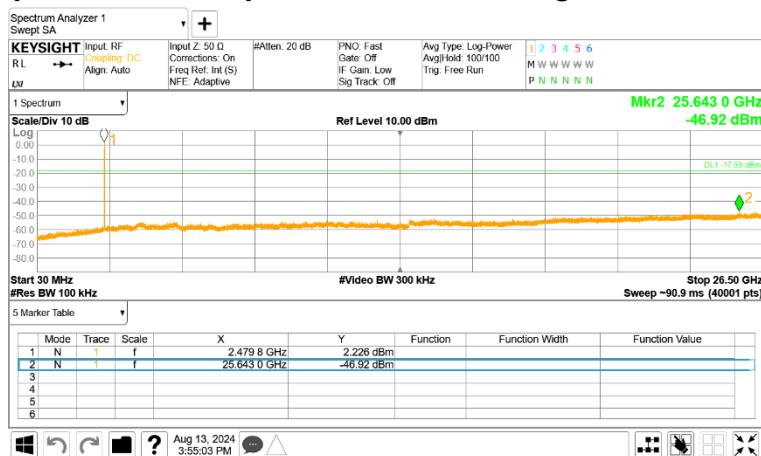Right, LE 2Mbps, Conducted Spurious Emissions, Middle Channel (2 440 MHz)

Right, LE 2Mbps, Conducted Spurious Emissions, Highest Channel (2 480 MHz)


7.6 Radiated Spurious Emissions

FCC §15.205, §15.209, §15.247(d)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

Left, LE 500kbps_Lowest channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 550.00	57.06	H	PK	-10.1	46.96	74.00	27.04
1 549.80	55.90	H	AV	-10.1	45.80	54.00	8.20
***6 405.47	44.37	H	PK	8.4	52.77	74.00	21.23
12 265.66	38.08	H	PK	19.1	57.18	74.00	16.82
11 906.09	26.26	H	AV	19.5	45.76	54.00	8.24

Left, LE 500kbps_Middle channel (2 440 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.87	57.09	H	PK	-10.1	46.99	74.00	27.01
1 549.87	57.09	H	AV	-10.1	46.99	54.00	7.01
***6 506.93	42.52	H	PK	8.8	51.32	74.00	22.68
11 942.89	37.64	H	PK	19.4	57.04	74.00	16.96
10 887.58	26.01	H	AV	19.6	45.61	54.00	8.39

Left, LE 500kbps_Highest channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.73	57.12	H	PK	-10.1	47.02	74.00	26.98
1 549.73	57.12	H	AV	-10.1	47.02	74.00	6.98
***6 613.60	42.51	H	PK	9.3	51.81	74.00	22.19
10 906.55	37.02	V	PK	19.5	56.52	74.00	17.48
11 583.52	26.16	V	AV	19.8	45.96	54.00	8.04

Left, LE 2Mbps_Lowest channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.93	57.00	H	PK	-10.1	46.90	74.00	27.10
1 549.80	55.79	H	AV	-10.1	45.69	54.00	8.31
***6 405.33	43.51	H	PK	8.4	51.91	74.00	22.09
12 675.63	36.71	H	PK	20.1	56.81	74.00	17.19
11 778.25	26.12	V	AV	19.4	45.52	54.00	8.48

Left, LE 2Mbps_Middle channel (2 440 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.67	57.37	H	PK	-10.1	47.27	74.00	26.73
1 549.67	57.37	H	AV	-10.1	47.27	54.00	6.73
***6 506.80	42.30	H	PK	8.8	51.10	74.00	22.90
11 353.52	36.78	V	PK	19.6	56.38	74.00	17.62
11 946.15	26.12	V	AV	19.4	45.52	54.00	8.48

Left, LE 2Mbps_Highest channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.87	56.98	H	PK	-10.1	46.88	74.00	27.12
1 549.87	56.98	H	AV	-10.1	46.88	54.00	7.12
***2 126.40	54.31	V	PK	-6.5	47.81	74.00	26.19
***6 616.53	41.92	H	PK	9.3	51.22	74.00	22.78
11 756.78	37.18	V	PK	19.4	56.58	74.00	17.42
10 927.06	26.31	H	AV	19.5	45.81	54.00	8.19

Right, LE 500kbps_Lowest channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
***4 360.93	51.37	H	PK	2.3	53.67	74.00	20.33
***5 539.33	48.07	H	PK	5.9	53.97	74.00	20.03
***6 405.07	44.47	H	PK	8.4	52.87	74.00	21.13
11 622.04	36.69	V	PK	19.8	56.49	74.00	17.51
11 371.73	25.86	V	AV	19.5	45.36	54.00	8.64

Right, LE 500kbps_Middle channel (2 440 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.93	56.32	H	PK	-10.1	46.22	74.00	27.78
1 549.93	54.92	H	AV	-10.1	44.82	54.00	9.18
***2 657.13	54.44	V	PK	-4.9	49.54	74.00	24.46
***6 506.80	47.37	H	PK	8.8	56.17	74.00	17.83
10 982.07	37.03	V	PK	19.3	56.33	74.00	17.67
10 826.82	25.94	H	AV	19.4	45.34	54.00	8.66

Right, LE 500kbps_Highest channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.87	57.08	H	PK	-10.1	46.98	74.00	27.02
1 549.80	54.70	H	AV	-10.1	44.60	54.00	9.40
5 091.33	55.36	V	PK	4.8	60.16	74.00	13.84
5 091.33	28.40	H	AV	4.8	33.20	54.00	20.80
12 267.58	37.98	H	PK	19.1	57.08	74.00	16.92
11 566.84	25.73	V	AV	19.8	45.53	54.00	8.47

Right, LE 2Mbps_Lowest channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 550.00	56.42	H	PK	-10.1	46.32	74.00	27.68
1 549.87	54.39	H	AV	-10.1	44.29	54.00	9.71
***6 405.33	44.61	H	PK	8.4	53.01	74.00	20.99
11 310.97	37.09	V	PK	19.6	56.69	74.00	17.31
10 873.58	27.34	H	AV	19.6	46.94	54.00	7.06

Right, LE 2Mbps_Middle channel (2 440 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.87	56.47	H	PK	-10.1	46.37	74.00	27.63
1 549.80	54.67	H	AV	-10.1	44.57	54.00	9.43
***6 209.20	45.44	H	PK	7.5	52.94	74.00	21.06
11 039.76	37.05	H	PK	19.3	56.35	74.00	17.65
10 882.59	26.03	V	AV	19.6	45.63	54.00	8.37

Right, LE 2Mbps_Highest channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 549.80	56.02	H	PK	-10.1	45.92	74.00	28.08
1 549.80	54.60	H	AV	-10.1	44.50	54.00	9.50
***6 206.40	44.43	H	PK	7.5	51.93	74.00	22.07
***6 613.20	45.19	H	PK	9.3	54.49	74.00	19.51
10 894.67	38.22	V	PK	19.5	57.72	74.00	16.28
10 888.53	25.92	H	AV	19.6	45.52	54.00	8.49

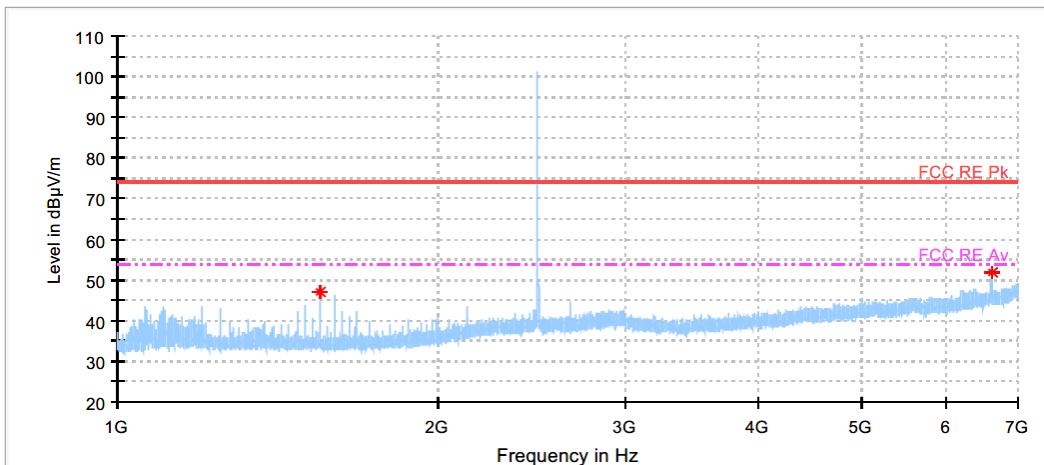
Notes:

1. *Pol. : H = Horizontal, V = Vertical, Mode : PK = Peak, AV = Average
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Average measurement was not performed when peak-detected emission complies with the average limit.
4. Other spurious was under 20 dB below Fundamental. (**Non-restricted band)
5. BLE 500kbps(Left) highest channel and BLE 2Mbps(Right) lowest channel were the worst condition.
6. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization.
7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
8. Average emissions were measured using RBW = 1 MHz, VBW = 10 kHz, Detector = Peak.
9. The spectrum was measured from 1 GHz to 10th harmonic and the worst-case emissions were reported.


PLOTS OF EMISSIONS

Worst Case


Left, BLE 500kbps, Highest Channel (2 480 MHz) : 1 GHz to 7 GHz_Peak






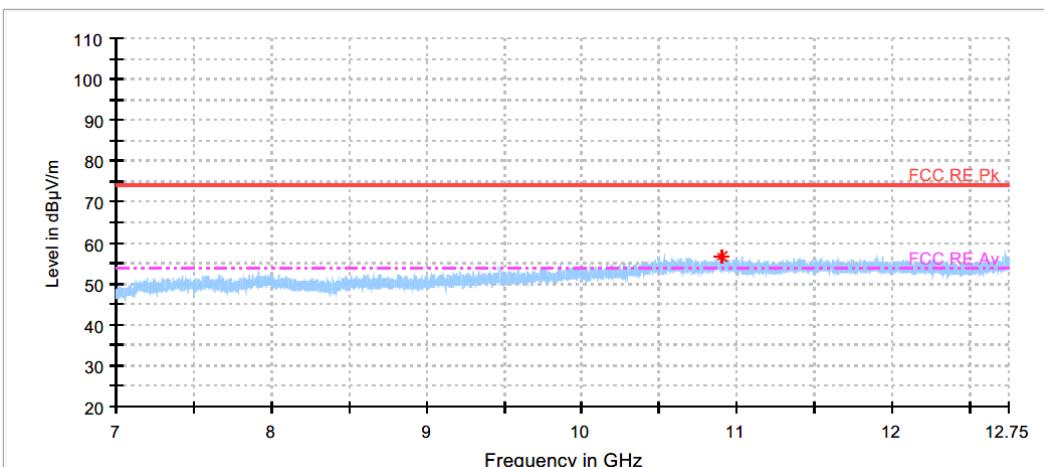
Left, BLE 500kbps, Highest Channel (2 480 MHz) : 7 GHz to 12.75 GHz_Peak



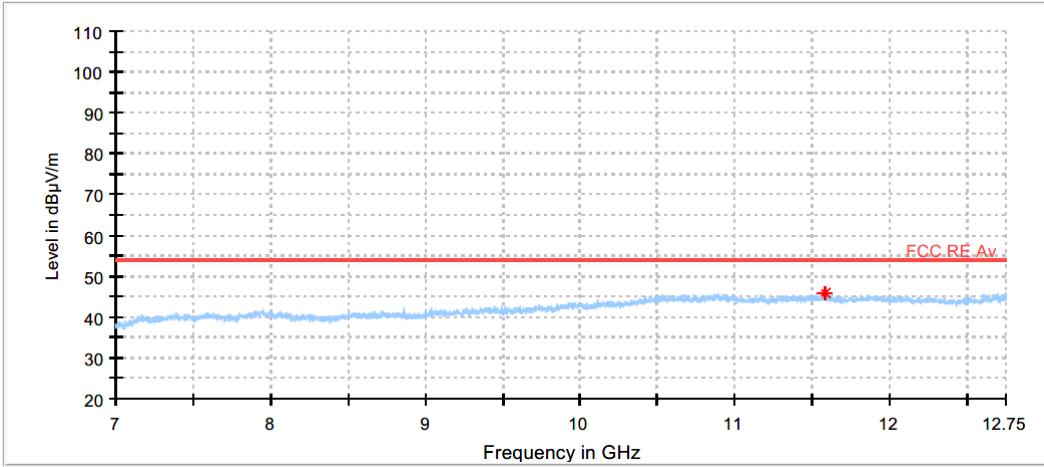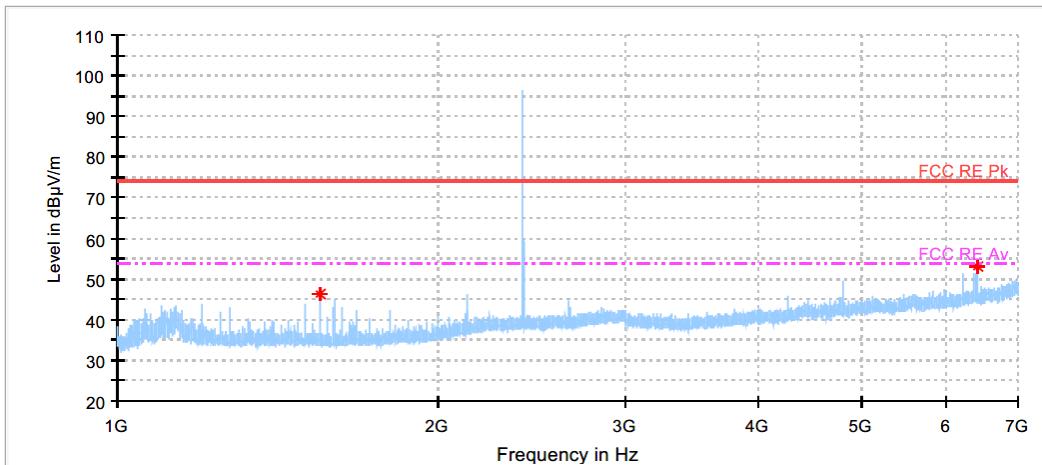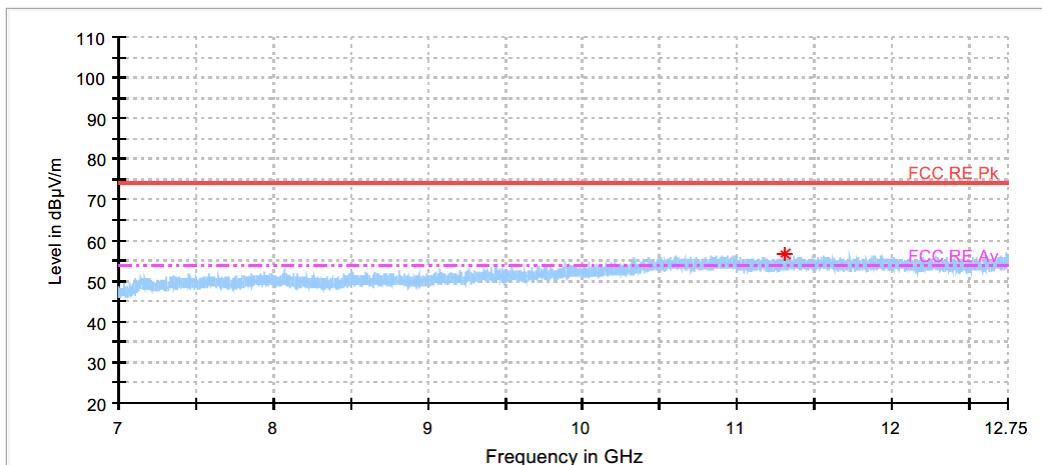Left, BLE 500kbps, Highest Channel (2 480 MHz) : 7 GHz to 12.75 GHz_Average



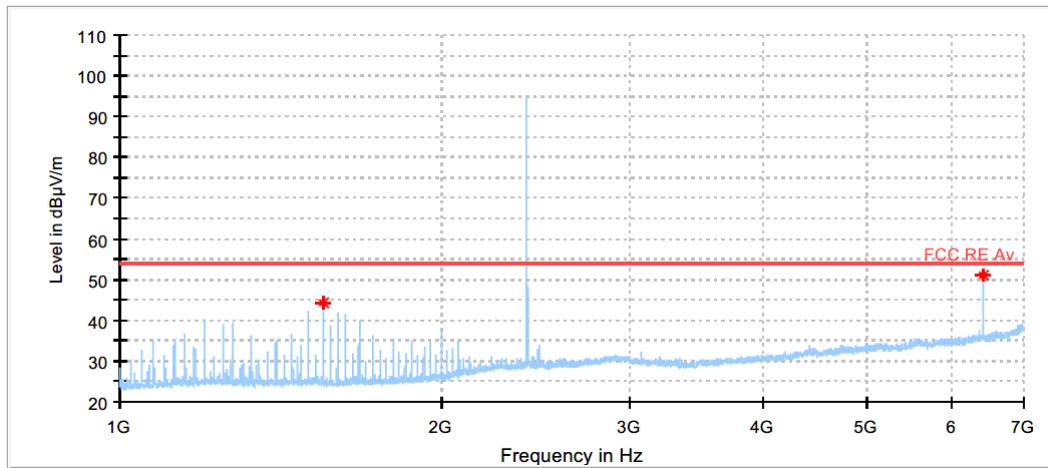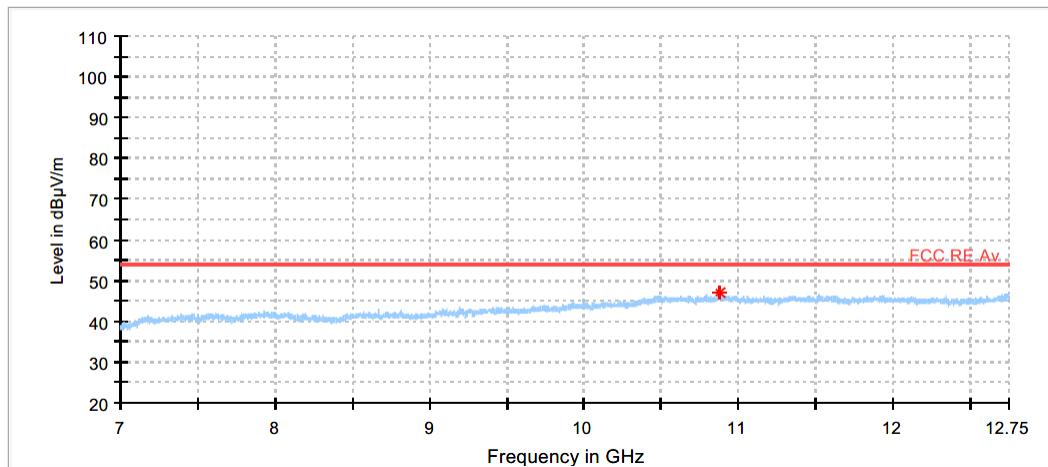Right, BLE 2Mbps, Lowest Channel (2 402 MHz) : 1 GHz to 7 GHz_Peak**Right, BLE 2Mbps, Lowest Channel (2 402 MHz) : 7 GHz to 12.75 GHz_Peak**

Right, BLE 2Mbps, Lowest Channel (2 402 MHz) : 1 GHz to 7 GHz_Average**Right, BLE 2Mbps, Lowest Channel (2 402 MHz) : 7 GHz to 12.75 GHz_Average****Notes:**

1. Emission was scanned up to 26 GHz.
 - No emissions were detected.

7.7 Radiated Band Edge

FCC §15.205, §15.209

Test Mode : Set to Lowest channel and Highest channel

Result

Left, BLE 500kbps, Lowest Channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 382.28	46.90	H	PK	-5.4	41.50	74.00	32.50
2 382.28	46.90	H	AV	-5.4	41.50	54.00	12.50
2 390.00	43.16	V	PK	-5.4	37.76	74.00	36.24
2 390.00	43.16	V	AV	-5.4	37.76	54.00	16.24

Left, BLE 500kbps, Highest Channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.50	46.33	H	PK	-5.3	41.03	74.00	32.97
2 483.50	46.33	H	AV	-5.3	41.03	54.00	12.97
2 483.75	50.09	H	PK	-5.3	44.79	74.00	29.21
2 483.75	50.09	H	AV	-5.3	44.79	54.00	9.21

Left, BLE 2Mbps, Lowest Channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 349.85	46.46	V	PK	-5.5	40.96	74.00	33.04
2 349.85	46.46	V	AV	-5.5	40.96	54.00	13.04
2 390.00	43.85	H	PK	-5.4	38.45	74.00	35.55
2 390.00	43.85	H	AV	-5.4	38.45	54.00	15.55

Left, BLE 2Mbps, Highest Channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.50	45.76	H	PK	-5.3	40.46	74.00	33.54
2 483.50	45.76	H	AV	-5.3	40.46	54.00	13.54
2 484.47	48.50	H	PK	-5.3	43.20	74.00	30.80
2 484.47	48.50	H	AV	-5.3	43.20	54.00	10.80

Right, BLE 500kbps, Lowest Channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 385.53	47.51	H	PK	-5.4	42.11	74.00	31.89
2 385.53	47.51	H	AV	-5.4	42.11	54.00	11.89
2 390.00	43.70	H	PK	-5.4	38.30	74.00	35.70
2 390.00	43.70	H	AV	-5.4	38.30	54.00	15.70

Right, BLE 500kbps, Highest Channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.50	48.02	H	PK	-5.3	42.72	74.00	31.28
2 483.50	48.02	H	AV	-5.3	42.72	54.00	11.28
2 484.18	50.27	H	PK	-5.3	44.97	74.00	29.03
2 484.18	50.27	H	AV	-5.3	44.97	54.00	9.03

Right, BLE 2Mbps, Lowest Channel (2 402 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 350.75	47.21	V	PK	-5.5	41.71	74.00	32.29
2 350.75	47.21	V	AV	-5.5	41.71	54.00	12.29
2 390.00	43.61	H	PK	-5.4	38.21	74.00	35.79
2 390.00	43.61	H	AV	-5.4	38.21	54.00	15.79

Right, BLE 2Mbps, Highest Channel (2 480 MHz)

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	Mode*	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.50	50.08	H	PK	-5.3	44.78	74.00	29.22
2 483.50	50.08	H	AV	-5.3	44.78	54.00	9.22
2 487.01	49.02	H	PK	-5.3	43.72	74.00	30.28
2 487.01	49.02	H	AV	-5.3	43.72	54.00	10.28

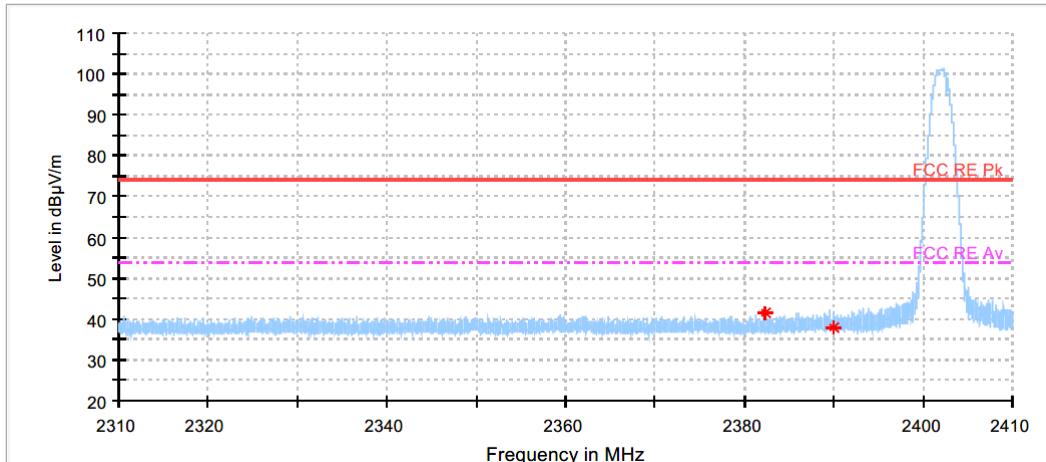
Notes:

- *Pol. : H = Horizontal, V = Vertical, Mode : PK = Peak, AV = Average
- **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- Average measurement was not performed when peak-detected emission complies with the average limit.
- Other spurious was under 20 dB below Fundamental.
- BLE 500kbps(Left) and BLE 500kbps(Right) were the worst condition.
- The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization.
- Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.


PLOTS OF EMISSIONS



Worst Case

Left, BLE 500kbps, Lowest Channel (2 402 MHz)_Peak



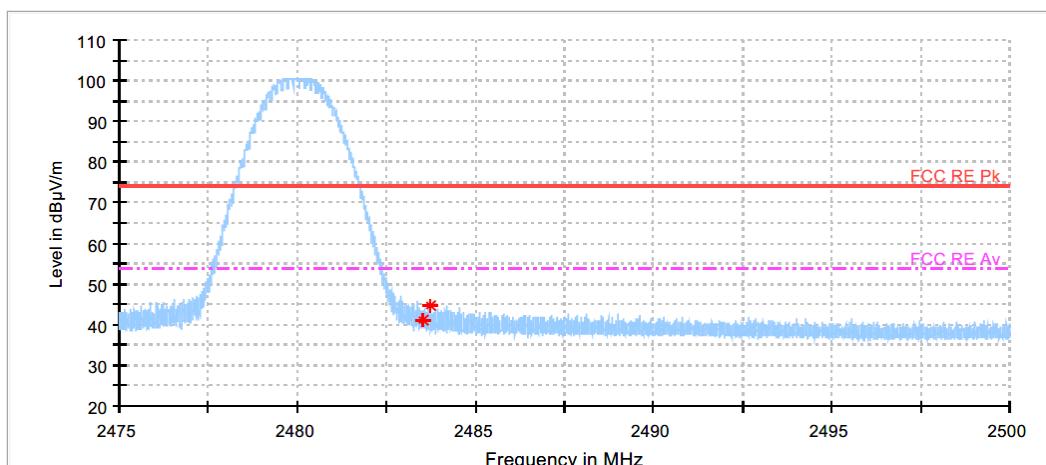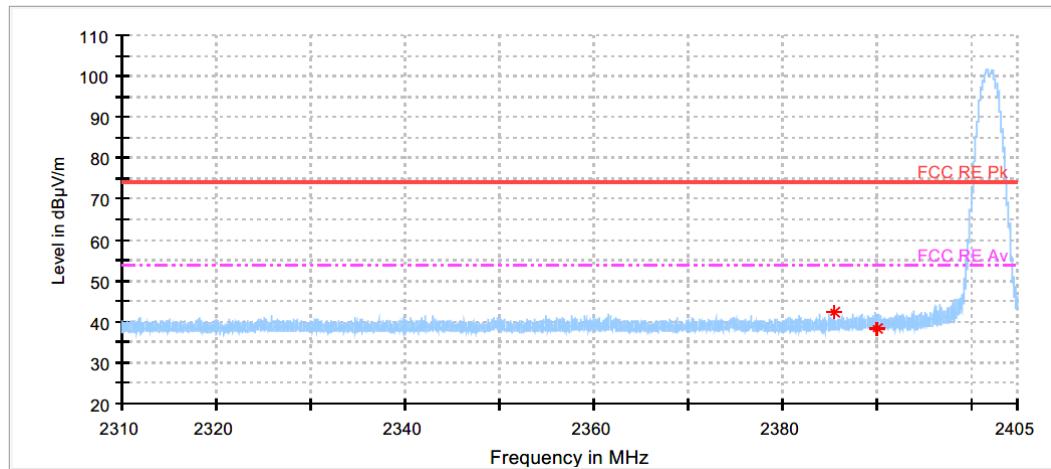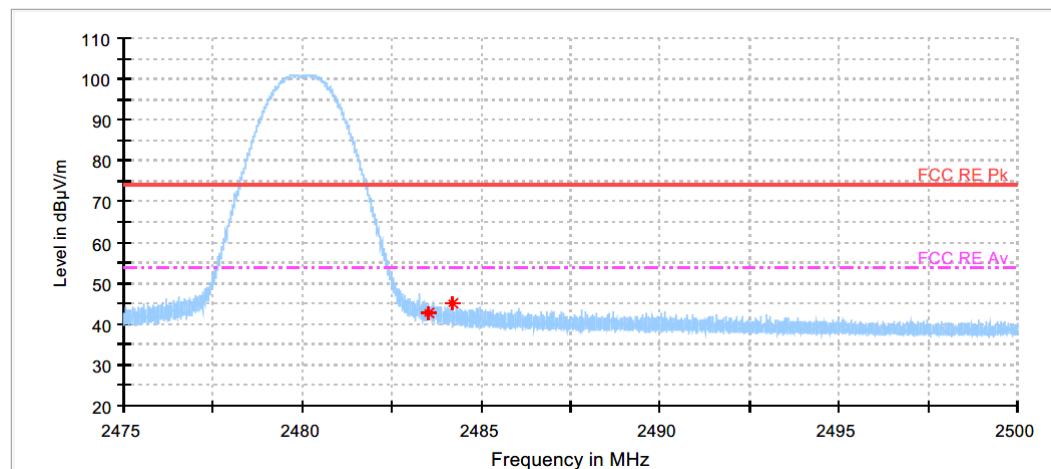Left, BLE 500kbps, Highest Channel (2 480 MHz)_Peak



Right, BLE 500kbps, Lowest Channel (2 402 MHz)_Peak**Right, BLE 500kbps, Highest Channel (2 480 MHz)_Peak**

7.8 Radiated Emissions_Below 1GHz**FCC §15.209****Result****Note : Please refer to the FCC Report Bluetooth (Report No.: REP055825-1)**

7.9 AC Line Conducted Emissions

FCC §15.207

Result : N/P

Note : The AC power line test was not performed because the EUT does not operate Bluetooth mode while charging.

8. TEST EQUIPMENT

No.	Instrument	Manufacture	Model	Serial No.	Calibration Date	Next Calibration Date
1	DIGITAL MULTIMETER	EZ DIGITAL	DM-334	2111395	2023-10-11	2024-10-11
2	Humidity Temperature Recoder	Lutron	MHB-382SD	AK.26553	2023-10-18	2024-10-18
3	Signal & Spectrum Analyzer	KEYSIGHT	N9030B	MY57144248	2024-03-27	2025-03-27
4	10 dB Attenuator	API technologies corp	40A2W-10	1914	2024-07-03	2025-07-03
5	System DC Power Supply	H.P	6574A	US36340190	2024-07-02	2025-07-02
6	Signal Generator	R&S	SMB100A	175861	2024-03-29	2025-03-29
7	Vector Signal Generator	R&S	SMBV100A	257152	2023-10-11	2024-10-11
8	Signal & Spectrum Analyzer	R&S	FSW43	104084	2024-03-27	2025-03-27
9	EMI TEST RECEIVER	R&S	ESR7	102802	2024-01-08	2025-01-08
10	TRILOG Broadband Test Antenna	Schwarzbeck	VULB 9163	01432	2023-06-16	2025-06-16
11	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-508	2024-07-09	2025-07-09
12	Horn Antenna	Q-par Angus	QSH20S20	8179	2024-07-09	2025-07-09
13	Horn Antenna	Q-par Angus	QSH22K20	8180	2024-07-09	2025-07-09
14	AMPLIFIER	Sonoma Instrument	315	420127	2024-07-02	2025-07-02
15	Signal Conditioning Unit	R&S	SCU-18F	180025	2024-03-27	2025-03-27
16	Signal Conditioning Unit	R&S	SCU-26	10011	2024-07-05	2025-07-05
17	WiFi Filter Bank	R&S	U083	N/A	N/A	N/A
18	High Pass Filter	R&S	HPF 1.2G	N/A	2024-03-27	2025-03-27
19	EMI TEST RECEIVER	R&S	ESW44	103318	2024-01-08	2025-01-08
20	AMPLIFIER	H.P	8447F	2805A03406	2024-01-09	2025-01-09
21	Active Loop Antenna	R&S	HFH2-Z2E	101190	2024-01-11	2025-01-11
22	BIAS UNIT	R&S	IN 600	101621	N/A	N/A

9. ACCURACY OF MEASUREMENT & DECISION RULE

9.1 Uncertainty Calculation

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

PARAMETER	UNCERTAINTY
Radiated Disturbance, Below 30 MHz	4.5 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.4 dB
Radiated Disturbance, 1 GHz to 18 GHz	3.7 dB
Radiated Disturbance, 18 GHz to 26.5 GHz	4.9 dB

9.2 Decision rule

The choice of whether or not to include the measurement uncertainty of the measuring system used in the test in the conformance determination.:

- Application of internal procedures used in type testing where traceability of measurement uncertainty is established.
- Applying the decision that the standard used for type testing does not require it.

END REPORT