

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 1 of 80

Applicant : Shanghai BroadMobi Communication Technology Co., Ltd.
Address of Applicant : 15F, Building 9, No.99 Tianzhou Rd.,Xuhui District,
Shanghai, P.R.China

Product Name : LTE Desk Router
Model No. : R520
: E20120008-01#01
Sample No. : E20120008-01#03
: E20120008-01#05
FCC ID : 2AON8R520

Standards : FCC CFR47 Part 2
(Others refer to chapter 1.4)

Date of Receipt : 2020-12-17
Date of Test : 2020-12-17 ~ 2021-01-15
Date of Issue : 2021-01-15

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Jennifer Zhou
(Jennifer Zhou)

Reviewed by: Oliver Xiang
(Oliver Xiang)

Approved by: Guoyou Chi
(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 2 of 80

Revision Record			
Version	Date	Revisions	Revised By
1.0	2019-10-31	Original	--

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 3 of 80

Contents

1	GENERAL INFORMATION	5
1.1	TESTING LABORATORY	5
1.2	DETAILS OF APPLICATION	5
1.3	DETAILS OF EUT	5
1.4	TEST METHODOLOGY	6
1.5	TEST VERDICT	7
2	TEST CONDITION	9
2.1	ENVIRONMENTAL CONDITIONS	9
2.2	TEST ENVIRONMENTS	9
2.3	EQUIPMENT LIST	9
3	TEST SET-UP AND OPERATION MODES	10
3.1	DETAILS OF TEST MODE	10
3.2	TEST SETUP DIAGRAM	13
4	TEST ITEMS.....	16
4.1	TRANSMITTER RADIATED POWER (EIRP/ERP)	16
4.1.1	Limit.....	16
4.1.2	Test Procedures.....	16
4.1.3	Test Result.....	17
4.2	PEAK-TO-AVERAGE RATIO	18
4.2.1	Limit.....	18
4.2.2	Test Procedures.....	18
4.2.3	Test Result.....	18
4.3	OCCUPIED BANDWIDTH.....	19
4.3.1	Limit.....	19
4.3.2	Test Procedures.....	19
4.3.3	Test Result.....	19
4.4	FREQUENCY STABILITY	20
4.4.1	Limit.....	20
4.4.2	Test Procedures.....	21
4.4.3	Test Result.....	21
4.5	SPURIOUS EMISSION AT ANTENNA TERMINALS.....	22
4.5.1	Limit.....	22
4.5.2	Test Procedures.....	23
4.5.3	Test Result.....	24
4.6	BAND EDGE	25
4.6.1	Limit.....	25
4.6.2	Test Procedures.....	26

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 4 of 80

4.6.3	Test Result.....	27
4.7	FIELD STRENGTH OF SPURIOUS RADIATION.....	28
4.7.1	Limit.....	28
4.7.2	Test Procedures.....	29
4.7.3	Test Result.....	30
4.8	AC POWER-LINE CONDUCTED EMISSIONS.....	31
4.8.1	Limit.....	31
4.8.2	Test Procedures.....	31
4.8.3	Test Result.....	31
5	TEST RESULTS.....	32
5.1.1	Transmitter Radiated Power (EIRP/ERP).....	32
5.1.2	Peak to Average Ratio	49
5.1.3	Occupied Bandwidth.....	52
5.1.4	Frequency Stability	57
5.1.5	Spurious Emission at Antenna Terminals	62
5.1.6	Band Edge	67
5.1.7	Field Strength of Spurious Radiation	73
5.1.8	AC Power-line Conducted Emissions	74
6	PHOTOS	77
6.1	PHOTOGRAPHS OF THE SAMPLE.....	77
6.2	SET-UP FOR CONDUCTED EMISSIONS	79
6.3	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	79
6.4	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ.....	80
6.5	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ.....	80

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 5 of 80

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298 Pingan Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Company Name	Shanghai BroadMobi Communication Technology Co., Ltd.
Address	15F, Building 9, No.99 Tianzhou Rd.,Xuhui District, Shanghai, P.R.China
Contact Person	Jiang Tao
Telephone	60913308-825
Email	jiangtao@broadmobi.com

1.3 Details of EUT

Product Name	LTE Desk Router
Brand Name	Broadmobi
Model No.	R520
FCC ID	2AON8R520
Mode of Operation	WCDMA Band II/IV/V; LTE FDD Band 2/4/5/7; LTE TDD Band 41;
Modulation Type	QPSK for WCDMA; QPSK/16QAM for HSDPA/HSUPA/LTE;
Power Class	WCDMA/HSDPA/HSUPA Band II: 3 WCDMA/HSDPA/HSUPA Band IV: 3 WCDMA/HSDPA/HSUPA Band V: 3 LTE FDD Band 2: 3 LTE FDD Band 4: 3 LTE FDD Band 5: 3 LTE FDD Band 7: 3 LTE TDD Band 41: 3
Antenna Type	Internal Antenna
Antenna Gain	Peak gain3.0dBi
Extreme Temperature Range	0℃~ +40℃
Hardware version	V2.0
Software version	1.0
Test SW Version	BL410_R;BL410_E

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 6 of 80

1.4 Test Methodology

47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22 Subpart H	Public Mobile Services
47 CFR Part 24 Subpart E	Personal Communications Services
47 CFR Part 27	Miscellaneous Wireless Communications Services
ANSI/TIA-603-E 2016	March Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26:2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 971168 D01 v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 7 of 80

1.5 Test Verdict

No.	FCC Part No.	ISED Part No.	Description	Test Result	Verdict
1	2.1046	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Conducted RF Output Power	Reporting Only Clause 5.1.1	PASS
2	2.1046 22.913 24.232 27.50	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Effective (Isotropic) Radiated Power	Clause 5.1.1	PASS
3	2.1046 24.232(d) 27.50(d)	RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Peak to Average Ratio	Clause 5.1.2	PASS
4	2.1049 22.917 24.238 27.53	RSS-Gen 6.6	Occupied Bandwidth	Clause 5.1.3	PASS
5	2.1055 22.355 24.235 27.54	RSS-Gen 6.11 RSS-130 4.3 RSS-132 5.3 RSS-133 6.3 RSS-139 6.4 RSS-199 4.3	Frequency Stability	Clause 5.1.4	PASS
6	2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Spurious Emission at Antenna Terminals	Clause 5.1.5	PASS
7	2.1051 22.917 24.238 27.53	RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Band Edge	Clause 5.1.6	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 8 of 80

8	2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Field Strength of Spurious Radiation	Clause 5.1.7	PASS
9	N/A	RSS-Gen 8.8	AC Power-Line Conducted Emissions	Clause 5.1.8	PASS
10	N/A	RSS-Gen 7.1 RSS-132 5.6 RSS-133 6.6	Receiver Spurious Emissions	Clause 5.1.9	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 9 of 80

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Test Voltage	NV (Normal Voltage)	12.0 V
	LV (Low Voltage)	11.40 V
	HV (High Voltage)	12.60 V
Test Temperature	NT (Normal Temperature)	+25 °C
	LT (Low Temperature)	0 °C
	HT (High Temperature)	+40 °C

2.3 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020A	MY59260184	2021-08-23
Spectrum Analyzer	Keysight	N9020B	MY59260184	2021-08-18
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2021-06-08
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2021-06-08
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2021-06-08
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2021-08-18
DC Power Supply	ACPOWER	ADC-0800025-15	D215010003	2021-03-19
Temperature Chamber	SHKTEST	SHK-B101	20190819001	2021-03-15
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2021-06-08
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2021-06-08
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2021-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2023-06-08
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2021-06-08
Test Software	BL	BL410_E	N/A	N/A
Test Software	BL	BL410_R	N/A	N/A

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 10 of 80

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Test Item	Test Mode	Test Channel		
		LCH	MCH	HCH
Effective (Isotropic) Radiated Power	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
	HSDPA Band II	v	v	v
	HSDPA Band IV	v	v	v
	HSDPA Band V	v	v	v
	HSUPA Band II	v	v	v
	HSUPA Band IV	v	v	v
	HSUPA Band V	v	v	v
Peak to Average Ratio	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Occupied Occupied	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Frequency Stability	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Spurious Emission at Antenna Terminals	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Band Edge	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Field Strength of Spurious Radiation	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
AC Power-Line Conducted Emissions	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
	WCDMA Band II	v	v	v

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 11 of 80

Receiver Spurious Emissions	WCDMA Band IV	--	--	--
	WCDMA Band V	--	--	--

Note(s):

The mark 'v' means that this configuration is chosen for testing.

Test Item	LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	n	n	v	v	v	v	v	v	v	v
	7	n	n	v	v	v	v	v	v	v	v	v	v	v	v
	41	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak to Average Radio	2	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	4	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	5	--	--	--	v	n	n	v	v	v	--	v	v	v	v
	7	n	n	--	--	--	v	v	v	v	--	v	v	v	v
	41	--	--	--	--	--	v	v	v	v	--	v	v	v	v
Occupied Bandwidth	2	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	4	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	5	v	v	v	v	n	n	v	v	--	--	v	v	v	v
	7	n	n	v	v	v	v	v	v	--	--	v	v	v	v
	41	v	v	v	v	v	v	v	v	--	--	v	v	v	v
Frequency Stability	2	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	4	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	5	--	--	--	v	n	n	v	v	--	--	v	--	v	--
	7	n	n	--	v	--	--	v	v	--	--	v	--	v	--
	41	--	--	--	v	--	--	v	v	--	--	v	--	v	--
Spurious Emission at Antenna Terminals	2	v	v	v	v	v	v	v	v	v	--	--	v	v	v
	4	v	v	v	v	v	v	v	v	v	--	--	v	v	v
	5	v	v	v	v	n	n	v	v	v	--	--	v	v	v
	7	n	n	v	v	v	v	v	v	v	--	--	v	v	v
	41	v	v	v	v	v	v	v	v	v	--	--	v	v	v
Band Edge	2	v	v	v	v	v	v	v	v	v	--	v	v	--	v
	4	v	v	v	v	v	v	v	v	v	--	v	v	--	v
	5	v	v	v	v	n	n	v	v	v	--	v	v	--	v
	7	n	n	v	v	v	v	v	v	v	--	v	v	--	v
	41	v	v	v	v	v	v	v	v	v	--	v	v	--	v
Field Strength of	2	v	v	v	v	v	v	v	--	v	--	--	--	v	--
	4	v	v	v	v	v	v	v	--	v	--	--	--	v	--
	5	v	v	v	v	n	n	v	--	v	--	--	--	v	--

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 12 of 80

Spurious	7	n	n	v	v	v	v	v	--	v	--	--	--	v	--
Radiation	41	v	v	v	v	v	v	v	--	v	--	--	--	v	--

Note(s):

1. The mark 'v' means that this configuration is chosen for testing.
2. The mark 'n' means that this bandwidth is not supported.

TEST REPORT


Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 13 of 80

3.2 Test Setup Diagram

Diagram of Measurement Equipment Configuration for Antenna Port Test

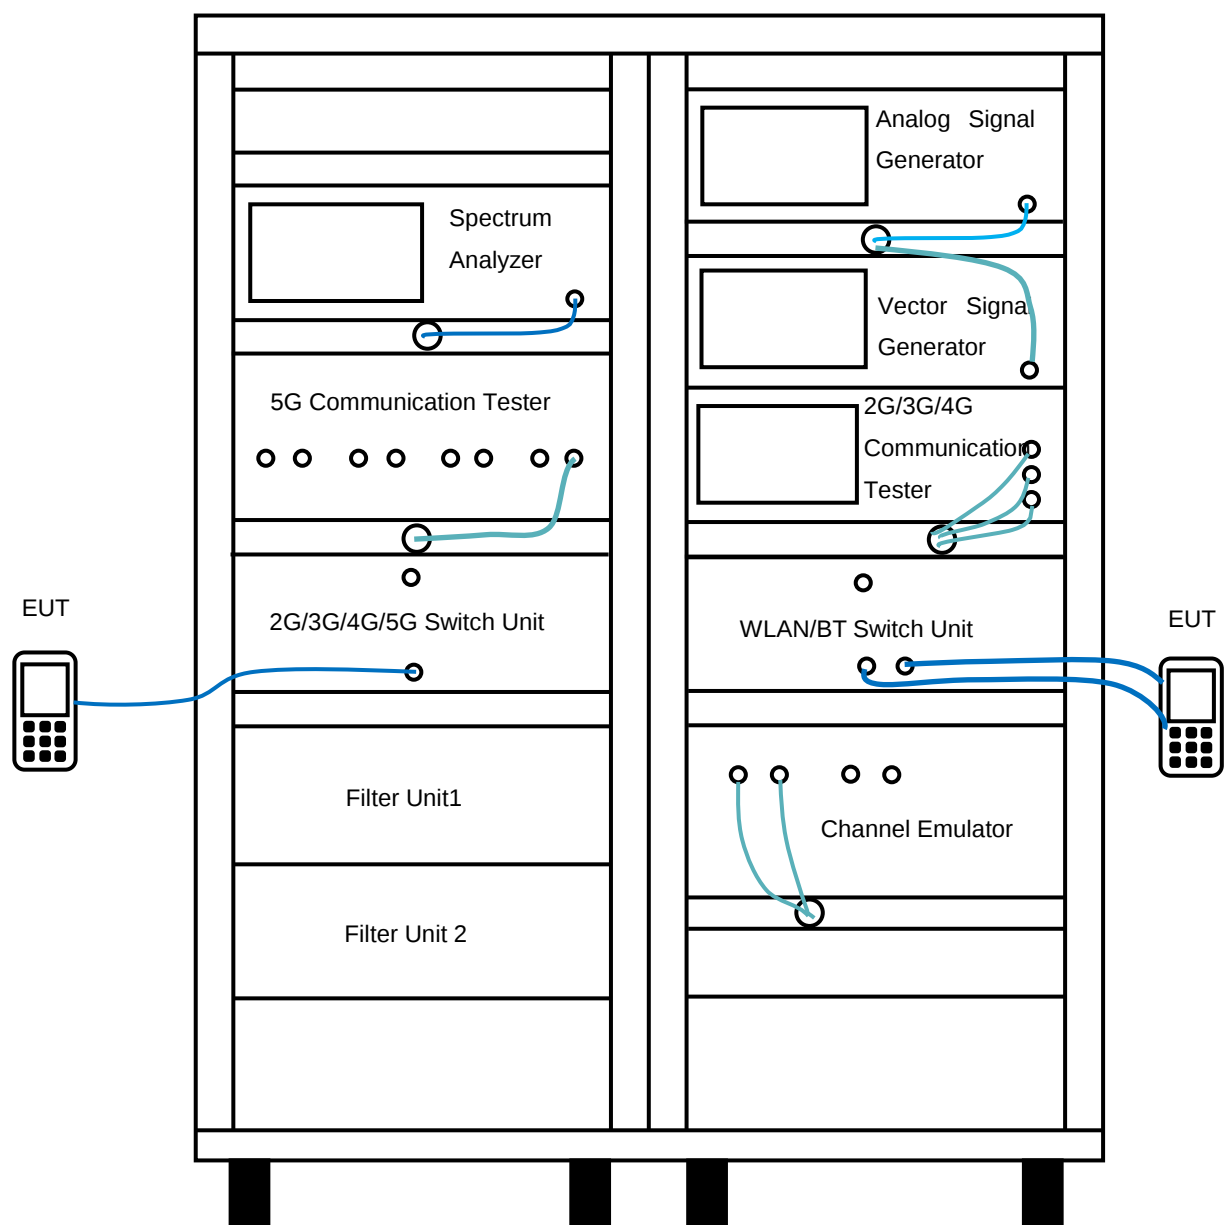


TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15


Page 14 of 80

Diagram of Measurement Configuration for Radiation Test

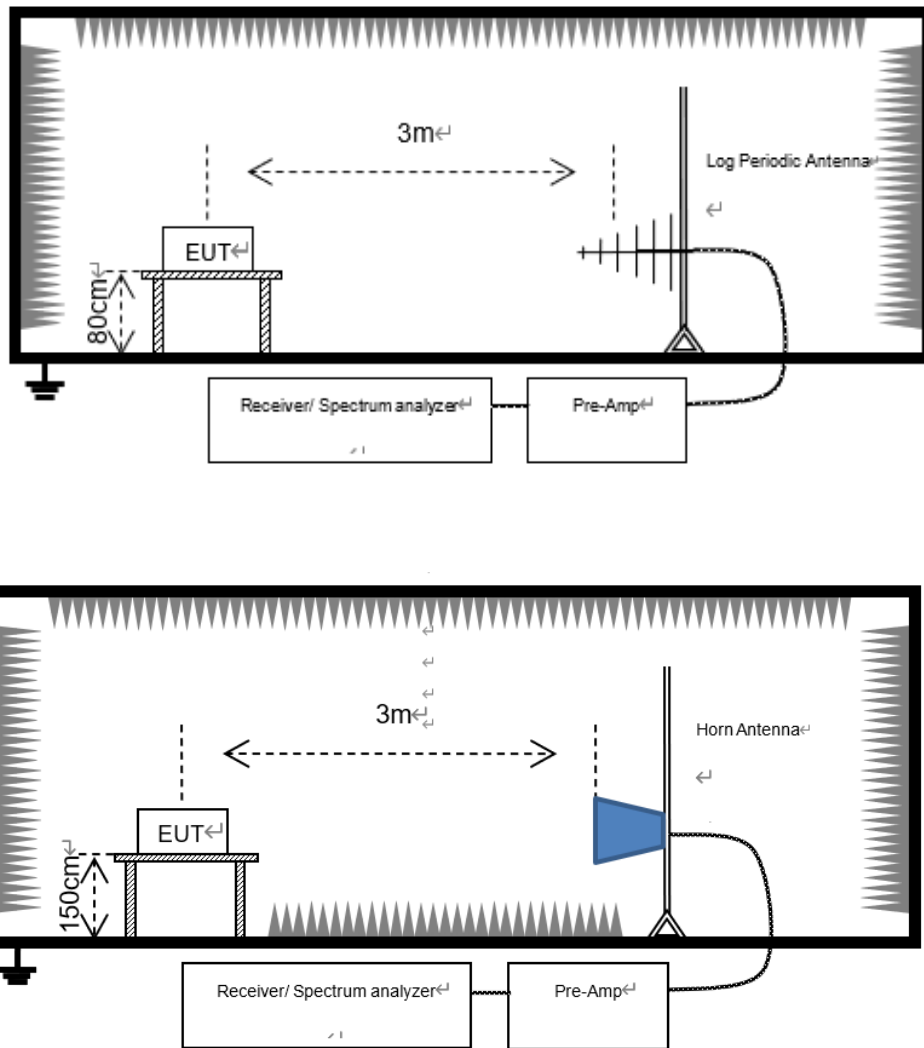

Note: Measurements below 1GHz are done with a table height of 0.8m and above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Configuration for Frequency Stability

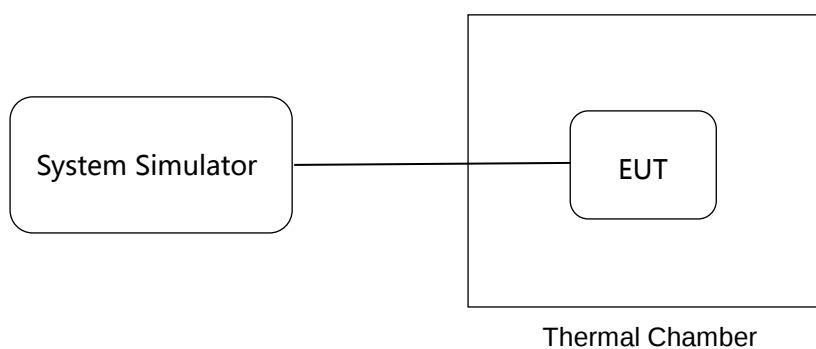


TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 15 of 80

Diagram of Measurement Equipment Configuration for Conduction Measurement

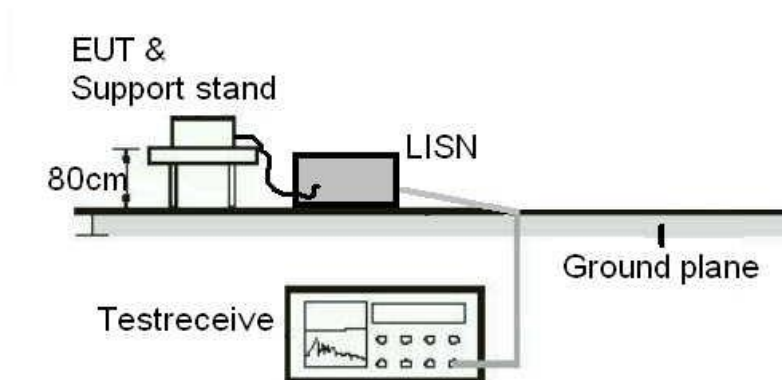

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 16 of 80

4 Test Items

4.1 Transmitter Radiated Power (EIRP/ERP)

4.1.1 Limit

FCC § 2.1046(a) & 22.913(a) & 24.232(c) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h)

According to FCC section 22.913(a) (2), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 698-746MHz band are limited to 3 watts ERP.

FCC section 27.50(d) (4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2 watts EIRP. All user stations are limited to 2 watts transmitter output power.

RSS-132 § 5.4 & RSS-133 § 6.4 & RSS-139 § 6.5 & RSS-199 § 4.4

According to RSS-132 § 5.4, the Effective Radiated Power (ERP) for mobile equipment shall not exceed 11.5 watts.

According to RSS-133 § 6.4 (SRSP 510), mobile stations and hand-held portables are limited to 2 watts maximum EIRP.

According to RSS-139 § 6.5, the EIRP for mobile and portable transmitters shall not exceed 1 watt.

According to RSS-199 § 4.4, for mobile subscriber equipment, the EIRP shall not exceed 2 watts.

4.1.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 17 of 80

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{EIRP} = P_T + G_T - L_C$$

$$\text{ERP} = \text{EIRP} - 2.15$$

Where:

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP} = \text{SA Read Value} + \text{Correction Factor}$$

where:

ERP/EIRP = effective or equivalent radiated power in dBm

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer in dBm

Correction Factor = total correction factor including cable loss in dB

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

4.1.3 Test Result

Please refer to 5.1.1.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 18 of 80

4.2 Peak-to-Average Ratio

4.2.1 Limit

FCC § 2.1046 & 24.232(d) & 27.50(d)

RSS-132 § 5.4 & RSS-133 § 6.4 & RSS-139 § 6.5 & RSS-199 § 4.4

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

For FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an RMS equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

4.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

4.2.3 Test Result

Please refer to 5.1.2.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 19 of 80

4.3 Occupied Bandwidth

4.3.1 Limit

FCC § 2.1049

RSS-Gen § 6.6

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

4.3.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

4.3.3 Test Result

Please refer to 5.1.3.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 20 of 80

4.4 Frequency Stability

4.4.1 Limit

FCC § 2.1055 & 22.355 & 24.235 & 27.54

RSS-Gen § 6.11 & RSS-132 § 5.3 & RSS-133 § 6.3 & RSS-139 § 6.4 & RSS-199 § 4.3

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

(1) The temperature is varied from -30°C to +50°C.

(2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range. The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacture.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in table as below.

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 21 of 80

4.4.2 Test Procedures

For Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4.4.3 Test Result

Please refer to 5.1.4.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 22 of 80

4.5 Spurious Emission at Antenna Terminals

4.5.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-Gen § 6.13 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 23 of 80

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log(P)]$ (dB)
= $[30 + 10 \log(P)]$ (dBm) - $[43 + 10 \log(P)]$ (dB)
= -13dBm.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 24 of 80

11. For Band 7/41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P (Watts)

$= P(W) - [55 + 10\log(P)]$ (dB)

$= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)

$= -25$ dBm.

4.5.3 Test Result

Please refer to 5.1.5.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 25 of 80

4.6 Band Edge

4.6.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 26 of 80

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)} = -13 \text{ dBm.}$$

9. For LTE Band 7/41, the other 40 dB, and 55 dB have additionally applied same calculation above.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 27 of 80

4.6.3 Test Result

Please refer to 5.1.6.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 28 of 80

4.7 Field Strength of Spurious Radiation

4.7.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-Gen § 6.13 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 29 of 80

and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P (Watts)
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$
 $= -13 \text{ dBm.}$
13. For Band 7/41: The limit line is derived from $55 + 10 \log(P)$ dB below the transmitter power P (Watts)
 $= P(W) - [55 + 10 \log(P)] \text{ (dB)}$

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 30 of 80

$$\begin{aligned} &= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)} \\ &= -25\text{dBm}. \end{aligned}$$

4.7.3 Test Result

Please refer to 5.1.7.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 31 of 80

4.8 AC Power-line Conducted Emissions

4.8.1 Limit

Limit

RSS-Gen § 8.8

For AC power-line conducted emissions, both quasi-peak and average detectors having the characteristics specified in CAN/CSA-CISPR 16-1-1:15 for the 150 kHz to 30 MHz frequency range shall be employed. Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 3, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 3 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

4.8.2 Test Procedures

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4).
2. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument.
3. The test frequency range is from 150 kHz to 30 MHz.
4. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors.
5. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
6. Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation.
7. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

4.8.3 Test Result

Please refer to 5.1.8

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 32 of 80

5 Test Results

5.1.1 Transmitter Radiated Power (EIRP/ERP)

Conducted Power Measurement Results for WCDMA/HSDPA/HSPUA

WCDMA Band II	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	24.83	25.10	25.12
HSDPA	Sub - Test 1	23.81	24.11	24.20
	Sub - Test 2	23.99	24.21	24.06
	Sub - Test 3	23.45	23.72	23.59
	Sub - Test 4	23.44	23.72	23.79
HSUPA	Sub - Test 1	23.27	24.03	23.35
	Sub - Test 2	22.33	22.56	22.82
	Sub - Test 3	22.54	22.23	23.04
	Sub - Test 4	23.13	22.84	23.11
	Sub - Test 5	23.69	23.92	23.79

WCDMA Band IV	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	24.56	24.59	24.60
HSDPA	Sub - Test 1	23.53	23.61	23.67
	Sub - Test 2	23.61	23.64	23.73
	Sub - Test 3	23.09	23.15	23.23
	Sub - Test 4	23.08	23.15	23.24
HSUPA	Sub - Test 1	22.62	23.03	22.99
	Sub - Test 2	22.14	21.84	22.07
	Sub - Test 3	22.36	22.27	21.75
	Sub - Test 4	22.28	22.80	22.35
	Sub - Test 5	23.07	23.26	23.72

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 33 of 80

WCDMA Band V	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	24.54	24.30	24.62
HSDPA	Sub - Test 1	23.47	23.27	23.26
	Sub - Test 2	23.38	23.24	23.32
	Sub - Test 3	22.84	22.73	22.95
	Sub - Test 4	22.84	22.74	22.97
HSUPA	Sub - Test 1	22.65	22.21	22.93
	Sub - Test 2	21.73	21.41	21.38
	Sub - Test 3	21.70	21.39	21.90
	Sub - Test 4	22.12	21.88	21.79
	Sub - Test 5	22.84	22.69	23.06

Conducted power measurement results for LTE

FDD LTE Band 2							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18700	18900	19100	18700	18900	19100
20MHz	1 (RB_Pos:0)	24.78	25.10	24.99	24.11	23.81	24.31
	1 (RB_Pos:49)	25.12	25.45	25.47	24.26	24.02	24.08
	1 (RB_Pos:99)	24.97	25.02	25.21	23.63	23.75	23.92
	50 (RB_Pos:0)	23.95	24.13	24.34	23.05	23.19	23.28
	50 (RB_Pos:24)	24.11	24.14	24.23	23.24	23.08	23.26
	50 (RB_Pos:49)	24.30	24.16	24.26	23.34	22.99	23.12
	100 (RB_Pos:0)	24.05	24.24	24.19	22.97	23.20	23.17
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18675	18900	19125	18675	18900	19125
15MHz	1 (RB_Pos:0)	24.90	24.78	25.01	23.69	23.76	24.77
	1 (RB_Pos:37)	24.74	24.88	25.07	24.53	23.96	24.67
	1 (RB_Pos:74)	24.98	25.16	24.99	24.08	23.96	24.77
	36 (RB_Pos:0)	23.91	24.08	24.26	22.87	23.16	23.20
	36 (RB_Pos:18)	24.06	24.14	24.13	22.93	23.21	23.14
	36 (RB_Pos:37)	24.05	24.07	24.23	22.95	23.12	23.07
	75 (RB_Pos:0)	23.86	24.17	24.26	22.87	23.23	23.12
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18650	18900	19150	18650	18900	19150

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 34 of 80

10MHz	1 (RB_Pos:0)	24.68	24.84	25.5	23.62	23.8	24.28
	1 (RB_Pos:24)	24.93	25.05	25.52	24.54	23.83	24.08
	1 (RB_Pos:49)	24.80	24.85	25.06	23.71	23.96	23.55
	25 (RB_Pos:0)	23.85	24.13	24.24	22.84	23.39	23.31
	25 (RB_Pos:12)	24.09	24.27	24.12	23.10	23.42	23.25
	25 (RB_Pos:24)	24.04	24.06	24.20	23.04	23.12	23.14
	50 (RB_Pos:0)	23.99	24.19	24.24	22.88	23.13	23.24
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18625	18900	19175	18625	18900	19175
5MHz	1 (RB_Pos:0)	24.63	24.73	24.69	23.11	24.04	23.99
	1 (RB_Pos:12)	24.67	24.92	24.97	23.26	23.59	23.89
	1 (RB_Pos:24)	24.71	24.77	25.11	23.27	23.28	23.14
	12 (RB_Pos:0)	23.66	24.05	24.20	22.85	23.01	23.22
	12 (RB_Pos:6)	23.90	24.14	24.13	22.67	23.00	23.14
	12 (RB_Pos:11)	23.83	23.98	23.99	22.69	22.87	22.92
	25 (RB_Pos:0)	23.84	24.08	24.16	22.99	23.06	23.02
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18615	18900	19185	18615	18900	19185
3MHz	1 (RB_Pos:0)	24.70	24.89	24.94	23.51	23.81	24.18
	1 (RB_Pos:7)	24.69	24.95	24.85	23.66	23.95	23.85
	1 (RB_Pos:14)	24.65	24.87	25.28	23.55	23.89	23.51
	8 (RB_Pos:0)	23.91	24.16	24.11	22.53	23.06	23.30
	8 (RB_Pos:4)	23.72	24.09	24.00	22.58	23.01	23.02
	8 (RB_Pos:7)	23.73	24.07	24.11	22.6	22.89	22.80
	15 (RB_Pos:0)	23.85	24.17	24.11	22.68	23.12	23.02
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18607	18900	19193	18607	18900	19193
1.4MHz	1 (RB_Pos:0)	24.77	24.80	24.85	23.66	24.05	24.32
	1 (RB_Pos: 2)	24.86	24.80	24.87	23.51	24.03	24.24
	1 (RB_Pos:5)	24.84	24.84	25.39	23.40	23.65	24.16
	3 (RB_Pos:0)	24.59	24.98	25.11	23.42	23.94	23.85
	3 (RB_Pos:1)	24.68	25.04	25.20	23.53	23.98	23.80
	3 (RB_Pos:2)	24.65	24.99	24.93	23.52	23.91	23.69
	6 (RB_Pos:0)	23.57	24.09	24.14	22.40	22.84	23.13

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 35 of 80

FDD LTE Band 4							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20050	20175	20300	20050	20175	20300
20MHz	1 (RB_Pos:0)	23.39	24.07	23.87	22.93	22.66	22.30
	1 (RB_Pos:49)	24.07	24.27	24.00	23.19	22.73	22.63
	1 (RB_Pos:99)	23.92	23.89	23.79	22.74	22.65	22.66
	50 (RB_Pos:0)	22.71	23.00	23.06	21.77	21.85	22.07
	50 (RB_Pos:24)	22.87	22.95	22.99	22.03	22.11	22.00
	50 (RB_Pos:49)	22.89	22.85	22.90	22.07	22.12	21.69
	100 (RB_Pos:0)	22.79	22.97	22.97	21.77	21.91	21.93
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20025	20175	20325	20025	20175	20325
15MHz	1 (RB_Pos:0)	23.66	23.95	23.97	22.71	22.92	23.68
	1 (RB_Pos:37)	23.73	24.04	23.92	23.38	22.8	23.44
	1 (RB_Pos:74)	23.86	23.77	23.76	22.88	22.55	23.52
	36 (RB_Pos:0)	22.71	23.01	22.97	21.75	21.99	21.96
	36 (RB_Pos:18)	22.81	22.91	22.84	21.83	22.1	21.84
	36 (RB_Pos:37)	22.8	22.89	22.84	21.69	21.96	21.71
	75 (RB_Pos:0)	22.72	22.88	22.87	21.61	21.84	21.8
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20000	20175	20350	20000	20175	20350
10MHz	1 (RB_Pos:0)	23.73	23.90	23.79	22.52	22.65	22.72
	1 (RB_Pos:24)	23.98	24.26	24.09	23.25	22.67	22.70
	1 (RB_Pos:49)	23.78	23.81	23.98	22.73	22.62	22.43
	25 (RB_Pos:0)	22.71	22.99	22.87	21.65	21.96	22.10
	25 (RB_Pos:12)	22.78	22.92	22.86	21.62	22.20	22.08
	25 (RB_Pos:24)	22.68	22.86	22.81	21.51	22.11	21.72
	50 (RB_Pos:0)	22.64	22.91	22.83	21.60	21.86	21.76
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19975	20175	20375	19975	20175	20375
5MHz	1 (RB_Pos:0)	23.48	23.83	23.74	22.24	22.90	22.62
	1 (RB_Pos:12)	23.66	24.08	23.90	21.72	22.92	22.61
	1 (RB_Pos:24)	23.70	23.98	23.95	22.05	22.92	22.43
	12 (RB_Pos:0)	22.67	22.96	22.90	21.72	21.93	21.77
	12 (RB_Pos:6)	22.70	22.94	22.80	21.65	22.03	21.79

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 36 of 80

	12 (RB_Pos:11)	22.64	22.86	22.90	21.66	22.05	21.79
	25 (RB_Pos:0)	22.69	22.90	22.86	21.79	21.92	21.74
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19965	20175	20385	19965	20175	20385
3MHz	1 (RB_Pos:0)	23.64	23.9	23.61	22.81	22.88	22.72
	1 (RB_Pos:7)	23.64	23.84	23.72	22.49	22.8	22.6
	1 (RB_Pos:14)	23.61	23.94	23.76	22.31	22.62	22.64
	8 (RB_Pos:0)	22.77	22.97	22.85	22.15	21.9	21.94
	8 (RB_Pos:4)	22.7	22.97	22.89	22.08	21.91	21.97
	8 (RB_Pos:7)	22.75	22.93	22.82	22.04	21.88	22.00
	15 (RB_Pos:0)	22.78	22.94	22.86	21.99	21.92	21.95
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19957	20175	20393	19957	20175	20393
1.4MHz	1 (RB_Pos:0)	23.52	23.94	23.74	22.63	23.43	22.77
	1 (RB_Pos: 2)	23.89	23.90	23.94	22.89	22.92	22.90
	1 (RB_Pos:5)	23.95	23.83	23.90	22.46	22.62	22.91
	3 (RB_Pos:0)	23.78	23.89	24.04	22.69	22.32	23.05
	3 (RB_Pos:1)	23.69	23.92	24.02	22.88	22.35	23.15
	3 (RB_Pos:2)	23.63	23.87	23.91	22.91	22.19	23.01
	6 (RB_Pos:0)	22.75	22.98	22.93	22.03	21.54	22.10

FDD LTE Band 5							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20450	20525	20600	20450	20525	20600
10MHz	1 (RB_Pos:0)	23.99	22.49	24.02	23.67	23.08	24.15
	1 (RB_Pos:24)	24.38	22.50	24.60	23.46	23.07	23.29
	1 (RB_Pos:49)	23.90	22.37	23.92	22.92	23.04	23.55
	25 (RB_Pos:0)	23.33	21.60	23.20	22.32	22.17	22.49
	25 (RB_Pos:12)	23.23	21.66	23.35	22.18	22.49	22.26
	25 (RB_Pos:24)	23.14	21.58	23.33	22.18	22.47	22.07
	50 (RB_Pos:0)	23.14	21.63	23.21	22.14	22.06	22.08
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20425	20525	20625	20425	20525	20625
5MHz	1 (RB_Pos:0)	24.04	24.03	24.12	22.64	23.04	23.17
	1 (RB_Pos:12)	24.12	24.16	24.19	22.40	23.17	22.71
	1 (RB_Pos:24)	24.06	24.29	24.09	22.74	23.10	22.85

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 37 of 80

	12 (RB_Pos:0)	23.11	23.31	23.17	22.10	22.04	22.15
	12 (RB_Pos:6)	23.18	23.37	23.13	22.17	22.09	22.09
	12 (RB_Pos:11)	23.06	23.27	23.25	22.17	22.03	22.33
	25 (RB_Pos:0)	23.14	23.24	23.22	22.21	22.45	22.30
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20415	20525	20635	20415	20525	20635
3MHz	1 (RB_Pos:0)	24.19	24.12	24.05	23.01	23.20	22.89
	1 (RB_Pos:7)	24.09	24.19	24.28	23.11	23.05	23.12
	1 (RB_Pos:14)	24.05	24.37	24.22	22.99	23.06	22.88
	8 (RB_Pos:0)	23.13	23.31	23.16	22.06	22.41	22.04
	8 (RB_Pos:4)	23.39	23.34	23.30	22.14	22.10	22.20
	8 (RB_Pos:7)	23.05	23.26	23.29	22.15	22.36	22.13
	15 (RB_Pos:0)	23.10	23.29	23.31	22.15	22.36	22.21
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20407	20525	20643	20407	20525	20643
1.4MHz	1 (RB_Pos:0)	24.21	23.95	24.29	22.84	23.16	23.31
	1 (RB_Pos: 2)	24.22	24.1	24.44	22.99	23.12	23.37
	1 (RB_Pos:5)	24.12	23.91	24.20	22.91	22.97	23.29
	3 (RB_Pos:0)	24.16	24.02	24.42	22.79	23.09	23.67
	3 (RB_Pos:1)	24.19	24.07	24.42	22.93	23.12	23.60
	3 (RB_Pos:2)	24.04	24.02	24.28	22.79	23.06	23.45
	6 (RB_Pos:0)	23.40	23.21	23.34	22.01	22.16	22.44

FDD LTE Band 7							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20850	21100	21350	20850	21100	21350
20MHz	1 (RB_Pos:0)	24.22	24.21	24.19	23.66	22.72	23.29
	1 (RB_Pos:49)	24.42	24.52	24.79	23.19	23.22	23.45
	1 (RB_Pos:99)	24.06	24.37	23.68	23.31	22.94	23.17
	50 (RB_Pos:0)	23.31	23.23	23.51	22.36	22.47	22.53
	50 (RB_Pos:24)	23.21	23.41	23.63	22.37	22.54	22.71
	50 (RB_Pos:49)	23.34	23.28	23.72	22.23	22.33	22.41
	100 (RB_Pos:0)	23.24	23.4	23.63	22.35	22.46	22.78
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20825	21100	21375	20825	21100	21375
15MHz	1 (RB_Pos:0)	24.45	24.01	24.22	23.25	23.12	23.57

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 38 of 80

	1 (RB_Pos:37)	24.44	24.28	24.41	23.45	23.14	24.04
	1 (RB_Pos:74)	24.45	24.24	23.9	23.36	22.64	23.52
	36 (RB_Pos:0)	23.36	23.33	23.19	22.44	22.6	22.32
	36 (RB_Pos:18)	23.29	23.34	23.49	22.32	22.49	22.35
	36 (RB_Pos:37)	23.19	23.27	23.38	22.2	22.31	22.29
	75 (RB_Pos:0)	23.24	23.22	23.34	22.31	22.37	22.34
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20800	21100	21400	20800	21100	21400
10MHz	1 (RB_Pos:0)	24.24	24.05	24.41	23.13	23.02	23.19
	1 (RB_Pos:24)	24.49	24.43	24.74	23.16	23.75	23.17
	1 (RB_Pos:49)	24.54	24.41	23.96	23.27	23.08	23.38
	25 (RB_Pos:0)	23.27	23.26	23.43	22.32	22.27	22.55
	25 (RB_Pos:12)	23.24	23.30	23.34	22.33	22.32	22.39
	25 (RB_Pos:24)	23.21	23.22	23.42	22.32	22.24	22.51
	50 (RB_Pos:0)	23.31	23.26	23.37	22.20	22.35	22.40
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20775	21100	21425	20775	21100	21425
5MHz	1 (RB_Pos:0)	24.12	23.94	23.98	23.12	23.06	22.88
	1 (RB_Pos:12)	24.33	24.17	24.3	22.71	22.79	22.97
	1 (RB_Pos:24)	24.12	24.05	24.23	22.59	22.64	22.94
	12 (RB_Pos:0)	23.39	23.25	23.30	22.47	22.22	22.20
	12 (RB_Pos:6)	23.28	23.23	23.29	22.45	22.22	22.26
	12 (RB_Pos:11)	23.23	23.22	23.36	22.33	22.14	22.10
	25 (RB_Pos:0)	23.29	23.20	23.40	22.51	22.22	22.14

FDD LTE Band 41							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39750	40620	41490	39750	40620	41490
20MHz	1 (RB_Pos:0)	23.33	23.54	24.23	22.16	21.81	23.35
	1 (RB_Pos:49)	23.67	23.91	24.4	22.68	21.91	23.49
	1 (RB_Pos:99)	23.58	23.65	24.38	22.32	21.85	23.42
	50 (RB_Pos:0)	22.8	22.86	23.2	21.84	21.89	22.14
	50 (RB_Pos:24)	22.84	22.87	23.16	21.79	21.88	22.13
	50 (RB_Pos:49)	22.76	22.8	23.16	21.82	21.84	22.13
	100 (RB_Pos:0)	22.83	22.87	23.13	21.89	21.82	22.07
Bandwidth	RB Set	Power (dBm)					

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 39 of 80

(MHz)		QPSK			16QAM		
	Channel	39725	40620	41515	39725	40620	41515
15MHz	1 (RB_Pos:0)	23.57	23.87	24.11	22.94	22.30	23.31
	1 (RB_Pos:37)	23.69	23.97	24.02	23.10	22.31	22.95
	1 (RB_Pos:74)	23.84	23.95	24.05	23.07	22.13	23.12
	36 (RB_Pos:0)	22.83	22.85	23.14	21.57	21.77	22.02
	36 (RB_Pos:18)	22.82	22.85	23.17	21.57	21.88	22.03
	36 (RB_Pos:37)	22.68	22.85	23.07	21.66	21.87	22.02
	75 (RB_Pos:0)	22.75	22.80	23.13	21.94	21.83	22.18
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39700	40620	41540	39700	40620	41540
10MHz	1 (RB_Pos:0)	23.82	23.91	23.89	23.01	22.18	23.97
	1 (RB_Pos:24)	23.83	24.02	24.10	23.43	22.24	24.24
	1 (RB_Pos:49)	23.74	23.99	24.03	23.06	22.15	23.98
	25 (RB_Pos:0)	22.89	22.85	23.21	21.94	21.69	22.06
	25 (RB_Pos:12)	22.91	22.86	23.15	22.08	21.76	22.14
	25 (RB_Pos:24)	22.87	22.79	23.09	21.86	21.73	22.10
	50 (RB_Pos:0)	22.96	22.81	23.18	21.94	21.81	22.16
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39675	40620	41565	39675	40620	41565
5MHz	1 (RB_Pos:0)	23.72	23.51	23.99	22.13	22.34	22.66
	1 (RB_Pos:12)	23.73	23.64	24.14	22.25	22.29	22.85
	1 (RB_Pos:24)	23.68	23.68	24.06	22.26	22.28	22.64
	12 (RB_Pos:0)	22.83	22.82	23.14	21.76	21.72	22.07
	12 (RB_Pos:6)	22.89	22.76	23.15	21.72	21.8	22.11
	12 (RB_Pos:11)	22.75	22.79	23.15	21.65	21.70	22.04
	25 (RB_Pos:0)	22.78	22.80	23.18	21.98	21.74	21.97

Effective (Isotropic) Radiated Power Measurement Results for WCDMA/HSDPA/HSUPA

Test Band	Channel	Measured EIRP					Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	Antenna Polarization		
WCDMA Band II	Low	0.67	17.8	18.47	0.07	vertical	2	PASS
	Middle	0.86	17.8	18.66	0.07	vertical		PASS
	High	0.87	17.8	18.67	0.07	vertical		PASS
HSDPA	Low	-0.28	17.8	17.52	0.06	vertical		PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 40 of 80

Band II	Middle	0.1	17.8	17.90	0.06	vertical		PASS
	High	-0.15	17.8	17.65	0.06	vertical		PASS
HSUPA Band II	Low	-0.48	17.8	17.32	0.05	vertical		PASS
	Middle	-0.07	17.8	17.73	0.06	vertical		PASS
	High	-0.7	17.8	17.10	0.05	vertical		PASS

Test Band	Channel	Measured EIRP					Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	Antenna Polarization		
WCDMA Band IV	Low	3.83	14.4	18.23	0.07	vertical	1	PASS
	Middle	3.57	14.4	17.97	0.06	vertical		PASS
	High	3.91	14.4	18.31	0.07	vertical		PASS
HSDPA Band IV	Low	3.03	14.4	17.43	0.06	vertical		PASS
	Middle	2.82	14.4	17.22	0.05	vertical		PASS
	High	2.91	14.4	17.31	0.05	vertical		PASS
HSUPA Band IV	Low	2.12	14.4	16.52	0.04	vertical		PASS
	Middle	2.48	14.4	16.88	0.05	vertical		PASS
	High	2.8	14.4	17.20	0.05	vertical		PASS

Test Band	Channel	Measured ERP					Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)	Antenna Polarization		
WCDMA Band V	Low	10.53	9.83	20.36	0.11	vertical	7	PASS
	Middle	10.24	9.83	20.07	0.10	vertical		PASS
	High	10.57	9.83	20.40	0.11	vertical		PASS
HSDPA Band V	Low	9.41	9.83	19.24	0.08	vertical		PASS
	Middle	9.17	9.83	19.00	0.08	vertical		PASS
	High	8.88	9.83	18.71	0.07	vertical		PASS
HSUPA Band V	Low	8.83	9.83	18.66	0.07	vertical		PASS
	Middle	8.53	9.83	18.36	0.07	vertical		PASS
	High	8.78	9.83	18.61	0.07	vertical		PASS

Note(s):

For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this table.

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 41 of 80

Effective (Isotropic) Radiated Power Measurement Results for LTE

FDD LTE Band 2										
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP					Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	Antenna Polarization		
1.4 MHz	Low	QPSK	RB1#0	0.25	17.8	18.05	0.06	vertical	2	PASS
			RB6#0	-0.58	17.8	17.22	0.05	vertical	2	PASS
		16QAM	RB1#0	-0.81	17.8	16.99	0.05	vertical	2	PASS
			RB6#0	-1.86	17.8	15.94	0.04	vertical	2	PASS
	Middle	QPSK	RB1#0	0.64	17.8	18.44	0.07	vertical	2	PASS
			RB6#0	-0.43	17.8	17.37	0.05	vertical	2	PASS
		16QAM	RB1#0	-0.23	17.8	17.57	0.06	vertical	2	PASS
			RB6#0	-1.53	17.8	16.27	0.04	vertical	2	PASS
	High	QPSK	RB1#0	0.58	17.8	18.38	0.07	vertical	2	PASS
			RB6#0	-0.38	17.8	17.42	0.06	vertical	2	PASS
		16QAM	RB1#0	0.01	17.8	17.81	0.06	vertical	2	PASS
			RB6#0	-1.32	17.8	16.48	0.04	vertical	2	PASS
3 MHz	Low	QPSK	RB1#0	0.58	17.8	18.38	0.07	vertical	2	PASS
			RB15#0	-0.69	17.8	17.11	0.05	vertical	2	PASS
		16QAM	RB1#0	-0.56	17.8	17.24	0.05	vertical	2	PASS
			RB15#0	-1.52	17.8	16.28	0.04	vertical	2	PASS
	Middle	QPSK	RB1#0	0.46	17.8	18.26	0.07	vertical	2	PASS
			RB15#0	0	17.8	17.80	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.27	17.8	17.53	0.06	vertical	2	PASS
			RB15#0	-1.23	17.8	16.57	0.05	vertical	2	PASS
	High	QPSK	RB1#0	0.55	17.8	18.35	0.07	vertical	2	PASS
			RB15#0	-0.06	17.8	17.74	0.06	vertical	2	PASS
		16QAM	RB1#0	0.11	17.8	17.91	0.06	vertical	2	PASS
			RB15#0	-1.32	17.8	16.48	0.04	vertical	2	PASS
5 MHz	Low	QPSK	RB1#0	0.14	17.8	17.94	0.06	vertical	2	PASS
			RB25#0	-0.2	17.8	17.60	0.06	vertical	2	PASS
		16QAM	RB1#0	-1.21	17.8	16.59	0.05	vertical	2	PASS
			RB25#0	-1.39	17.8	16.41	0.04	vertical	2	PASS
	Middle	QPSK	RB1#0	0.59	17.8	18.39	0.07	vertical	2	PASS
			RB25#0	-0.31	17.8	17.49	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.13	17.8	17.67	0.06	vertical	2	PASS
			RB25#0	-1.24	17.8	16.56	0.05	vertical	2	PASS
	High	QPSK	RB1#0	0.65	17.8	18.45	0.07	vertical	2	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 42 of 80

			RB25#0	-0.23	17.8	17.57	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.14	17.8	17.66	0.06	vertical	2	PASS
			RB25#0	-1.47	17.8	16.33	0.04	vertical	2	PASS
10 MHz	Low	QPSK	RB1#0	0.16	17.8	17.96	0.06	vertical	2	PASS
			RB50#0	-0.15	17.8	17.65	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.7	17.8	17.10	0.05	vertical	2	PASS
			RB50#0	-1.28	17.8	16.52	0.04	vertical	2	PASS
	Middle	QPSK	RB1#0	0.31	17.8	18.11	0.06	vertical	2	PASS
			RB50#0	-0.08	17.8	17.72	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.56	17.8	17.24	0.05	vertical	2	PASS
			RB50#0	-1.41	17.8	16.39	0.04	vertical	2	PASS
	High	QPSK	RB1#0	1.42	17.8	19.22	0.08	vertical	2	PASS
			RB50#0	-0.2	17.8	17.60	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.15	17.8	17.65	0.06	vertical	2	PASS
			RB50#0	-0.94	17.8	16.86	0.05	vertical	2	PASS
15 MHz	Low	QPSK	RB1#0	0.64	17.8	18.44	0.07	vertical	2	PASS
			RB75#0	-0.41	17.8	17.39	0.05	vertical	2	PASS
		16QAM	RB1#0	-0.58	17.8	17.22	0.05	vertical	2	PASS
			RB75#0	-1.43	17.8	16.37	0.04	vertical	2	PASS
	Middle	QPSK	RB1#0	0.66	17.8	18.46	0.07	vertical	2	PASS
			RB75#0	-0.33	17.8	17.47	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.41	17.8	17.39	0.05	vertical	2	PASS
			RB75#0	-1.3	17.8	16.50	0.04	vertical	2	PASS
	High	QPSK	RB1#0	0.88	17.8	18.68	0.07	vertical	2	PASS
			RB75#0	-0.14	17.8	17.66	0.06	vertical	2	PASS
		16QAM	RB1#0	0.44	17.8	18.24	0.07	vertical	2	PASS
			RB75#0	-1.25	17.8	16.55	0.05	vertical	2	PASS
20MHz	Low	QPSK	RB1#0	0.68	17.8	18.48	0.07	vertical	2	PASS
			RB100#0	-0.21	17.8	17.59	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.05	17.8	17.75	0.06	vertical	2	PASS
			RB100#0	-1.15	17.8	16.65	0.05	vertical	2	PASS
	Middle	QPSK	RB1#0	0.88	17.8	18.68	0.07	vertical	2	PASS
			RB100#0	-0.02	17.8	17.78	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.54	17.8	17.26	0.05	vertical	2	PASS
			RB100#0	-1.1	17.8	16.70	0.05	vertical	2	PASS
	High	QPSK	RB1#0	0.62	17.8	18.42	0.07	vertical	2	PASS
			RB100#0	-0.14	17.8	17.66	0.06	vertical	2	PASS
		16QAM	RB1#0	-0.23	17.8	17.57	0.06	vertical	2	PASS
			RB100#0	-0.92	17.8	16.88	0.05	vertical	2	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 43 of 80

FDD LTE Band 4										
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP					Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	Antenna Polarization		
1.4 MHz	Low	QPSK	RB1#0	4.17	14.4	18.57	0.07	vertical	1	PASS
			RB6#0	3.56	14.4	17.96	0.06	vertical	1	PASS
		16QAM	RB1#0	3.36	14.4	17.76	0.06	vertical	1	PASS
			RB6#0	2.52	14.4	16.92	0.05	vertical	1	PASS
	Middle	QPSK	RB1#0	4.48	14.4	18.88	0.08	vertical	1	PASS
			RB6#0	3.55	14.4	17.95	0.06	vertical	1	PASS
		16QAM	RB1#0	4.33	14.4	18.73	0.07	vertical	1	PASS
			RB6#0	2.26	14.4	16.66	0.05	vertical	1	PASS
	High	QPSK	RB1#0	4.24	14.4	18.64	0.07	vertical	1	PASS
			RB6#0	3.48	14.4	17.88	0.06	vertical	1	PASS
		16QAM	RB1#0	3.61	14.4	18.01	0.06	vertical	1	PASS
			RB6#0	3.06	14.4	17.46	0.06	vertical	1	PASS
3 MHz	Low	QPSK	RB1#0	4.55	14.4	18.95	0.08	vertical	1	PASS
			RB15#0	3.32	14.4	17.72	0.06	vertical	1	PASS
		16QAM	RB1#0	3.51	14.4	17.91	0.06	vertical	1	PASS
			RB15#0	2.87	14.4	17.27	0.05	vertical	1	PASS
	Middle	QPSK	RB1#0	4.78	14.4	19.18	0.08	vertical	1	PASS
			RB15#0	3.83	14.4	18.23	0.07	vertical	1	PASS
		16QAM	RB1#0	3.51	14.4	17.91	0.06	vertical	1	PASS
			RB15#0	2.44	14.4	16.84	0.05	vertical	1	PASS
	High	QPSK	RB1#0	4.47	14.4	18.87	0.08	vertical	1	PASS
			RB15#0	3.77	14.4	18.17	0.07	vertical	1	PASS
		16QAM	RB1#0	3.68	14.4	18.08	0.06	vertical	1	PASS
			RB15#0	2.88	14.4	17.28	0.05	vertical	1	PASS
5 MHz	Low	QPSK	RB1#0	4.28	14.4	18.68	0.07	vertical	1	PASS
			RB25#0	3.56	14.4	17.96	0.06	vertical	1	PASS
		16QAM	RB1#0	3.04	14.4	17.44	0.06	vertical	1	PASS
			RB25#0	2.51	14.4	16.91	0.05	vertical	1	PASS
	Middle	QPSK	RB1#0	4.55	14.4	18.95	0.08	vertical	1	PASS
			RB25#0	3.53	14.4	17.93	0.06	vertical	1	PASS
		16QAM	RB1#0	3.47	14.4	17.87	0.06	vertical	1	PASS
			RB25#0	2.83	14.4	17.23	0.05	vertical	1	PASS
	High	QPSK	RB1#0	4.65	14.4	19.05	0.08	vertical	1	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 44 of 80

			RB25#0	3.54	14.4	17.94	0.06	vertical	1	PASS
		16QAM	RB1#0	3.59	14.4	17.99	0.06	vertical	1	PASS
			RB25#0	2.55	14.4	16.95	0.05	vertical	1	PASS
10 MHz	Low	QPSK	RB1#0	4.38	14.4	18.78	0.08	vertical	1	PASS
			RB50#0	3.5	14.4	17.90	0.06	vertical	1	PASS
		16QAM	RB1#0	3.28	14.4	17.68	0.06	vertical	1	PASS
			RB50#0	2.23	14.4	16.63	0.05	vertical	1	PASS
	Middle	QPSK	RB1#0	4.77	14.4	19.17	0.08	vertical	1	PASS
			RB50#0	3.68	14.4	18.08	0.06	vertical	1	PASS
		16QAM	RB1#0	3.51	14.4	17.91	0.06	vertical	1	PASS
			RB50#0	2.44	14.4	16.84	0.05	vertical	1	PASS
	High	QPSK	RB1#0	4.61	14.4	19.01	0.08	vertical	1	PASS
			RB50#0	3.81	14.4	18.21	0.07	vertical	1	PASS
		16QAM	RB1#0	3.46	14.4	17.86	0.06	vertical	1	PASS
			RB50#0	2.36	14.4	16.76	0.05	vertical	1	PASS
15 MHz	Low	QPSK	RB1#0	4.6	14.4	19.00	0.08	vertical	1	PASS
			RB75#0	3.68	14.4	18.08	0.06	vertical	1	PASS
		16QAM	RB1#0	3.5	14.4	17.90	0.06	vertical	1	PASS
			RB75#0	2.11	14.4	16.51	0.04	vertical	1	PASS
	Middle	QPSK	RB1#0	4.53	14.4	18.93	0.08	vertical	1	PASS
			RB75#0	3.83	14.4	18.23	0.07	vertical	1	PASS
		16QAM	RB1#0	3.5	14.4	17.90	0.06	vertical	1	PASS
			RB75#0	2.52	14.4	16.92	0.05	vertical	1	PASS
	High	QPSK	RB1#0	4.69	14.4	19.09	0.08	vertical	1	PASS
			RB75#0	3.66	14.4	18.06	0.06	vertical	1	PASS
		16QAM	RB1#0	4.41	14.4	18.81	0.08	vertical	1	PASS
			RB75#0	2.55	14.4	16.95	0.05	vertical	1	PASS
20MHz	Low	QPSK	RB1#0	4.2	14.4	18.60	0.07	vertical	1	PASS
			RB100#0	3.34	14.4	17.74	0.06	vertical	1	PASS
		16QAM	RB1#0	3.6	14.4	18.00	0.06	vertical	1	PASS
			RB100#0	2.62	14.4	17.02	0.05	vertical	1	PASS
	Middle	QPSK	RB1#0	4.74	14.4	19.14	0.08	vertical	1	PASS
			RB100#0	3.46	14.4	17.86	0.06	vertical	1	PASS
		16QAM	RB1#0	3.49	14.4	17.89	0.06	vertical	1	PASS
			RB100#0	2.8	14.4	17.20	0.05	vertical	1	PASS
	High	QPSK	RB1#0	4.44	14.4	18.84	0.08	vertical	1	PASS
			RB100#0	3.91	14.4	18.31	0.07	vertical	1	PASS
		16QAM	RB1#0	2.97	14.4	17.37	0.05	vertical	1	PASS
			RB100#0	2.41	14.4	16.81	0.05	vertical	1	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 45 of 80

FDD LTE Band 5										
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured ERP					Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)	Antenna Polarization		
1.4 MHz	Low	QPSK	RB1#0	8.93	9.83	18.76	0.08	vertical	7	PASS
			RB6#0	8.23	9.83	18.06	0.06	vertical	7	PASS
		16QAM	RB1#0	7.77	9.83	17.60	0.06	vertical	7	PASS
			RB6#0	6.93	9.83	16.76	0.05	vertical	7	PASS
	Middle	QPSK	RB1#0	8.62	9.83	18.45	0.07	vertical	7	PASS
			RB6#0	8.01	9.83	17.84	0.06	vertical	7	PASS
		16QAM	RB1#0	7.88	9.83	17.71	0.06	vertical	7	PASS
			RB6#0	6.82	9.83	16.65	0.05	vertical	7	PASS
	High	QPSK	RB1#0	8.93	9.83	18.76	0.08	vertical	7	PASS
			RB6#0	7.9	9.83	17.73	0.06	vertical	7	PASS
		16QAM	RB1#0	8.07	9.83	17.90	0.06	vertical	7	PASS
			RB6#0	7.17	9.83	17.00	0.05	vertical	7	PASS
3 MHz	Low	QPSK	RB1#0	8.87	9.83	18.70	0.07	vertical	7	PASS
			RB15#0	7.94	9.83	17.77	0.06	vertical	7	PASS
		16QAM	RB1#0	7.7	9.83	17.53	0.06	vertical	7	PASS
			RB15#0	7.08	9.83	16.91	0.05	vertical	7	PASS
	Middle	QPSK	RB1#0	9.02	9.83	18.85	0.08	vertical	7	PASS
			RB15#0	8.28	9.83	18.11	0.06	vertical	7	PASS
		16QAM	RB1#0	8.21	9.83	18.04	0.06	vertical	7	PASS
			RB15#0	6.91	9.83	16.74	0.05	vertical	7	PASS
	High	QPSK	RB1#0	8.83	9.83	18.66	0.07	vertical	7	PASS
			RB15#0	8.35	9.83	18.18	0.07	vertical	7	PASS
		16QAM	RB1#0	7.48	9.83	17.31	0.05	vertical	7	PASS
			RB15#0	6.96	9.83	16.79	0.05	vertical	7	PASS
5 MHz	Low	QPSK	RB1#0	8.84	9.83	18.67	0.07	vertical	7	PASS
			RB25#0	8.07	9.83	17.90	0.06	vertical	7	PASS
		16QAM	RB1#0	7.19	9.83	17.02	0.05	vertical	7	PASS
			RB25#0	7.19	9.83	17.02	0.05	vertical	7	PASS
	Middle	QPSK	RB1#0	8.88	9.83	18.71	0.07	vertical	7	PASS
			RB25#0	8.12	9.83	17.95	0.06	vertical	7	PASS
		16QAM	RB1#0	7.94	9.83	17.77	0.06	vertical	7	PASS
			RB25#0	7.03	9.83	16.86	0.05	vertical	7	PASS
	High	QPSK	RB1#0	8.69	9.83	18.52	0.07	vertical	7	PASS
			RB25#0	8.16	9.83	17.99	0.06	vertical	7	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 46 of 80

		16QAM	RB1#0	8.14	9.83	17.97	0.06	vertical	7	PASS
			RB25#0	6.89	9.83	16.72	0.05	vertical	7	PASS
10 MHz	Low	QPSK	RB1#0	8.72	9.83	18.55	0.07	vertical	7	PASS
			RB50#0	8.08	9.83	17.91	0.06	vertical	7	PASS
		16QAM	RB1#0	8.69	9.83	18.52	0.07	vertical	7	PASS
			RB50#0	6.96	9.83	16.79	0.05	vertical	7	PASS
	Middle	QPSK	RB1#0	7.41	9.83	17.24	0.05	vertical	7	PASS
			RB50#0	6.66	9.83	16.49	0.04	vertical	7	PASS
		16QAM	RB1#0	7.78	9.83	17.61	0.06	vertical	7	PASS
			RB50#0	7.05	9.83	16.88	0.05	vertical	7	PASS
	High	QPSK	RB1#0	8.59	9.83	18.42	0.07	vertical	7	PASS
			RB50#0	7.98	9.83	17.81	0.06	vertical	7	PASS
		16QAM	RB1#0	8.94	9.83	18.77	0.08	vertical	7	PASS
			RB50#0	7.07	9.83	16.90	0.05	vertical	7	PASS

FDD LTE Band 7										
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP					Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	Antenna Polarization		
5 MHz	Low	QPSK	RB1#0	0.66	19.5	20.16	0.10	vertical	2	PASS
			RB25#0	-0.24	19.5	19.26	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.59	19.5	18.91	0.08	vertical	2	PASS
			RB25#0	-1.09	19.5	18.41	0.07	vertical	2	PASS
	Middle	QPSK	RB1#0	0.21	19.5	19.71	0.09	vertical	2	PASS
			RB25#0	-0.58	19.5	18.92	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.72	19.5	18.78	0.08	vertical	2	PASS
			RB25#0	-1.53	19.5	17.97	0.06	vertical	2	PASS
	High	QPSK	RB1#0	0.42	19.5	19.92	0.10	vertical	2	PASS
			RB25#0	-0.49	19.5	19.01	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.57	19.5	18.93	0.08	vertical	2	PASS
			RB25#0	-1.34	19.5	18.16	0.07	vertical	2	PASS
10 MHz	Low	QPSK	RB1#0	0.35	19.5	19.85	0.10	vertical	2	PASS
			RB50#0	-0.58	19.5	18.92	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.64	19.5	18.86	0.08	vertical	2	PASS
			RB50#0	-1.38	19.5	18.12	0.06	vertical	2	PASS
	Middle	QPSK	RB1#0	0.55	19.5	20.05	0.10	vertical	2	PASS
			RB50#0	-0.17	19.5	19.33	0.09	vertical	2	PASS
		16QAM	RB1#0	-0.56	19.5	18.94	0.08	vertical	2	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 47 of 80

	High	QPSK	RB50#0	-1.55	19.5	17.95	0.06	vertical	2	PASS
			RB1#0	0.6	19.5	20.10	0.10	vertical	2	PASS
		16QAM	RB50#0	-0.2	19.5	19.30	0.09	vertical	2	PASS
			RB1#0	-0.55	19.5	18.95	0.08	vertical	2	PASS
			RB50#0	-1.29	19.5	18.21	0.07	vertical	2	PASS
15 MHz	Low	QPSK	RB1#0	0.78	19.5	20.28	0.11	vertical	2	PASS
			RB75#0	-0.49	19.5	19.01	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.27	19.5	19.23	0.08	vertical	2	PASS
			RB75#0	-1.19	19.5	18.31	0.07	vertical	2	PASS
	Middle	QPSK	RB1#0	0.28	19.5	19.78	0.10	vertical	2	PASS
			RB75#0	-0.21	19.5	19.29	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.4	19.5	19.10	0.08	vertical	2	PASS
			RB75#0	-1.24	19.5	18.26	0.07	vertical	2	PASS
	High	QPSK	RB1#0	0.48	19.5	19.98	0.10	vertical	2	PASS
			RB75#0	-0.22	19.5	19.28	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.24	19.5	19.26	0.08	vertical	2	PASS
			RB75#0	-1.54	19.5	17.96	0.06	vertical	2	PASS
20MHz	Low	QPSK	RB1#0	0.56	19.5	20.06	0.10	vertical	2	PASS
			RB100#0	-0.6	19.5	18.90	0.08	vertical	2	PASS
		16QAM	RB1#0	0.02	19.5	19.52	0.09	vertical	2	PASS
			RB100#0	-1.47	19.5	18.03	0.06	vertical	2	PASS
	Middle	QPSK	RB1#0	0.48	19.5	19.98	0.10	vertical	2	PASS
			RB100#0	-0.08	19.5	19.42	0.09	vertical	2	PASS
		16QAM	RB1#0	-1.02	19.5	18.48	0.07	vertical	2	PASS
			RB100#0	-1.07	19.5	18.43	0.07	vertical	2	PASS
	High	QPSK	RB1#0	0.64	19.5	20.14	0.10	vertical	2	PASS
			RB100#0	-0.19	19.5	19.31	0.09	vertical	2	PASS
		16QAM	RB1#0	-0.32	19.5	19.18	0.08	vertical	2	PASS
			RB100#0	-1.02	19.5	18.48	0.07	vertical	2	PASS

FDD LTE Band 41										
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP					Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	Antenna Polarization		
5 MHz	Low	QPSK	RB1#0	0.66	19.50	20.16	0.10	vertical	2	PASS
			RB25#0	-0.33	19.50	19.17	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.98	19.50	18.52	0.07	vertical	2	PASS
			RB25#0	-1.26	19.50	18.24	0.07	vertical	2	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 48 of 80

	Middle	QPSK	RB1#0	0.32	19.50	19.82	0.10	vertical	2	PASS
			RB25#0	-0.22	19.50	19.28	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.80	19.50	18.70	0.07	vertical	2	PASS
			RB25#0	-1.36	19.50	18.14	0.07	vertical	2	PASS
	High	QPSK	RB1#0	0.74	19.50	20.24	0.11	vertical	2	PASS
			RB25#0	0.24	19.50	19.74	0.09	vertical	2	PASS
		16QAM	RB1#0	-0.48	19.50	19.02	0.08	vertical	2	PASS
			RB25#0	-0.92	19.50	18.58	0.07	vertical	2	PASS
10 MHz	Low	QPSK	RB1#0	0.68	19.50	20.18	0.10	vertical	2	PASS
			RB50#0	-0.12	19.50	19.38	0.09	vertical	2	PASS
		16QAM	RB1#0	-0.30	19.50	19.20	0.08	vertical	2	PASS
			RB50#0	-1.37	19.50	18.13	0.07	vertical	2	PASS
	Middle	QPSK	RB1#0	0.80	19.50	20.30	0.11	vertical	2	PASS
			RB50#0	-0.34	19.50	19.16	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.86	19.50	18.64	0.07	vertical	2	PASS
			RB50#0	-1.19	19.50	18.31	0.07	vertical	2	PASS
	High	QPSK	RB1#0	0.87	19.50	20.37	0.11	vertical	2	PASS
			RB50#0	-0.08	19.50	19.42	0.09	vertical	2	PASS
		16QAM	RB1#0	0.77	19.50	20.27	0.11	vertical	2	PASS
			RB50#0	-1.00	19.50	18.50	0.07	vertical	2	PASS
15 MHz	Low	QPSK	RB1#0	0.61	19.50	20.11	0.10	vertical	2	PASS
			RB75#0	-0.45	19.50	19.05	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.23	19.50	19.27	0.08	vertical	2	PASS
			RB75#0	-0.92	19.50	18.58	0.07	vertical	2	PASS
	Middle	QPSK	RB1#0	0.78	19.50	20.28	0.11	vertical	2	PASS
			RB75#0	-0.48	19.50	19.02	0.08	vertical	2	PASS
		16QAM	RB1#0	-0.95	19.50	18.55	0.07	vertical	2	PASS
			RB75#0	-1.19	19.50	18.31	0.07	vertical	2	PASS
	High	QPSK	RB1#0	1.13	19.50	20.63	0.12	vertical	2	PASS
			RB75#0	-0.12	19.50	19.38	0.09	vertical	2	PASS
		16QAM	RB1#0	0.20	19.50	19.70	0.09	vertical	2	PASS
			RB75#0	-0.74	19.50	18.76	0.08	vertical	2	PASS
20MHz	Low	QPSK	RB1#0	0.00	19.50	19.50	0.09	vertical	2	PASS
			RB100#0	-0.06	19.50	19.44	0.09	vertical	2	PASS
		16QAM	RB1#0	-1.19	19.50	18.31	0.07	vertical	2	PASS
			RB100#0	-1.43	19.50	18.07	0.06	vertical	2	PASS
	Middle	QPSK	RB1#0	0.19	19.50	19.69	0.09	vertical	2	PASS
			RB100#0	-0.21	19.50	19.29	0.08	vertical	2	PASS
		16QAM	RB1#0	-1.40	19.50	18.10	0.06	vertical	2	PASS
			RB100#0	-1.44	19.50	18.06	0.06	vertical	2	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 49 of 80

	High	QPSK	RB1#0	0.99	19.50	20.49	0.11	vertical	2	PASS
			RB100#0	-0.22	19.50	19.28	0.08	vertical	2	PASS
		16QAM	RB1#0	0.01	19.50	19.51	0.09	vertical	2	PASS
			RB100#0	-0.84	19.50	18.66	0.07	vertical	2	PASS

5.1.2 Peak to Average Ratio

Note(s):

- For GSM, GPRS and EGPRS, there are peak power to demonstrate compliance, PAR measurements are not required.
- Test plots please refer to the document "Annex No: EXHIBIT A of SHE20120008-02AE".

Peak to Average Ratio Measurement Results for WCDMA

Test Band	Channel	Peak to Average Ratio (dB)	Limit (W)	Refer to Plot ^{Note 2}	Verdict
WCDMA Band 2	Low	3.12	13	1.1	PASS
	Middle	3.13	13	1.2	PASS
	High	3.12	13	1.3	PASS

WCDMA Band 4	Low	2.91	13	2.1	PASS
	Middle	3.16	13	2.2	PASS
	High	3.11	13	2.3	PASS

WCDMA Band 5	Low	3.00	13	3.1	PASS
	Middle	2.95	13	3.2	PASS
	High	3.02	13	3.3	PASS

Peak to Average Ratio Measurement Results for LTE

FDD LTE Band 2							
Test BW	Channel	Modul.	RB Set (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to Plot ^{Note 2}	Verdict
20 MHz	Low	QPSK	RB1#0	4.33	13	4.1	PASS
			RB100#0	5.11	13	4.2	PASS
		16QAM	RB1#0	5.01	13	4.3	PASS
			RB100#0	6.02	13	4.4	PASS
	Middle	QPSK	RB1#0	4.58	13	4.5	PASS
			RB100#0	5.11	13	4.6	PASS
		16QAM	RB1#0	5.52	13	4.7	PASS
			RB100#0	5.98	13	4.8	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 50 of 80

	High	QPSK	RB1#0	4.27	13	4.9	PASS
			RB100#0	4.91	13	4.10	PASS
		16QAM	RB1#0	5.16	13	4.11	PASS
			RB100#0	5.85	13	4.12	PASS

FDD LTE Band 4							
Test BW	Channel	Modul.	RB Set (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to Plot ^{Note 2}	Verdict
20 MHz	Low	QPSK	RB1#0	4.05	13	5.1	PASS
			RB100#0	5.07	13	5.2	PASS
		16QAM	RB1#0	4.70	13	5.3	PASS
			RB100#0	5.96	13	5.4	PASS
	Middle	QPSK	RB1#0	4.29	13	5.5	PASS
			RB100#0	5.37	13	5.6	PASS
		16QAM	RB1#0	5.25	13	5.7	PASS
			RB100#0	6.20	13	5.8	PASS
	High	QPSK	RB1#0	4.71	13	5.9	PASS
			RB100#0	5.30	13	5.10	PASS
		16QAM	RB1#0	5.70	13	5.11	PASS
			RB100#0	6.20	13	5.12	PASS

FDD LTE Band 5							
Test BW	Channel	Modul.	RB Set (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to Plot ^{Note 2}	Verdict
10 MHz	Low	QPSK	RB1#0	3.97	13	6.1	PASS
			RB50#0	4.93	13	6.2	PASS
		16QAM	RB1#0	4.80	13	6.3	PASS
			RB50#0	5.72	13	6.4	PASS
	Middle	QPSK	RB1#0	3.86	13	6.5	PASS
			RB50#0	4.69	13	6.6	PASS
		16QAM	RB1#0	4.99	13	6.7	PASS
			RB50#0	5.57	13	6.8	PASS
	High	QPSK	RB1#0	3.83	13	6.9	PASS
			RB50#0	4.94	13	6.10	PASS
		16QAM	RB1#0	4.76	13	6.11	PASS
			RB50#0	5.77	13	6.12	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 51 of 80

FDD LTE Band 7							
Test BW	Channel	Modul.	RB Set (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to Plot ^{Note 2}	Verdict
20 MHz	Low	QPSK	RB1#0	4.03	13	7.1	PASS
			RB100#0	5.08	13	7.2	PASS
		16QAM	RB1#0	4.85	13	7.3	PASS
			RB100#0	6.04	13	7.4	PASS
	Middle	QPSK	RB1#0	3.85	13	7.5	PASS
			RB100#0	4.85	13	7.6	PASS
		16QAM	RB1#0	4.82	13	7.7	PASS
			RB100#0	5.78	13	7.8	PASS
	High	QPSK	RB1#0	4.21	13	7.9	PASS
			RB100#0	4.86	13	7.10	PASS
		16QAM	RB1#0	5.15	13	7.11	PASS
			RB100#0	5.74	13	7.12	PASS

TDD LTE Band 41							
Test BW	Channel	Modul.	RB Set (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to Plot ^{Note 2}	Verdict
20 MHz	Low	QPSK	RB1#0	9.00	13	8.1	PASS
			RB100#0	9.49	13	8.2	PASS
		16QAM	RB1#0	8.99	13	8.3	PASS
			RB100#0	9.60	13	8.4	PASS
	Middle	QPSK	RB1#0	8.62	13	8.5	PASS
			RB100#0	8.83	13	8.6	PASS
		16QAM	RB1#0	8.83	13	8.7	PASS
			RB100#0	9.68	13	8.8	PASS
	High	QPSK	RB1#0	6.62	13	8.9	PASS
			RB100#0	9.10	13	8.10	PASS
		16QAM	RB1#0	9.12	13	8.11	PASS
			RB100#0	9.47	13	8.12	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 52 of 80

5.1.3 Occupied Bandwidth

Note(s):

1. All modes were tested, but only the typical data were reported in this report.
2. Test plots please refer to the document "Annex No: EXHIBIT B of SHE20120008-02AE".

Occupied Bandwidth Measurement Results for GSM/WCDMA/CDMA

Test Band	Channel	Measured 99% Occupied Bandwidth (MHz)	Measured -26 dB Occupied Bandwidth (MHz)	Refer to Plot ^{Note 2}
WCDMA Band II	Low	4.114	4.686	1.1
	Middle	4.118	4.697	1.2
	High	4.128	4.698	1.3
WCDMA Band IV	Low	4.123	4.707	2.1
	Middle	4.125	4.687	2.2
	High	4.118	4.696	2.3
WCDMA Band V	Low	4.121	4.711	3.1
	Middle	4.122	4.706	3.2
	High	4.121	4.711	3.3

Occupied Bandwidth Measurement Results for LTE

FDD LTE Band 2						
Test BW	CH	Modul.	RB Set (Size#Offset)	99% Occupied Bandwidth (MHz)	-26 dB Bandwidth (MHz)	Refer to Plot ^{Note 2}
1.4 MHz	Low	QPSK	RB6#0	1.089	1.279	4.1
		16QAM	RB6#0	1.095	1.305	4.2
	Middle	QPSK	RB6#0	1.093	1.303	4.3
		16QAM	RB6#0	1.089	1.280	4.4
	High	QPSK	RB6#0	1.091	1.272	4.5
		16QAM	RB6#0	1.094	1.286	4.6
3 MHz	Low	QPSK	RB15#0	2.706	2.988	4.7
		16QAM	RB15#0	2.703	2.987	4.8
	Middle	QPSK	RB15#0	2.703	2.968	4.9
		16QAM	RB15#0	2.701	2.998	4.10
	High	QPSK	RB15#0	2.704	2.971	4.11
		16QAM	RB15#0	2.705	2.987	4.12
5 MHz	Low	QPSK	RB25#0	4.514	4.973	4.13
		16QAM	RB25#0	4.505	4.976	4.14
	Middle	QPSK	RB25#0	4.506	5.018	4.15
		16QAM	RB25#0	4.516	5.045	4.16
	High	QPSK	RB25#0	4.501	4.980	4.17
		16QAM	RB25#0	4.511	5.030	4.18

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 53 of 80

10 MHz	Low	QPSK	RB50#0	8.961	9.902	4.19
		16QAM	RB50#0	8.958	9.820	4.20
	Middle	QPSK	RB50#0	8.962	9.829	4.21
		16QAM	RB50#0	8.960	9.860	4.22
	High	QPSK	RB50#0	8.957	9.902	4.23
		16QAM	RB50#0	8.952	9.872	4.24
15 MHz	Low	QPSK	RB75#0	13.417	14.673	4.25
		16QAM	RB75#0	13.419	14.684	4.26
	Middle	QPSK	RB75#0	13.396	14.690	4.27
		16QAM	RB75#0	13.411	14.659	4.28
	High	QPSK	RB75#0	13.379	14.588	4.29
		16QAM	RB75#0	13.397	14.663	4.30
20 MHz	Low	QPSK	RB100#0	17.894	19.251	4.31
		16QAM	RB100#0	17.932	19.475	4.32
	Middle	QPSK	RB100#0	17.859	19.386	4.33
		16QAM	RB100#0	17.876	19.418	4.34
	High	QPSK	RB100#0	17.842	19.242	4.35
		16QAM	RB100#0	17.805	19.152	4.36

FDD LTE Band 4						
Test BW	CH	Modul.	RB Set (Size#Offset)	99% Occupied Bandwidth (MHz)	-26 dB Bandwidth (MHz)	Refer to Plot ^{Note 2}
1.4 MHz	Low	QPSK	RB6#0	1.088	1.271	5.1
		16QAM	RB6#0	1.096	1.295	5.2
	Middle	QPSK	RB6#0	1.092	1.301	5.3
		16QAM	RB6#0	1.088	1.284	5.4
	High	QPSK	RB6#0	1.095	1.270	5.5
		16QAM	RB6#0	1.092	1.287	5.6
3 MHz	Low	QPSK	RB15#0	2.700	2.976	5.7
		16QAM	RB15#0	2.702	2.974	5.8
	Middle	QPSK	RB15#0	2.693	2.975	5.9
		16QAM	RB15#0	2.705	2.988	5.10
	High	QPSK	RB15#0	2.705	2.989	5.11
		16QAM	RB15#0	2.701	2.979	5.12
5 MHz	Low	QPSK	RB25#0	4.517	4.992	5.13
		16QAM	RB25#0	4.507	4.971	5.14
	Middle	QPSK	RB25#0	4.503	4.997	5.15
		16QAM	RB25#0	4.519	5.017	5.16
	High	QPSK	RB25#0	4.501	4.996	5.17
		16QAM	RB25#0	4.517	5.006	5.18

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 54 of 80

10 MHz	Low	QPSK	RB50#0	8.969	9.940	5.19
		16QAM	RB50#0	8.968	9.825	5.20
	Middle	QPSK	RB50#0	8.956	9.895	5.21
		16QAM	RB50#0	8.964	9.794	5.22
	High	QPSK	RB50#0	8.963	9.869	5.23
		16QAM	RB50#0	8.958	9.884	5.24
15 MHz	Low	QPSK	RB75#0	13.430	14.761	5.25
		16QAM	RB75#0	13.426	14.635	5.26
	Middle	QPSK	RB75#0	13.418	14.618	5.27
		16QAM	RB75#0	13.439	14.752	5.28
	High	QPSK	RB75#0	13.427	14.680	5.29
		16QAM	RB75#0	13.435	14.697	5.30
20 MHz	Low	QPSK	RB100#0	17.892	19.300	5.31
		16QAM	RB100#0	17.940	19.454	5.32
	Middle	QPSK	RB100#0	17.902	19.433	5.33
		16QAM	RB100#0	17.919	19.520	5.34
	High	QPSK	RB100#0	17.923	19.570	5.35
		16QAM	RB100#0	17.888	19.343	5.36

FDD LTE Band 5						
Test BW	CH	Modul.	RB Set (Size#Offset)	99% Occupied Bandwidth (MHz)	-26 dB Bandwidth (MHz)	Refer to Plot ^{Note 2}
1.4 MHz	Low	QPSK	RB6#0	1.088	1.274	6.1
		16QAM	RB6#0	1.092	1.295	6.2
	Middle	QPSK	RB6#0	1.090	1.301	6.3
		16QAM	RB6#0	1.088	1.276	6.4
	High	QPSK	RB6#0	1.090	1.276	6.5
		16QAM	RB6#0	1.090	1.287	6.6
3 MHz	Low	QPSK	RB15#0	2.699	2.980	6.7
		16QAM	RB15#0	2.701	2.989	6.8
	Middle	QPSK	RB15#0	2.705	2.987	6.9
		16QAM	RB15#0	2.700	2.988	6.10
	High	QPSK	RB15#0	2.703	3.001	6.11
		16QAM	RB15#0	2.697	2.989	6.12
5 MHz	Low	QPSK	RB25#0	4.508	5.020	6.13
		16QAM	RB25#0	4.504	4.973	6.14
	Middle	QPSK	RB25#0	4.498	5.004	6.15
		16QAM	RB25#0	4.514	4.992	6.16
	High	QPSK	RB25#0	4.492	4.998	6.17
		16QAM	RB25#0	4.504	5.011	6.18

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 55 of 80

10 MHz	Low	QPSK	RB50#0	8.964	9.988	6.19
		16QAM	RB50#0	8.958	9.822	6.20
	Middle	QPSK	RB50#0	8.931	9.838	6.21
		16QAM	RB50#0	8.936	9.889	6.22
	High	QPSK	RB50#0	8.969	9.879	6.23
		16QAM	RB50#0	8.968	9.889	6.24

FDD LTE Band 7						
Test BW	CH	Modul.	RB Set (Size#Offset)	99% Occupied Bandwidth (MHz)	-26 dB Bandwidth (MHz)	Refer to Plot ^{Note 2}
5 MHz	Low	QPSK	RB25#0	4.518	5.028	7.1
		16QAM	RB25#0	4.499	4.998	7.2
	Middle	QPSK	RB25#0	4.503	5.017	7.3
		16QAM	RB25#0	4.520	5.030	7.4
	High	QPSK	RB25#0	4.492	4.997	7.5
		16QAM	RB25#0	4.514	5.048	7.6
10 MHz	Low	QPSK	RB50#0	8.979	9.955	7.7
		16QAM	RB50#0	8.972	9.866	7.8
	Middle	QPSK	RB50#0	8.944	9.896	7.9
		16QAM	RB50#0	8.958	9.864	7.10
	High	QPSK	RB50#0	8.948	9.868	7.11
		16QAM	RB50#0	8.947	9.870	7.12
15 MHz	Low	QPSK	RB75#0	13.466	14.861	7.13
		16QAM	RB75#0	13.463	14.715	7.14
	Middle	QPSK	RB75#0	13.386	14.691	7.15
		16QAM	RB75#0	13.425	14.732	7.16
	High	QPSK	RB75#0	13.412	14.757	7.17
		16QAM	RB75#0	13.438	14.750	7.18
20 MHz	Low	QPSK	RB100#0	17.920	19.455	7.19
		16QAM	RB100#0	17.962	19.529	7.20
	Middle	QPSK	RB100#0	17.855	19.366	7.21
		16QAM	RB100#0	17.837	19.589	7.22
	High	QPSK	RB100#0	17.894	19.642	7.23
		16QAM	RB100#0	17.895	19.487	7.24

TDD LTE Band 41						
Test BW	CH	Modul.	RB Set (Size#Offset)	99% Occupied Bandwidth (MHz)	-26 dB Bandwidth (MHz)	Refer to Plot ^{Note 2}
5 MHz	Low	QPSK	RB25#0	4.500	5.017	8.1
		16QAM	RB25#0	4.514	5.194	8.2

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 56 of 80

	Middle	QPSK	RB25#0	4.508	4.960	8.3
		16QAM	RB25#0	4.498	4.998	8.4
	High	QPSK	RB25#0	4.495	4.988	8.5
		16QAM	RB25#0	4.506	4.999	8.6
10 MHz	Low	QPSK	RB50#0	8.993	10.698	8.7
		16QAM	RB50#0	8.982	9.914	8.8
	Middle	QPSK	RB50#0	8.974	10.006	8.9
		16QAM	RB50#0	8.932	9.794	8.10
	High	QPSK	RB50#0	8.975	9.985	8.11
		16QAM	RB50#0	8.974	9.872	8.12
15 MHz	Low	QPSK	RB75#0	13.472	16.156	8.13
		16QAM	RB75#0	13.476	15.956	8.14
	Middle	QPSK	RB75#0	13.428	14.932	8.15
		16QAM	RB75#0	13.505	15.145	8.16
	High	QPSK	RB75#0	13.430	16.298	8.17
		16QAM	RB75#0	13.509	15.187	8.18
20 MHz	Low	QPSK	RB100#0	17.943	19.302	8.19
		16QAM	RB100#0	17.914	19.988	8.20
	Middle	QPSK	RB100#0	17.892	20.508	8.21
		16QAM	RB100#0	17.917	21.849	8.22
	High	QPSK	RB100#0	17.907	19.985	8.23
		16QAM	RB100#0	17.860	19.827	8.24

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 57 of 80

5.1.4 Frequency Stability

Frequency Stability Measurement Results for WCDMA

WCDMA Band II								
Test Conditions		Frequency Deviation						Verdict
Power (V)	Temperature (°C)	Low channel 1852.4 MHz		Middle channel 1880 MHz		High channel 1907.6 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±4631	--	±4700	--	±4769	PASS
	-20	--		--				
	-10	--		--				
	0	-4.31		-0.77		-4.93		
	10	-4.52		-0.99		-5.69		
	20	-6.59		-1.04		-6.29		
	25	-7.11		-1.07		-7.62		
	30	3.75		-1.95		-6.56		
	40	3.60		-2.16		-4.16		
	50	--		--		--		
11.4 V	25	2.92		0.30		-4.13		
12.6 V	25	2.99		-0.33		-5.05		

WCDMA Band IV								
Test Conditions		Frequency Deviation						Verdict
Power (V)	Temperature (°C)	Low channel 1712.4 MHz		Middle channel 1732.4 MHz		High channel 1752.6 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±4281	--	±4331	--	±4381..5	PASS
	-20	--		--				
	-10	--		--				
	0	-13.18		-1.23		-13.68		
	10	-14.69		-1.56		-15.62		
	20	18.56		-0.89		-17.62		
	25	20.79		-0.94		-20.69		
	30	17.62		-0.56		-16.25		
	40	13.23		-1.02		-13.29		
	50	--		--		--		
11.4 V	25	13.90		-1.42		-13.28		
12.6 V	25	13.73		-0.50		-13.15		

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 58 of 80

WCDMA Band V								
Test Conditions		Frequency Deviation						Verdict
Power (V)	Temperature (°C)	Low channel 826.4 MHz		Middle channel 836.4 MHz		High channel 846.6 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±2066	--	±2091	--	±2116.5	PASS
	-20	--		--				
	-10	--		--				
	0	-1.96		-0.39		-1.95		
	10	-1.56		-0.27		-1.86		
	20	2.26		0.56		-1.53		
	25	2.10		0.41		-1.84		
	30	2.06		0.35		-1.31		
	40	1.95		0.02		-1.18		
	50	--		--		--		
11.4 V	25	1.63		0.73		-1.75		
12.6 V	25	1.31		-0.39		-1.02		

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 59 of 80

Frequency Stability Measurement Results for LTE

FDD LTE Band 2						
Test Conditions		Frequency Deviation				Verdict
Power (V)	Temperature (°C)	QPSK 10MHz		16QAM 10MHz		
		Middle channel 1880 MHz		Middle channel 1880 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±4700	--	±4700	PASS
	-20	--		--		
	-10	--		--		
	0	-4.02		-3.42		
	10	-3.59		-3.24		
	20	-3.16		-3.17		
	25	-3.08		-3.16		
	30	-3.65		-2.95		
	40	-4.32		-2.83		
	50	--		--		
11.4 V	25	-4.48	±4700	-3.22	±4700	PASS
12.6 V	25	-3.98		-3.79		

FDD LTE Band 4						
Test Conditions		Frequency Deviation				Verdict
Power (V)	Temperature (°C)	QPSK 10MHz		16QAM 10MHz		
		Middle channel 1732.5 MHz		Middle channel 1732.5 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±4331.25	--	±4331.25	PASS
	-20	--		--		
	-10	--		--		
	0	-8.53		-5.28		
	10	-7.52		-4.48		
	20	-6.23		-4.34		
	25	-2.96		-4.62		
	30	7.26		7.05		
	40	6.48		6.31		
	50	--		--		
11.4 V	25	4.25		6.25		
12.6 V	25	-5.98		-8.00		

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 60 of 80

FDD LTE Band 5						
Test Conditions		Frequency Deviation				Verdict
Power (V)	Temperature (°C)	QPSK 10MHz		16QAM 10MHz		
		Middle channel 836.5 MHz		Middle channel 836.5 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±2091.25	--	±2091.25	PASS
	-20	--		--		
	-10	--		--		
	0	-1.52		-0.73		
	10	-1.27		-0.64		
	20	-0.95		-0.56		
	25	-0.36		-0.31		
	30	-0.95		-1.02		
	40	-1.31		-1.37		
	50	--		--		
11.4 V	25	-0.13		-1.95		
12.6 V	25	-0.86		-0.89		

FDD LTE Band 7						
Test Conditions		Frequency Deviation				Verdict
Power (V)	Temperature (°C)	QPSK 10MHz		16QAM 10MHz		
		Middle channel 2535 MHz		Middle channel 2535 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±6337.5	--	±6337.5	PASS
	-20	--		--		
	-10	--		--		
	0	-3.83		-2.88		
	10	-3.07		-3.31		
	20	-2.84		-3.74		
	25	-2.15		-4.36		
	30	-2.37		-4.28		
	40	-2.88		-4.55		
	50	--		--		
11.4 V	25	-3.13	±6337.5	-3.53	±6337.5	PASS
12.6 V	25	-3.25		-2.92		

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 61 of 80

TDD LTE Band 41						
Test Conditions		Frequency Deviation				Verdict
Power (V)	Temperature (°C)	QPSK 10MHz		16QAM 10MHz		
		Middle channel 2593 MHz		Middle channel 2593 MHz		
		Value (Hz)	Limits (Hz)	Value (Hz)	Limits (Hz)	
12.0 V	-30	--	±6512.5	--	±6512.5	PASS
	-20	--		--		
	-10	--		--		
	0	9.06		6.92		
	10	7.53		7.39		
	20	5.32		3.27		
	25	3.40		1.46		
	30	4.23		5.91		
	40	4.86		4.33		
	50	--		--		
11.4 V	25	5.74		7.14		
12.6 V	25	9.11		6.94		

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 62 of 80

5.1.5 Spurious Emission at Antenna Terminals

Note(s):

1. GSM and EGPRS modes have been verified, and only the worst data with different bandwidth for LTE are shown here.
2. The frequencies of verdict which are marked by "N/A" should be ignored because they are MS carrier frequency.
3. Test plots please refer to the document "Annex No: EXHIBIT C of SHE20120008-02AE".

Spurious Emission Measurement Results for GSM/WCDMA/CDMA

Test Band	Channel	Refer to Plot ^{Note 3}	Verdict
WCDMA Band II	Low	1.1	PASS
	Middle	1.2	PASS
	High	1.3	PASS
WCDMA Band IV	Low	2.1	PASS
	Middle	2.2	PASS
	High	2.3	PASS
WCDMA Band V	Low	3.1	PASS
	Middle	3.2	PASS
	High	3.3	PASS

Spurious Emission Measurement Results for LTE

FDD LTE Band 2					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 3}	Verdict
1.4 MHz	Low	QPSK	RB1#0	4.1	PASS
		16QAM	RB1#0	4.2	PASS
	Middle	QPSK	RB1#0	4.3	PASS
		16QAM	RB1#0	4.4	PASS
	High	QPSK	RB1#0	4.5	PASS
		16QAM	RB1#0	4.6	PASS
3 MHz	Low	QPSK	RB1#0	4.7	PASS
		16QAM	RB1#0	4.8	PASS
	Middle	QPSK	RB1#0	4.9	PASS
		16QAM	RB1#0	4.10	PASS
	High	QPSK	RB1#0	4.11	PASS
		16QAM	RB1#0	4.12	PASS
5 MHz	Low	QPSK	RB1#0	4.13	PASS
		16QAM	RB1#0	4.14	PASS
	Middle	QPSK	RB1#0	4.15	PASS
		16QAM	RB1#0	4.16	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 63 of 80

	High	QPSK	RB1#0	4.17	PASS
		16QAM	RB1#0	4.18	PASS
10 MHz	Low	QPSK	RB1#0	4.19	PASS
		16QAM	RB1#0	4.20	PASS
	Middle	QPSK	RB1#0	4.21	PASS
		16QAM	RB1#0	4.22	PASS
	High	QPSK	RB1#0	4.23	PASS
		16QAM	RB1#0	4.24	PASS
15 MHz	Low	QPSK	RB1#0	4.25	PASS
		16QAM	RB1#0	4.26	PASS
	Middle	QPSK	RB1#0	4.27	PASS
		16QAM	RB1#0	4.28	PASS
	High	QPSK	RB1#0	4.29	PASS
		16QAM	RB1#0	4.30	PASS
20 MHz	Low	QPSK	RB1#0	4.31	PASS
		16QAM	RB1#0	4.32	PASS
	Middle	QPSK	RB1#0	4.33	PASS
		16QAM	RB1#0	4.34	PASS
	High	QPSK	RB1#0	4.35	PASS
		16QAM	RB1#0	4.36	PASS

FDD LTE Band 4					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 3}	Verdict
1.4 MHz	Low	QPSK	RB1#0	5.1	PASS
		16QAM	RB1#0	5.2	PASS
	Middle	QPSK	RB1#0	5.3	PASS
		16QAM	RB1#0	5.4	PASS
	High	QPSK	RB1#0	5.5	PASS
		16QAM	RB1#0	5.6	PASS
3 MHz	Low	QPSK	RB1#0	5.7	PASS
		16QAM	RB1#0	5.8	PASS
	Middle	QPSK	RB1#0	5.9	PASS
		16QAM	RB1#0	5.10	PASS
	High	QPSK	RB1#0	5.11	PASS
		16QAM	RB1#0	5.12	PASS
5 MHz	Low	QPSK	RB1#0	5.13	PASS
		16QAM	RB1#0	5.14	PASS
	Middle	QPSK	RB1#0	5.15	PASS
		16QAM	RB1#0	5.16	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 64 of 80

	High	QPSK	RB1#0	5.17	PASS
		16QAM	RB1#0	5.18	PASS
10 MHz	Low	QPSK	RB1#0	5.19	PASS
		16QAM	RB1#0	5.20	PASS
	Middle	QPSK	RB1#0	5.21	PASS
		16QAM	RB1#0	5.22	PASS
	High	QPSK	RB1#0	5.23	PASS
		16QAM	RB1#0	5.24	PASS
15 MHz	Low	QPSK	RB1#0	5.25	PASS
		16QAM	RB1#0	5.26	PASS
	Middle	QPSK	RB1#0	5.27	PASS
		16QAM	RB1#0	5.28	PASS
	High	QPSK	RB1#0	5.29	PASS
		16QAM	RB1#0	5.30	PASS
20 MHz	Low	QPSK	RB1#0	5.31	PASS
		16QAM	RB1#0	5.32	PASS
	Middle	QPSK	RB1#0	5.33	PASS
		16QAM	RB1#0	5.34	PASS
	High	QPSK	RB1#0	5.35	PASS
		16QAM	RB1#0	5.36	PASS

FDD LTE Band 5					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 3}	Verdict
1.4 MHz	Low	QPSK	RB1#0	6.1	PASS
		16QAM	RB1#0	6.2	PASS
	Middle	QPSK	RB1#0	6.3	PASS
		16QAM	RB1#0	6.4	PASS
	High	QPSK	RB1#0	6.5	PASS
		16QAM	RB1#0	6.6	PASS
3 MHz	Low	QPSK	RB1#0	6.7	PASS
		16QAM	RB1#0	6.8	PASS
	Middle	QPSK	RB1#0	6.9	PASS
		16QAM	RB1#0	6.10	PASS
	High	QPSK	RB1#0	6.11	PASS
		16QAM	RB1#0	6.12	PASS
5 MHz	Low	QPSK	RB1#0	6.13	PASS
		16QAM	RB1#0	6.14	PASS
	Middle	QPSK	RB1#0	6.15	PASS
		16QAM	RB1#0	6.16	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 65 of 80

	High	QPSK	RB1#0	6.17	PASS
		16QAM	RB1#0	6.18	PASS
10 MHz	Low	QPSK	RB1#0	6.19	PASS
		16QAM	RB1#0	6.20	PASS
	Middle	QPSK	RB1#0	6.21	PASS
		16QAM	RB1#0	6.22	PASS
	High	QPSK	RB1#0	6.23	PASS
		16QAM	RB1#0	6.24	PASS

FDD LTE Band 7

Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 3}	Verdict
5 MHz	Low	QPSK	RB1#0	7.1	PASS
		16QAM	RB1#0	7.2	PASS
	Middle	QPSK	RB1#0	7.3	PASS
		16QAM	RB1#0	7.4	PASS
	High	QPSK	RB1#0	7.5	PASS
		16QAM	RB1#0	7.6	PASS
10 MHz	Low	QPSK	RB1#0	7.7	PASS
		16QAM	RB1#0	7.8	PASS
	Middle	QPSK	RB1#0	7.9	PASS
		16QAM	RB1#0	7.10	PASS
	High	QPSK	RB1#0	7.11	PASS
		16QAM	RB1#0	7.12	PASS
15 MHz	Low	QPSK	RB1#0	7.13	PASS
		16QAM	RB1#0	7.14	PASS
	Middle	QPSK	RB1#0	7.15	PASS
		16QAM	RB1#0	7.16	PASS
	High	QPSK	RB1#0	7.17	PASS
		16QAM	RB1#0	7.18	PASS
20 MHz	Low	QPSK	RB1#0	7.19	PASS
		16QAM	RB1#0	7.20	PASS
	Middle	QPSK	RB1#0	7.21	PASS
		16QAM	RB1#0	7.22	PASS
	High	QPSK	RB1#0	7.23	PASS
		16QAM	RB1#0	7.24	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 66 of 80

FDD LTE Band 41					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 3}	Verdict
5 MHz	Low	QPSK	RB1#0	8.1	PASS
		16QAM	RB1#0	8.2	PASS
	Middle	QPSK	RB1#0	8.3	PASS
		16QAM	RB1#0	8.4	PASS
	High	QPSK	RB1#0	8.5	PASS
		16QAM	RB1#0	8.6	PASS
10 MHz	Low	QPSK	RB1#0	8.7	PASS
		16QAM	RB1#0	8.8	PASS
	Middle	QPSK	RB1#0	8.9	PASS
		16QAM	RB1#0	8.10	PASS
	High	QPSK	RB1#0	8.11	PASS
		16QAM	RB1#0	8.12	PASS
15 MHz	Low	QPSK	RB1#0	8.13	PASS
		16QAM	RB1#0	8.14	PASS
	Middle	QPSK	RB1#0	8.15	PASS
		16QAM	RB1#0	8.16	PASS
	High	QPSK	RB1#0	8.17	PASS
		16QAM	RB1#0	8.18	PASS
20 MHz	Low	QPSK	RB1#0	8.19	PASS
		16QAM	RB1#0	8.20	PASS
	Middle	QPSK	RB1#0	8.21	PASS
		16QAM	RB1#0	8.22	PASS
	High	QPSK	RB1#0	8.23	PASS
		16QAM	RB1#0	8.24	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 67 of 80

5.1.6 Band Edge

Note(s):

1. Test plots please refer to the document “Annex No: EXHIBIT D of SHE20120008-02AE”.

Band Edge Measurement Results for GSM/WCDMA/CDMA

Test Band	Channel	Refer to Plot ^{Note 1}	Verdict
WCDMA Band II	Low	1.1	PASS
	High	1.2	PASS
WCDMA Band IV	Low	2.1	PASS
	High	2.2	PASS
WCDMA Band V	Low	3.1	PASS
	High	3.2	PASS

Band Edge Measurement Results for LTE

FDD LTE Band 2					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 1}	Verdict
1.4 MHz	Low	QPSK	RB1#0	4.1	PASS
			RB6#0	4.2	PASS
		16QAM	RB1#0	4.3	PASS
			RB6#0	4.4	PASS
	High	QPSK	RB1#0	4.5	PASS
			RB6#0	4.6	PASS
		16QAM	RB1#0	4.7	PASS
			RB6#0	4.8	PASS
3 MHz	Low	QPSK	RB1#0	4.9	PASS
			RB15#0	4.10	PASS
		16QAM	RB1#0	4.11	PASS
			RB15#0	4.12	PASS
	High	QPSK	RB1#0	4.13	PASS
			RB15#0	4.14	PASS
		16QAM	RB1#0	4.15	PASS
			RB15#0	4.16	PASS
5 MHz	Low	QPSK	RB1#0	4.17	PASS
			RB25#0	4.18	PASS
		16QAM	RB1#0	4.19	PASS
			RB25#0	4.20	PASS
	High	QPSK	RB1#0	4.21	PASS
			RB25#0	4.22	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 68 of 80

		16QAM	RB1#0	4.23	PASS
			RB25#0	4.24	PASS
10 MHz	Low	QPSK	RB1#0	4.25	PASS
			RB50#0	4.26	PASS
		16QAM	RB1#0	4.27	PASS
			RB50#0	4.28	PASS
	High	QPSK	RB1#0	4.29	PASS
			RB50#0	4.30	PASS
		16QAM	RB1#0	4.31	PASS
			RB50#0	4.32	PASS
15 MHz	Low	QPSK	RB1#0	4.33	PASS
			RB75#0	4.34	PASS
		16QAM	RB1#0	4.35	PASS
			RB75#0	4.36	PASS
	High	QPSK	RB1#0	4.37	PASS
			RB75#0	4.38	PASS
		16QAM	RB1#0	4.39	PASS
			RB75#0	4.40	PASS
20 MHz	Low	QPSK	RB1#0	4.41	PASS
			RB100#0	4.42	PASS
		16QAM	RB1#0	4.43	PASS
			RB100#0	4.44	PASS
	High	QPSK	RB1#0	4.45	PASS
			RB100#0	4.46	PASS
		16QAM	RB1#0	4.47	PASS
			RB100#0	4.48	PASS

FDD LTE Band 4					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 1}	Verdict
1.4 MHz	Low	QPSK	RB1#0	5.1	PASS
			RB6#0	5.2	PASS
		16QAM	RB1#0	5.3	PASS
			RB6#0	5.4	PASS
	High	QPSK	RB1#0	5.5	PASS
			RB6#0	5.6	PASS
		16QAM	RB1#0	5.7	PASS
			RB6#0	5.8	PASS
3 MHz	Low	QPSK	RB1#0	5.9	PASS
			RB15#0	5.10	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 69 of 80

		16QAM	RB1#0	5.11	PASS
			RB15#0	5.12	PASS
	High	QPSK	RB1#0	5.13	PASS
			RB15#0	5.14	PASS
		16QAM	RB1#0	5.15	PASS
			RB15#0	5.16	PASS
5 MHz	Low	QPSK	RB1#0	5.17	PASS
			RB25#0	5.18	PASS
		16QAM	RB1#0	5.19	PASS
			RB25#0	5.20	PASS
	High	QPSK	RB1#0	5.21	PASS
			RB25#0	5.22	PASS
		16QAM	RB1#0	5.23	PASS
			RB25#0	5.24	PASS
10 MHz	Low	QPSK	RB1#0	5.25	PASS
			RB50#0	5.26	PASS
		16QAM	RB1#0	5.27	PASS
			RB50#0	5.28	PASS
	High	QPSK	RB1#0	5.29	PASS
			RB50#0	5.30	PASS
		16QAM	RB1#0	5.31	PASS
			RB50#0	5.32	PASS
15 MHz	Low	QPSK	RB1#0	5.33	PASS
			RB75#0	5.34	PASS
		16QAM	RB1#0	5.35	PASS
			RB75#0	5.36	PASS
	High	QPSK	RB1#0	5.37	PASS
			RB75#0	5.38	PASS
		16QAM	RB1#0	5.39	PASS
			RB75#0	5.40	PASS
20 MHz	Low	QPSK	RB1#0	5.41	PASS
			RB100#0	5.42	PASS
		16QAM	RB1#0	5.43	PASS
			RB100#0	5.44	PASS
	High	QPSK	RB1#0	5.45	PASS
			RB100#0	5.46	PASS
		16QAM	RB1#0	5.47	PASS
			RB100#0	5.48	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 70 of 80

FDD LTE Band 5					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 1}	Verdict
1.4 MHz	Low	QPSK	RB1#0	6.1	PASS
			RB6#0	6.2	PASS
		16QAM	RB1#0	6.3	PASS
			RB6#0	6.4	PASS
	High	QPSK	RB1#0	6.5	PASS
			RB6#0	6.6	PASS
		16QAM	RB1#0	6.7	PASS
			RB6#0	6.8	PASS
3 MHz	Low	QPSK	RB1#0	6.9	PASS
			RB15#0	6.10	PASS
		16QAM	RB1#0	6.11	PASS
			RB15#0	6.12	PASS
	High	QPSK	RB1#0	6.13	PASS
			RB15#0	6.14	PASS
		16QAM	RB1#0	6.15	PASS
			RB15#0	6.16	PASS
5 MHz	Low	QPSK	RB1#0	6.17	PASS
			RB25#0	6.18	PASS
		16QAM	RB1#0	6.19	PASS
			RB25#0	6.20	PASS
	High	QPSK	RB1#0	6.21	PASS
			RB25#0	6.22	PASS
		16QAM	RB1#0	6.23	PASS
			RB25#0	6.24	PASS
10 MHz	Low	QPSK	RB1#0	6.25	PASS
			RB50#0	6.26	PASS
		16QAM	RB1#0	6.27	PASS
			RB50#0	6.28	PASS
	High	QPSK	RB1#0	6.29	PASS
			RB50#0	6.30	PASS
		16QAM	RB1#0	6.31	PASS
			RB50#0	6.32	PASS

FDD LTE Band 7					
Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 1}	Verdict
5 MHz	Low	QPSK	RB1#0	7.1	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 71 of 80

		16QAM	RB25#0	7.2	PASS
			RB1#0	7.3	PASS
		QPSK	RB25#0	7.4	PASS
			RB1#0	7.5	PASS
	High	16QAM	RB25#0	7.6	PASS
			RB1#0	7.7	PASS
		QPSK	RB25#0	7.8	PASS
			RB1#0	7.9	PASS
10 MHz	Low	16QAM	RB1#0	7.10	PASS
			RB50#0	7.11	PASS
		QPSK	RB1#0	7.12	PASS
			RB50#0	7.13	PASS
	High	16QAM	RB1#0	7.14	PASS
			RB50#0	7.15	PASS
		QPSK	RB1#0	7.16	PASS
			RB50#0	7.17	PASS
15 MHz	Low	16QAM	RB1#0	7.18	PASS
			RB75#0	7.19	PASS
		QPSK	RB1#0	7.20	PASS
			RB75#0	7.21	PASS
	High	16QAM	RB1#0	7.22	PASS
			RB75#0	7.23	PASS
		QPSK	RB1#0	7.24	PASS
			RB75#0	7.25	PASS
20 MHz	Low	16QAM	RB1#0	7.26	PASS
			RB100#0	7.27	PASS
		QPSK	RB1#0	7.28	PASS
			RB100#0	7.29	PASS
	High	16QAM	RB1#0	7.30	PASS
			RB100#0	7.31	PASS
		QPSK	RB1#0	7.32	PASS
			RB100#0	7.32	PASS

TDD LTE Band 41

Test BW	CH	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 1}	Verdict
5 MHz	Low	QPSK	RB1#0	8.1	PASS
			RB25#0	8.2	PASS
		16QAM	RB1#0	8.3	PASS
			RB25#0	8.4	PASS
	High	QPSK	RB1#0	8.5	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 72 of 80

			RB25#0	8.6	PASS
		16QAM	RB1#0	8.7	PASS
10 MHz	Low	QPSK	RB25#0	8.8	PASS
			RB1#0	8.9	PASS
		16QAM	RB50#0	8.10	PASS
			RB1#0	8.11	PASS
	High	QPSK	RB50#0	8.12	PASS
			RB1#0	8.13	PASS
		16QAM	RB50#0	8.14	PASS
			RB1#0	8.15	PASS
15 MHz	Low	QPSK	RB50#0	8.16	PASS
			RB1#0	8.17	PASS
		16QAM	RB75#0	8.18	PASS
			RB1#0	8.19	PASS
	High	QPSK	RB75#0	8.20	PASS
			RB1#0	8.21	PASS
		16QAM	RB75#0	8.22	PASS
			RB1#0	8.23	PASS
20 MHz	Low	QPSK	RB75#0	8.24	PASS
			RB1#0	8.25	PASS
		16QAM	RB100#0	8.26	PASS
			RB1#0	8.27	PASS
	High	QPSK	RB100#0	8.28	PASS
			RB1#0	8.29	PASS
		16QAM	RB100#0	8.30	PASS
			RB1#0	8.31	PASS
			RB100#0	8.32	PASS

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 73 of 80

5.1.7 Field Strength of Spurious Radiation

Note(s):

1. GSM and EGPRS modes have been verified, only the worst data with different transmit bandwidth for LTE are shown here.
2. The frequencies of verdict which are marked by "N/A" should be ignored because they are MS carrier frequency.
3. When measurement frequency is above 18GHz, there is only noise floor of test system existing. So that there is no test data above 18GHz in the report.
4. Test plots please refer to the document "FCC PCB WCDMA-TX EXHIBIT E of SHE20120008-02AE W2 W4 W5" and "FCC PCB LTE-TX EXHIBIT E of SHE20120008-02AE B2 B4 B5 B7 B41"

Field Strength of Spurious Radiation Measurement Results for GSM/WCDMA/CDMA

Test Band	Channel	Refer to Plot ^{Note 4}	Verdict
WCDMA Band II	Low	1.1	PASS
	Middle	1.2	PASS
	High	1.3	PASS
WCDMA Band IV	Low	2.1	PASS
	Middle	2.2	PASS
	High	2.3	PASS
WCDMA Band V	Low	3.1	PASS
	Middle	3.2	PASS
	High	3.3	PASS

Band Edge Measurement Results for LTE

FDD LTE Band 2					
Test BW	Channel	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 4}	Verdict
20 MHz	Middle	QPSK	RB1#0	--	Pass

FDD LTE Band 4					
Test BW	Channel	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 4}	Verdict
20 MHz	Middle	QPSK	RB1#0	--	Pass

FDD LTE Band 5					
Test BW	Channel	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 4}	Verdict
10 MHz	Middle	QPSK	RB1#0	--	Pass

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 74 of 80

FDD LTE Band 7					
Test BW	Channel	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 4}	Verdict
20 MHz	Middle	QPSK	RB1#0	--	Pass

FDD LTE Band 41					
Test BW	Channel	Modul.	RB Set (Size#Offset)	Refer to Plot ^{Note 4}	Verdict
20 MHz	Middle	QPSK	RB1#0	--	Pass

5.1.8 AC Power-line Conducted Emissions

Note: Only the worst test results were recorded in this report.


TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 75 of 80

Emission Test case_FCC_CE_FCC PART 15B_Class B

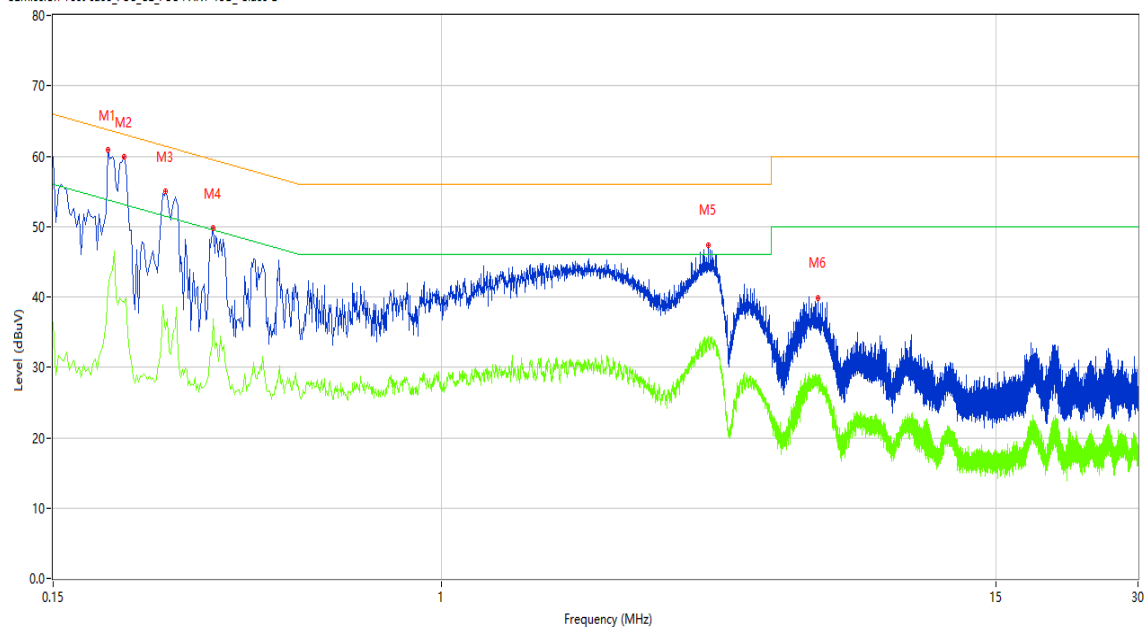

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.196	60.19	9.65	63.78	-3.59	Peak	L	Pass
1*	0.196	56.94	9.65	63.78	-6.84	QP	L	Pass
1**	0.196	41.10	9.65	53.78	-12.68	AV	L	Pass
2	0.212	58.79	9.67	63.13	-4.34	Peak	L	Pass
2*	0.212	54.44	9.67	63.13	-8.69	QP	L	Pass
2**	0.212	39.25	9.67	53.13	-13.88	AV	L	Pass
3	0.260	53.43	9.70	61.43	-8.00	Peak	L	Pass
3*	0.260	50.49	9.70	61.43	-10.94	QP	L	Pass
3**	0.260	35.39	9.70	51.43	-16.04	AV	L	Pass
4	0.328	48.27	9.71	59.50	-11.23	Peak	L	Pass
4*	0.328	43.94	9.71	59.50	-15.56	QP	L	Pass
4**	0.328	36.83	9.71	49.50	-12.67	AV	L	Pass
5	3.676	47.05	9.68	56.00	-8.95	Peak	L	Pass
5*	3.676	42.40	9.68	56.00	-13.60	QP	L	Pass
5**	3.676	34.47	9.68	46.00	-11.53	AV	L	Pass
6	6.282	40.15	9.69	60.00	-19.85	Peak	L	Pass
6*	6.282	34.26	9.69	60.00	-25.74	QP	L	Pass
6**	6.282	27.84	9.69	50.00	-22.16	AV	L	Pass


TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 76 of 80

Cémission Test case_FCC_CE_FCC PART 15B_Class B

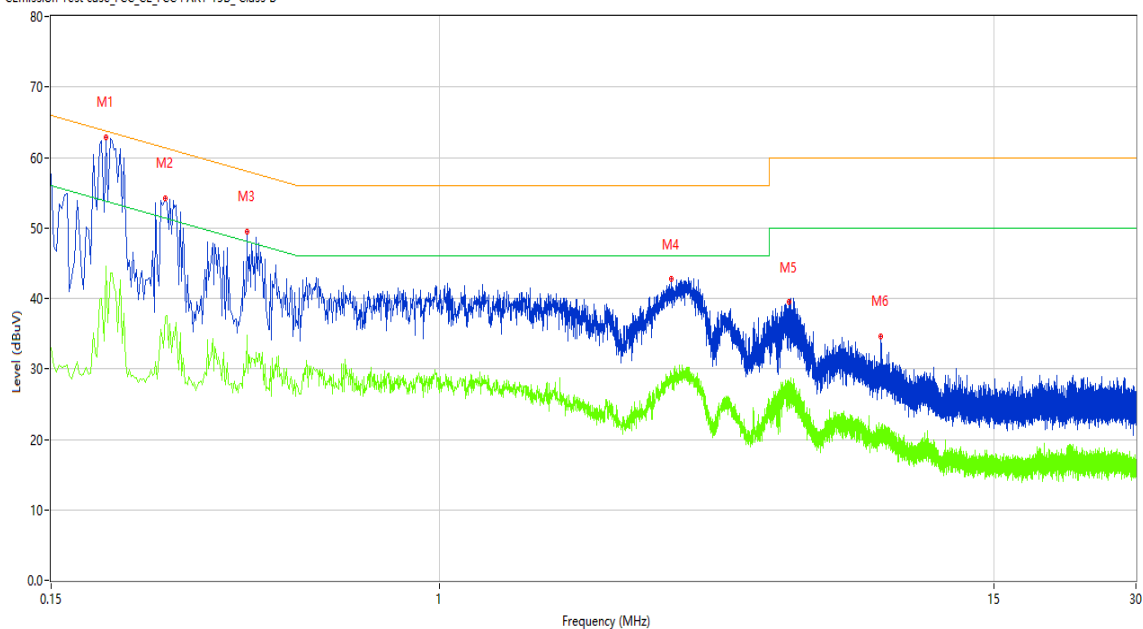

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.196	63.09	9.65	63.78	-0.69	Peak	N	Pass
1*	0.196	60.38	9.65	63.78	-3.40	QP	N	Pass
1**	0.196	44.50	9.65	53.78	-9.28	AV	N	Pass
2	0.262	55.43	9.70	61.37	-5.94	Peak	N	Pass
2*	0.262	51.56	9.70	61.37	-9.81	QP	N	Pass
2**	0.262	37.32	9.70	51.37	-14.05	AV	N	Pass
3	0.390	48.85	9.73	58.06	-9.21	Peak	N	Pass
3*	0.390	43.42	9.73	58.06	-14.64	QP	N	Pass
3**	0.390	34.75	9.73	48.06	-13.31	AV	N	Pass
4	3.098	42.75	9.69	56.00	-13.25	Peak	N	Pass
4*	3.098	37.98	9.69	56.00	-18.02	QP	N	Pass
4**	3.098	29.39	9.69	46.00	-16.61	AV	N	Pass
5	5.514	41.26	9.70	60.00	-18.74	Peak	N	Pass
5*	5.514	33.88	9.70	60.00	-26.12	QP	N	Pass
5**	5.514	26.52	9.70	50.00	-23.48	AV	N	Pass
6	8.630	35.24	9.67	60.00	-24.76	Peak	N	Pass
6*	8.630	25.87	9.67	60.00	-34.13	QP	N	Pass
6**	8.630	21.58	9.67	50.00	-28.42	AV	N	Pass

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 77 of 80

6 Photos

6.1 Photographs of the Sample



All of the sample



Front of the sample

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 78 of 80



Rear of the sample



Adapter

TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 79 of 80

6.2 Set-up for Conducted Emissions



6.3 Set-up for Conducted RF test at Antenna Port



TEST REPORT

Report No.: SHE20120008-02AE

Date: 2021-01-15

Page 80 of 80

6.4 Set-up for Spurious Emissions below 1GHz



Below 1 GHz

6.5 Set-up for Spurious Emissions above 1GHz



Above 1GHz

End of the report