

FCC TEST REPORT

For

Shenzhen Huaxiao technology co., Ltd.
Wind and Solar Hybrid Charge Controller

Model No.: SUSIE4

Prepared For : Shenzhen Huaxiao technology co., Ltd.
Address : 620-623,Bldg.C,Qinghu Industrial Park,Qingxiang Road,Longhua
District,Shenzhen.

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : SZAWW171207002-01
Date of Test : Dec. 07,2017~Jan. 04, 2018
Date of Report : Jan. 04, 2018

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. Description Of Test Setup.....	7
1.6. Test Equipment List.....	9
1.7. Measurement Uncertainty.....	10
1.8. Description of Test Facility.....	10
2. Summary of Test.....	11
2.1. Summary of test result.....	11
2.2. Test mode.....	11
3. RF Output Power Test.....	13
3.1. Test Standard and Limit.....	13
3.2. Test Setup.....	13
3.3. Test Procedure.....	13
3.4. Test Data.....	13
4. Peak-Average Ratio.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	16
4.4. Test Data.....	16
5. Modulation Characteristic.....	17
6. Occupied Bandwidth.....	18
6.1. Test Standard and Limit.....	18
6.2. Test Setup.....	18
6.3. Test Procedure.....	18
6.4. Test Data.....	18
7. Spurious Emissions at Antenna Terminals.....	20
7.1. Test Standard and Limit.....	20
7.2. Test Setup.....	20
7.3. Test Procedure.....	20
7.4. Test Data.....	20
8. Spurious Radiated Emissions.....	23
8.1. Test Standard and Limit.....	23
8.2. Test Setup.....	23
8.3. Test Procedure.....	23
8.4. Test Data.....	23
9. Band Edge Compliance.....	26
9.1. Test Standard and Limit.....	26
9.2. Test Setup.....	26
9.3. Test Procedure.....	26

9.4. Test Data.....	26
10. Frequency Stability.....	29
10.1. Test Standard and Limit.....	29
10.2. Test Setup.....	29
10.3. Test Procedure.....	29
10.4. Test Data.....	29
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	31
APPENDIX II -- PHOTOGRAPH.....	32

Anbotek

TEST REPORT

Applicant : Shenzhen Huaxiao technology co., Ltd.
Manufacturer : Shenzhen Huaxiao technology co., Ltd.
Product Name : Wind and Solar Hybrid Charge Controller
Model No. : SUSIE4
Trade Mark : N.A
Rating(s) : Battery Voltage: DC 12V/24V, wind Input: 1500W, Max voltage 200V
Solar Input: 500W, Max voltage 60V
Output: DC 12/24V, Load 500W

Test Standard(s) : FCC PART 2, FCC Part 22(H), FCC Part 24(E)

Test Method(s) : ANSI/TIAC603 D: 2010

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Sept. 10~30, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Huaxiao technology co., Ltd.
Address	:	620-623,Bldg.C,Qinghu Industrial Park,Qingxiang Road,Longhua District,Shenzhen.
Manufacturer	:	Shenzhen Huaxiao technology co., Ltd.
Address	:	620-623,Bldg.C,Qinghu Industrial Park,Qingxiang Road,Longhua District,Shenzhen.

1.2. Description of Device (EUT)

Product Name	:	Wind and Solar Hybrid Charge Controller	
Model No.	:	SUSIE4	
Trade Mark	:	N.A	
Test Power Supply		DC 24V from lead acid battery	
Product Description	:	Operation Frequency:	GSM850 TX:824.2~848.8 MHz; RX:869.2~893.8 MHz PCS1900 TX:1850.2~1909.8 MHz; RX:1930.2~1989.8 MHz
		GPRS Class	8/10
		Modulation Type:	GPRS: GMSK
		Antenna Type:	Rod Antenna
		Antenna Gain(Peak):	3 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual. 2)This report is for GPRS			

1.3. Auxiliary Equipment Used During Test

N/A	:	N/A
-----	---	-----


1.4. Description of Test Modes

The following is the description of how the EUT is exercised during testing.



Test	Description Of Operation
Emissions Testing	The EUT was communicating with base station and set to work at maximum output power.
Others Testing	The EUT was communicating with base station and set to work at maximum output power.

1.5. Description Of Test Setup

1.5.1 Conducted Test Setup

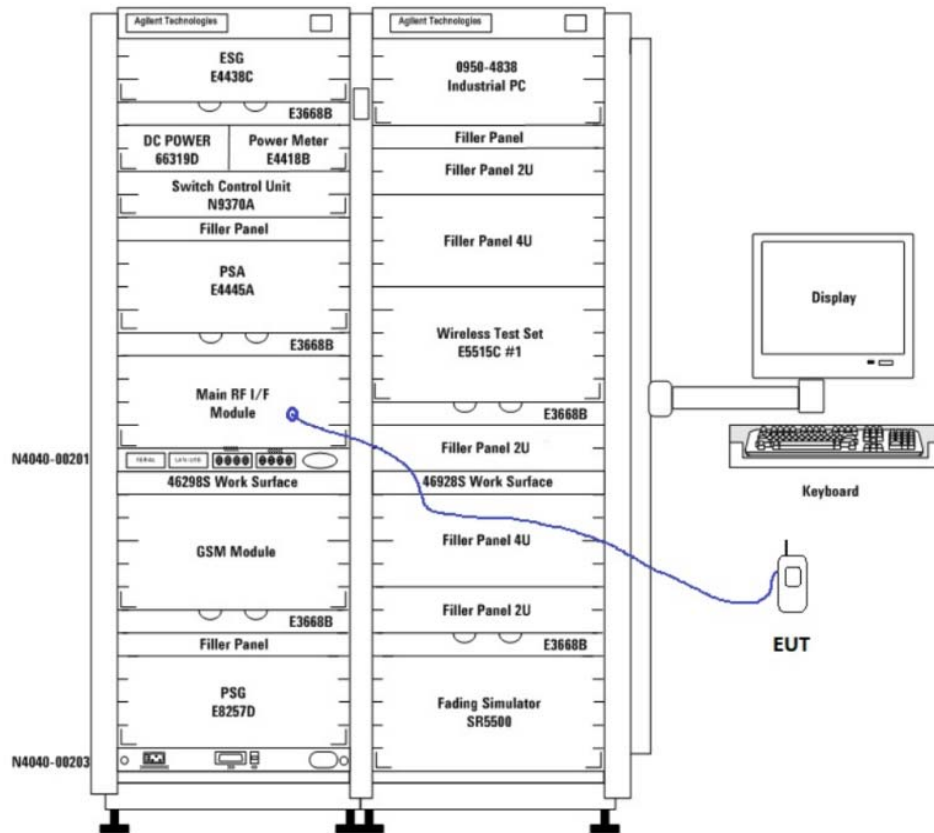

1.5.2 Radiated Test Setup

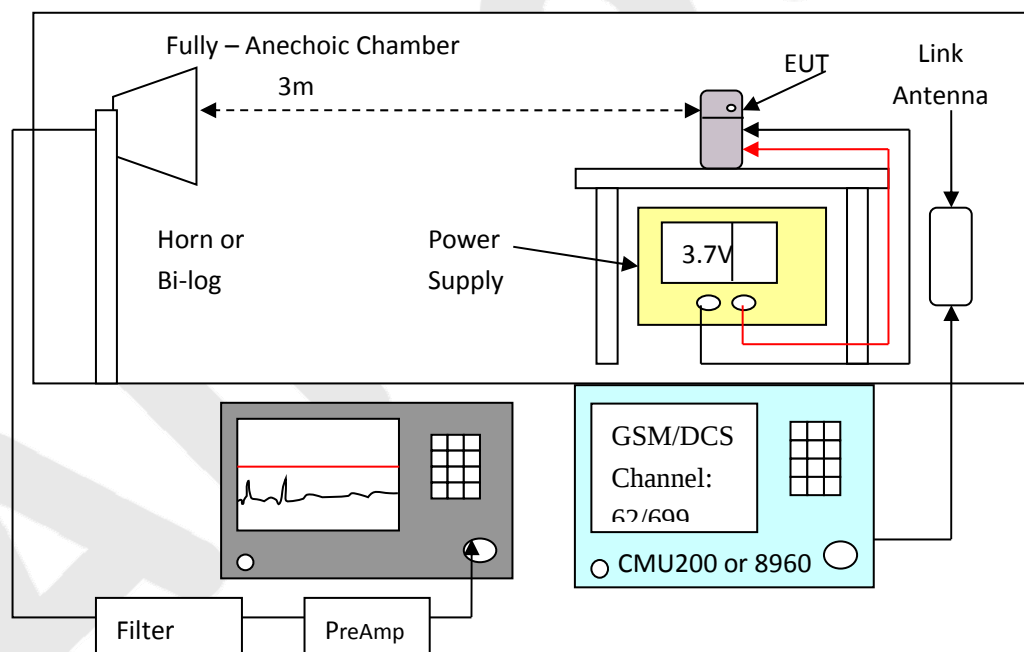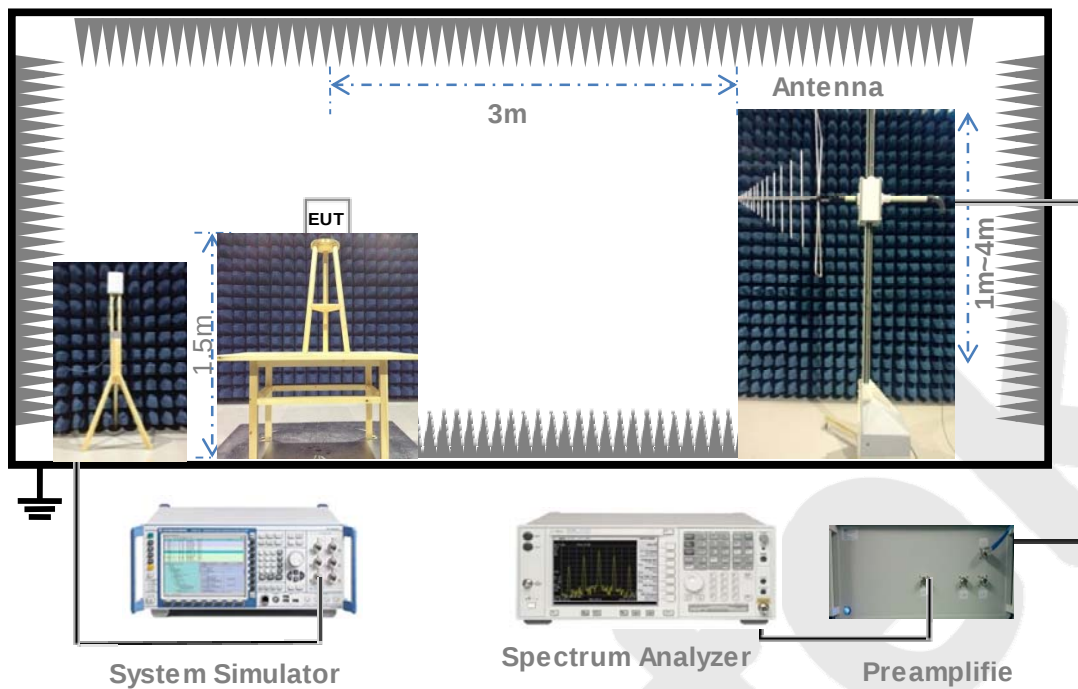

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
14.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
17.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
18.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year
19	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year

1.7. Measurement Uncertainty

Maximum measurement uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1,5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$
Humidity	$\pm 5 \%$
DC and low frequency voltages	$\pm 3 \%$
Time	$\pm 5 \%$
Duty Cycle	$\pm 5 \%$

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test

2.1. Summary of test result

FCC Rules	Description of Test	Result
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10); § 27.50(d.4)	RF Output Power	Compliance
§ 24.232 (d); § 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1047	Modulation Characteristics	N/A
§ 2.1049; § 22.905; § 22.917; § 24.238; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a); § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a); § 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a); § 27.53(h)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

2.2. Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level in each test mode and channel as below:

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa


Mode	Channel	Frequency(MHz)
GPRS 850	128	824.2
	190	836.6
	251	848.8
GPRS 1900	512	1850.2
	661	1880.0
	810	1909.8

3. RF Output Power Test

3.1. Test Standard and Limit

Spec	Item	Requirement
§22.913 (a)	a)	ERP:38.45dBm
§24.232 (c)	b)	EIRP:33dBm

3.2. Test Setup

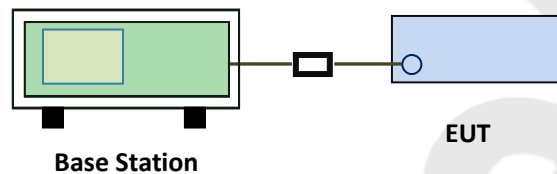

3.3. Test Procedure

For Conducted Power:

The transmitter output port was connected to base station.

Set EUT at maximum power through base station.

Select lowest, middle, and highest channels for each band and different test mode.

For ERP/EIRP:

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

3.4. Test Data

Please to see the following pages

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				GSM1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GPRS Multi-Slot Class 8 (1 uplink),GMSK	30.72	30.65	30.58	30±1	29.30	29.48	29.33	29±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	29.72	29.66	29.63	29±1	28.21	28.41	28.30	28±1
Remark: GPRS, CS1 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link								

Radiated Output power

ERP & EIRP

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	20.49	V	6.8	0.53	26.76	38.45
824.2	20.26	H	6.8	0.53	26.53	38.45
836.6	20.64	V	6.8	0.53	26.91	38.45
836.6	19.78	H	6.8	0.53	26.05	38.45
848.8	20.17	V	6.9	0.53	26.54	38.45
848.8	20.56	H	6.9	0.53	26.93	38.45

EIRP for PCS Band (Part 24E)


Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	18.36	V	7.88	0.85	25.39	33
1850.2	18.27	H	7.88	0.85	25.30	33
1880	18.54	V	7.88	0.85	25.57	33
1880	19.25	H	7.88	0.85	26.28	33
1909.8	18.33	V	7.86	0.85	25.34	33
1909.8	18.47	H	7.86	0.85	25.48	33

4. Peak-Average Ratio

4.1. Test Standard and Limit

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2. Test Setup

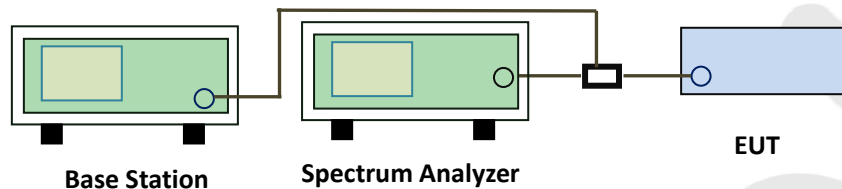

4.3. Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.4. Test Data

GPRS850

Frequency (MHz)	Peak-Average Ratio(PAR)
824.2	2.64
836.6	2.65
848.8	2.65

GPRS1900

Frequency (MHz)	Peak-Average Ratio(PAR)
1850.2	2.79
1880.0	2.78
1909.8	2.79

5. Modulation Characteristic

According to FCC § 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


Anbotek

6. Occupied Bandwidth

6.1. Test Standard and Limit

Spec	Item	Requirement
§2.1049, §22.917, §22.905	a)	99% Occupied Bandwidth(kHz)
§24.238 §27.53(a)	b)	26 dB Bandwidth(kHz)

6.2. Test Setup

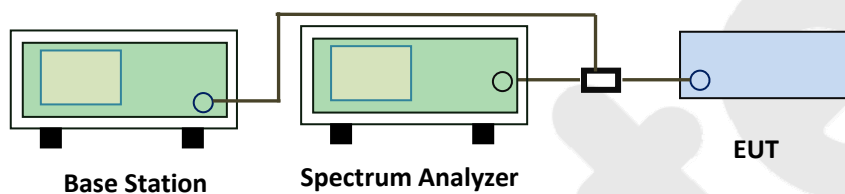

6.3. Test Procedure

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

6.4. Test Data


Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	246.6	318
190	836.6	246.6	320
251	848.8	247.4	315

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	245.9	316
661	1880.0	244.9	310
810	1909.8	245.3	319

Test Plots

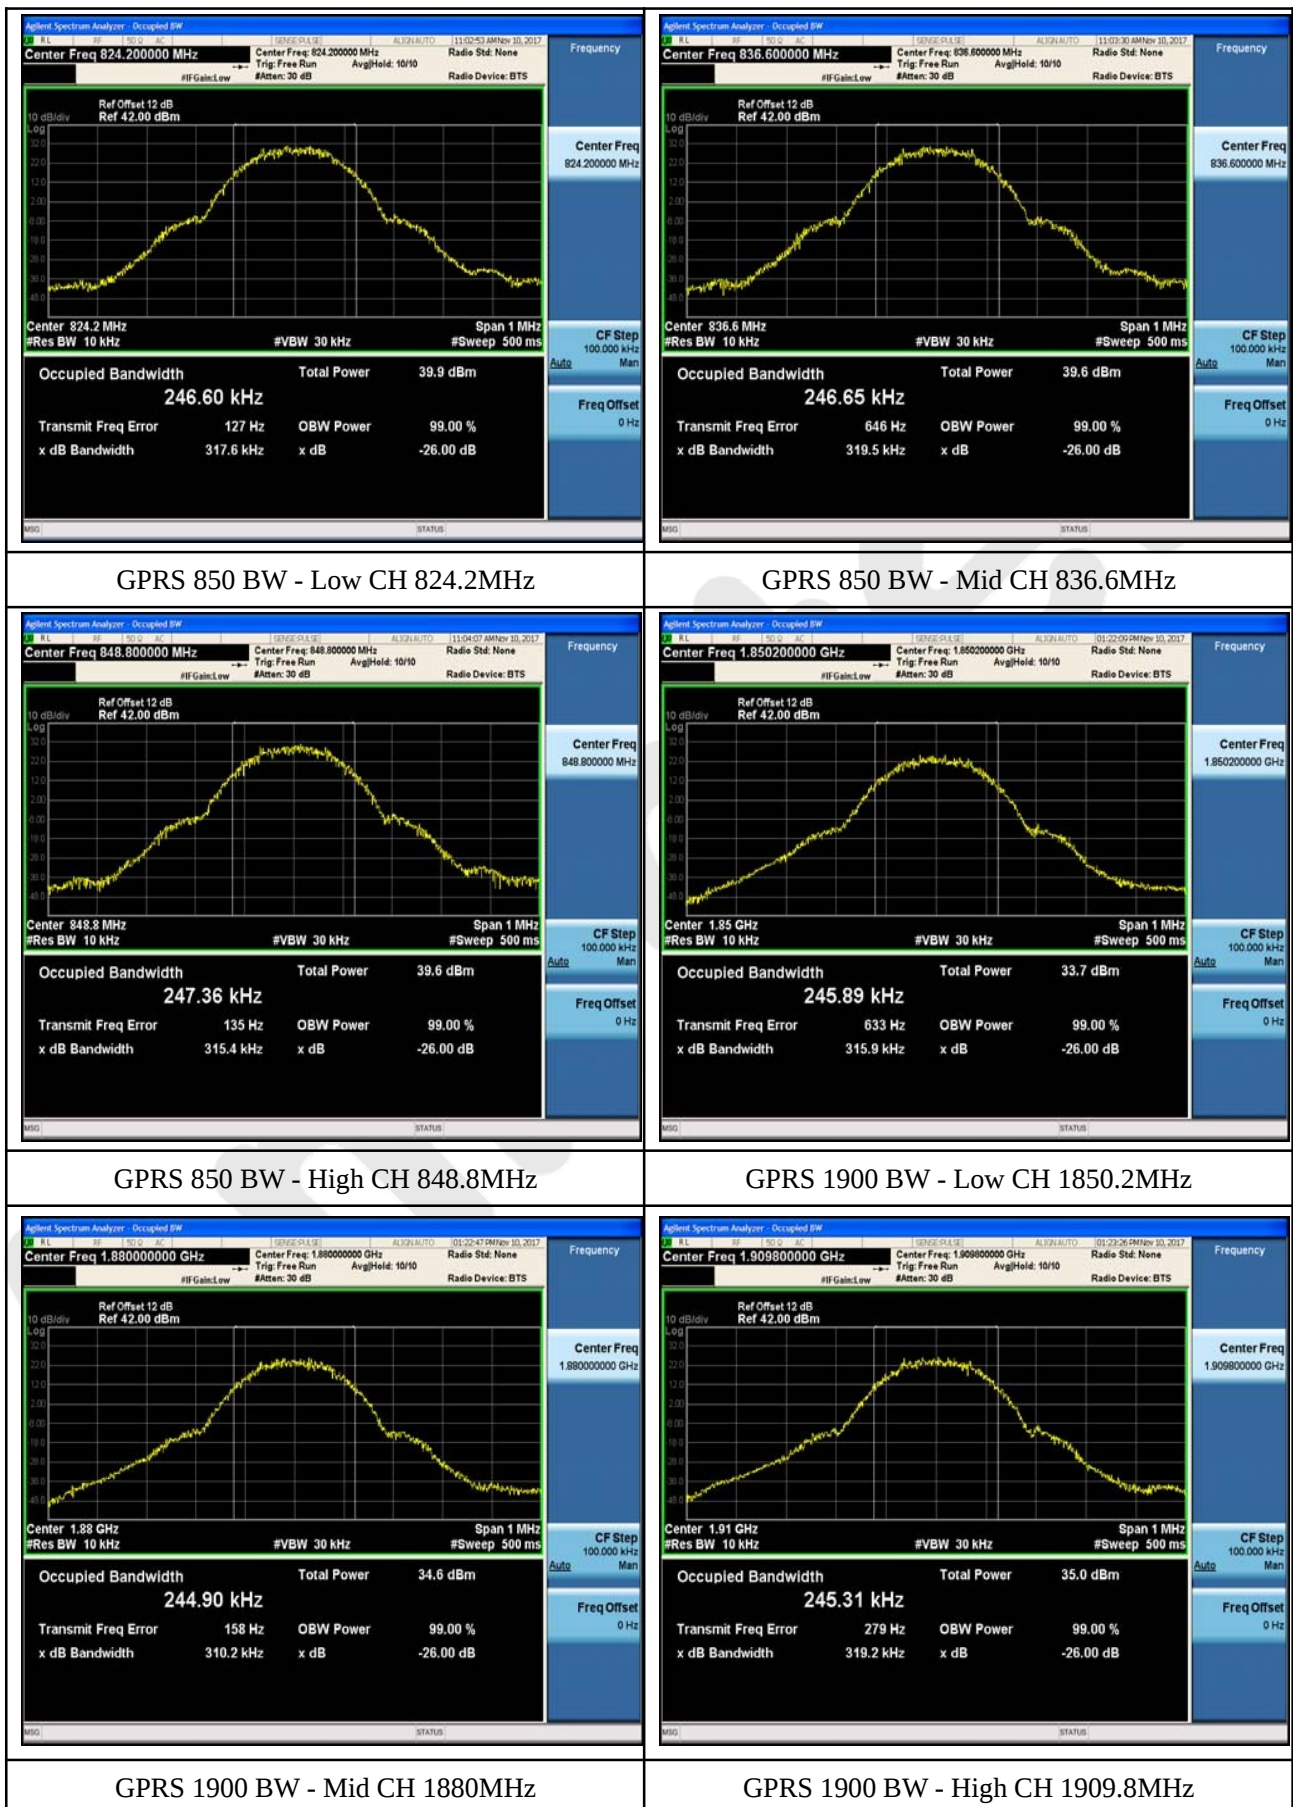


7. Spurious Emissions at Antenna Terminals

7.1. Test Standard and Limit

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency outside the frequency band by at least $(43 + 10 \log P)$ dB, in this case, -13dBm.

7.2. Test Setup

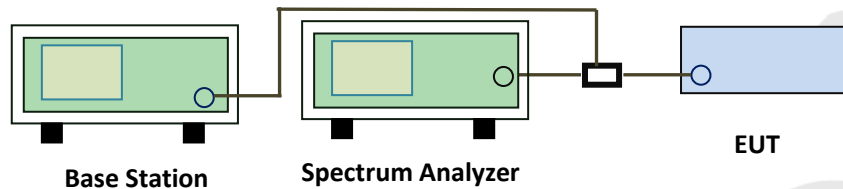


7.3. Test Procedure


1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. For the out of band: Set the RBW= 1MHz, VBW = 3MHz, Start=30MHz, Stop= 10th harmonic.

7.4. Test Data

Test Plots

Cellular Band (Part 22H) result

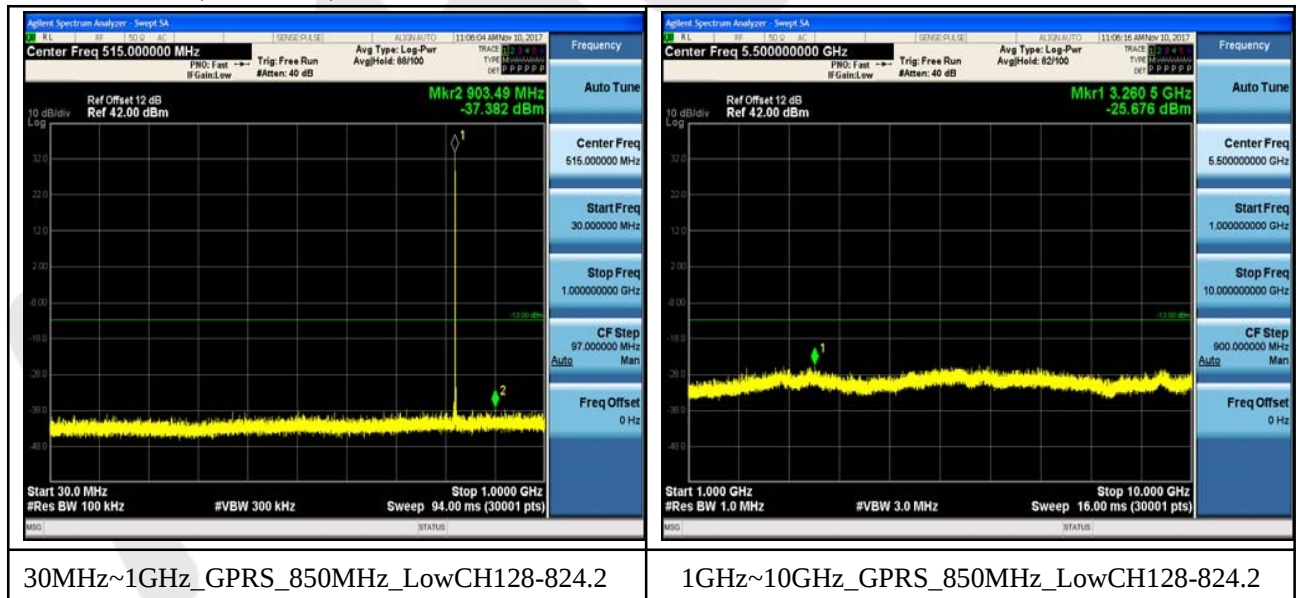


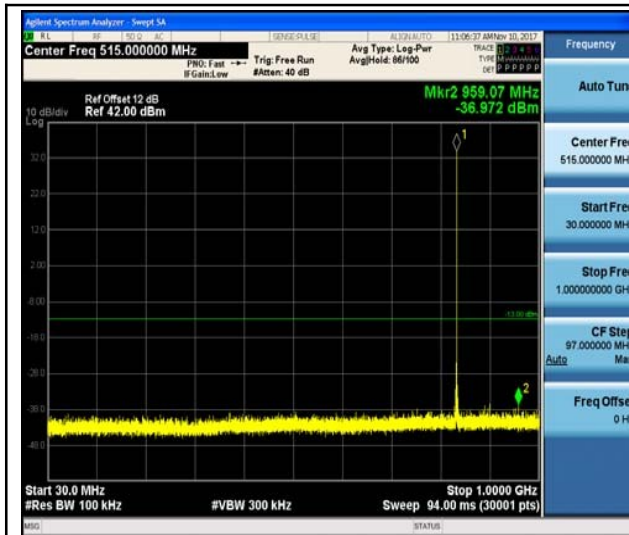

30MHz~1GHz_GPRS_850MHz_MidCH190-836.6



1GHz~10GHz_GPRS_850MHz_MidCH190-836.6

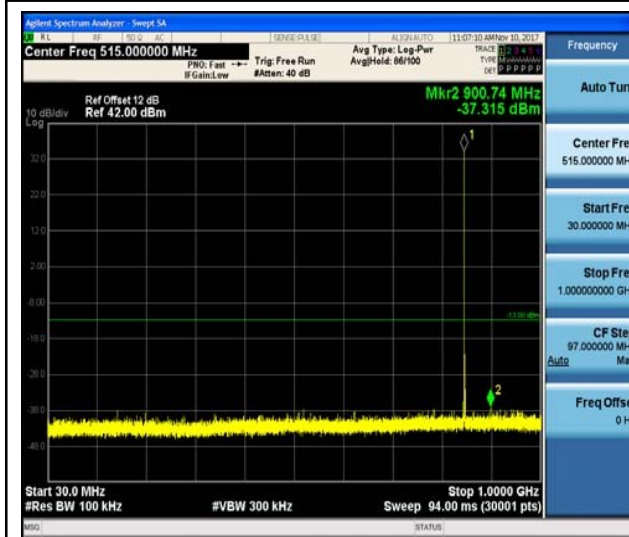


30MHz~1GHz_GPRS_850MHz_HighCH251-848.8



1GHz~10GHz_GPRS_850MHz_HighCH251-848.8


PCS Band (Part24E) result

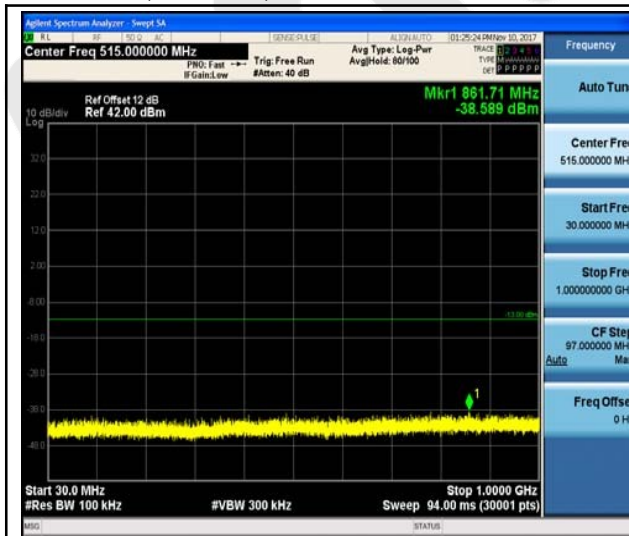

30MHz~1GHz_GPRS_1900MHz_LowCH512-1850.2




1GHz~20GHz_GPRS_1900MHz_LowCH512-1850.2

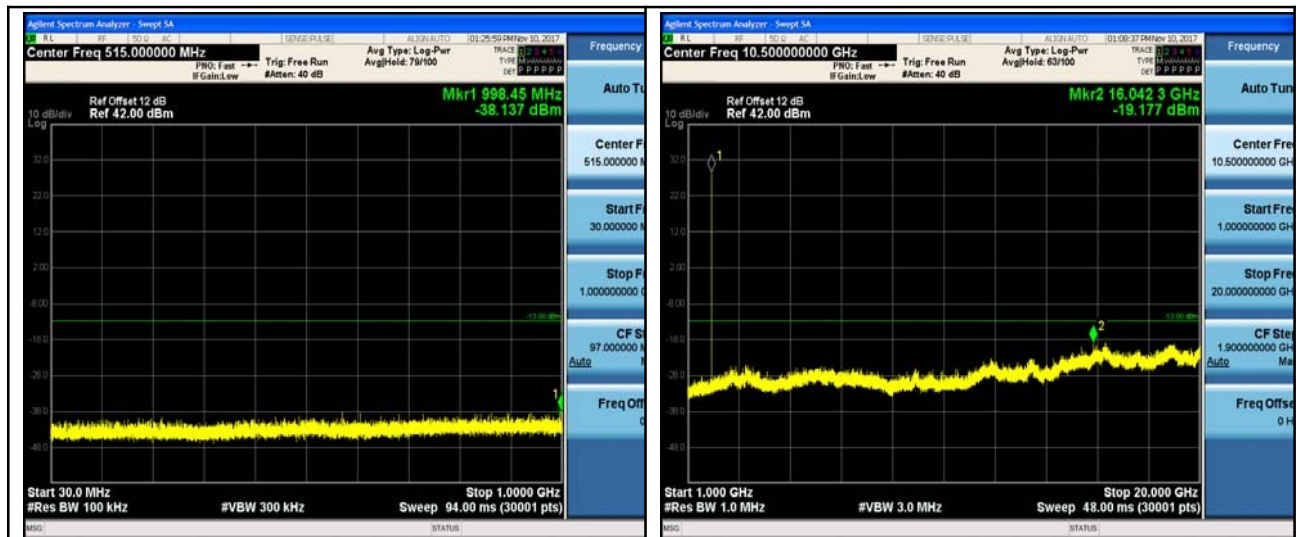

30MHz~1GHz_GPRS_1900MHz_MidCH661-1880

1GHz~20GHz_GPRS_1900MHz_MidCH661-1880

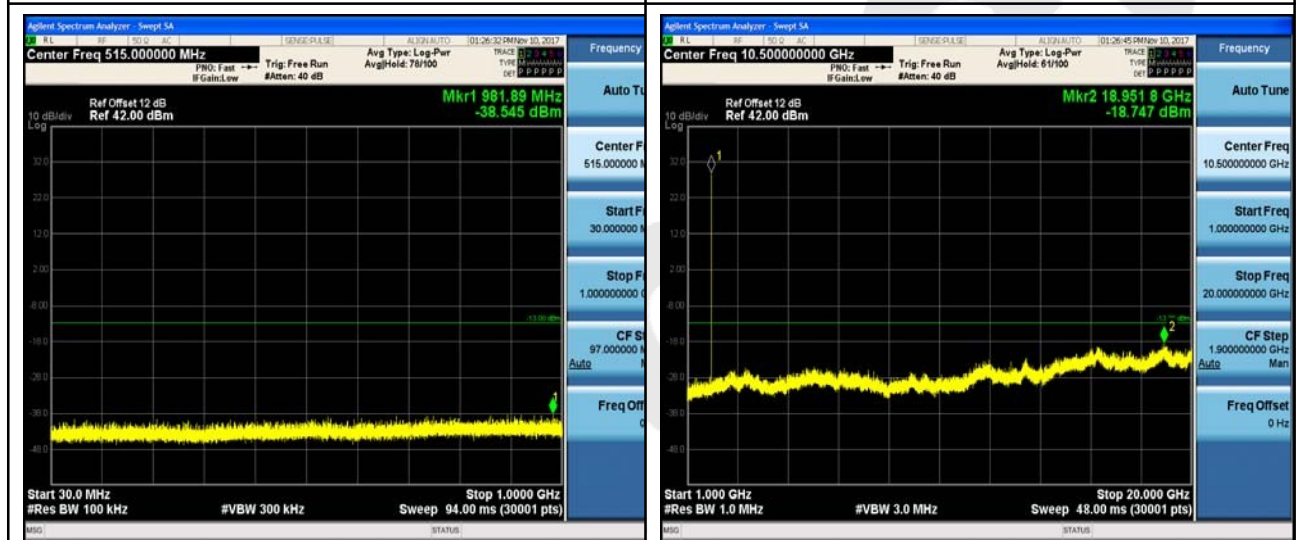

30MHz~1GHzGPRS_1900MHz_HighCH810-1909.8


1GHz~20GHz_GPRS_1900MHz_HighCH810-1909.8

8. Spurious Radiated Emissions

8.1. Test Standard and Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

8.2. Test Setup

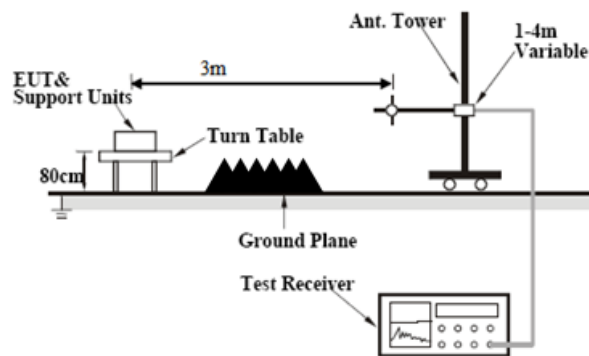

8.3. Test Procedure

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Sample Calculation:

EUT Field Strength = Raw Amplitude (dB μ V/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)

8.4. Test Data

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1646.0	-50.76	V	9.76	0.47	-41.47	-13	-28.47
3295.0	-46.15	V	12.75	0.69	-34.09	-13	-21.09
1646.0	-44.27	H	9.76	0.47	-34.98	-13	-21.98
3295.0	-44.10	H	12.75	0.69	-32.04	-13	-19.04

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3346.0	-48.31	V	12.86	0.69	-36.14	-13	-23.14
7528.0	-47.06	V	11.30	1.04	-36.80	-13	-23.80
1671.5	-47.10	H	9.93	0.48	-37.65	-13	-24.65
3346.0	-43.58	H	12.86	0.69	-31.41	-13	-18.41

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3397.0	-49.89	V	12.96	0.69	-37.62	-13	-24.62
7638.5	-49.49	V	11.46	1.07	-39.11	-13	-26.11
1697.0	-48.03	H	10.11	0.48	-38.40	-13	-25.40
3397.0	-46.74	H	12.96	0.69	-34.47	-13	-21.47

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
7400.5	-35.08	V	11.02	1.02	-25.08	-13	-12.08
9253.5	-37.70	V	11.70	1.14	-27.13	-13	-14.13
7400.5	-35.16	H	11.02	1.02	-35.16	-13	-12.16
9253.5	-42.51	H	11.70	1.14	-21.94	-13	-18.94

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
7519.5	-35.15	V	11.28	1.05	-24.91	-13	-11.91
9398.0	-40.01	V	11.59	1.12	-29.54	-13	-16.54
7519.5	-34.52	H	11.28	1.05	-24.28	-13	-11.28
9398.0	-33.79	H	11.59	1.12	-23.32	-13	-10.32

High channel


Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
7638.5	-37.78	V	11.46	1.08	-27.39	-13	-14.39
9551.0	-39.87	V	11.85	1.16	-29.17	-13	-16.17
7638.5	-36.67	H	11.46	1.08	-26.28	-13	-13.28
9551.0	-44.18	H	11.85	1.16	-33.48	-13	-20.48

9. Band Edge Compliance

9.1. Test Standard and Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

9.2. Test Setup

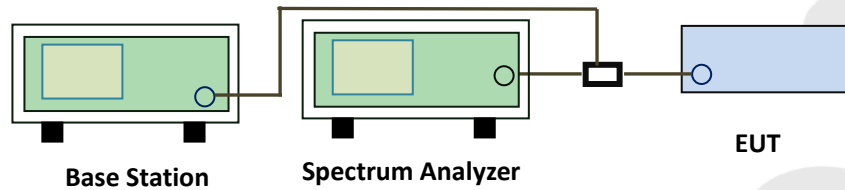

9.3. Test Procedure

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2. For the bandedge: 2G:Set the RBW=5.1KHz, VBW = 10KHz, Sweep time= Auto

9.4. Test Data

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824	-17.109	-13
849	-16.721	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850	-19.313	-13
1910	-18.216	-13

Test Plots

Cellular Band (Part 22H) result




Test Mode: GPRS 850 - Low Channel




Test Mode: GPRS 850 - High Channel

PCS Band (Part24E) result

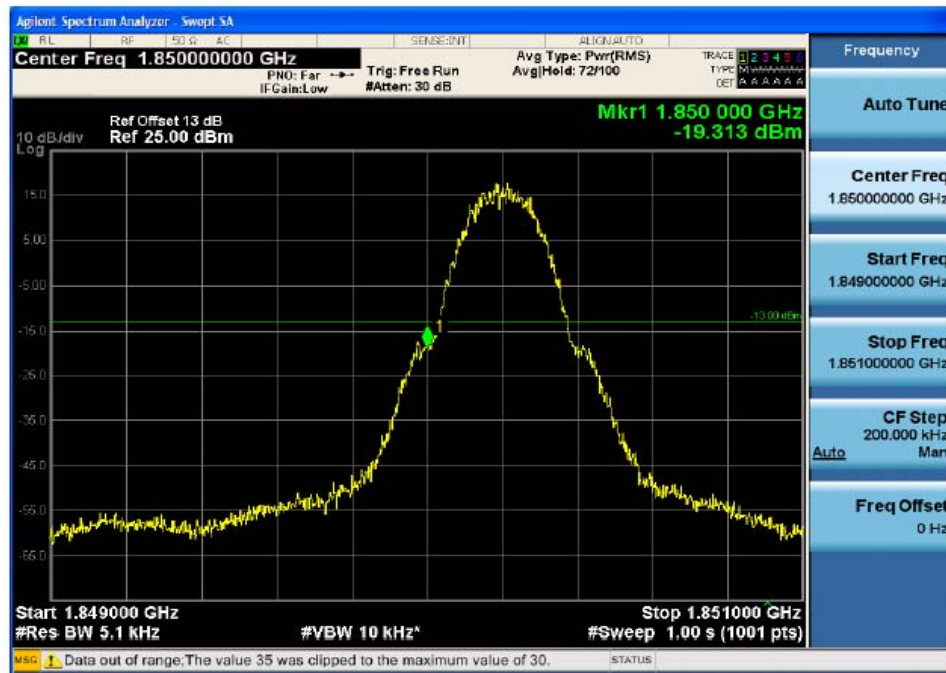

Test Mode: GPRS1900 - Low Channel

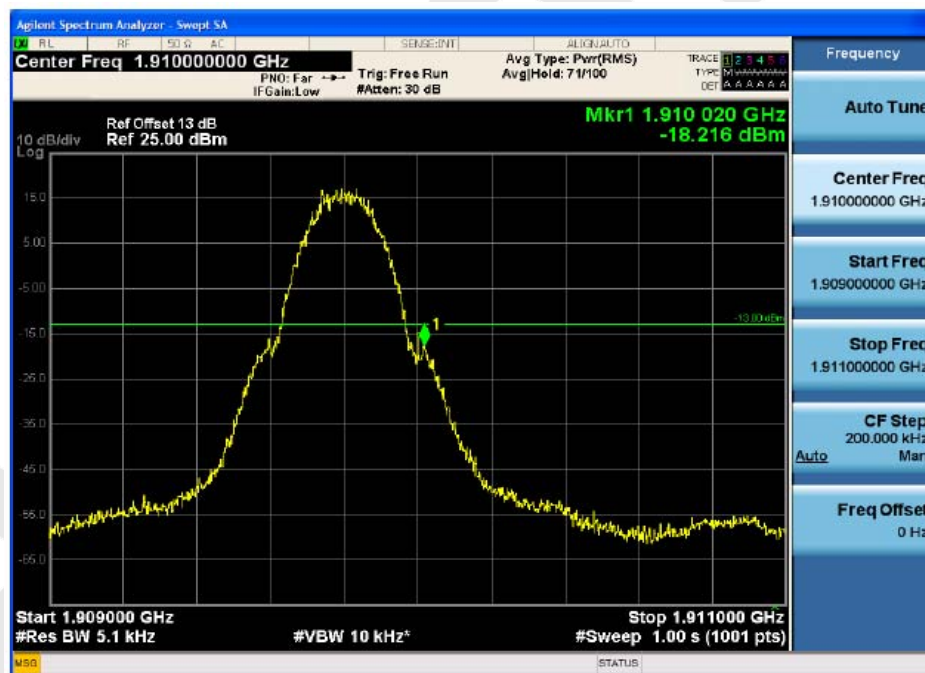

Test Mode: GPRS1900 - High Channel

10. Frequency Stability

10.1. Test Standard and Limit


According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

10.2. Test Setup

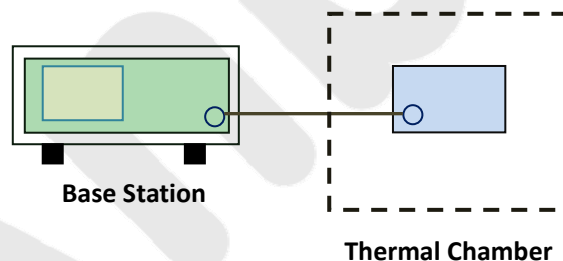

10.3. Test Procedure

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

10.4. Test Data

Cellular Band (Part 22H) result



Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	5.17	0.006180	2.5
0		5.75	0.006873	2.5
10		5.49	0.006562	2.5
20		5.55	0.006634	2.5
30		8.01	0.009574	2.5
40		4.58	0.005475	2.5
50		7.75	0.009264	2.5
55		4.07	0.004865	2.5
25	4.2	7.55	0.009025	2.5
	3.5	7.75	0.009264	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	31.77	0.016899	2.5
0		31.25	0.016622	2.5
10		30.28	0.016106	2.5
20		31.58	0.016798	2.5
30		32.16	0.017106	2.5
40		29.32	0.015596	2.5
50		29.19	0.015527	2.5
55		30.35	0.016144	2.5
25	4.2	32.61	0.017378	2.5
	3.5	29.83	0.015867	2.5

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test

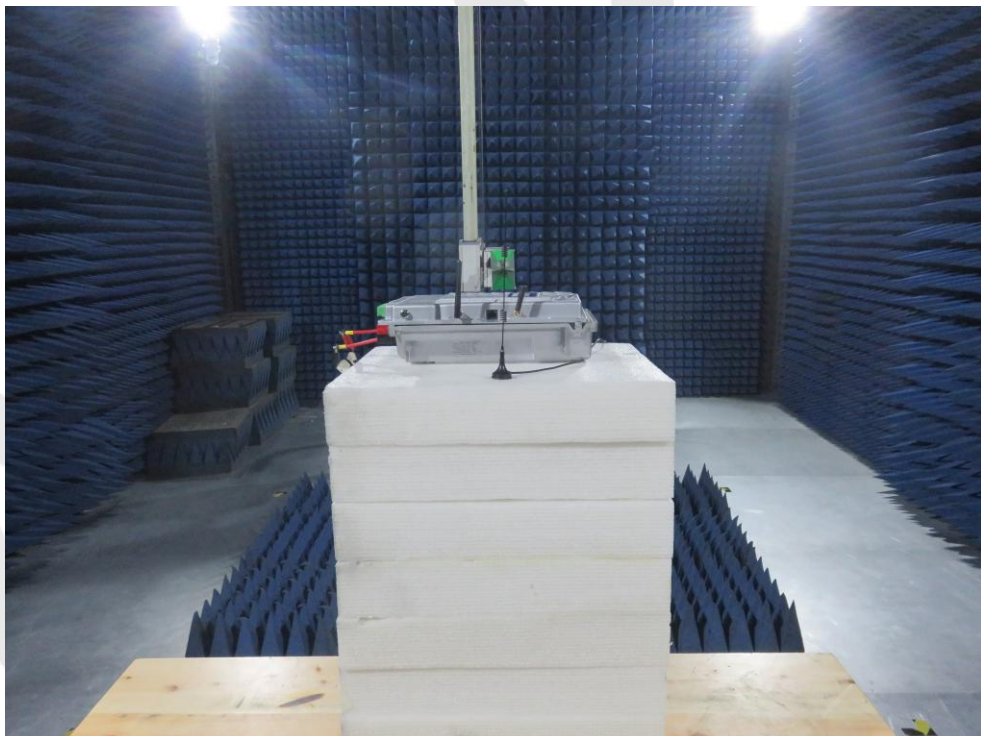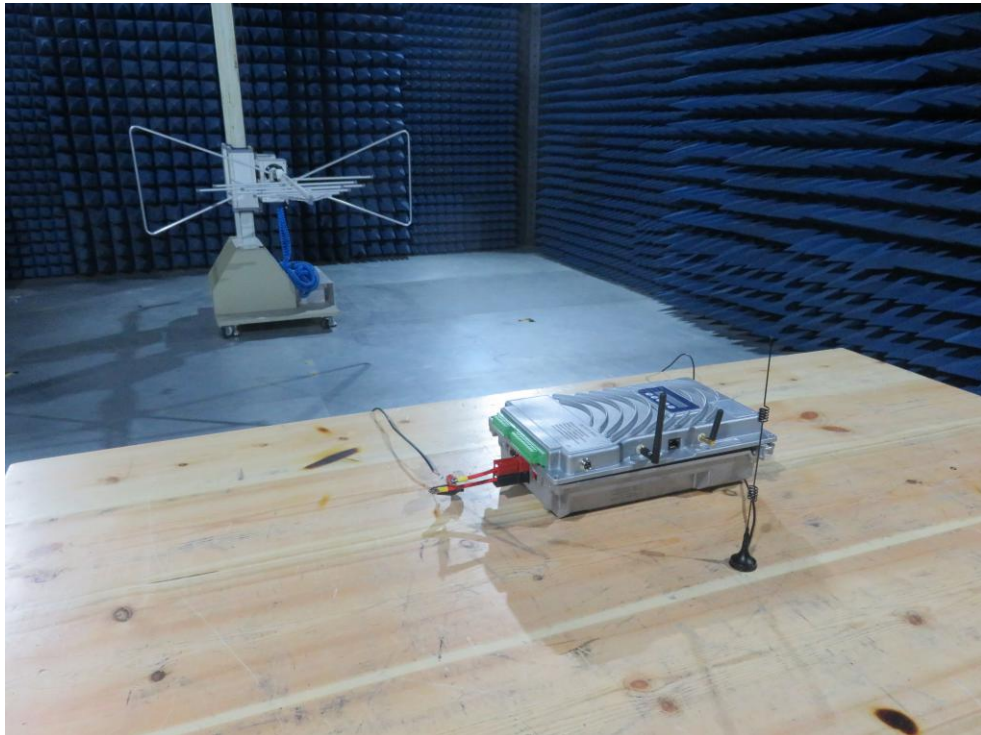

APPENDIX II -- PHOTOGRAPH

Reference to the test report No. SZAWW171207002-02

Anbotek