

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 1 of 13

Applicant : Shenzhen UniStrong Science & Technology Co., Ltd.
Address of Applicant : B,4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

Product Name : Rugged Smart Tablet
Model No. : UT30H
Sample No. : E19020010-05#02
FCC ID : 2AOPD-UT30P
ISED Number : 11546A-UT30P
Standards : FCC CFR47 Part 15, Subpart C
RSS-Gen (Issue 5, March 2019)
RSS-210 (Issue 10, December 2019)

Date of Receipt : 2020-2-10
Date of Test : 2020-2-10 ~ 2020-5-27
Date of Issue : 2020-5-27

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Jennifer zholl Reviewed by: jesse
(Jennifer Zhou) (jesse huang)

Approved by: Guoyou chi
(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 2 of 13

Revision Record			
Version	Date	Revisions	Revised By
1.0	2019-12-12	Original	--

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 3 of 13

Contents

1 GENERAL INFORMATION	4
1.1 TESTING LABORATORY.....	4
1.2 DETAILS OF APPLICATION	4
1.3 DETAILS OF EUT	4
1.4 DOCUMENT REVISION HISTORY.....	5
1.5 TEST METHODOLOGY.....	5
1.6 TEST VERDICT	5
2 TEST CONDITION	6
2.1 ENVIRONMENTAL CONDITIONS	6
2.2 EQUIPMENT LIST	6
2.3 MEASUREMENT UNCERTAINTY.....	6
3 TEST SET-UP AND OPERATION MODES.....	7
3.1 DETAILS OF TEST MODE	7
3.2 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
3.3 SUPPORT SOFTWARE.....	7
3.4 TEST SETUP DIAGRAM	8
4 TEST RESULTS	9
4.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	9
4.1.1 <i>Antenna Requirement</i>	9
4.1.2 <i>Radiated Emission</i>	10

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 4 of 13

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	155 Pingbei Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Company Name	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B,4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China
Contact Person	Lili Zheng
Telephone	+86-21-54467182
Email	ll.zheng@unistrong.com

1.3 Details of EUT

Product Name	Rugged Smart Tablet
Brand Name	Unistrong
Model No.	UT30H
FCC ID	2AOPD-UT30P
Mode of Operation	NFC
Frequency Range	13.56MHz
Modulation Type	ASK
Antenna Type	Internal Antenna
Antenna Gain	0 dBi
Extreme Temperature Range	0°C~ +40°C
Test Voltage	DC 3.8V

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 5 of 13

1.4 DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Issue
1	SHE19020010-03CE	Original Report	2020-5-7
2	SHE19020010-05CE	Amended Report	2020-5-27

They have the same electric circuit ,PCB layout ,RF chip, component.

Except : the differences description of UT30H and UT30P as below:

- 1 LCD screen of UT30H is different with UT30P
- 2 The key position of UT30H is different with UT30P
- 3 the antenna gain of UT30H is different with UT30P

1.5 Test Methodology

47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

1.6 Test Verdict

No.	FCC Part No.	ISED Part No.	Description	Test Result	Verdict
1	15.203	RSS-Gen7.1.4	Antenna Requirement	Clause 4.1.1	PASS
2	15.225(e)	RSS-210 B.6	Frequency Tolerance	Clause 4.1.2	PASS
3	2.1049	RSS-Gen	20dB Bandwidth and 99% Bandwidth	Clause 4.1.3	PASS
4	15.225	RSS-210 B.6	Radiated Emission	Clause 4.1.4	PASS
5	15.207	RSS-Gen	Conducted Emission	Clause 4.1.5	PASS

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 6 of 13

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2020-07-28
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2020-06-24
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2020-06-19
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2020-06-19
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2020-08-22
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2020-06-06
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2020-06-06
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2020-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2020-06-26
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2020-08-28
Test Software	BL	BL410_E	N/A	N/A

2.3 Measurement Uncertainty

Parameter	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	30 MHz – 1 GHz	± 3 dB
	> 1GHz	± 3 dB

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 7 of 13

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. Select test channel as below:

Channel	Frequency
Test channel	13.56MHz

The basic operation modes are:

- A. On
 - 1. test mode
 - a. Transmitting
 - i. Test Channel
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	TP00083A	N/A

3.3 Support Software

Description	Manufacturer	Software Name
Software	NXP	PNX

TEST REPORT


Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 8 of 13


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

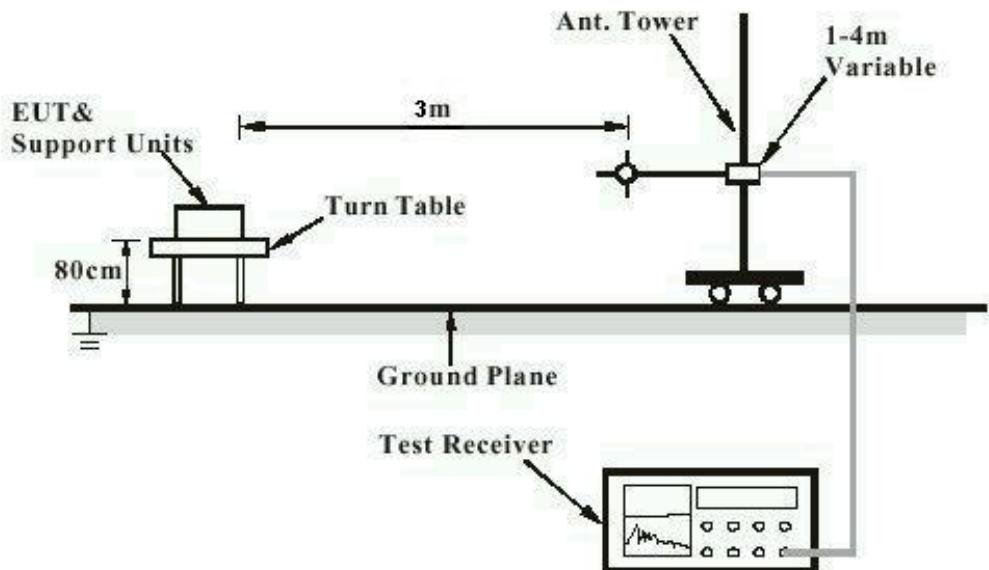

Note: Measurements above 30MHz are done with a table height of 0.8m.

Diagram of Measurement Equipment Configuration for Conduction Measurement

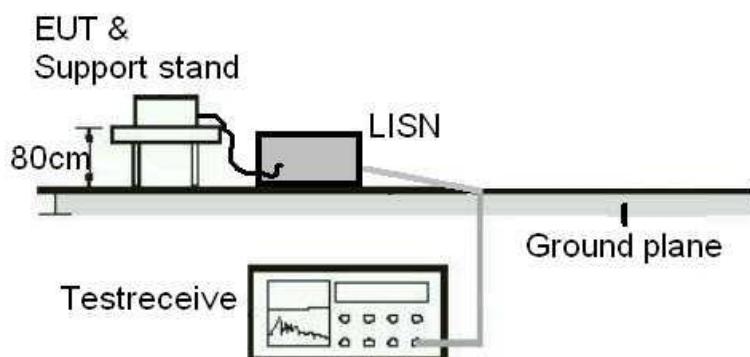

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 9 of 13

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard : Part 15.203

Requirement : The use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a gain of 0 dBi. The antenna is an internal antenna with no possibility of replacement with a non-approvrd antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 10 of 13

4.1.2 Radiated Emission

RESULT:

PASS

Test standard : FCC Part 15.225
Requirement : ANSI C63.10-2013
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Test channel
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 52%

Notes:

Operation within the band 13.110-14.010 MHz as contained in §15.225:

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(KHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(KHz)	87.6-20log(F)
1.705 ~ 13.110	30	30	29.54
13.110 ~ 13.410	30	106	40.51
13.410~ 13.553	30	334	50.47
13.553~13.567	30	15848	84.00
13.567~13.710	30	334	50.47
13.710~14.010	30	106	40.51
14.010~30	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 11 of 13

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{300m}(\text{dBuV/m}) + 40\log(300m/3m) = \text{Limit}_{300m}(\text{dBuV/m}) + 80$$

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m) = \text{Limit}_{30m}(\text{dBuV/m}) + 40$$

(3) EUT was placed on a non-metallic table, 100 cm above the ground plane inside a semi-anechoic chamber.

(4) Test antenna was located 3m from the EUT on an adjustable mast

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

TEST REPORT


Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 12 of 13

Test data :

RF Emission Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

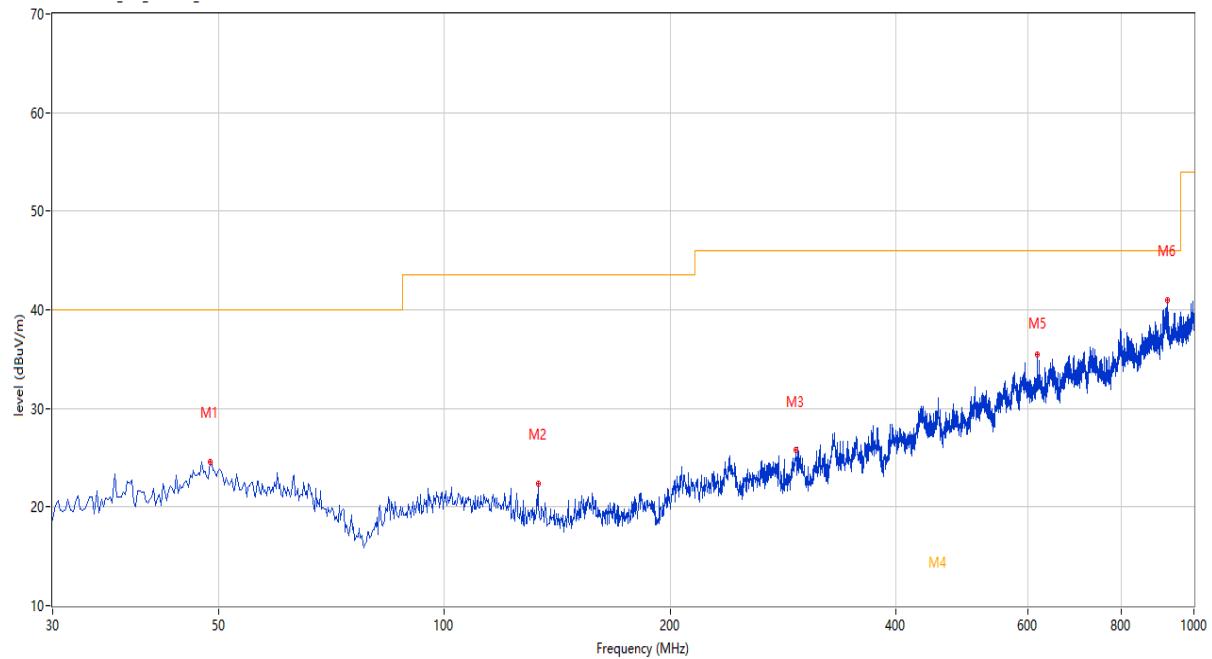

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.668	24.63	-23.83	40.0	-15.37	Peak	62.20	200	Horizontal	Pass
2	133.279	22.33	-28.30	43.5	-21.17	Peak	332.40	100	Horizontal	Pass
3	294.016	25.82	-23.57	46.0	-20.18	Peak	349.50	100	Horizontal	Pass
4	455.578	15.73	-19.08	46.0	-30.27	Peak	149.70	100	Horizontal	Pass
4*	455.578	9.43	-19.08	46.0	-36.57	QP	149.70	100	Horizontal	Pass
5	618.158	35.46	-15.54	46.0	-10.54	Peak	23.50	100	Horizontal	Pass
6	921.207	41.02	-10.58	46.0	-4.98	Peak	232.10	100	Horizontal	Pass


TEST REPORT

Report No.: SHE19020010-05HE

Date: 2020-5-27

Page 13 of 13

REmission Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

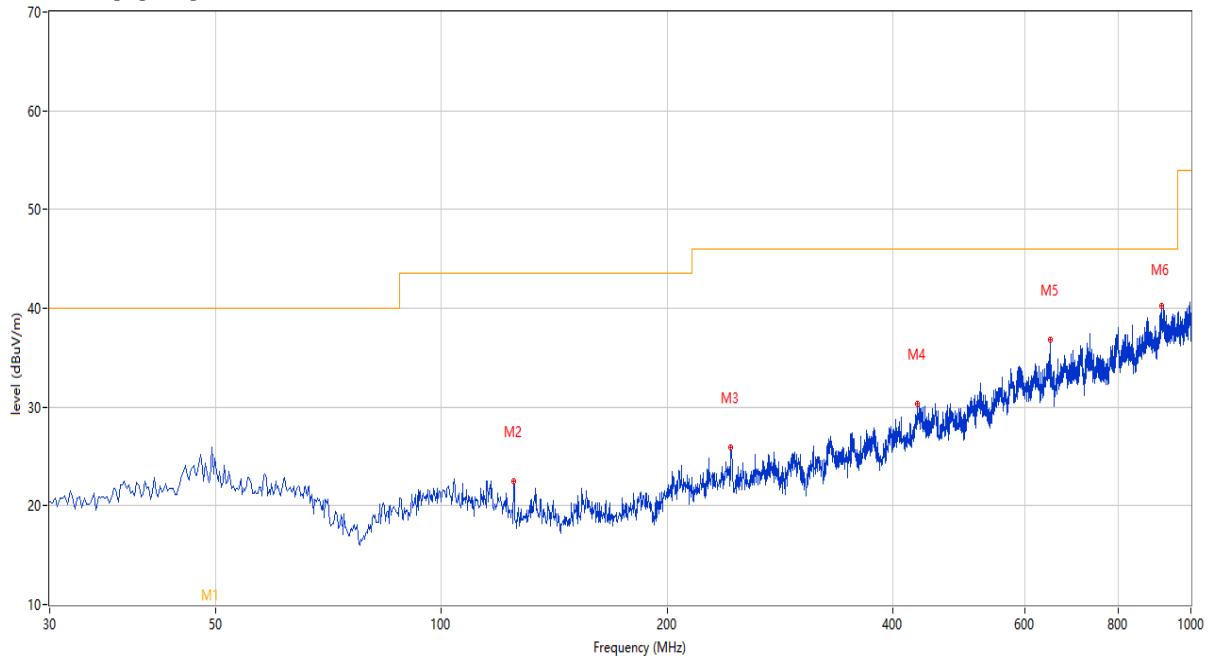

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	49.232	13.30	-24.05	40.0	-26.70	Peak	315.80	108	Vertical	Pass
1*	49.232	6.00	-24.05	40.0	-34.00	QP	315.80	108	Vertical	Pass
2	124.794	22.47	-28.76	43.5	-21.03	Peak	40.60	100	Vertical	Pass
3	243.347	25.88	-25.28	46.0	-20.12	Peak	360.00	200	Vertical	Pass
4	431.722	30.31	-19.29	46.0	-15.69	Peak	311.30	200	Vertical	Pass
5	649.675	36.86	-15.57	46.0	-9.14	Peak	150.30	100	Vertical	Pass
6	913.207	40.25	-10.30	46.0	-5.75	Peak	315.90	100	Vertical	Pass

Note : margin (Over Limit) >10dB, so do not need to test by QP Detector

End of the report