

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 1 of 13

Applicant

: Shenzhen UniStrong Science & Technology Co.,Ltd.
: B,4-4Factory, Zhengcheng Road, Fuyong Baoan District,
Shenzhen, China

Product Name

: Rugged Smart Tablet

Model No.

: UT30H

Sample No.

: E19020010-05#02

FCC ID

: 2AOPD-UT30P

ISED Number

: 11546A-UT30P

Standards

: FCC CFR47 Part 15, Subpart C
RSS-Gen (Issue 5, March 2019)
RSS-247 (Issue 2, February 2017)

Date of Receipt

: 2020-2-10

Date of Test

: 2020-2-10 ~ 2020-5-27

Date of Issue

: 2020-5-27

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:

Jennifer Zhou
(Jennifer Zhou)

Reviewed by:

Jesse
(Jesse)

Approved by:

Guoyou Chi
(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 2 of 13

Revision Record			
Version	Date	Revisions	Revised By
1.0	2019-10-31	Original	--

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 3 of 13

Contents

1 GENERAL INFORMATION.....	4
1.1 TESTING LABORATORY	4
1.2 DETAILS OF APPLICATION	4
1.3 DETAILS OF EUT	4
1.4 DOCUMENT REVISION HISTORY	5
1.5 TEST METHODOLOGY	5
2 TEST CONDITION.....	6
2.1 ENVIRONMENTAL CONDITIONS	6
2.2 EQUIPMENT LIST.....	6
2.3 MEASUREMENT UNCERTAINTY	6
3 TEST SET-UP AND OPERATION MODES.....	7
3.1 DETAILS OF TEST MODE	7
3.2 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
3.3 SUPPORT SOFTWARE	7
3.4 TEST SETUP DIAGRAM.....	8
4 TEST RESULTS.....	10
4.1 TRANSMITTER REQUIREMENT & TEST SUITES	10
4.1.1 <i>Antenna Requirement</i>	10
4.1.2 <i>Peak Output Power and E.I.R.P</i>	11
4.1.3 <i>Spurious Emission</i>	12
4.1.4 <i>Band Edge (Restricted-band band-edge)</i>	13

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 4 of 13

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	155 Pingbei Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icaso.com

1.2 Details of Application

Company Name	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B,4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China
Contact Person	Lili Zheng
Telephone	+86-21-54467182
Email	ll.zheng@unistrong.com

1.3 Details of EUT

Product Name	Rugged Smart Tablet
Brand Name	Unistrong
Model No.	UT30H
FCC ID	2AOPD-UT30P
ISED Number	11546A-UT30P
Mode of Operation	Bluetooth BLE
Frequency Range	2400MHz ~ 2483.5MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	GFSK
Antenna Type	Internal Antenna
Antenna Gain	2.8 dBi
Extreme Temperature Range	-20°C ~ +55°C
Test Voltage	DC 3.8V

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 5 of 13

1.4 DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Issue
1	SHE19020010-03CE	Original Report	2020-5-7
2	SHE19020010-05CE	Amended Report	2020-5-27

They have the same electric circuit ,PCB layout ,RF chip, component.

Except : the differences description of UT30H and UT30P as below:

- 1 LCD screen of UT30H is different with UT30P
- 2 The key position of UT30H is different with UT30P
- 3 the antenna gain of UT30H is different with UT30P

1.5 Test Methodology

47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
KDB Publication 558074 D01 v05r02	DTS Meas Guidance.
RSS-Gen (Issue 5, March 2019)	General Requirements for Compliance of Radio Apparatus
RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 6 of 13

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2020-07-28
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2020-06-24
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2020-06-19
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2020-06-19
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2020-08-22
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2020-06-06
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2020-06-06
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2020-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2020-06-26
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2020-08-28
Test Software	BL	BL410_E	N/A	N/A

2.3 Measurement Uncertainty

Parameter	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	30 MHz – 1 GHz	± 3 dB
	> 1GHz	± 3 dB

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 7 of 13

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. Select test channel as below:

Channel	Frequency
The lowest channel(CH0)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
 - 1. BLE mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	TP00083A	N/A

3.3 Support Software

Description	Manufacturer	Software Name
Software	Qualcomm	QRCT

TEST REPORT


Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 8 of 13


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

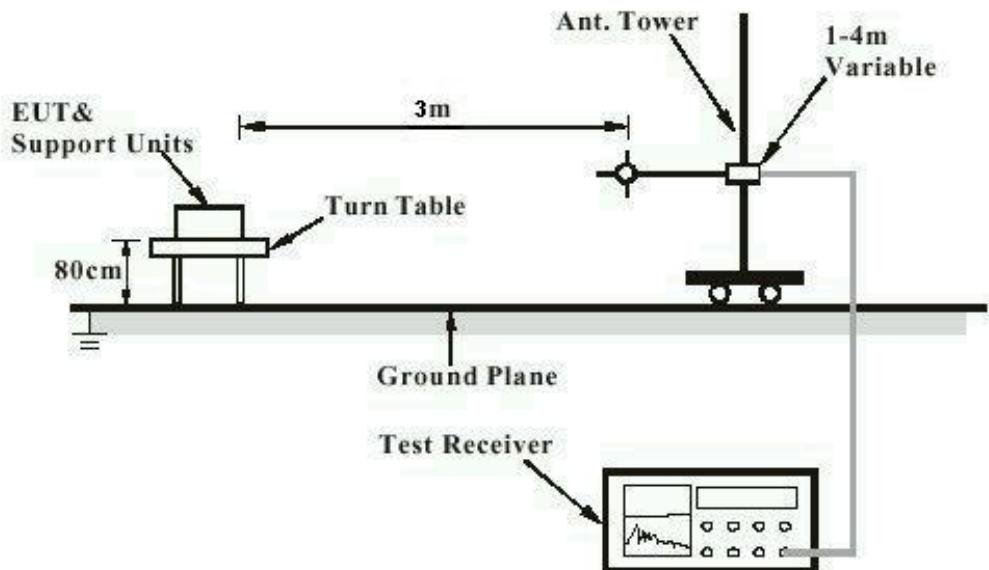

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Conduction Measurement

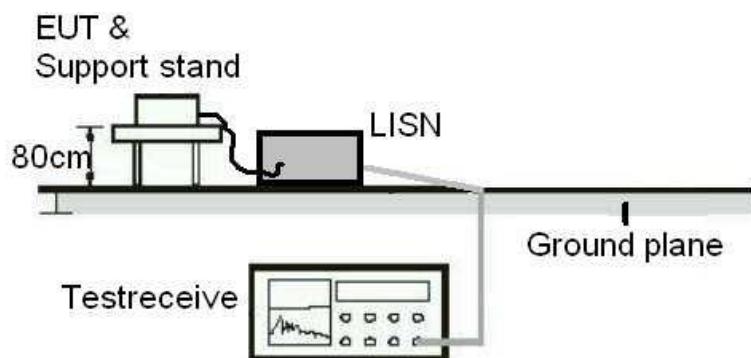


TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 9 of 13

Diagram of Measurement Equipment Configuration for Transmitter Measurement

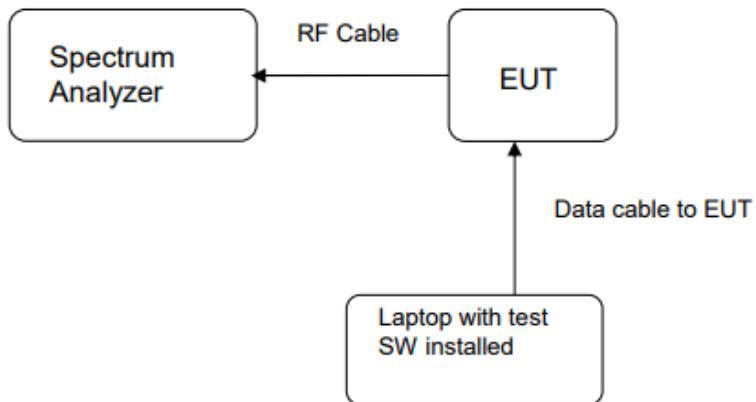

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 10 of 13

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	: FCC Part 15.247(b)(4), Part 15.203 RSS-247 5.4(6)
Requirement	: The use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a gain of 2.8 dBi. The antenna is an antenna with no possibility of replacement with a non-approvrd antenna by the end-use

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 11 of 13

4.1.2 Peak Output Power and E.I.R.P

RESULT:

PASS

Test standard	:	FCC Part 15.247(b)(3) RSS-247 5.4(4)
Requirement	:	ANSI C63.10-2013, KDB 558074
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/Middle/High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	52%

Table 1: Peak Output Power

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
BLE	2402	0.42	1.10	< 1
	2440	1.46	1.40	
	2480	1.16	1.31	

Table 2: E.I.R.P

Test Mode	Test Channel (MHz)	E.I.R.P		Limit (W)
		(dBm)	(mW)	
BLE	2402	3.22	2.10	< 4
	2440	4.26	2.67	
	2480	3.96	2.49	

Note: BT BLE antenna peak gain is 2.8

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 12 of 13

4.1.3 Spurious Emission

RESULT:

PASS

Test standard	:	FCC Part 15.247(d), 15.205, 15.209 RSS-247 5.5
Requirement	:	ANSI C63.10-2013, KDB 558074
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/Middle/High
Operation Mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	52%

For details refer to following test plot.

Notes:

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT is working in the Normal link mode below 1 GHz.
4. Test plots please refer to the document "Annex No:EXHIBIT A".

TEST REPORT

Report No.: SHE19020010-05CE

Date: 2020-5-27

Page 13 of 13

4.1.4 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard : FCC Part 15.247(d), 15.205, 15.209
RSS-247 5.5

Requirement : ANSI C63.10-2013, KDB 558074

Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1

Ambient temperature : 25°C

Relative humidity : 52%

For details refer to following test plot.

1. Test plots please refer to the document "Annex No:EXHIBIT A".

End of the report