

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of

Shenzhen Mingzong Technology Co., Ltd

Digital Wireless Hitch Camera System
Model No.: MS-358RSD

FCC ID: 2AOPG-MS-358RSD

Prepared for : SHENZHEN MINGZONG TECHNOLOGY CO., LTD
Address : 3rd Yangwu Road, Liantangmian, Huinan Avenue,
Huiyang Economic Development Zone, Huizhou,
Guangdong Province, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science
& Industry Park, Nanshan District, Shenzhen, Guangdong,
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20172464
Date of Test : December 28, 2017
Date of Report : December 30, 2017

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Special Accessory and Auxiliary Equipment	4
1.3. Description of Test Facility	5
1.4. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. OPERATION OF EUT DURING TESTING	7
3.1. Operating Mode	7
3.2. Configuration and peripherals	7
4. TEST PROCEDURES AND RESULTS	8
5. 20DB BANDWIDTH MEASUREMENT	9
5.1. Block Diagram of Test Setup.....	9
5.2. The Requirement For Section 15.215(c).....	9
5.3. Operating Condition of EUT	9
5.4. Test Procedure	9
5.5. Test Result	10
6. BAND EDGE COMPLIANCE TEST	12
6.1. Block Diagram of Test Setup.....	12
6.2. The Requirement For Section 15.249.....	12
6.3. EUT Configuration on Measurement	12
6.4. Operating Condition of EUT	13
6.5. Test Procedure	13
6.6. Test Result	13
7. RADIATED SPURIOUS EMISSION TEST	18
7.1. Block Diagram of Test Setup.....	18
7.2. The Limit For Section 15.249.....	19
7.3. Restricted bands of operation	20
7.4. Configuration of EUT on Measurement	20
7.5. Operating Condition of EUT	21
7.6. Test Procedure	21
7.7. Data Sample.....	22
7.8. The Field Strength of Radiation Emission Measurement Results	22
8. ANTENNA REQUIREMENT.....	35
8.1. The Requirement	35
8.2. Antenna Construction	35

Test Report Certification

Applicant : Shenzhen Mingzong Technology Co., Ltd
Address : 3rd Yangwu Road, Liantangmian, Huinan Avenue, Huiyang Economic Development Zone, Huizhou, Guangdong Province, China
Manufacturer : Huizou Miangshang Technology Co., Ltd
Address : 3rd Yangwu Road, Liantangmian, Huinan Avenue, Huiyang Economic Development Zone, Huizhou, Guangdong Province, China
Product : Digital Wireless Hitch Camera System
Model No. : MS-358RSD
Trade name : MINGSHANG

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10: 2013

The EUT was tested according to FCC 47CFR 15.249 for compliance to FCC 47CFR 15.249 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test :

December 28, 2017

Date of Report :

December 30, 2017

Prepared by :


(Bob Wang, Eng. Engineer)

Approved & Authorized Signer :


(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product	:	Digital Wireless Hitch Camera System
Main test model Number	:	MS-358RSD
Frequency Range	:	2407MHz-2473.5MHz
Channel frequency	:	2407MHz, 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz, 2467MHz, 2473.5MHz
Number of Channels	:	14
Modulation Type	:	GFSK
Type of Antenna	:	Integral Antenna
Max antenna gain	:	1dBi
Power Supply	:	DC 12V

1.2. Special Accessory and Auxiliary Equipment

N/A

1.3. Description of Test Facility

EMC Lab	: Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
	Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
	Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
	Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	: Shenzhen Accurate Technology Co., Ltd.
Site Location	: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	Jan. 06, 2018
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	Jan. 06, 2018
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	Jan. 06, 2018
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	Jan. 06, 2018
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	Jan. 12, 2018
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	Jan. 12, 2018
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	Jan. 06, 2018
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	Jan. 06, 2018
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	Jan. 06, 2018
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	Jan. 06, 2018

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: **Transmitting mode**

Low Channel: 2407MHz

Middle Channel: 2442MHz

High Channel: 2473.5MHz

3.2.Configuration and peripherals

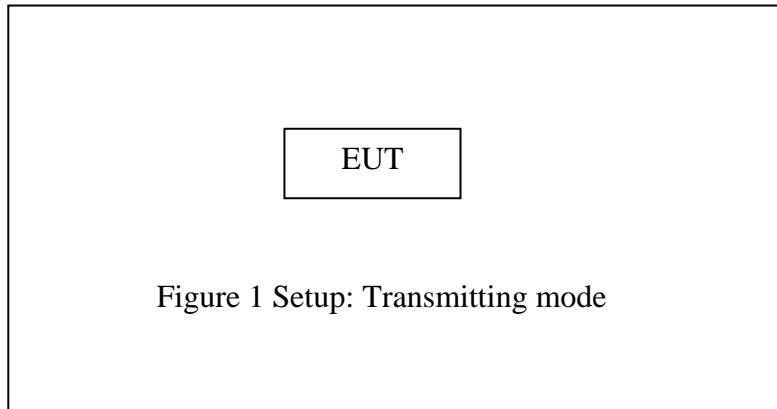


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.215(c)	20dB Bandwidth	Compliant
Section 15.249(d)	Band Edge Compliance Test	Compliant
Section 15.205(a), Section 15.209(a), Section 15.249, Section 15.35	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

Note: The power supply mode of the module is DC 12V, According to the FCC standard requirements, conducted emission is not applicable.

5. 20DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup

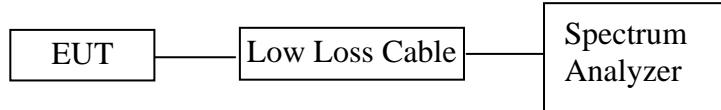

5.2. The Requirement For Section 15.215(c)

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long-term distribution appears evenly distributed.

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 5.1.

5.3.2. Turn on the power of all equipment.

5.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2407-2473.5 MHz. We select 2407MHz, 2442MHz, and 2473.5MHz TX frequency to transmit.

5.4. Test Procedure

5.4.1. Place the EUT on the table and set it in transmitting mode.

5.4.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.4.3. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz, Detector function=peak, Trace=max hold, Sweep=auto.


5.4.4. Set the measured low, middle and high frequency and test 20dB bandwidth with spectrum analyzer.

5.5. Test Result

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2407	1.30
Middle	2442	1.30
High	2437.5	1.30


The spectrum analyzer plots are attached as below.

Low channel

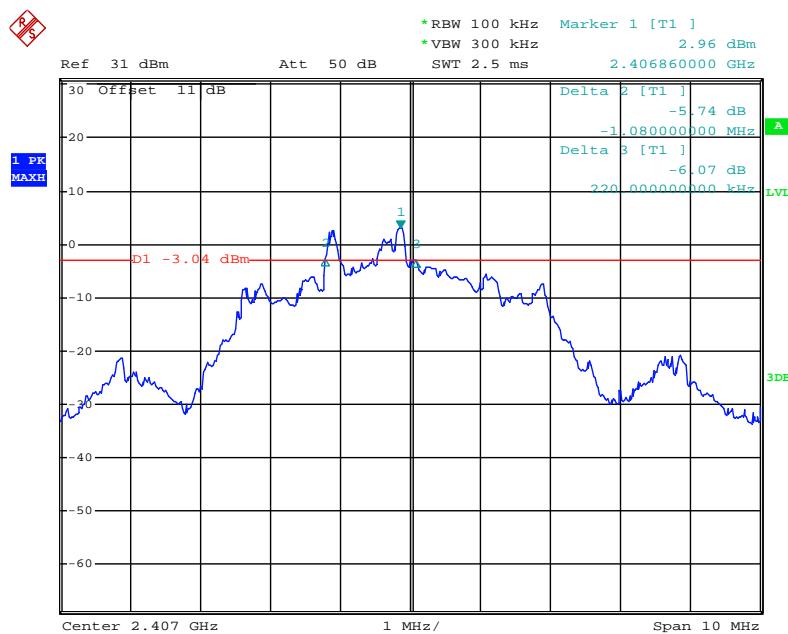


Date: 28.DEC.2017 17:57:46

Middle channel

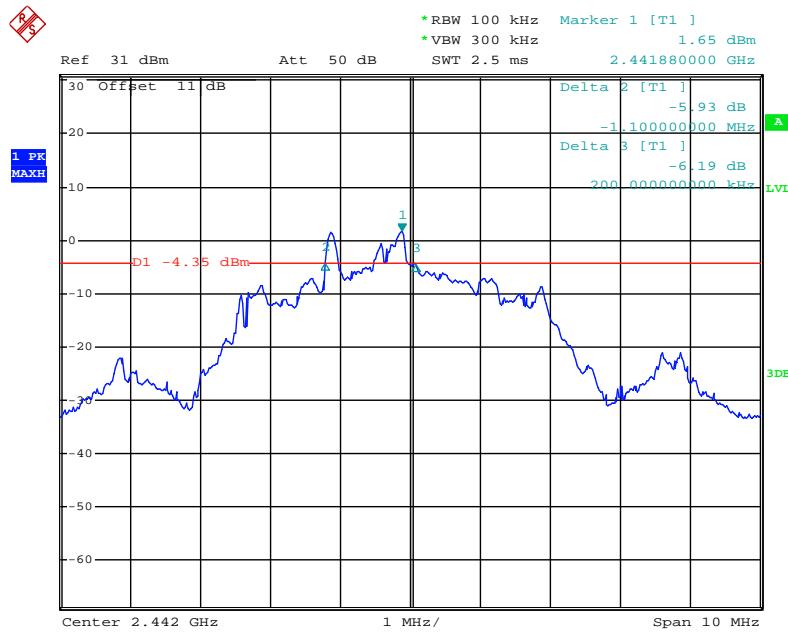

Date: 28.DEC.2017 17:59:33


High channel

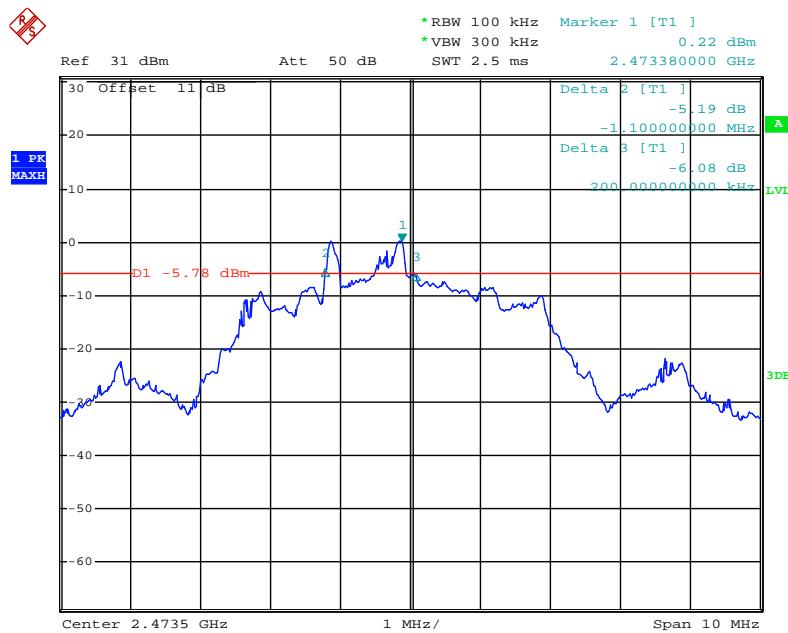

Date: 28.DEC.2017 18:02:07

6. BAND EDGE COMPLIANCE TEST

6.1. Block Diagram of Test Setup

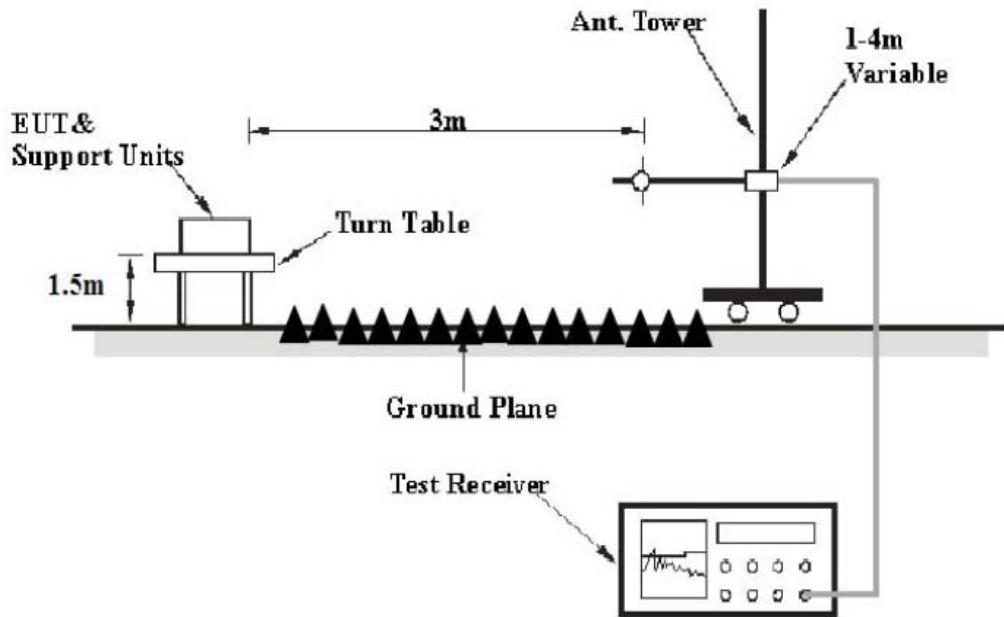

6.2. The Requirement For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2407-2473.5 MHz. We select 2407MHz, 2473.5MHz TX frequency to transmit.

6.5.Test Procedure

Radiate Band Edge:

6.5.1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

6.5.2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

6.5.3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

6.5.4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

6.5.5.The band edges was measured and recorded.

6.6.Test Result

Pass

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

4. The average measurement was not performed when peak measured data under the limit of average detection.

The spectral diagrams are attached as below.




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: FRANK #1136	Polarization: Vertical
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp. (C)/Hum.(%) 23 C / 48 %	Time: 17/36/20
EUT: Digital Wireless Hitch Camera System	Engineer Signature:
Mode: TX2407MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltdRepo	
Note: Report NO.:ATE20172464	

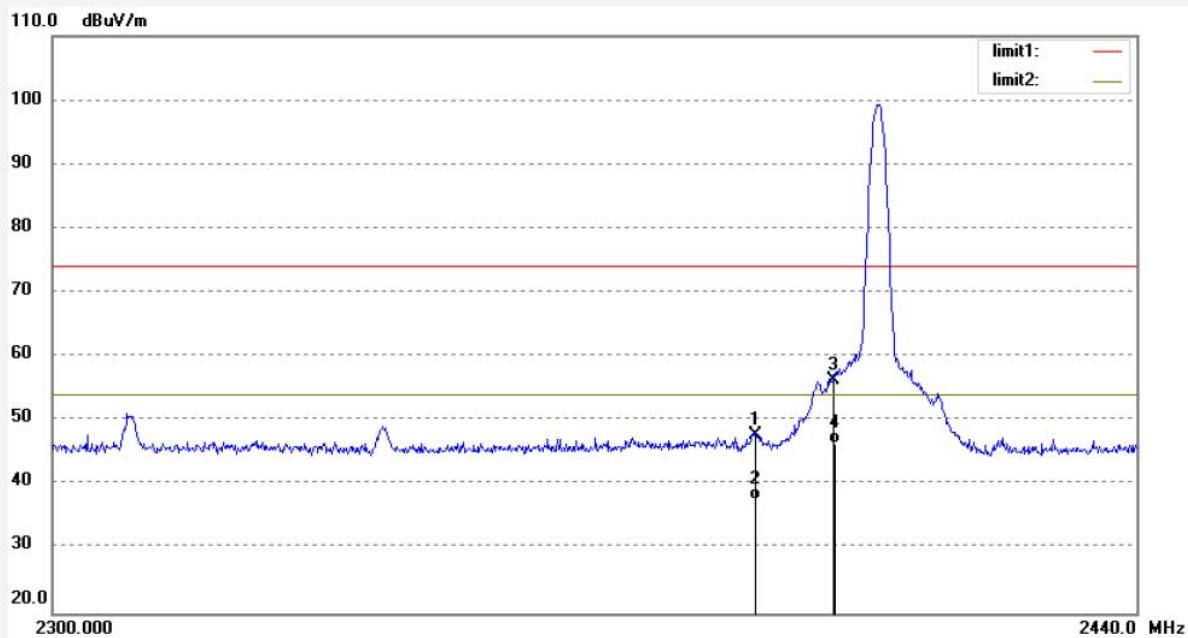

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	8.63	39.23	47.86	74.00	-26.14	peak	250	317	
2	2390.000	-1.50	39.23	37.73	54.00	-16.27	AVG	250	138	
3	2400.000	16.96	39.28	56.24	74.00	-17.76	peak	250	54	
4	2400.000	7.15	39.28	46.43	54.00	-7.57	AVG	250	123	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: FRANK #1137	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 17/37/54
EUT: Digital Wireless Hitch Camera System	Engineer Signature:
Mode: TX2407MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltdRepo	
Note: Report NO.:ATE20172464	

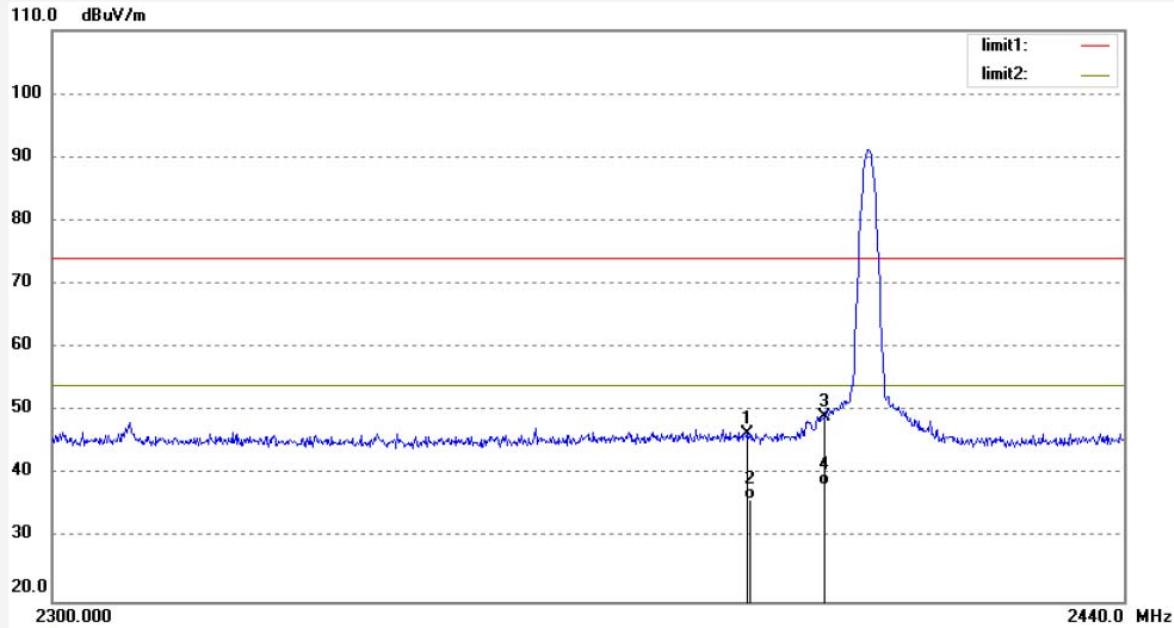

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	7.14	39.23	46.37	74.00	-27.63	peak	200	328	
2	2390.000	-3.21	39.23	36.02	54.00	-17.98	AVG	250	248	
3	2400.000	9.79	39.28	49.07	74.00	-24.93	peak	250	122	
4	2400.000	-1.00	39.28	38.28	54.00	-15.72	AVG	250	37	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: FRANK #1138

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 17/12/28/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 17/40/50

EUT: Digital Wireless Hitch Camera System

Engineer Signature:


Mode: TX2473.5MHz

Distance: 3m

Model: MS-358RSD

Manufacturer: Huizhou Mingshang Industrial Co.,ltdRepo

Note: Report NO.:ATE20172464

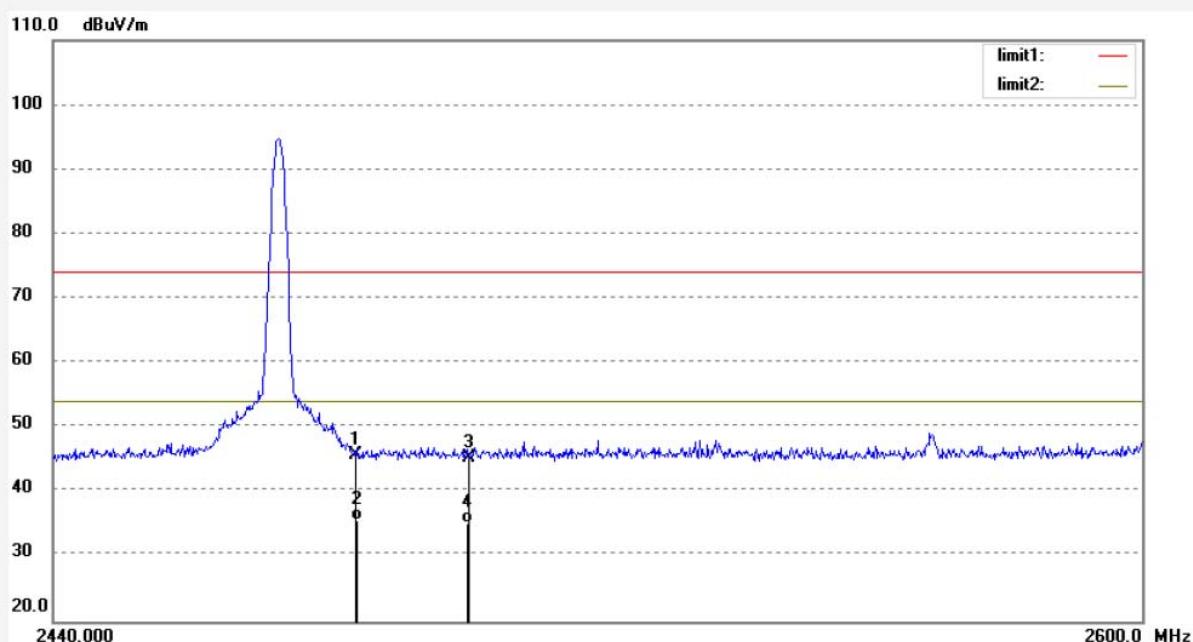

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	6.22	39.63	45.85	74.00	-28.15	peak	250	97	
2	2483.500	-4.10	39.63	35.53	54.00	-18.47	AVG	250	54	
3	2500.000	5.68	39.70	45.38	74.00	-28.62	peak	250	127	
4	2500.000	-4.50	39.70	35.20	54.00	-18.80	AVG	250	314	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: FRANK #1139	Polarization: Vertical
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 17/42/38
EUT: Digital Wireless Hitch Camera System	Engineer Signature:
Mode: TX2473.5MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltdRepo	
Note: Report NO.:ATE20172464	

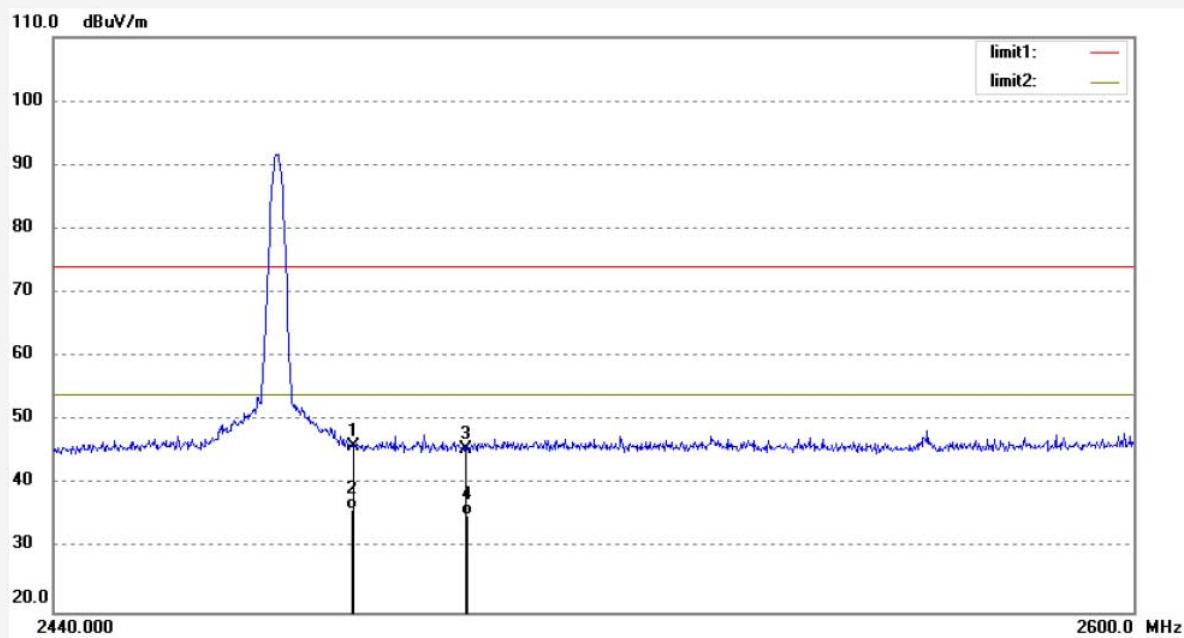


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	6.35	39.63	45.98	74.00	-28.02	peak	250	127	
2	2483.500	-3.45	39.63	36.18	54.00	-17.82	AVG	250	23	
3	2500.000	5.83	39.70	45.53	74.00	-28.47	peak	200	90	
4	2500.000	-4.54	39.70	35.16	54.00	-18.84	AVG	200	130	

7. RADIATED SPURIOUS EMISSION TEST

7.1. Block Diagram of Test Setup


7.1.1. Block diagram of connection between the EUT and peripherals

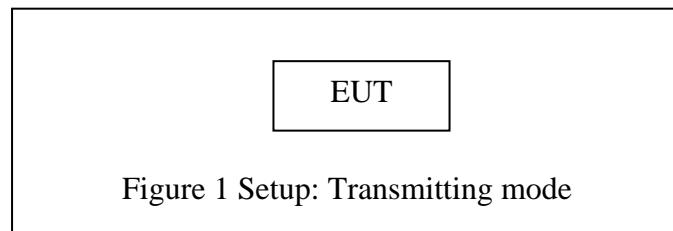


(EUT: Digital Wireless Hitch Camera System)

7.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

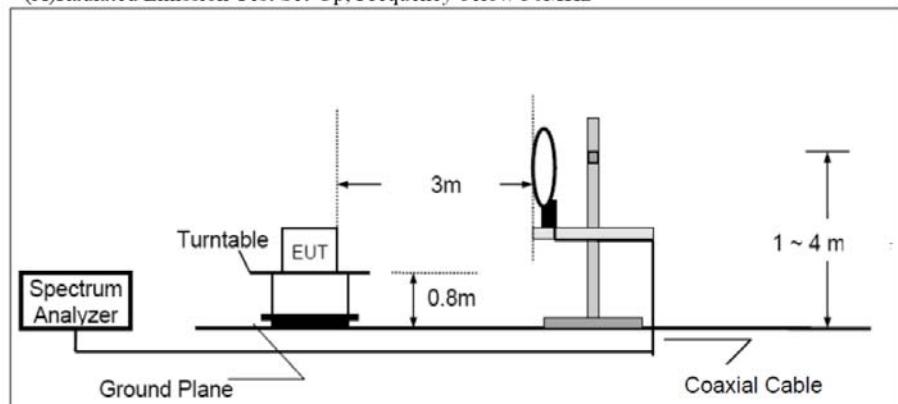

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

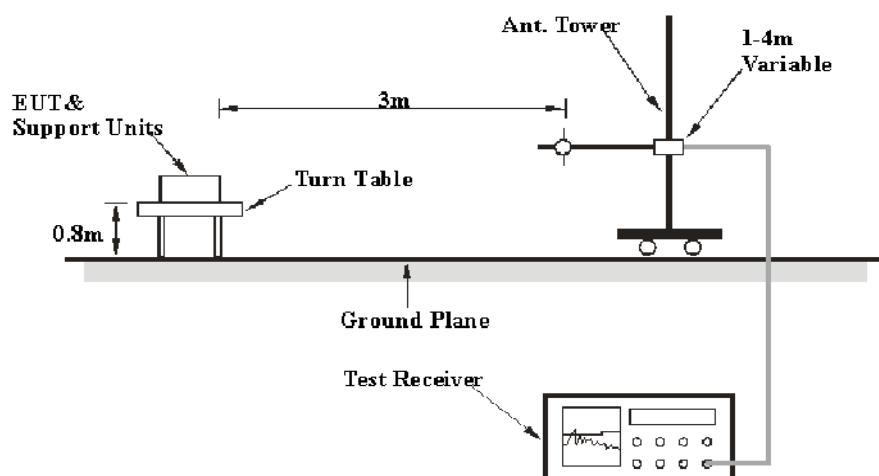

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

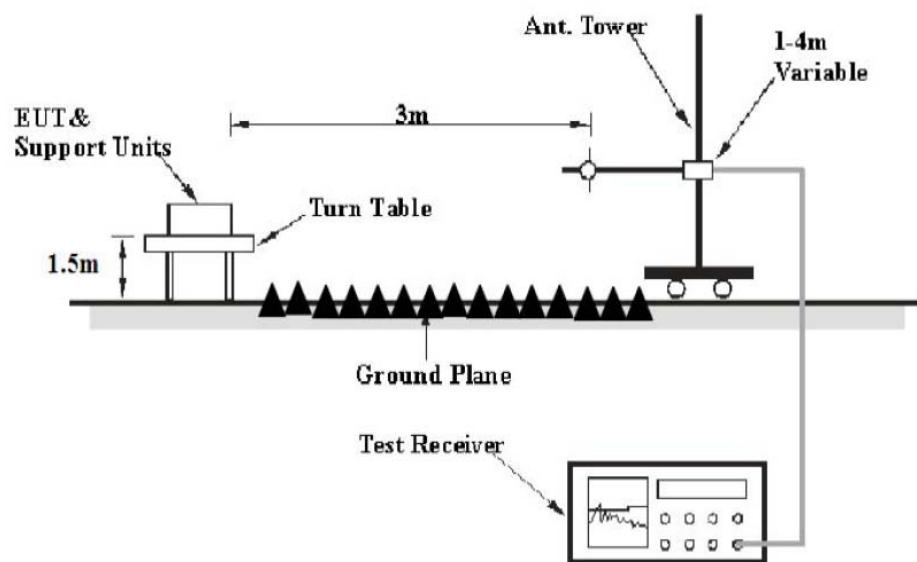

7.2.The Limit For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

7.3. Restricted bands of operation

7.3.1. FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

7.4. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.5.Operating Condition of EUT

7.5.1.Setup the EUT and simulator as shown as Section 7.1.

7.5.2.Turn on the power of all equipment.

7.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2407-2473 MHz. We select 2407MHz, 2442MHz, and 2473.5MHz TX frequency to transmit.

7.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz
Peak detector above 1GHz

RBW (1 MHz), VBW (3MHz) for Peak measurement

RBW (1 MHz), VBW (10Hz) for AV measurement

7.7.Data Sample

Frequency(MHz)	Reading(dB μ V)	Factor(dB/m)	Result(dB μ V/m)	Limit(dB μ V/m)	Margin(dB)	Remark
X.XX	30.21	-17.87	12.34	40.00	-27.66	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB μ V) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB μ V/m) = Reading(dB μ V) + Factor(dB/m)

Limit (dB μ V/m) = Limit stated in standard

Margin (dB) = Result(dB μ V/m) - Limit (dB μ V/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB μ V/m)–Limit(dB μ V/m)

Result(dB μ V/m)= Reading(dB μ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

7.8.The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The EUT is tested radiation emission at Low, Middle, High channel in three axes. The worst emissions are reported in all channels.

4. The test frequency is from 9KHz to 26.5GHz, The 9KHz-30MHz and 18-26.5GHz emissions are not reported, because the levels are too low against the limit.




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: frank2017 #1962	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15/51/15
EUT: Digital Wireless Hitch Camera System	Engineer Signature: Frank
Mode: TX2407MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltd	
Note: Report NO.:ATE20172464	

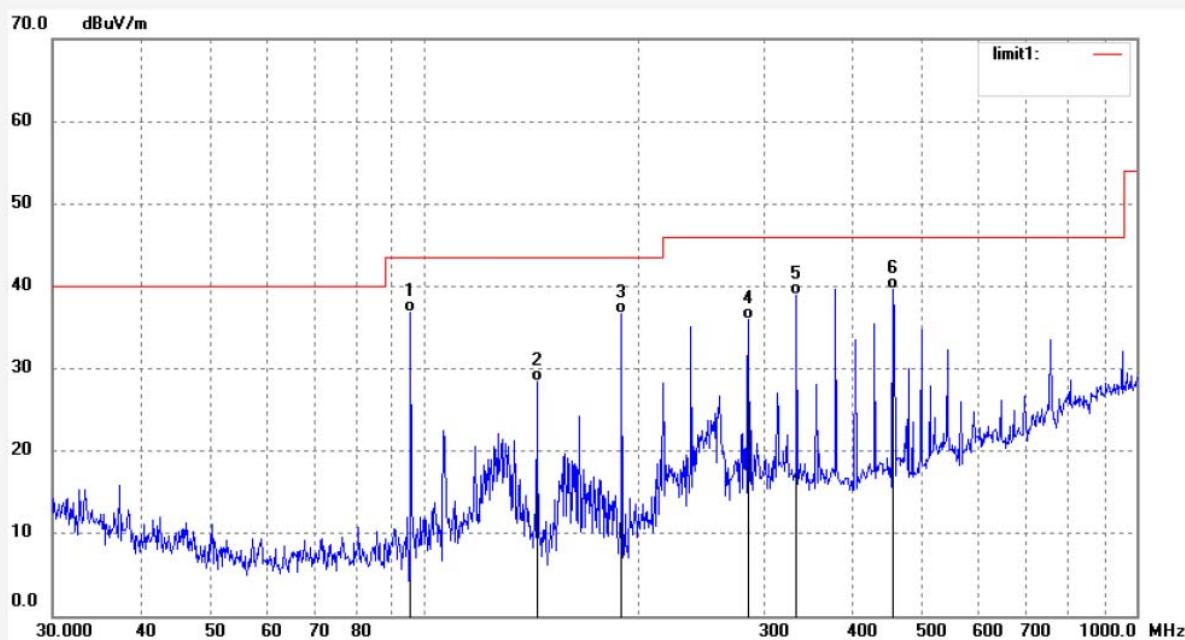

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	95.6483	64.26	-27.49	36.77	43.50	-6.73	QP	100	249	
2	143.7760	56.45	-28.03	28.42	43.50	-15.08	QP	100	327	
3	189.1074	61.81	-25.19	36.62	43.50	-6.88	QP	100	124	
4	285.2610	57.76	-21.87	35.89	46.00	-10.11	QP	100	45	
5	332.9534	58.87	-19.99	38.88	46.00	-7.12	QP	100	155	
6	455.1888	56.81	-17.11	39.70	46.00	-6.30	QP	100	135	

Job No.: frank2017 #1963 Polarization: Horizontal
 Standard: FCC Class B 3M Radiated Power Source: DC 12V
 Test item: Radiation Test Date: 17/12/28/
 Temp.(C)/Hum.(%) 25 C / 55 % Time: 15/52/05
 EUT: Digital Wireless Hitch Camera System Engineer Signature: Frank
 Mode: TX2407MHz Distance: 3m
 Model: MS-358RSD
 Manufacturer: Huizhou Mingshang Industrial Co.,ltd
 Note: Report NO.:ATE20172464

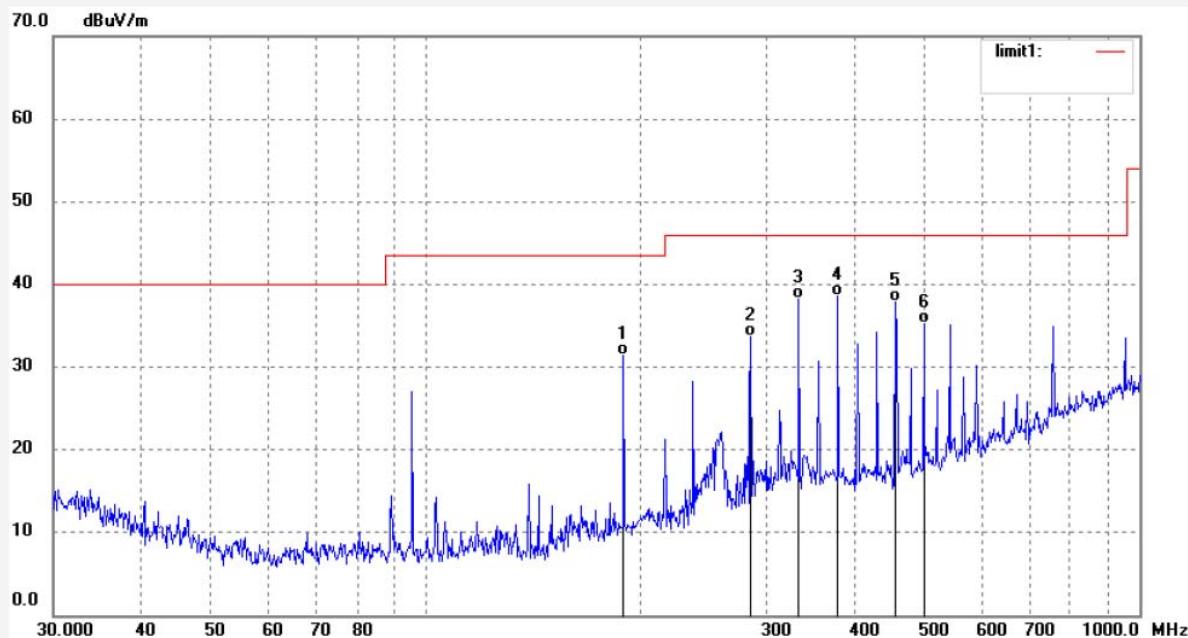

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.1074	56.53	-25.19	31.34	43.50	-12.16	QP	200	347	
2	285.2610	55.63	-21.87	33.76	46.00	-12.24	QP	200	147	
3	332.9534	58.23	-19.99	38.24	46.00	-7.76	QP	200	314	
4	377.8480	57.26	-18.66	38.60	46.00	-7.40	QP	200	24	
5	455.1888	54.96	-17.11	37.85	46.00	-8.15	QP	200	144	
6	498.7302	51.63	-16.34	35.29	46.00	-10.71	QP	200	123	

Job No.: frank2017 #1964

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 12V

Test item: Radiation Test

Date: 17/12/28/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 15/52/05

EUT: Digital Wireless Hitch Camera System

Engineer Signature: Frank


Mode: TX2442MHz

Distance: 3m

Model: MS-358RSD

Manufacturer: Huizhou Mingshang Industrial Co.,ltd

Note: Report NO.:ATE20172464

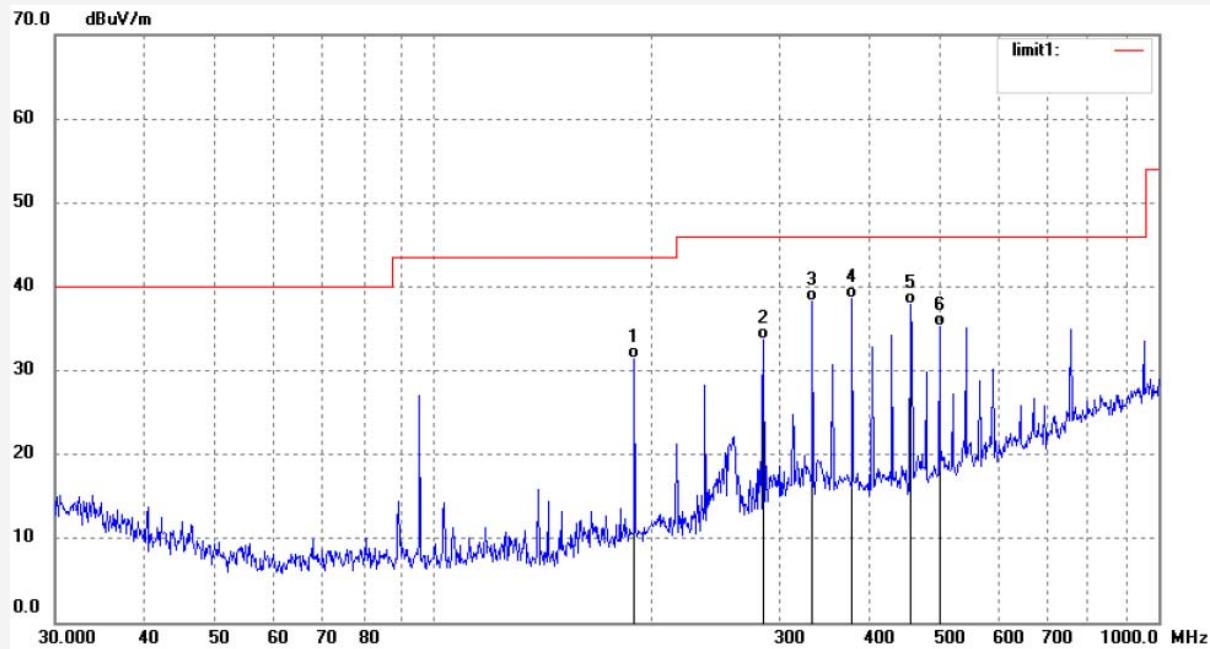

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.1074	56.53	-25.19	31.34	43.50	-12.16	QP	200	249	
2	285.2610	55.63	-21.87	33.76	46.00	-12.24	QP	200	124	
3	332.9534	58.23	-19.99	38.24	46.00	-7.76	QP	200	214	
4	377.8480	57.26	-18.66	38.60	46.00	-7.40	QP	200	135	
5	455.1888	54.96	-17.11	37.85	46.00	-8.15	QP	200	247	
6	498.7302	51.63	-16.34	35.29	46.00	-10.71	QP	200	131	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: frank2017 #1965

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 12V

Test item: Radiation Test

Date: 17/12/28/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 15/51/15

EUT: Digital Wireless Hitch Camera System

Engineer Signature: Frank


Mode: TX2442MHz

Distance: 3m

Model: MS-358RSD


Manufacturer: Huizhou Mingshang Industrial Co.,ltd

Note: Report NO.:ATE20172464

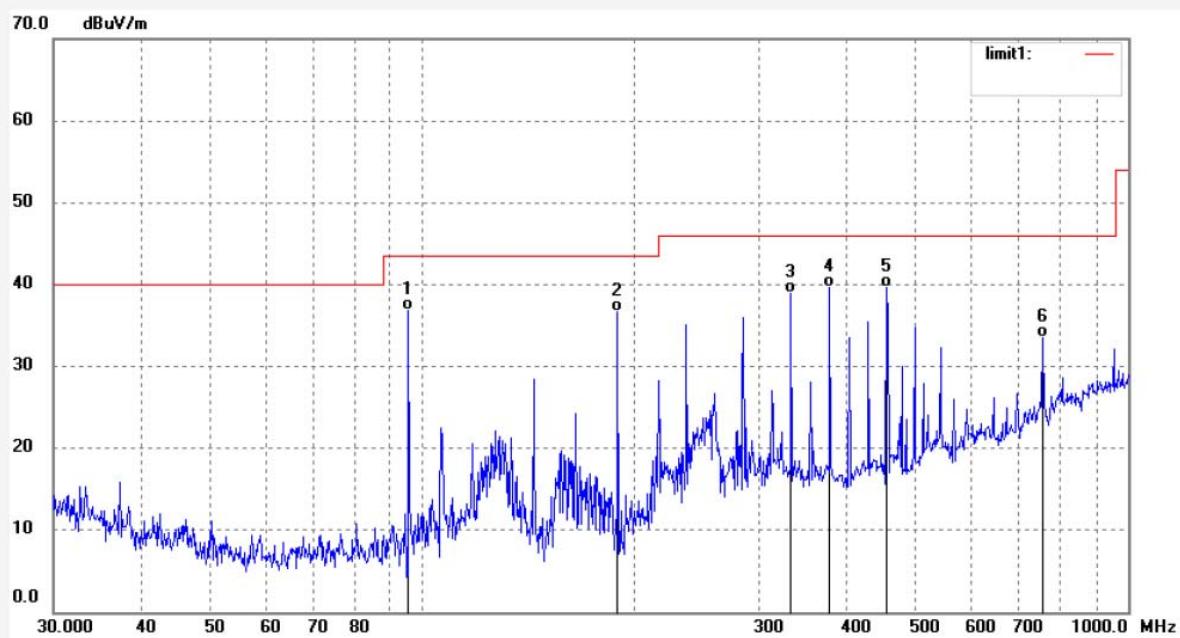

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	95.6483	64.26	-27.49	36.77	43.50	-6.73	QP	100	244	
2	189.1074	61.81	-25.19	36.62	43.50	-6.88	QP	100	149	
3	332.9534	58.87	-19.99	38.88	46.00	-7.12	QP	100	32	
4	377.8480	58.35	-18.66	39.69	46.00	-6.31	QP	100	124	
5	455.1888	56.81	-17.11	39.70	46.00	-6.30	QP	100	327	
6	757.6200	43.69	-10.12	33.57	46.00	-12.43	QP	100	102	

Job No.: frank2017 #1966 Polarization: Vertical
 Standard: FCC Class B 3M Radiated Power Source: DC 12V
 Test item: Radiation Test Date: 17/12/28/
 Temp.(C)/Hum.(%) 25 C / 55 % Time: 15/51/15
 EUT: Digital Wireless Hitch Camera System Engineer Signature: Frank
 Mode: TX2473.5MHz Distance: 3m
 Model: MS-358RSD
 Manufacturer: Huizhou Mingshang Industrial Co.,ltd
 Note: Report NO.:ATE20172464

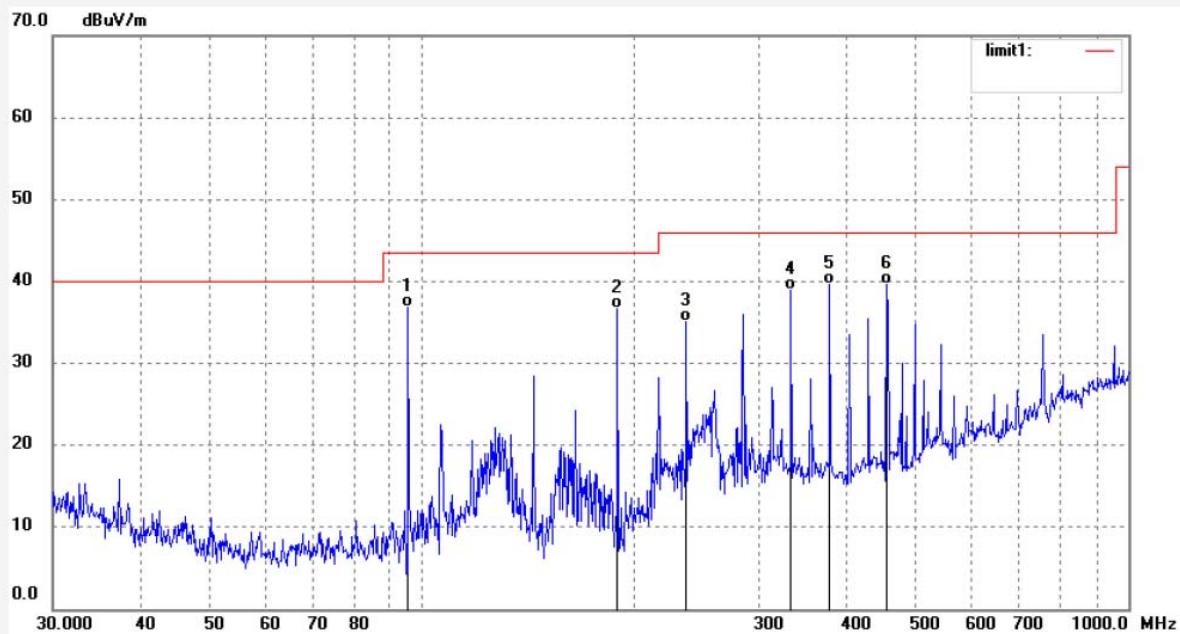

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	95.6483	64.26	-27.49	36.77	43.50	-6.73	QP	100	357	
2	189.1074	61.81	-25.19	36.62	43.50	-6.88	QP	100	168	
3	236.7923	58.91	-23.78	35.13	46.00	-10.87	QP	100	32	
4	332.9534	58.87	-19.99	38.88	46.00	-7.12	QP	100	217	
5	377.8480	58.35	-18.66	39.69	46.00	-6.31	QP	100	44	
6	455.1888	56.81	-17.11	39.70	46.00	-6.30	QP	100	321	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: frank2017 #1967	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp. (C)/Hum.(%) 25 C / 55 %	Time: 15/52/05
EUT: Digital Video recorders	Engineer Signature: Frank
Mode: TX2473.5MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltd	
Note: Report NO.:ATE20172464	

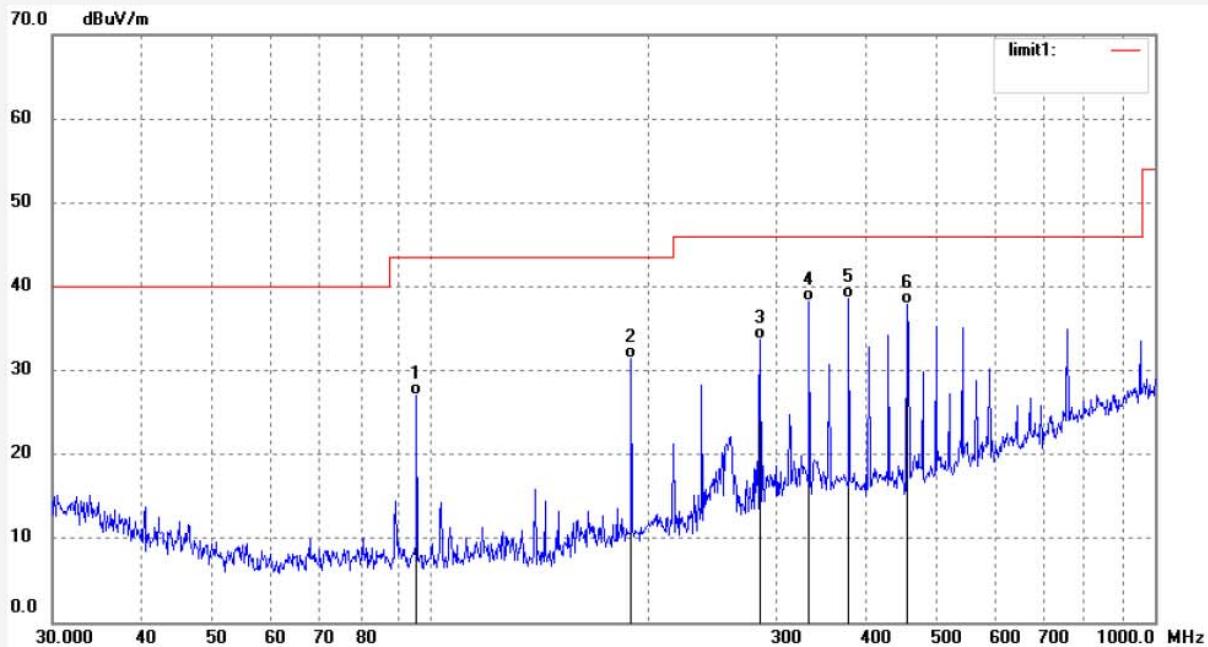

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	95.6483	54.50	-27.49	27.01	43.50	-16.49	QP	200	97	
2	189.1074	56.53	-25.19	31.34	43.50	-12.16	QP	200	157	
3	285.2610	55.63	-21.87	33.76	46.00	-12.24	QP	200	321	
4	332.9534	58.23	-19.99	38.24	46.00	-7.76	QP	200	34	
5	377.8480	57.26	-18.66	38.60	46.00	-7.40	QP	200	234	
6	455.1888	54.96	-17.11	37.85	46.00	-8.15	QP	200	302	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: frank2017 #1985	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 16/14/57
EUT: Digital Wireless Hitch Camera System	Engineer Signature: Frank
Mode: TX2407MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltd	


Note: Report NO.:ATE20172464

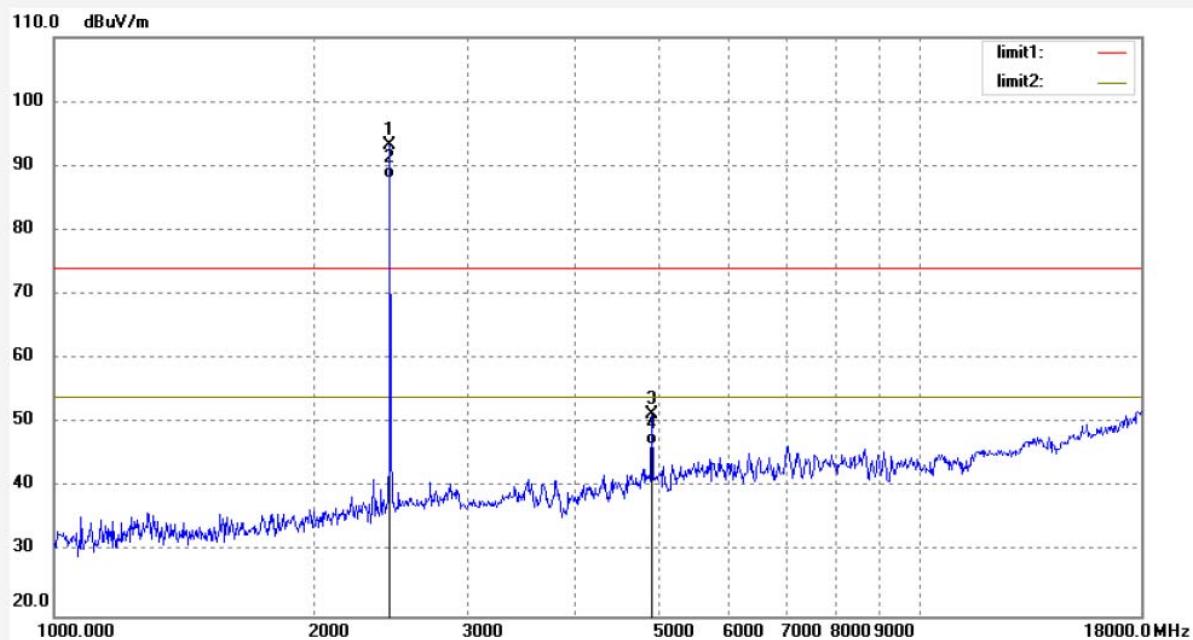

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2407.000	97.39	-4.07	93.32	114.00	-20.68	peak	200	123	
2	2407.000	92.15	-4.07	88.08	94.00	-5.92	AVG	200	54	
3	4814.000	47.89	3.43	51.32	74.00	-22.68	peak	200	320	
4	4814.000	43.15	3.43	46.58	54.00	-7.42	AVG	200	123	

Job No.: frank2017 #1984 Polarization: Vertical
 Standard: FCC PK Power Source: DC 12V
 Test item: Radiation Test Date: 17/12/28/
 Temp. (C)/Hum.(%) 25 C / 55 % Time: 16/15/51
 EUT: Digital Wireless Hitch Camera System Engineer Signature: Frank
 Mode: TX2407MHz Distance: 3m
 Model: MS-358RSD
 Manufacturer: Huizhou Mingshang Industrial Co.,ltd

Note: Report NO.:ATE20172464

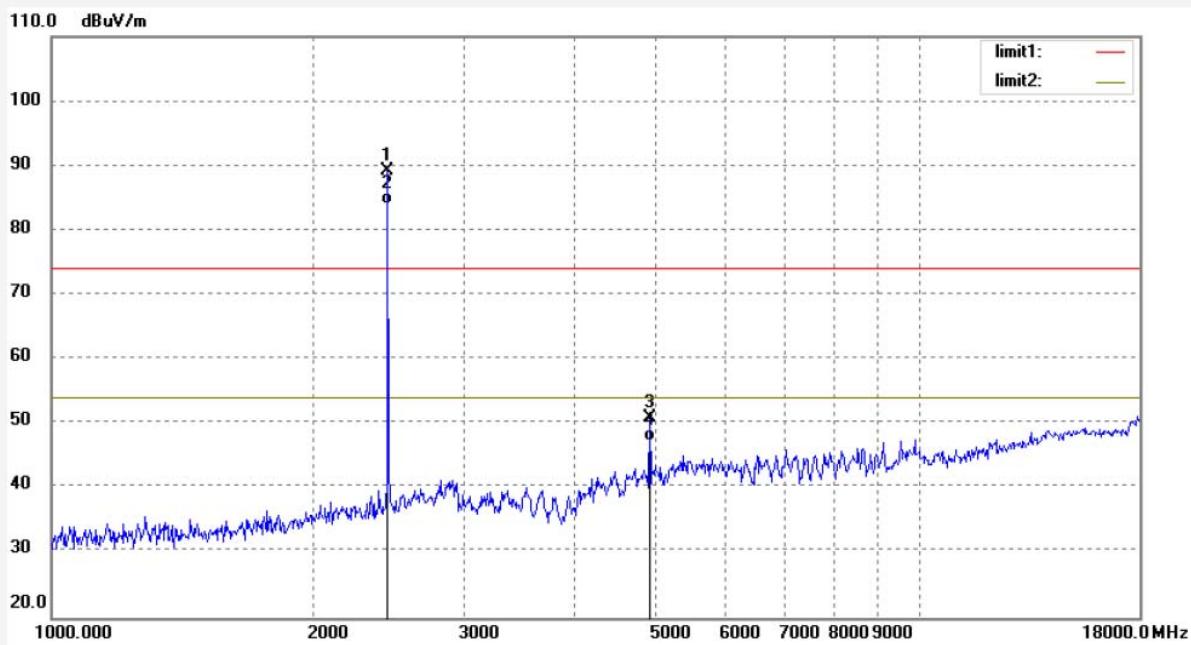

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2407.000	93.31	-4.07	89.24	114.00	-24.76	peak	150	120	
2	2407.000	88.15	-4.07	84.08	94.00	-9.92	AVG	150	135	
3	4814.000	47.58	3.43	51.01	74.00	-22.99	peak	150	102	
4	4814.000	44.00	3.43	47.43	54.00	-6.57	AVG	150	244	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: frank2017 #1983

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 17/12/28/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 16/16/57

EUT: Digital Wireless Hitch Camera System

Engineer Signature: Frank


Mode: TX2442MHz

Distance: 3m

Model: MS-358RSD

Manufacturer: Huizhou Mingshang Industrial Co.,ltd

Note: Report NO.:ATE20172464

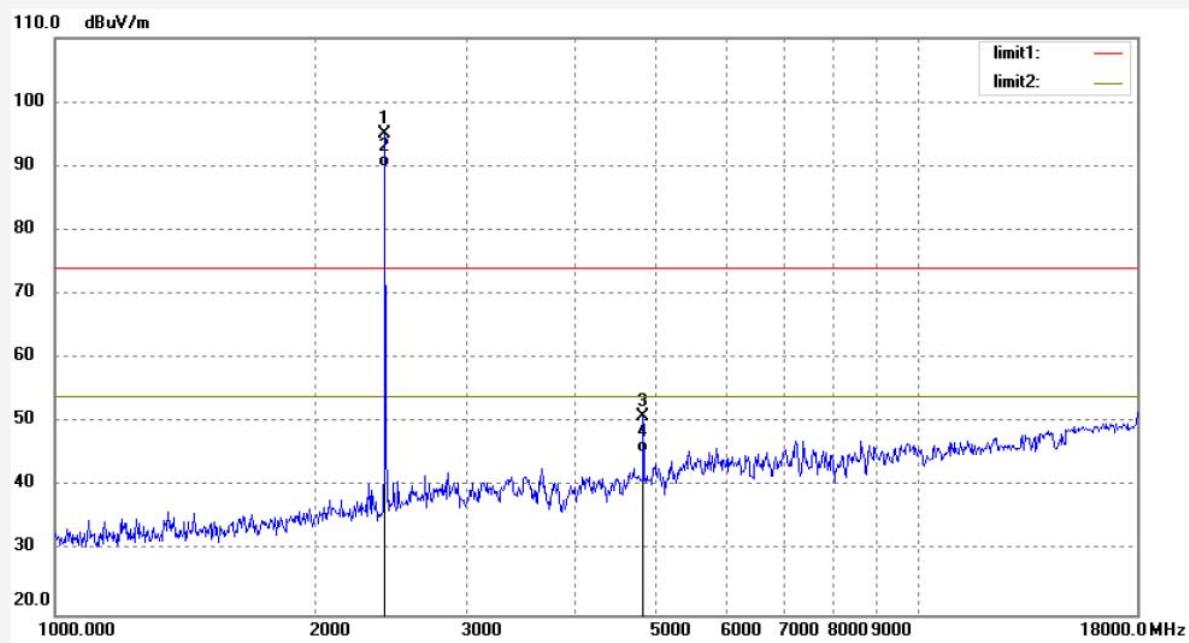

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2442.000	99.25	-4.20	95.05	114.00	-18.95	peak	150	31	
2	2442.000	94.15	-4.20	89.95	94.00	-4.05	AVG	150	124	
3	4884.000	47.77	3.07	50.84	74.00	-23.16	peak	150	152	
4	4884.000	42.15	3.07	45.22	54.00	-8.78	AVG	150	218	

Job No.: frank2017 #1982

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 17/12/28/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 16/17/44

EUT: Digital Wireless Hitch Camera System

Engineer Signature: Frank


Mode: TX2442MHz

Distance: 3m

Model: MS-358RSD


Manufacturer: Huizhou Mingshang Industrial Co.,ltd

Note: Report NO.:ATE20172464

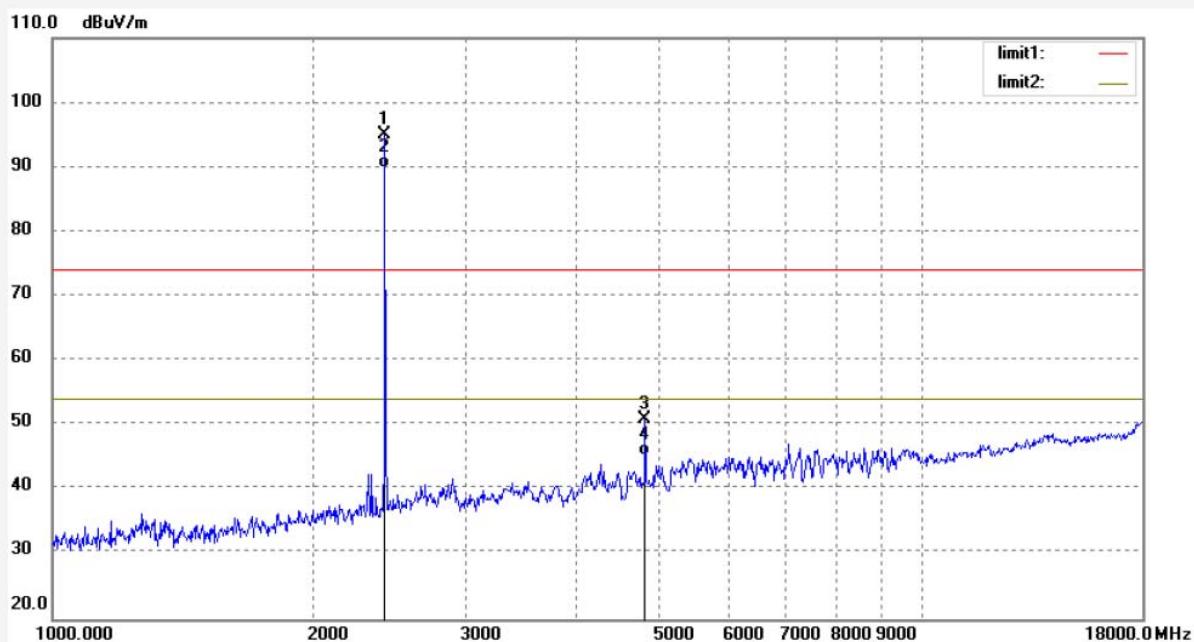


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2442.000	99.15	-4.20	94.95	114.00	-19.05	peak	200	97	
2	2442.000	94.12	-4.20	89.92	94.00	-4.08	AVG	250	327	
3	4884.000	47.78	3.07	50.85	74.00	-23.15	peak	250	32	
4	4884.000	42.15	3.07	45.22	54.00	-8.78	AVG	200	127	

Job No.: frank2017 #1981	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 17/12/28/
Temp. (C)/Hum.(%) 25 C / 55 %	Time: 16/18/47
EUT: Digital Wireless Hitch Camera System	Engineer Signature: Frank
Mode: TX2473.5MHz	Distance: 3m
Model: MS-358RSD	
Manufacturer: Huizhou Mingshang Industrial Co.,ltd	
Note: Report NO.:ATE20172464	

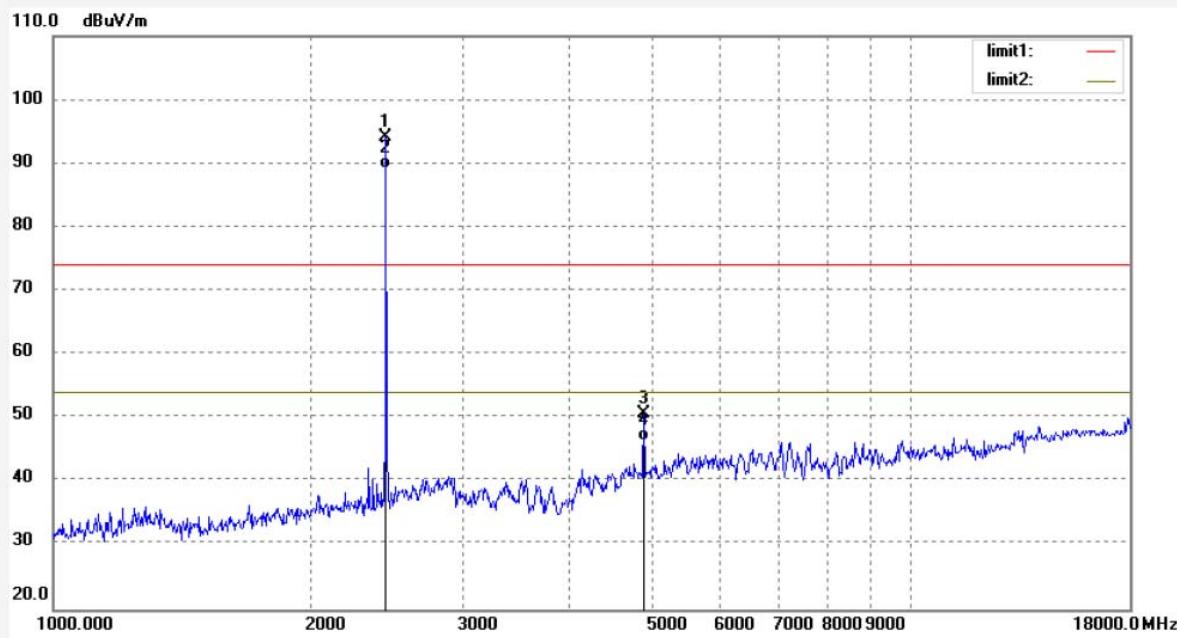

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2473.500	98.20	-4.07	94.13	114.00	-19.87	peak	250	120	
2	2473.500	93.15	-4.07	89.08	94.00	-4.92	AVG	250	123	
3	4947.000	47.44	3.36	50.80	74.00	-23.20	peak	250	248	
4	4947.000	43.12	3.36	46.48	54.00	-7.52	AVG	250	147	

Job No.: frank2017 #1980 Polarization: Vertical
 Standard: FCC PK Power Source: DC 12V
 Test item: Radiation Test Date: 17/12/28/
 Temp.(C)/Hum.(%) 25 C / 55 % Time: 16/19/55
 EUT: Digital Wireless Hitch Camera System Engineer Signature: Frank
 Mode: TX2473.5MHz Distance: 3m
 Model: MS-358RSD
 Manufacturer: Huizhou Mingshang Industrial Co.,ltd
 Note: Report NO.:ATE20172464

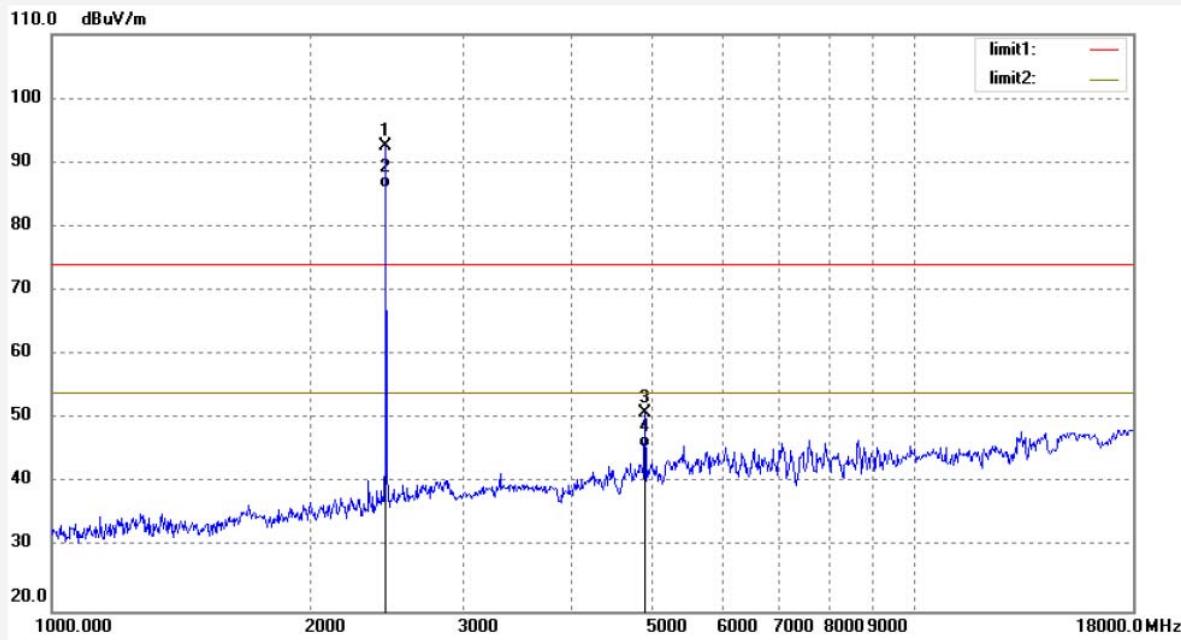

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2473.500	96.56	-4.07	92.49	114.00	-21.51	peak	150	123	
2	2473.500	90.12	-4.07	86.05	94.00	-7.95	AVG	150	10	
3	4947.000	47.54	3.36	50.90	74.00	-23.10	peak	150	210	
4	4947.000	42.15	3.36	45.51	54.00	-8.49	AVG	150	321	


8. ANTENNA REQUIREMENT

8.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

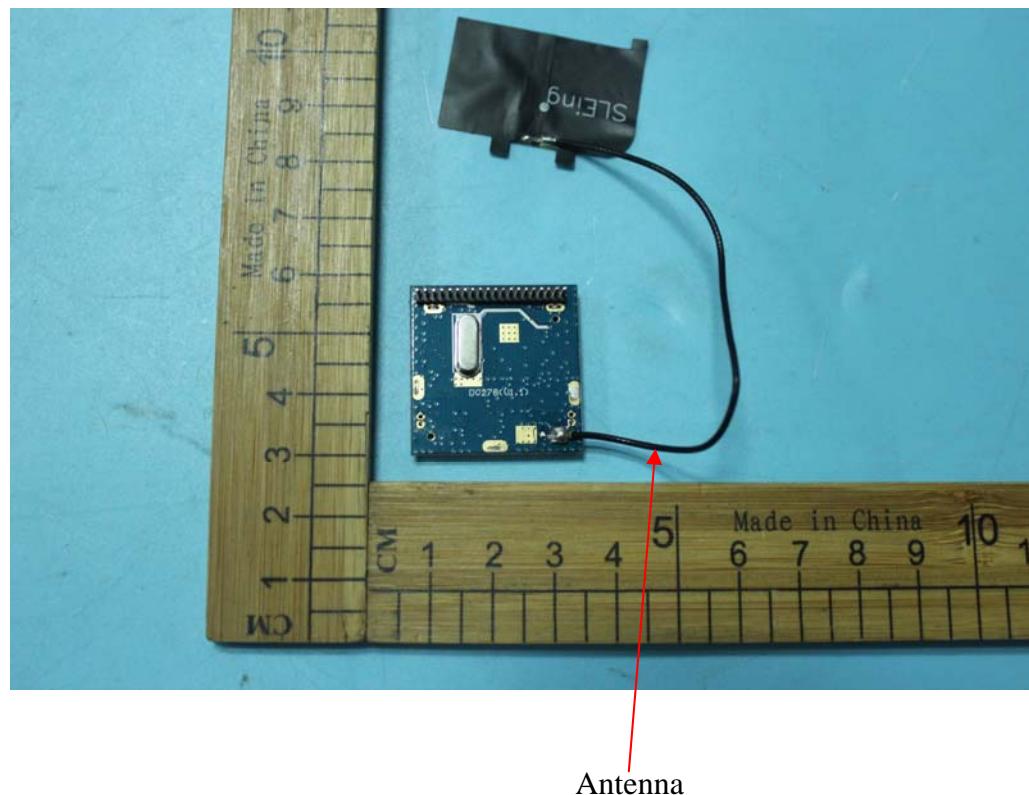

----- THE END OF TEST REPORT -----