

safety info

Place the monitor away from direct sunlight, heat, water or moisture. This product is made with precise electronic components. Handle with care. Improper use can cause a malfunction.

- Firmly fix the lighter plug to cigarette socket.
- Do not install the monitor where it may obstruct drivers view or obstruct an air bag device.
- Do not attempt to service this product on your own. If the system has any problem, disconnect the power and contact customer service.
- Dropping the unit may cause possible mechanical failure.

A failure to read and follow these warnings and instructions may result in a serious accident, including damaged property or a serious injury, including loss of life.

Introduction

Please read all of the installation instructions carefully before installing the product. Improper installation will void manufacturer's warranty.

Congratulations on purchasing a Rear View Backup Camera System. With this manual you will be able to properly install and operate the unit. The Backup Camera System is intended to be installed as a supplement aid to your standard rear view mirror that already exists in your vehicle. The Backup Camera System should not be used as a substitute for the standard rear view mirror or for any other mirror that exists in your vehicle. In some jurisdictions, it is unlawful for a person to drive a motor vehicle equipped with a TV viewer or screen located forward of the back of the driver's seat or in any location that is visible, directly or indirectly, to the driver while operating the vehicle

Contents:

Camera and Monitor
Battery Not Included



Product Manual Digital Wireless Hitch Camera Rear View Camera System

Installation

STEP 1: Load 9V battery to battery compartment with its polarities matched.



STEP 2: Place camera above hitch ball and push power button for 2 seconds on camera until you see a steady blue light (to power off camera hold power button down for 2 seconds)

STEP 3: Attach monitor to cigarette lighter port in vehicle. To power on/off monitor hold power button down to 3 seconds.




System Comes Paired

Pairing:

- 1) Turn on camera (see step 2 above)
- 2) Hold power button on camera for 6 seconds until Led flashes Blue. (camera is now in pair mode for 10 seconds)
- 3) Turn on monitor (see step 3 above)
- 4) Push the pair button on monitor until PAIR OK is displayed
- 5) Restart monitor (step 3) System is now PAIRED

Camera and Monitor Placement

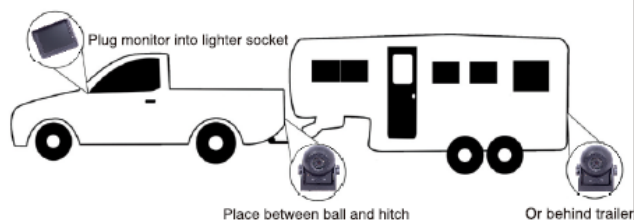

Troubleshooting

static, fuzziness or blue screen on Monitor

- Battery may be weak, try an alternate battery.
Please note: 3-5 hr battery life on camera.
- Out of range

Safety Precautions

The monitor should be kept out of direct sunlight, heat, water or humidity (it is made of sophisticated electronic equipment and must be used with care to avoid malfunction due to improper use or carelessness).

Make sure the monitor is securely fastened in a safe place. Please pay special attention to the position of the cable when installing the rear view system to avoid the cable being damaged

features

Wireless Transmission - Up to 70 feet range using a 2.4 GHZ transmitter/receiver.

Color Monitor - 3.5" LCD Plugs Into The Vehicle's Cigarette lighter.

Magnetic camera Mount - camera mounts anywhere with no hardware!

NO WIRING - Plug & Play system is ready to use in under ONE MINUTE!!

camera is 100% Waterproof - Rated IP68, can withstand all weather elements.

6 automatic Infra-red night vision lights = 30 feet of vision in the darkest night. With built in foam around lens (so you are guaranteed not to have any glare from the ir's).

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.