

FCC 15.247 **2.4 GHz Test Report**

for

Authentrend Technology Inc.

**12F-2, No.659, Sec.1, Neihu Rd., Neihu Dist,
Taipei City, 114, Taiwan**

Product Name : ATKey.card
Model Name : ATKEYCARD1
Brand : AuthenTrend
FCC ID : 2AOPY-ATKEYCARD1

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Antenna Information	9
3.4. EUT Specifications Assessed in Current Report.....	9
3.5. Descriptions of Key Components.....	9
3.6. Data Rate Relative to Output Power.....	10
3.7. Test Configuration.....	10
3.8. Tested Supporting System List.....	11
3.9. Setup Configuration.....	11
3.10. Operating Condition of EUT	11
3.11. Description of Test Facility	12
3.12. Measurement Uncertainty	12
4. MEASUREMENT EQUIPMENT LIST.....	13
4.1. Conducted Emission Measurement	13
4.2. Radiated Emission Measurement	13
4.3. RF Conducted Measurement	13
5. CONDUCTED EMISSION.....	14
5.1. Block Diagram of Test Setup	14
5.2. Conducted Emission Limit	14
5.3. Test Procedure	14
5.4. Test Results	14
6. RADIATED EMISSION	15
6.1. Block Diagram of Test Setup	15
6.2. Radiated Emission Limits.....	16
6.3. Test Procedure	17
6.4. Measurement Result Explanation.....	18
6.5. Test Results	18
7. 6dB BANDWIDTH	19
7.1. Block Diagram of Test Setup	19
7.2. Specification Limits.....	19
7.3. Test Procedure	19
7.4. Test Results	19
8. MAXIMUM PEAK OUTPUT POWER	20
8.1. Block Diagram of Test Setup	20
8.2. Specification Limits.....	20
8.3. Test Procedure	21
8.4. Test Results	21
9. EMISSION LIMITATIONS	22



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.1.	Block Diagram of Test Setup	22
9.2.	Specification Limits.....	22
9.3.	Test Procedure	22
9.4.	Test Results	23
10.	POWER SPECTRAL DENSITY	24
10.1.	Block Diagram of Test Setup	24
10.2.	Specification Limits.....	24
10.3.	Test Procedure	24
10.4.	Test Results	24
11.	DEVIATION TO TEST SPECIFICATIONS	25

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : Authentrend Technology Inc.
Factory : JING WANG Electronic Co. Ltd.
EUT Description
(1) Product : ATKey.card
(2) Model : ATKEYCARD1
(3) Brand : AuthenTrend
(4) Power Supply: DC 5V (USB)

Applicable Standards:


47 CFR FCC Part 15 Subpart C
ANSI C63.10:2013
KDB 558074 D01 DTS Meas Guidance v05

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2018. 11. 29

Reviewed by:

 (Annie Yu/Administrator)

Approved by:

 (Ben Cheng/Manager)



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan*

*Tel: +886 2 26099301
Fax: +886 2 26099303*

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2018. 11. 29	Original Report	EM-F180523

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)(3)	Maximum Peak Output	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	Compliance

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Authentrend Technology Inc. 12F-2, No.659, Sec. 1, Neihu Rd., Neihu Dist, Taipei City, 114, Taiwan
Factory	JING WANG Electronic Co. Ltd. Dongye Road, Science and Technology Industrial Park, Houjie Town, Dongguan City, Guangdong Province, P.R. China
Product	ATKey.card
Model	ATKEYCARD1
Brand	AuthenTrend

3.2. Description of EUT

Test Model	ATKEYCARD1
Serial Number	N/A
Power Rating	DC 5V (Via USB) or DC 3.7V (Via Battery)
RF Features	BLE NFC (Passive)
Transmit Type	1T1R
Sample Status	Production
Date of Receipt	2018. 11. 05
Date of Test	2018. 11. 15 ~ 28
Interface Ports of EUT	• USB Port tx1
Accessories Supplied	None

3.3. Antenna Information

BLE Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	---	---	PCB Antenna	2400-2480	-1.8992

NFC Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	---	---	Loop Antenna	13.56	---

3.4. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK	1

Channel List							
BLE							
Channel Number	Frequency (MHz)						
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480

3.5. Descriptions of Key Components

None

3.6. Data Rate Relative to Output Power


BLE			
Channel	Modulation	Date Rate(Mbps)	Power(dBm)
37	GFSK	1	-0.88

Note: Above results are assessed in peak power.

3.7. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
BLE	0.641	0.400	1.931

Note: When duty cycle is less than 98% (0.98) that duty cycle factor $10\log(1/x)$ is needed to add in conducted test items measured in average detector.

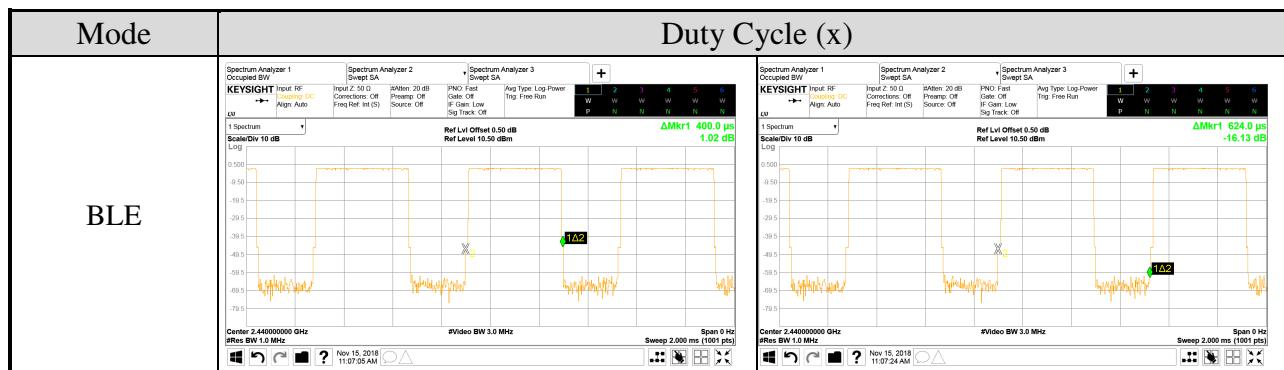

AC Conduction	
Test Case	Normal operation

	Item	Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note1}	BLE	1Mbps	37/39
	Radiated Spurious Emission ^{Note1 & 2}	BLE	1Mbps	37/17/39
Conducted Test Case	6dB Bandwidth	BLE	1Mbps	37/17/39
	Peak Output Power	BLE	1Mbps	37/17/39
	Band Edge	BLE	1Mbps	37/39
	Spurious Emission	BLE	1Mbps	37/17/39
	Peak Power Spectral Density	BLE	1Mbps	37/17/39

Note 1: Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: Lie Side Stand

3.8. Tested Supporting System List

3.8.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	Approval
1.	Notebook PC	ASUS	X5502E	N/A	Contains FCC ID: PPD-AAR5B225

3.8.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	USB Cable : Unshielded, Detachable, 1.0m Adapter: Enerironix, M/N EXA1208UH, DC Cord : Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord : Unshielded, Detachable, 1.8m

3.9. Setup Configuration

3.9.1. EUT Configuration for Power Line & Radiated Emission



3.9.2. EUT Configuration for RF Conducted Test Items



3.10. Operating Condition of EUT

Test program “WCN_Combo_Tool” is used for enabling EUT BT function under continues transmitting and choosing data rate/ channel.

3.11. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2005 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 (1) No. 8 Shielding Room (2) Semi-Anechoic Chamber (IC Test Site Registration No.: 5183B-1) (3) Fully Anechoic Chamber (IC Test Site Registration No.: 5183B-4)

3.12. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.50dB
Radiation Test (Distance: 3m)	30MHz~1000MHz Above 1GHz	± 3.68dB ± 5.82dB

Remark : Uncertainty = $k u_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	100558	2018. 10. 26	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2018. 11. 14	1 Year
3.	Pulse Limiter	R&S	ESH3-Z2	100354	2018. 01. 16	1 Year
4.	Signal Cable	Yeida	RG/58AU	CE-08	2018. 09. 21	1 Year
5.	Digital Thermo- Hygro Meter	iMax	HTC-1	No.8 S/R	2018. 04. 20	1 Year

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2018. 09. 12	1 Year
2.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2018. 02. 01	1 Year
3.	Test Receiver	R & S	ESCS30	100338	2018. 06. 20	1 Year
4.	Amplifier	HP	8447D	2944A06305	2018. 01. 30	1 Year
5.	Amplifier	HP	8449B	3008A02678	2018. 03. 06	1 Year
6.	Loop Antenna	R&S	HFH2-Z2	891847/27	2017. 12. 18	1 Year
7.	Bilog Antenna	CHASE	CBL6112D	33821	2018. 01. 21	1 Year
8.	Horn Antenna	COM-POWER	AH-840	101092	2018. 05. 07	1 Year
9.	Horn Antenna	ETS-Lindgren	3117	00135902	2018. 03. 08	1 Year
10.	2.4GHz Notch Filter	K&L	7NSL10-2441.5E130.5-00	1	2018. 07. 24	1 Year
11.	3GHz High-Pass Filter	Microwave	H3G018G1	484796	2018. 08. 22	1 Year
12.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2018. 04. 20	1 Year
13.	Digital Thermo-Hygro Meter	iMax	E-512	RF-02	2018. 04. 20	1 Year
14.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2018. 01. 15	1 Year
2.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2018. 04. 20	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.9

5.1.2. Shielded Room Setup Diagram

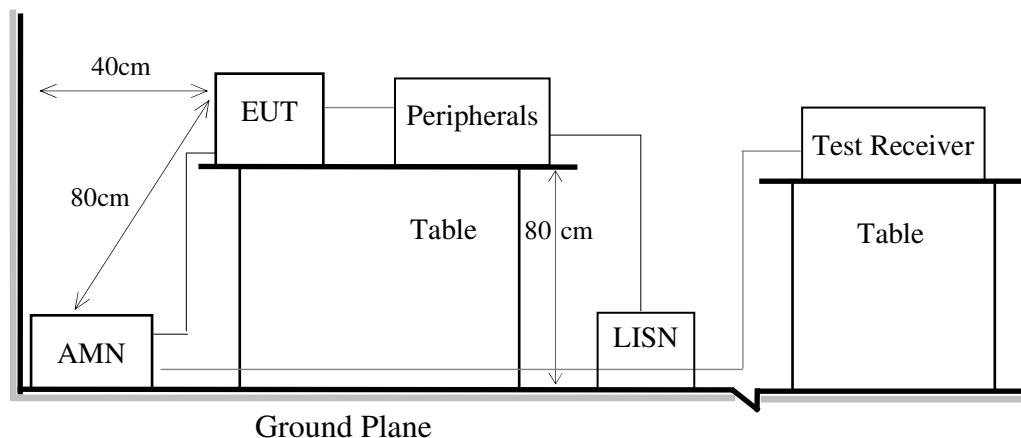

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.9


6.1.2. Setup Diagram for 9kHz-30MHz

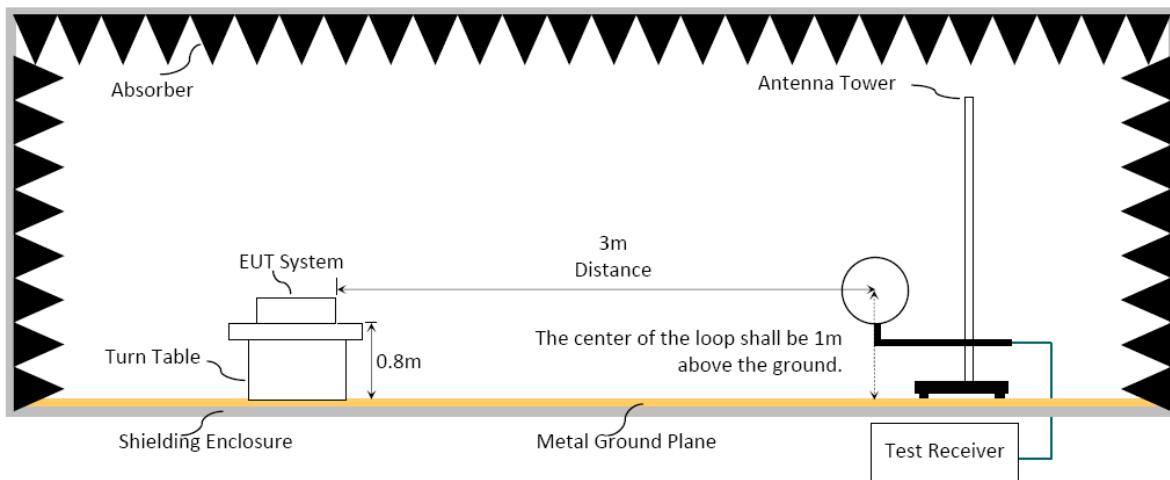

6.1.3. Setup Diagram for 30-1000 MHz

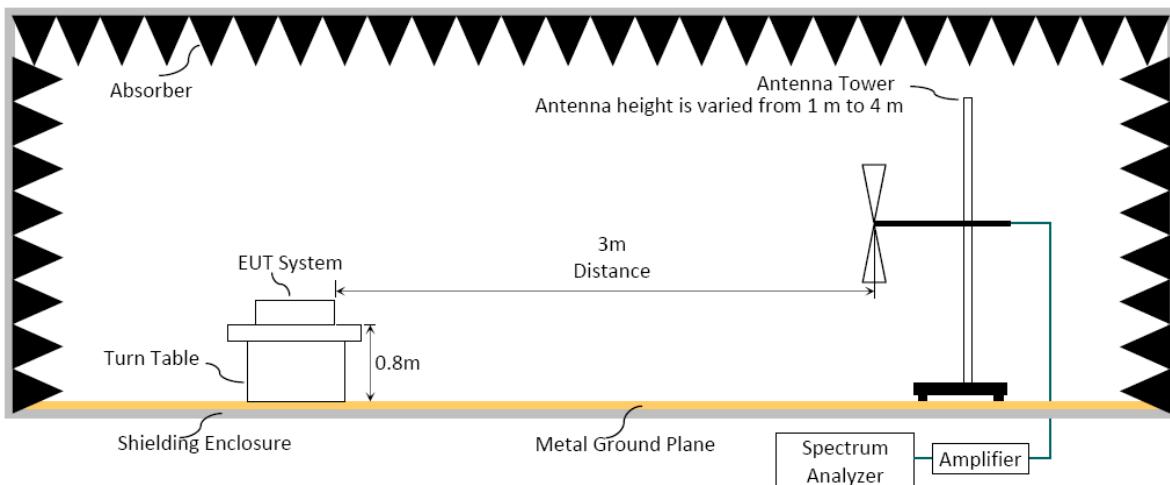

6.1.4. Setup Diagram for above 1GHz

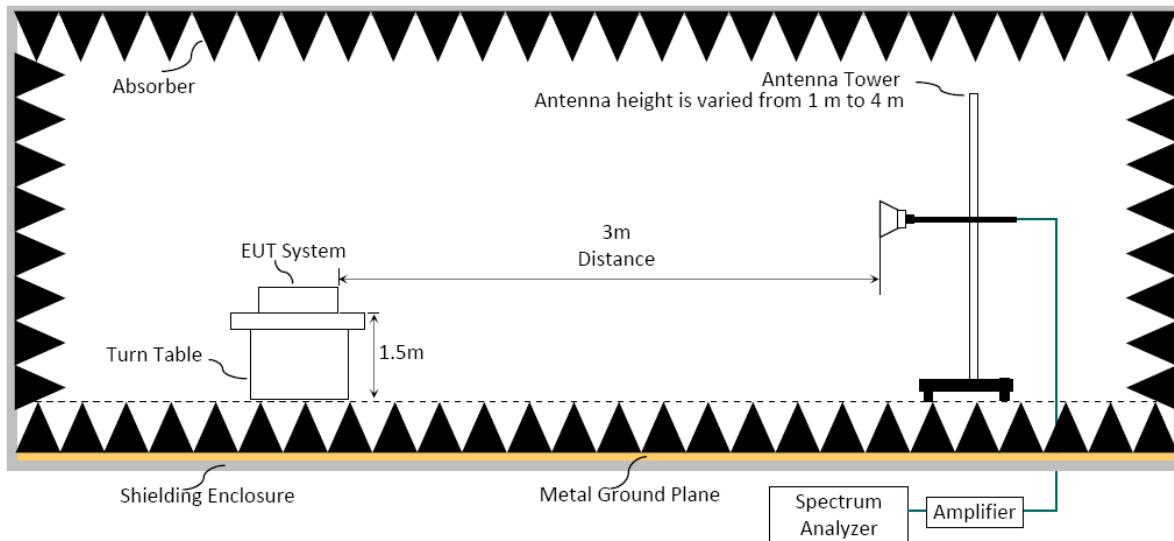

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1)RBW = 120KHz
- (2)VBW \geq 3 x RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.
- (7)When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1)RBW = 1MHz
- (2)VBW \geq 3 x RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.
- (7)When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector: **Option 1:**

(1)RBW = 1MHz
(2)VBW \geq 1/ T.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting (kHz)
BLE	0.400	2.500	2.4

N/A: 1/ T is not implemented when duty cycle presented in section 3.7 is \geq 98 %.

(1)Detector = Peak.
(2)Sweep time = auto.
(3)Trace mode = max hold.
(4)Allow sweeps to continue until the trace stabilizes.

 Option 2:

Average Emission Level= Peak Emission Level+ D.C.C.F.

6.4. Measurement Result Explanation


Peak Emission Level=Antenna Factor + Cable Loss + Meter Reading
 Average Emission Level l=Antenna Factor + Cable Loss + Meter Reading
 Average Emission Level= Peak Emission Level+ DCCF
Duty Cycle Correction Factor (DCCF)= $20\log(\text{TX}_{\text{on}}/\text{TX}_{\text{on+off}})$ presented in section 3.7
 ERP= Peak Emission Level-95.2dB-2.14dB

6.5. Test Results

Please refer to Appendix A.

7. 6dB BANDWIDTH

7.1. Block Diagram of Test Setup

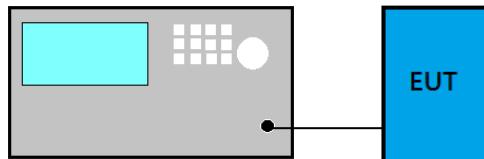

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v05:

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.


7.4. Test Results

Please refer to Appendix A


8. MAXIMUM PEAK OUTPUT POWER

8.1. Block Diagram of Test Setup

- For WLAN Function

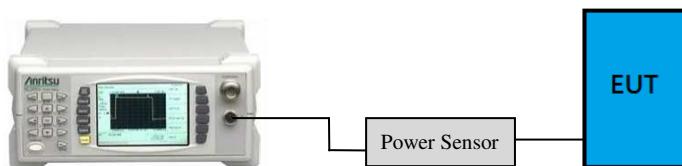

- For BLE Function

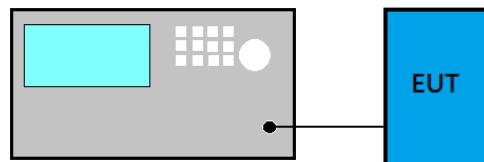

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v05:

KPM1 Peak power meter method:

EUT is connected to power sensor and record the maximum output power.

Maximum peak conducted output power method:

- (1) Set the RBW \geq DTS bandwidth
- (2) Set VBW $\geq 3 \times$ RBW
- (3) Set span $\geq 3 \times$ RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

Method AVGPM (Measurement using an RF average power meter):

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

Method AVGSA-2 (Spectrum channel power)


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS

9.1. Block Diagram of Test Setup

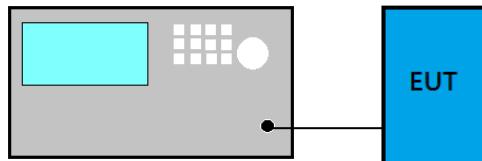

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v05:

■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

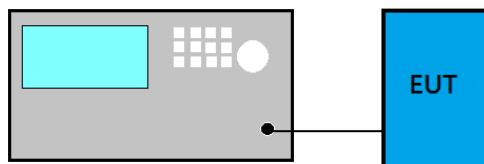

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v05:

Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector= RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 $< 98\%$.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Please refer to Appendix A



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan*

Page 25 of 25

*Tel: +886 2 26099301
Fax: +886 2 26099303*

11. DEVIATION TO TEST SPECIFICATIONS

【NONE】



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan*

APPENDIX A

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPENDIX A

TEST DATA AND PLOTS


(Model: ATKEYCARD1)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	10
A.2.3 Emissions in Non-restricted Frequency Bands:.....	10
A.3 6dB BANDWIDTH	11
A.3.1 6dB Bandwidth Result.....	11
A.3.2 Measurement Plots	11
A.4 MAXIMUM PEAK OUTPUT POWER	12
A.4.1 Peak Output Power	12
A.4.2 Measurement Plots	12
A.5 EMISSION LIMITATIONS	13
A.6 POWER SPECTRAL DENSITY	16
A.6.1 Power Spectral Density Result	16
A.6.2 Measurement Plots	16

A.1 CONDUCTED EMISSION

Test Date	2018/11/28	Temp./Hum.	24°C/57%
Test Voltage	DC 5V (Via USB)		

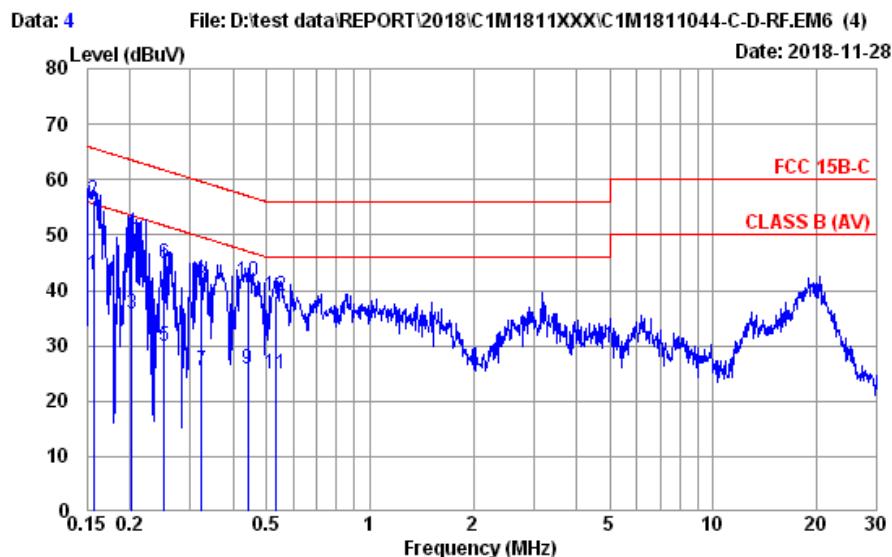


Site no. : No.8 Shielded Room Data no. : 4
 Condition : ENV4200 100169 LISN Phase : NEUTRAL
 Limit : FCC 15B-C
 Env. / Ins. : 24°C / 57% ESCI (558) Engineer : Nick Du
 EUT : ATKEYCARD.1
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Emission				Margin (dB)	Remark
				Reading (dB μ V)	Level (dB μ V)	Limits (dB μ V)			
1 0.156	10.56	0.03	9.98	22.14	42.71	55.65	12.94	Average	
2 0.156	10.56	0.03	9.98	35.56	56.13	65.65	9.52	QP	
3 0.203	10.52	0.03	9.98	15.24	35.77	53.49	17.72	Average	
4 0.203	10.52	0.03	9.98	30.01	50.54	63.49	12.95	QP	
5 0.252	10.49	0.03	9.98	9.25	29.75	51.69	21.94	Average	
6 0.252	10.49	0.03	9.98	24.30	44.80	61.69	16.89	QP	
7 0.323	10.46	0.04	9.98	4.99	25.47	49.62	24.15	Average	
8 0.323	10.46	0.04	9.98	20.56	41.04	59.62	18.58	QP	
9 0.442	10.43	0.04	9.98	5.42	25.87	47.02	21.15	Average	
10 0.442	10.43	0.04	9.98	21.26	41.71	57.02	15.31	QP	
11 0.529	10.43	0.05	9.98	4.54	25.00	46.00	21.00	Average	
12 0.529	10.43	0.05	9.98	18.53	38.99	56.00	17.01	QP	

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Test Date	2018/11/28	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

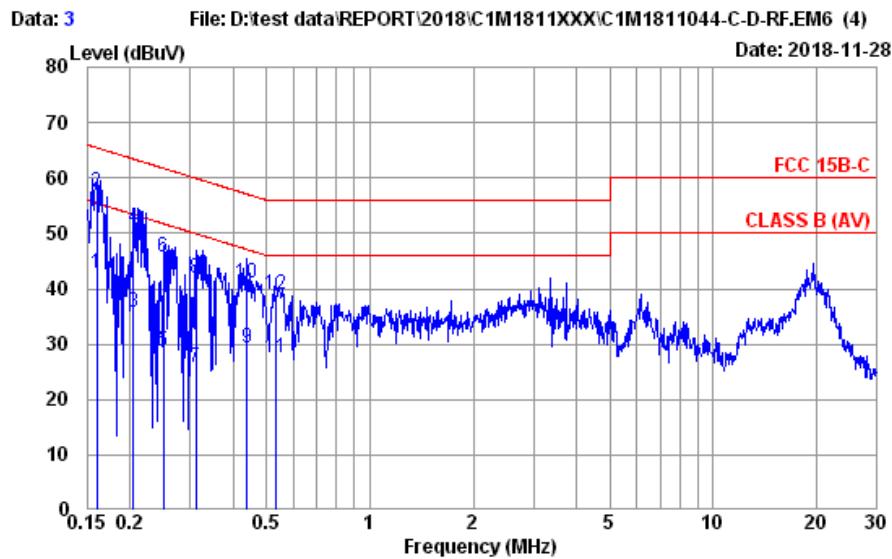

Site no. : No.8 Shielded Room Data no. : 3
 Condition : ENV4200 100169 LISN Phase : LINE
 Limit : FCC 15B-C
 Env. / Ins. : 24°C / 57% ESCI (558) Engineer : Nick Du
 EUT : ATKEYCARD.1
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	AMN	Cable	Pulse	Emission				
Freq. (MHz)	Factor (dB)	Loss (dB)	Att. (dB)	Reading (dBµV)	Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1 0.160	10.61	0.03	9.98	22.14	42.76	55.47	12.71	Average
2 0.160	10.61	0.03	9.98	36.68	57.30	65.47	8.17	QP
3 0.205	10.56	0.03	9.98	15.13	35.70	53.40	17.70	Average
4 0.205	10.56	0.03	9.98	30.37	50.94	63.40	12.46	QP
5 0.251	10.52	0.03	9.98	8.22	28.75	51.73	22.98	Average
6 0.251	10.52	0.03	9.98	25.10	45.63	61.73	16.10	QP
7 0.312	10.49	0.04	9.98	5.20	25.71	49.93	24.22	Average
8 0.312	10.49	0.04	9.98	21.31	41.82	59.93	18.11	QP
9 0.437	10.45	0.04	9.98	8.89	29.36	47.11	17.75	Average
10 0.437	10.45	0.04	9.98	20.43	40.90	57.11	16.21	QP
11 0.529	10.45	0.05	9.98	7.03	27.51	46.00	18.49	Average
12 0.529	10.45	0.05	9.98	18.61	39.09	56.00	16.91	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2018/11/26	Temp./Hum.	23°C/43%
Test Voltage	DC 5V (USB via Notebook PC)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
115.36	18.54	2.92	14.87	36.33	43.50	7.17	Peak
246.31	19.13	3.96	16.48	39.57	46.00	6.43	Peak
265.71	19.54	4.10	15.49	39.13	46.00	6.87	Peak
292.87	19.78	4.31	13.23	37.32	46.00	8.68	Peak
357.86	21.44	5.20	8.58	35.22	46.00	10.78	Peak
480.08	23.48	5.99	11.04	40.51	46.00	5.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
59.10	12.82	2.00	21.76	36.58	40.00	3.42	Peak
89.17	15.51	2.43	16.72	34.66	43.50	8.84	Peak
265.71	19.54	4.10	5.77	29.41	46.00	16.59	Peak
320.03	20.42	4.65	5.65	30.72	46.00	15.28	Peak
398.60	22.43	5.79	4.36	32.58	46.00	13.42	Peak
480.08	23.48	5.99	8.98	38.45	46.00	7.55	Peak


A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:

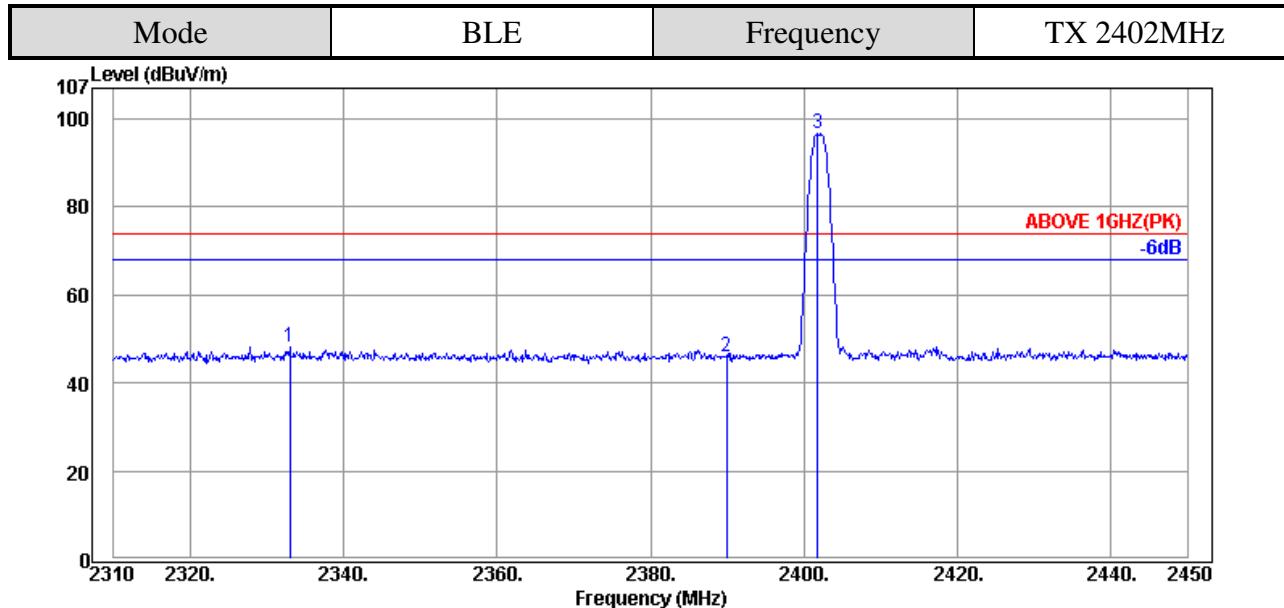

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2332.96	32.06	7.79	8.50	48.35	74.00	25.65	Peak
2389.94	32.16	7.92	5.99	46.07	74.00	27.93	Peak
2401.84	32.16	7.92	56.50	96.58	---	---	Peak

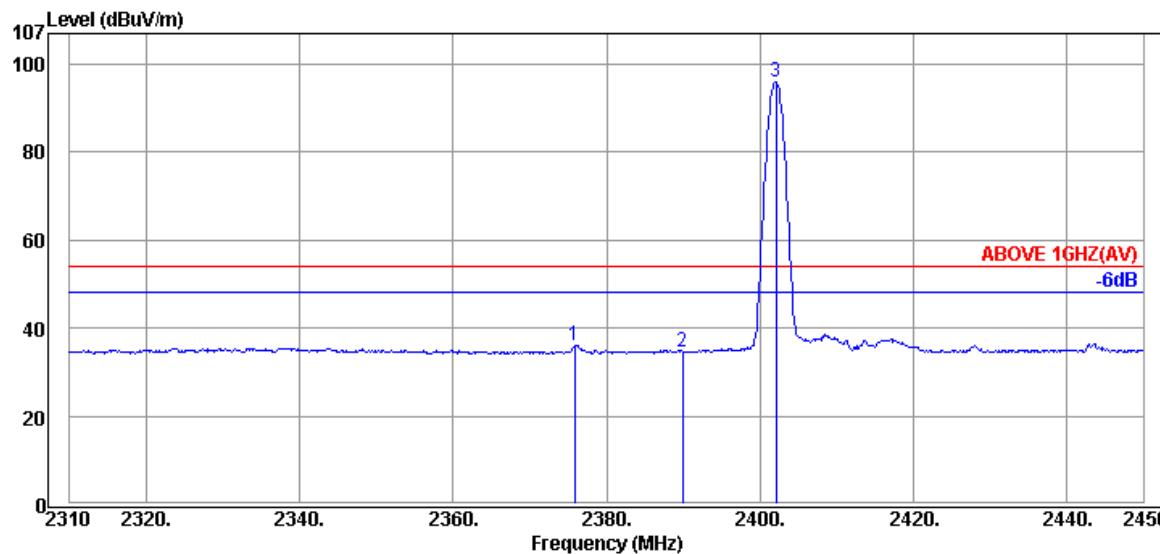

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2375.80	32.13	7.89	-4.07	35.95	54.00	18.05	Average
2389.94	32.16	7.92	-5.36	34.72	54.00	19.28	Average
2402.12	32.16	7.92	55.76	95.84	---	---	Average

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

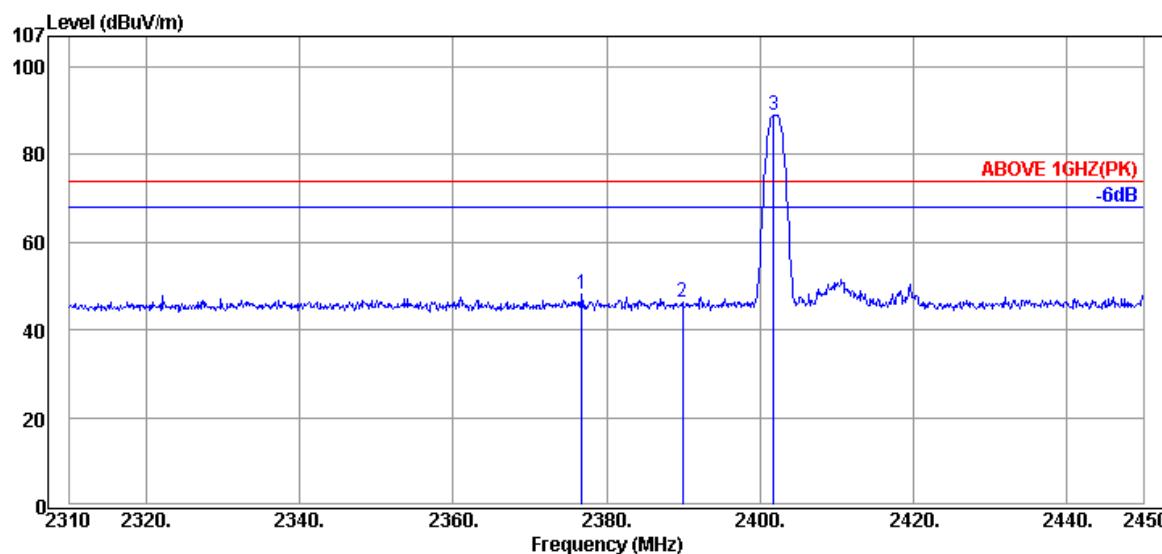

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2376.78	32.13	7.89	8.23	48.25	74.00	25.75	Peak
2389.94	32.16	7.92	6.10	46.18	74.00	27.82	Peak
2401.84	32.16	7.92	48.90	88.98	---	---	Peak

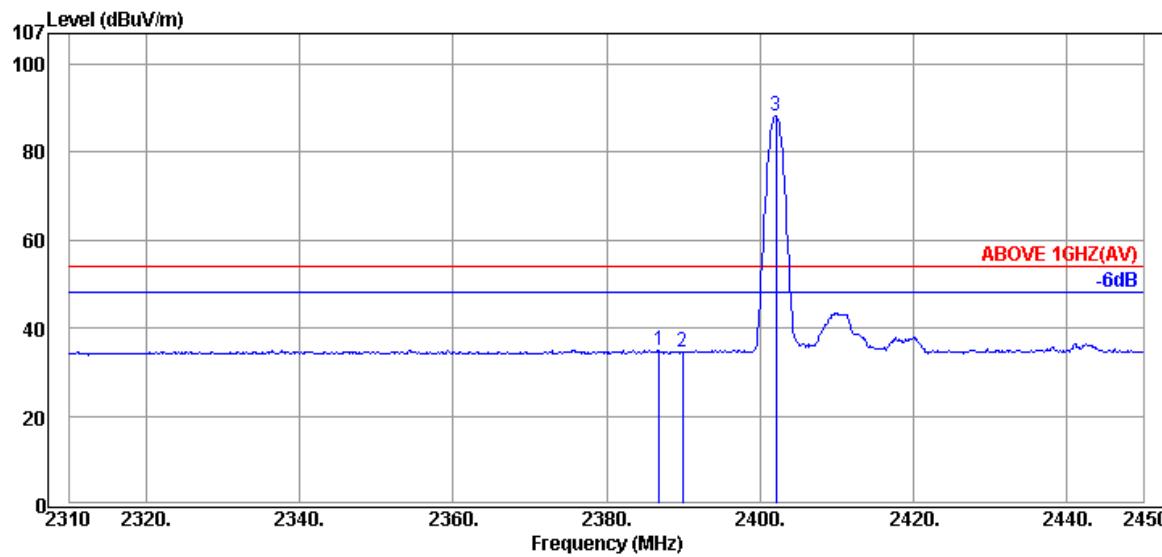

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2386.86	32.16	7.92	-4.99	35.09	54.00	18.91	Average
2389.94	32.16	7.92	-5.63	34.45	54.00	19.55	Average
2402.12	32.16	7.92	48.18	88.26	---	---	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

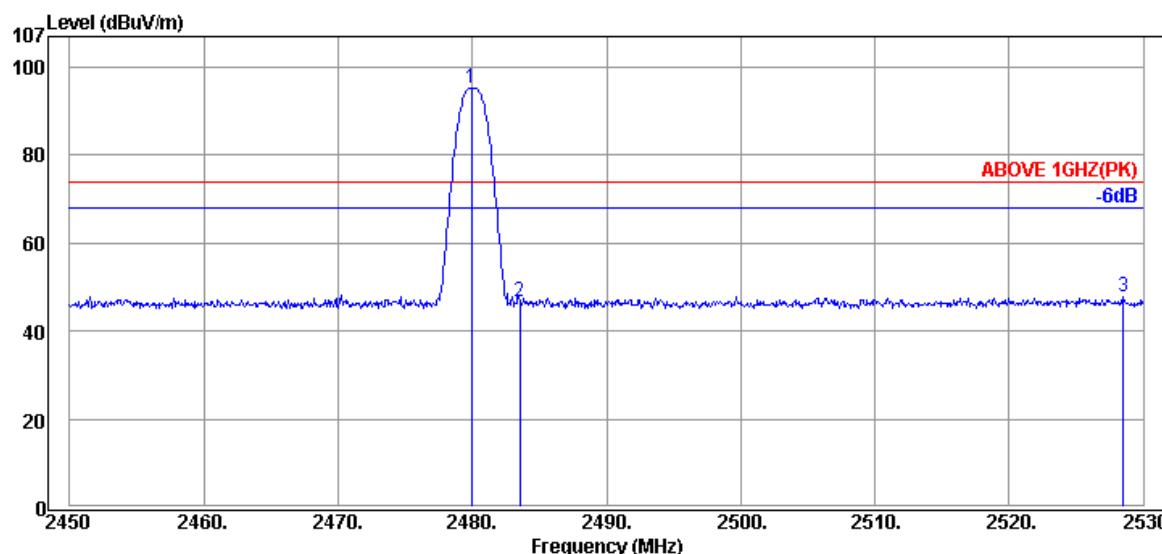

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2479.92	32.28	7.90	54.96	95.14	---	---	Peak
2483.52	32.28	7.90	6.36	46.54	74.00	27.46	Peak
2528.48	32.34	7.98	7.60	47.92	74.00	26.08	Peak

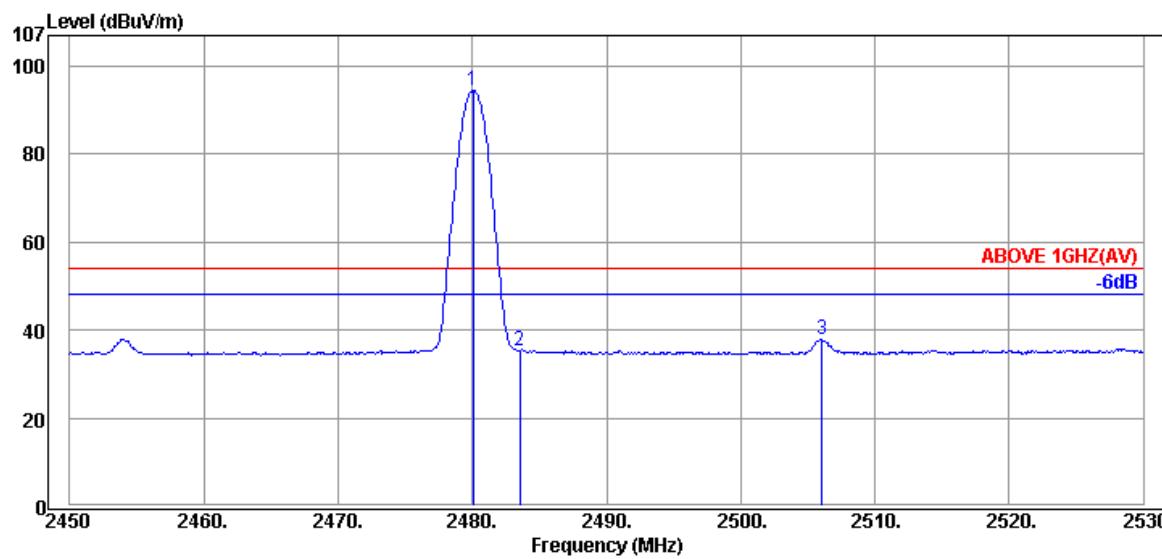

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2480.08	32.28	7.90	54.24	94.42	---	---	Average
2483.52	32.28	7.90	-4.72	35.46	54.00	18.54	Average
2506.08	32.32	7.94	-2.22	38.04	54.00	15.96	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

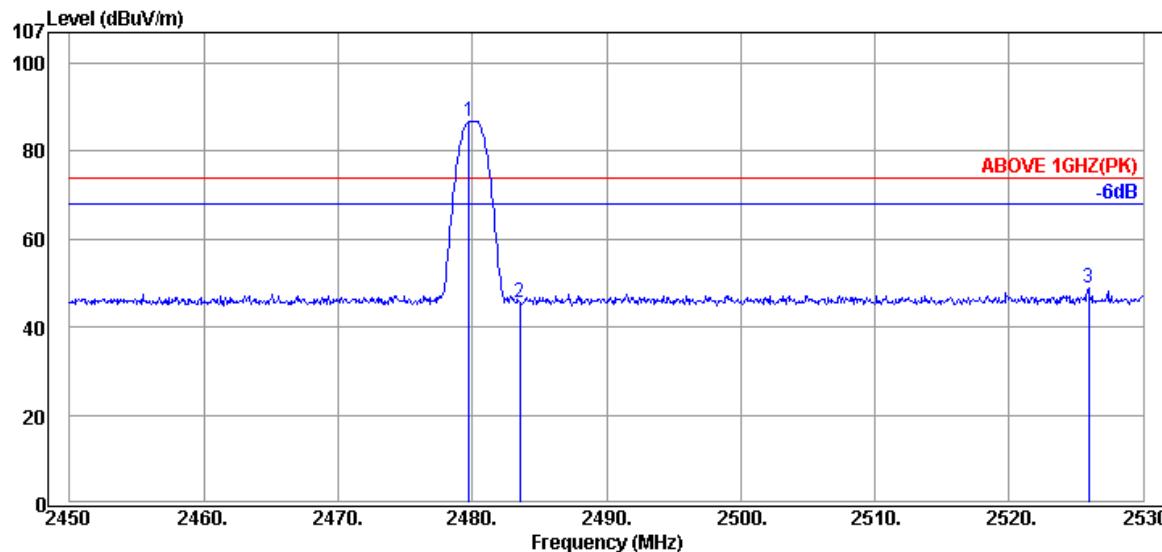

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2479.76	32.28	7.90	46.57	86.75	---	---	Peak
2483.52	32.28	7.90	5.34	45.52	74.00	28.48	Peak
2525.92	32.34	7.98	8.65	48.97	74.00	25.03	Peak

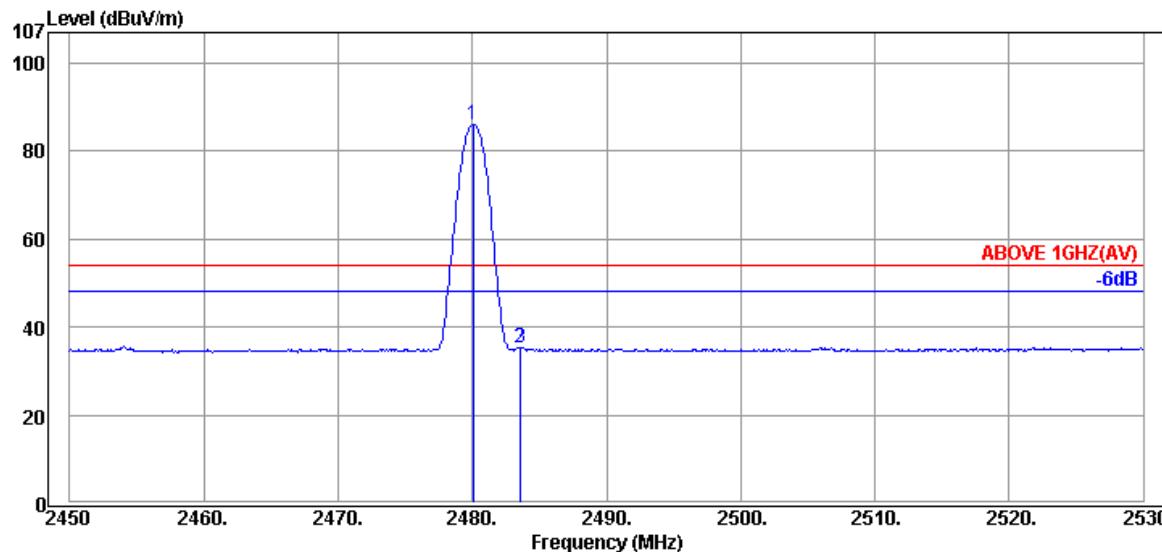

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2480.08	32.28	7.90	45.89	86.07	---	---	Average
2483.52	32.28	7.90	-4.96	35.22	54.00	18.78	Average
2483.60	32.28	7.90	-4.75	35.43	54.00	18.57	Average

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to KDB 558074 D01 DTS Meas Guidance v04 that emission levels below the FCC 15.209(a) general radiated emissions limits is not required.


A.3 6dB BANDWIDTH

Test Date	2018/11/15	Temp./Hum.	23°C/55%
Cable Loss	0.5dB	Test Voltage	DC 5V (Via USB)

A.3.1 6dB Bandwidth Result

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz) (Reference only)	Limit
BLE	2402	0.7156	1.0543	>500kHz
	2440	0.7135	1.0534	
	2480	0.7114	1.0536	

A.3.2 Measurement Plots

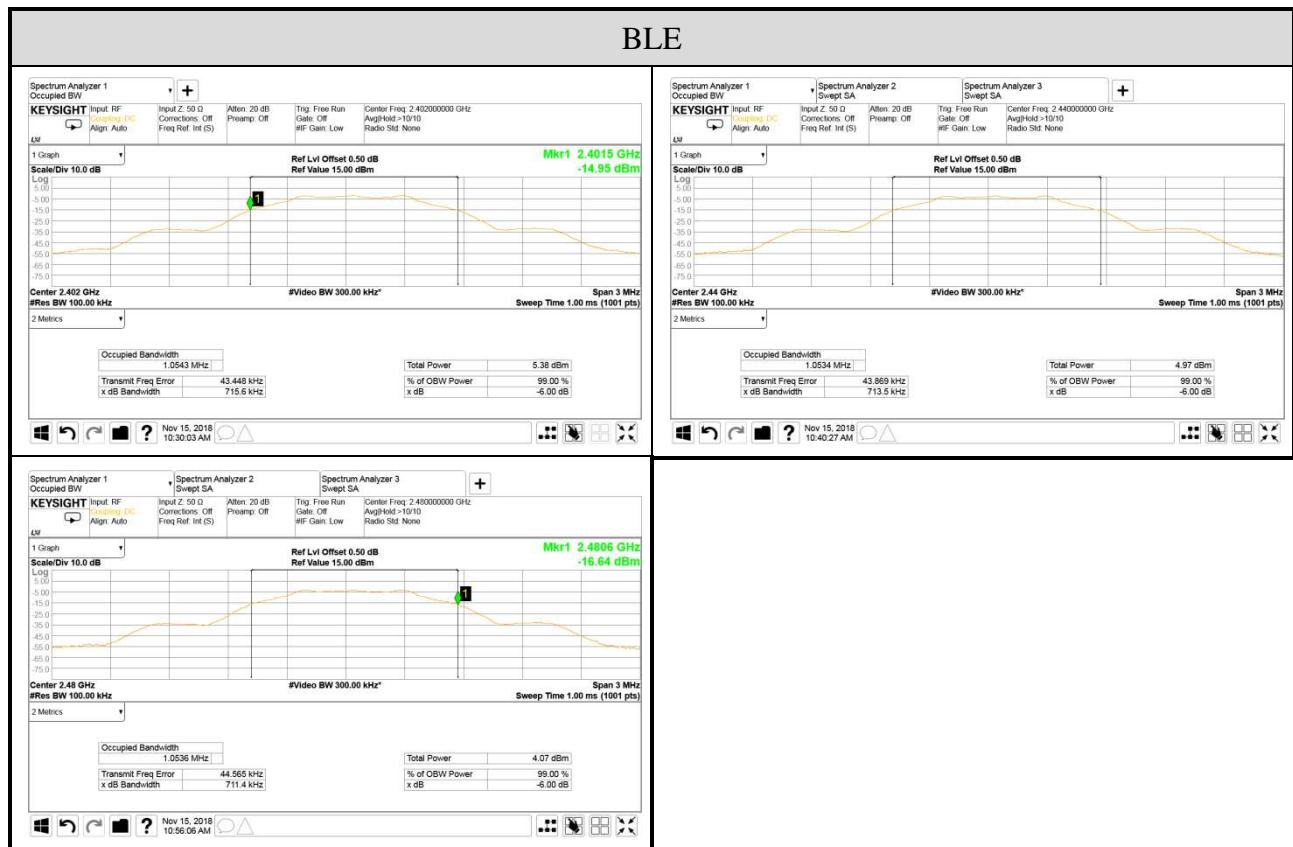

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2018/11/15	Temp./Hum.	23°C/55%
Cable Loss	0.5dB	Test Voltage	DC 5V (Via USB)

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	MAX Output Power		Limit
		(dBm)	(W)	
BLE	2402	-0.88	0.000817	< 30dBm (1W)
	2440	-1.32	0.000738	
	2480	-2.20	0.000603	


Note: The results have been included cable loss.

A.4.2 Measurement Plots




A.5 EMISSION LIMITATIONS


Test Date	2018/11/15	Temp./Hum.	23°C/55%
Cable Loss	0.50dB	Test Voltage	DC 5V (Via USB)
Mode	BLE	Frequency	TX 2402MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

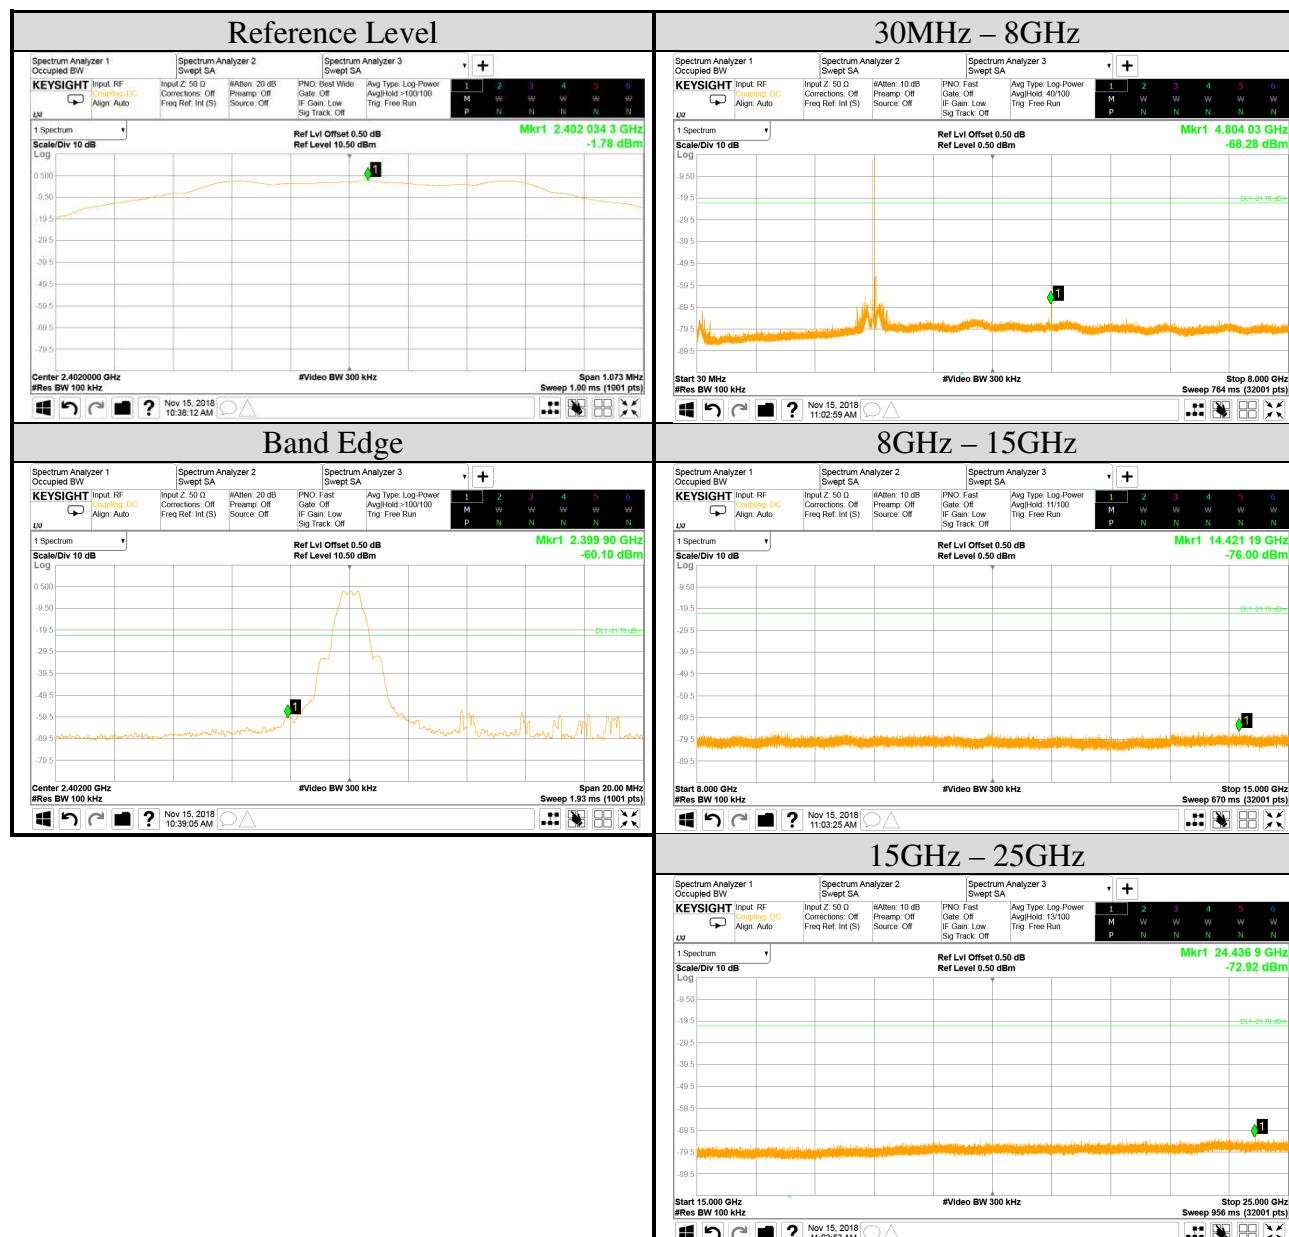

Test Date	2018/11/15	Temp./Hum.	23°C/55%
Cable Loss	0.50dB	Test Voltage	DC 5V (Via USB)
Mode	BLE	Frequency	TX 2440MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

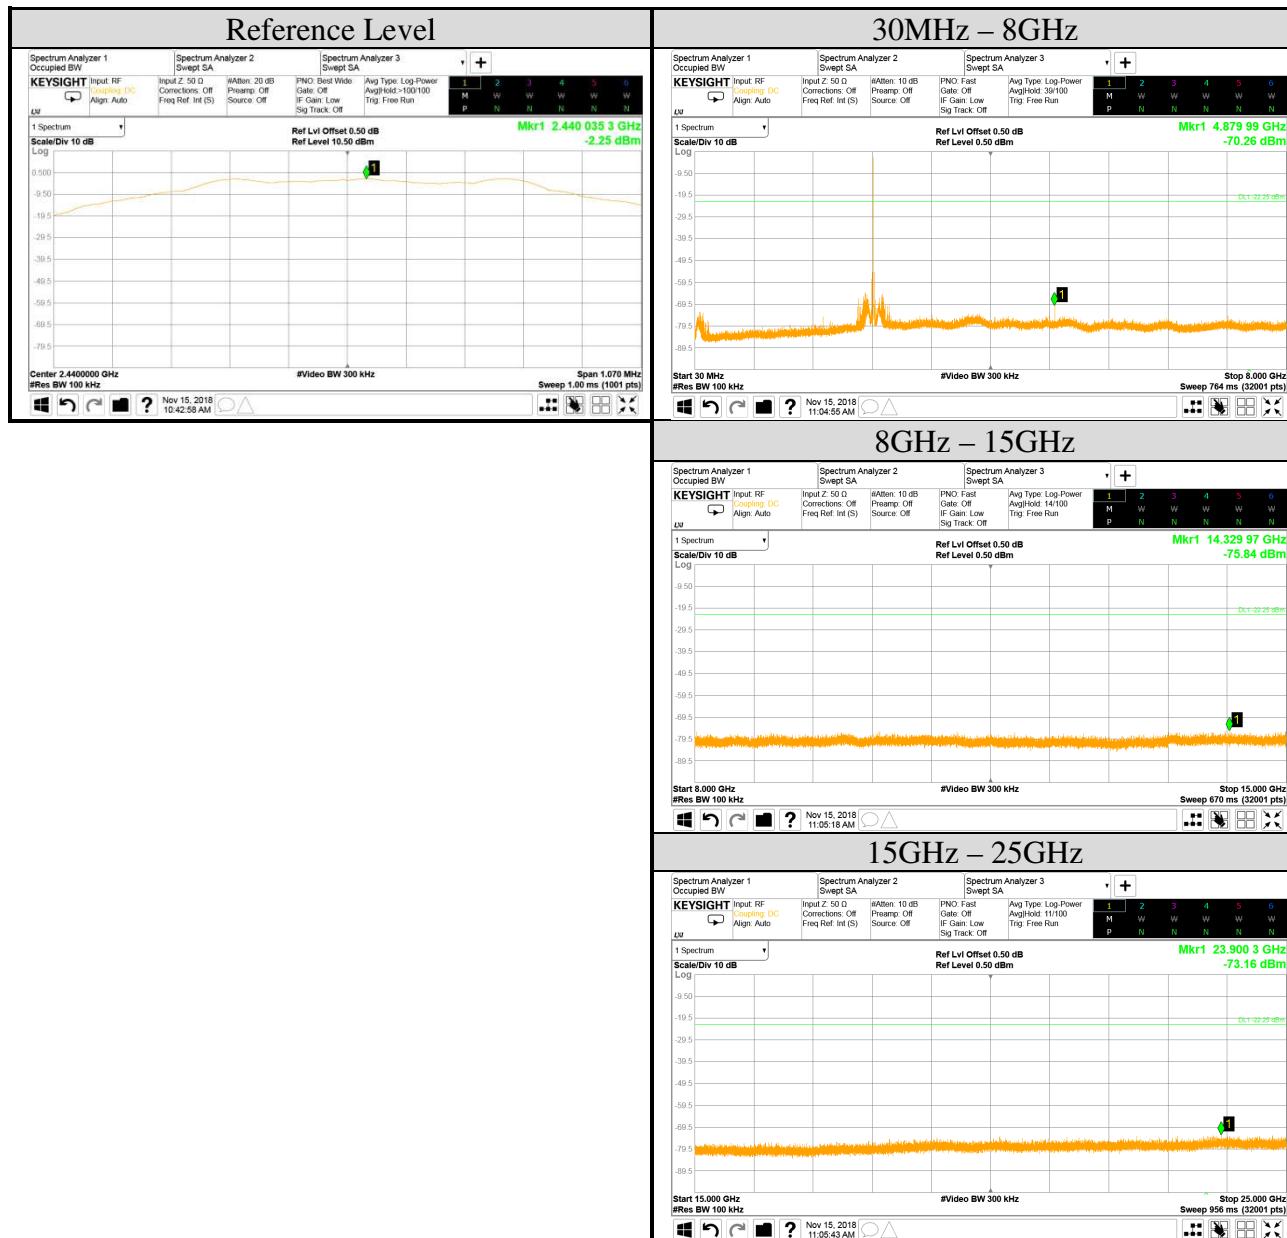

Test Date	2018/11/15	Temp./Hum.	23°C/55%
Cable Loss	0.50dB	Test Voltage	DC 5V (Via USB)
Mode	BLE	Frequency	TX 2480MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

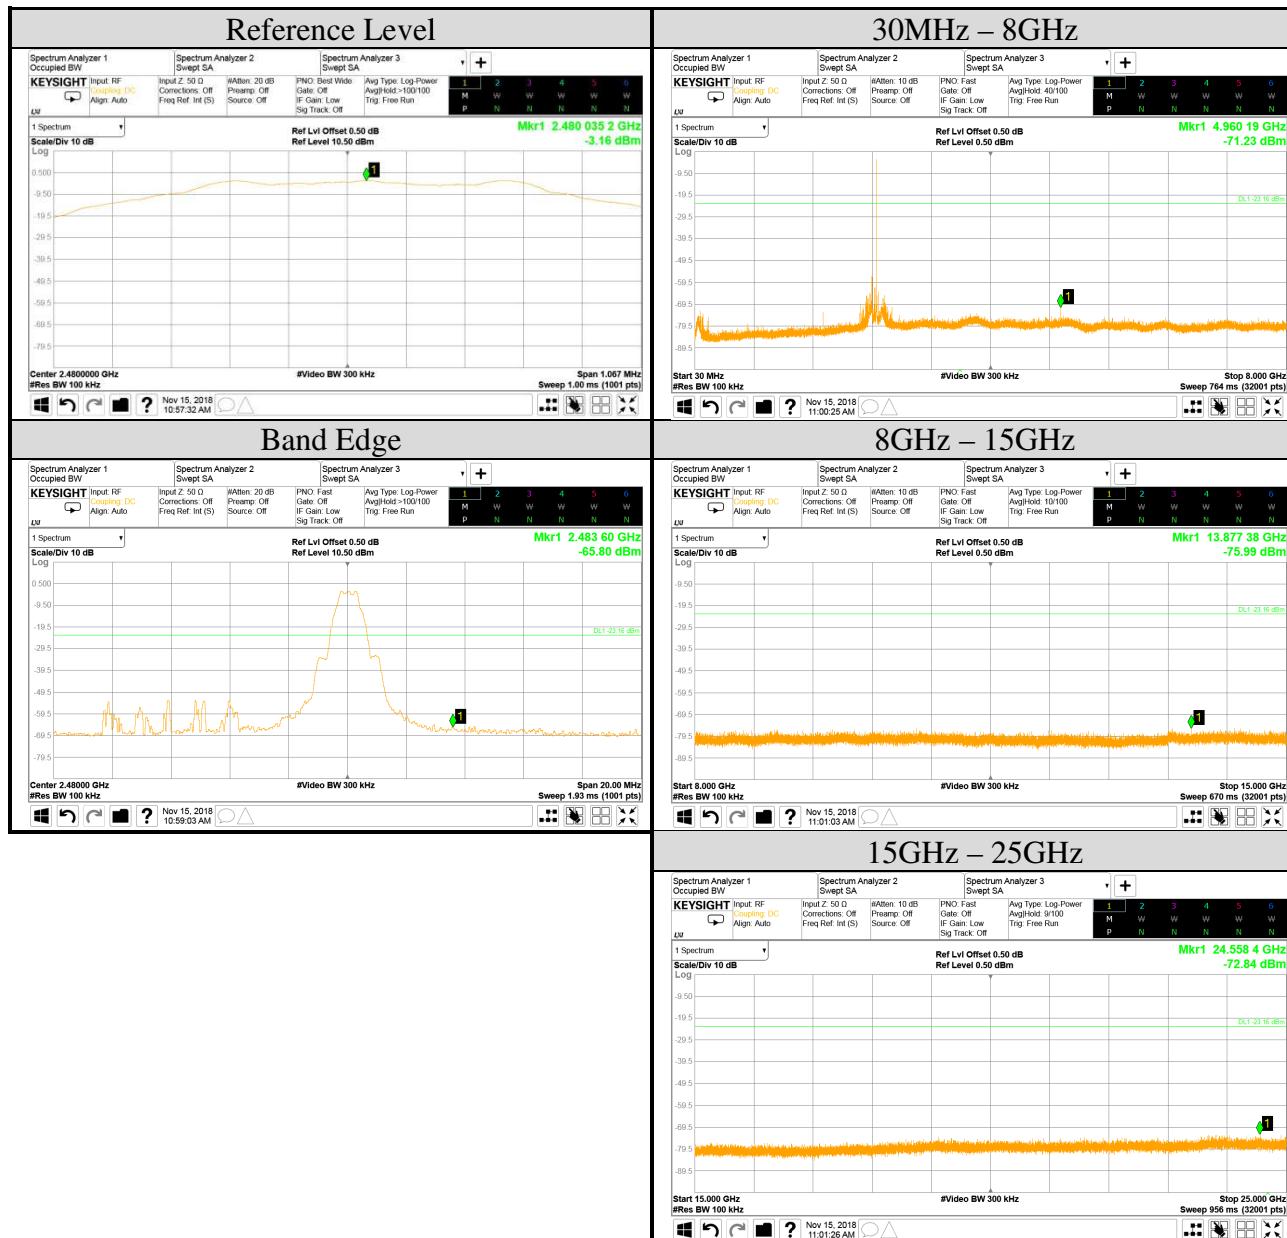

A.6 POWER SPECTRAL DENSITY

Test Date	2018/11/15	Temp./Hum.	23°C/55%
Cable Loss	0.50dB	Test Voltage	DC 5V (Via USB)
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0


A.6.1 Power Spectral Density Result

Mode	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
BLE	2402	-1.78	<8dBm/3kHz
	2440	-2.25	
	2480	-3.16	

Note: 1. All results have been included cable loss and Simultaneous Factor.

- For KDB558074 D01V04, in the test result, when RBW set at 100kHz is stricter than 3kHz.

A.6.2 Measurement Plots

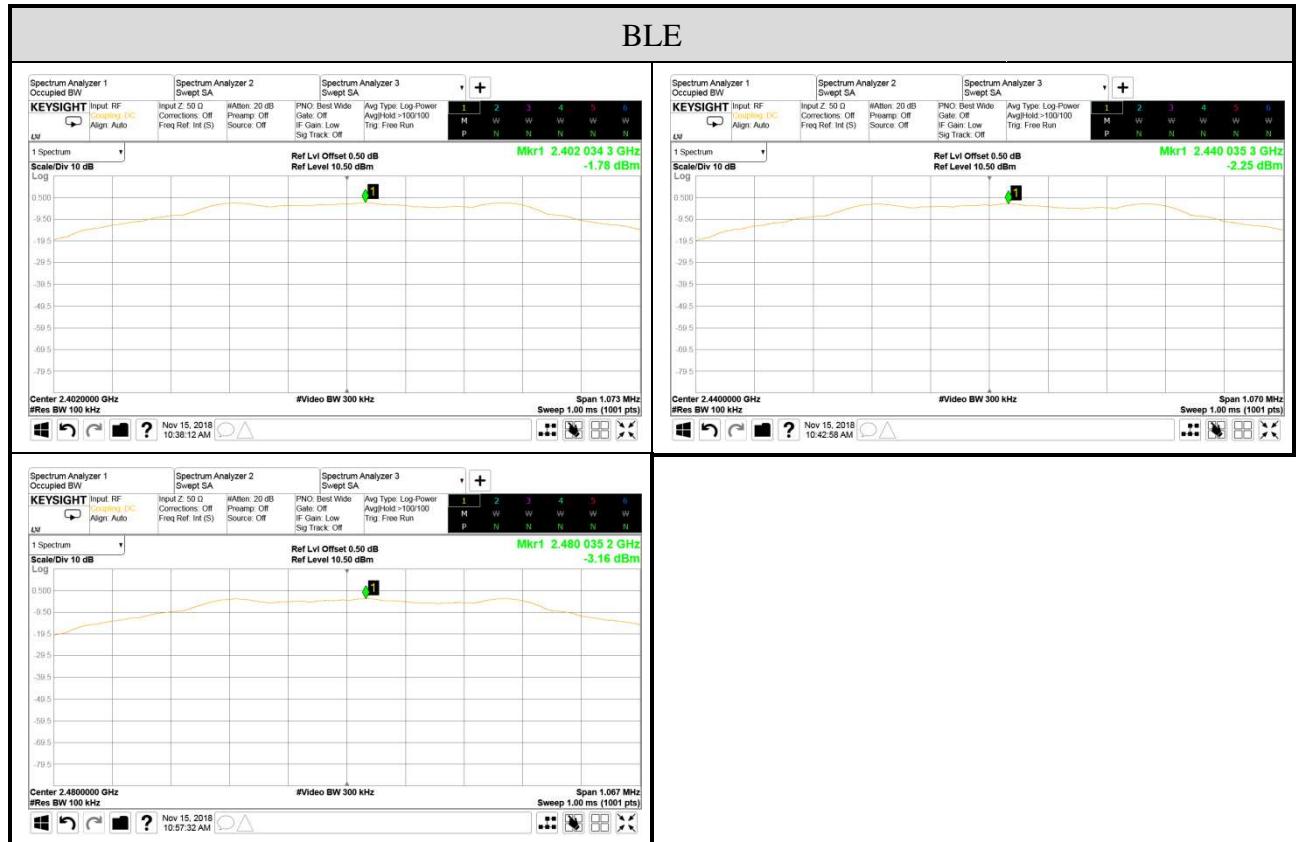

Note: All results have been included cable loss and Simultaneous Factor.



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan*

APPENDIX B

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPDNDIX B

TEST PHOTOGRAPHS

(Model: ATKEYCARD1)

File Number: CIM1811044

Report Number: EM-F180523

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.