



TEST REPORT

Digital Signage Player **Product Name:**

2AOQN-YM08 FCC ID:

Lunzn Trademark: **80MY** Model Number:

Shenzhen Lunzn Technology CO., Ltd. Prepared For:

Room606, Gangtou Development Building, No. 133 Xuegang North Address:

Road, Bantian Street, Longgang District, Shenzhen, China

Shenzhen Lunzn Technology CO., Ltd. Manufacturer:

Room606, Gangtou Development Building, No. 133 Xuegang North Address:

Road, Bantian Street, Longgang District, Shenzhen, China

Prepared By: Shenzhen CTB Testing Technology Co., Ltd.

1&2/F., Building A, No.26, Xinhe Road, Xingiao, Xingiao Street, Bao'an Address:

District, Shenzhen, Guangdong, China

Apr. 19, 2024 Sample Received Date:

Apr. 19, 2024 to May. 06, 2024 Sample tested Date:

May. 06, 2024 Issue Date:

CTB240430025RFX Report No.:

FCC CFR Title 47 Part 15 Subpart E Section 15.407 **Test Standards**

KDB 789033 V02r01

Test Results PASS

This is WIFI-5GHz band radio test report. Remark:

Compiled by: Reviewed by: Approved by:

Arron 224 Zhou kui

Zhou Kui Arron Liu Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.



TABLE OF CONTENT

T		port Declaration	Page
	1.	VERSION	4
	2.	TEST SUMMARY	9
	3.	MEASUREMENT UNCERTAINTY	6
	4.	PRODUCT INFORMATION AND TEST SETUP	1
	4.1	Product Information	
	4.2	Test Setup Configuration	
	4.3	Support Equipment	8
	4.5	Test Mode	
	4.6	Test Environment	9
	5.	TEST FACILITY AND TEST INSTRUMENT USED	10
	5.1	Test Facility	10
	5.2	Test Instrument Used	10
	6.	AC POWER LINE CONDUCTED EMISSION	13
	6.1	Block Diagram Of Test Setup	13
	6.2	Limit	13
	6.3	Test procedure	
	6.4	Test Result	15
	7.	RADIATED SPURIOUS EMISSIONS	17
	7.1	Block Diagram Of Test Setup	17
	7.2	Limit	
	7.3	Test procedure	18
	7.4	Test Result	19
	8.	BAND EDGE	24
	8.1	Block Diagram Of Test Setup	
	8.2	Limit	24
	8.3	Test procedure	24
	8.4	Test Result	25
	9.	CONDUCTED OUTPUT POWER	33
	9.1	Block Diagram Of Test Setup	
	9.2	Limit	
	9.3	Test procedure	
	9.4	Test Result	35
	10.	EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	48
	10.1		48
	10.2		
	10.3	Test Procedure	48
	10.4		
	11.		
	11.1	9 - 9 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	
		Limit	
	11.3	Test procedure	64



Shenzhen CTB Testing Technology Co., Ltd.

11.4 Test Result	
12. FREQUENCY STABILITY	79
12.1 Block Diagram Of Test Setup	
12.2 Limit	79
12.3 Test procedure	79
12.4 Test Result	80
13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSI	VIT 92
13.1 Requirement	92
13.2 Test Results	92
14. ANTENNA REQUIREMENT	93
15. EUT TEST SETUP PHOTOGRAPHS	94
(NOTE, N/A MEANS NOT ARRUGARUE)	

Report No.: CTB240430025RFX

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 3 of 95



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240430025RFX	May. 06, 2024	Original	Valid

Report No.: CTB240430025RFX

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 4 of 95



2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(9)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033v02r01	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033v02r01	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033v02r01	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033v02r01	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033v02r01	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033v02r01	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 5 of 95



3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Report No.: CTB240430025RFX

No.	Item	Uncertainty
1	Occupancy bandwidth	U=±54.3Hz
2	Adjacent channel power	U=±1.3dB
3	Conducted Adjacent channel power	U=±1.38dB
4	Conducted output power Above 1G	U=±1.0dB
5	Conducted output power below 1G	U=±0.9dB
6	Power Spectral Density , Conduction	U=±1.0dB
7	Conduction spurious emissions	U=±2.8dB
8	Out of band emission	U=±54Hz
9	3m camber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
10	3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
11	humidity uncertainty	U=±5.3%
12	Temperature uncertainty	U=±0.59℃
13	Supply volyages	U=±3%
14	Time O O O O	U=±5%
15	Conducted Emission (150KHz-30MHz)	3.2 dB
16	3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
17	3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 6 of 95



4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): YM08

Model Description: N/A

Wi-Fi Specification: IEEE 802.11a/n/ac

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel

IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel

IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel

Max. RF output power: WiFi (5G): 17.045dBm

Type of Modulation: WiFi: OFDM

Antenna installation: External antenna

Antenna Gain: WIFI(5.2G): Ant1:3.03dBi, Ant1: 3.03dBi

WIFI(5.8G): Ant1:2.27dBi, Ant1: 2.27dBi

Ratings: AC 100-240V, 50/60Hz, 0.3A

DC 12V

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 7 of 95



4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

Report No.: CTB240430025RFX

4.3 Support Equipment

Item	Equipment	Equipment Mfr/Brand Model/Type No.		Series No.	Note	
1	Monitor	DELL	SE2218HV	N/A	N/A	
2	Laptop	DELL	Vostro 5490	N/A	N/A	

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For	802.11a/n/ac(20M) Operation	in the 5180MHz ~5240 M	MHz band
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For	802.11a/n/ac(20M) Operation	in the 5745MHz ~5825 I	MHz band
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac((40M) Operation	in the 5190MHz ~5230	0 MHz band
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation	in the 5755MHz ~579	5 MHz band
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

0 0 0	For	802.11ac(80M)	Operation	in the 5210 MHz band	
Channel	5 .	Fre	equency	Channel	Frequency
42	~?	52	10MHz	NA	NA
0 0 0	For	802.11ac(80M)	Operation	in the 5775 MHz band	0 0 0
Channel		Fre	equency	NA	NA
155	67	57	75MHz	NA	NA

NOTE: Dutycycle>98%.

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 8 of 95



4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Took Made	T _V /D _V	RF Channel			
Test Mode	Tx/Rx	Low(L)	Middle(M)	High(H)	
000 44e/p/ee/20M)		Channel 36	Channel 40	Channel 48	
802.11a/n/ac(20M)	42 42 42 K	5180MHz	5200MHz	5240MHz	
000 11=/00/1014)	5180MHz ~5240 MHz -	Channel 38	N/A	Channel 46	
802.11n/ac(40M)		5190MHz	N/A	5230MHz	
000 44 (0014)		N/A	Channel 42	N/A	
802.11ac(80M)		N/A	5210MHz	N/A	
000 44 c/n/c c/00M)	0 0 0 0	Channel 149	Channel 157	Channel 165	
802.11a/n/ac(20M)	42 42 42 K	5745MHz	5785MHz	5825MHz	
000 44=/==(4014)	5745MHz ~5825MHz -	Channel 151	N/A	Channel 159	
802.11n/ac(40M)		5755MHz	N/A	5795MHz	
000 44 = = (0014)		N/A	Channel 155	N/A	
802.11ac(80M)		N/A	5775MHz	N/A	

4.6 Test Environment

Humidity(%):	4 54 4 4 4 4 4
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	
High Temperature(°C):HT	40

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 9 of 95



5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	40 In 4	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034		2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	♦ I	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	& C / C	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1		2024.07.06
12	BT&WI-FI Automatic test software	Micowave	MTS8000	Ver. 2.0.0.0		C 1 C 1
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017		2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	\$ 50° 5	2024.07.05
15	234G Automatic test software	Micowave	MTS8200	Ver. 2.0.0.0	♦ Ib	1 3
16	966 chamber	C.R.T.	966	010	0,10,	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747		2024.07.05
19	Amplifier	Agilent	8449B	3008A01838		2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869		2024.07.08

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 10 of 95



21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	o cro	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	P P	7
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	010	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	P AP A	1
25	40G Horn antenna	A/H/System	SAS-574	588	0,0	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097		2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance									
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until			
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	4 I 4	2024.07.05			
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052		2024.07.05			
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05			
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	9	2024.07.05			
5	ISN	Schwarzbeck	NTFM8158	183		2024.07.05			
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05			
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05			
8	EZ-EMC	Frad	EMC-con3A1.1	1	15	5 15 V			

	Radiated emission										
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until					
1	Double Ridged Broadband Horn Antenna			01911		2024.07.08					
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869		2024.07.08					
3	Amplifier	Agilent	8449B	3008A01838	· 1 ·	2024.07.05					
4	4 Amplifier HP		8447E	2945A02747		2024.07.05					
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05					
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	0,0	40/40	2024.07.05					
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	7		2024.07.05					
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	0 10	\$ 1,8	2024.07.05					
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	& / ₄	40	2024.07.05					
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05					
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05					

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 11 of 95



Shenzhen CTB Testing Technology Co., Ltd. Report No.: CTB240430025RFX


12	EZ-EMC	Frad	EMC-con3A1.1	ф <i>1</i> ф	D 10	0 10
----	--------	------	--------------	--------------	------	------

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 12 of 95



6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

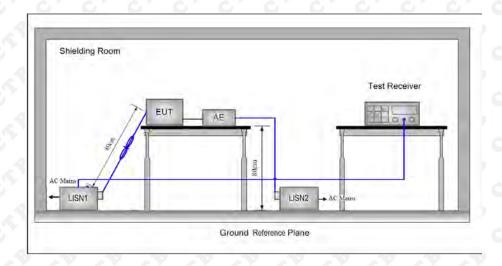

62 Limit

requency (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
).5 - 5	56	46
- 30	60	50

^{*} Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 13 of 95



test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


Report No.: CTB240430025RFX

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 14 of 95




6.4 Test Result

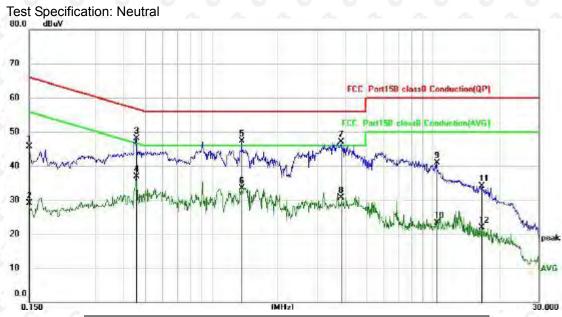


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	0.1500	35.85	9.95	45.80	66.00	-20.20	QP
2	0.1500	19.25	9.95	29.20	56.00	-26.80	AVG
3 *	0.4580	38.17	9.98	48.15	56.73	-8.58	QP
4	0.4580	26.94	9.98	36.92	46.73	-9.81	AVG
5	1.3700	37.30	10.04	47.34	56.00	-8.66	QP
6	1.3700	23.53	10.04	33.57	46.00	-12.43	AVG
7	3.8540	36.78	10.27	47.05	56.00	-8.95	QP
8	3.8540	20.46	10.27	30.73	46.00	-15.27	AVG
9	10.3779	30.35	10.59	40.94	60.00	-19.06	QP
10	10.3779	12.71	10.59	23.30	50.00	-26.70	AVG
11	16.5336	23.32	10.76	34.08	60.00	-25.92	QP
12	16.5336	11.15	10.76	21.91	50.00	-28.09	AVG

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 15 of 95





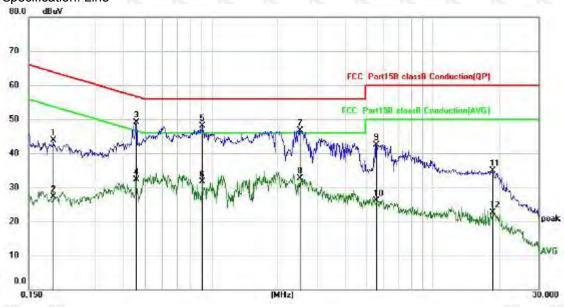

No.	Mk. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	0.1940	33.93	9.95	43.88	63.86	-19.98	QP
2	0.1940	17.33	9.95	27.28	53.86	-26.58	AVG
3	* 0.4580	39.12	9.98	49.10	56.73	-7.63	QP
4	0.4580	22.42	9.98	32.40	46.73	-14.33	AVG
5	0.9100	38.07	10.01	48.08	56.00	-7.92	QP
6	0.9100	21.66	10.01	31.67	46.00	-14.33	AVG
7	2.5019	36.64	10.14	46.78	56.00	-9.22	QP
8	2.5019	22.61	10.14	32.75	46.00	-13.25	AVG
9	5.5579	32.14	10.42	42.56	60.00	-17.44	QP
10	5.5579	15.72	10.42	26.14	50.00	-23.86	AVG
11	18.5500	24.04	10.79	34.83	60.00	-25.17	QP
12	18.5500	11.98	10.79	22.77	50.00	-27.23	AVG

- 1. Factor = Cable loss + LISN factor, Margin = Limit Level
 2. All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 3. All the test modes completed for test. Only the worst result of was reported.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 16 of 95



7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

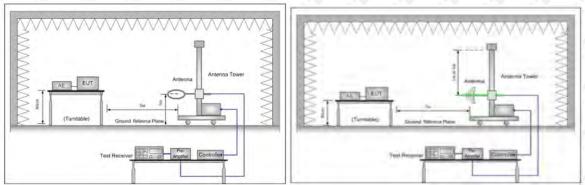


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Report No.: CTB240430025RFX




Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBµV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	20log 2400/F (kHz) + 80	Quasi-peak	3
0.490MHz-1.705MHz	20log 24000/F (kHz) + 40	Quasi-peak	3
1.705MHz-30MHz	20log 30 + 40	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 17 of 95



If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) EIRP = $((E*d)^2) / 30$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.
- (ii) Working in dB units, the above equation is equivalent to:

 $EIRP[dBm] = E[dB\mu V/m] + 20 log(d[meters]) - 104.77$

(iii) Or, if d is 3 meters:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel

j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

	Frequency	Detector	RBW	VBW	Remark	
1	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak	
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average	
19	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak	
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak	
9	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average	
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak	
5	30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak	
	Abava 4011-	Peak	1MHz	3MHz	Peak	
1	Above 1GHz	Peak	1MHz	10Hz	Average	

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 18 of 95






Test Result 7.4

30MHz-1GHzTest Results:

Modulation: 802.11a (the worst data)


Test Channel : 5180MHz Antenna polarity: H

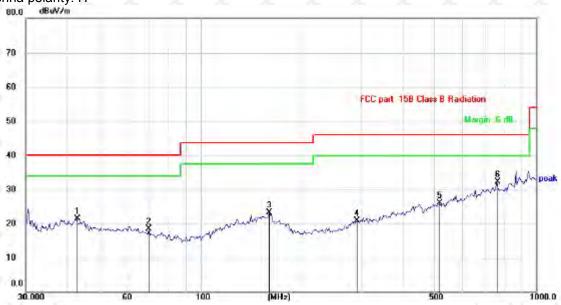


	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
_			MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
_	1		42.6000	26.81	-5.26	21.55	40.00	-18.45	QP
_	2		70.2132	26.60	-8.07	18.53	40.00	-21.47	QP
	3		160.0648	26.86	-3.54	23.32	43.50	-20.18	QP
_	4		293.0842	25.98	-5.04	20.94	46.00	-25.06	QP
_	5		518.1556	25.59	0.51	26.10	46.00	-19.90	QP
	6	*	762.0385	26.68	5.71	32.39	46.00	-13.61	QP

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 19 of 95





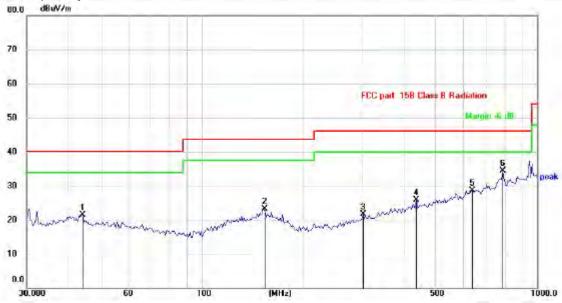

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.7352	27.06	-5.47	21.59	40.00	-18.41	QP
2		153.2004	26.58	-3.29	23.29	43.50	-20.21	QP
3		303.5437	26.43	-4.65	21.78	46.00	-24.22	QP
4		438.6554	27.30	-1.30	26.00	46.00	-20.00	QP
5		639.4888	25.33	3.39	28.72	46.00	-17.28	QP
6	*	789.2338	28.21	6.22	34.43	46.00	-11.57	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11a20 (the worst)

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 20 of 95



Radiated Spurious Emission (Above 1GHz):

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarizatior
6 .4	3 43	46	3 4	Channel:	5180MHz	- 43	40 4	2 43	40 4
10360	40.79	16.39	57.18	74	-16.82	PK	1.03	332	Н
10360	27.57	16.39	43.96	54	-10.04	AV	1.31	237	A HAS
10360	41.26	16.39	57.65	74	-16.35	PK	1.18	181	V
10360	26.81	16.39	43.20	54	-10.80	AV	1.56	6	V
B	0 0	9	0 0	Channel:	5240MHz	4	\$ 9	4	P. P.
10480	40.79	16.11	56.90	74	-17.10	PK	1.04	108	н
10480	25.96	16.11	42.07	54	-11.93	AV	1.54	268	A HA
10480	41.55	16.11	57.66	74	-16.34	PK	1.89	127	⊗ V ⊲
10480	25.82	16.11	41.93	54	-12.07	AV	1.45	34	V
0 3	0 .0	.0.	0 0	Channel:	5745MHz	0	D 1	9	· 6 · 6
11490	39.03	17.46	56.49	74	-17.51	PK	1.03	12	Н
11490	27.84	17.46	45.30	54	-8.70	AV	1.74	266	H
11490	40.41	17.46	57.87	74	-16.13	PK	1.18	321	V
11490	27.14	17.46	44.60	54	-9.40	AV	1.69	233	V
40 4	80 Ab	45	6 6	Channel:	5825MHz	40	40 4	9 49	40 4
11650	40.83	17.57	58.40	74	-15.60	PK	1.79	149	Н
11650	27.55	17.57	45.12	54	-8.88	AV	1.37	282	A H
11650	40.04	17.57	57.61	74	-16.39	PK	1.52	257	V
11650	26.40	17.57	43.97	54	-10.03	AV	1.33	231	V

Tel: 4008-707-283 Web: http://www.ctb-lab.net Report Page 21 of 95



Modulation: 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Y 6	Y AV	C 6	YAV	Channel:	5190MHz	A. A	Y	A. A. Y	V V
10380	39.32	16.34	55.66	74	-18.34	PK	1.14	100	A H
10380	27.45	16.34	43.79	54	-10.21	AV	1.37	107	Н
10380	40.18	16.34	56.52	74	-17.48	PK	1.72	152	∨ < < < < < < < < < < < < < < < < <
10380	27.37	16.34	43.71	54	-10.29	AV	1.56	155	V
N 6	A CA	(N	A CA	Channel:	5230MHz	1 N N	A 43	V 20	VA VA
10460	40.69	16.15	56.84	74	-17.16	PK	1.29	227	Ĥ
10460	27.15	16.15	43.30	54	-10.70	AV	1.89	354	Н
10460	40.18	16.15	56.33	74	-17.67	PK	1.60	357	⊗ V ⊗
10460	27.74	16.15	43.89	54	-10.11	AV	1.19	213	V
P C	B CB	C 40 X	P P	Channel:	5755MHz	1 P 1	P A	A CO	4 4 B
11510	41.05	17.49	58.54	74	-15.46	PK	1.84	202	H
11510	25.34	17.49	42.83	54	-11.17	AV	1.71	36	N HS
11510	39.47	17.49	56.96	74	-17.04	PK	1.47	218	∨ <
11510	27.90	17.49	45.39	54	-8.61	O AV	1.18	246	V
1	D. J. D.	C. P V.	4 44	Channel:	5795MHz	40	10 10	10,10	40 41
11590	40.48	17.52	58.00	74	-16.41	PK	1.09	140	a H a
11590	26.37	17.52	43.89	54	-16.00	AV	1.83	298	Н
11590	41.64	17.52	59.16	74	-14.84	PK	1.69	104	∨ < < < < < < < < < < < < < < < < <
11590	27.89	17.52	45.41	54	-8.59	AV	1.02	332	V

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 22 of 95



Modulation: 802.11(VH80) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
, C.	C' C	0	0 0	Channel:	5210MHz	0, 0	0	6' (o, 6,
10420	41.34	16.25	57.59	74	-16.41	PK	1.72	215	A HAT
10420	25.79	16.25	42.04	54	-11.96	AV	1.38	9	A H
10420	40.91	16.25	57.16	74	-16.84	PK	1.38	253	V
10420	27.62	16.25	43.87	54	-10.13	AV	1.58	328	V
CA	c" c	2 63	C. C.	Channel:	5775MHz	60	CA	67	J. C.
11550	41.73	17.50	59.23	74	-14.77	PK	1.84	355	HA T
11550	25.92	17.50	43.42	54	-10.58	AV	1.50	213	A H
11550	41.58	17.50	59.08	74	-14.92	PK	1.11	318	V
11550	26.41	17.50	43.91	54	-10.09	AV	1.87	158	V

Remark:


- 1.Factor = Antenna Factor + Cable Loss Pre-amplifier. Emission level = Reading Result + Factor, Margin
- = Emission level Limits
- 2. The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 23 of 95



BAND EDGE

8.1 Block Diagram Of Test Setup



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

8.3 Test procedure


- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 24 of 95




8.4 Test Result

ANT1: **Test Graph**

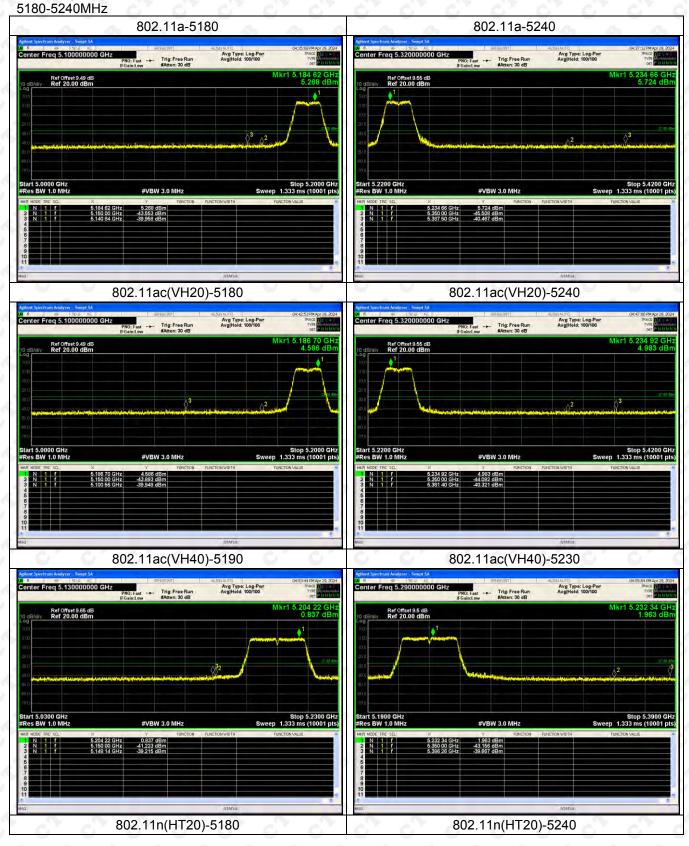

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 25 of 95


Shenzhen CTB Testing Technology Co., Ltd. Report No.: CTB240430025RFX

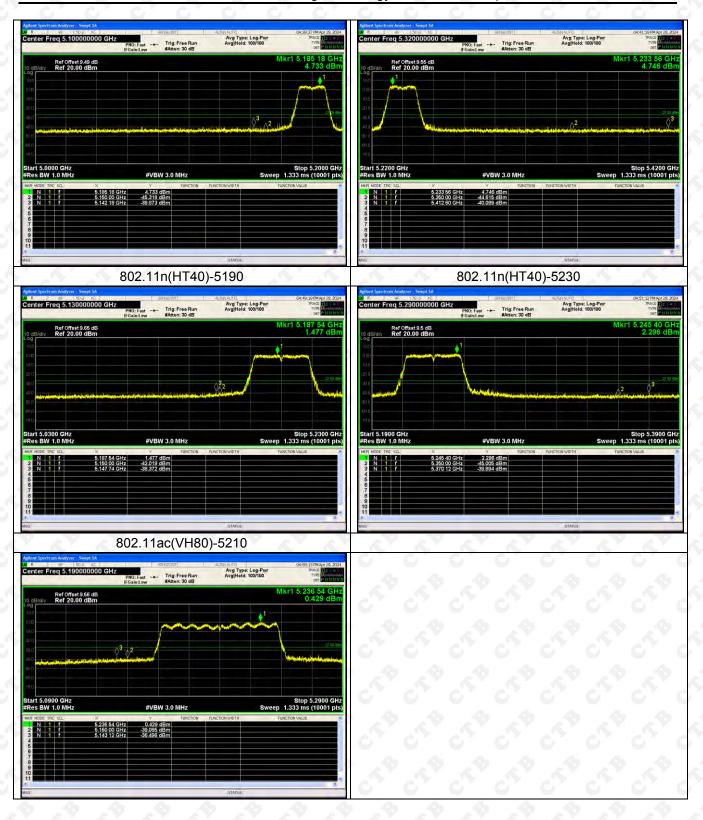

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 26 of 95




ANT2: 5180-5240MHz

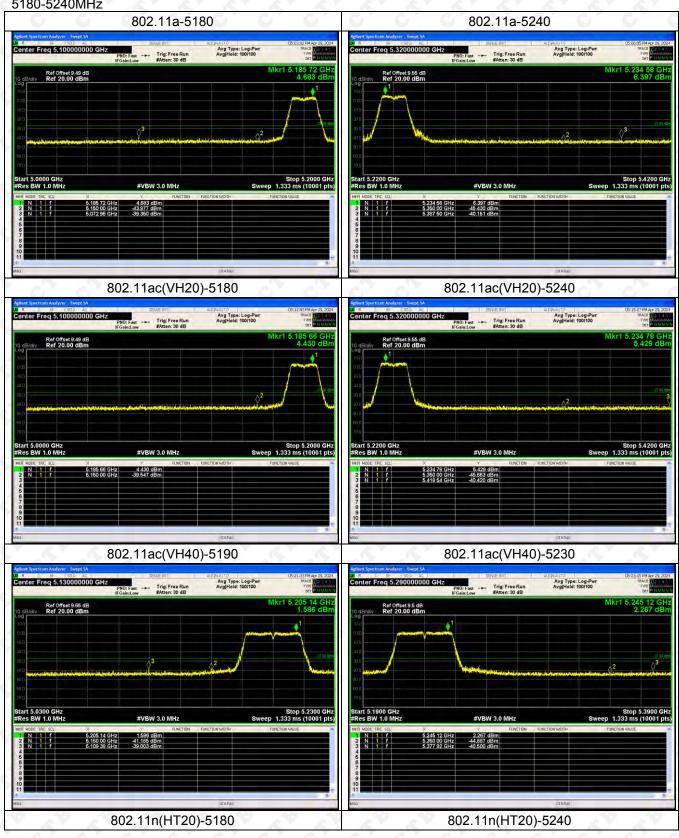

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 27 of 95






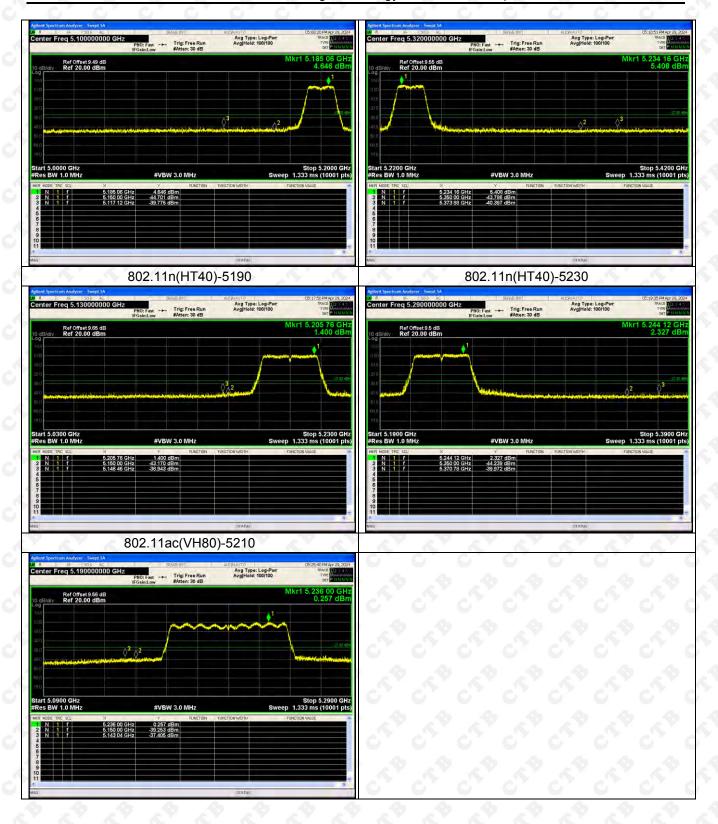

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 28 of 95




ANT1: 5745-5825MHz

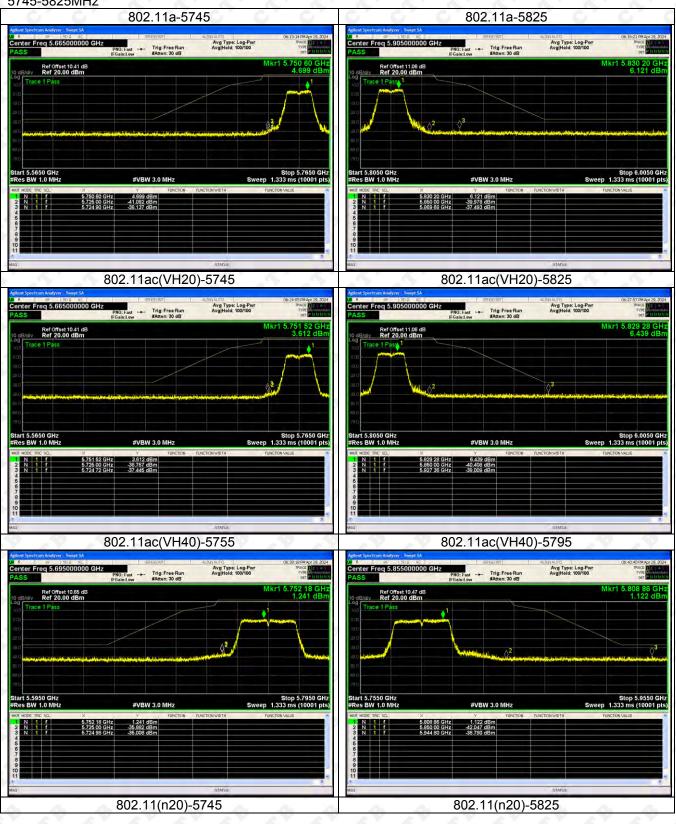

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 29 of 95




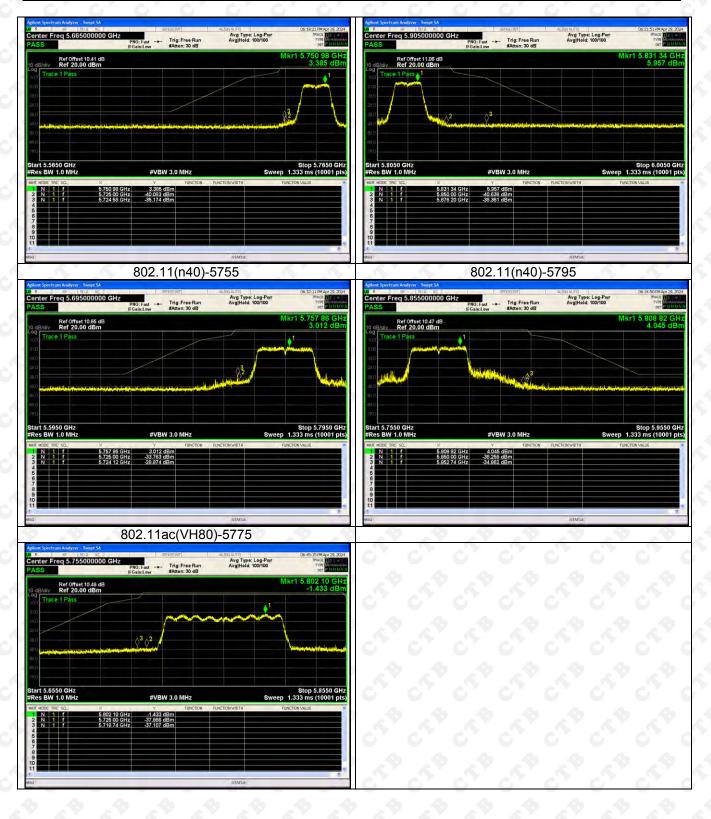


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 30 of 95



ANT2: 5745-5825MHz

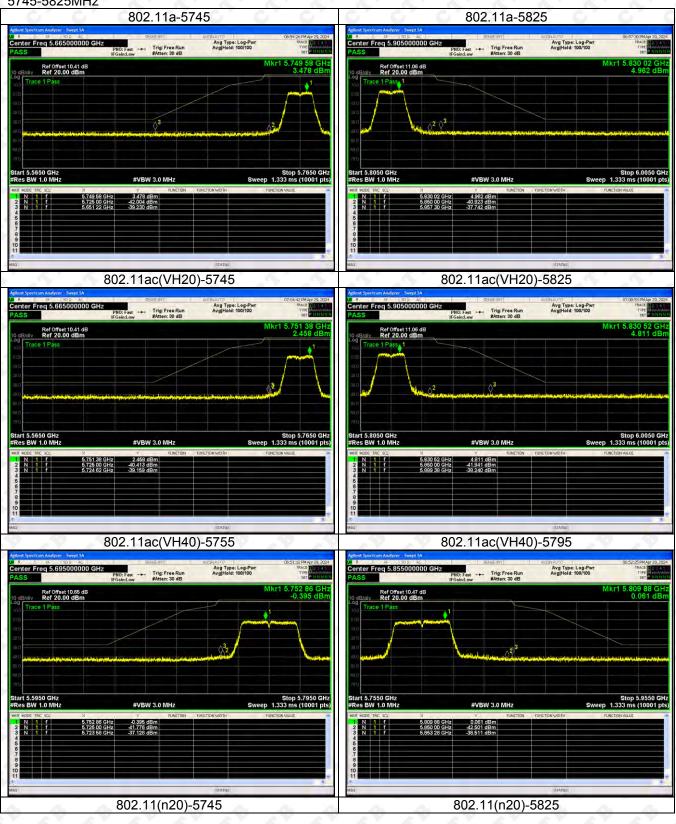

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 31 of 95

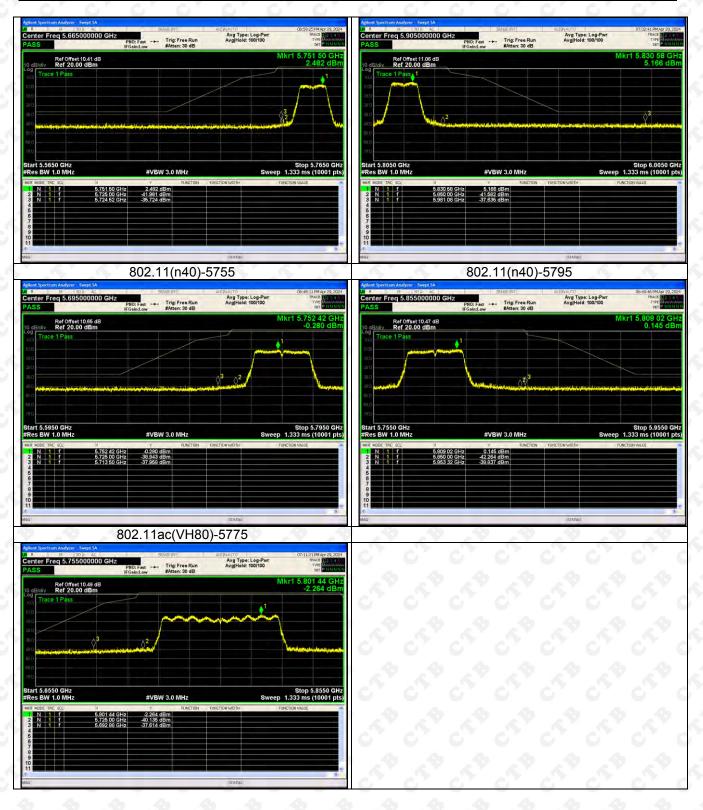


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 32 of 95



9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



- (1) For the band 5.15-5.25 GHz.
- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.
- at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
- (5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 33 of 95



- (h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).
- (1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW ≥ 3 MHz.
- (iv) Number of points in sweep ≥ 2 × span / RBW. (This ensures that bin-to-bin spacing is ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 34 of 95



9.4 Test Result


Test mode1	Test Channel (MHz)	Output Power	Output Power	Output Power	Limit
restilloder	Test Charmer (WITZ)	dBm ANT1	dBm ANT2	dBm Total	dBm
. C. C.	5180	12.692	12.78	0'10'	23.98
802.11a	5200	12.893	12.782	o do do	23.98
	5240	13.742	14.587	67.67	23.98
0 0	5180	12.989	12.852	15.931	23.98
802.11ac20	5200	12.934	13.864	16.434	23.98
	5240	13.519	13.925	16.737	23.98
000 110010	5190	12.408	13.1	15.778	23.98
802.11ac40	5230	13.636	13.693	16.675	23.98
802.11ac80	5210	13.211	13.348	16.290	23.98
	5180	13.168	13.379	16.285	23.98
802.11n(HT20)	5200	12.892	13.136	16.026	23.98
	5240	13.37	13.932	16.670	23.98
000 44~(UT40)	5190	12.954	13.125	16.051	23.98
802.11n(HT40)	5230	13.659	13.693	16.686	23.98

Test mode1	Test Channel (MHz)	Output Power	Output Power	Output Power	Limit	
rest mode i	Test Charmer (MHZ)	dBm ANT1	dBm ANT2	dBm Total	dBm	
0 0	5745	12.988	12.032		30	
802.11a	5785	12.37	10.733	91.0	30	
	5825	14.351	13.14	1	30	
802.11ac20	5745	11.886	10.843	14.406	30	
	5785	12.2	10.963	14.636	30	
	5825	14.419	13.239	16.879	30	
Ones (A) 10 A	5755	13.315	10.805	15.249	30	
802.11ac40	5795	12.567	11.36	15.016	30	
802.11ac80	5775	11.258	10.569	13.937	30	
802.11n(HT20)	5745	11.584	10.629	14.143	30	
	5785	11.991	10.833	14.461	30	
	5825	14.431	13.599	17.045	30	
200 44 (117.43)	5755	13.673	11.024	15.558	30	
802.11n(HT40)	5795	14.436	11.566	16.244	30	


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 35 of 95




ANT1: 5180-5240MHz-Power

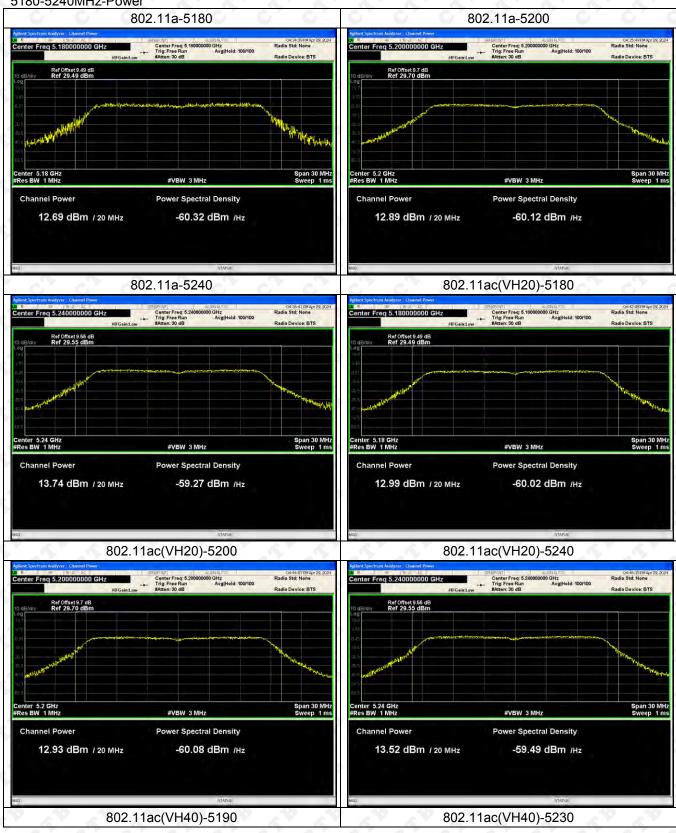


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 36 of 95

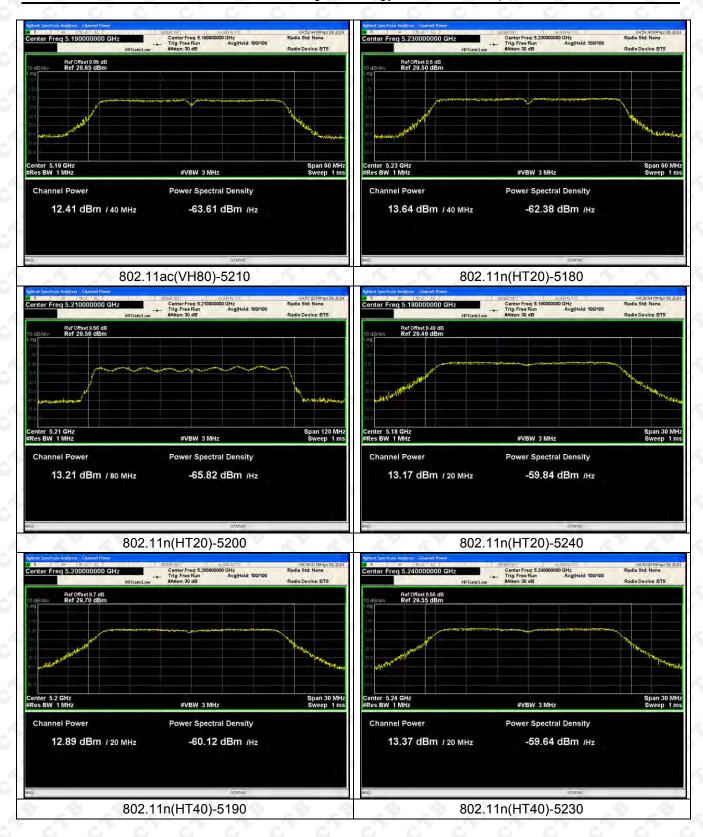

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 37 of 95






Report Tel: 4008-707-283




ANT2:


5180-5240MHz-Power

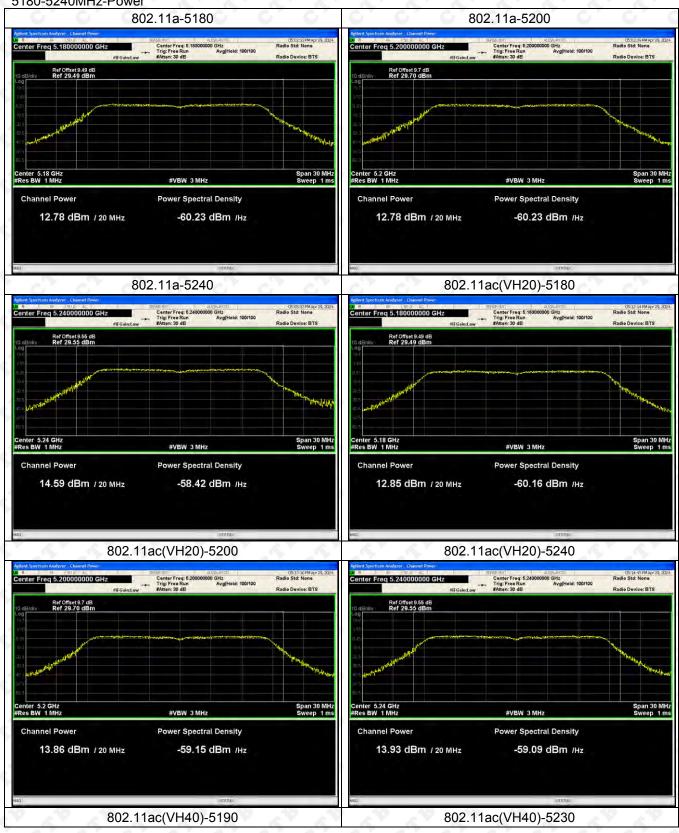

Page 39 of 95 Report Tel: 4008-707-283 Web: http://www.ctb-lab.net

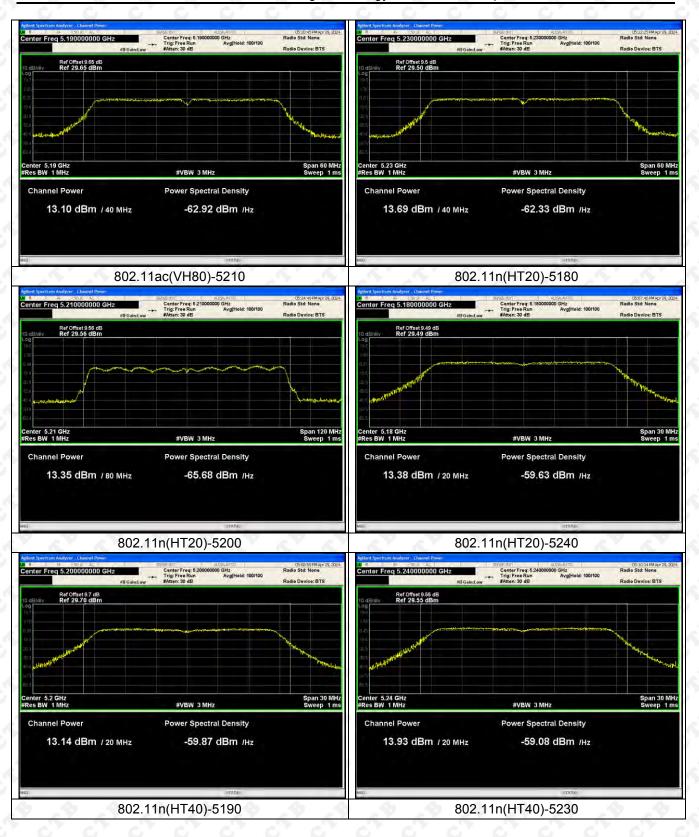


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 40 of 95

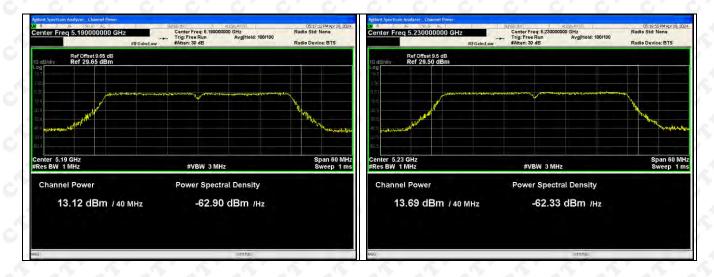


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 41 of 95




ANT1:

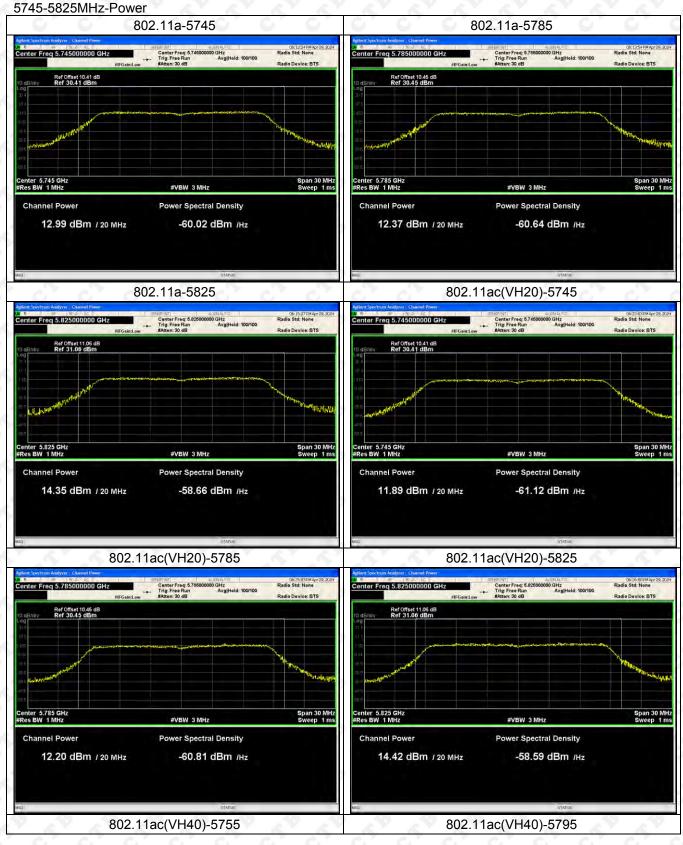


Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 42 of 95

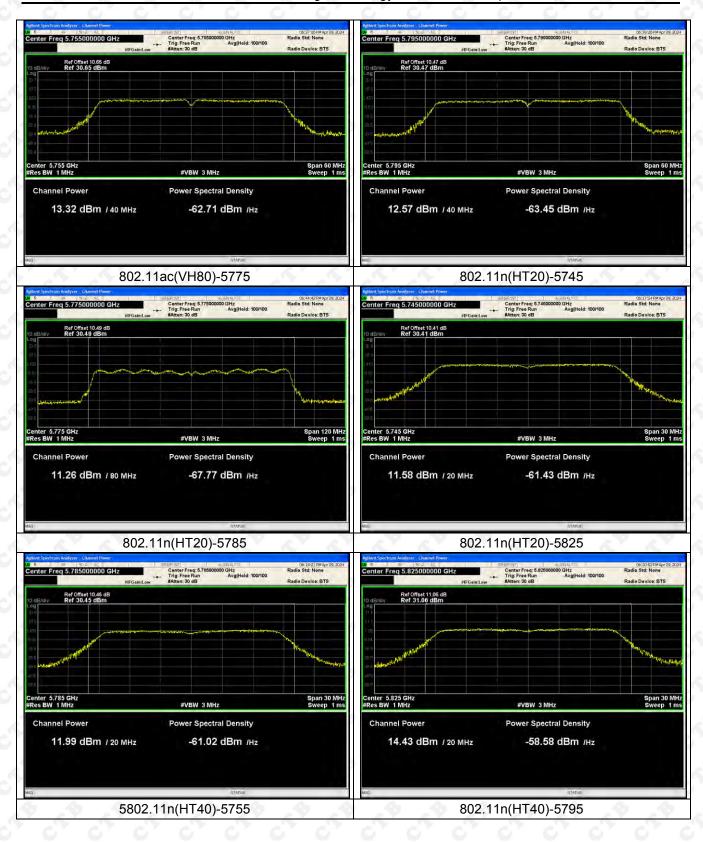

Page 43 of 95 Report Tel: 4008-707-283 Web: http://www.ctb-lab.net







Tel: 4008-707-283 Report Web: http://www.ctb-lab.net Page 44 of 95



ANT2:

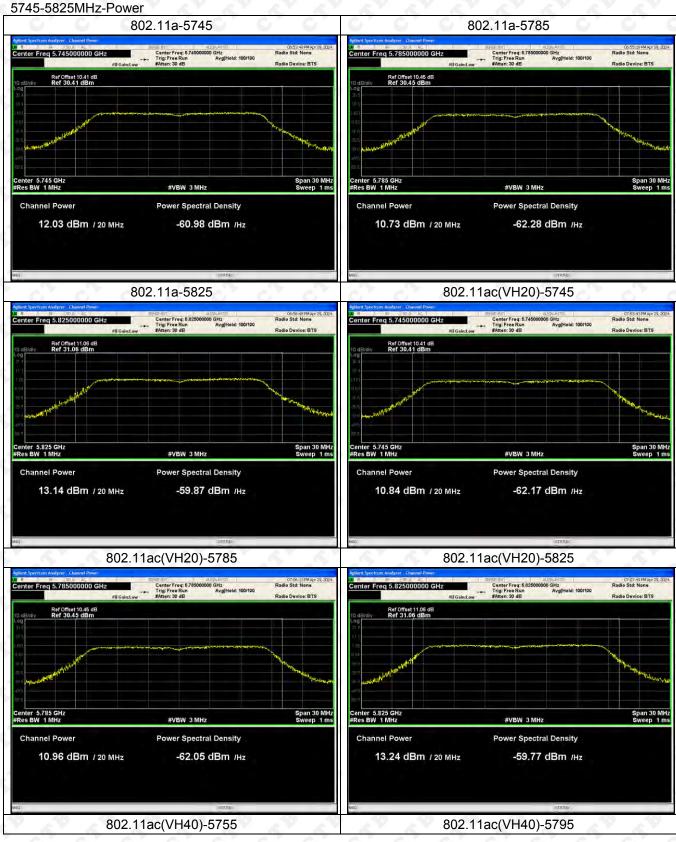

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 45 of 95

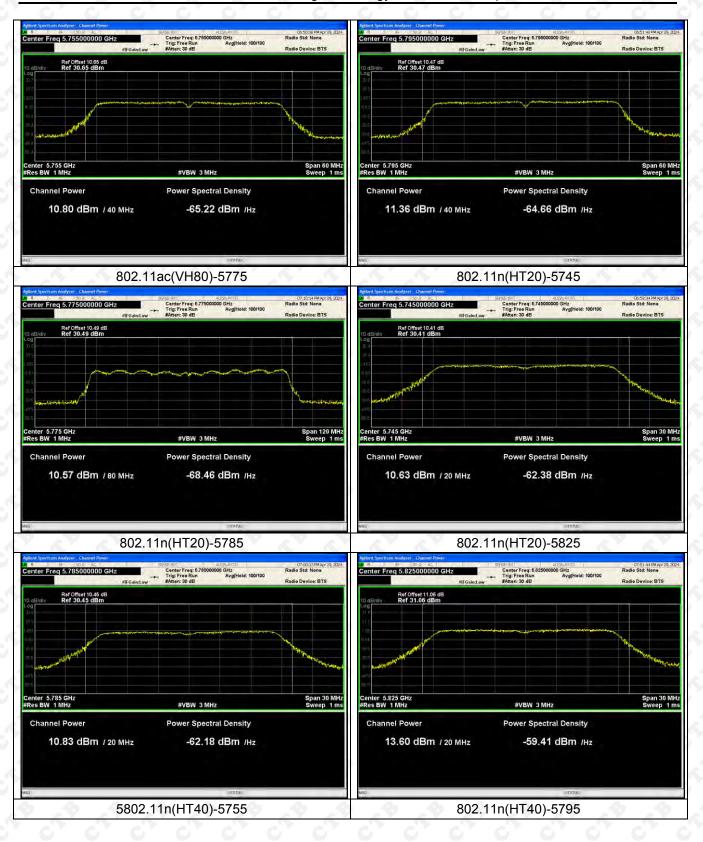

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 46 of 95




Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 47 of 95



10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup



10.2 Limits

- (1) For the band 5.15-5.25 GHz.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 * RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 48 of 95



- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1% to 5% of the OBW
- 4. Set VBW ≥ 3 * RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency The 99% occupied bandwidth is the difference between these two frequencies.

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 49 of 95




10.4 Test Results

Test mode	Test Channel	26dB Bandwidth
ANT1	(MHz)	(MHz)
802.11a	5180	21.266
	5200	20.884
	5240	21.328
802.11ac20	5180	21.525
	5200	21.466
	5240	21.369
802.11ac40	5190	41.817
	5230	41.058
802.11ac80	5210	80.145
802.11n(HT20)	5180	21.555
	5200	21.869
	5240	21.694
802.11n(HT40)	5190	41.454
	5230	40.877

Test mode	Test Channel	26dB Bandwidth
ANT2	(MHz)	(MHz)
802.11a	5180	21.012
	5200	20.839
	5240	21.099
802.11ac20	5180	21.86
	5200	21.334
	5240	21.658
802.11ac40	5190	41.533
	5230	41.43
802.11ac80	5210	80.42
802.11n(HT20)	5180	21.485
	5200	21.653
	5240	21.591
802.11n(HT40)	5190	41.709
	5230	41.141

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 50 of 95





Test mode	Test Channel	6dB Bandwidth
ANT1	(MHz)	(MHz)
802.11a	5745	16.539
	5785	16.54
	5825	16.528
802.11ac20	5745	17.69
	5785	17.78
	5825	17.773
802.11ac40	5755	36.458
	5795	36.477
802.11ac80	5775	76.483
802.11n(HT20)	5745	17.743
	5785	17.76
	5825	17.729
802.11n(HT40)	5755	35.719
	5795	35.513

Test mode ANT2	Test Channel (MHz)	6dB Bandwidth (MHz)
802.11a	5745	16.52
	5785	16.529
	5825	16.568
802.11ac20	5745	17.749
	5785	17.746
	5825	17.739
802.11ac40	5755	36.459
	5795	36.503
802.11ac80	5775	76.463
802.11n(HT20)	5745	17.75
	5785	17.733
	5825	17.723
802.11n(HT40)	5755	36.474
	5795	36.485


Report Page 51 of 95 Tel: 4008-707-283 Web: http://www.ctb-lab.net



ANT1: Test Graph



Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 52 of 95

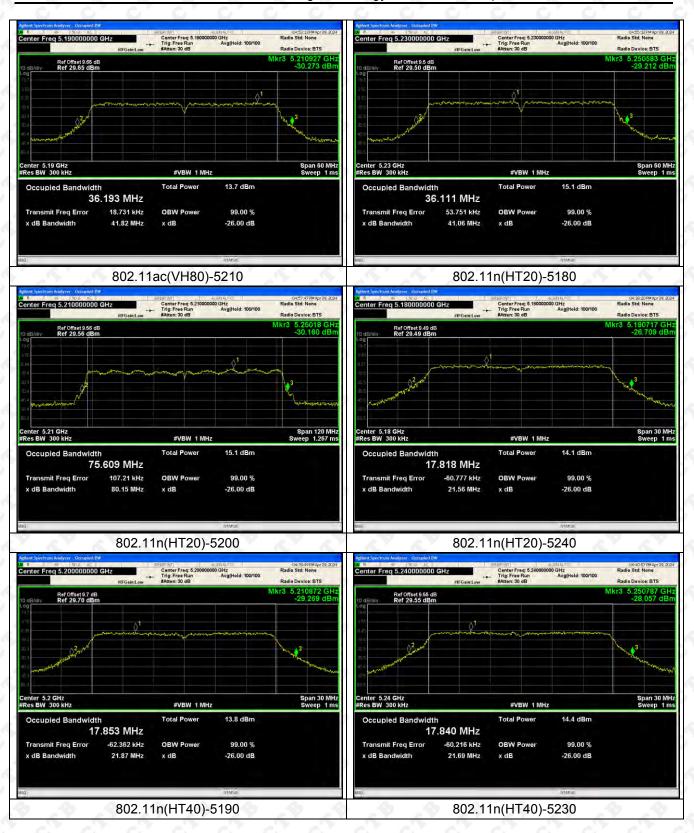

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 53 of 95








Report Tel: 4008-707-283



ANT2: **Test Graph** 5180-5240MHz

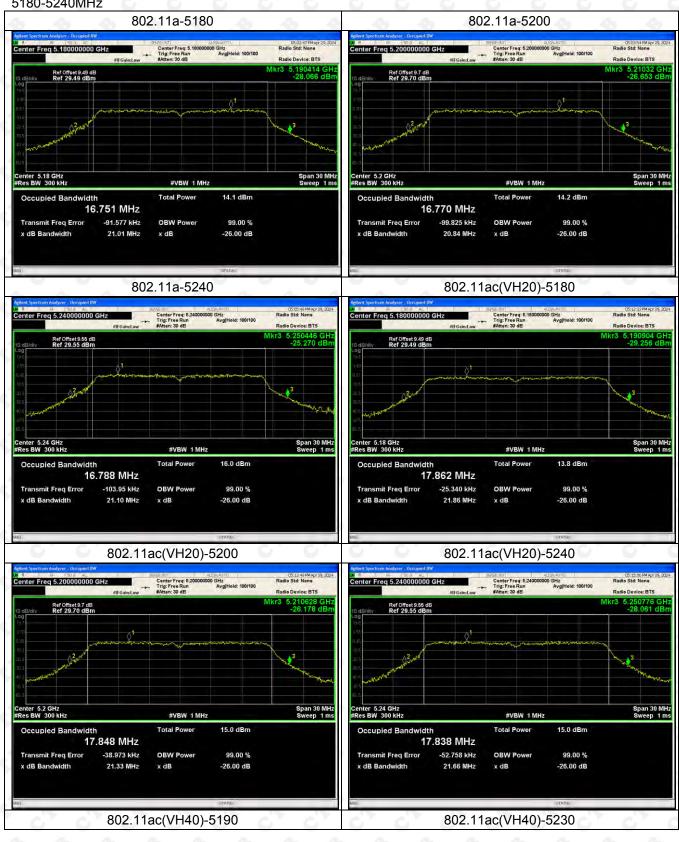

Report Tel: 4008-707-283 Web: http://www.ctb-lab.net Page 55 of 95