

FCC/ISED Test Report

Prepared for: Signetik

Address: 3833 S 14th Street
Lincoln, NE 68502

Product: SigGate (MN: GW-LRN8-0DC)

Test Report No: R20201203-20-E1A

Approved by:



Nic S. Johnson, NCE

Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 22 July 2021

Total Pages: 42

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

REVISION PAGE

Rev. No.	Date	Description
0	15 June 2021	Original – NJohnson Prepared by KVepuri/FLane
A	21 July 2021	Corrected frequencies in Section 2.2 Added note about frequency range and testing during simultaneous transmission to Section 44

CONTENTS

Revision Page	2
1.0 Summary of test results.....	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units.....	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description.....	6
3.2 Test personnel.....	6
3.3 Test equipment.....	7
3.4 General Test Procedure and Setup for Radio Measurements.....	8
4.0 Results	9
4.1 Output Power	10
4.2 Bandwidth.....	11
4.3 Duty Cycle	12
4.4 Radiated emissions.....	13
4.5 Band edges	19
4.6 Power Spectral Density.....	20
4.7 Conducted AC Mains Emissions.....	21
Appendix A: Sample Calculation	24
Appendix B – Measurement Uncertainty	26
Appendix C – Graphs and Tables	27
REPORT END.....	42



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section (Please see the checked box below for the rule part used):

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Peak output power	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 4, Section 7.1	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 4, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 11.13	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 4, Section 7.1	Conducted Emissions	Pass

See Section 4 for details on the test methods used for each test.



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	SigGate (MN: GW-LRN8-0DC)
EUT Received	30 March 2021
EUT Tested	7 April 2021- 11 June 2021
Serial No.	00352 (NCEE Assigned Serial Number)
Operating Band	902 MHz– 928 MHz
Device Type	LoRa
Power Supply / Voltage	MG Electronics Switching Power Supply, MN:ST122A

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

Channel	Frequency	Commands
Low	903.4 MHz	test_loragw_hal_tx -k0 -c0 -r1250 -f904.3 -mLORA -s7 -b500 -l65535 -n30000 -z255 --pwid 15 --pa 1
Mid	914.9 MHz	test_loragw_hal_tx -k0 -c0 -r1250 -f914.9 -mLORA -s7 -b500 -l65535 -n30000 -z255 --pwid 15 --pa 1
High	927.5 MHz	test_loragw_hal_tx -k0 -c0 -r1250 -f927.5 -mLORA -s7 -b500 -l65535 -n30000 -z255 --pwid 15 --pa 1

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
4740 Discovery Drive
Lincoln, NE 68521

A2LA Certificate Number: 1953.01
FCC Accredited Test Site Designation No: US1060
Industry Canada Test Site Registration No: 4294A-1
NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Nic Johnson	Technical Manager	Review/editing
2	Karthik Vepuri	Test Engineer	Testing and report
3	Fox Lane	Test Engineer	Testing and report

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number: R20201203-20-E1A

Rev

A

Prepared for: Signetik

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)*	N9038A	MY59050109	December 5, 2019	December 5, 2021
Keysight MXE Signal Analyzer (26.5GHz)*	N9038A	MY56400083	May 5, 2020	May 5, 2022
SunAR RF Motion	JB1	A082918-1	August 17, 2020	August 17, 2021
EMCO Horn Antenna	3115	6415	March 16, 2020	March 16, 2022
Com-Power LISN 50µH / 250µH - 50Ω	LI-220C	20070017	September 22, 2020	September 22, 2021
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
MiniCircuits High Pass Filter*	VHF-1320+	15542	April 14, 2020	April 14, 2022
Rohde & Schwarz Preamplifier**	TS-PR18	3545700803	April 14, 2020	April 14, 2022
RF Cable (preamplifier to antenna)**	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)**	FSCM 64639	01E3872	April 14, 2020	April 14, 2022
RF Cable (10m chamber bulkhead to control room bulkhead)**	FSCM 64639	01E3874	April 14, 2020	April 14, 2022
RF Cable (control room bulkhead to test receiver)**	FSCM 64639	01F1206	April 14, 2020	April 14, 2022
N connector bulkhead (10m chamber)**	PE9128	NCEEBH1	April 14, 2020	April 14, 2022
N connector bulkhead (control room)**	PE9128	NCEEBH2	April 14, 2020	April 14, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA

**Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

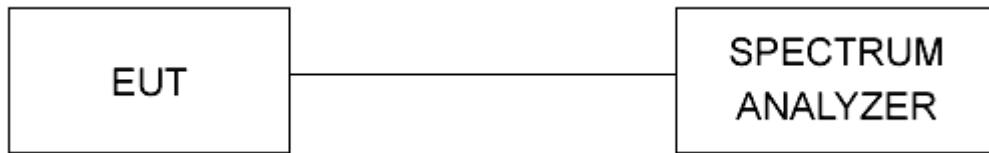


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

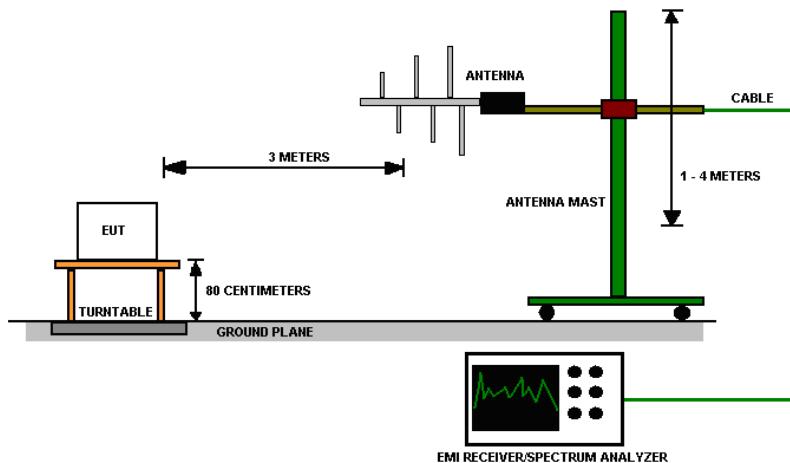


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

4.0 RESULTS

DTS Conducted Radio Measurements							
CHANNEL	Transmitter	Occupied Bandwidth (kHz)	6 dB Bandwidth (kHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	LoRa	779.93	689.90	26.540	450.817	7.343	Pass
Mid	LoRa	678.67	626.60	26.763	474.570	7.091	Pass
High	LoRa	708.56	654.70	26.773	475.664	7.238	Pass
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit =500 kHz				Peak Output Power Limit = 30 dBm; PSD Limit = 8 dBm			
Unrestricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBm)	Relative Fundamental (dBm)	Delta (dB)	Min Delta (dB)	Result
Low	LoRa	902.000000	-35.900	26.327	62.226	20.00	Pass
High	LoRa	928.000000	-5.107	26.988	32.095	20.00	Pass
Radiated Peak Restricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	LoRa	614.000000	32.697	Peak*	46.02*	13.323	Pass
High	LoRa	960.000000	41.090	Peak*	53.98*	12.890	Pass
Peak measurements compared to 15.209 Quasi-Peak limit to show compliance*							



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

4.1 OUTPUT POWER

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed peak output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All data is in the table in results section 4.0.
3. All the measurements were found to be compliant.

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All data is in the table in results section 4.0.
3. All the measurements were found to be compliant.



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

4.3 DUTY CYCLE

99% duty cycle could be achieved, see figure 14.
Use of average detector is allowed for harmonics,



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH (μ V/m)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 * log * Emission level (μ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1 GHz to 10 GHz.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.
- h. The EUT also contained a certified licensed transmitter with modular approval. During the preview scan, the EUT was tested with both radios transmitting simultaneously to investigate for any additional emissions. If found, the emissions were reported in the measurements tables.

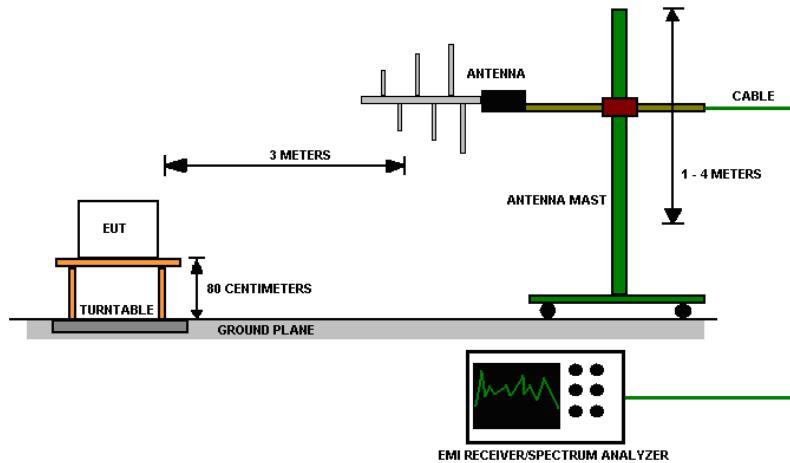Test setup:**Figure 3 - Radiated Emissions Test Setup****NOTE:**



1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

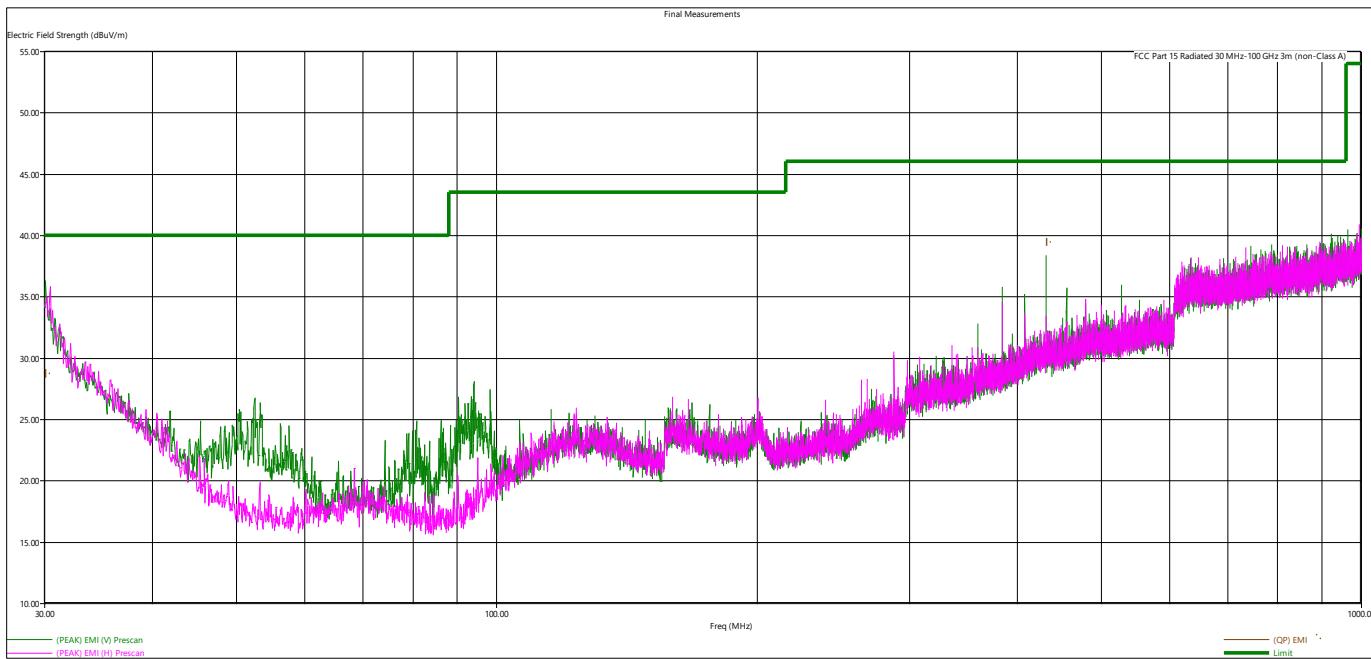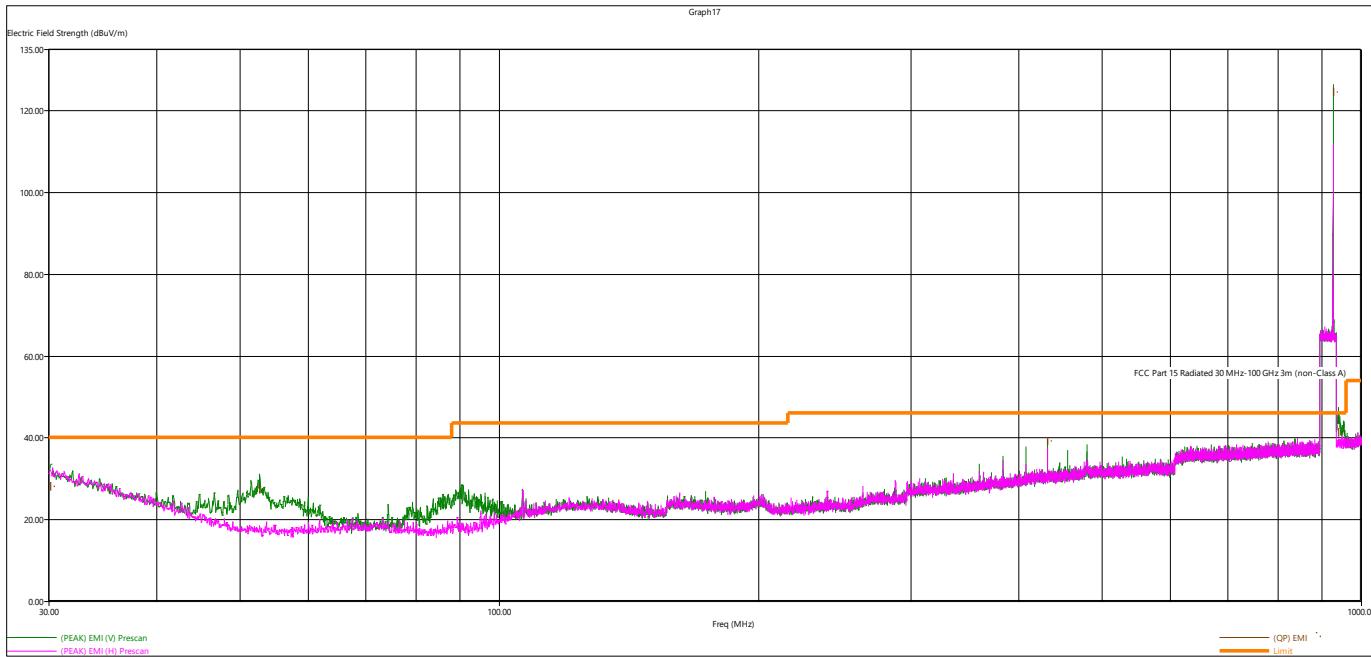Test results:**Figure 4 - Radiated Emissions Plot, Receive****Figure 5 - Radiated Emissions Plot, High Channel****REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

Quasi-Peak Measurements								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Radio
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
30.225360	27.95	40.00	12.05	369.00	196.00	V	High	LoRa
52.718400	27.23	40.00	12.77	118.00	241.00	V	High	LoRa
431.995920	38.98	46.02	7.04	128.00	327.00	V	High	LoRa
927.604960	124.44	NA	NA	143.00	351.00	V	High	LoRa
940.971200	41.10	46.02	4.92	193.00	347.00	V	High	LoRa
30.022628	28.68	40.00	11.32	333.00	235.00	V	Receive	
432.021600	39.41	46.02	6.61	124.00	343.00	V	Receive	

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

Peak Measurements									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Radio	
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.				
2782.232000	59.85	73.98	14.13	354.00	326.00	H	High	LoRa	
1854.584000	49.13	73.98	24.85	336.00	277.00	V	High	LoRa	
4637.902000	41.15	73.98	32.83	114.00	23.00	H	High	LoRa	
8563.200000	48.39	73.98	25.59	156.00	38.00	H	High	LoRa	
2744.614000	43.90	73.98	30.08	191.00	341.00	H	Mid	LoRa	
1829.502000	56.30	73.98	17.68	489.00	89.00	V	Mid	LoRa	
4573.692000	40.91	73.98	33.07	346.00	289.00	V	Mid	LoRa	
1808.208000	55.84	73.98	18.14	300.00	265.00	V	Low	LoRa	
2712.446000	49.64	73.98	24.34	124.00	306.00	V	Low	LoRa	
3613.246000	44.57	73.98	29.41	159.00	151.00	V	Low	LoRa	

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Average Measurements									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Radio	
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.				
2782.232000	48.60	53.98	5.38	354.00	326.00	H	High	LoRa	
1854.584000	42.48	104.44*	61.96	336.00	277.00	V	High	LoRa	
4637.902000	27.89	53.98	26.09	114.00	23.00	H	High	LoRa	
8563.200000	35.26	53.98	18.72	156.00	38.00	H	High	LoRa	
2744.614000	35.38	53.98	18.60	191.00	341.00	H	Mid	LoRa	
1829.502000	52.38	106.21*	53.83	489.00	89.00	V	Mid	LoRa	
4573.692000	28.06	53.98	25.92	346.00	289.00	V	Mid	LoRa	
1808.208000	50.84	105.36*	54.52	300.00	265.00	V	Low	LoRa	
2712.446000	41.74	53.98	12.24	124.00	306.00	V	Low	LoRa	
3613.246000	33.23	53.98	20.75	159.00	151.00	V	Low	LoRa	

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

*Limit obtained from fundamental field strength – 20 as given by 15.247 for unrestricted bands



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

4.5 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

For emissions outside of the allowed band of operation the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. All data is in the table in results section 4.0.
3. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
4. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The measurements are part of the radiated emissions scans from section 4.4.

4.6 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph or in the text below the measurements.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

4. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
5. All the measurements were found to be compliant.
6. The measurements are reported on the graph.

4.7 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

.

Test Results:

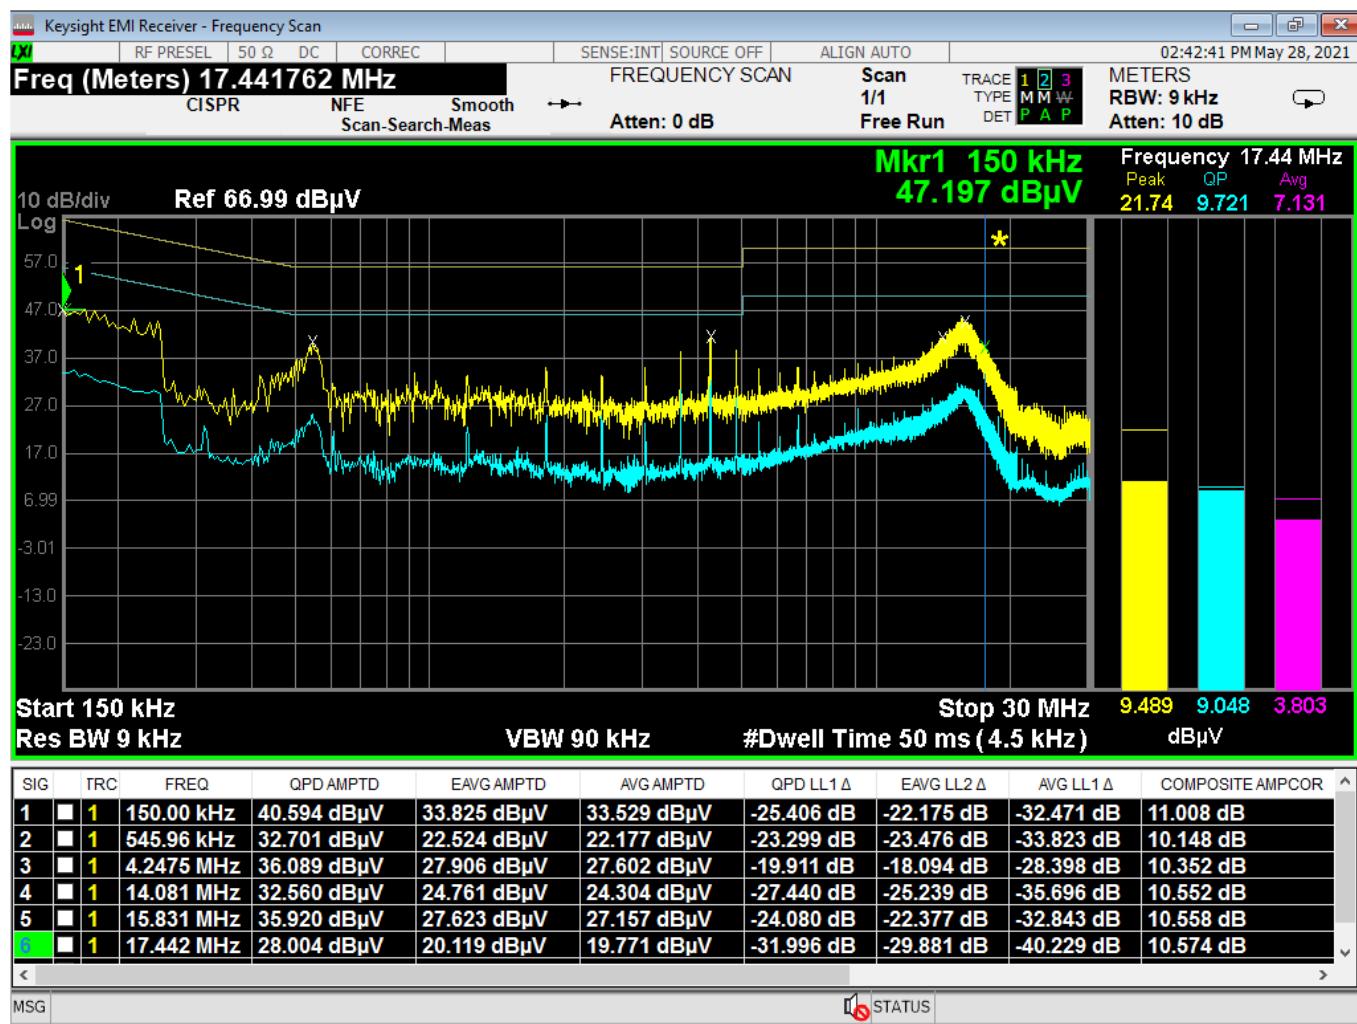


Figure 6 - Conducted Emissions Plot, Line

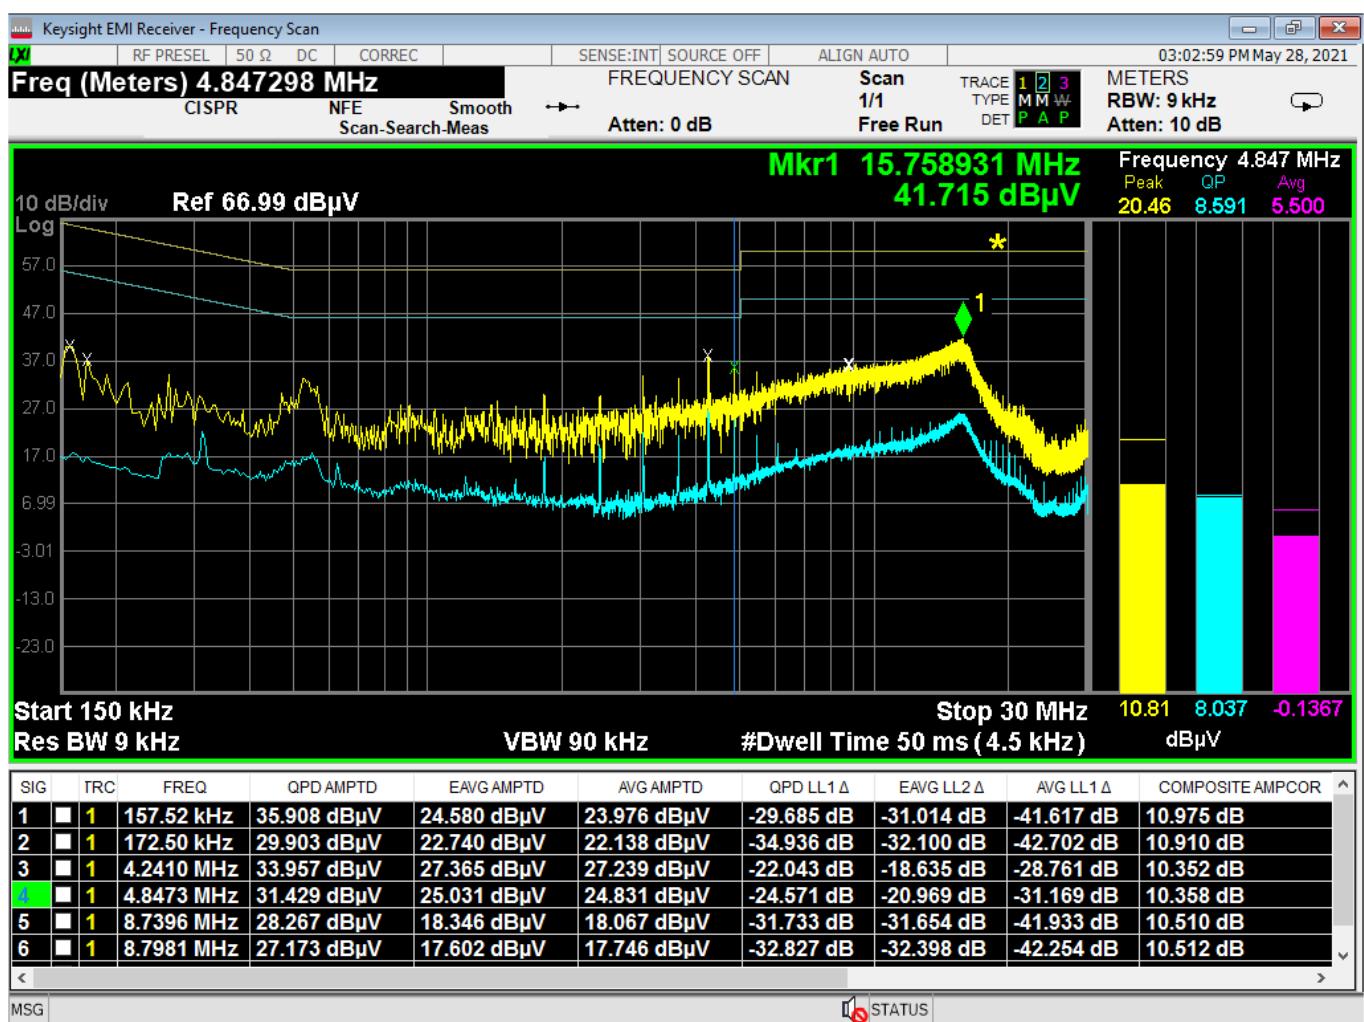


Figure 7 - Conducted Emissions Plot, Neutral



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 * \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{\text{[Power (dBm)/10]}} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{\text{[Field Strength (dB}\mu\text{V/m) / 20]}} / 10^6$$

Gain = 1 (numeric gain for isotropic radiator)

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [\text{FS(V/m)} \times d^2] / 30 = \text{FS [0.3]} \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = \text{FS(dB}\mu\text{V/m)} - 10(\log 10^9) + 10\log[0.3] = \text{FS(dB}\mu\text{V/m)} - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		


APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.


APPENDIX C – GRAPHS AND TABLES

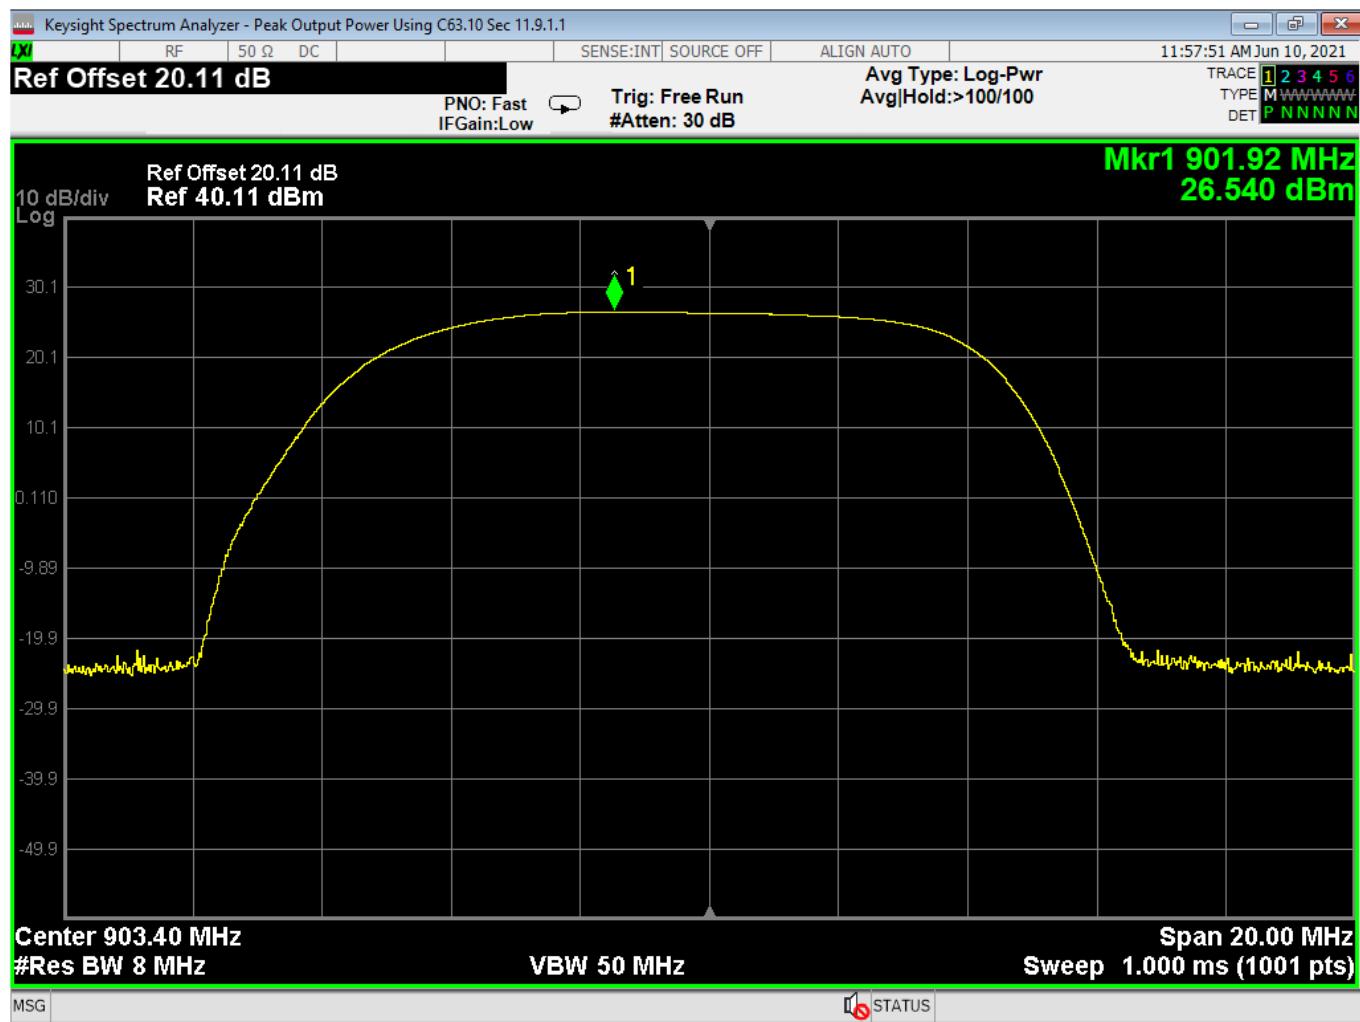


01 Output Power Low Channel




02 Output Power-Mid Channel

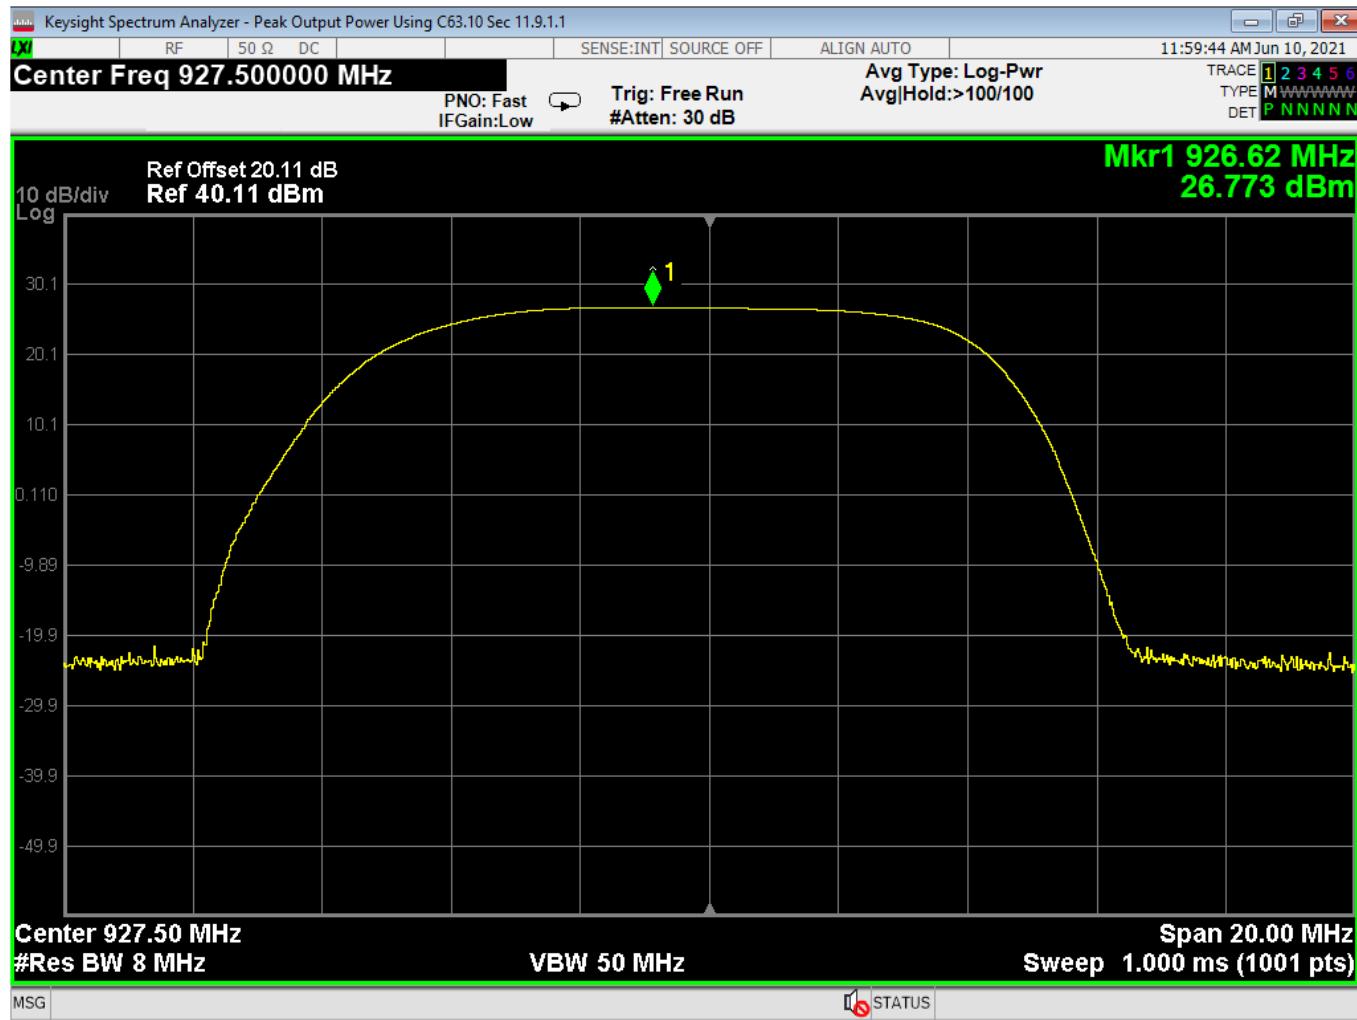


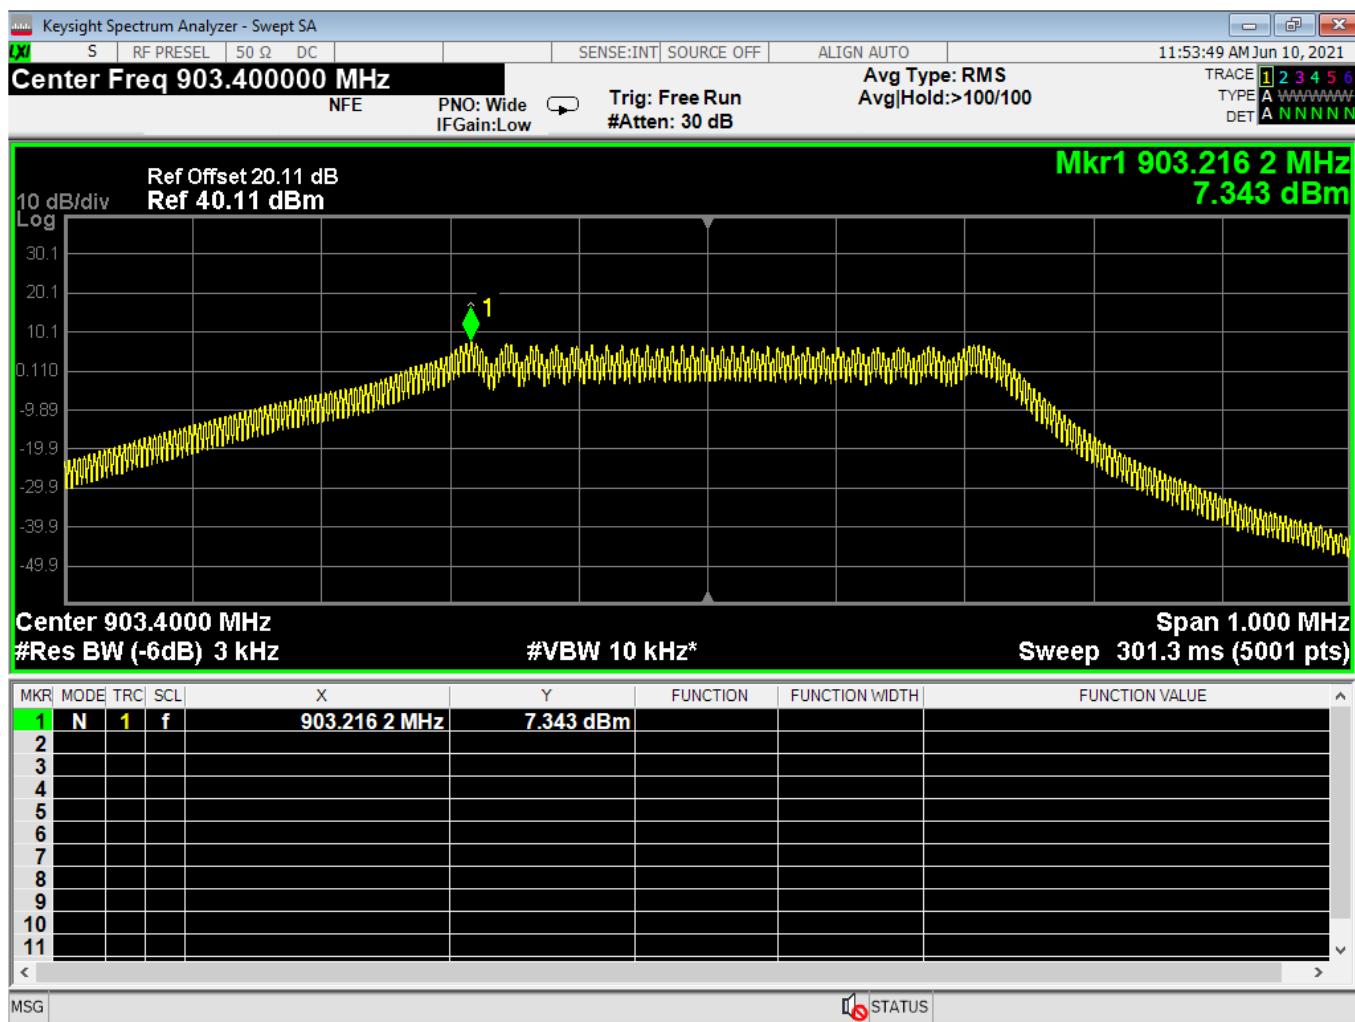


04 Power Spectral Density-Low Channel, C63.10 Sec 11.10.3, AVGPSD-1

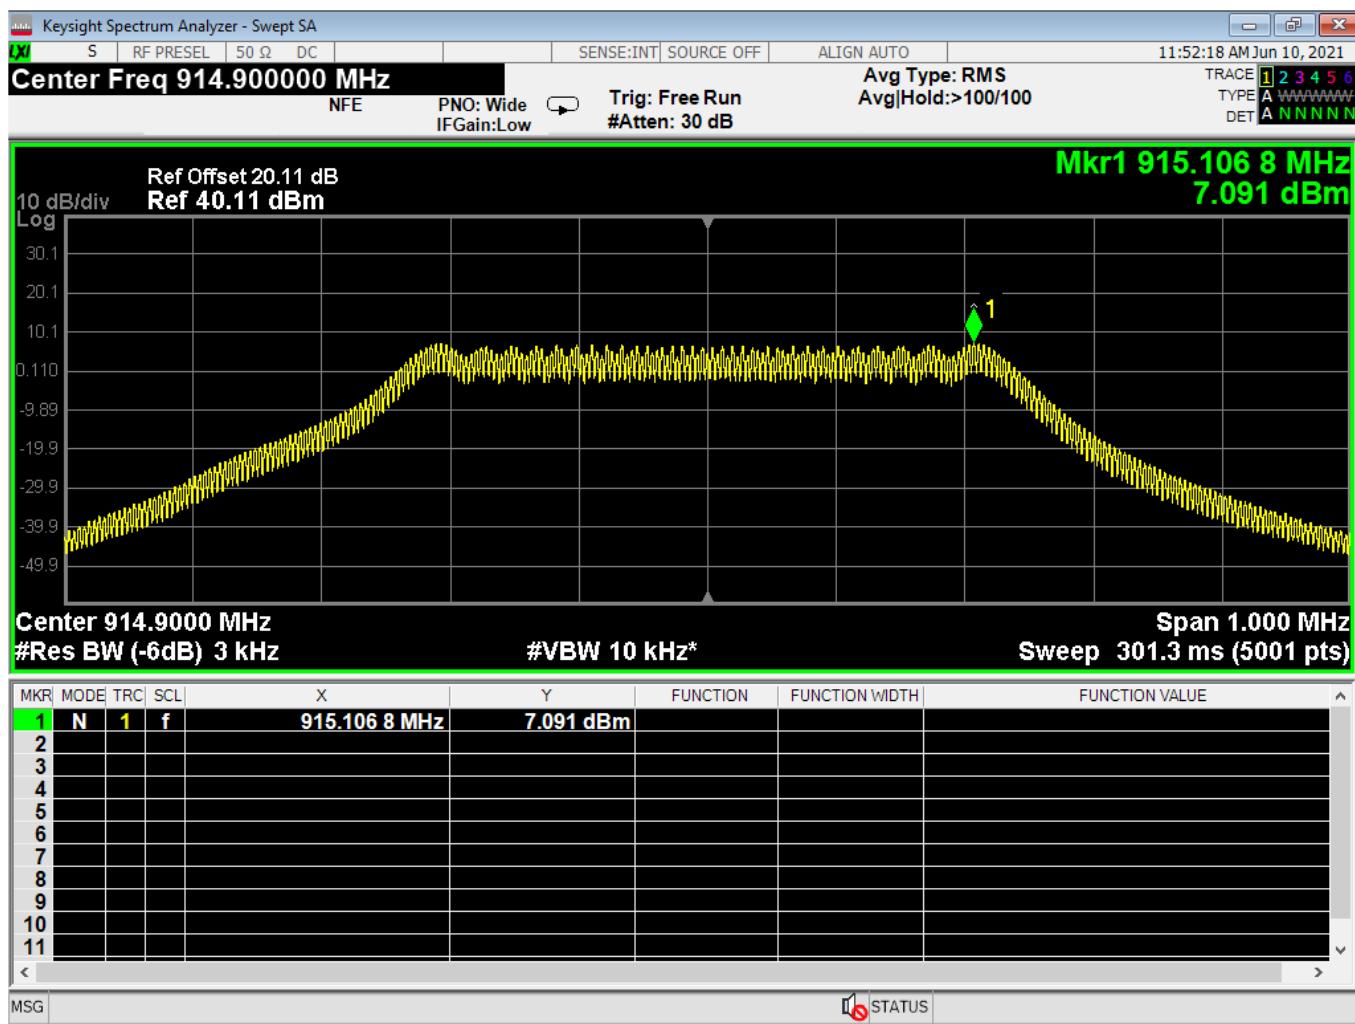



05 Power Spectral Density-Mid Channel, C63.10 Sec 11.10.3, AVGPSD-1

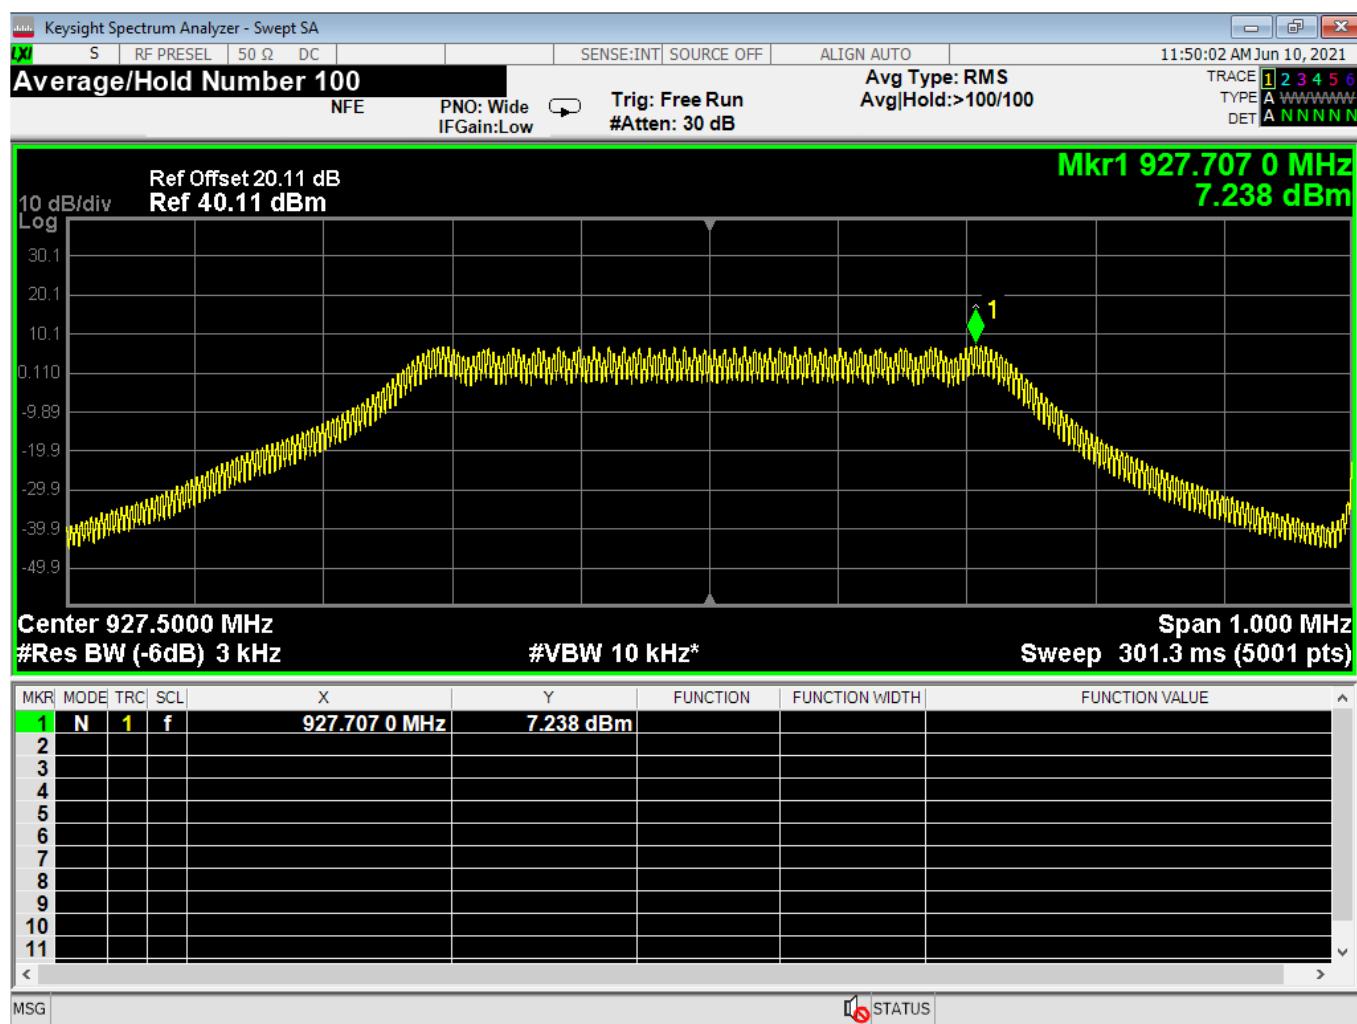


06 Power Spectral Density-High Channel, C63.10 Sec 11.10.3, AVGPSD-1

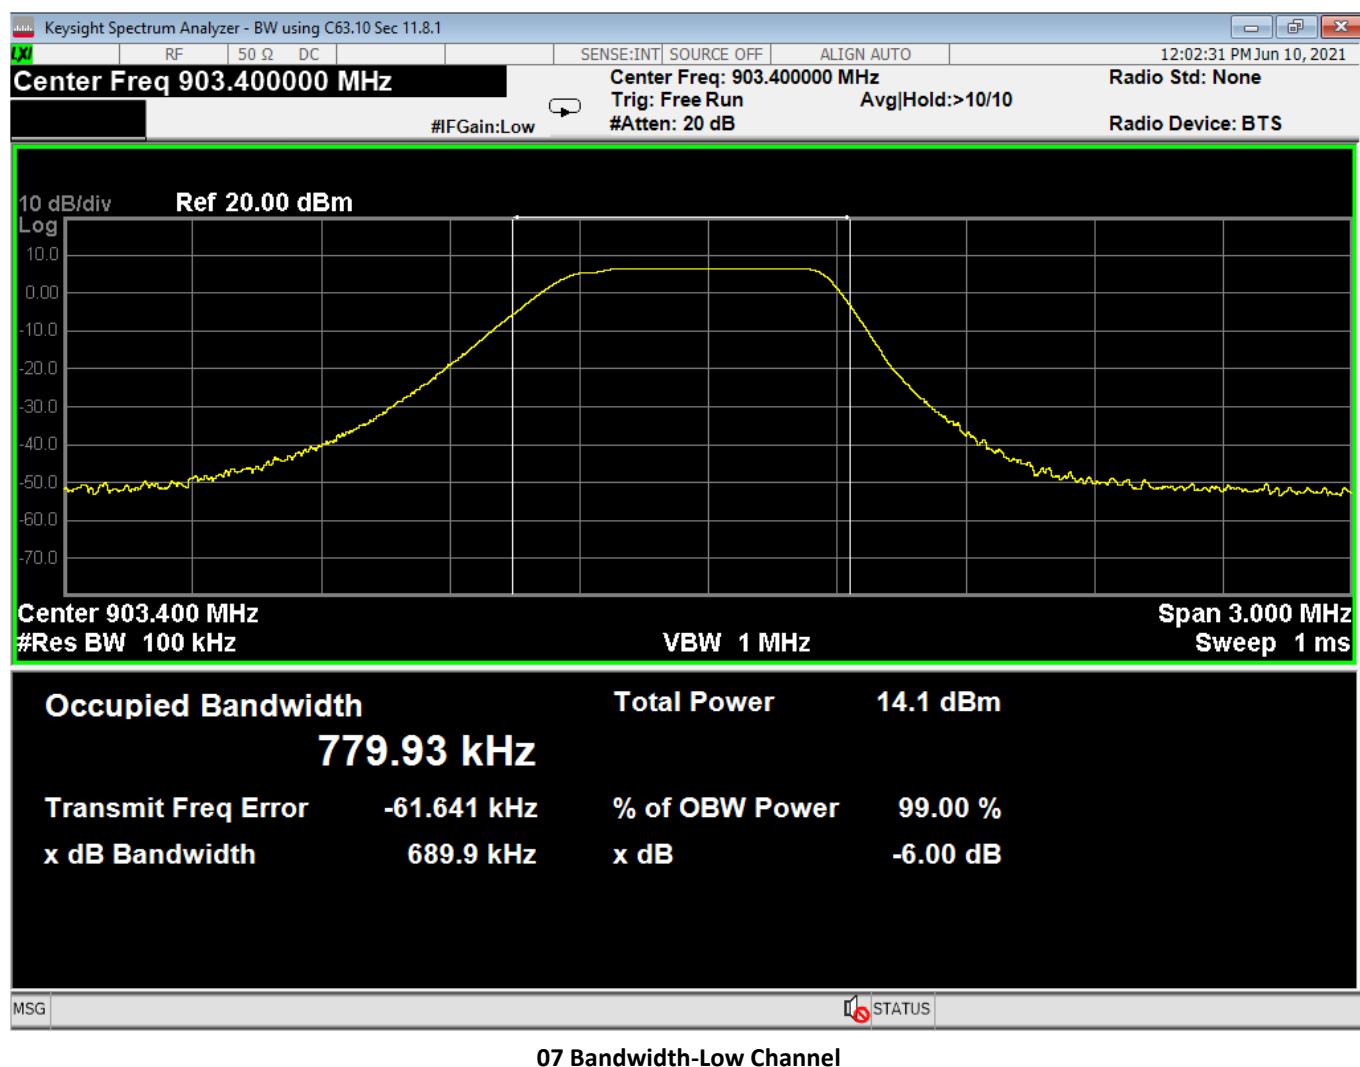


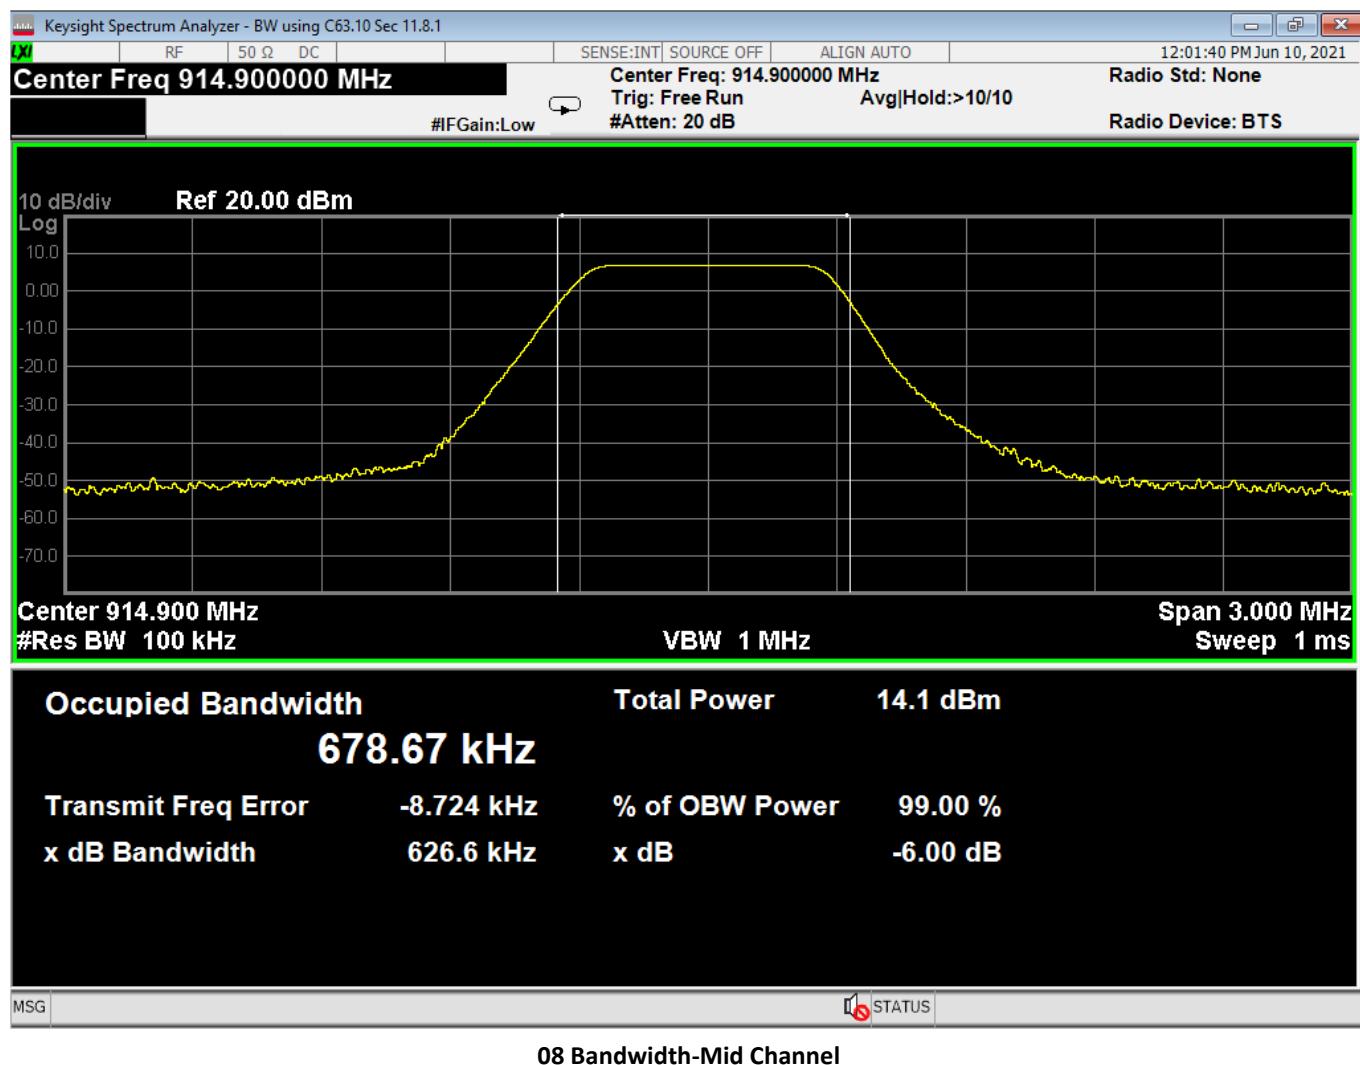

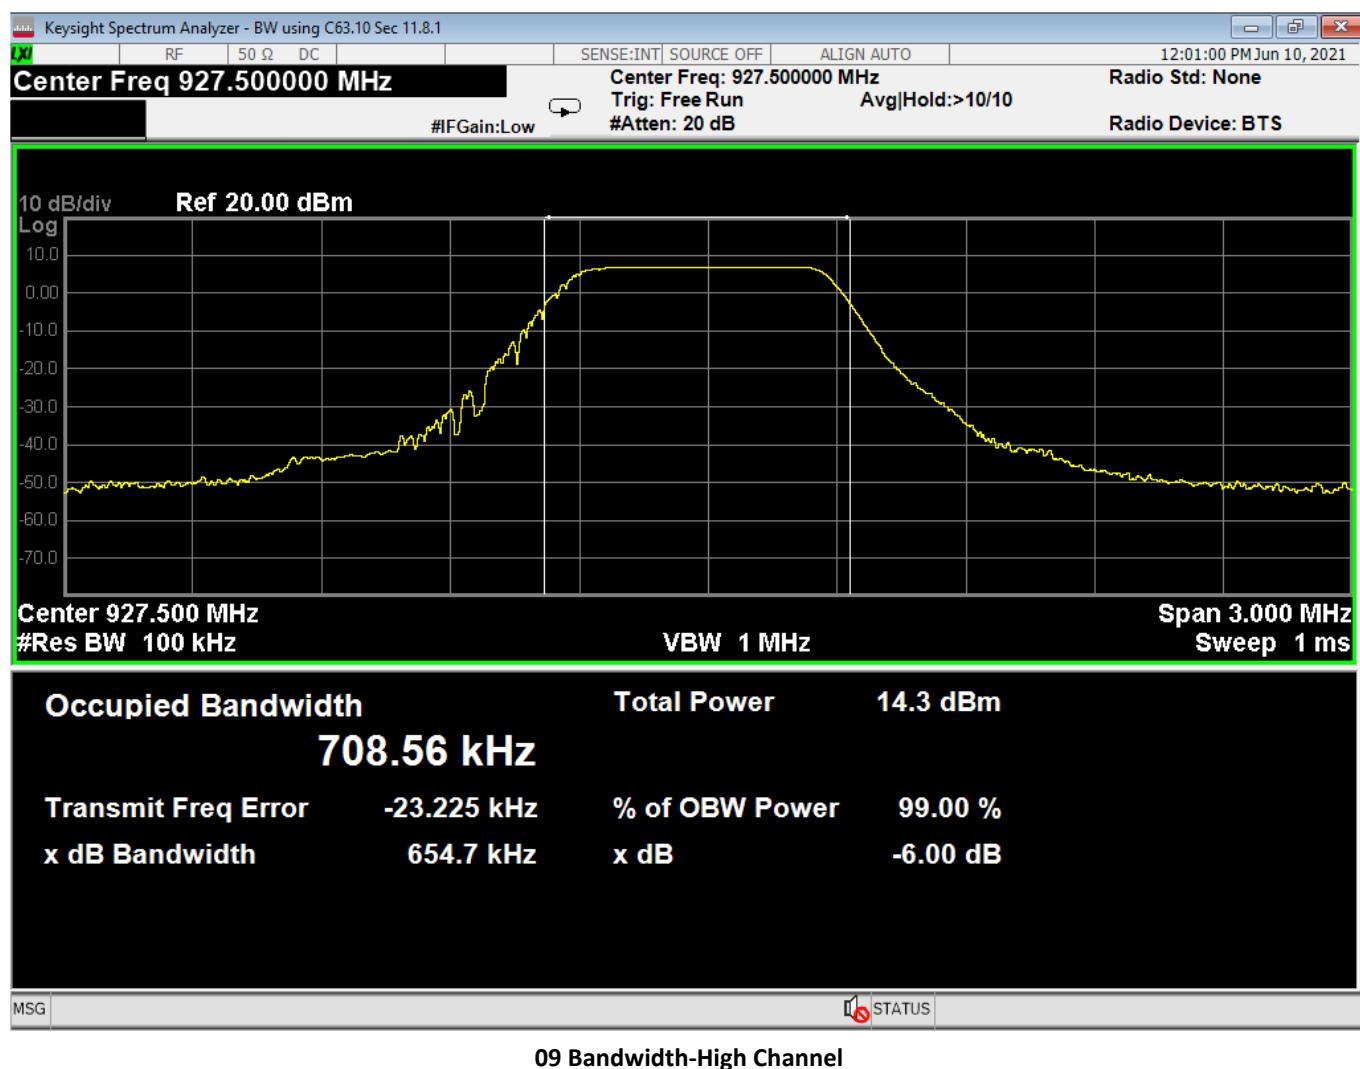


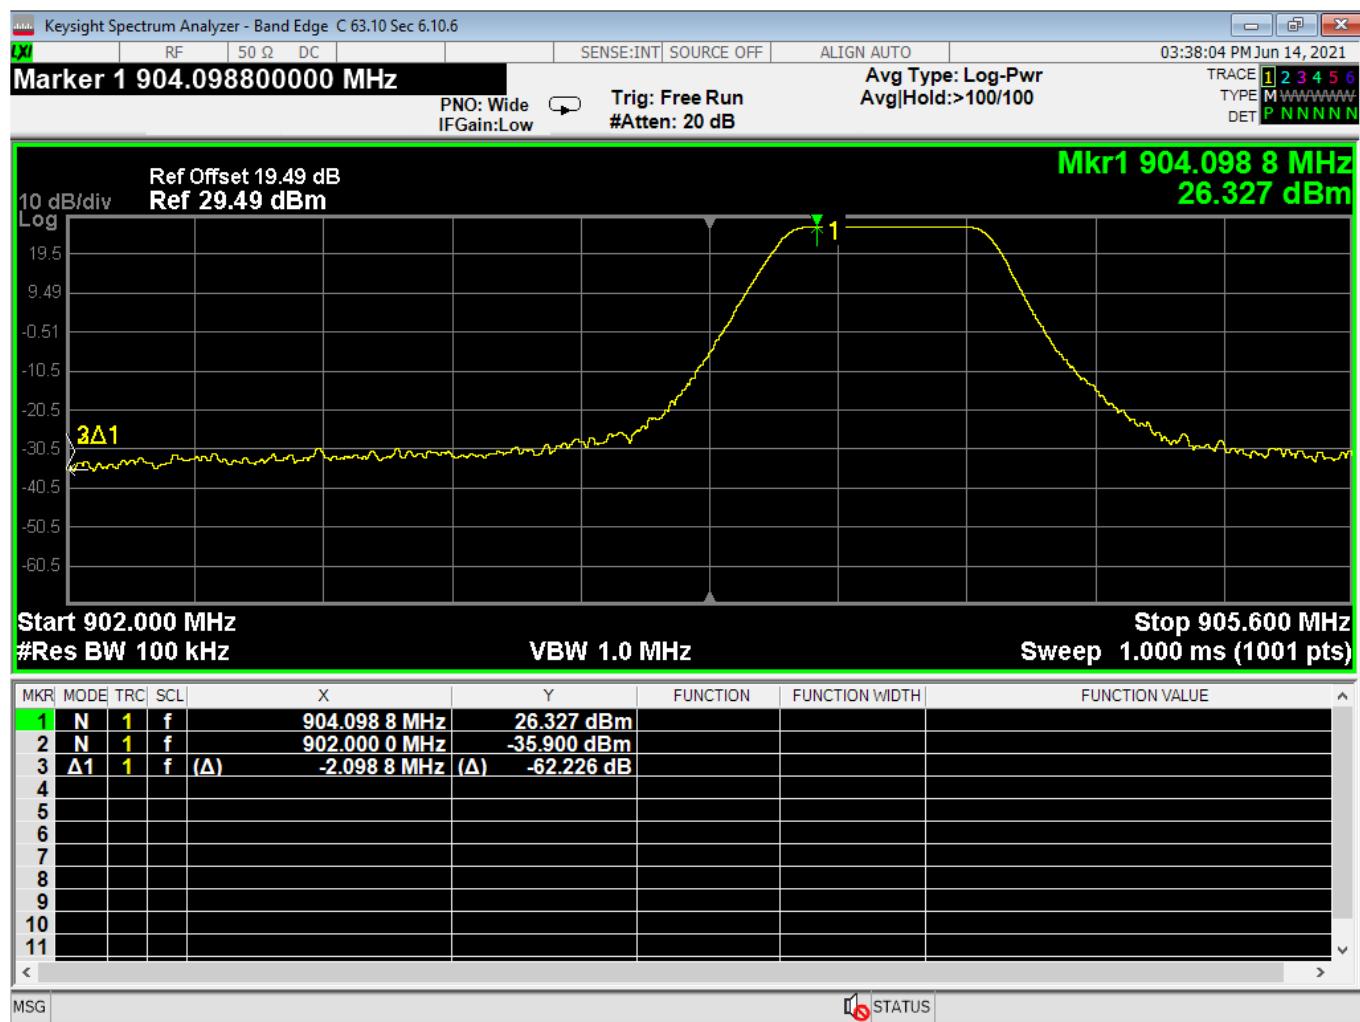


10 Unrestricted Bandedge-Low Channel

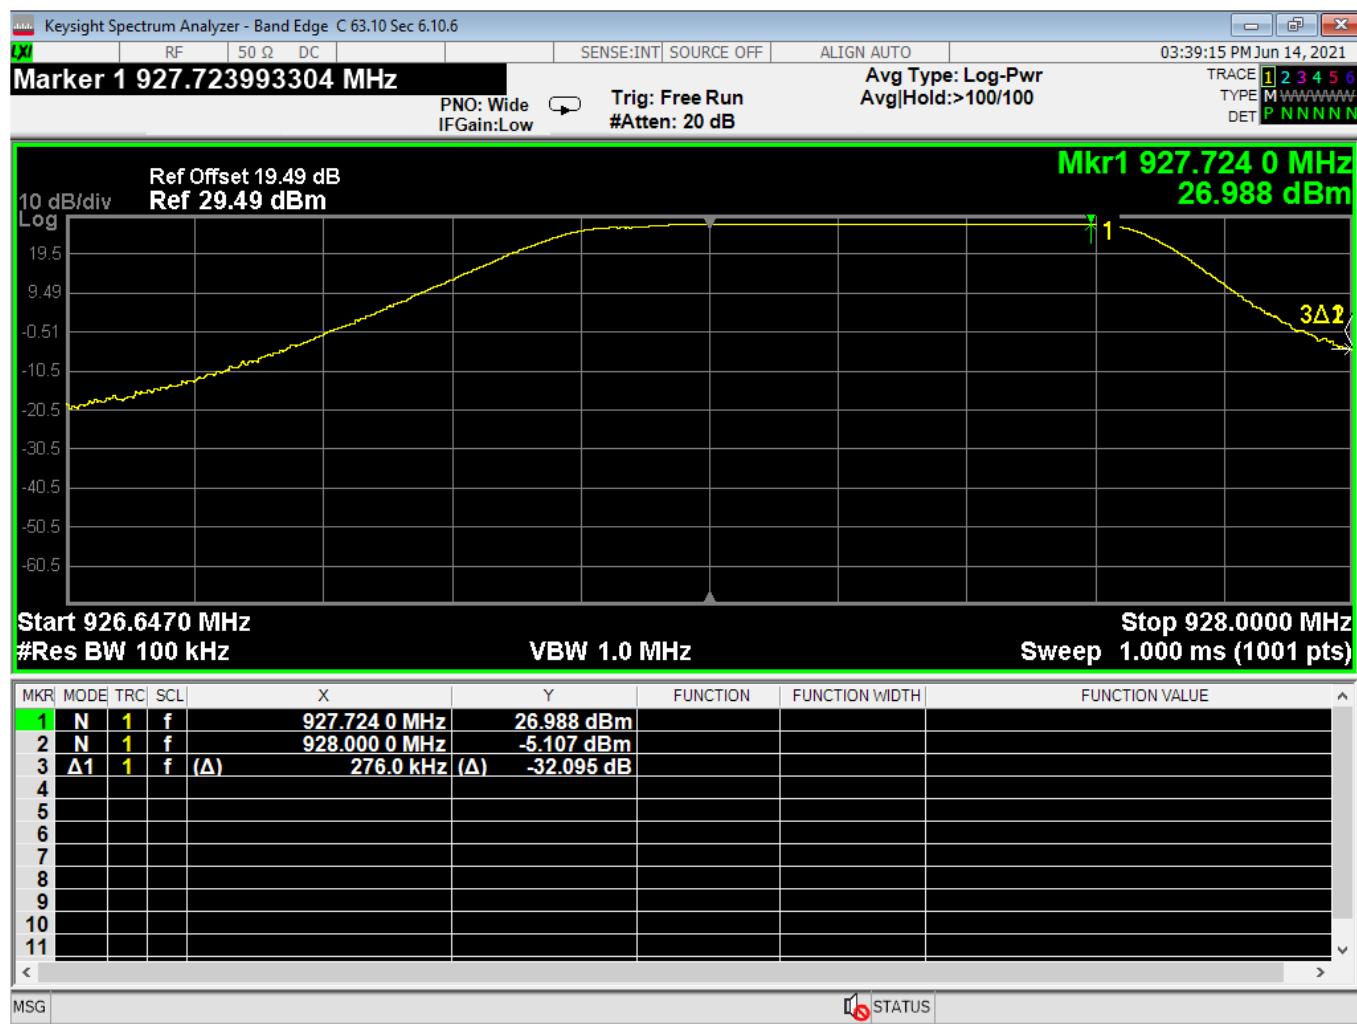


11 Unrestricted Bandedge-High Channel

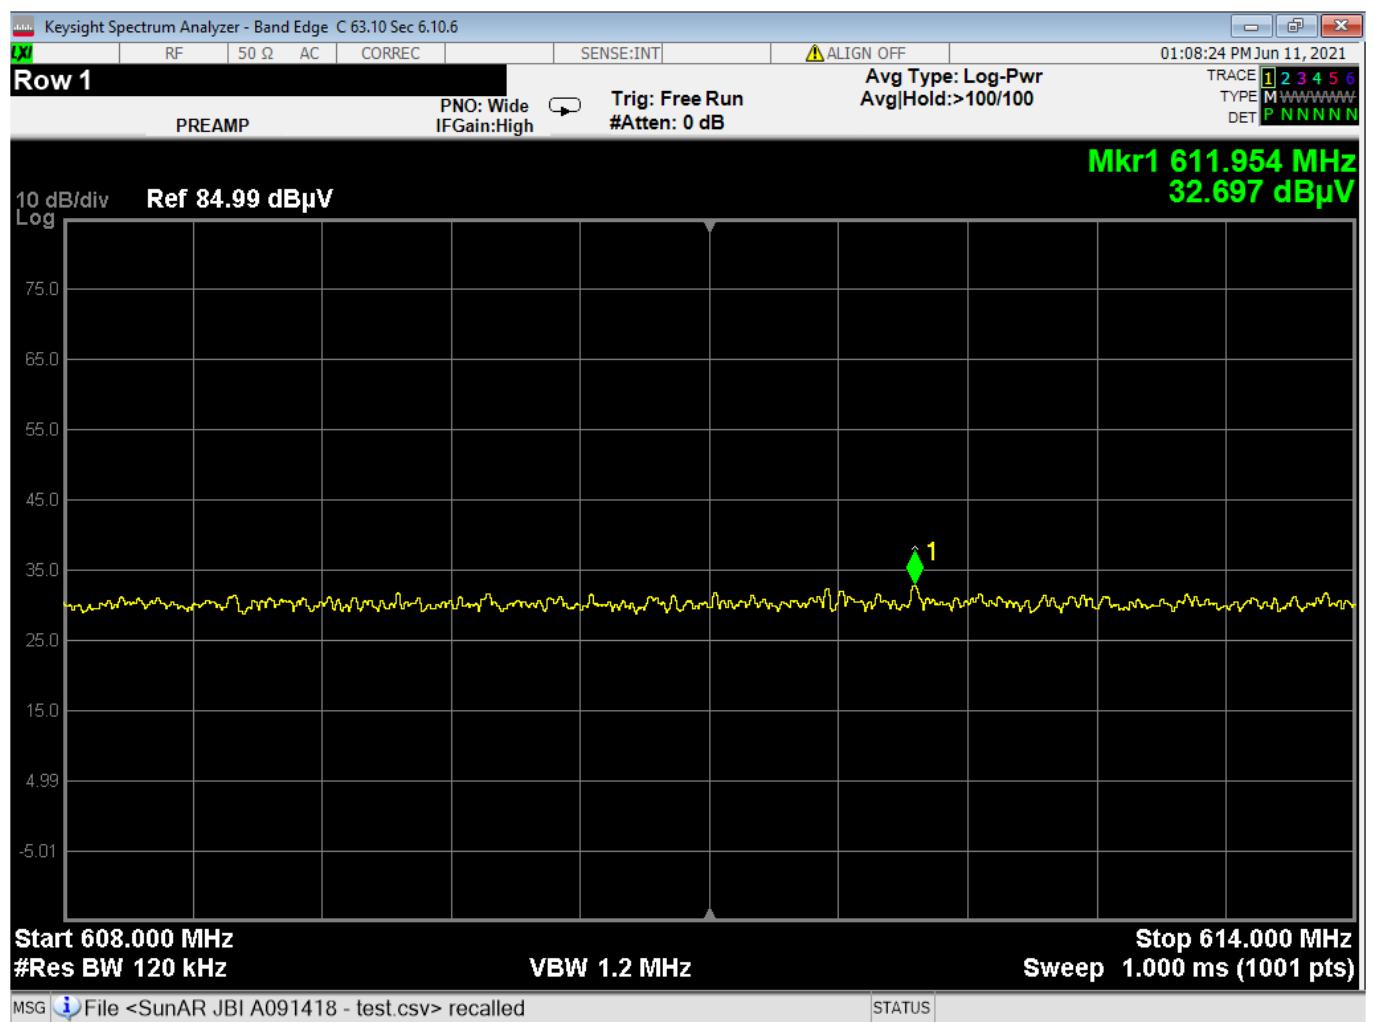

12 Radiated Restricted Bandedge-Low Channel

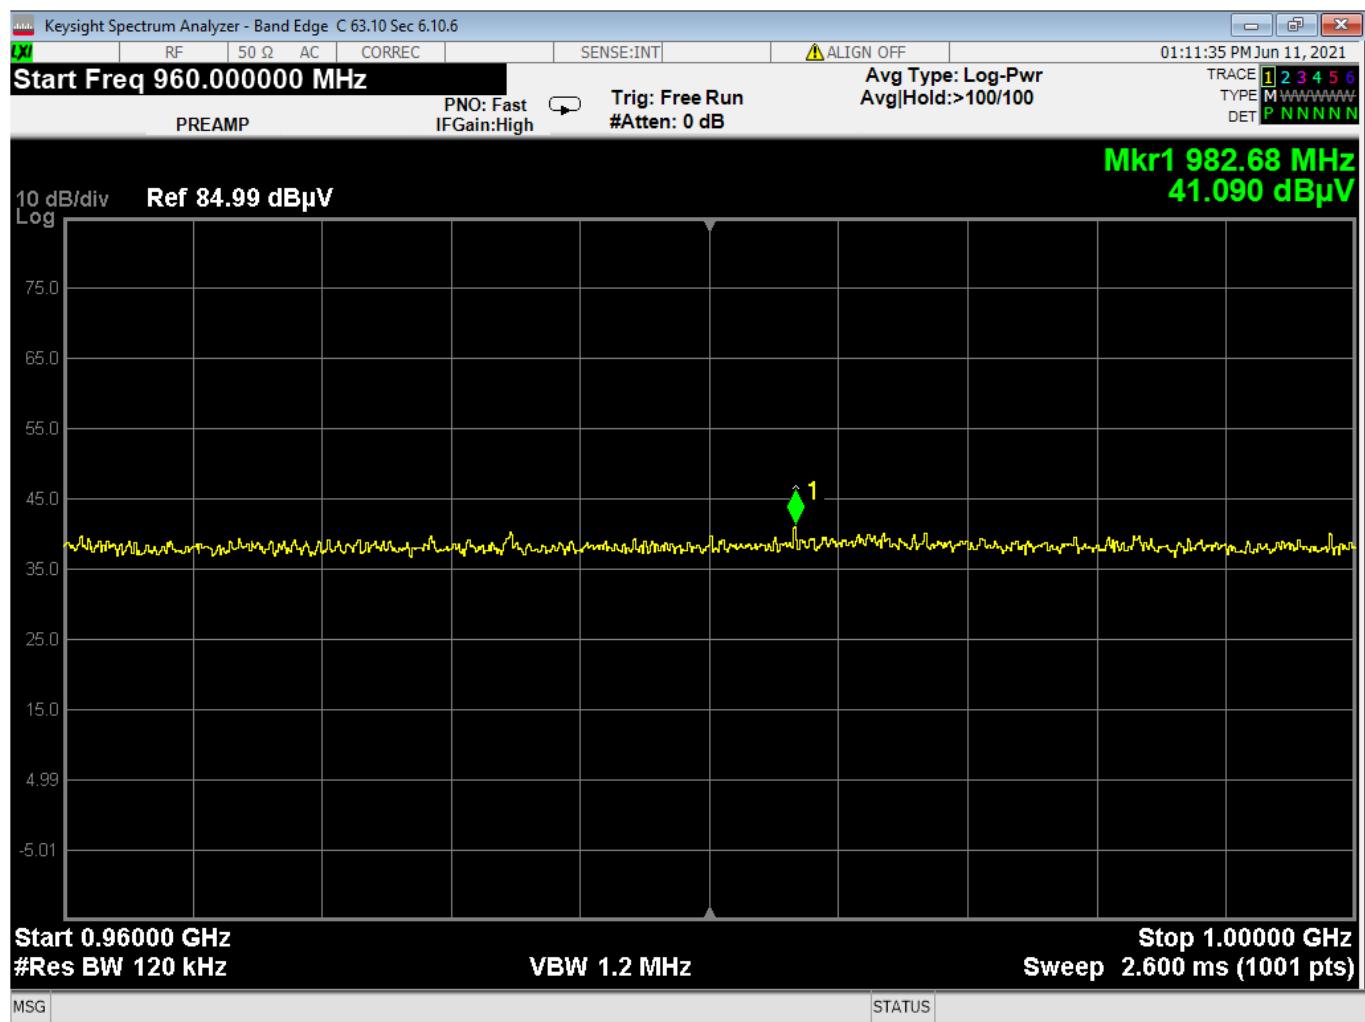

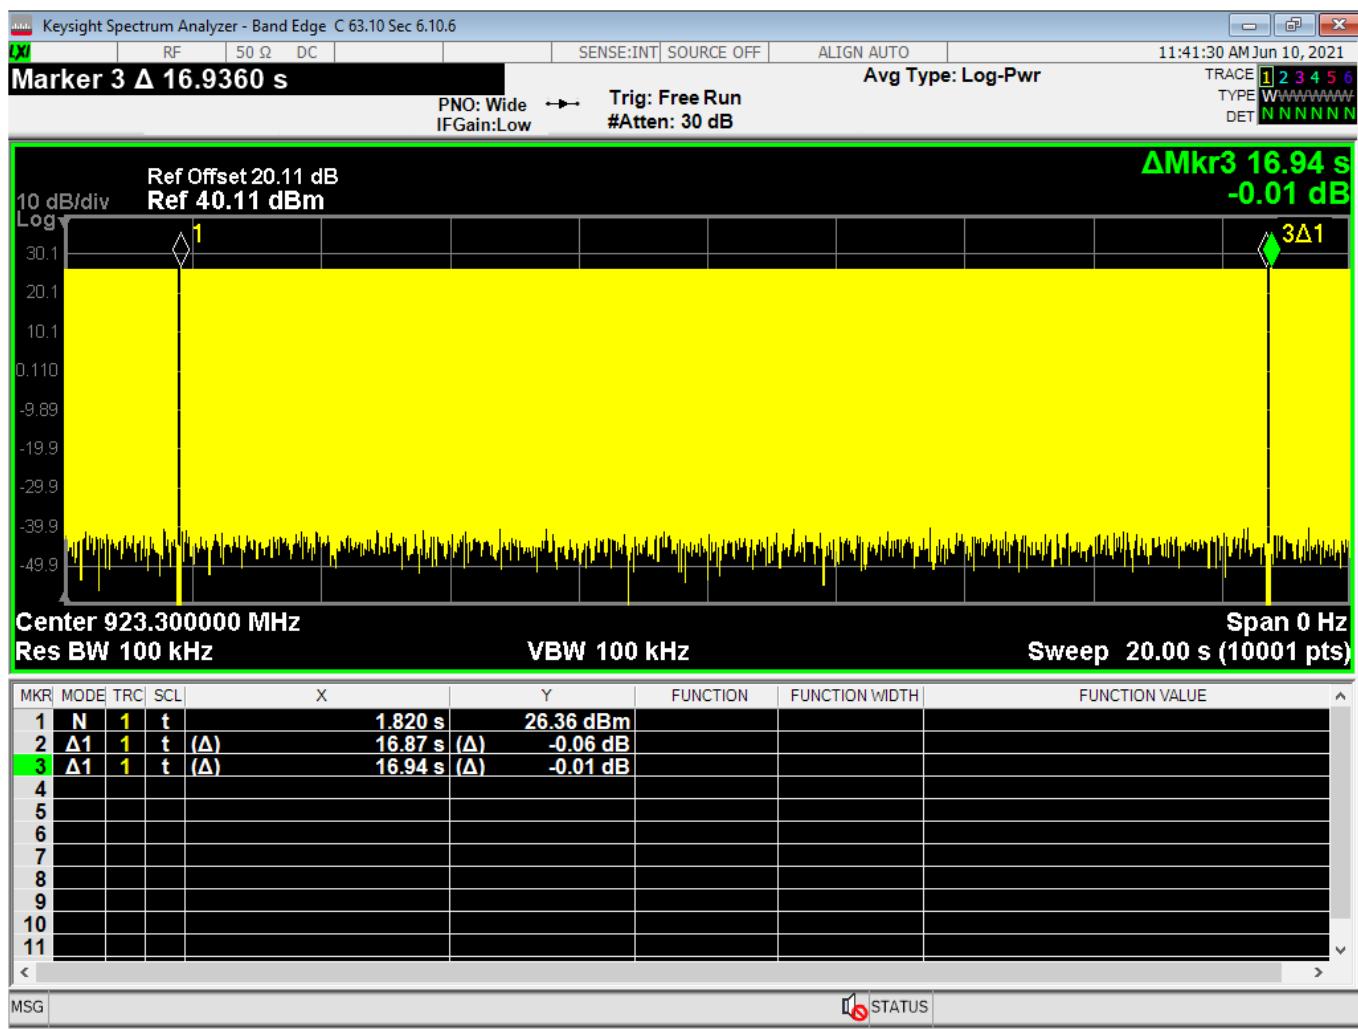



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		



Report Number:	R20201203-20-E1A	Rev	A
Prepared for:	Signetik		

REPORT END