

Certification Radio test report

According to the standard:
CFR 47 FCC PART 15

Equipment under test:
MICRO TRACKER 2

FCC ID: 2AOSP-U002

Company:
ABEEWAY

Distribution: Mrs DENIS

(Company: ABEEWAY)

Number of pages: 66 with 6 annexes

Ed.	Date	Modified Page(s)	Technical Verification and Quality Approval	
			Name and Function	Visa
0	6-Sep-18	Creation	M. DUMESNIL, Radio Technical Manager	

*Duplication of this document is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.*



DESIGNATION OF PRODUCT: MICRO TRACKER 2

Serial number (S/N): 20635F01010001FA

Reference / model (P/N): U002-52

Software version: actt-micro-mtos-usb-rev1.2-4
Asset Tracker v1.x (for production)

MANUFACTURER: ABEEWAY

COMPANY SUBMITTING THE PRODUCT:

Company: ABEEWAY

Address: 635, ROUTE DES LUCIOLES
06560 VALBONNE
FRANCE

Responsible: Mrs DENIS


Person present during the tests: Mr DANCHESI (29 and 30 – august 2018)

DATES OF TEST: From 29-Aug-18 to 5-Sep-18

TESTING LOCATION: EMITECH ANGERS laboratory at JUIGNE SUR LOIRE (49) FRANCE
FCC Accredited under US-EU MRA Designation Number: FR0009
Test Firm Registration Number: 873677

TESTED BY: S. LOUIS

VISA:



WRITTEN BY: S. LOUIS

CONTENTS

<i>TITLE</i>	<i>PAGE</i>
1. INTRODUCTION.....	4
2. PRODUCT DESCRIPTION	4
3. NORMATIVE REFERENCE.....	5
4. TEST METHODOLOGY.....	5
5. TEST EQUIPMENT CALIBRATION DATES	6
6. TESTS RESULTS SUMMARY.....	8
7. MEASUREMENT UNCERTAINTY.....	10
8. ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS.....	11
9. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER.....	14
10. INTENTIONAL RADIATOR	18
11. MAXIMUM CONDUCTED POWER DENSITY	24
APPENDIX 1: TEST EQUIPMENT LIST	27
APPENDIX 2: 6 DB BANDWIDTH	29
APPENDIX 3: 99% BANDWIDTH	35
APPENDIX 4: BAND EDGE.....	41
APPENDIX 5: TIME OF OCCUPANCY ON ANY FREQUENCY	49
APPENDIX 6: SPECTRAL DENSITY.....	61

1. INTRODUCTION

This report presents the results of radio test carried out on the following radio equipment: **Micro Tracker 2**, in accordance with normative reference.

The device under test integrates a multifrequencies wireless transceiver LoRa.

The product integrates also:

- BLE radio transceiver
- WiFi radio transceiver
- GPS receiver.

This radio test report concern only the results for certification procedure on the LoRa part, for test under subpart B see radio test report RR051-17-103200-7-A.

The transceivers (LoRa, BLE and WiFi) can't emit simultaneously as declared by the manufacturer.

The applicant declares that radio functions are not operational during the charge of the battery.

2. PRODUCT DESCRIPTION

Class: B

Utilization: Residential

Antenna type and gain: Integrated antenna, gain declared by the applicant (considered -1.5 dBi)

Power adjusted by software: The power level is tuned to reach max power

Operating frequency range: From 902.3 MHz to 914.9 MHz

Frequency tested: 902.3 MHz, 908.7 MHz, 914.9 MHz for transmission
923.3 MHz, 925.1 MHz, 927.5 MHz for reception

Frequencies plan detailed transmitter:

Channel frequencies	LoRa bandwidth (KHz)	Number of channel	Channel width (KHz)
902,3+i*0,2MHz (i=0 à 63)	125	64	200

Frequencies plan detailed receiver:

Channel frequencies	LoRa bandwidth (KHz)	Number of channel	Channel width (KHz)
923,3+i*0.6MHz (i=0 à 7)	500	8	600

Number of channels: 64

Channel spacing: 200 kHz

Modulation: LoRa with spread factor:7 and 10

Power source: Rechargeable 3.7Vdc Battery.

Power level, frequency range and channels characteristics are not user adjustable.

3. **NORMATIVE REFERENCE**

The standards and testing methods related throughout this report are those listed below.

They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

CFR 47 FCC Part 15 (2018) Radio Frequency Devices

ANSI C63.10 2013
Procedures for Compliance Testing of Unlicensed Wireless Devices.

558074 D01 DTS v05 Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules.

447498 D01 General RF RF Exposure procedures and equipment authorization policies for mobile and Exposure Guidance v06 portable equipment

4. **TEST METHODOLOGY**

Radio performance tests procedures given in CFR 47 part 15:

Subpart C – Intentional Radiators

Paragraph 203: Antenna requirement

Paragraph 205: Restricted bands of operation

Paragraph 207: Conducted limits

Paragraph 209: Radiated emission limits; general requirements

Paragraph 215: Additional provisions to the general radiated emission limitations

Paragraph 247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

5. TEST EQUIPMENT CALIBRATION DATES

Emitech Number	Model	Type	Last calibration	Calibration interval (years)	Next calibration due
0	BAT-EMC V3.16.0.64	Software	/	/	/
1406	EMCO 6502	Loop antenna	13/04/2017	2	13/04/2019
2648	ALC ALN02-0032	Low-noise amplifier	30/03/2018	1	30/03/2019
4088	R&S FSP40	Spectrum Analyzer	21/02/2018	2	21/02/2020
4393	Wainwright WLJS800-C11/60EE	Low Pass Filter	29/03/2018	2	29/03/2020
6884	Suhner 1.5m	Cable	29/03/2018	2	29/03/2020
7190	R&S HL223	Antenna	15/03/2016	3	15/03/2019
7240	Emco 3110	Biconical antenna	15/03/2016	3	15/03/2019
7310	Filtek HP12/1200-5AA	High-pass filter	29/03/2018	2	29/03/2020
8511	HP 8447D	Low-noise amplifier	01/02/2018	1	01/02/2019
8534	EMCO 3115	Antenna	16/03/2016	3	16/03/2019
8535	EMCO 3115	Antenna	10/02/2016	4	10/02/2020
8578	2GHz	Cable	29/03/2018	2	29/03/2020
8593	SIDT Cage 2	Anechoic chamber	/	/	/
8707	R&S ESI7	Test receiver	13/02/2018	1	13/02/2019
8732	Emitech	OATS	11/10/2016	3	11/10/2019
8749	La Crosse Technology WS-9232	Meteo station	23/09/2016	2	23/09/2018
8750	La Crosse Technology WS-9232	Meteo station	23/09/2016	2	23/09/2018
8783	EMCO 3147	Log periodic antenna	15/03/2016	3	15/03/2019
8864	Champ libre Juigné. V3.4	Software	/	/	/
8896	ACQUISYS GPS8	Satellite synchronized frequency standard	/	/	/
8972	K&L Microwave 500-1000MHz	Notch filter	/	/	/
10730	Mini-circuit ZFL-1000LN	Low-noise amplifier	12/02/2018	1	12/02/2019
10739	LUCIX Corp S005180M3201	Low-noise amplifier	29/03/2018	1	29/03/2019
10759	SIDT Cage 3	Anechoic chamber	/	/	/
12911	Huber + Suhner N-2m	cable	29/03/2018	2	29/03/2020
12912	Huber + Suhner N-5m	cable	29/03/2018	2	29/03/2020
14302	SUCOFLEX N-1m	cable	28/11/2016	2	28/11/2018
14303	SUCOFLEX N-2m	cable	28/11/2016	2	28/11/2018
14304	SUCOFLEX N-2.5m	cable	28/11/2016	2	28/11/2018

Emitech Number	Model	Type	Last calibration	Calibration interval (years)	Next calibration due
14305	SUCOFLEX N-4m	cable	28/11/2016	2	28/11/2018
14476	Fluke 177	Multimeter	20/07/2018	2	20/07/2020
-	GPIB SHOT V2.4	Software	/	/	/

6. TESTS RESULTS SUMMARY

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAP	NAs	
FCC Part 15.203	ANTENNA REQUIREMENT	X				Note 1
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS			X		Note 2
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements	X				Note 3
FCC part 15.215	ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS					
	(a) Alternative to general radiated emission limits	X				
	(b) Unwanted emissions outside of §15.247 frequency bands	X				Note 4
	(c) 20 dB bandwidth and band-edge compliance	X				
FCC Part 15.247	OPERATION WITHIN THE BANDS 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz					
	(a) (1) Hopping systems			X		
	(a) (2) Digital modulation techniques			X		
	(b) Maximum peak output power	X				Note 5
	(c) Operation with directional antenna gains > 6 dBi			X		
	(d) Intentional radiator	X				
	(e) Peak power spectral density	X				
	(f) Hybrid system	X				Note 6 Note 7
	(g) Frequency hopping requirements			X		
	(h) Frequency hopping intelligence			X		
	(i) RF exposure compliance	X				

NAP: Not Applicable

NAs: Not Asked

Note 1: Integral antenna.

Note 2: Supplied by batteries. The radio part of the equipment is no operational during charging mode.

Note 3: See FCC part 15.247 (d).

Note 4: See FCC part 15.209. Unwanted emissions levels are all below the fundamental emission field strength level.

Note 5: Conducted measurement is not possible (integral antenna), so we used the radiated method in open field.

Note 6: The transceiver used is SX1272 of Semtech also LoRa protocol is used.

The frequency hopping system uses 64 channels.

Each frequency is used equally on the average by the transmitter.

With Spread Factor 7:

The timing by channel is 36ms (see appendix 5).

During 64 channels $\times 0.4 \text{ s} = 25.6 \text{ s}$, any channel is used 1 time, then $1 \times 36\text{ms} = 36\text{ms}$, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 seconds multiplied by the number of hopping channels employed, in normal operating mode.

Number of channels	Observation period (0.4s * Nbr of channel) (s)	Maximal Duration of each burst (ms)	Number of burst repetition during observation period	average time of occupancy on any channel (s)	Limits (s)
64	25.6	36	1	0.036	0.4

With Spread Factor 10:

The timing by channel is 248.4ms (see appendix 5).

During 64 channels $\times 0.4 \text{ s} = 25.6 \text{ s}$, any channel is used 1 time, then $1 \times 248.4\text{ms} = 248.4\text{ms}$, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 seconds multiplied by the number of hopping channels employed, in normal operating mode.

Number of channels	Observation period (0.4s * Nbr of channel) (s)	Maximal Duration of each burst (ms)	Number of burst repetition during observation period	average time of occupancy on any channel (s)	Limits (s)
64	25.6	248.4	1	0.248	0.4

Note 7:

The minimum 6 dB bandwidth of the equipment is 260 kHz on high channel (see appendix 2).

The maximum 99% bandwidth of the equipment is 127.2 kHz (see appendix 3).

7. MEASUREMENT UNCERTAINTY

To declare, or not, the compliance with the specifications, it was not explicitly taken into account of uncertainty associated with the result(s)

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for normal distribution corresponds to a coverage probability of approximately 95%.

Parameter	Emitech Uncertainty
RF power, conducted	$\pm 0.75\text{dB}$
Radiated emission valid to 26 GHz	
F < 62.5 MHz:	$\pm 5.14\text{ dB}$
62.5 MHz < F < 1 GHz:	$\pm 5.13\text{ dB}$
1 GHz < F < 26 GHz:	$\pm 5.16\text{ dB}$
AC Power Lines conducted emissions	$\pm 3.38\text{ dB}$
Temperature	$\pm 1\text{ }^{\circ}\text{C}$
Humidity	$\pm 5\text{ \%}$

8. ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS**Temperature (°C) :** 22.2**Humidity (%HR):** 38**Date :** September 5, 2018**Technician :** S. LOUIS**Standard:** FCC Part 15**Test procedure:** Paragraph 15.215**Test set up:**

Test realized in near field. All field strength measurements are correlated with the radiated maximum peak output power

Test operating condition of the equipment:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

The power level is tuned to reach max power.

We used for power source the internal battery of the equipment and we noted:

Voltage at the beginning of test (V): 3.75

Voltage at the end of test (V): 3.69

Percentage of voltage drop during the test (%): 1.6

Results:

Lower Band Edge: from 900MHz to 902MHz

Upper Band Edge: from 928MHz to 930MHz

Sample N° 1 with Spread Factor 7 – Hopping mode off:

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV/m)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)(1)	Limit (dBc)	Margin (dB)
902.3	98.28	P	901.99	-45.44	-30 dBc (2)	15.44
914.9	103.89	P	928.08	-55.80	-30 dBc (2)	25.80

(1) Marker-Delta method

(2) According to KDB 558074 §11.1, as the output power was measured with an average detection the limit is -30 dBc

Band-edge curves are given in appendix 4.

Sample N° 1 with Spread Factor 7 – Hopping mode on:

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV/m)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)(1)	Limit (dBc)	Margin (dB)
902.3	97.32	P	901.99	-42.86	-30 dBc (2)	12.86
914.9	103.79	P	928.14	-58.30	-30 dBc (2)	28.30

(1) Marker-Delta method

(2) According to KDB 558074 §11.1, as the output power was measured with an average detection the limit is -30 dBc

Band-edge curves are given in appendix 4.

Sample N° 1 with Spread Factor 10 – Hopping mode off:

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV/m)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)(1)	Limit (dBc)	Margin (dB)
902.3	98.28	P	901.97	-47.20	-30 dBc (2)	17.20
914.9	103.89	P	928.82	-55.02	-30 dBc (2)	25.02

⁽¹⁾ Marker-Delta method

⁽²⁾ According to KDB 558074 §11.1, as the output power was measured with an average detection the limit is -30 dBc Band-edge curves are given in appendix 4.

Sample N° 1 with Spread Factor 10 – Hopping mode on:

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV/m)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)(1)	Limit (dBc)	Margin (dB)
902.3	97.32	P	901.97	-47.91	-30 dBc (2)	17.91
914.9	103.79	P	928.37	-57.21	-30 dBc (2)	27.21

⁽¹⁾ Marker-Delta method

⁽²⁾ According to KDB 558074 §11.1, as the output power was measured with an average detection the limit is -30 dBc Band-edge curves are given in appendix 4.

Test conclusion:

RESPECTED STANDARD

9. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER**Temperature (°C) :** 24.3**Humidity (%HR):** 39**Date :** September 4, 2018**Technician :** S. LOUIS**Standard:** FCC Part 15**Test procedure:** paragraph 15.247 (b)

AVGSA-1 of paragraph 11.9.2.2.2 of ANSI C63.10

Test set up:

First an exploratory radiated measurement was performed.

During this phase the product is oriented in three orthogonal planes.

Then the final measurement is realized with the product on the most critical orientation.

The measure is realized on open area test site under 1 GHz

The system is tested in an open area test site (OATS), the EUT is placed on a rotating table, 0.8m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

Distance of antenna: 10 meters (in open area test site)**Antenna height:** 1 to 4 meters (in open area test site)**Antenna polarization:** vertical and horizontal (only the highest level is recorded)

The measure of average output power is measured with a spectrum analyzer:

Resolution bandwidth: 1% to 5% of the OBW, not to exceed 1 MHz.

Video bandwidth: 3 x RBW

Span: At least 1.5 x OBW

Detector: RMS

Sweep points: At least 2 x SPAN/RBW

Sweep time: Auto

Trace: Average detector RMS

Trace Number: At least 100 traces

Then channel power function is used to compute power on OBW band.

Finally the radiated electro-magnetic field is converted in dBm with the following formula:

$EIRP(dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance in meters and antenna Gain = -1.5 dBi.

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

The power level is tuned to reach max power.

We used for power source the internal battery of the equipment and we noted:

Voltage at the beginning of test (V):	3.76
Voltage at the end of test (V):	3.71
Percentage of voltage drop during the test (%):	1.33

Results:

Sample N° 1 Low Channel 902.3MHz – SF7

	Electro-magnetic field (dBμV/m):	Conducted power (1) (W)	Limit (W)
Nominal supply voltage: 3.7V	98.28	0.032	1

Polarization of test antenna: Horizontal (height: 323 cm)

Position of equipment: On the side position (azimuth: 0 degrees)

Sample N° 1 Central Channel 908.7MHz – SF7

	Electro-magnetic field (dBμV/m):	Conducted power (1) (W)	Limit (W)
Nominal supply voltage: 3.7V	100.87	0.058	1

Polarization of test antenna: Horizontal (height: 112 cm)

Position of equipment: On the side position (azimuth: 0 degrees)

Sample N° 1 High Channel 914.9MHz –SF7

	Electro-magnetic field (dBμV/m):	Conducted power (1) (W)	Limit (W)
Nominal supply voltage: 3.7V	103.89	0.114	1

Polarization of test antenna: Horizontal (height: 119 cm)

Position of equipment: On the side position (azimuth: 0 degrees)

(1) $P = (E \times d)^2 / (30 \times G_p)$ with $d = 10\text{ m}$ and $G_p = 0.71$

Antenna gain: -1.5 dBi

Sample N° 1 Low Channel 902.3MHz – SF10

	Electro-magnetic field (dBμV/m):	Conducted power (1) (W)	Limit (W)
Nominal supply voltage: 3.7V	97.32	0.025	1

Polarization of test antenna: Horizontal (height: 124 cm)

Position of equipment: On the side position (azimuth: 0 degrees)

Sample N° 1 Central Channel 908.7MHz – SF10

	Electro-magnetic field (dBμV/m):	Conducted power (1) (W)	Limit (W)
Nominal supply voltage: 3.7V	100.90	0.058	1

Polarization of test antenna: Horizontal (height: 324cm)

Position of equipment: On the side position (azimuth: 0 degrees)

Sample N° 1 High Channel 914.9MHz –SF10

	Electro-magnetic field (dBμV/m):	Conducted power (1) (W)	Limit (W)
Nominal supply voltage: 3.7V	103.79	0.113	1

Polarization of test antenna: Horizontal (height: 109 cm)

Position of equipment: On the side position (azimuth: 0 degrees)

(1) $P = (E \times d)^2 / (30 \times G_p)$ with $d = 10\text{ m}$ and $G_p = 0.71$

Antenna gain: -1.5 dBi

Test conclusion:

RESPECTED STANDARD

10. INTENTIONAL RADIATOR**Temperature (°C) :** 25.8**Humidity (%HR):** 54**Date :** August 29, 2018**Technician :** S. LOUIS**Standard:** FCC Part 15**Test procedure:** paragraph 15.205, paragraph 15.209, paragraph 15.247 (d)

Emissions in non-restricted frequency bands method of paragraph 11.11 of ANSI C63.10

Emissions in restricted frequency bands method of paragraph 11.12 of ANSI C63.10

Test set up:

First an exploratory radiated measurement was performed.

During this phase the product is oriented in three orthogonal planes.

Then the final measurement is realized with the product on the most critical orientation.

The measure is realized on open area test site under 1 GHz and in anechoic chamber above 1 GHz.

When the system is tested in an open area test site (OATS), the EUT is placed on a rotating table, 0.8m from a ground plane.

When the system is tested in anechoic chamber, the EUT is placed on a rotating table, 1.5 m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

Emissions in non-restricted frequency bands method of paragraph 11 of KDB 558074 and Emissions in restricted frequency bands method of paragraph 12 of KDB 558074 are apply.

Frequency range: From 9 kHz to 10GHz (10th harmonic of the highest fundamental frequency (928MHz)**Detection mode:** Quasi-peak (F < 1 GHz)

Peak / Average (F > 1 GHz)

Bandwidth: 200Hz (9 kHz < F < 150kHz)
9 kHz (150 kHz < F < 30MHz)
120 kHz (30 MHz < F < 1 GHz)
100 kHz / 1 MHz (F > 1 GHz)**Distance of antenna:** 10 meters (in open area test site) / 3 meters (in anechoic room)**Antenna height:** 1 to 4 meters (in open area test site) 1.50 meter (in anechoic room)**Antenna polarization:** vertical and horizontal (only the highest level is recorded)

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

The power level is tuned to reach max power.

We used for power source the internal battery of the equipment and we noted:

Voltage at the beginning of test (V):	3.76
Voltage at the end of test (V):	3.62
Percentage of voltage drop during the test (%):	3.72

Results:

Sample N° 1 Low Channel – SF7

Frequencies (MHz)	Detector P QP Av	Antenna height (cm)	RBW (kHz)	Position	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1804.6	P	150	100	1	V	52.8	84.3	31.5
2706.9 (1)	P	150	1000	1	V	52 (2)	74	22.0
3609.2 (1)	P	150	1000	1	V	50.2 (2)	74	23.8
4511.5 (1)	P	150	1000	3	H	51.3 (2)	74	22.7
5413.8 (1)	P	150	1000	3	V	47.4 (2)	74	26.6
6316.1	P	150	100	2	H	50.6	84.3	33.7
7218.4	P	150	100	1	H	50.6	84.3	33.7
8120.7 (1)	P	150	1000	3	H	51.6 (2)	74	22.4
9023 (1)	P	150	1000	3	H	57.9	74	16.1
9023 (1)	Av	150	1000	3	H	52.9	54	1.1

P= Peak, QP=Quasi-peak, Av=Average

(1) Restricted bands of operation in 15.205

(2) The peak level is lower than the average limit (54 dBμV/m).

Sample N° 1 Low Channel – SF10

Frequencies (MHz)	Detector P QP Av	Antenna height (cm)	RBW (kHz)	Position	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1804.6	P	150	100	1	V	52	84.3	32.3
2706.9 (1)	P	150	1000	1	V	50.8 (2)	74	23.2
3609.2 (1)	P	150	1000	1	V	50.2 (2)	74	23.8
4511.5 (1)	P	150	1000	3	H	50.0 (2)	74	24.0
5413.8 (1)	P	150	1000	3	V	46.0 (2)	74	28.0
6316.1	P	150	100	2	H	48.5	84.3	35.8
7218.4	P	150	100	1	H	51.0	84.3	33.3
8120.7 (1)	P	150	1000	3	H	50.5 (2)	74	23.5
9023 (1)	P	150	1000	3	H	57.8	74	16.2
9023 (1)	Av	150	1000	3	H	52.9	54	1.1

P= Peak, QP=Quasi-peak, Av=Average

(1) Restricted bands of operation in 15.205

(2) The peak level is lower than the average limit (54 dBμV/m).

Sample N° 1 Central Channel – SF7

Frequencies (MHz)	Detector P QP Av	Antenna height (cm)	RBW (kHz)	Position	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1817.4	P	150	100	1	V	52.2	84.3	32.1
2726.1 (1)	P	150	1000	1	V	51.9 (2)	74	22.1
3634.8 (1)	P	150	1000	1	V	48.7 (2)	74	25.3
4543.5 (1)	P	150	1000	3	H	50.9 (2)	74	23.1
5452.2 (1)	P	150	1000	3	V	46.5 (2)	74	27.5
6360.9	P	150	100	2	H	49.9	84.3	34.4
7269.6 (1)	P	150	1000	1	H	51.1 (2)	74	22.9
8178.3 (1)	P	150	1000	3	H	50.3 (2)	74	23.7
9087 (1)	P	150	1000	3	H	58.4	74	15.6
9087 (1)	Av	150	1000	3	H	53.3	54	0.7

P= Peak, QP=Quasi-peak, Av=Average

(1) Restricted bands of operation in 15.205

(2) The peak level is lower than the average limit (54 dBμV/m).

Sample N° 1 Central Channel – SF10

Frequencies (MHz)	Detector P QP Av	Antenna height (cm)	RBW (kHz)	Position	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1817.4	P	150	100	1	V	51.7	84.3	32.6
2726.1 (1)	P	150	1000	1	V	51.7 (2)	74	2.3
3634.8 (1)	P	150	1000	1	V	49.6 (2)	74	24.4
4543.5 (1)	P	150	1000	3	H	50.0 (2)	74	24.0
5452.2 (1)	P	150	1000	3	V	46.0 (2)	74	28.0
6360.9	P	150	100	2	H	48.7	84.3	35.6
7269.6 (1)	P	150	1000	1	H	51.1 (2)	74	22.9
8178.3 (1)	P	150	1000	3	H	50 (2)	74	24.0
9087 (1)	P	150	1000	3	H	57.9	74	16.1
9087 (1)	Av	150	1000	3	H	53.1	54	0.9

P= Peak, QP=Quasi-peak, Av=Average

(1) Restricted bands of operation in 15.205

(2) The peak level is lower than the average limit (54 dBμV/m).

Sample N° 1 High Channel – SF7

Frequencies (MHz)	Detector P QP Av	Antenna height (cm)	RBW (kHz)	Position	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1829.8	P	150	100	1	V	51.6	84.3	32.7
2744.7 (1)	P	150	1000	1	V	52.0 (2)	74	22.0
3659.6 (1)	P	150	1000	1	V	48.4 (2)	74	25.6
4574.5 (1)	P	150	1000	3	H	49.3 (2)	74	24.7
5489.4 (1)	P	150	1000	3	V	47.2 (2)	74	26.8
6404.3	P	150	100	2	H	50.0	84.3	34.3
7319.2 (1)	P	150	1000	1	H	50.5 (2)	74	23.5
8234.1 (1)	P	150	1000	3	H	51.0 (2)	74	23.0
9149 (1)	P	150	1000	3	H	57.4	74	16.6
9149 (1)	Av	150	1000	3	H	52.3	54	1.7

P= Peak, QP=Quasi-peak, Av=Average

(1) Restricted bands of operation in 15.205

(2) The peak level is lower than the average limit (54 dB μ V/m).

Sample N° 1 High Channel – SF10

Frequencies (MHz)	Detector P QP Av	Antenna height (cm)	RBW (kHz)	Position	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1829.8	P	150	100	1	V	51.4	84.3	29.9
2744.7 (1)	P	150	1000	1	V	52.1 (2)	74	21.9
3659.6 (1)	P	150	1000	1	V	48.6 (2)	74	25.4
4574.5 (1)	P	150	1000	3	H	50.7 (2)	74	23.3
5489.4 (1)	P	150	1000	3	V	46.7 (2)	74	27.3
6404.3	P	150	100	2	H	49.2	84.3	35.1
7319.2 (1)	P	150	1000	1	H	50.3 (2)	74	23.7
8234.1 (1)	P	150	1000	3	H	50.0 (2)	74	24.0
9149 (1)	P	150	1000	3	H	58.9	74	15.1
9149 (1)	Av	150	1000	3	H	53.9	54	0.1

P= Peak, QP=Quasi-peak, Av=Average

(1) Restricted bands of operation in 15.205

(2) The peak level is lower than the average limit (54 dB μ V/m).

Applicable limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The highest level recorded in a 100 kHz bandwidth is 114.30 dB μ V/m on High channel.

So the applicable limit is 84.30 dB μ V/m.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

Test conclusion:

RESPECTED STANDARD

11. MAXIMUM CONDUCTED POWER DENSITY**Temperature (°C) :** 20**Humidity (%HR):** 42**Date :** September 5, 2018**Technician :** S. LOUIS**Standard:** FCC Part 15**Test procedure:** paragraph 15.247 (e)

AVGPSD-1 of paragraph 11.10.3 of ANSI C63.10

Test set up:

The system is tested in anechoic chamber. The EUT is placed on a rotating table, 1.5m from a ground plane. Zero degree azimuth corresponds to the front of the device under test.

The measure is realized in radiated mode taking into account a correlation between the maximal Peak Output Power found in Open test area and near field found in the anechoic room.

The PSD is measured with a spectrum analyzer.

Resolution bandwidth:	3 kHz
Video bandwidth:	10 kHz
Span:	At least 1.5 x OBW
Detector:	RMS
Sweep points:	At least 2 x SPAN
Sweep time:	Auto
Trace:	Average detector RMS
Trace Number:	At least 100 traces

Then the peak marker function is used.

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

The power level is tuned to reach max power.

We used for power source the internal battery of the equipment and we noted:

Voltage at the beginning of test (V):	3.76
Voltage at the end of test (V):	3.71
Percentage of voltage drop during the test (%):	1.33

Results:

Sample N° 1 Low Channel – SF7

	Peak power density at frequency: 902.3 MHz
Normal test conditions	+1.13 dBm / 3 kHz
Limits	+8 dBm / 3 kHz

Sample N° 1 Central Channel – SF7

	Peak power density at frequency: 908.7 MHz
Normal test conditions	+4.45 dBm / 3 kHz
Limits	+8 dBm / 3 kHz

Sample N° 1 High Channel – SF7

	Peak power density at frequency: 914.9 MHz
Normal test conditions	+7.55 dBm / 3 kHz
Limits	+8 dBm / 3 kHz

Sample N° 1 Low Channel – SF10

	Peak power density at frequency: 902.3 MHz
Normal test conditions	+1.40 dBm / 3 kHz
Limits	+8 dBm / 3 kHz

Sample N° 1 Central Channel – SF10

	Peak power density at frequency: 908.7 MHz
Normal test conditions	+4.55 dBm / 3 kHz
Limits	+8 dBm / 3 kHz

Sample N° 1 High Channel – SF10

	Peak power density at frequency: 914.9 MHz
Normal test conditions	+6.74 dBm / 3 kHz
Limits	+8 dBm / 3 kHz

Test conclusion:

RESPECTED STANDARD

□□□ End of report, 6 appendixes to be forwarded □□□

APPENDIX 1: Test equipment list

Additional provisions to the general radiated emission limitations

TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Log periodic antenna HL223	Rohde & Schwarz	7190
Cable N-2m	Huber + Suhner	12911
Cable N-5m	Huber + Suhner	12912
Cable N-1.5m	Suhner	6884
Multimeter 177	FLUKE	14476
Meteo station WS-9232	La Crosse Technology	8750
Software	GPIBSHOT V2.4	-

Maximum Peak Conducted (Average) Output Power

TYPE	MANUFACTURER	EMITECH NUMBER
Open test site	EMITECH	8732
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Log periodic antenna 3147	EMCO	8783
Cable N-2GHz	/	8578
Multimeter 177	FLUKE	14476
Meteo station WS-9232	La Crosse Technology	8749
Software	Champ libre Juigné. V3.5	8864

Intentional Radiator


TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Full anechoic chamber	EMITECH	10759
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Loop antenna 6502	EMCO	1406
Biconical antenna 3110	EMCO	7240
Log periodic antenna HL223	Rohde & Schwarz	7190
Antenna 3115	EMCO	8534
Low-noise amplifier 8447D	Hewlett Packard	8511
Low-noise amplifier ZFL-1000L	Mini Circuit	10730
Low-noise amplifier ALN02-0032	ALC Microwave	2648
Low pass filter WLJS800-C11/60EE	Wainwright	4393
Notch filter 500-1000MHz	K&L Microwave	8972
High pass filter HP12/1200-5AA	Filtek	7310
Cable N-2m	Huber + Suhner	12911
Cable N-5m	Huber + Suhner	12912
Cable N-1.5m	Suhner	6884
Cable N-1m	SUCOFLEX	14302
Cable N-2m	SUCOFLEX	14303
Cable N-2.5m	SUCOFLEX	14304
Cable N-4m	SUCOFLEX	14305
Multimeter 177	FLUKE	14476
Meteo station WS-9232	La Crosse Technology	8750
Software	BAT-EMC V3.6.0.32	0000

Maximum Conducted Power Density

TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Log periodic antenna HL223	Rohde & Schwarz	7190
Cable N-2m	Huber + Suhner	12911
Cable N-5m	Huber + Suhner	12912
Cable N-1.5m	Suhner	6884
Multimeter 177	FLUKE	14476
Meteo station WS-9232	La Crosse Technology	8750
Software	GPIBSHOT V2.4	-

APPENDIX 2: 6 dB bandwidth

Low Channel – SF7

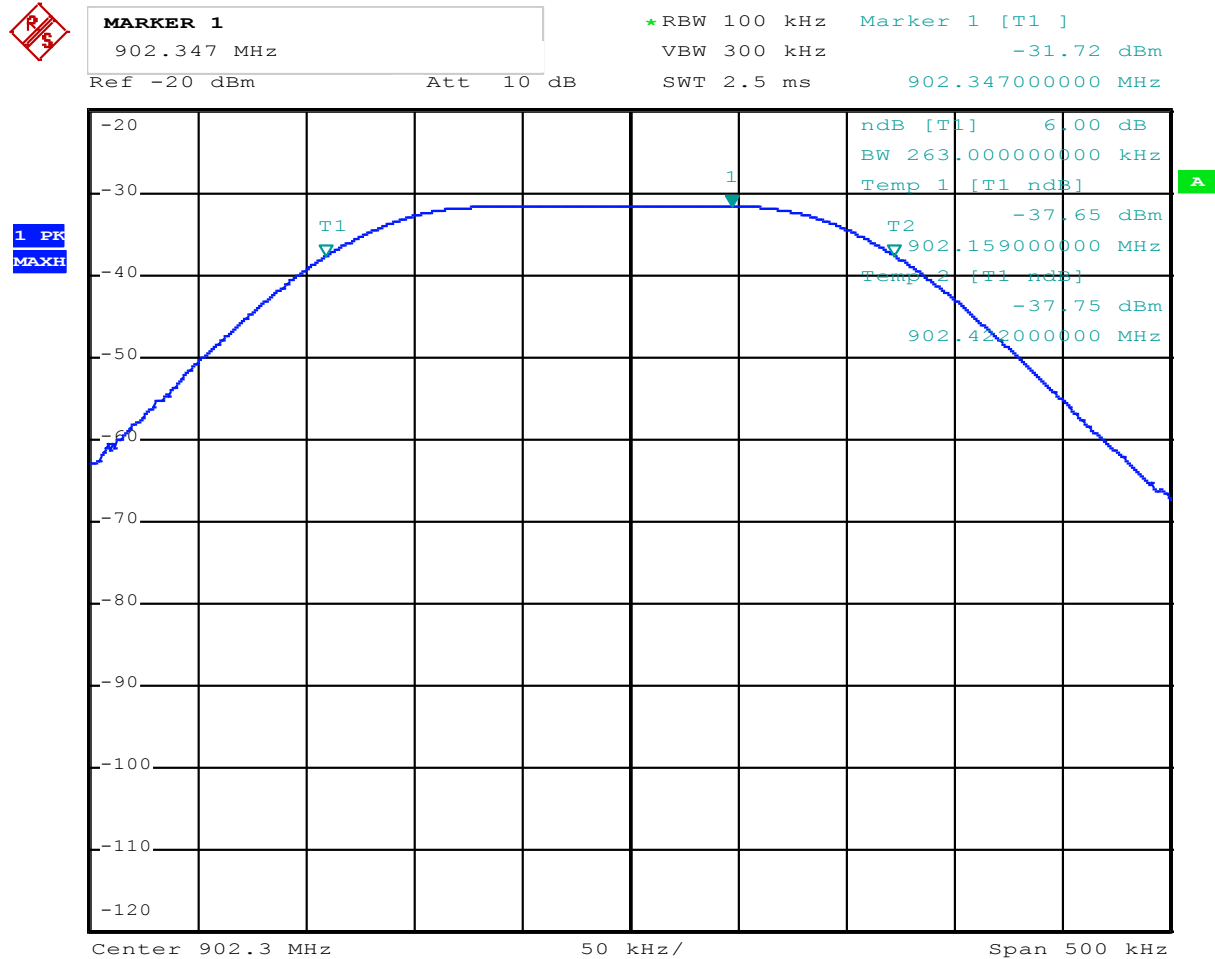

Low Channel – SF10


MARKER 1

902.309 MHz

Ref -20 dBm

Att 10 dB

*RBW 100 kHz


VBW 300 kHz

SWT 2.5 ms

Marker 1 [T1]

-38.33 dBm

902.309000000 MHz

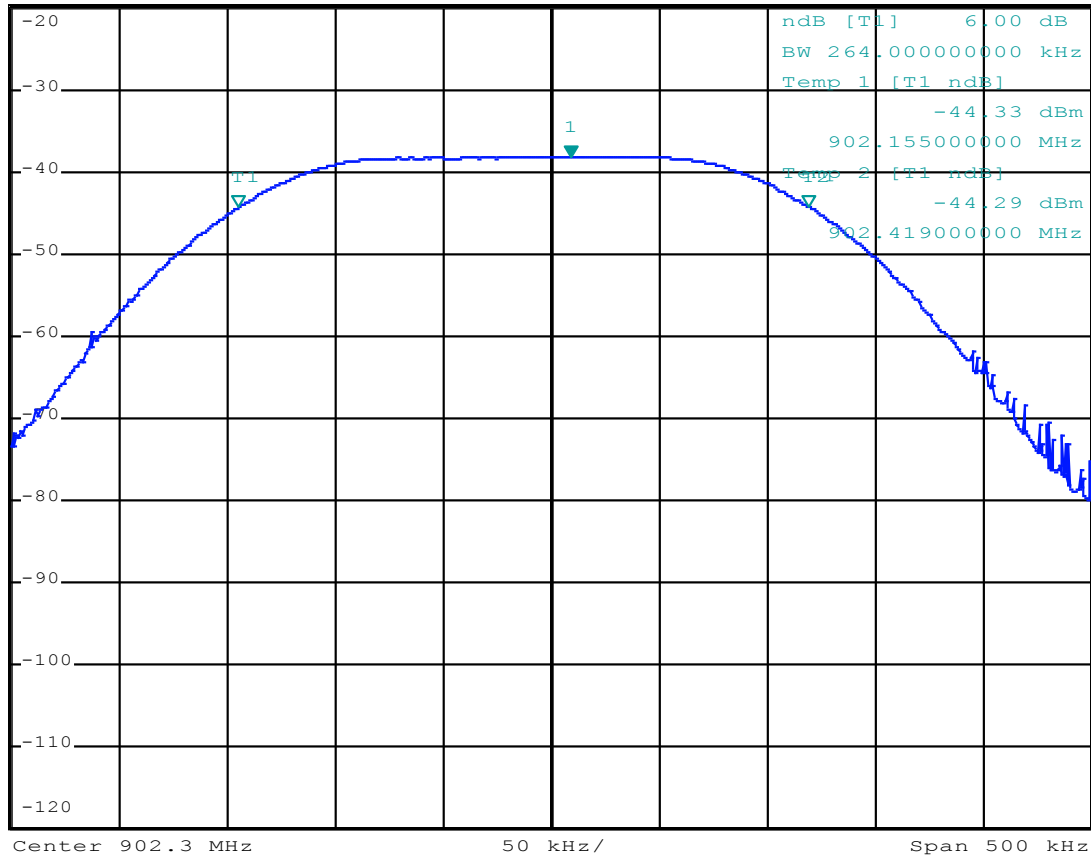1 PK
MAXH


Central Channel – SF7


MARKER 1

908.741 MHz

Ref -20 dBm

Att 10 dB

*RBW 100 kHz


VBW 300 kHz

SWT 2.5 ms

Marker 1 [T1]

-35.69 dBm

908.741000000 MHz

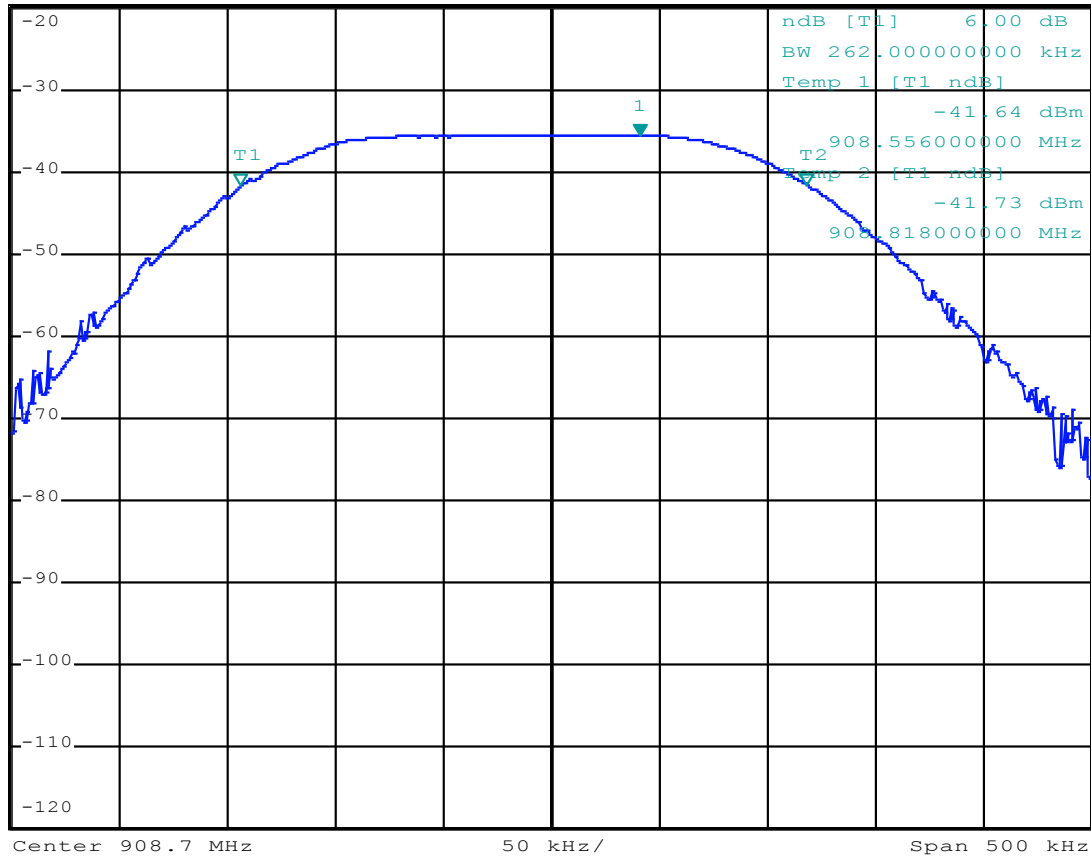1 PK
MAXH


MARKER 1

908.736 MHz

Ref -20 dBm

Att 10 dB

* RBW 100 kHz


Marker 1 [T1]

VBW 300 kHz

-35.69 dBm

SWT 2.5 ms

908.736000000 MHz



High Channel – SF7


MARKER 1

914.94 MHz

Ref -20 dBm

Att 10 dB

*RBW 100 kHz


VBW 300 kHz

SWT 2.5 ms

Marker 1 [T1]

-33.62 dBm

914.940000000 MHz

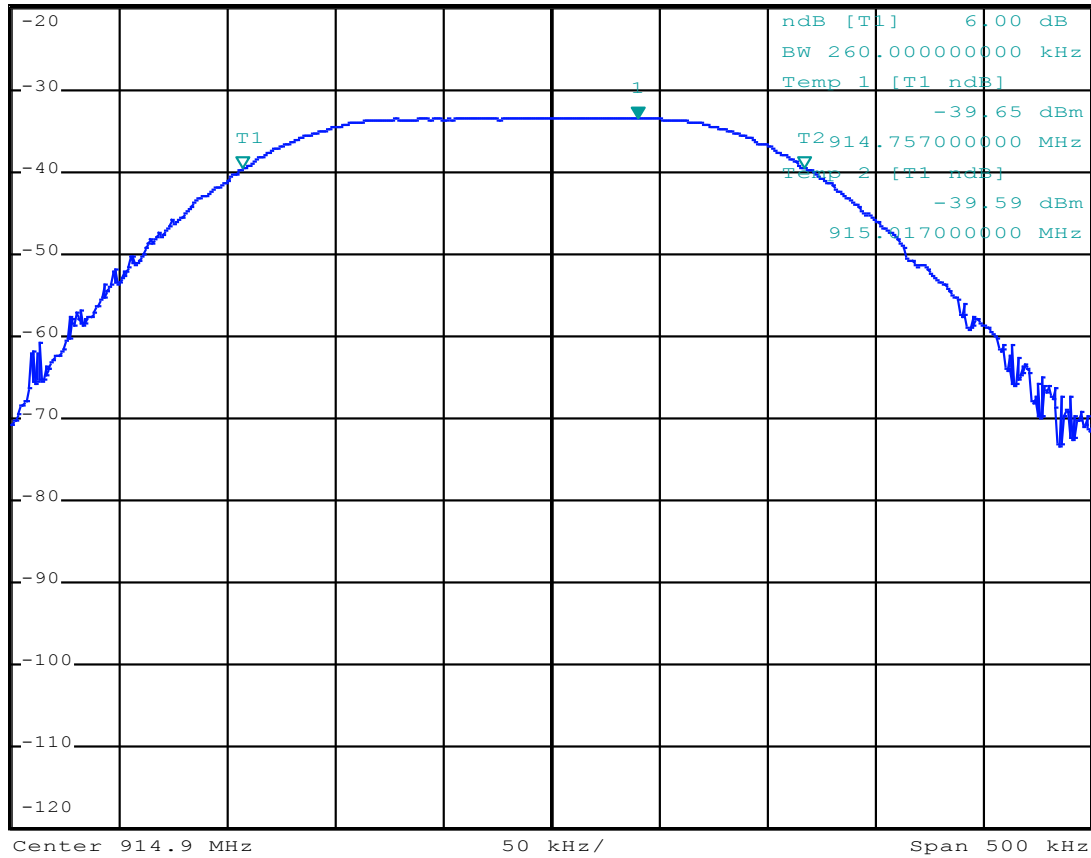1 PK
MAXH


High Channel – SF10


MARKER 1

914.836 MHz

Ref -20 dBm

Att 10 dB

*RBW 100 kHz


VBW 300 kHz

SWT 2.5 ms

Marker 1 [T1]


-33.58 dBm

914.836000000 MHz

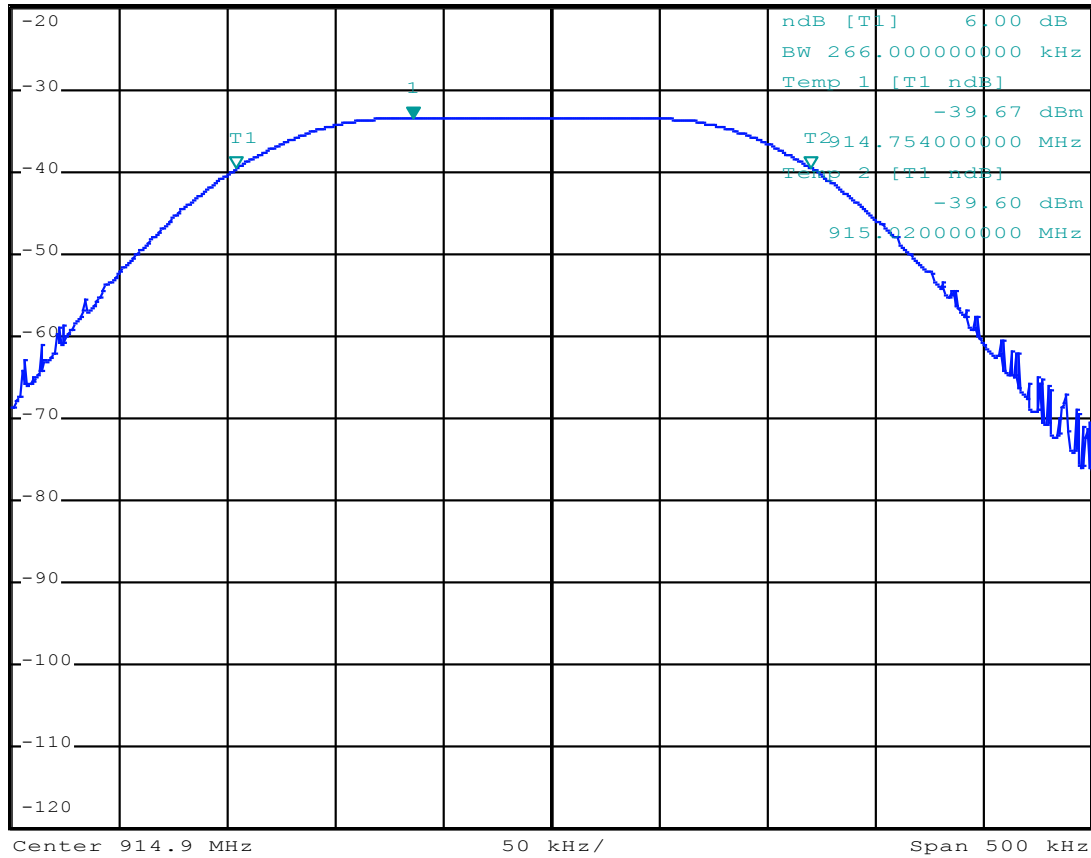1 PK
MAXH


APPENDIX 3: 99% bandwidth

Low Channel – SF7

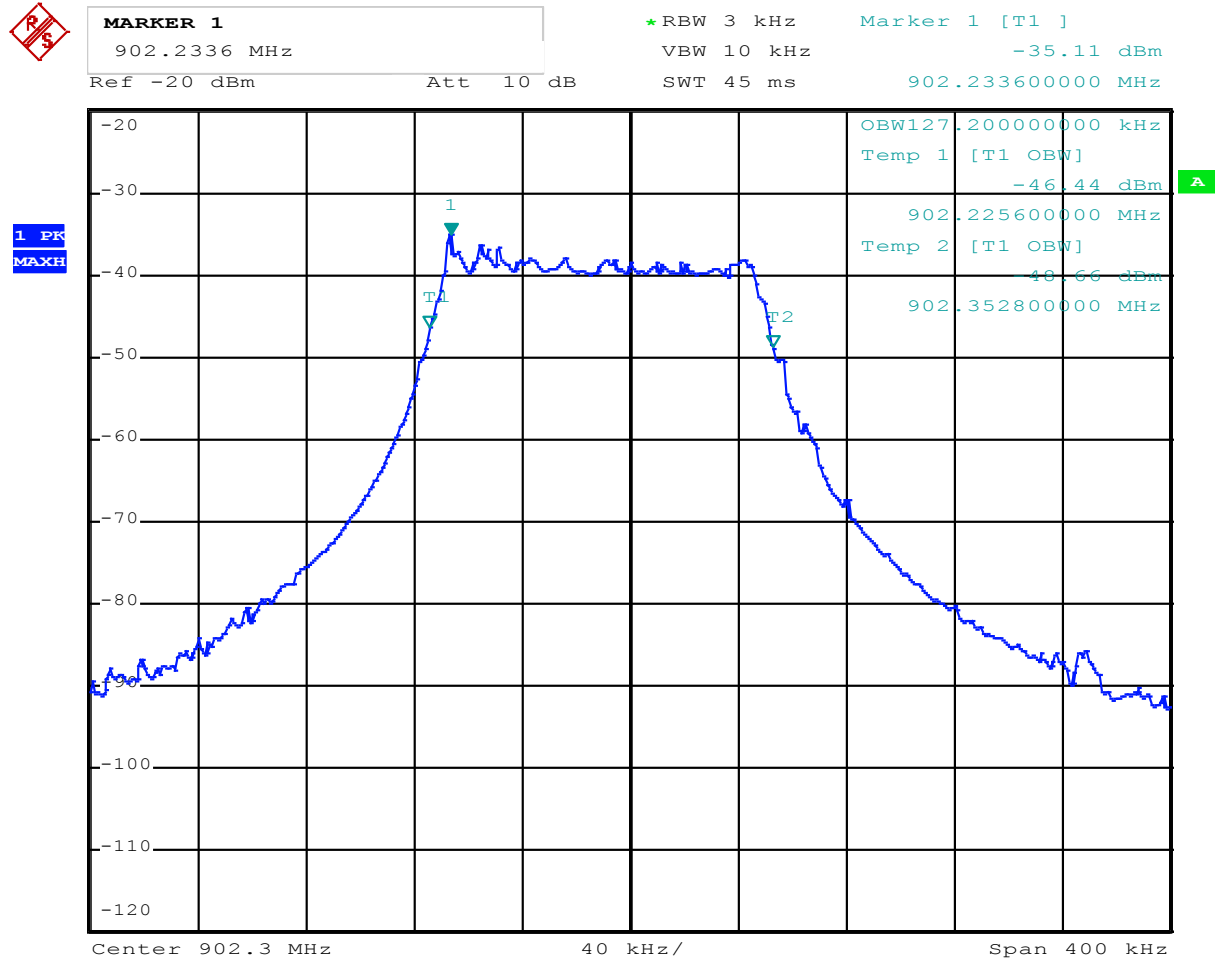

Low Channel – SF10



MARKER 1

902.3456 MHz

Ref -20 dBm

Att 10 dB

*RBW 3 kHz

VBW 10 kHz


SWT 45 ms

Marker 1 [T1]

-37.89 dBm

902.345600000 MHz

1 PK
MAXH

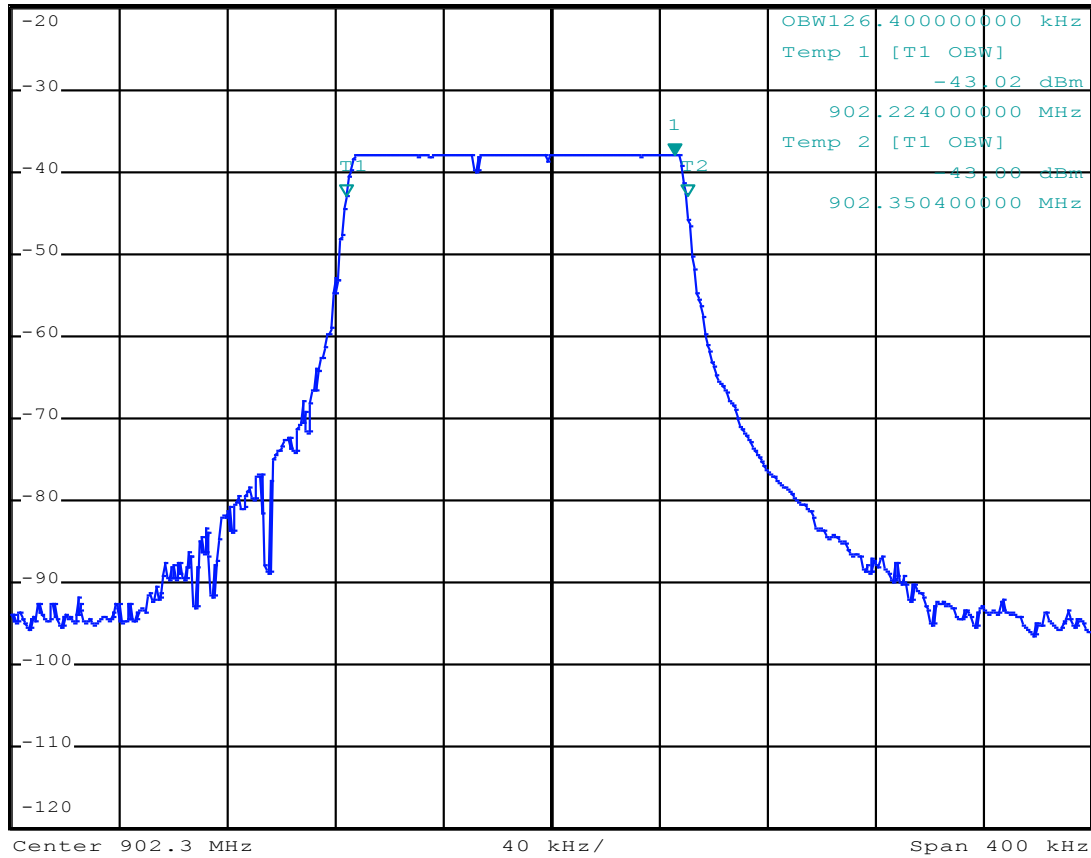

Central Channel – SF7


MARKER 1

908.644 MHz

Ref -20 dBm

Att 10 dB

* RBW 3 kHz


VBW 10 kHz

SWT 45 ms

Marker 1 [T1]

-39.72 dBm

908.644000000 MHz

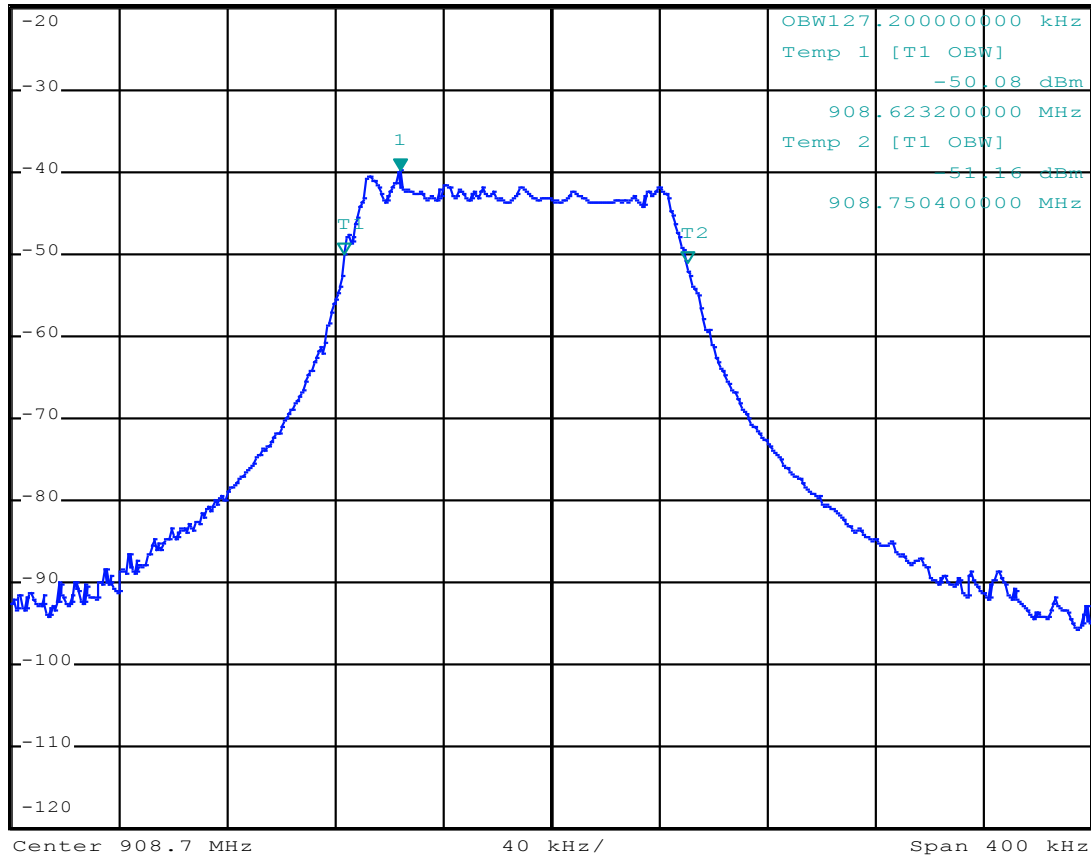1 PK
MAXH


Central Channel – SF10


MARKER 1

908.74 MHz

Ref -20 dBm

Att 10 dB

* RBW 3 kHz


VBW 10 kHz

SWT 45 ms

Marker 1 [T1]

-35.34 dBm

908.740000000 MHz

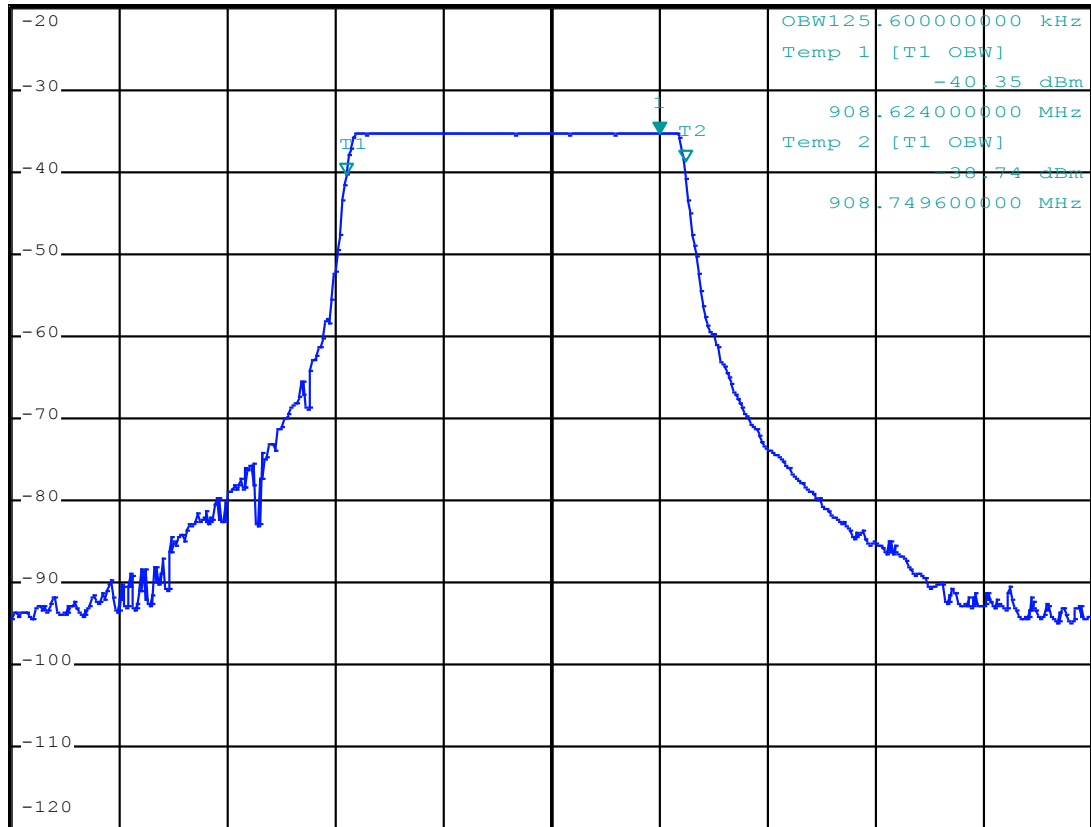1 PK
MAXH


Center 908.7 MHz

40 kHz/

Span 400 kHz

High Channel – SF7


MARKER 1

914.8344 MHz

Ref -20 dBm

Att 10 dB

*RBW 3 kHz


VBW 10 kHz

SWT 45 ms

Marker 1 [T1]

-39.13 dBm

914.834400000 MHz

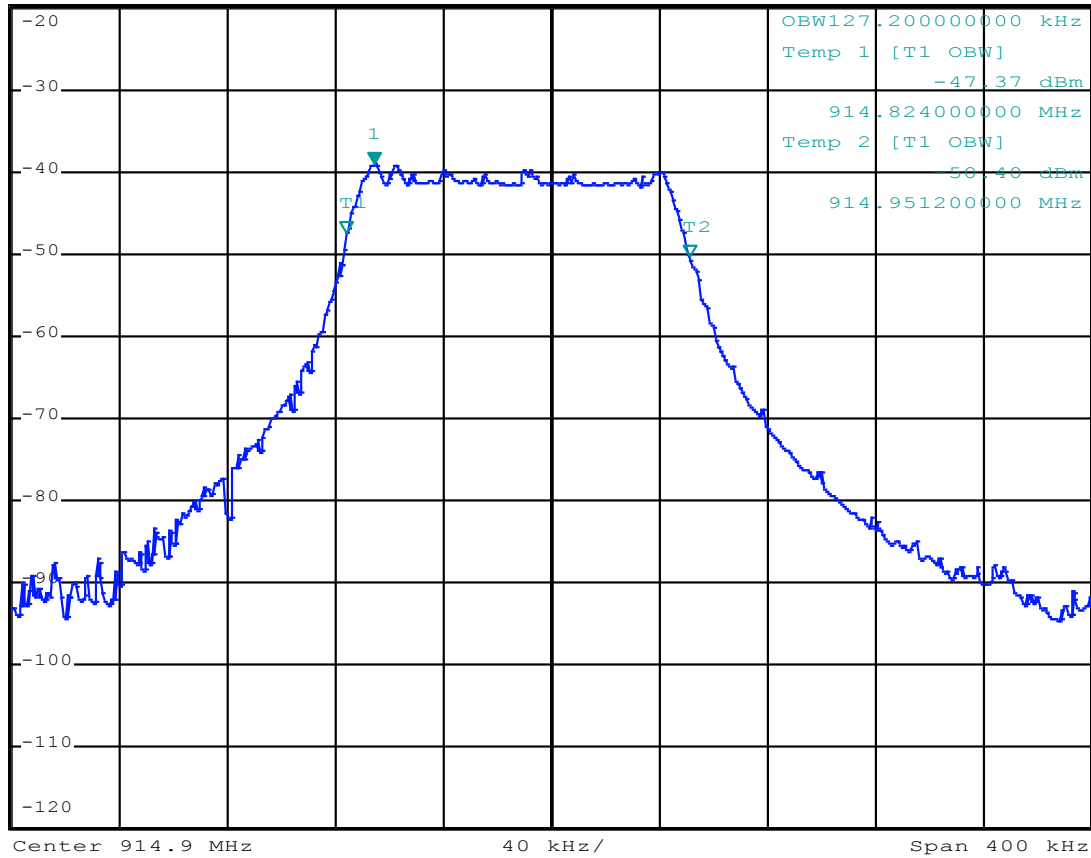1 PK
MAXH


High Channel – SF10


MARKER 1

914.944 MHz

Ref -20 dBm

Att 10 dB

* RBW 3 kHz


VBW 10 kHz

SWT 45 ms

Marker 1 [T1]

-33.13 dBm

914.944000000 MHz

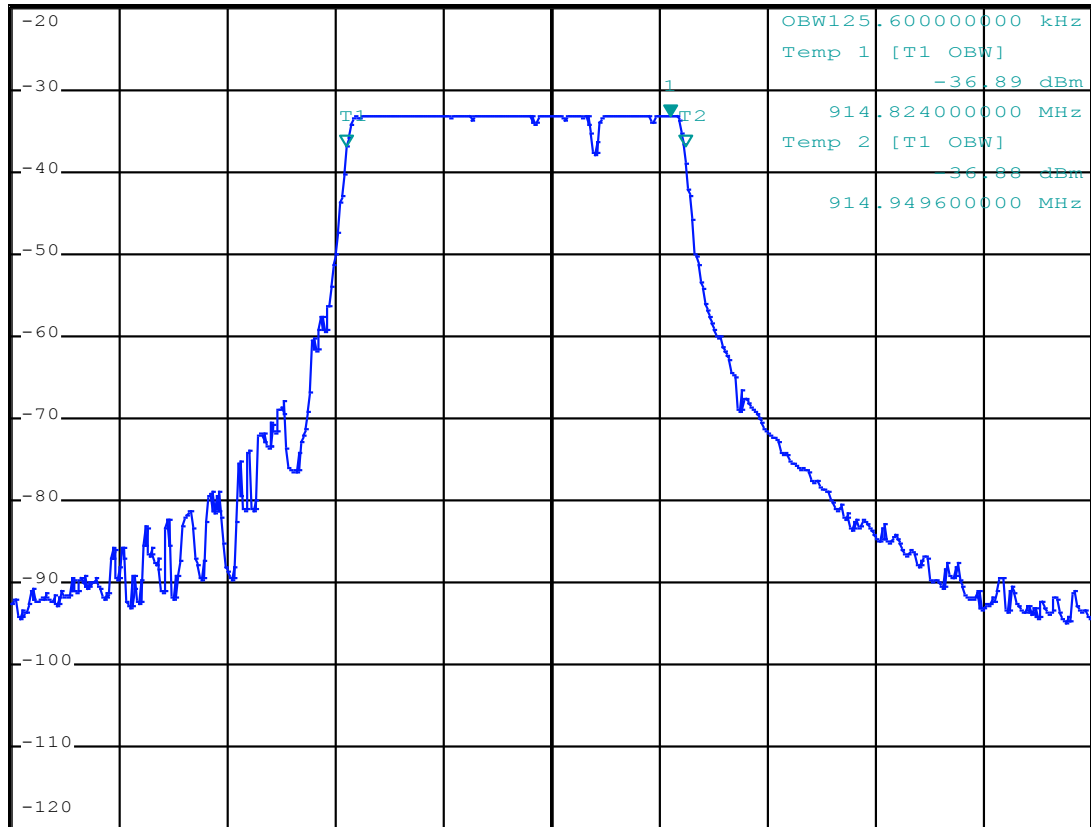1 PK
MAXH


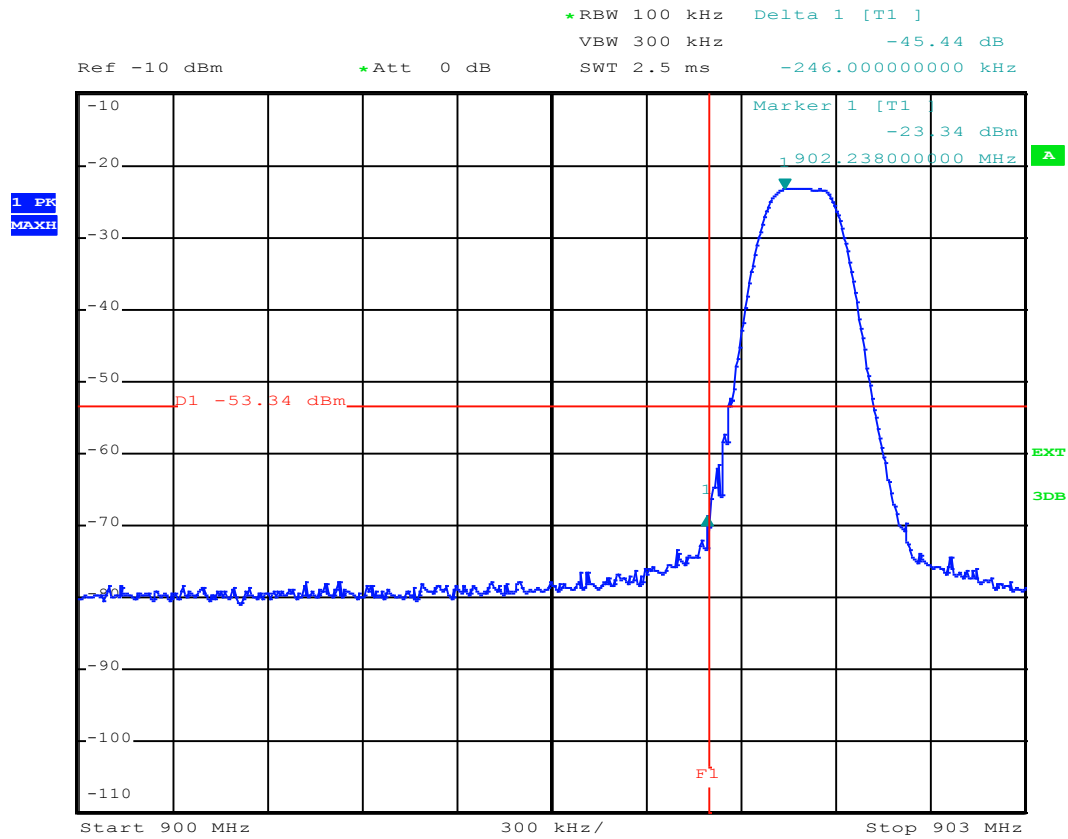
Center 914.9 MHz

40 kHz/


Span 400 kHz

APPENDIX 4: Band edge


Low Channel with hopping mode off – SF7




Low Channel with hopping mode on – SF7

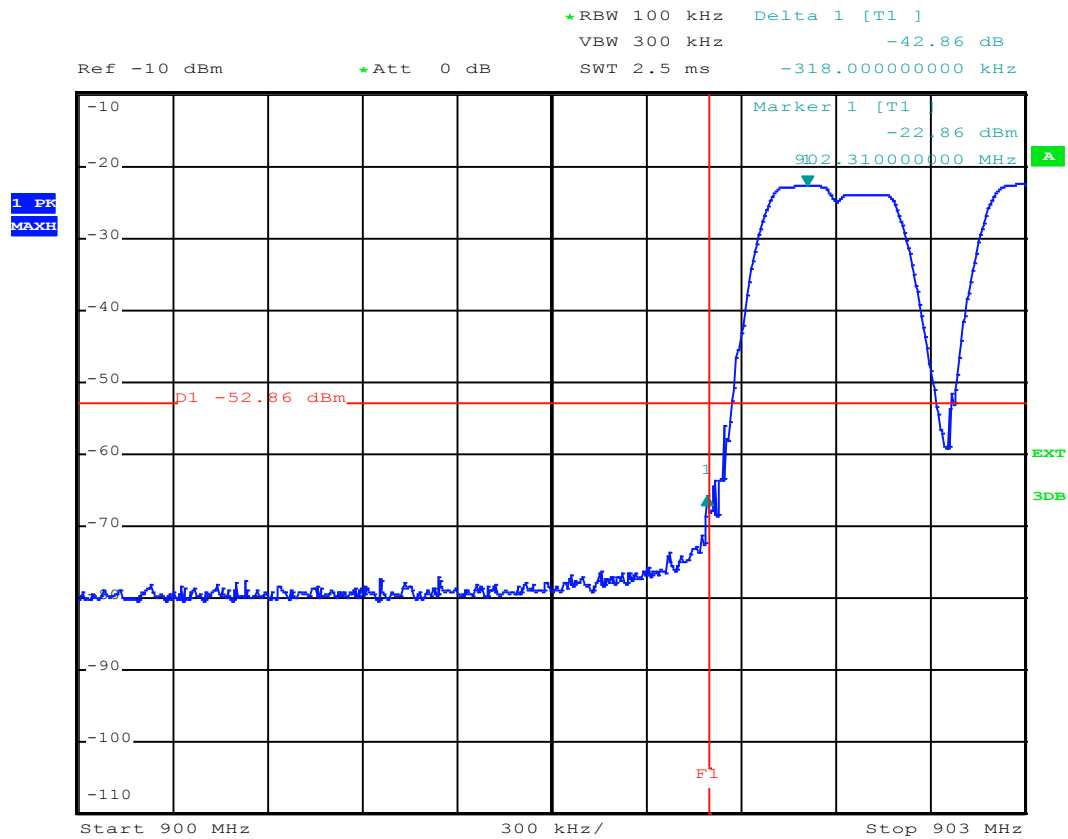


Low Channel with hopping mode off – SF10

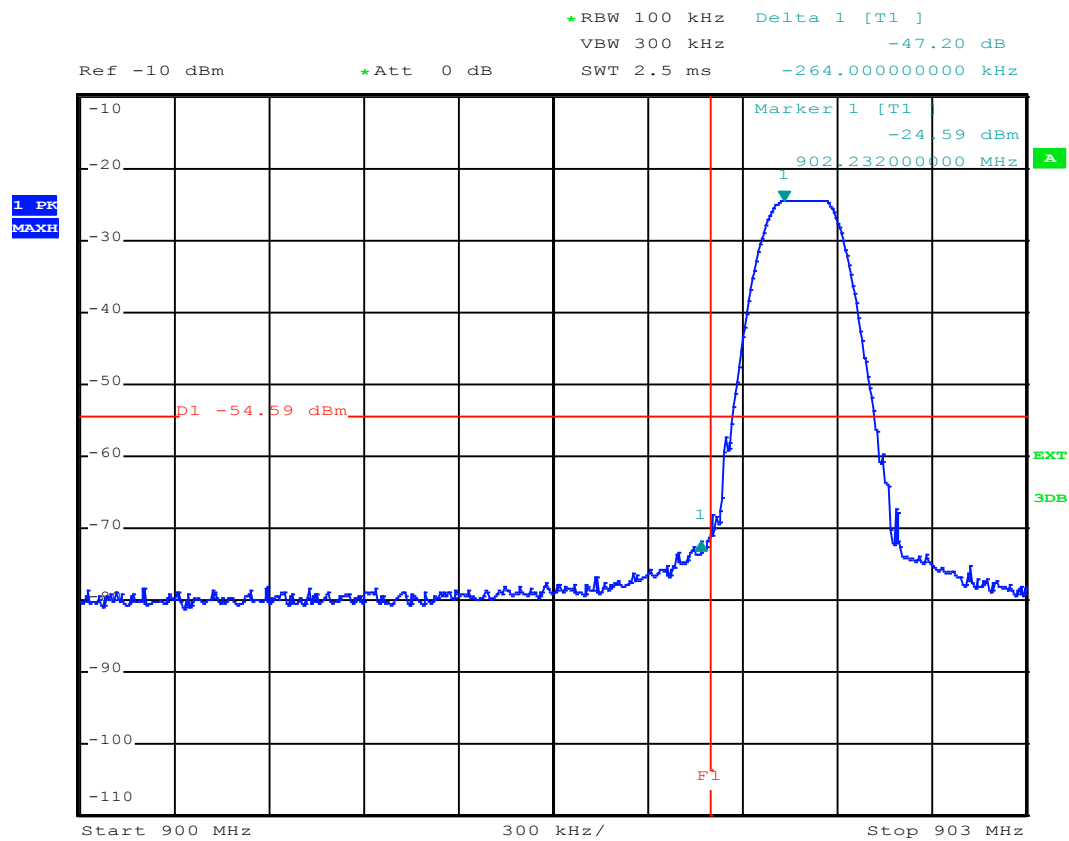


Low Channel with hopping mode on – SF10

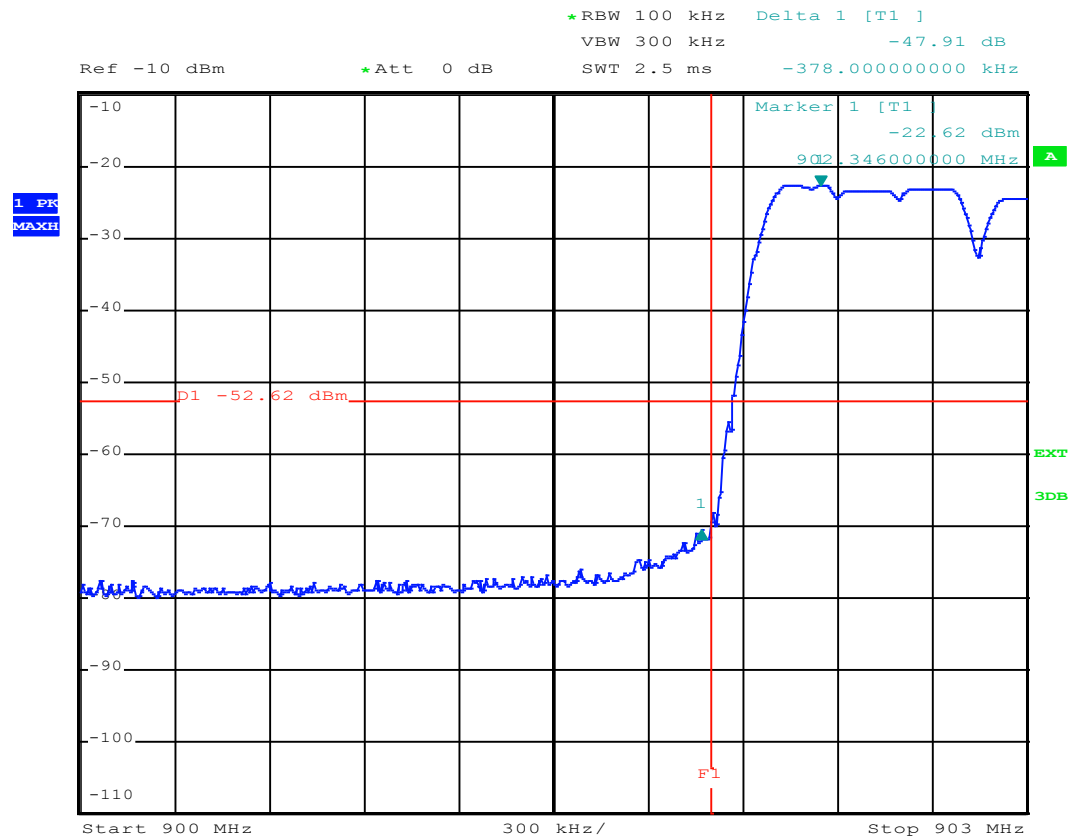


High Channel with hopping mode off – SF7

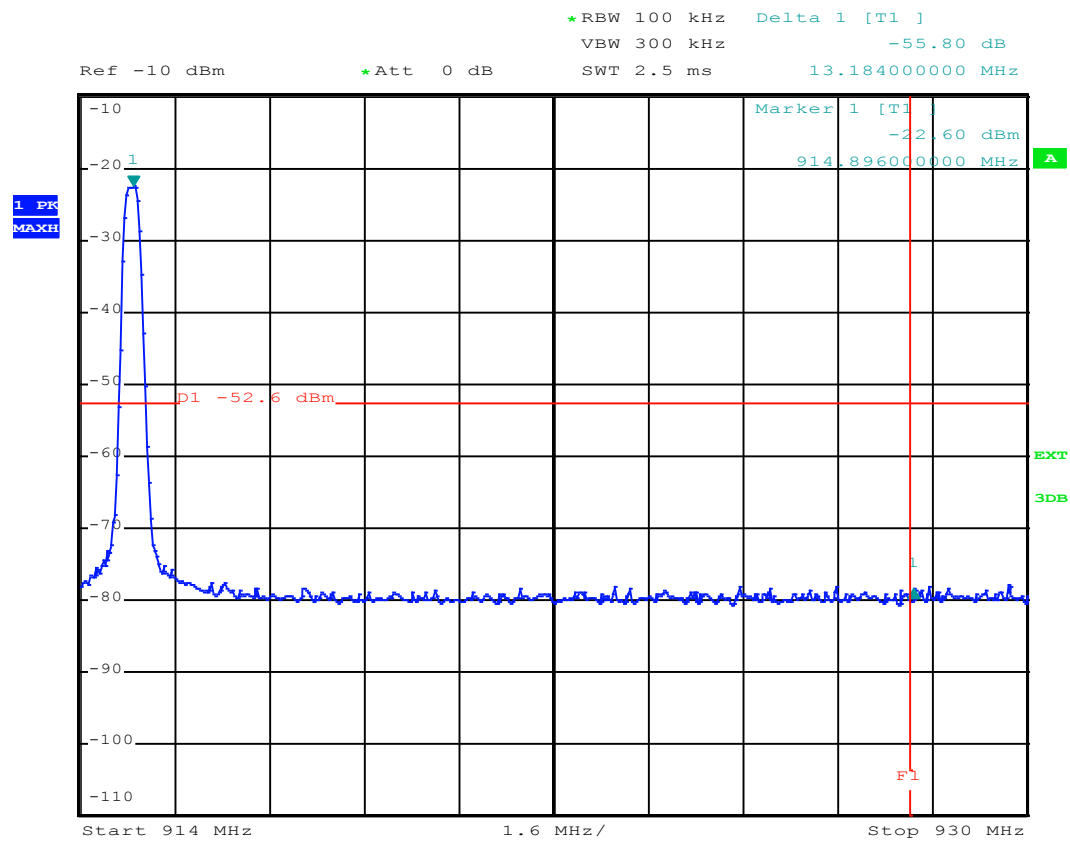


High Channel with hopping mode on – SF7

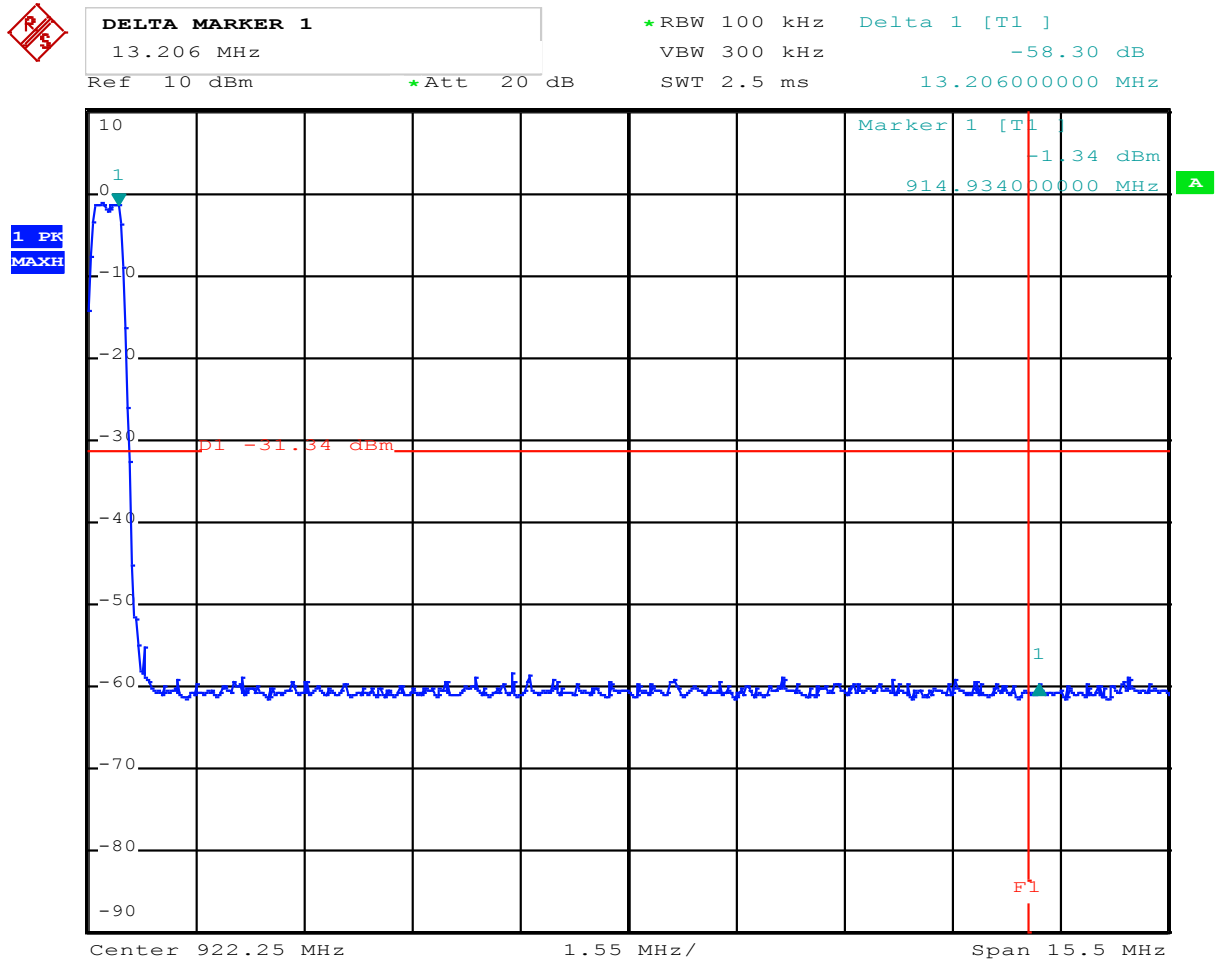

High Channel with hopping mode off – SF10

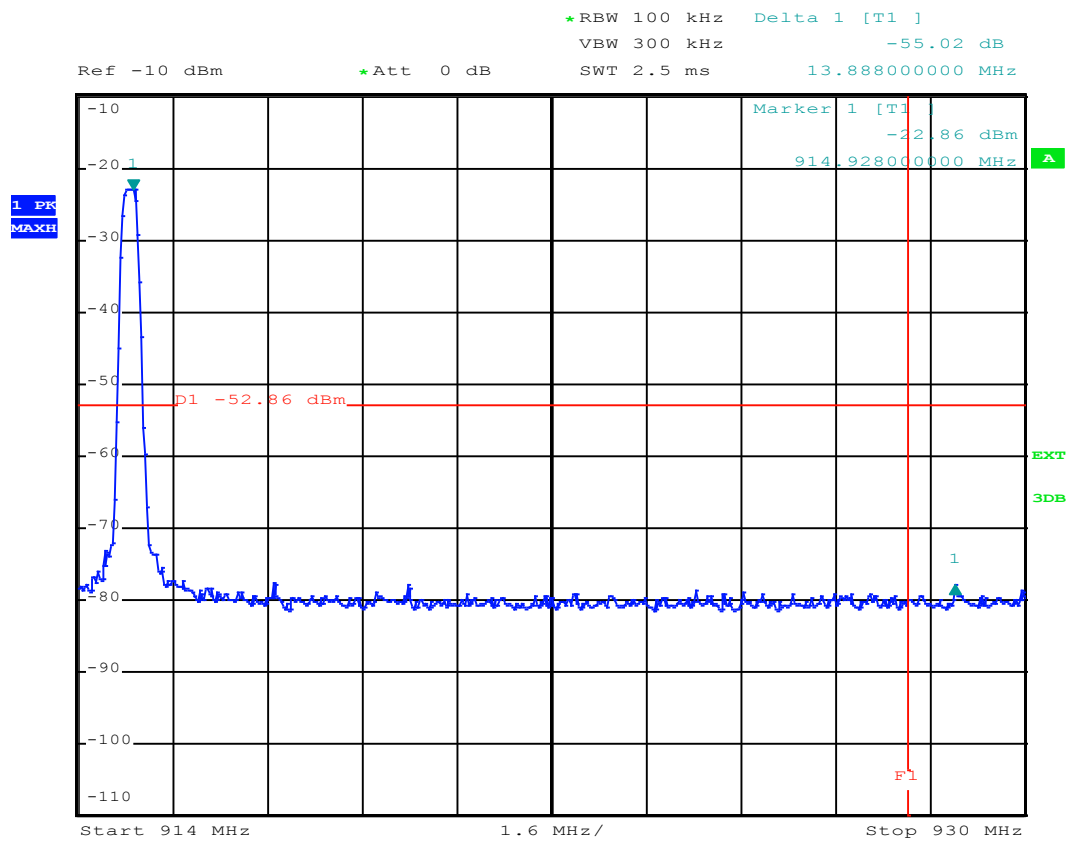



High Channel with hopping mode on – SF10

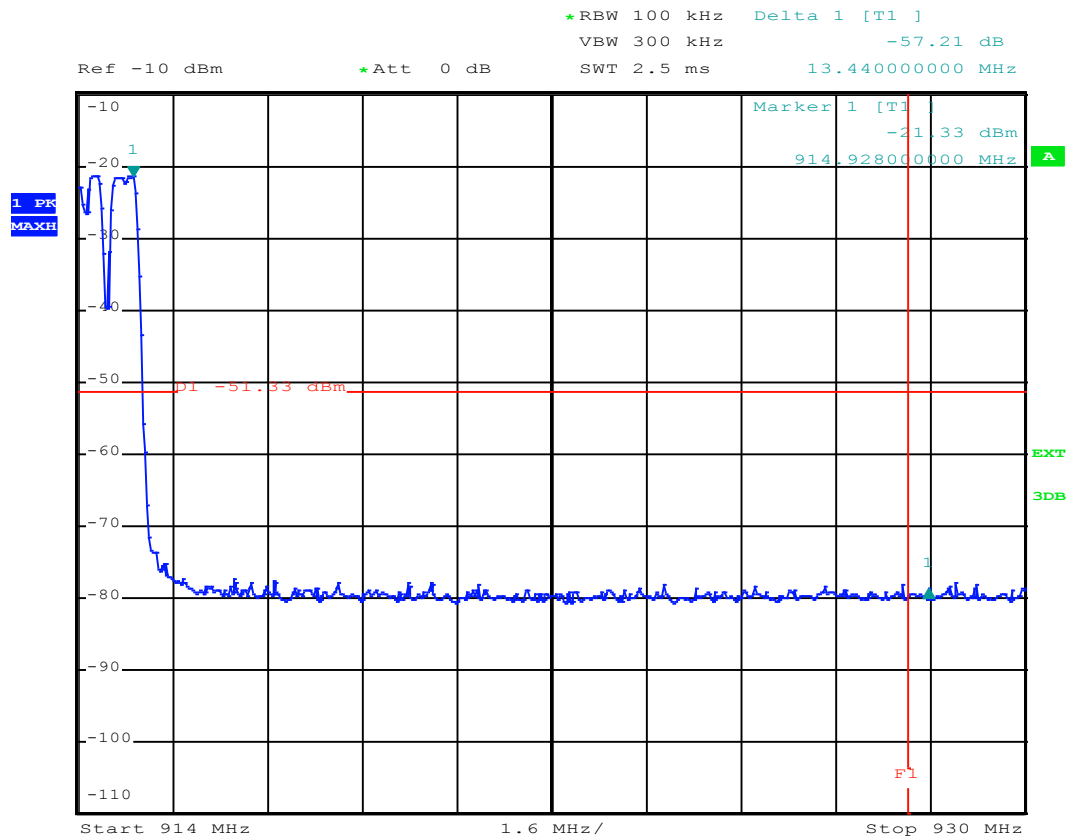


APPENDIX 5: Time of occupancy on any frequency


Low Channel - SF7

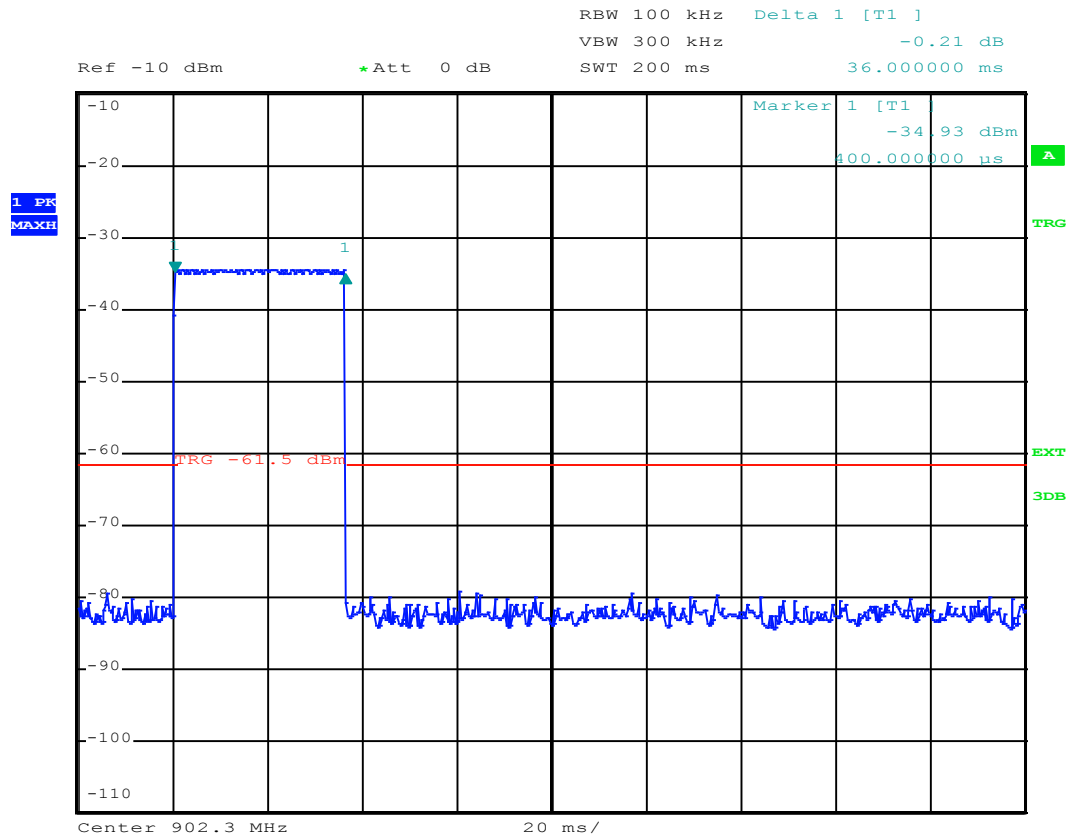

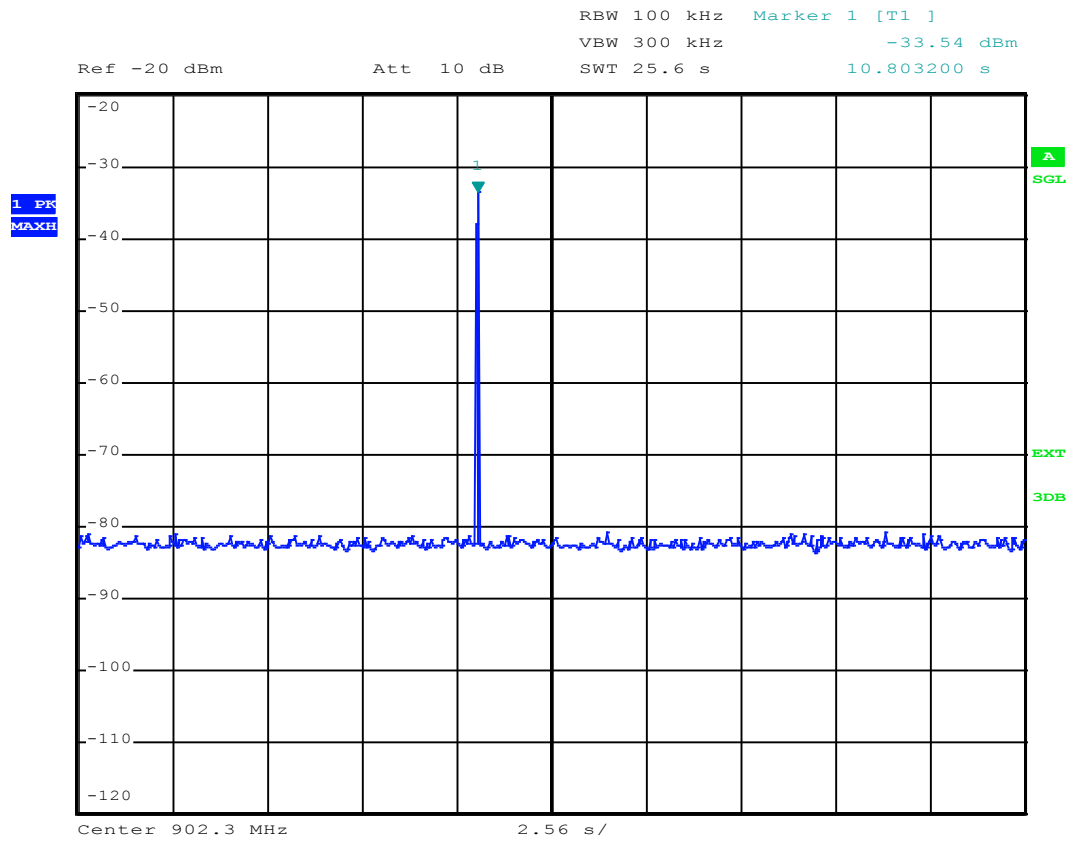



Low Channel – SF10

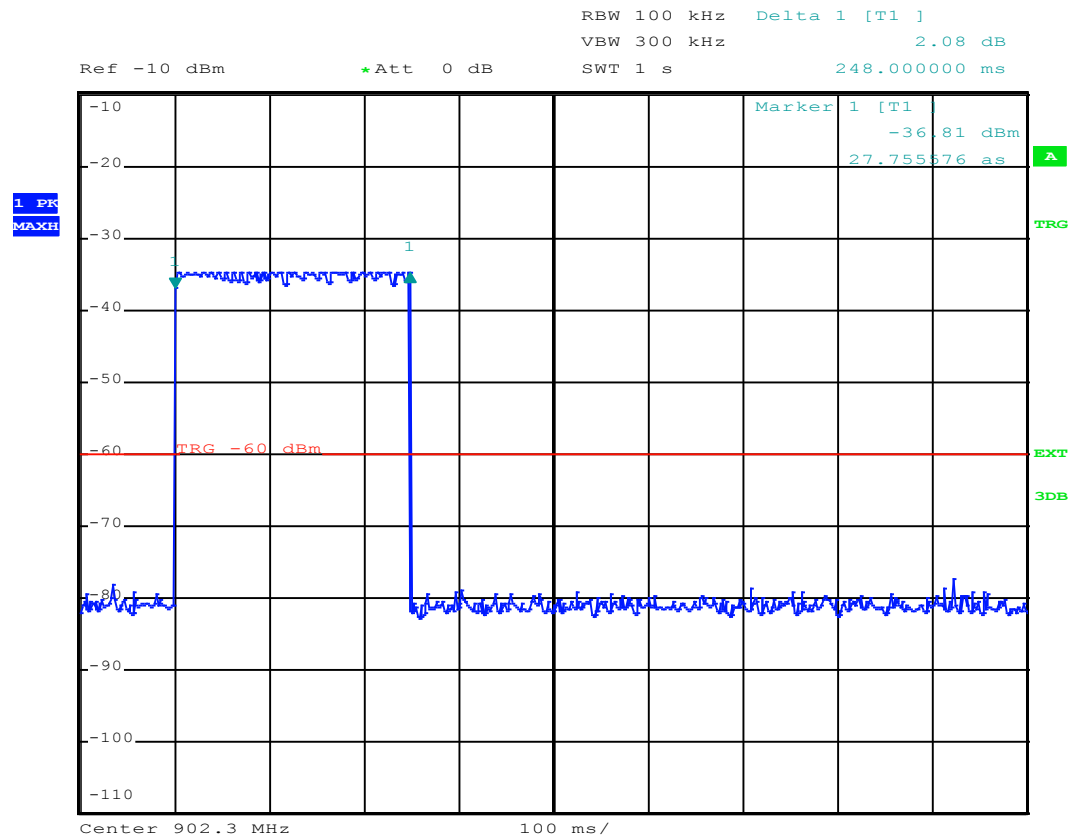

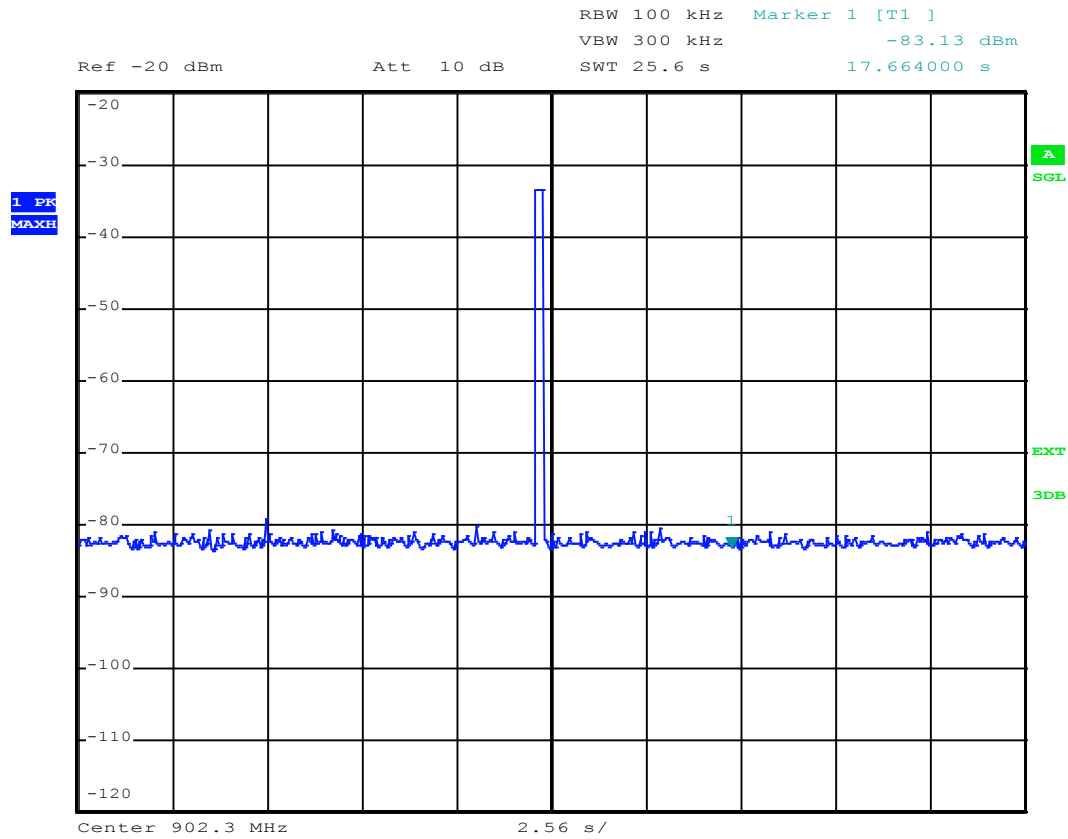



Central Channel – SF7

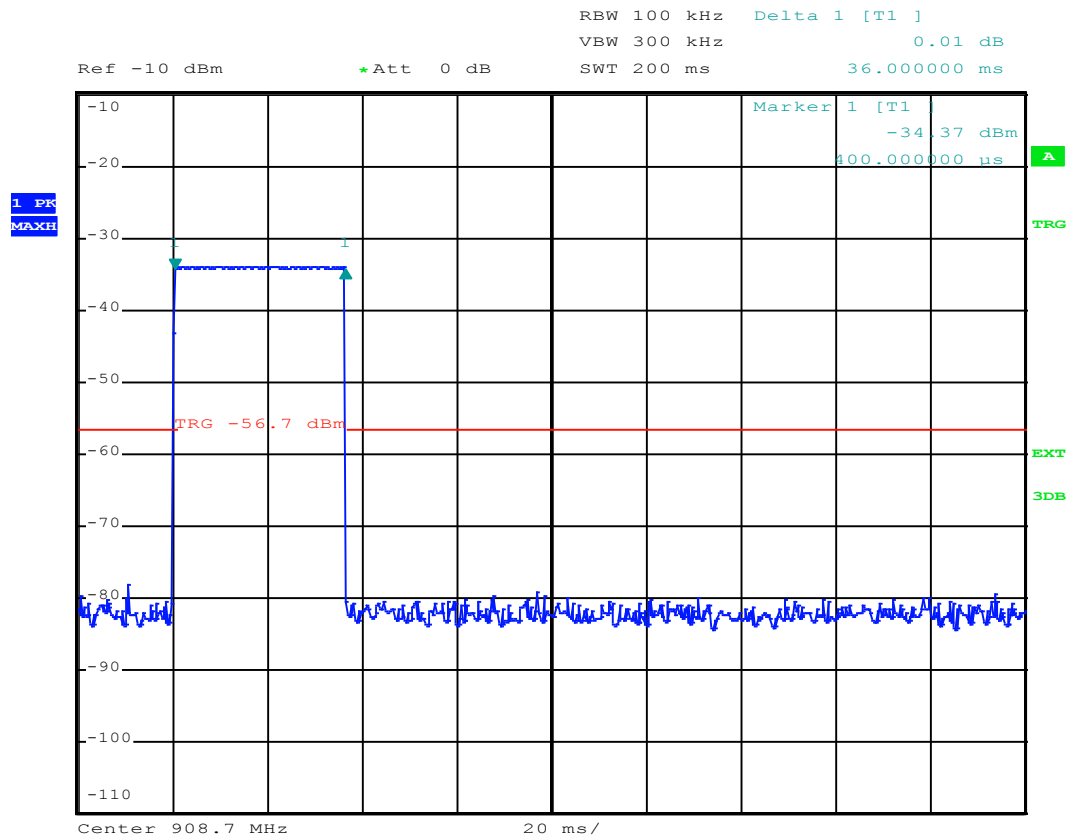

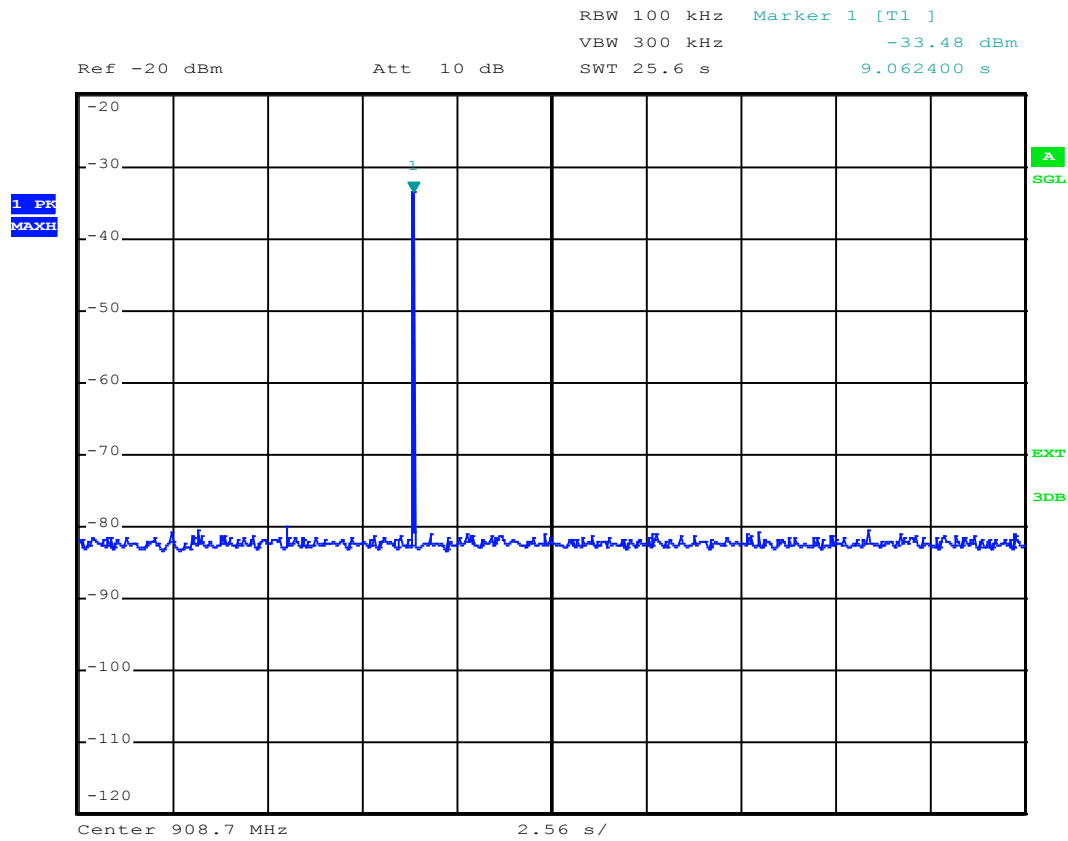



Central Channel – SF10

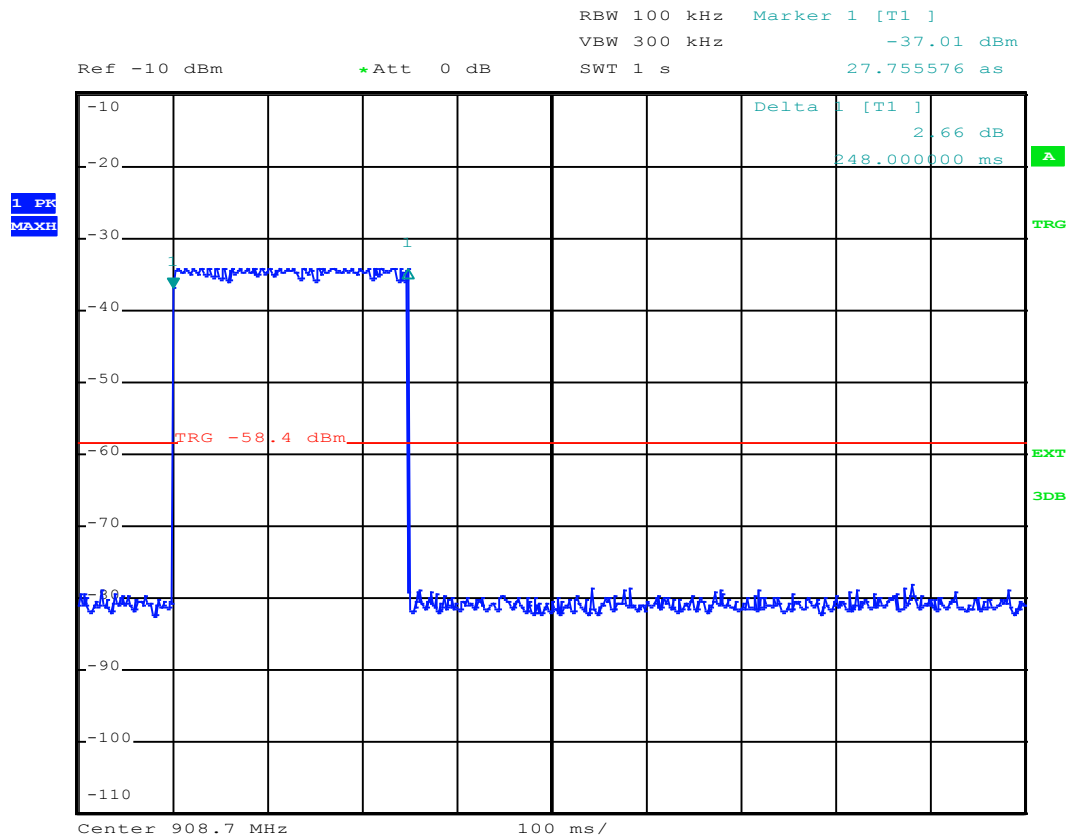

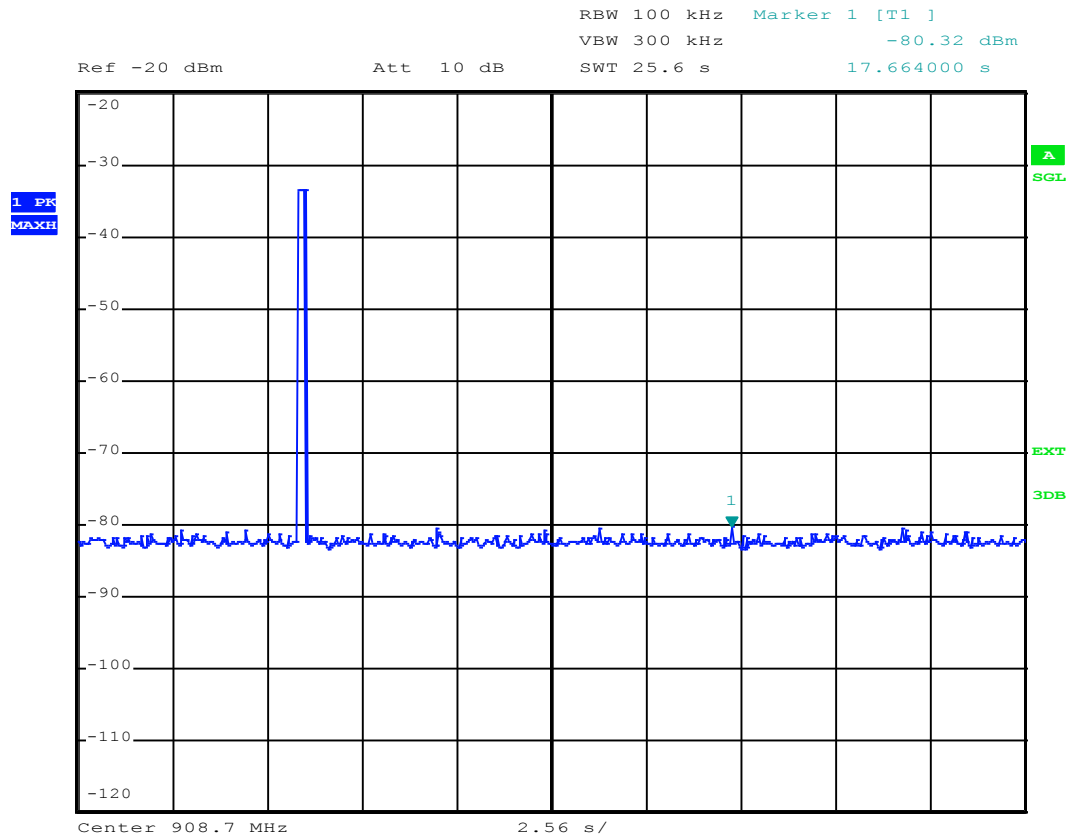



High Channel – SF7

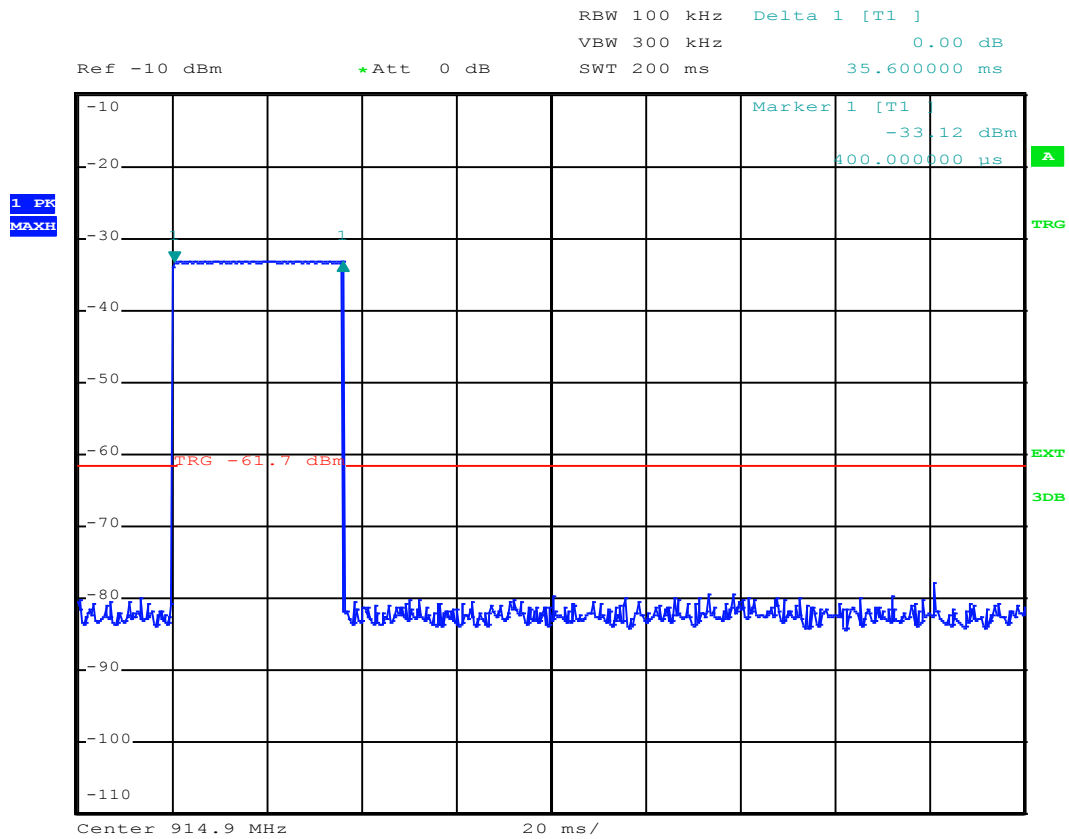

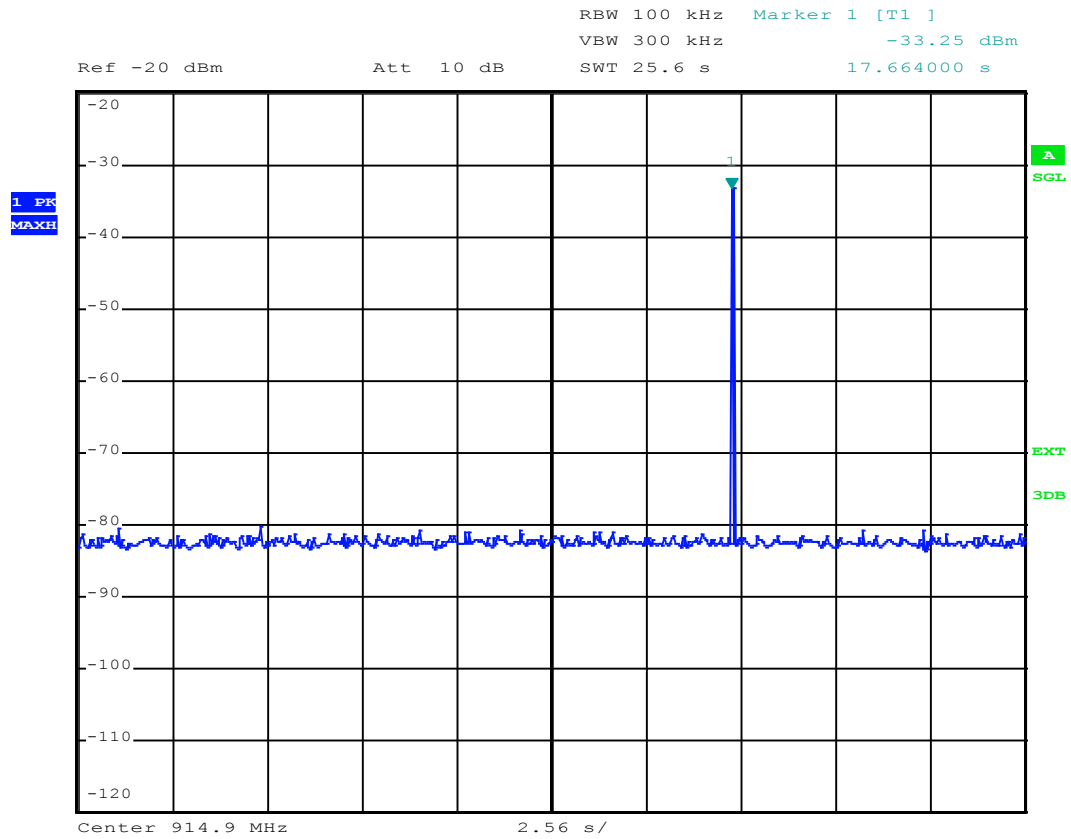


High Channel – SF10

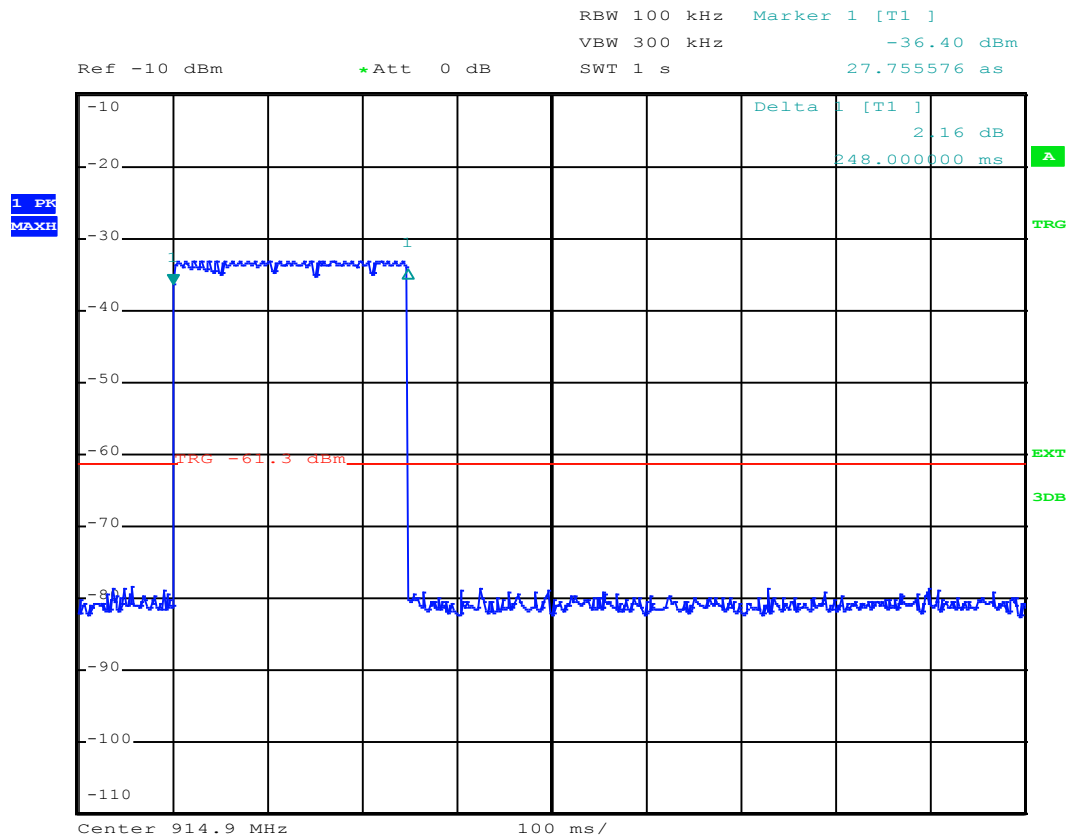

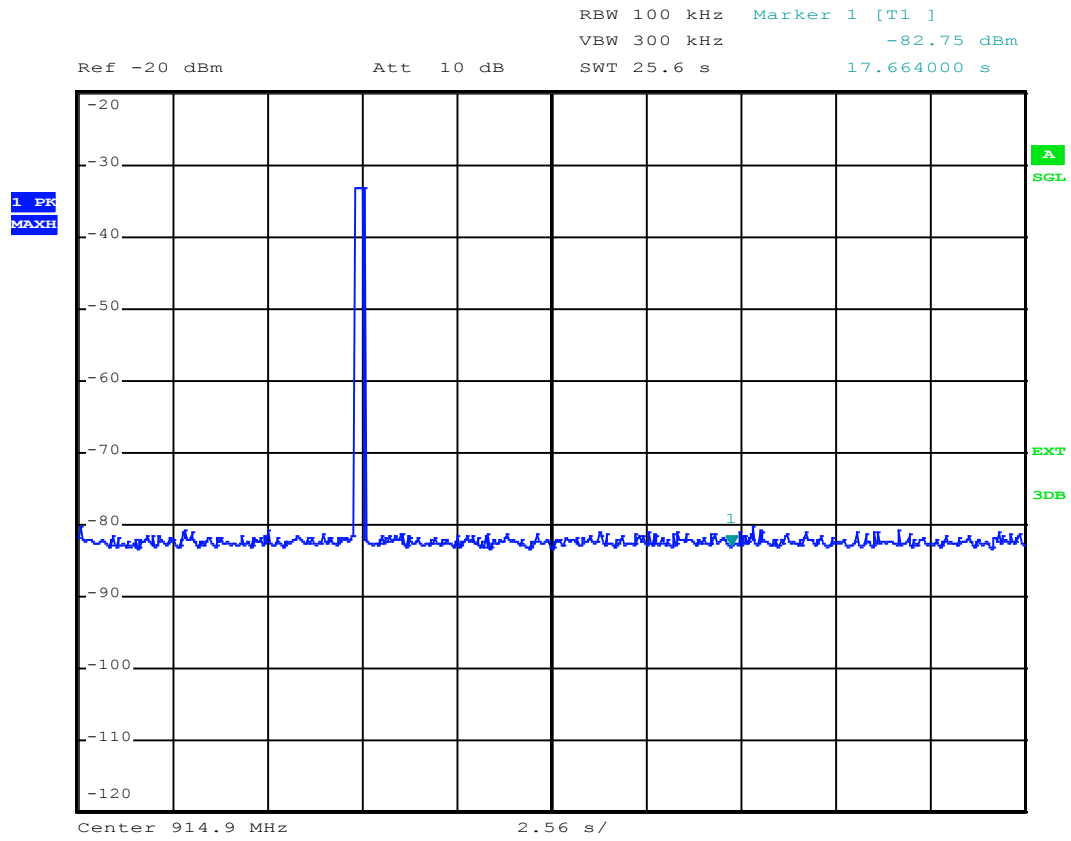


APPENDIX 6: Spectral density


Low Channel – SF7

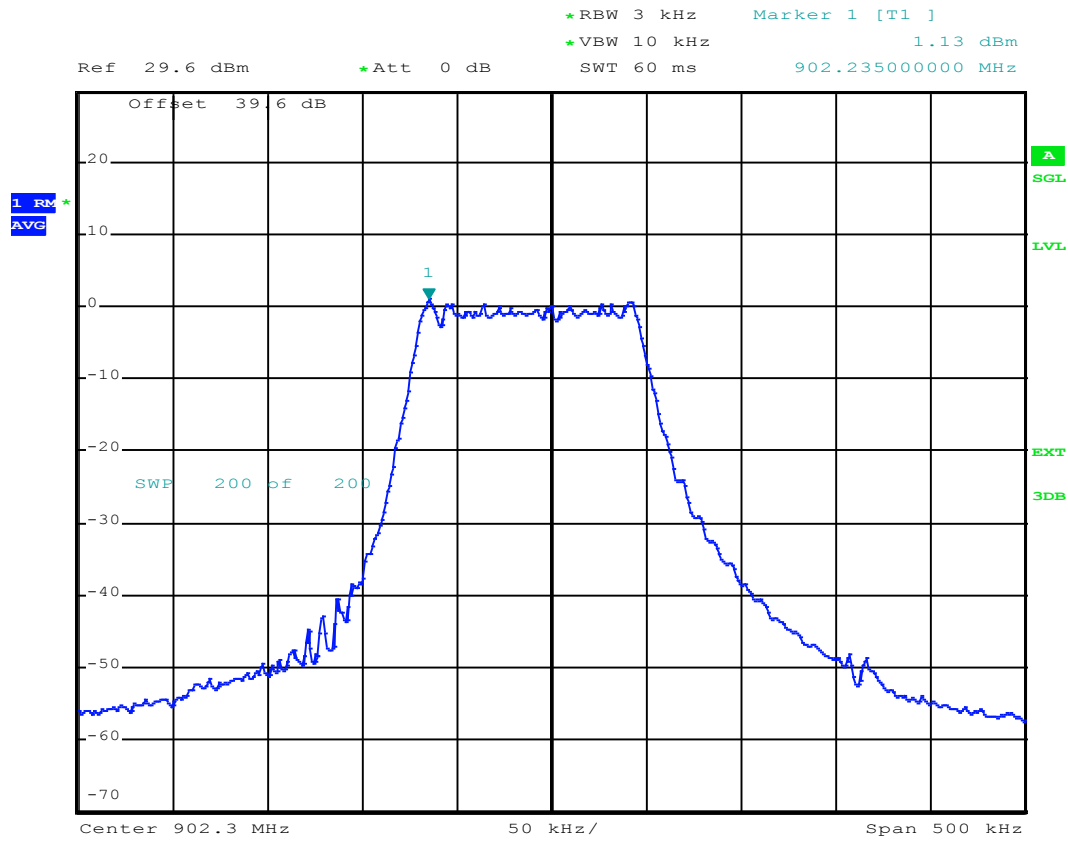


Low Channel – SF10

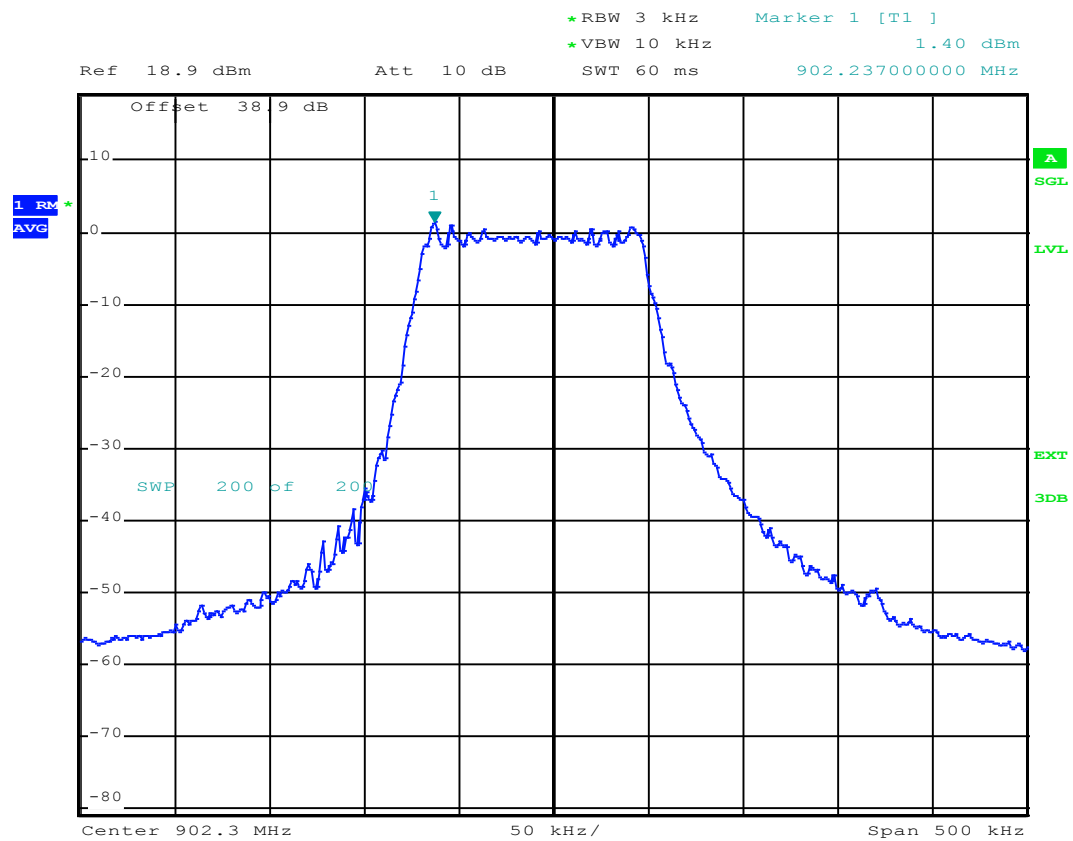


Central Channel – SF7

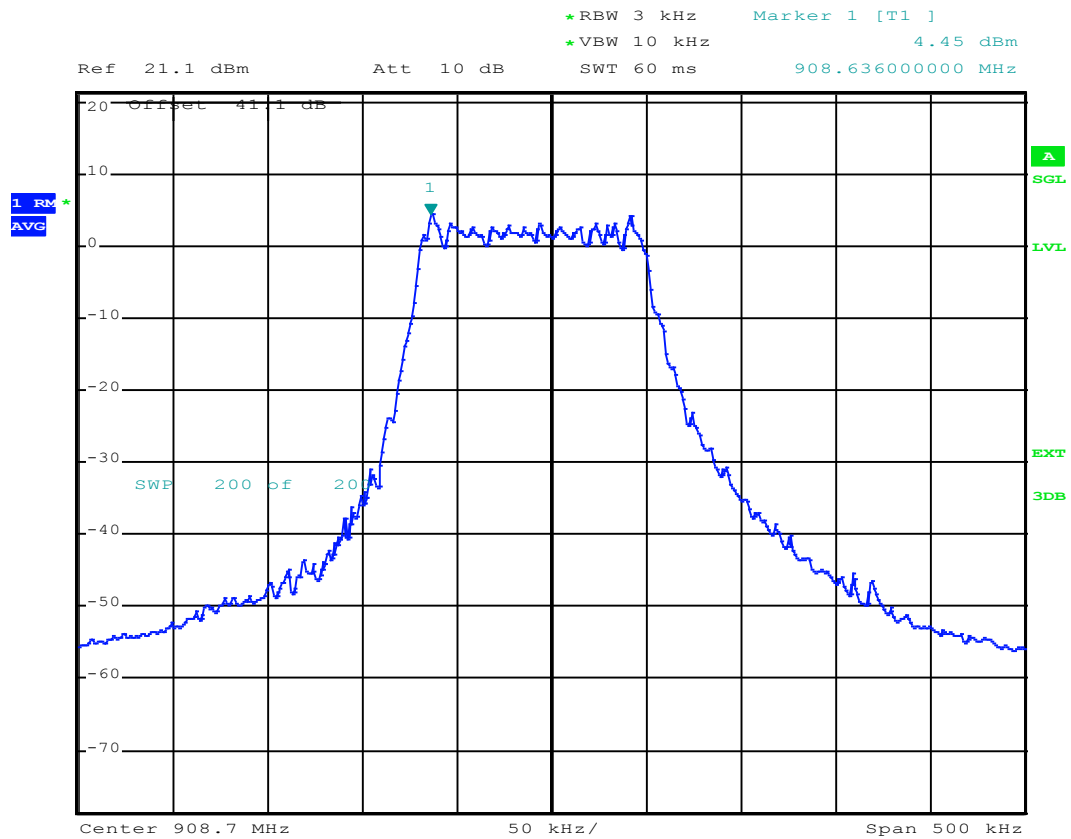

Central Channel – SF10

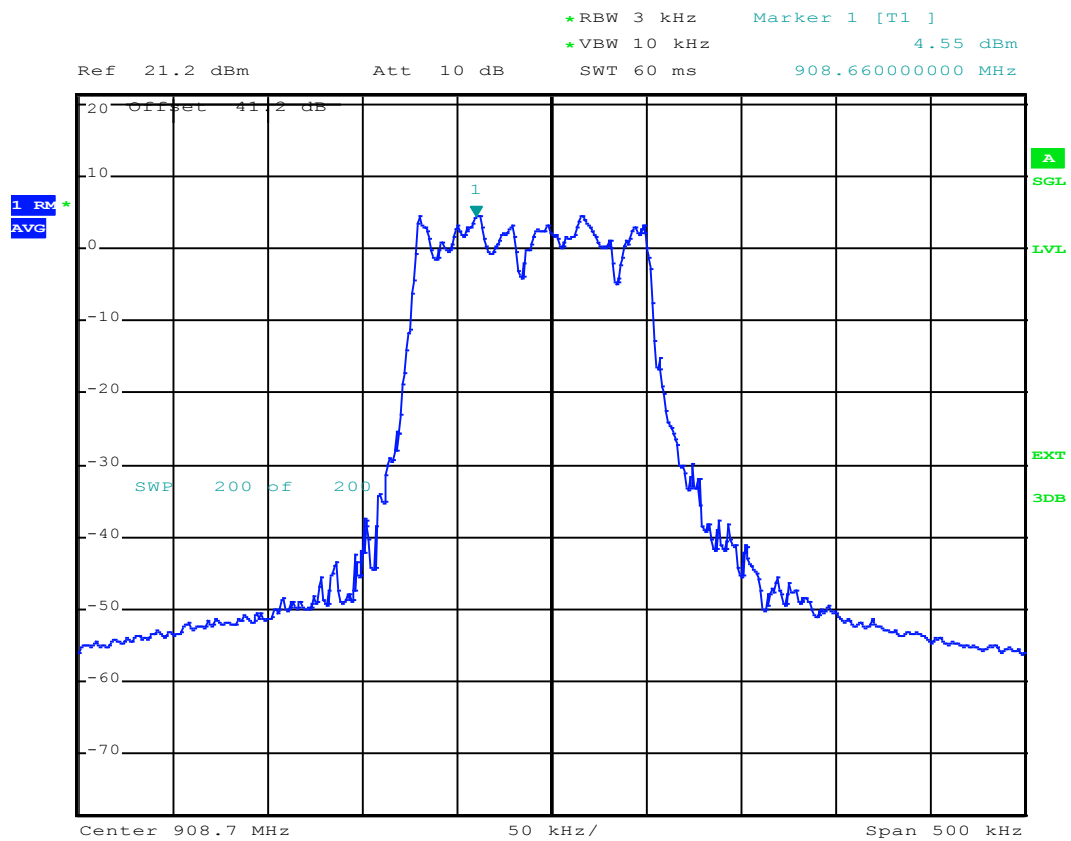

High Channel – SF7

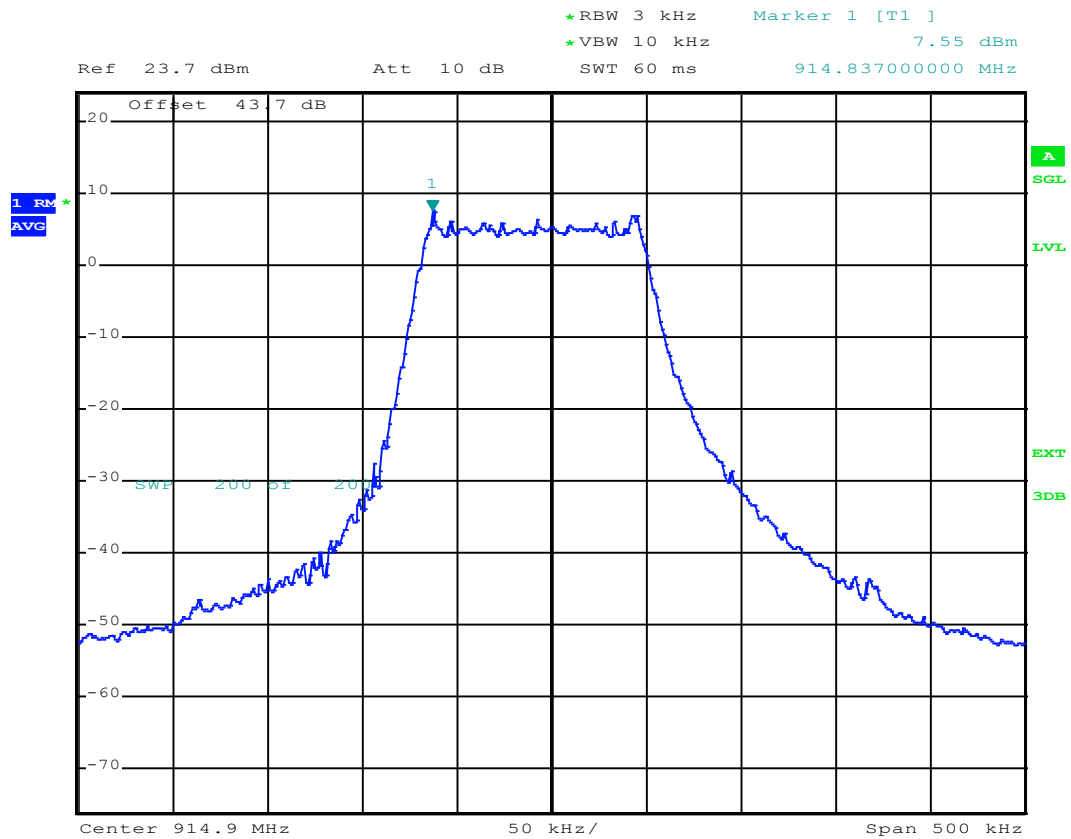

High Channel – SF10

