



FCC TEST REPORT

For
ShenZhen KaiXingHui Technology Co.,Ltd.

Wireless charging Pad

Test Model: F500

Additional Model No.: F500A, F500B, F500C

Prepared for	:	ShenZhen KaiXingHui Technology Co.,Ltd.
Address	:	1-3/F, No.6 Yunfeng Road, Queshan, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China
Prepared by	:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	:	101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China
Tel	:	(+86)755-82591330
Fax	:	(+86)755-82591332
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	March 25, 2022
Number of tested samples	:	2
Serial number	:	220323016A-1, 220323016A-2
Date of Test	:	March 25, 2022 ~ March 28, 2022
Date of Report	:	March 31, 2022



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

FCC TEST REPORT FCC CFR 47 PART 18

Report Reference No. : LCS220323016AEA

Date Of Issue : March 31, 2022

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China

Testing Location/ Procedure : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name : ShenZhen KaiXingHui Technology Co.,Ltd.

Address : 1-3/F, No.6 Yunfeng Road, Queshan, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China

Test Specification

Standard : FCC CFR 47 PART 18

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Wireless charging Pad


Trade Mark : N/A

Test Model : F500

Power Supply : Input: 5V==2A, 9V==2A
Output: 5W/7.5W/10W Max

Result : Positive

Compiled by:



Jin Wang / Administrator

Supervised by:



Cary Luo / Technique principal

Approved by:



Gavin Liang / Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



FCC TEST REPORT

Test Report No. :	LCS220323016AEA	March 31, 2022
		Date of issue

Test Model.....	: F500
EUT.....	: Wireless charging Pad
Applicant.....	: ShenZhen KaiXingHui Technology Co.,Ltd.
Address.....	: 1-3/F, No.6 Yunfeng Road, Queshan, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: ShenZhen KaiXingHui Technology Co.,Ltd.
Address.....	: 1-3/F, No.6 Yunfeng Road, Queshan, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China
Telephone.....	: /
Fax.....	: /
Factory.....	: ShenZhen KaiXingHui Technology Co.,Ltd.
Address.....	: 1-3/F, No.6 Yunfeng Road, Queshan, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	March 31, 2022	Initial Issue	--





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 Description of Device (EUT).....	6
1.2 Support equipment List.....	6
1.3 External I/O Cable	6
1.4 Description of Test Facility	7
1.5 Statement of the Measurement Uncertainty	7
1.6 Measurement Uncertainty	7
1.7 Description of Test Modes.....	8
2. TEST METHODOLOGY.....	9
2.1 EUT Configuration	9
2.2 EUT Exercise	9
2.3 General Test Procedures	9
2.3.1 Conducted Emissions	9
2.3.2 Radiated Emissions	9
3. SYSTEM TEST CONFIGURATION	10
3.1 Justification	10
3.2 EUT Exercise Software.....	10
3.3 Special Accessories.....	10
3.4 Block Diagram/Schematics	10
3.5 Equipment Modifications.....	10
3.6 Test Setup.....	10
4. SUMMARY OF TEST EQUIPMENT	11
5. SUMMARY OF TEST RESULT	12
6. POWER LINE CONDUCTED MEASUREMENT	13
7. RADIATED EMISSION MEASUREMENT	16
7.1. Block Diagram of Test Setup	16
7.2. Radiated Emission Limit.....	17
7.3. EUT Configuration on Measurement.....	17
7.4. Operating Condition of EUT.....	17
7.5. Measuring Setting	17
7.6. Test Procedure	18
7.7. Test Results	19
8. PHOTOGRAPHS OF TEST SETUP	23
9. EXTERNAL PHOTOGRAPHS OF THE EUT	23
10. INTERNAL PHOTOGRAPHS OF THE EUT	23





1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Wireless charging Pad
Test Model : F500
Additional Model No. : F500A, F500B, F500C
Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Power Supply : Input: 5V--2A, 9V--2A
Output: 5W/7.5W/10W Max
Hardware Version : TX-F500-330-V11
Software Version : checksum: 630D
Wireless Charging :
Operating Frequency : 110KHz~205KHz
Modulation Type : Continuous Wave
Antenna Type : Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
OPPO	Adapter	OP52KAUH	--	FCC
Apple	Phone	ipone 11	--	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C Port	1	N/A



1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

Modulation Type: CW (Continuous Wave)

Test Modes		
Mode 1	AC/DC Adapter (9V/2A) + EUT + iPhone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (9V/2A) + EUT + iPhone (Battery Status: <50%)	Pre-tested
Mode 3	AC/DC Adapter (9V/2A) + EUT + iPhone (Battery Status: 100%)	Pre-tested
Mode 4	AC/DC Adapter (5V/2A) + EUT + iPhone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (5V/2A) + EUT + iPhone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (5V/2A) + EUT + iPhone (Battery Status: 100%)	Pre-tested

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

For AC conducted emission, pre-test at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case;

For AC conducted emission, pre-test at both AC charge from power adapter and PC modes, recorded worst case.



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with MP-5, and FCC CFR PART 18.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the charging and compunction mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 18.305 and 18.307 under the FCC Rules Part 18.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in FCC MP-5 for Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in FCC MP-5 for radiated emission.



3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.





4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2021-06-21	2022-06-20
2	SPECTRUM ANALYZER	R&S	FSP40	100503	2021-11-16	2022-11-15
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-21	2022-06-20
4	Positioning Controller	MF	MF7082	MF78020803	2021-06-21	2022-06-20
5	EMI Test Software	AUDIX	E3	/	N/A	N/A
6	EMI Test Receiver	R&S	ESR 7	101181	2021-06-21	2022-06-20
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-07-25	2024-07-24
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-07-25	2024-07-24
9	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-07-01	2024-06-30
10	EMI Test Receiver	R&S	ESPI	101840	2021-06-21	2022-06-20
11	Artificial Mains	R&S	ENV216	101288	2021-06-21	2022-06-20
12	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2021-06-21	2022-06-20





5. SUMMARY OF TEST RESULT

Test Item	FCC Rule No.	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
Radiated Emission	§18.305 (b)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
AC conducted emission	§18.307 (a)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-


Remark: The measurement uncertainty is not included in the test result.

N/A – Not Applicable!!!



6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

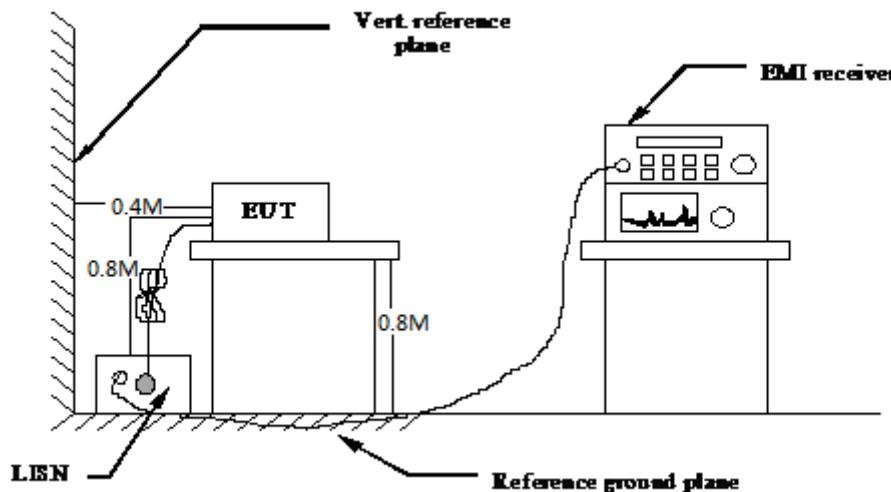

6.2. Standard Applicable

According to §18.307 (b): For all other part 18 consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test Results

PASS


The test data please refer to following page.

Temperature	22.7°C	Humidity	53.7%
Test Engineer	Ling Zhu	Configurations	Transmit



AC Power Line Conducted Emission (@ AC 120V/60Hz (Worst Case))


Line

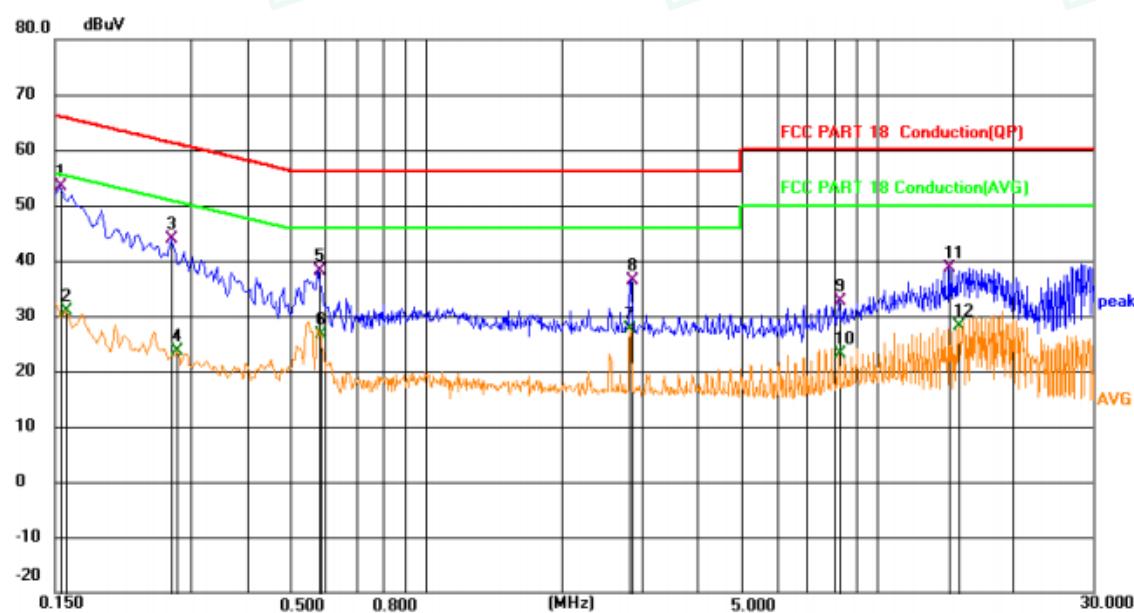

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1546	33.64	19.63	53.27	65.75	-12.48	QP	
2		0.1590	11.32	19.63	30.95	55.52	-24.57	AVG	
3		0.2716	24.32	19.63	43.95	61.07	-17.12	QP	
4		0.2806	4.07	19.63	23.70	50.80	-27.10	AVG	
5		0.5776	18.52	19.66	38.18	56.00	-17.82	QP	
6		0.5821	7.02	19.66	26.68	46.00	-19.32	AVG	
7		2.8321	8.03	19.68	27.71	46.00	-18.29	AVG	
8		2.8411	16.81	19.68	36.49	56.00	-19.51	QP	
9		8.2051	12.80	19.78	32.58	60.00	-27.42	QP	
10		8.2051	3.43	19.78	23.21	50.00	-26.79	AVG	
11		14.3926	18.75	19.86	38.61	60.00	-21.39	QP	
12		15.2026	8.27	19.88	28.15	50.00	-21.85	AVG	



Neutral

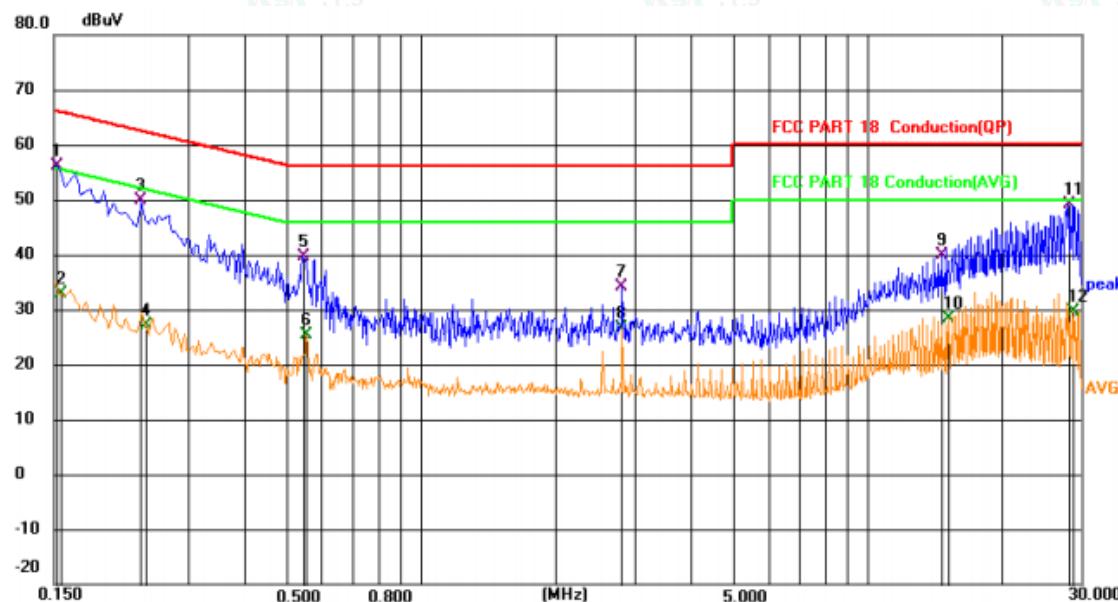

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1516	36.40	19.63	56.03	65.91	-9.88	QP	
2		0.1548	13.24	19.63	32.87	55.74	-22.87	AVG	
3		0.2356	30.14	19.63	49.77	62.25	-12.48	QP	
4		0.2404	7.39	19.63	27.02	52.08	-25.06	AVG	
5		0.5416	19.92	19.65	39.57	56.00	-16.43	QP	
6		0.5506	5.75	19.65	25.40	46.00	-20.60	AVG	
7		2.8231	14.51	19.72	34.23	56.00	-21.77	QP	
8		2.8231	7.03	19.72	26.75	46.00	-19.25	AVG	
9		14.6671	20.00	19.87	39.87	60.00	-20.13	QP	
10		15.2026	8.51	19.88	28.39	50.00	-21.61	AVG	
11		28.1266	29.11	20.07	49.18	60.00	-10.82	QP	
12		28.6666	9.52	20.08	29.60	50.00	-20.40	AVG	




***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit



7. RADIATED EMISSION MEASUREMENT

7.1. Block Diagram of Test Setup

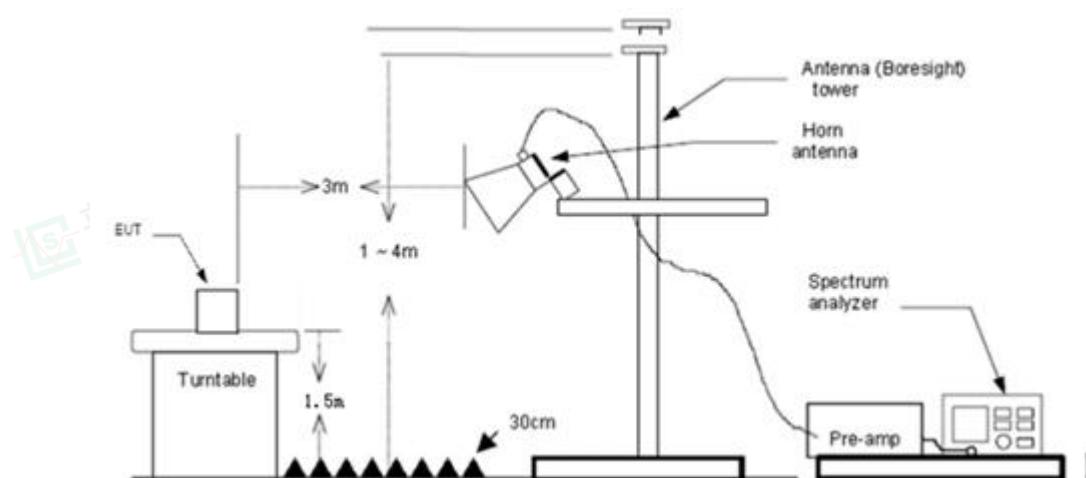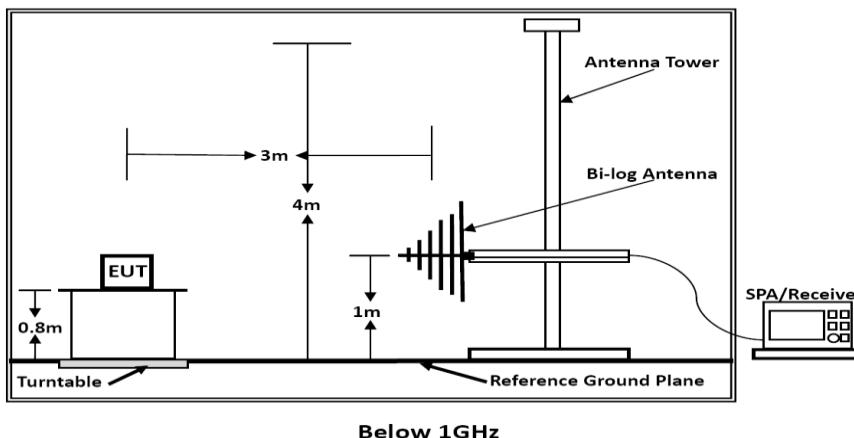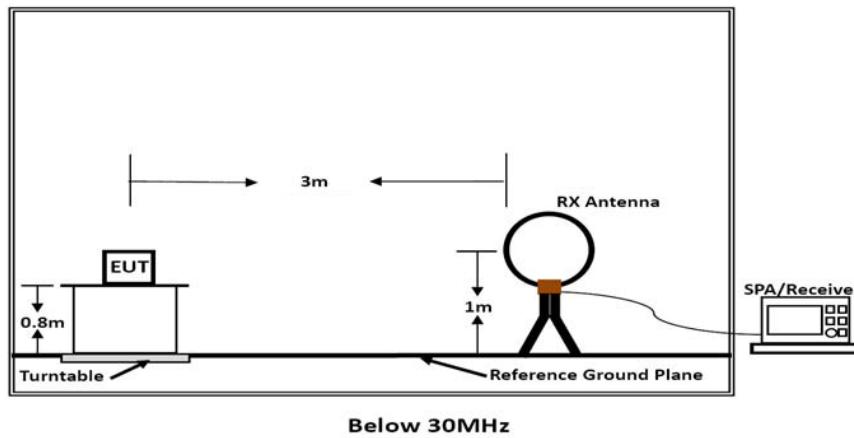

7.2. Radiated Emission Limit

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Frequency MHz	Distance Meters	Field Strengths Limit	
		dB μ V/m	Remark
0.009~30MHz	3	103.5	Quasi-peak
30~88	3	40.0	Quasi-peak
88~216	3	43.5	Quasi-peak
216~960	3	46.0	Quasi-peak
960~1000	3	54.0	Quasi-peak

Remark:

- (1) Emission level dB μ V/m for 0.009~30MHz = $20\log(25) + 40\log(300/3)$ dB μ V/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

- (1) Setup the EUT as shown in Section 4.1.
- (2) Let the EUT work in worst test mode (Mode 1) and measure it.

7.5. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP



7.6. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



2) Sequence of testing 30 MHz to 1 GHz (Not required)

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.7. Test Results

PASS.


Only report the worst test data (Mode 1) in test report;

The test data please refer to following page:

Temperature	23.6°C	Humidity	52.2%
Test Engineer	Ling Zhu	Configurations	Transmit



0.009 MHz – 30 MHz

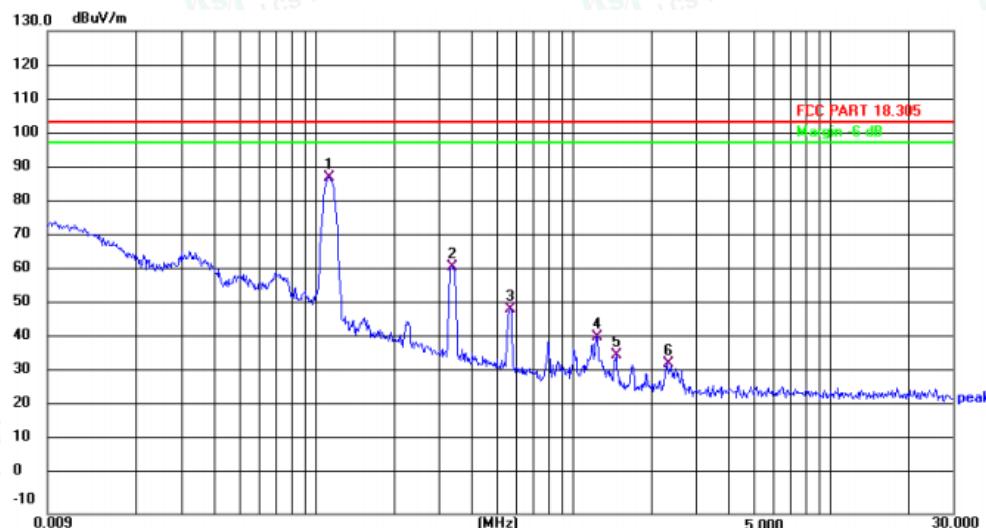


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1113	96.80	-9.41	87.39	103.50	-16.11	QP
2	0.3379	70.54	-8.83	61.71	103.50	-41.79	QP
3	0.5681	57.73	-8.35	49.38	103.50	-54.12	QP
4	1.2377	48.09	-6.79	41.30	103.50	-62.20	QP
5	1.4676	42.27	-6.37	35.90	103.50	-67.60	QP
6	2.3303	38.18	-4.73	33.45	103.50	-70.05	QP

Remark: Measured at antenna position 0 degree and 90 degree, recorded worst case at 90 degree.

Margin=Reading level + Factor- Limit.

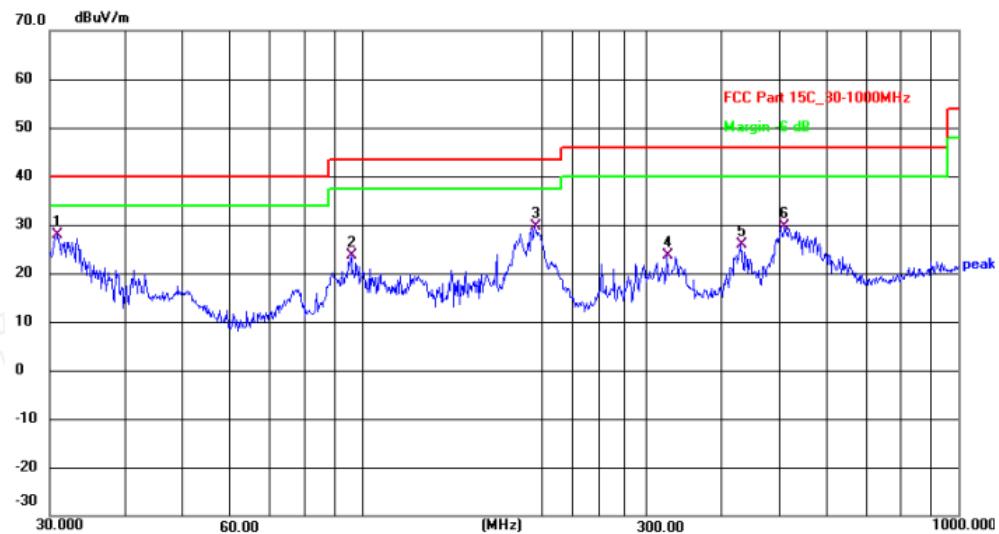


**Below 1GHz***Horizontal*

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.8535	46.22	-18.34	27.88	40.00	-12.12	QP
2	96.0986	41.97	-18.45	23.52	43.50	-19.98	QP
3	195.1365	46.94	-17.36	29.58	43.50	-13.92	QP
4	324.4561	37.88	-14.22	23.66	46.00	-22.34	QP
5	432.5457	39.70	-13.78	25.92	46.00	-20.08	QP
6	511.8352	42.69	-12.96	29.73	46.00	-16.27	QP



Vertical

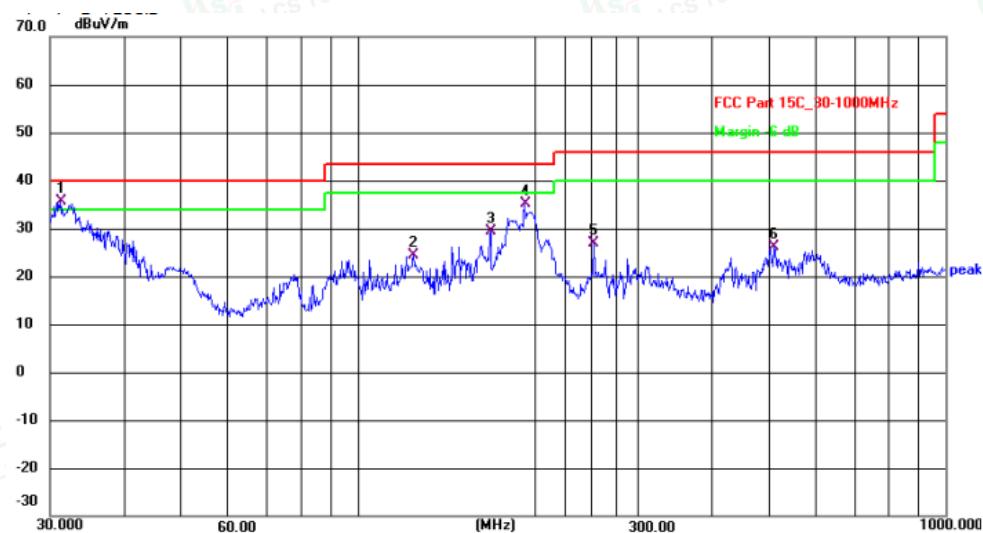

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.1798	53.87	-18.30	35.57	40.00	-4.43	QP
2	124.5690	44.51	-20.23	24.28	43.50	-19.22	QP
3	168.4138	48.97	-19.56	29.41	43.50	-14.09	QP
4	192.4186	53.22	-18.11	35.11	43.50	-8.39	QP
5	252.0627	42.44	-15.58	26.86	46.00	-19.14	QP
6	511.8352	39.05	-12.96	26.09	46.00	-19.91	QP

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Margin=Reading level + Factor- Limit



8. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

9. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

10. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----

