Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

SPECIFICATION FOR APPROVAL



Customer Name	SHENZHEN SAMOON TECHNOLOGY CO.,LTD				
Product name	WIFI antenna/YY-20241121-01/2.4GHz/wire diameter 0.81mm/coaxial cable length 53.2mm/with 4th generation original terminal/PICO2 project specific/Yang Yue/ROHS				
Product number	/				
Prepared By	Tony-Men				
Checked By					
Approved By					
Apply Date	November 21st, 2024				

CUSTOMER SIGNATURE							
Prepared By Checked By Approved By							
PLEASE RETURN TO US ONE COPY OF SPECIFICATION FOR APPROVAL WITH YOUR APPROVED SIGNATURES.							

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

频率范围 Frequency range	2400 ~ 2500 MHz		
增益 Gain	2.34dBi/MAX@2400 ~ 2500 MHz		
驻波比系数 VSWR	<2.1		
输入阻抗 Input Impedance	50±5 (Ω)		
极化方式 Polarization	Vertical polarization+horizontal polarization		
天线类型(Antenna type)	2.4 GHz FPC antenna		

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Revision History

Date	Revision	Description of Changes
2024-11-21	RA	Measured with 2.4GHz Antenna sample.

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the 2.4GHz Antenna program. We test the antenna with the latest version handset. And it seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Gain & Radiation Patterns

The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 300 MHz through 3 GHz and an 18" diameter spherical quite zone. The measurement results are calibrated using both dipole and leaky wave horn standards.


4.1.3 Matching Circuit Description


No changed..


Shenzhen Yangyue Electronic Communication Technology Co., Ltd


Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

5. Antenna - Radiation Pattern Test Data

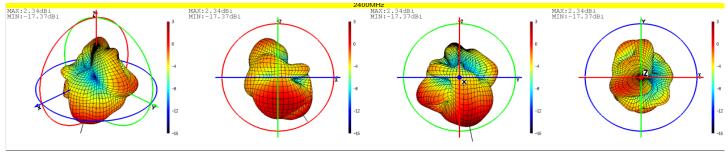

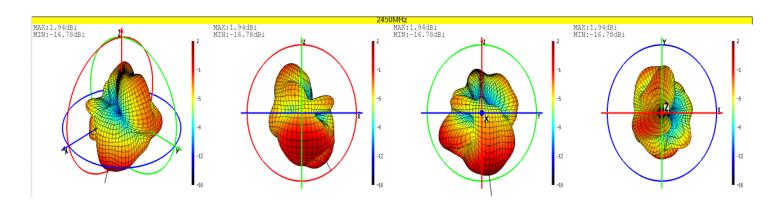

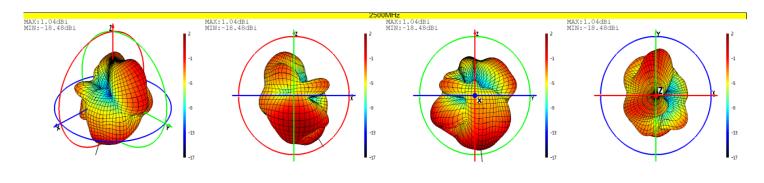

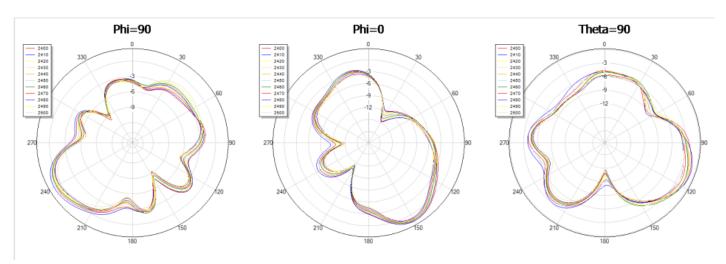

Shenzhen Yangyue Electronic Communication Technology Co., Ltd

Address: 6th Floor, Building A, Chuangfu Yingying Industrial Park (Zone), No.2 Pujiang Road, Daning Community, Humen Town, Dongguan City

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	2.34	2.32	2.03	1.59	1.79	1.94	1.90	1.52	1.22	1.03	1.04
Efficiency (%)	48.34	48.09	47.51	45.47	45.76	46.75	46.73	45.06	44.01	43.53	43.12

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.


6.Plots

VSWR

Note: Standard value of standing wave coefficient

Note: Standard value of return loss


Note: Smith chart

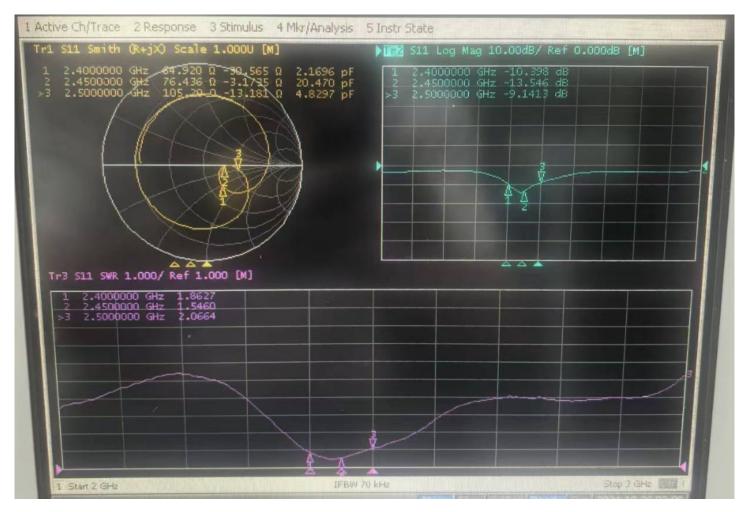

No.	VSWR	Return Loss
1	1.8627	-10. 398
2	1. 546	-13. 546
3	2.0664	-9. 1413

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Mechanical drawing 6.

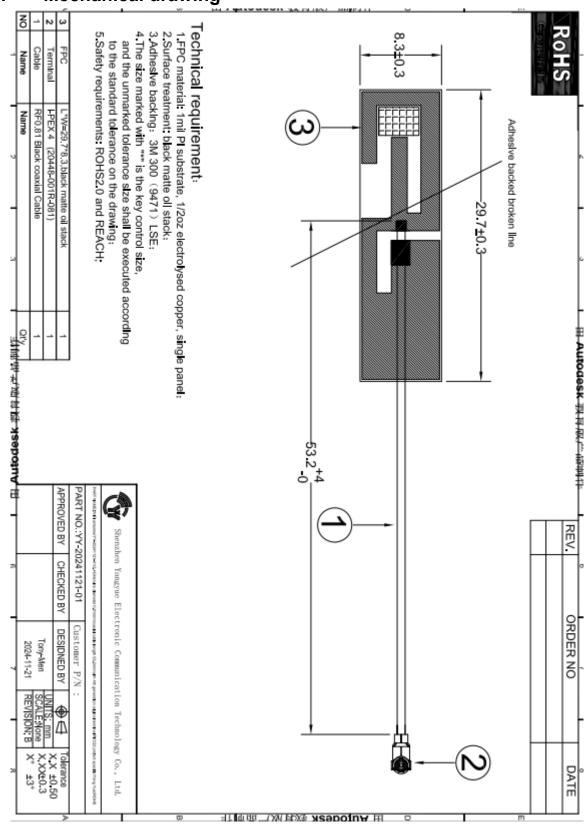

Shenzhen Yangyue Electronic Communication Technology Co., Ltd

Address: 6th Floor, Building A, Chuangfu Yingying Industrial Park (Zone), No.2 Pujiang Road, Daning Community, Humen Town, Dongguan City

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

7 Reliability tests

7.1 Test content

No	试验项目	试验方法	判定基准		
	Test item	Test method	Criterion		
1	盐水喷雾试验 Salt water spray test	把盐浓度 5%的溶液喷雾 24HR Spray the solution with salt concentration of 5% for 24HR.	不能有变色,歪(变形)脱落 等的缺点 腐蚀面积不能过大 There should be no discoloration, slanting (deformation) and falling off, and the corrosion area should		
			not be too large.		

7.2 Test results

NO	样品数 Sample number	试验期间 Testing time	实验结果 Result	备注 Remarks
1	10	24HR	OK	技术等级为 9 级 腐蚀<0.4mm The technical level is 9. Corrosion < 0.4mm

8 Conclusion

以上数据表明此 2.4GHz 天线参数均已达标。性能以装机后的实际使用效果为准。

The above data show that the parameters of this 2.4GHz antenna have reached the standard. The performance is subject to the actual use effect after installation.

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen Yangyue Electronic Communication Technology Co., Ltd, look forward to your confirmation, thank you for your cooperation!

Shenzhen Yangyue Electronic Communication Technology Co., Ltd