

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
DECT Module

ISSUED TO
DSP Group Ltd.

5 SHenkar Street., Herzliza Israel 4672505



Tested by: *Hui Chao*

Hui Chao
(Engineer)

Date: *May 15, 2018*

Approved by: *Wei Yanquan*

Wei Yanquan
(Chief Engineer)

Date: *May 15, 2018*

Report No.: BL-HK1820064-601
EUT Name: DECT Module
Model Name: DHAN-J
Brand Name: DSP Group
Test Standard: FCC Part 15, subpart D
RSS-Gen (Issue 4, November 2014)
RSS-213 (Issue 3, March 2015)
FCC ID: 2AOUK-DHANJ
ISED Number: 23573-DHANJ
Test conclusion: Pass
Test Date: Feb. 19, 2018 ~ Feb. 26, 2018
Date of Issue: May 15, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 27, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>May 11, 2018</u>	<u>Revise the title on page 42.add the limit on page 42.delete the threshold formula on page 52.add measurement uncertainty on TR related to corresponding test item.</u>
<u>Rev. 03</u>	<u>May 15, 2018</u>	<u>Revise the limit of threshold on page 51</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	7
1.1	Identification of the Testing Laboratory	7
1.2	Identification of the Responsible Testing Location	7
1.3	Laboratory Condition	7
1.4	Announce	7
2	PRODUCT INFORMATION	8
2.1	Applicant Information	8
2.2	Manufacturer Information.....	8
2.3	Factory Information.....	8
2.4	Ancillary Equipment.....	8
2.5	Technical Information	9
2.6	General Description for Equipment under Test (EUT).....	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict.....	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments.....	12
4.2	Test Equipment List.....	12
4.3	Measurement Uncertainty.....	13
4.4	Description of Test Setup	13
4.4.1	For Antenna Port Test	13
4.4.2	For AC Power Supply Port Test.....	14
4.4.3	For Radiated Test (Below 30 MHz).....	14

4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	15
4.5	Measurement Results Explanation Example.....	16
4.5.1	For conducted test items:	16
5	TEST ITEMS	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards	17
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	17
5.2	Conducted Emission.....	18
5.2.1	Limit.....	18
5.2.2	Test Setup.....	18
5.2.3	Test Procedure.....	18
5.2.4	Test Result	18
5.3	Peak transmit power	19
5.3.1	Test Limit.....	19
5.3.2	Test Setup.....	19
5.3.3	Test Procedure.....	19
5.3.4	Test Result	19
5.4	Power Spectral density (PSD)	20
5.4.1	Limit.....	20
5.4.2	Test Setup.....	20
5.4.3	Test Procedure.....	20
5.4.4	Test Result	20
5.5	Emission Bandwidth	21
5.5.1	Limit.....	21
5.5.2	Test Setup.....	21
5.5.3	Test Procedure.....	21
5.5.4	Test Result	21
5.6	Emission Inside and Out the sub-band	22
5.6.1	Limit.....	22
5.6.2	Test Setup.....	22

5.6.3	Test Procedure	22
5.6.4	Test Result	22
5.7	Carrier Frequency Stability	23
5.7.1	Limit.....	23
5.7.2	Test Setup	23
5.7.3	Test Procedure	23
5.7.4	Test Result	23
5.8	Frame repetition Stability, period and jitter	24
5.8.1	Requirements	24
5.8.2	Test Setup	24
5.8.3	Test Procedure	24
5.8.4	Test Result	24
5.9	Monitoring the time	25
5.9.1	Limit.....	25
5.9.2	Test Setup	25
5.9.3	Test Procedure	25
5.9.4	Test Result	25
5.10	Monitoring threshold	26
5.10.1	Limit.....	26
5.10.2	Test Setup	26
5.10.3	Test Procedure	26
5.10.4	Test Result	26
5.11	Maximum transmit period	27
5.11.1	Limit.....	27
5.11.2	Test Setup	27
5.11.3	Test Procedure	27
5.11.4	Test Result	27
5.12	Acknowledgment system	28
5.12.1	Limit.....	28
5.12.2	Test Setup	28
5.12.3	Test Procedure	28
5.12.4	Test Result	28

5.13	Least Interfered Channel, LIC	29
5.13.1	Limit	29
5.13.2	Test Setup	29
5.13.3	Test Procedure	29
5.13.4	Test Result	29
5.14	Random waiting	30
5.14.1	Limit	30
5.14.2	Test Setup	30
5.14.3	Test Procedure	30
5.14.4	Test Result	30
5.15	Monitoring bandwidth and reaction time	31
5.15.1	Limit	31
5.15.2	Test Setup	31
5.15.3	Test Procedure	31
5.15.4	Test Result	31
5.16	Monitoring antenna	32
5.16.1	Limit	32
5.16.2	Test Setup	32
5.16.3	Test Procedure	32
5.16.4	Test Result	32
5.17	Duplex system LBT	33
5.17.1	Limit	33
5.17.2	Test Setup	33
5.17.3	Test Procedure	33
5.17.4	Test Result	33
5.18	Co-located device LBT	34
5.18.1	Limit	34
5.18.2	Test Setup	34
5.18.3	Test Procedure	34
5.18.4	Test Result	34
5.19	Fair access	35
5.19.1	Limit	35

5.19.2	Test Setup	35
5.19.3	Test Result	35
5.20	Radiated Emission.....	36
5.20.1	Limit.....	36
5.20.2	Test Setup	36
5.20.3	Test Procedure	36
5.20.4	Test Result	38
ANNEX A	TEST RESULT	39
A.1	Conducted Emissions.....	39
A.2	Peak transmit power.....	41
A.3	Power Spectral Density (PSD).....	42
A.4	Emission bandwidth.....	44
A.5	Emission Inside and Out the sub-band	46
A.6	Carrier Frequency Stability	50
A.7	Frame repetition Stability, period and jitter.....	50
A.8	Monitoring the time	50
A.9	Monitoring threshold	51
A.10	Maximum transmit period	52
A.11	Acknowledgment system.....	52
A.12	Least Interfered Channel, LIC.....	52
A.13	Random waiting.....	52
A.14	Monitoring bandwidth and reaction time	53
A.15	Monitoring antenna.....	53
A.16	Duplex system LBT	54
A.17	Co-located device LBT	54
A.18	Fair access.....	54
A.19	Radiated Emission.....	55
ANNEX B	TEST SETUP PHOTOS	58
ANNEX C	EUT EXTERNAL PHOTOS	58
ANNEX D	EUT INTERNAL PHOTOS.....	58

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20 to 25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v1.0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	DSP Group Ltd.
Address	5 SHenkar Street., Herzliza Israel 4672505

2.2 Manufacturer Information

Manufacturer	DSP Group Ltd.
Address	5 SHenkar Street., Herzliza Israel 4672505

2.3 Factory Information

Factory	MeiZhou GuoWei Electronics Co.,Ltd.
Address	N/A

2.4 Ancillary Equipment

Ancillary Equipment	USB Data Cable	
	Length (Approx.)	1.0 m

2.5 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	1920.0 – 1930.0 MHz
Number of Channels	5 Channels, 5x12 = 60 TDMA Duplex Channels
Modulation Type	GFSK
Number of Antennas	1
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Antenna Type	PCB Antenna
Antenna Gain	0
About the Product	This a DECT Module.

All channel list

Channel number	Channel Frequency	Channel number	Channel Frequency
0	1928.448	3	1923.264
1	1926.720	4	1921.536
2	1924.992	--	--

2.6 General Description for Equipment under Test (EUT)

EUT Type	DECT Module
Model Name Under Test	DHAN-J
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	DECT

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart D (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	RSS-Gen (Issue 4, Nov. 2014)	General Requirements for Compliance of Radio Apparatus
3	RSS-213 (Issue 3 March 2015)	2 GHz Licence-Exempt Personal Communications Services (LE-PCS) Devices
4	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
5	ANSI C63.17-2013	American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices

3.2 Verdict

No.	Description	FCC PART No.	ISED Part No.	Test Result	Verdict
General Technical Requirements					
1	Antenna Requirement	15.203; 15.317	RSS-GEN 8.3	N/A	Pass ^{Note 1}
2	Labeling Requirement	15.19(a)(3)	RSP-100 3.1	N/A	Pass ^{Note 2}
3	Digital Modulation Techniques	15.319 (b)	5.1	N/A	Pass ^{Note 3}
4	Conducted emission	15.107(a); 15.207(a)	5.4 RSS-GEN 8.8	ANNEX A.1	Pass
5	Peak transmit power	15.319(c)(e), 15.31(e)	5.6 RSS-GEN 8.3	ANNEX A.2	Pass
6	Power spectral density	15.319 (d)	5.7	ANNEX A.3	Pass
7	Emission bandwidth	15.323 (a)	5.5 RSS-GEN 6.6	ANNEX A.4	Pass
8	Emission Inside and Out the sub-band	15.323 (d)	5.8.1; 5.8.2	ANNEX A.5	Pass
9	Carrier Frequency Stability	15.323(f)	5.3	ANNEX A.6	Pass
Specific Requirements for UPCS Device					
10	Frame repetition Stability, period and jitter	15.323(e)	5.2(1)(13)	ANNEX A.7	Pass
11	Monitoring the time	15.323 (c)(1)	5.2(1)	ANNEX A.8	Pass
12	Monitoring threshold	15.323 (c)(2) (9)	5.2(2) (9)	ANNEX A.9	Pass
13	Maximum transmit period	15.323 (c)(3)	5.2(3)	ANNEX A.10	Pass
14	Acknowledgment system	15.323 (c)(4)	5.2(4)	ANNEX A.11	Pass
15	Least Interfered Channel, LIC	15.323 (c)(5)	5.2(5)	ANNEX A.12	Pass
16	Random waiting	15.323 (c)(6)	5.2(6)	ANNEX A.13	Pass
17	Monitoring bandwidth and reaction time	15.323 (c)(7)	5.2(7)	ANNEX A.14	Pass
18	Monitoring antenna	15.323 (c)(8)	5.2(8)	ANNEX A.15	Pass
19	Duplex system LBT	15.323 (c)(10)	5.2(10)	ANNEX A.16	Pass
20	Co-located device LBT	15.323 (c)(11)	5.2(11)	ANNEX A.17	Pass ^{Note 4}
21	Fair access	15.323 (c)(12)	5.2(12)	ANNEX A.18	Pass
22	Radiated Emission	15.319 (g)	5.2(13)	ANNEX A.19	Pass

Note ¹: Please refer to section 5.1.

Note ²: Customer declaration .See separate documents showing the label design and the placement of the label on the EUT.

Note³: The requirement is all transmissions must use only digital modulation techniques. They are made in accordance with ANSI C63.17 sub-clause 6.1.4. Please refer to the technical description or relevant DECT standards for more details.

Note ⁴: not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2017.06.12	2018.06.11
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2017.06.12	2018.06.11
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2017.09.07	2018.09.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2017.06.22	2018.06.21
LISN	SCHWARZBECK	NSLK 8127	8127-687	2017.06.22	2018.06.21
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2017.06.12	2018.06.11
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2017.06.12	2018.06.11
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2017.06.22	2018.06.21
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2017.06.27	2018.06.26
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna- Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna- Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2016.07.12	2018.07.11
Test Antenna- Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2017.06.22	2018.06.21
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2017.06.12	2018.06.11
Power Amplifier	OPHIR RF	5225F	1037	2018.02.17	2019.02.16
Power Amplifier	OPHIR RF	5273F	1016	2018.02.17	2019.02.16
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

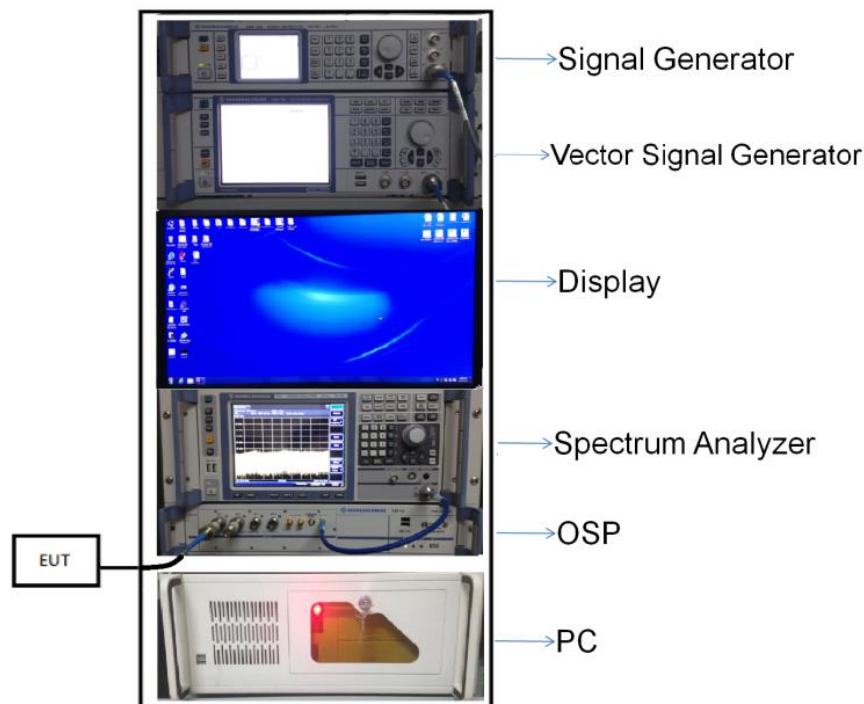


(Diagram 1)

4.4.2 For AC Power Supply Port Test

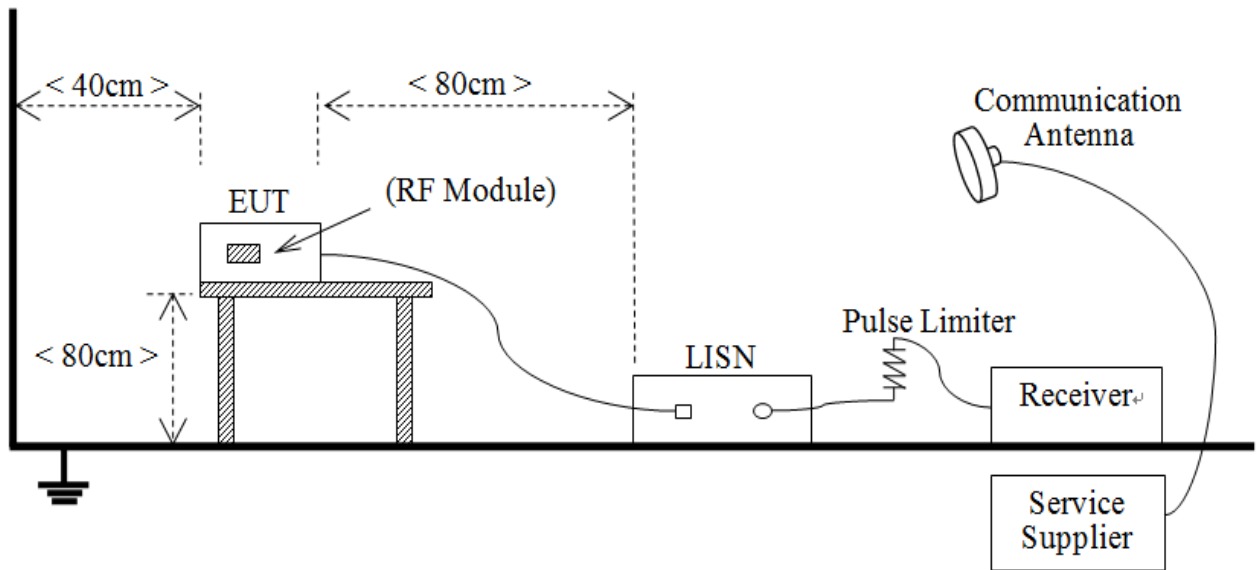


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

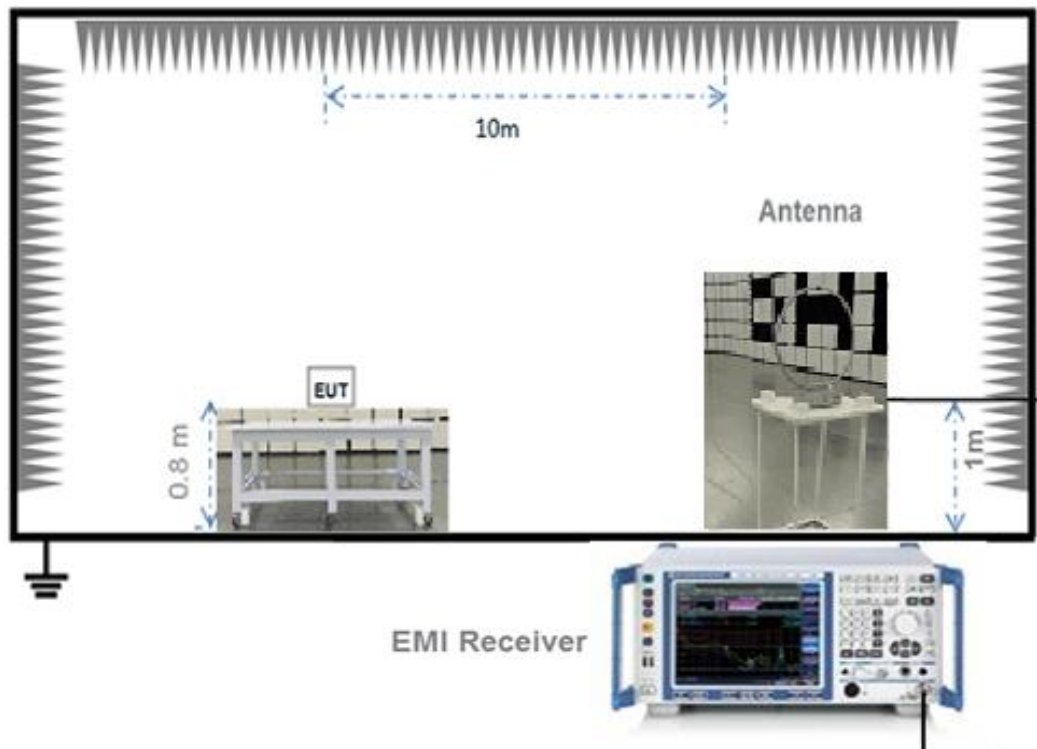


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

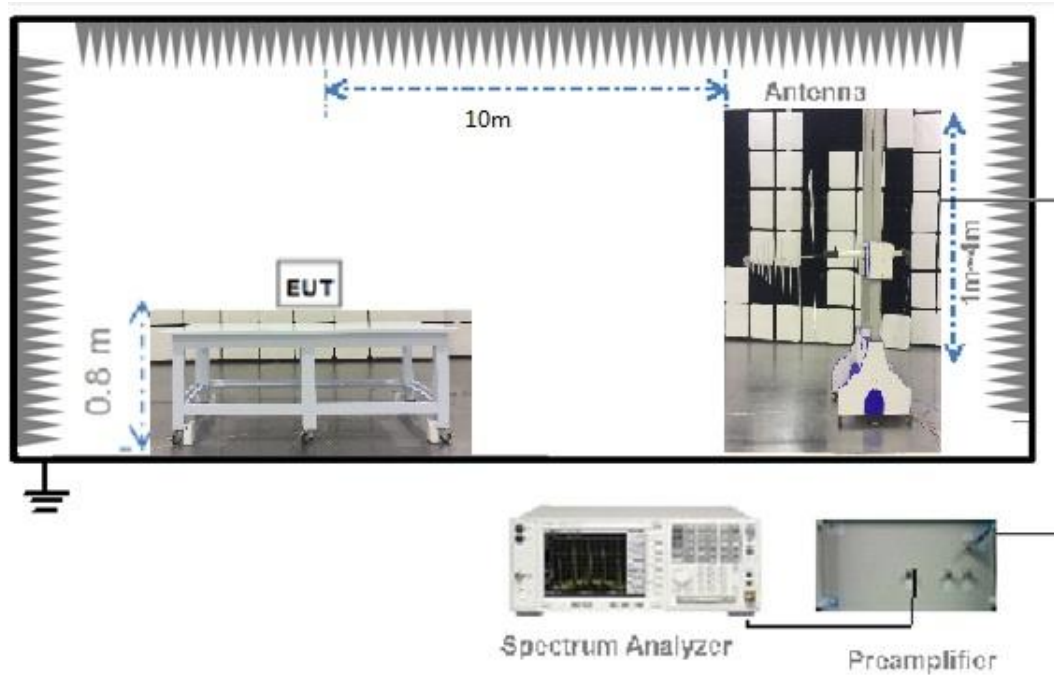

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

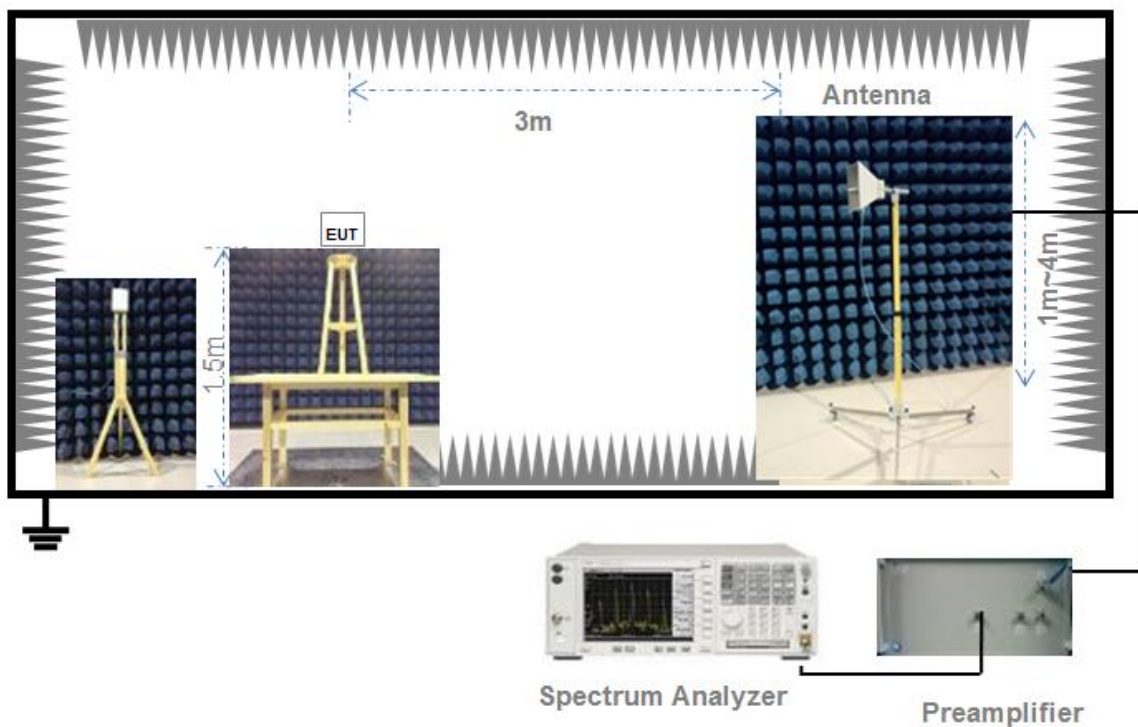

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.317


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

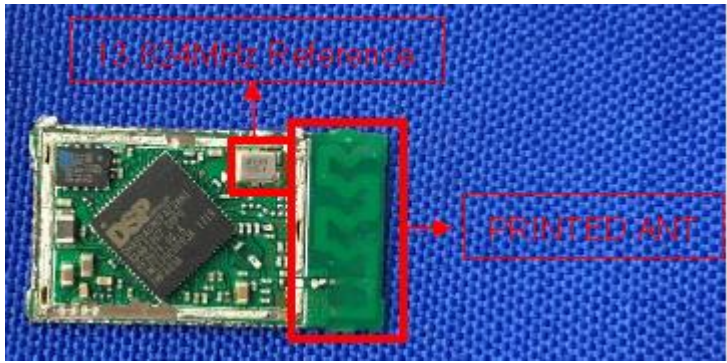Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Conducted Emission

5.2.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.2.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak transmit power

5.3.1 Test Limit

FCC § 15.319(c)(e); RSS-213, 5.6

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3dBi.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.2.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Power Spectral density (PSD)

5.4.1 Limit

FCC §15.319(d); RSS-213, 5.7

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.5.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Emission Bandwidth

5.5.1 Limit

FCC §15.323 (a); RSS-213, 5.5 RSS-GEN, 6.6

The 26 dB and 99% Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.3.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Emission Inside and Out the sub-band

5.6.1 Limit

FCC §15.323 (d); RSS-213, 5.8

In-Band Emissions:

$B < f \leq 2B$: at least 30 dB below max. permitted peak power

$2B < f \leq 3B$: at least 50 dB below max. permitted peak power

$3B < f \leq$ UPCS Band Edge: at least 60 dB below max. permitted peak power

Out-of-Band Emissions:

$f \leq 1.25\text{MHz}$ outside UPCS band: $\leq -9.5\text{dBm}$

$1.25\text{MHz} \leq f \leq 2.5\text{MHz}$ outside UPCS band: $\leq -29.5\text{ dBm}$

$f \geq 2.5\text{MHz}$ outside UPCS band: $\leq -39.5\text{ dBm}$

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.6.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Carrier Frequency Stability

5.7.1 Limit

FCC §15.323 (f); RSS-213, 5.3

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20° to $+ 50^{\circ}$ °C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20° °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further. Requirement to vary supply voltage.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Reference to ANSI C63.17, Clause 6.2.1.

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Frame repetition Stability, period and jitter

5.8.1 Requirements

FCC §15.323 (e); RSS-213, 5.2(1) (13)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this band shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Reference to ANSI C63.17, Clause 6.2.2&6.2.3.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Monitoring the time

5.9.1 Limit

FCC §15.323 (c) (1); RSS-213, 5.2(1)

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.

5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Reference to ANSI C63.17, Clause 7.3.3.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Monitoring threshold

5.10.1 Limit

FCC §15.323 (c) (2); RSS-213, 5.2(2)

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

FCC §15.323 (c) (9); RSS-213, 5.2(9)

Devices that have a power output lower than the maximum permitted under this subpart may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

5.10.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

Reference to ANSI C63.17, Clause 7.3.1.

5.10.4 Test Result

Please refer to ANNEX A.9.

5.11 Maximum transmit period

5.11.1 Limit

FCC §15.323 (c) (3); RSS-213, 5.2(3)

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

5.11.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

Reference to ANSI C63.17, Clause 8.2.2.

5.11.4 Test Result

Please refer to ANNEX A.10.

5.12 Acknowledgment system

5.12.1 Limit

FCC §15.323 (c) (4); RSS-213, 5.2(4)

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

5.12.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.12.3 Test Procedure

Reference to ANSI C63.17, Clause 8.2.

5.12.4 Test Result

Please refer to ANNEX A.11.

5.13 Least Interfered Channel, LIC

5.13.1 Limit

FCC §15.323 (c) (5); RSS-213, 5.2(5)

If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of cooperating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

5.13.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.13.3 Test Procedure

Reference to ANSI C63.17, Clause 7.3.2 and 7.3.3.

5.13.4 Test Result

Please refer to ANNEX A.12.

5.14 Random waiting

5.14.1 Limit

FCC §15.323 (c) (6); RSS-213, 5.2(6)

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

5.14.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.14.3 Test Procedure

Reference to ANSI C63.17, Clause 8.1.3

5.14.4 Test Result

Please refer to ANNEX A.13.

5.15 Monitoring bandwidth and reaction time

5.15.1 Limit

FCC §15.323 (c) (7); RSS-213, 5.2(7)

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

5.15.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.15.3 Test Procedure

Reference to ANSI C63.17, Clause 7.4 and 7.5.

5.15.4 Test Result

Please refer to ANNEX A.14.

5.16 Monitoring antenna

5.16.1 Limit

FCC §15.323 (c) (8); RSS-213, 5.2(8)

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

5.16.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.16.3 Test Procedure

Reference to ANSI C63.17, Clause 4.

5.16.4 Test Result

Please refer to ANNEX A.15.

5.17 Duplex system LBT

5.17.1 Limit

FCC §15.323 (c) (10); RSS-213, 5.2(10)

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

5.17.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.17.3 Test Procedure

Reference to ANSI C63.17, Clause 8.3.

5.17.4 Test Result

Please refer to ANNEX A.16.

5.18 Co-located device LBT

5.18.1 Limit

FCC §15.323 (c) (11); RSS-213, 5.2(11)

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a collocated (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or collocated cooperating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

5.18.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.18.3 Test Procedure

Reference to ANSI C63.17, Clause 8.4.

5.18.4 Test Result

Please refer to ANNEX A.17.

5.19 Fair access

5.19.1 Limit

FCC §15.323 (c) (12); RSS-213, 5.2(12)

The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

5.19.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.19.3 Test Result

Please refer to ANNEX A.18.

5.20 Radiated Emission

5.20.1 Limit

FCC §15.209&15.319(g);

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.20.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.20.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

5.20.4 Test Result

Please refer to ANNEX A.19.

ANNEX A TEST RESULT


A.1 Conducted Emissions

Note: The EUT is working in the Normal link mode.

Measurement Uncertainty:3.4dB


Test Data and Plots

PHASE L

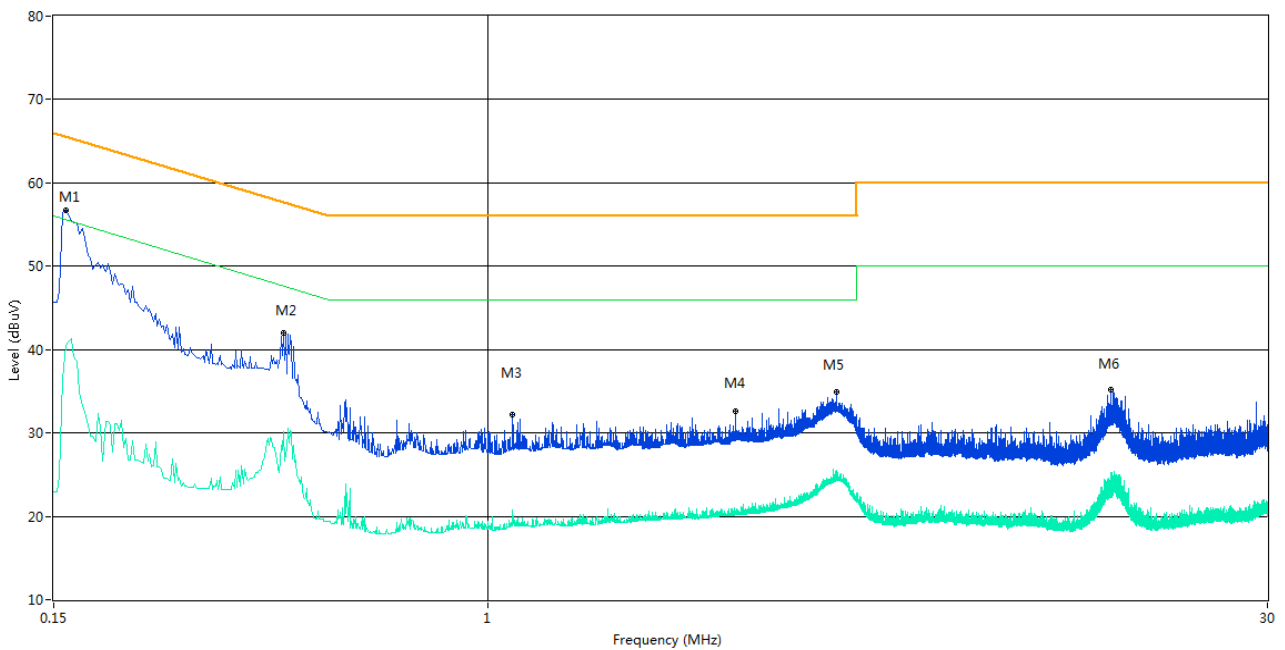

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	56.7	10.04	65.6	8.90	Peak	L Line	Pass
1**	0.158	40.4	10.04	55.6	15.20	AV	L Line	Pass
2	0.410	42.0	10.04	57.6	15.60	Peak	L Line	Pass
2**	0.410	30.2	10.04	47.6	17.40	AV	L Line	Pass
3	1.112	32.2	10.06	56.0	23.80	Peak	L Line	Pass
3**	1.112	20.8	10.06	46.0	25.20	AV	L Line	Pass
4	2.938	32.6	10.11	56.0	23.40	Peak	L Line	Pass
4**	2.938	20.7	10.11	46.0	25.30	AV	L Line	Pass
5	4.580	34.9	10.16	56.0	21.10	Peak	L Line	Pass
5**	4.580	25.1	10.16	46.0	20.90	AV	L Line	Pass
6	15.148	35.1	10.46	60.0	24.90	Peak	L Line	Pass
6**	15.148	23.3	10.46	50.0	26.70	AV	L Line	Pass

PHASE N

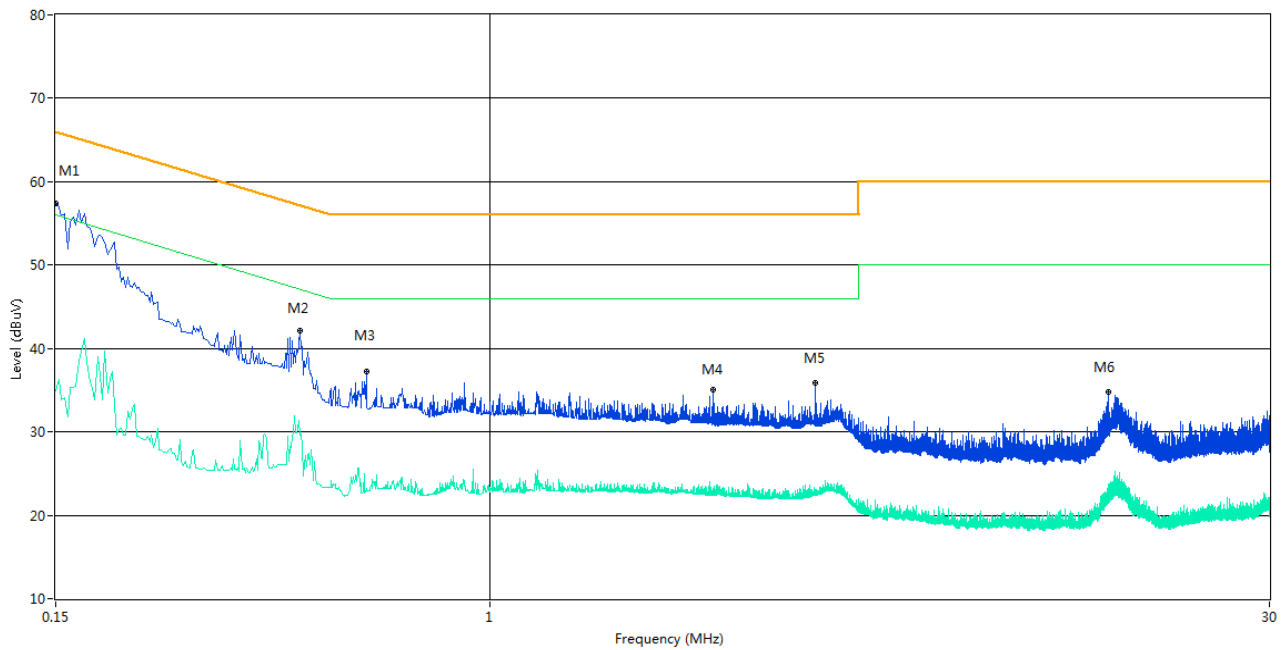

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	57.3	10.04	66.0	8.70	Peak	N Line	Pass
1**	0.150	34.9	10.04	56.0	21.10	AV	N Line	Pass
2	0.436	42.1	10.04	57.1	15.00	Peak	N Line	Pass
2**	0.436	29.6	10.04	47.1	17.50	AV	N Line	Pass
3	0.582	37.3	10.05	56.0	18.70	Peak	N Line	Pass
3**	0.582	23.2	10.05	46.0	22.80	AV	N Line	Pass
4	2.644	35.0	10.11	56.0	21.00	Peak	N Line	Pass
4**	2.644	22.3	10.11	46.0	23.70	AV	N Line	Pass
5	4.132	35.8	10.15	56.0	20.20	Peak	N Line	Pass
5**	4.132	23.1	10.15	46.0	22.90	AV	N Line	Pass
6	14.884	34.7	10.45	60.0	25.30	Peak	N Line	Pass
6**	14.884	23.0	10.45	50.0	27.00	AV	N Line	Pass


A.2 Peak transmit power.

Note: Conducted: $100\mu\text{W} \times \text{SQRT}(B)$ where B is the measured Emission Bandwidth in Hz


Measurement uncertainty: conducted power $\pm 1.4\text{dBi}$

Frequency (MHz)	Measured Output Peak Power (dBm)	Maximum Antenna Gain (dBi)	Maximum Radiated Output Power Peak (dBm)	Limit (dBm)	Verdict
Low	20.04	0	20.04	20.60	Pass
Middle	20.14	0	20.14	20.60	Pass
High	20.26	0	20.26	20.60	Pass


LOW CHANNEL

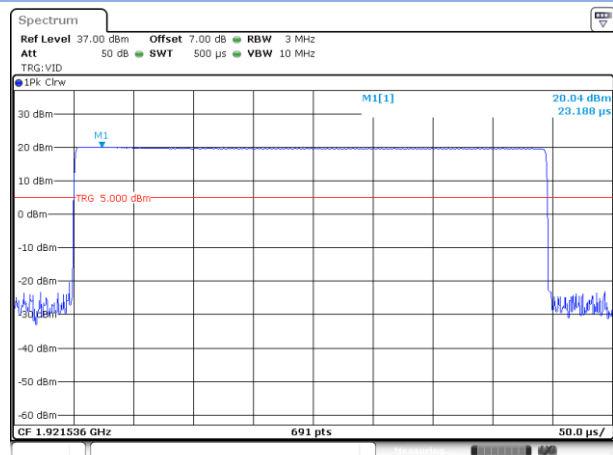

MIDDLE CHANNEL

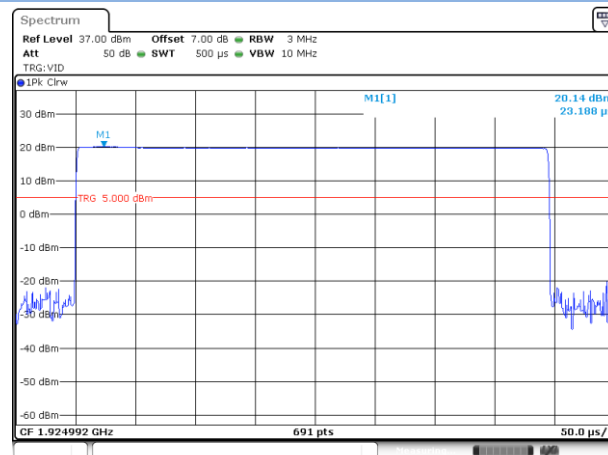

HIGH CHANNEL

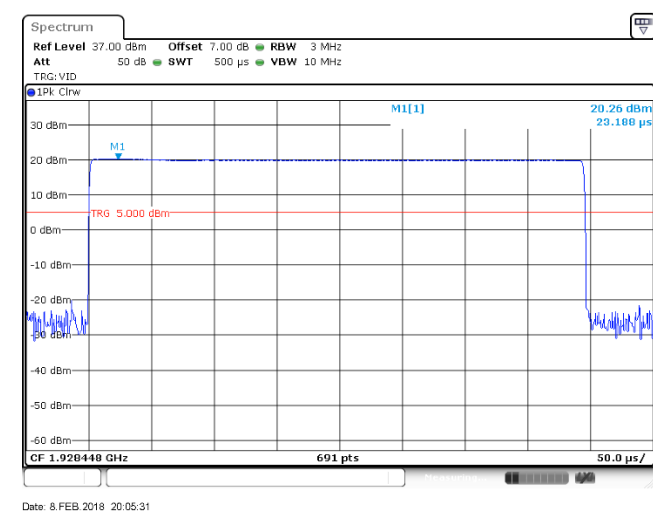

A.3 Power Spectral Density (PSD)


Test Data:

Measurement uncertainty: conducted $\pm 2.5\text{dBi}$

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	2.78	4.7	Pass
Middle	2.63	4.7	Pass
High	2.74	4.7	Pass


Test plots

LOW CHANNEL

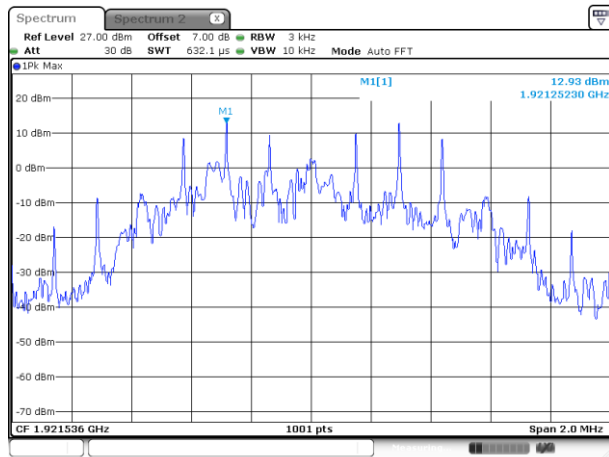


Date: 8 FEB 2018 20:14:24

LOW CHANNEL

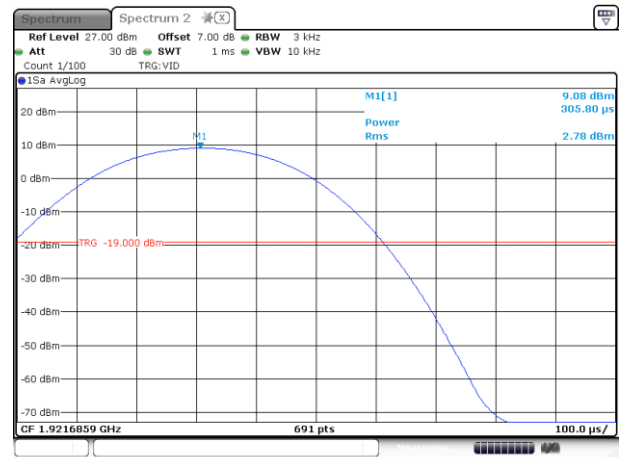


Date: 8 FEB 2018 20:15:00

MIDDLE CHANNEL

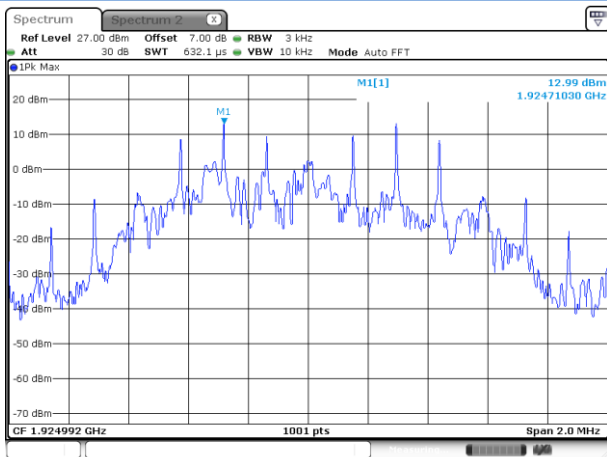


Date: 8 FEB 2018 20:12:54

MIDDLE CHANNEL

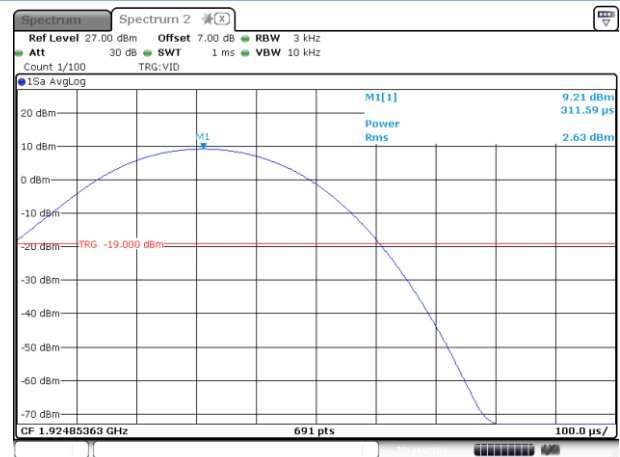


Date: 8 FEB 2018 20:13:35

HIGH CHANNEL

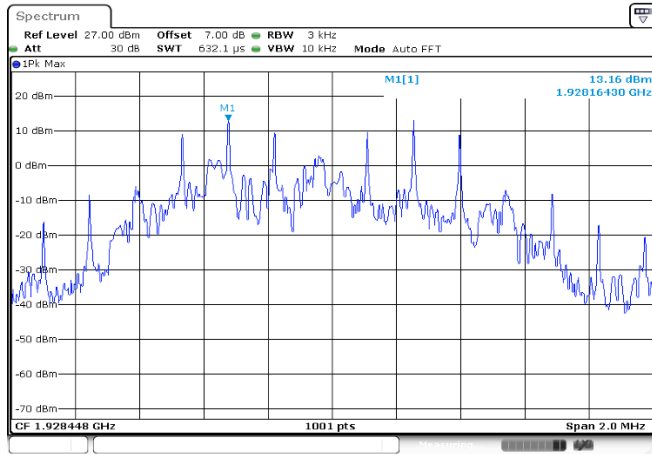

Date: 8.FEB.2018 20:08:24

HIGH CHANNEL

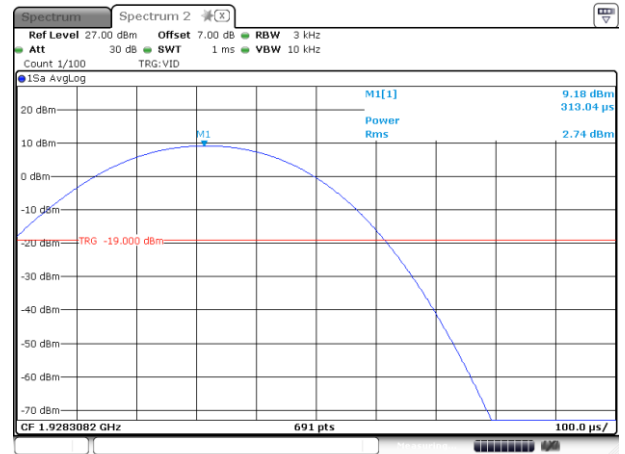

Date: 8.FEB.2018 20:12:14

A.4 Emission bandwidth

Test Data


Channel	Emission Bandwidth B (MHz)	99% Occupied Bandwidth (MHz)	Limit of Emission Bandwidth (MHz)
Low	1.3097	1.1939	0.05<B<2.5
Middle	1.1360	1.1866	0.05<B<2.5
High	1.3097	1.1866	0.05<B<2.5

Test plots

Measurement Uncertainty: occupied channel bandwidth $\pm 4\%$

Emission Bandwidth B

LOW CHANNEL

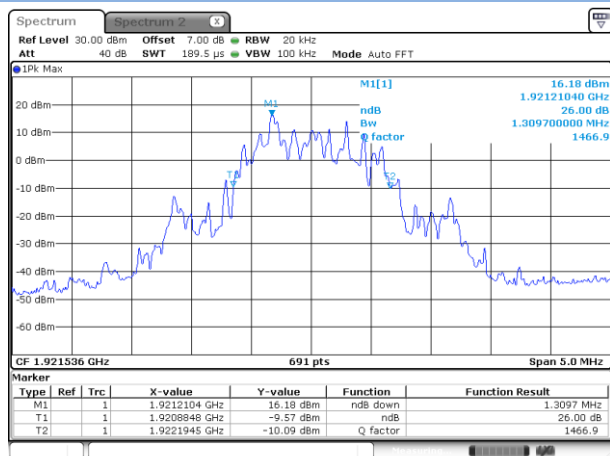


Date: 8 FEB 2018 20:16:59

MIDDLE CHANNEL



Date: 8 FEB 2018 20:20:30


HIGH CHANNEL

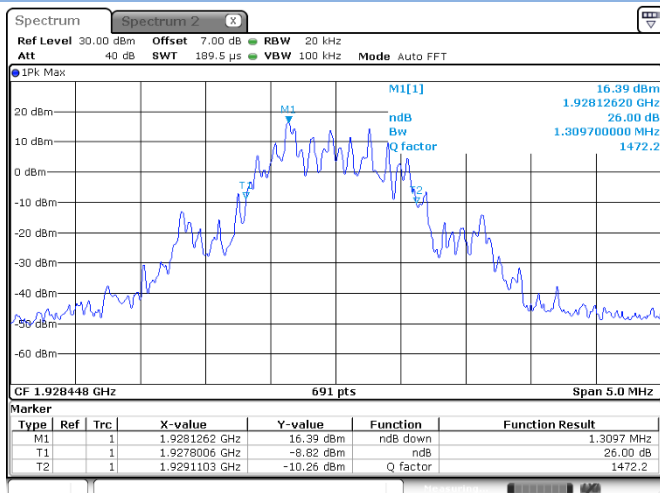

Date: 8 FEB 2018 20:21:16


99% Occupied Bandwidth (MHz)

LOW CHANNEL

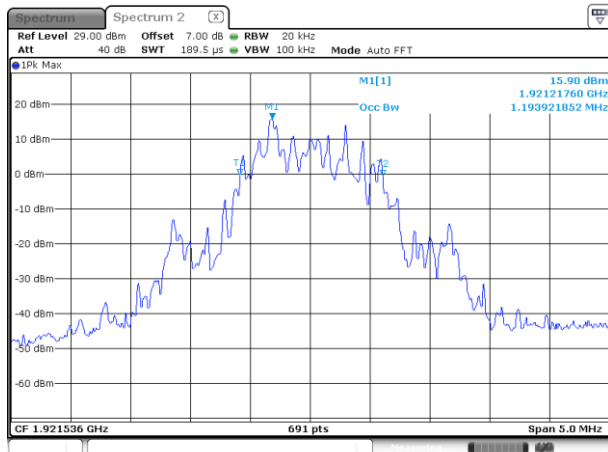


Date: 8 FEB 2018 20:18:20

MIDDLE CHANNEL

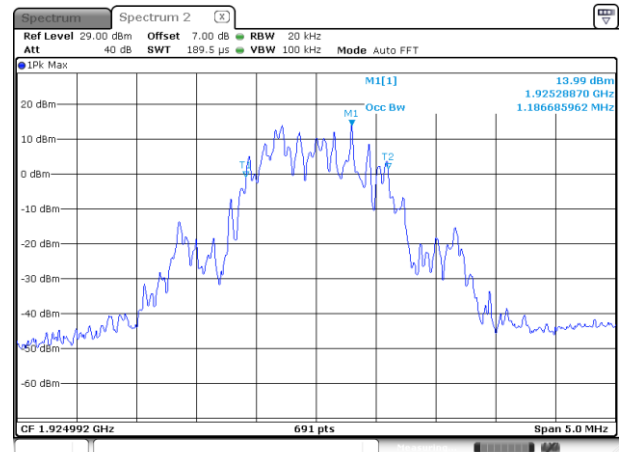

Date: 8 FEB 2018 20:20:01

HIGH CHANNEL

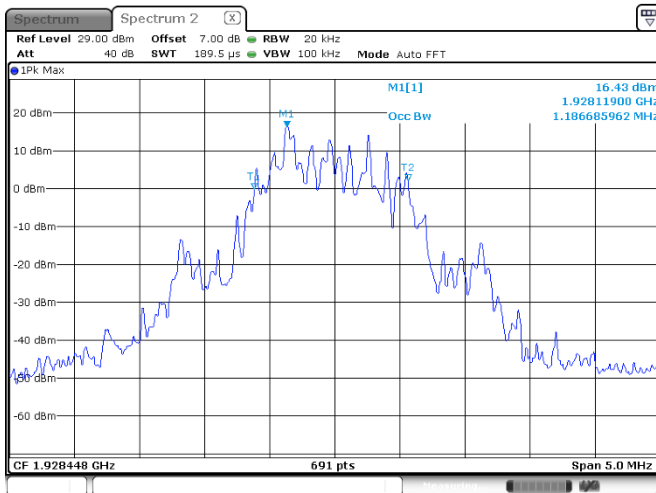

Date: 8 FEB 2018 20:21:44


A.5 Emission Inside and Out the sub-band

Test Plots

Measurement Uncertainty: conducted Emission $\pm 4\%$


In-band emissions

LOW CHANNEL

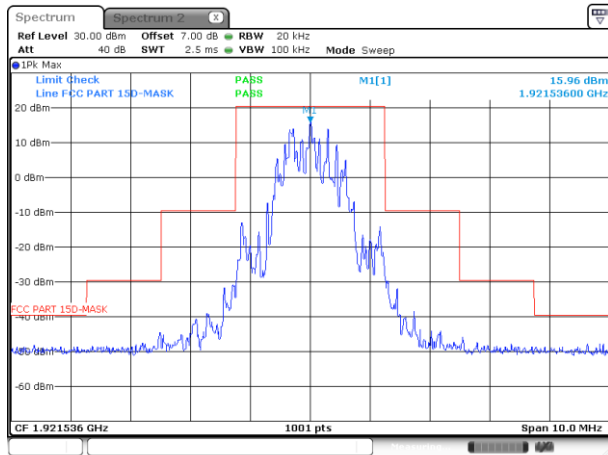


Date: 8 FEB 2018 20:24:45

MIDDLE CHANNEL

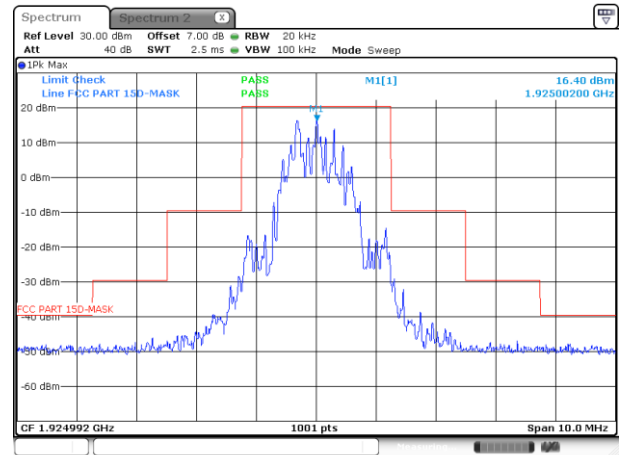

Date: 8 FEB 2018 20:24:03

HIGH CHANNEL

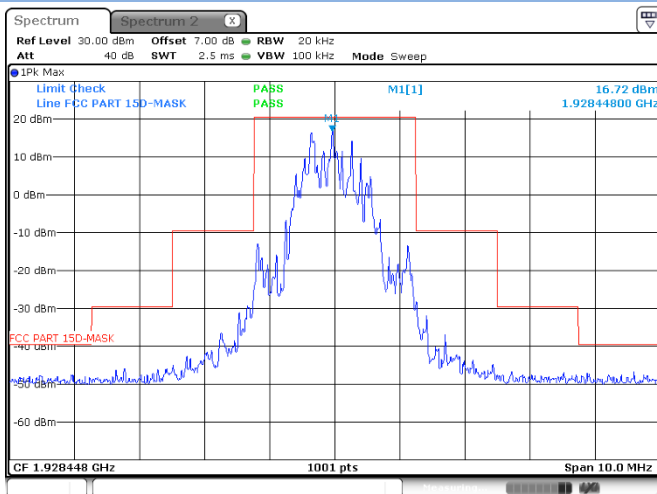


Date: 8 FEB 2018 20:23:13

Out of band emissions


Low CHANNEL

30MHz – 1.91G

1.91G – 1.92G

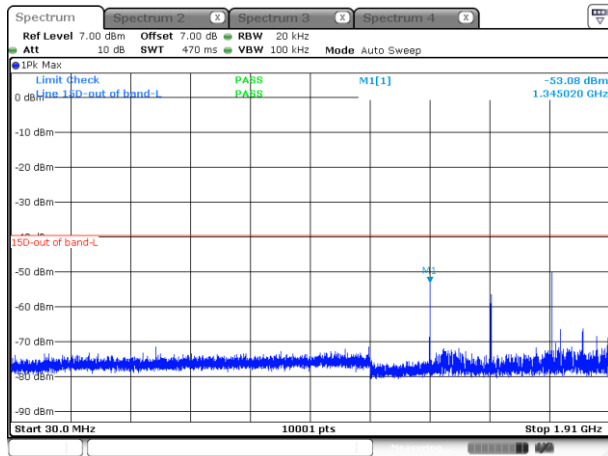


Date: 8 FEB 2018 20:34:22

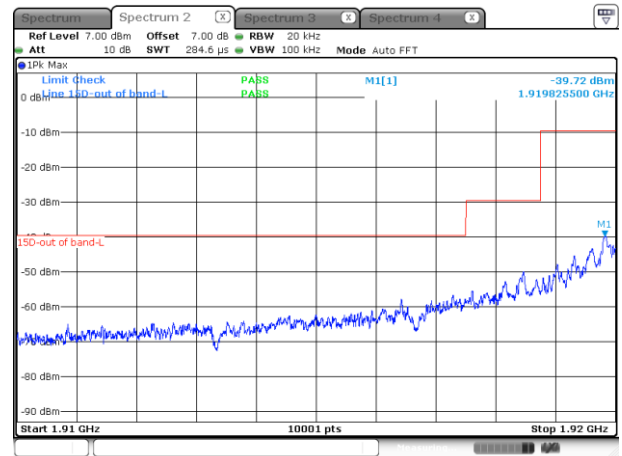


Date: 8 FEB 2018 20:35:09

1.93G – 1.94G

1.94G – 20G

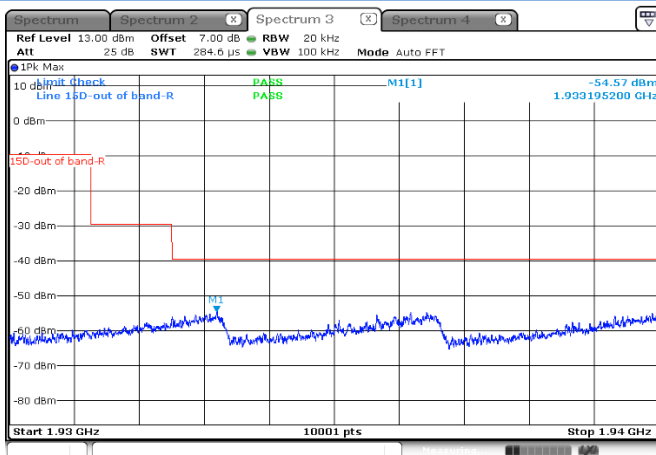

Date: 8 FEB 2018 20:35:31

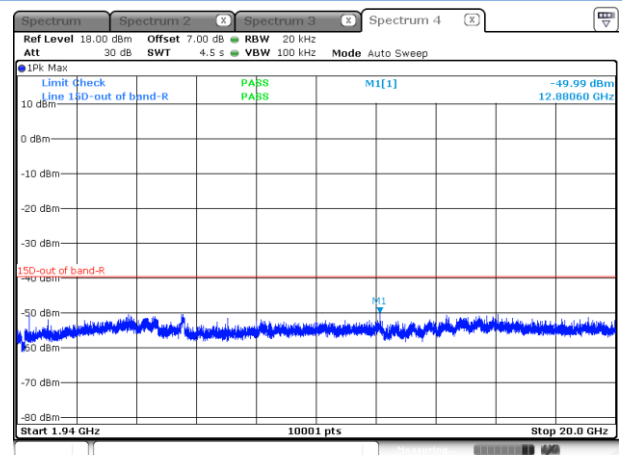


Date: 8 FEB 2018 20:35:58


Middle CHANNEL

30MHz – 1.91G

1.91G – 1.92G

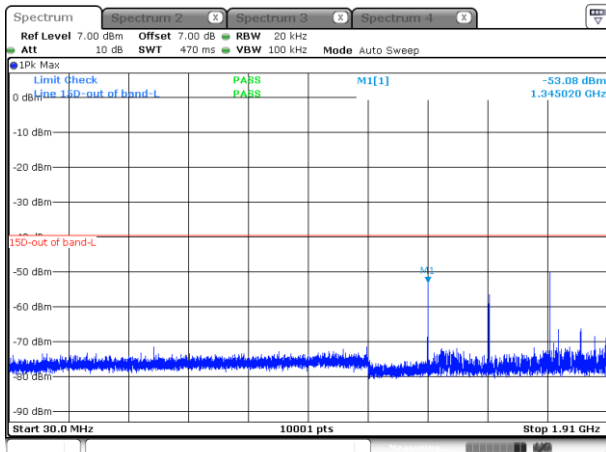


Date: 8 FEB 2018 20:34:22

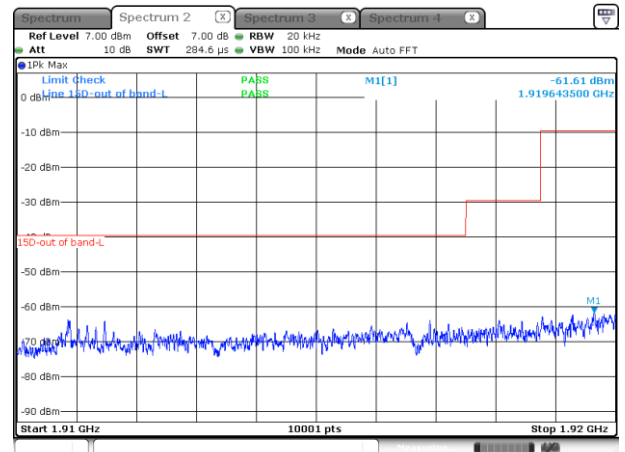


Date: 8 FEB 2018 20:36:31

1.93G – 1.94G

1.94G – 20G

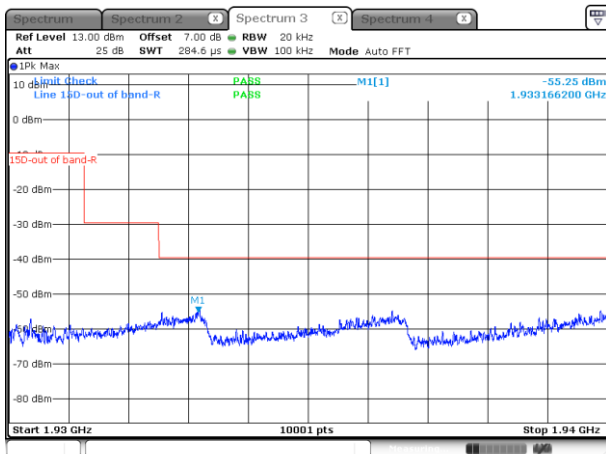

Date: 8 FEB 2018 20:36:44

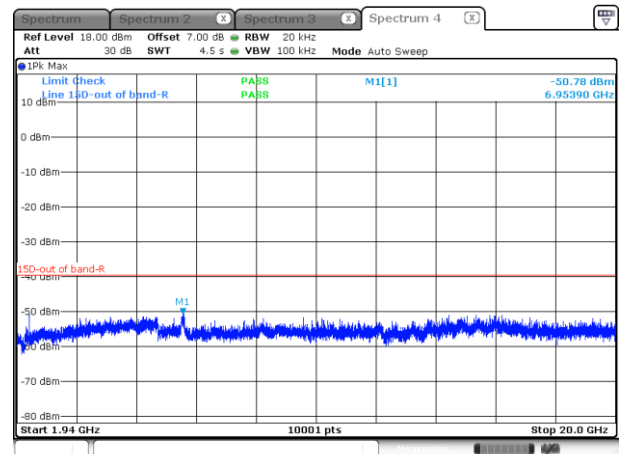


Date: 8 FEB 2018 20:36:59


High CHANNEL

30MHz – 1.91G

1.91G – 1.92G

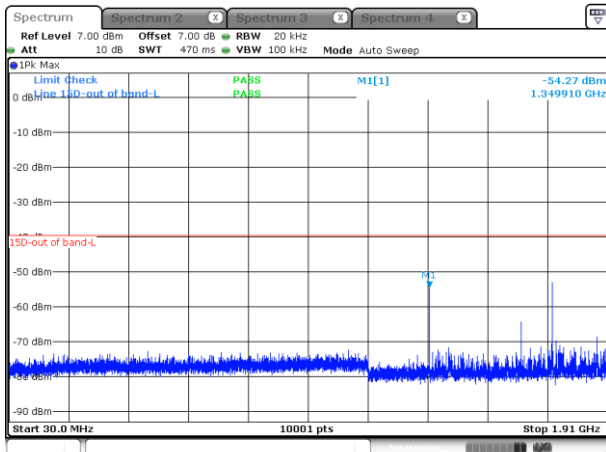


Date: 8 FEB 2018 20:37:35

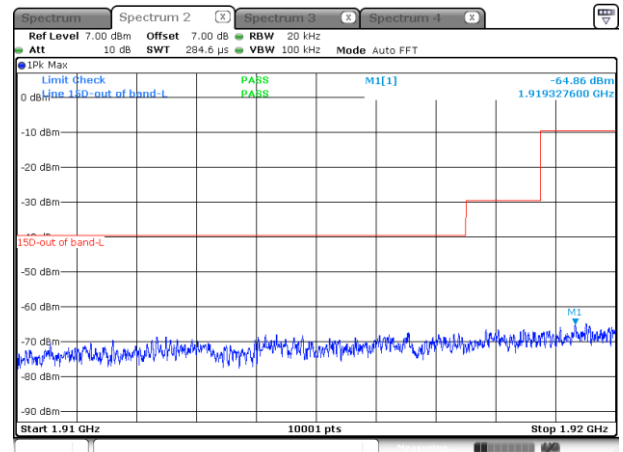


Date: 8 FEB 2018 20:37:48

1.93G – 1.94G

1.94G – 20G

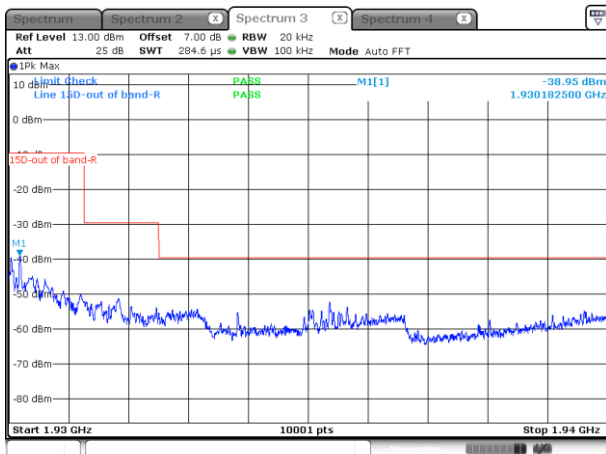

Date: 8 FEB 2018 20:38:08

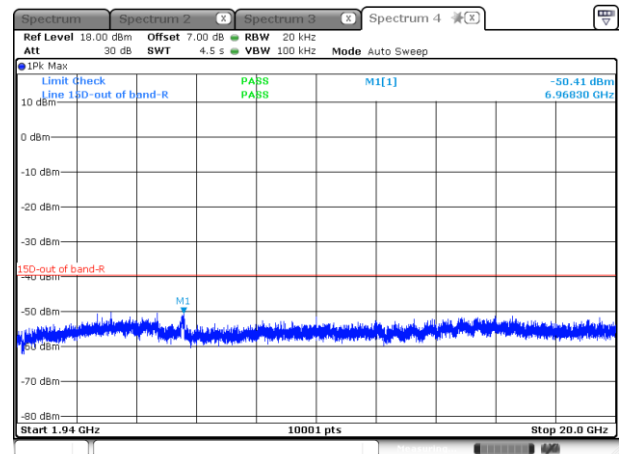

Date: 8 FEB 2018 20:38:21

A.6 Carrier Frequency Stability

Frequency Stability over Power Supply Voltage at Nominal Temperature

Note: Deviation ppm = ((Mean - Measured Frequency) / Mean) x 10⁶

Voltage	Channel Frequency	Difference	Deviation	Limits	Verdict
Vnom	Middle	3 kHz	1.38 ppm	±10 ppm	Pass
85% of Vnom	Middle	-3 kHz	1.60 ppm	±10 ppm	Pass
115% of Vnom	Middle	4 kHz	1.60 ppm	±10 ppm	Pass

Frequency Stability over Temperature

Temp.	Channel Frequency	Difference	Deviation	Limits	Verdict
Vnom	Middle	3 kHz	1.38 ppm	±10 ppm	Pass
85% of Vnom	Middle	-2 kHz	1.48 ppm	±10 ppm	Pass
115% of Vnom	Middle	5 kHz	1.53 ppm	±10 ppm	Pass

Measurement Uncertainty: ±0.6ppm

A.7 Frame repetition Stability, period and jitter

The Frame Repetition Stability is measured with the CMD60. The Frame Repetition Stability is 3 times the standard deviation.

Channel	Standard Deviation (ppm)	Frame Repetition (ppm)	The Limit of Frame Repetition Stability (ppm)	Verdict
Middle	0.15	0.45	±10	Pass

Channel	Frame Period (ms)	Max Jitter (μs)	3xStandard Deviation of Jitter (μs)	Limit (μs)		Verdict
				Max Jitter	3 times St.Dev. of Jitter	
Middle	10	0.007	0.006	25	12.5	Pass

Max Jitter = (1/(Frame Period + Pk-Pk)/2) - (1/Frame Period), when Pk-Pk and Frame Period are in Hz.

3 x St. Dev. Jitter 3 x (1/(Frame Period + St. Dev)) - (1/St. Dev)) x 10⁶

Measurement uncertainty: ±2.0ns.

A.8 Monitoring the time

EUT monitors the combined time and spectrum window prior to initiation of transmission. The observation results as below

Channel Selection	Observation result	Verdict
1. Apply the interference on f1 at level T _U + U _M , and no interference on f2. Initiate transmission and verify the transmission on f2.	EUT transmission on f2	Pass
2. Apply interference on f2 at a level of T _U + U _M , in-band, and immediately remove all interference from f1 and immediately (but not sooner than 20 ms after the interference on f2 is applied) cause the EUT to attempt transmission.	EUT transmission on f1	Pass

A.9 Monitoring threshold

Calculation of Monitoring Threshold Limit:

Lower Threshold:

$$T_L \leq -174 + 10\log B + M_U + P_{MAX} - P_{EUT} \text{ (dBm)}$$

Upper Threshold:

$$T_U \leq -174 + 10\log B + M_U + P_{MAX} - P_{EUT} \text{ (dBm)}$$

Where:

B = measured Emission Bandwidth in Hz.

M_U = dBs the threshold may exceed thermal noise (30 for T_L and 50 for T_U).

P_{MAX} = Output Power Limit in dBm.

P_{EUT} = measured Transmitter Power in dBm

The Lower Threshold is applicable for systems which have defined less than 40 duplex system access channels.

The Upper Threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

Upper Threshold has been removed from FCC 15D but still exists in the current Industry Canada RSS-213.

Test Data:

Monitor Threshold	Measured Level (dBm)	Limit(dBm)	Verdict
Lower threshold	N/A	Lower threshold + 6 dB	N/A ^{Note}
Upper threshold	N/A	Upper threshold + 6 dB	N/A

Note: For the EUT which support LIC there is no need to measure lower threshold because it is automatically met by LIC procedure

A.10 Maximum transmit period

Test Data:

Test ref. to ANSI C63.17: 2013 clause 8.2.2	Observation result (H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	2	8	Pass

A.11 Acknowledgment system

Test ref. to ANSI C63.17: 2013 clause 8.2.1	Observation result (s)	Limit(s)	Verdict
Initial transmission without acknowledgements	0.72	1	Pass
Transmission time after loss of acknowledgements	10	30	Pass

A.12 Least Interfered Channel, LIC

Test Data:

ANSI C63.17 clause 7.3.2 ref.	EUT transmits on	Verdict
$f1$ TL + 13 dB, $f2$ TL + 6 dB	$f2$	Pass
$f1$ TL + 6 dB, $f2$ TL + 13 dB	$f1$	Pass
$f1$ TL + 7 dB, $f2$ TL	$f2$	Pass
$f1$ TL, $f2$ at TL+ 7 dB	$f1$	Pass

A.13 Random waiting

Test Data:

Random Waiting is not implemented in the EUT.

Conditions	Transmits Channel	Verdict
Interference applied at operating Channel, $f1$	$f2$	Pass

A.14 Monitoring bandwidth and reaction time

Monitoring bandwidth:

This test is only required if a dedicated monitoring receiver is used. If the test is not carried out the manufacturer shall declare and provide evidence that the monitoring is made through the radio receiver used for communication.

The test is passed if either the Simple Compliance Test or the More Detailed Test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

The More Detailed Test must be pass at both the -6dB and -12 dB points if the Simple Compliance Test fails.

Test Data:

Test performed	Observation result	Verdict
Simple Compliance test, at $\pm 30\%$ of B	No transmissions	Pass
More Detailed Test, at -6 dB points	N/A	N/A
More Detailed Test, at -12 dB points	N/A	N/A

Note 1: The tested EUT uses the same receiver for monitoring and communication, this test is therefore not required.

Note 2: The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended Transmission.

Reaction time:

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels TU + UM to check that the EUT does not transmit. The level was raised 6 dB for part d) with 35 μ s pulses.

The pulses are synchronized with the EUT timeslots and applied cantered within all timeslots.

Test Data:

Test performed	Observation result	Verdict
c) > largest of 50 μ s and $50 \cdot \text{SQRT}(1.25/B)$	No transmissions	Pass
d) > largest of 35 μ s and $35 \cdot \text{SQRT}(1.25/B)$, and with interference level raised 6 dB	No transmissions	Pass

Notes: Since B is larger than 1.25 MHz the test was performed with pulse lengths of 50 μ s and 35 μ s.

A.15 Monitoring antenna

EUT uses the same antenna used for transmission and monitoring that is in compliance meet above provision.

A.16 Duplex system LBT

Note: declared by the manufactory.

A.17 Co-located device LBT

Not applicable, as the system always monitor both the transmit and receive time/spectrum windows, it is not a co-located device.

A.18 Fair access

Not tested. The tested EUT does not implement this provision. See manufacturer's declaration.

A.19 Radiated Emission

Note1: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note2: The EUT is working in the Normal link mode below 1 GHz.

Note3: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

The Measurement Uncertainty: radiated emission $\pm 5.4\text{dbi}$.

Test data:

30 MHz to 1 GHz, ANT H										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	46.375	10.38	-13.12	30.0	19.62	Peak	340	300	Horizontal	Pass
2	100.439	9.73	-14.99	33.5	23.77	Peak	283	200	Horizontal	Pass
3	169.05	10.55	-17.3	33.5	22.95	Peak	49	300	Horizontal	Pass
4	278.39	15.25	-12.64	36.0	20.75	Peak	237	400	Horizontal	Pass
5	324.938	18.98	-11.46	36.0	17.02	Peak	49	400	Horizontal	Pass
6	667.02	21.66	-4.28	36.0	14.34	Peak	57	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	28.92	26.42	-16.64	30.0	3.58	Peak	10	200	Vertical	Pass
2	62.376	21.39	-15.45	30.0	8.61	Peak	211	200	Vertical	Pass
3	202.021	19.49	-14.74	33.5	14.01	Peak	181	100	Vertical	Pass
4	292.451	20.8	-12.3	36.0	15.2	Peak	136	100	Vertical	Pass
5	328.332	19.03	-11.21	36.0	16.97	Peak	119	100	Vertical	Pass
6	699.022	20.42	-3.98	36.0	15.58	Peak	198	100	Vertical	Pass

1GHz to 20 GHz channel 0 ANT V										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1276.95	41.97	-5.46	74.0	32.03	Peak	130	150	Vertical	Pass
2	1928.5	99.76	-3.87	74.0	-25.76	Peak	130	150	Vertical	N/A
3	2872.45	46.3	1.04	74.0	27.7	Peak	309.3	150	Vertical	Pass
4	5004.95	45.74	13	74.0	28.26	Peak	142.8	150	Vertical	Pass
5	7709.513	47.84	14.5	74.0	26.16	Peak	190.6	150	Vertical	Pass

6	11892.638	50.72	19.35	74.0	23.28	Peak	6.3	150	Vertical	Pass
1GHz to 20 GHz channel 0 ANT H										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1732.95	44.23	-5	74.0	29.77	Peak	316.7	150	Horizontal	Pass
2	1928.5	102.09	-3.87	74.0	-28.09	Peak	284.5	150	Horizontal	N/A
3	2889.95	47.94	1.08	74.0	26.06	Peak	275.6	150	Horizontal	Pass
4	3854.95	45.1	8.82	74.0	28.9	Peak	7	150	Horizontal	Pass
5	6568.95	46.73	13.72	74.0	27.27	Peak	184.4	150	Horizontal	Pass
6	9458.95	49.93	18.64	74.0	24.07	Peak	33.2	150	Horizontal	Pass

1GHz to 20 GHz channel2 ANT V										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1280.95	42.97	-5.06	74.0	31.03	Peak	140	150	Vertical	Pass
2	1925.05	98.89	-3.85	74.0	-24.89	Peak	145	150	Vertical	N/A
3	2884.45	47.3	1.05	74.0	26.7	Peak	334.3	150	Vertical	Pass
4	5744.95	47.67	13.34	74.0	26.33	Peak	49.5	150	Vertical	Pass
5	8465.45	48.84	14.5	74.0	25.16	Peak	230.6	150	Vertical	Pass
6	13423.638	50.87	19.35	74.0	23.13	Peak	63.4	150	Vertical	Pass

1 GHz to 20 GHz channel2 ANT H										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1448.95	42.99	-5.61	74.0	31.01	Peak	78.2	150	Horizontal	Pass
2	1925.05	102.06	-3.87	74.0	-28.06	Peak	150.4	150	Horizontal	N/A
3	2406.95	47.08	-4.09	74.0	26.92	Peak	144.6	150	Horizontal	Pass
4	10146.7	43.4	16.9	74.0	30.6	Peak	125.9	150	Horizontal	Pass
5	11241.2	43.17	17.73	74.0	30.83	Peak	191.9	150	Horizontal	Pass
6	13647.45	46.88	19.26	74.0	27.12	Peak	93	150	Horizontal	Pass

1 GHz to 20 GHz channel 4 ANT V										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	43.36	43.36	-6.07	74.0	30.64	Peak	302.7	150	Vertical	Pass
2	100	100	-5.01	74.0	-26	Peak	63.6	150	Vertical	N/A
3	45.07	45.07	-3.11	74.0	28.93	Peak	313.4	150	Vertical	Pass
4	45.75	45.75	18.06	74.0	28.25	Peak	233.3	150	Vertical	Pass

5	48.07	48.07	21	74.0	25.93	Peak	176.3	150	Vertical	Pass
6	50.03	50.03	21.37	74.0	23.97	Peak	0	150	Vertical	Pass
1 GHz to 20 GHz channel 4 ANT H										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1634.95	43.48	-5.92	74.0	30.52	Peak	168.3	150	Horizontal	Pass
2	1921.5	101.82	-5.06	74.0	-27.82	Peak	239.9	150	Horizontal	N/A
3	2388.95	45	-3.11	74.0	29	Peak	63.3	150	Horizontal	Pass
4	11832.45	44.68	17.85	74.0	29.32	Peak	211.7	150	Horizontal	Pass
5	13639.2	46.59	19.38	74.0	27.41	Peak	147.2	150	Horizontal	Pass
6	15223.2	50.06	21.3	74.0	23.94	Peak	209.5	150	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-HK1820064-AR.pdf”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-HK1820064-AW.pdf”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-HK1820064-AI.pdf”.

--END OF REPORT--2AOUK-DHANJ