

Product specification

1. Technical indicators of products

Frequency Range (MHz)	2400–2500
Band Width (MHz)	100
Impedance (Ω)	50
VSWR	1.91 MAX
Return Loss (dB)	–15.3
Peak Gain (dBi)	1.78
Polarization	Linear Vertical
Antenna Material	PCB
Operating Temp (°C)	–20 ~ 65
Storage Temp (°C)	–30 ~ 75


2. Product picture






天线增益： 1 . 7 8 dbi


3. Return Loss

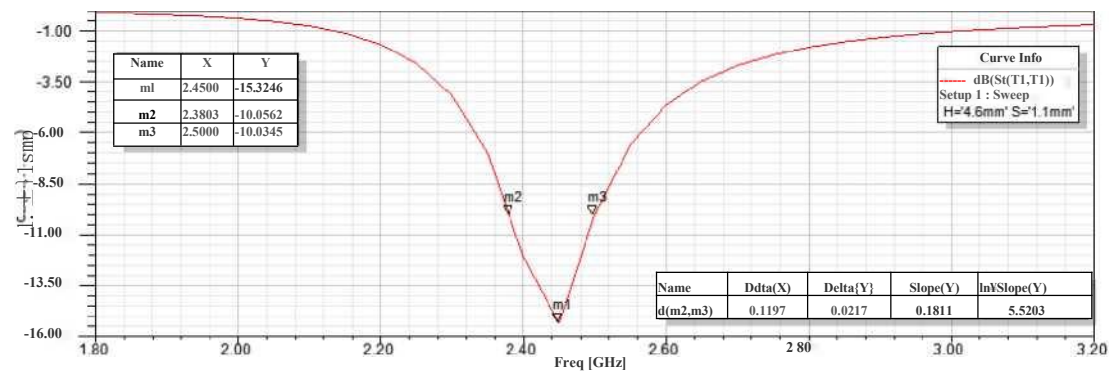


4. VSWR

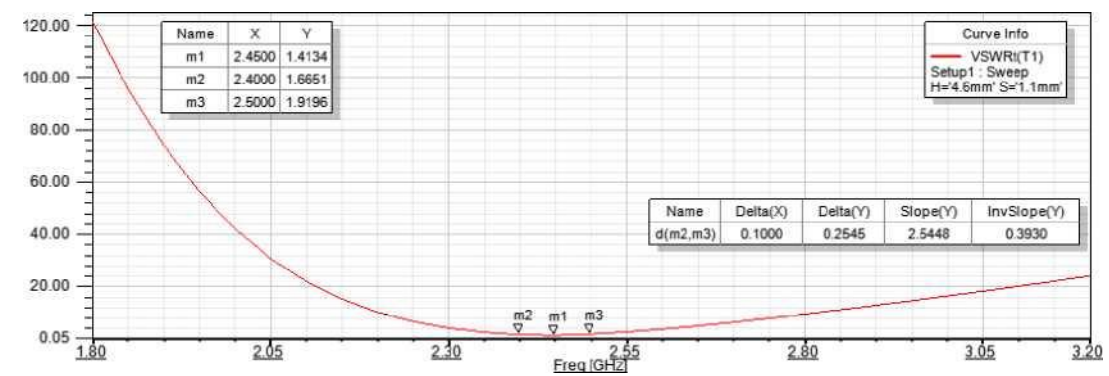

6. 3D gain pattern

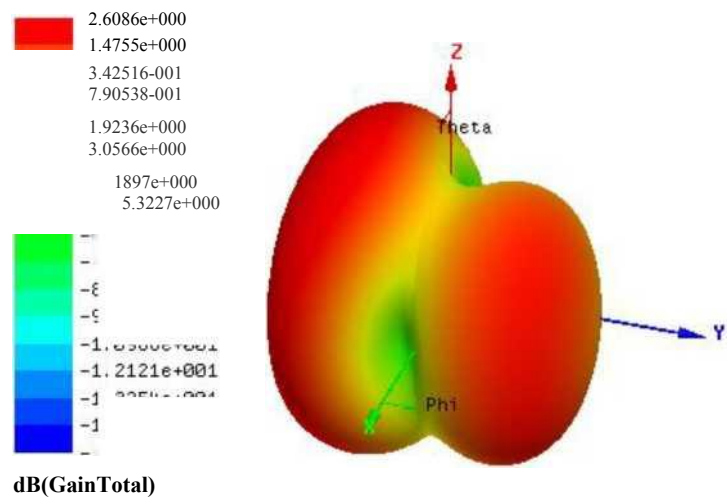

7. E ,h plan

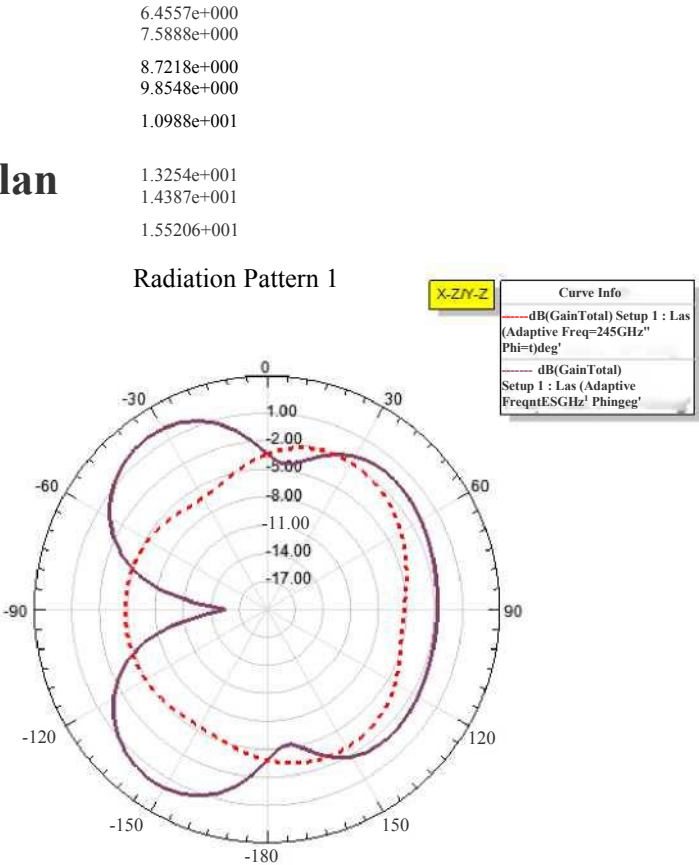

Radiation Pattern 2

