



F2 Labs
16740 Peters Road
Middlefield, Ohio 44062
United States of America
www.f2labs.com

SPURIOUS EMISSIONS TEST REPORT

Manufacturer: Knox Company
1601 West Deer Valley Road
Phoenix, Arizona 85027 USA

Applicant: Same as Above

Product Name: Radio Module

Product Description: Radio Module

Model(s): CC3100MODR11MAMOB

FCC ID: 2AOVI-KNOX-RAS

Testing Commenced: Oct. 22, 2019

Testing Ended: Oct. 22, 2019

Summary of Test Results: In Compliance

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications and/or manufacturer's statement. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

Note: Test report reflects a check to verify that spurious emissions levels have not increased from the module's certification. Wireless transmitter is pre-certified; testing was performed due to change in antenna.

Standards:

- **FCC Part 15 Subpart C, Section 15.247**
- **ANSI C63.10:2013**



Order Number: F2P21834

Client: Knox Company
Model(s): CC3100MODR11MAMOB

Evaluation Conducted by:

Julius Chiller, EMC/Wireless Engineer

Report Reviewed by:

Ken Littell, Director of EMC & Wireless Operations

F2 Labs
26501 Ridge Road
Damascus, MD 20872
Ph 301.253.4500

F2 Labs
16740 Peters Road
Middlefield, OH 44062
Ph 440.632.5541

F2 Labs
8583 Zionsville Road
Indianapolis, IN 46268
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



TABLE OF CONTENTS

Section	Title	Page
1	ADMINISTRATIVE INFORMATION	4
2	SUMMARY OF TEST RESULTS/MODIFICATIONS	5
3	ENGINEERING STATEMENT	6
4	EUT INFORMATION AND DATA	7
5	LIST OF MEASUREMENT INSTRUMENTATION	8
6	RADIATED SPURIOUS EMISSIONS	9
7	PHOTOGRAPHS	20



1 ADMINISTRATIVE INFORMATION

1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

1.2 Measurement Procedure:

All measurements were performed according to the 2013 version of ANSI C63.10 and recommended FCC procedure of measurement of DTS operating under Section 15.247 and in KDB558074. A list of the measurement equipment can be found in Section 6.

1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data, and are expressed with a 95% confidence factor. Note: Only measurements listed below which relate to tests included in this Test Report are applicable to it.

Measurement Range	Expanded Uncertainty	Combined Uncertainty
Radiated Emissions <1 GHz @ 3m	±5.07dB	±2.54
Radiated Emissions <1 GHz @10m	±5.09dB	±2.55
Radiated Emissions 1 GHz to 2.7 GHz	±3.62dB	±1.81
Radiated Emissions 2.7 GHz to 18 GHz	±3.10dB	±1.55
AC Power Line Conducted Emissions, 150kHz to 30 MHz	±2.76dB	±1.38

This Uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.4 Document History

Document Number	Description	Issue Date	Approved By
F2P21834-01E	First Issue	Nov. 4, 2019	K. Littell



2 SUMMARY OF TEST RESULTS

Test Name	Standard(s)	Results
Radiated Spurious Emission	CFR 47 Part 15.247(d) / Part 15.209 / KDB558074	Complies

Modifications Made to the Equipment
None



Order Number: F2P21834

Client: Knox Company
Model(s): CC3100MODR11MAMOB

3 ENGINEERING STATEMENT

This report has been prepared on behalf of Knox Company to provide documentation for the testing described herein. This equipment has been tested and found to comply with Part 15.247 of the FCC Rules using ANSI C63.10:2013 and KDB558074 standards. The test results found in this test report relate only to the items tested.



4 EUT INFORMATION AND DATA

4.1 Equipment Under Test:

Product(s): Radio Module
Model(s): CC3100MODR11MAMOB
Serial No(s): None Specified
FCC ID: 2AOVI-KNOX-RAS

4.2 Trade Name:

Knox Company

4.3 Power Supply:

FSP Group Inc. FSPO84-DIBAN2

4.4 Applicable Rules:

CFR 47, Part 15.247, subpart C

4.5 Equipment Category:

Radio Transmitter-DTS

4.6 Antenna:

5dBi Whip Antenna - Larsen NMO5E2400B

4.7 Accessories:

N/A

4.8 Test Item Condition:

The equipment to be tested was received in good condition.

4.9 Testing Algorithm:

The radio module was set to transmit a continuously modulated signal on the low, mid and high channels, in the 2.4 GHz Wi-Fi band.

**5 LIST OF MEASUREMENT INSTRUMENTATION**

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shielded Chamber	CL166-E	AlbatrossProjects	B83117-DF435-T261	US140023	Oct. 31, 2019
Temp/Hum. Recorder	CL261	Extech	445814	04	Mar. 6, 2020
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Oct. 25, 2019
Preamplifier	CL153	Agilent	83006-69007	MY39500791	Aug. 5, 2020
Receiver	CL204	Rohde & Schwarz	ESR7	101714	Oct. 29, 2019
Antenna, Bilog	CL211	Sunol Sciences, Inc.	JB1	A021017	Oct. 3, 2021
Loop Antenna	CL163-Loop	AH Systems, Inc.	EHA-52B	100	July 24, 2020
Software:	Tile Version 3.4.B.3		Software Verified: Oct. 22, 2019		
Software:	EMC 32, Version 8.53.0		Software Verified: Oct. 22, 2019		
Horn Antenna	CL098	Emco	3115	9809-5580	Jan. 31, 2021
Horn Antenna	CL114	A.H. Systems, Inc.	SAS-572	237	Feb. 4, 2021
Preamplifier	CL189	Com-Power	PAM-840A	461303	July 31, 2021
Preamplifier	CL250	Com-Power	PAM-118A	18040011	Oct. 26, 2019



6 RADIATED SPURIOUS EMISSION

The EUT antenna port was fitted with its 5dBi gain Whip antenna. Radiated emissions were measured in a Semi-Anechoic Chamber. All emissions generated that fall in the restricted bands per FCC Part 15.205 were examined.

6.1 Requirements:

All emissions that fall in the restricted bands defined in FCC Part 15.205 shall not exceed the maximum field strength listed in FCC Part 15.209(a).



6.2 Radiated Spurious Emission Test Data

Test Date(s):	Oct. 22, 2019	Test Engineer:	J. Chiller
Standards:	CFR 47 Part 15.247(d); Part 15.209 / KDB558074	Air Temperature:	22.3°C
		Relative Humidity:	44%

Notes: The EUT was initially placed in a semi-anechoic chamber and rotated in all three orthogonal positions to maximize the emissions. Characterization measurements were then performed from 9 kHz to 26 GHz to determine at which frequencies significant emissions occurred.


The equipment was fully exercised with all cabling attached to the EUT and was positioned in a semi-anechoic chamber for maximum emissions. While the equipment was energized, the receiving antenna was scanned from 1.0 meter to 4.0 meters in both vertical and horizontal polarities while the turntable was adjusted 360 degrees to determine the maximum field strength. The tables of measured results can be found below and include data from all three channels.




Order Number: F2P21834

Client: Knox Company
Model(s): CC3100MODR11MAMOB

0.009 MHz to 0.15 MHz

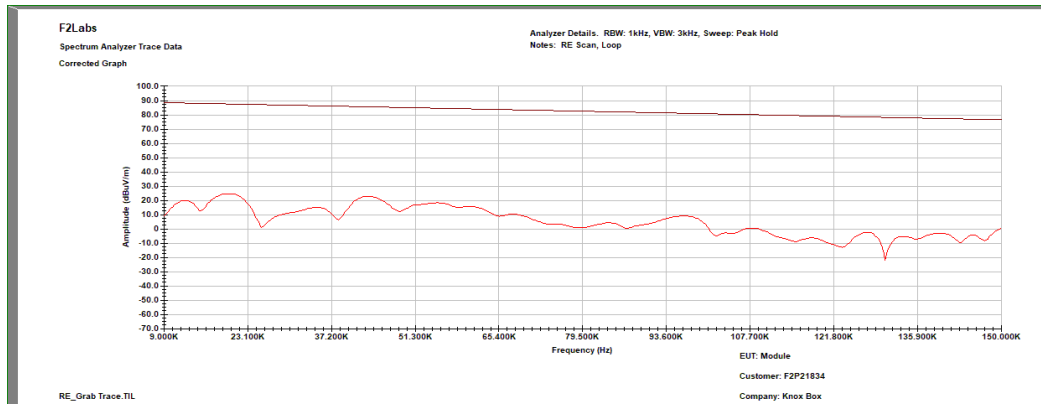


0.15 MHz to 30 MHz

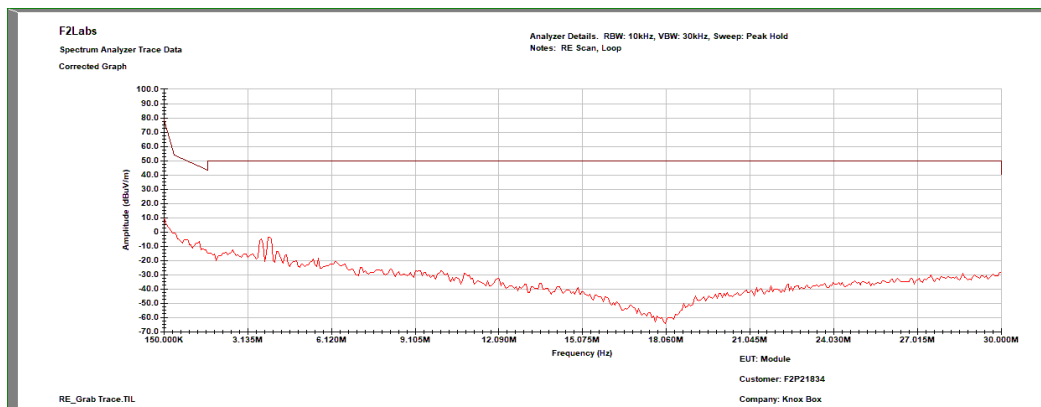




30 MHz to 1000 MHz, Vertical

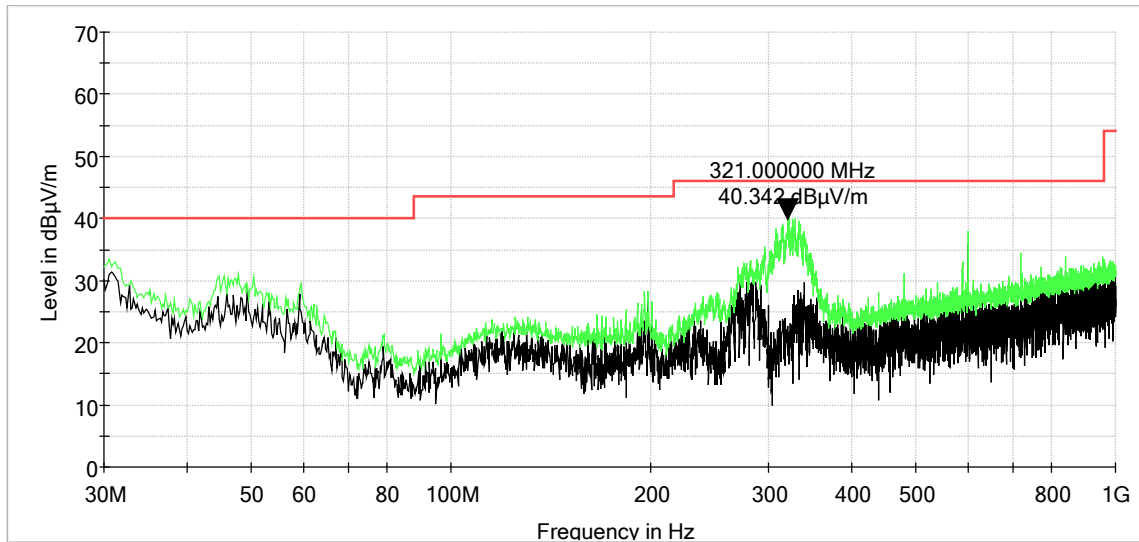


30 MHz to 1000 MHz, Horizontal

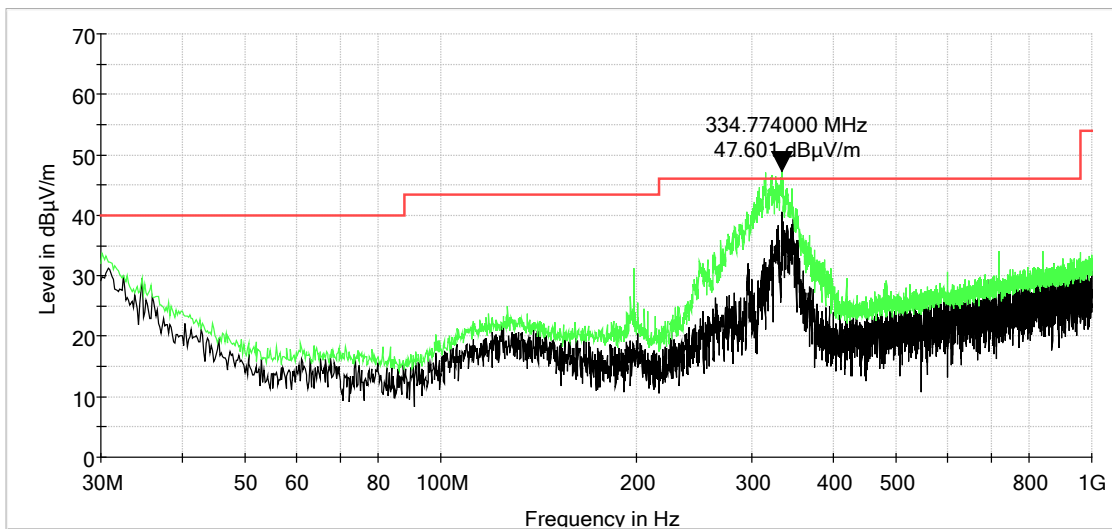




Channel 1: 1 GHz to 18 GHz - Vertical

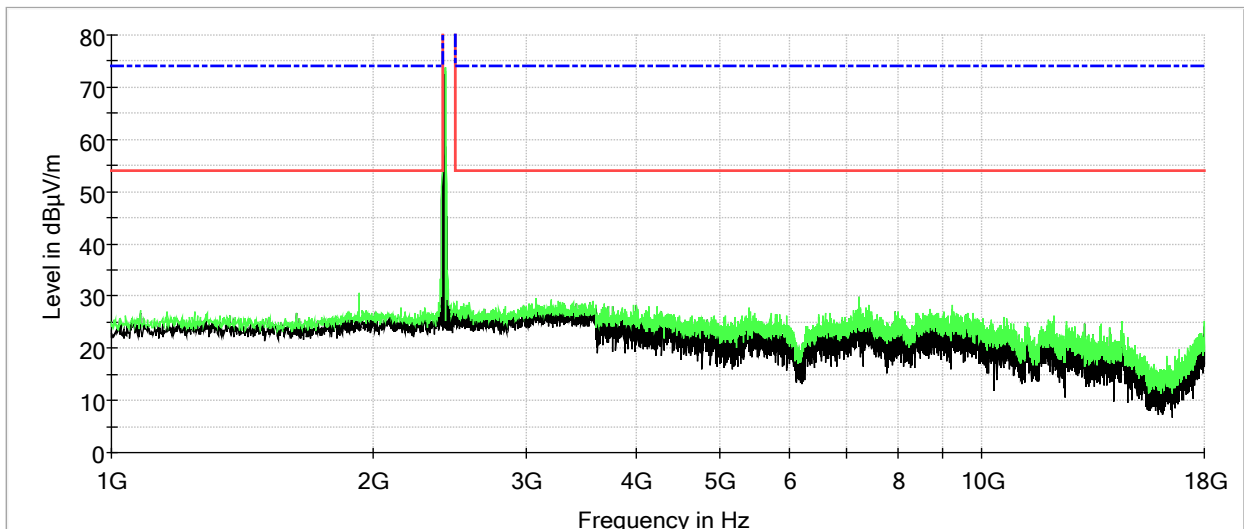


Channel 1: 18 GHz to 26 GHz - Vertical

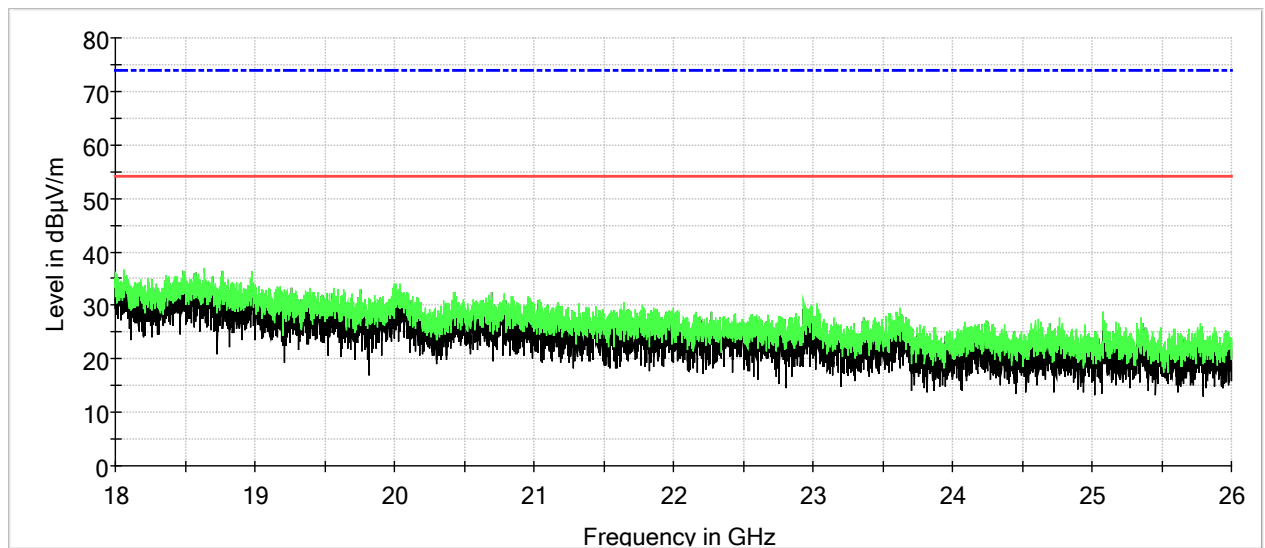




Channel 1: 1 GHz to 18 GHz - Horizontal

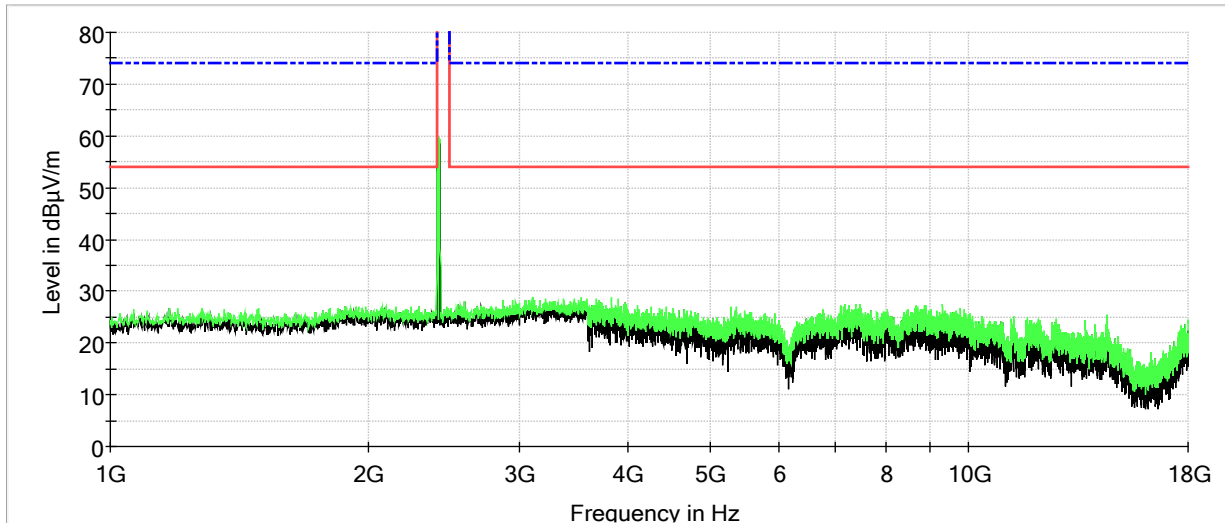


Channel 1: 18 GHz to 26 GHz - Horizontal

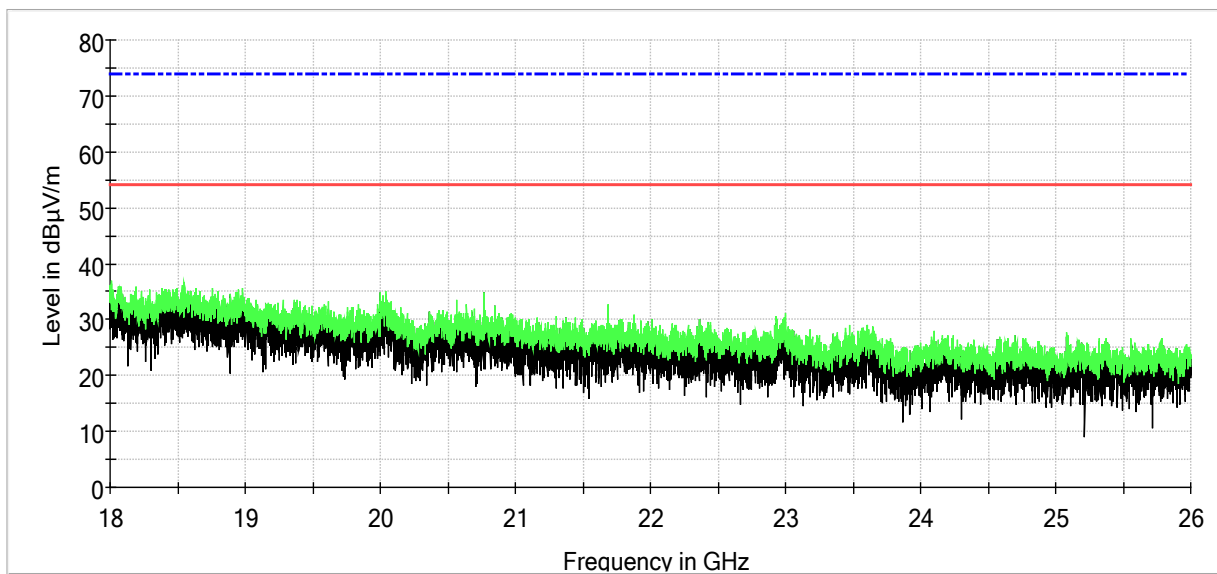




Channel 6: 1 GHz to 18 GHz - Vertical

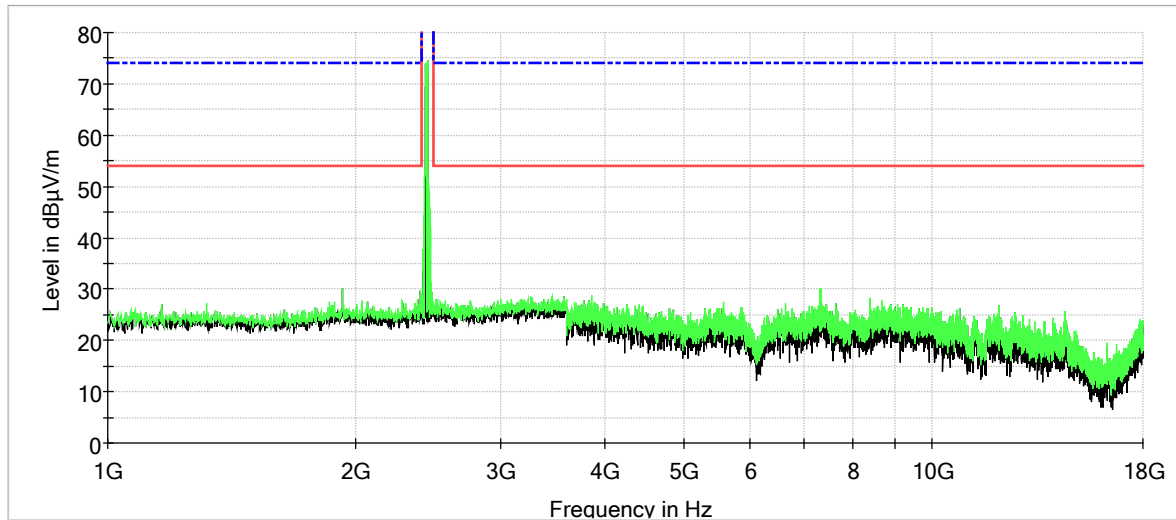


Channel 6: 18 GHz to 26 GHz - Vertical

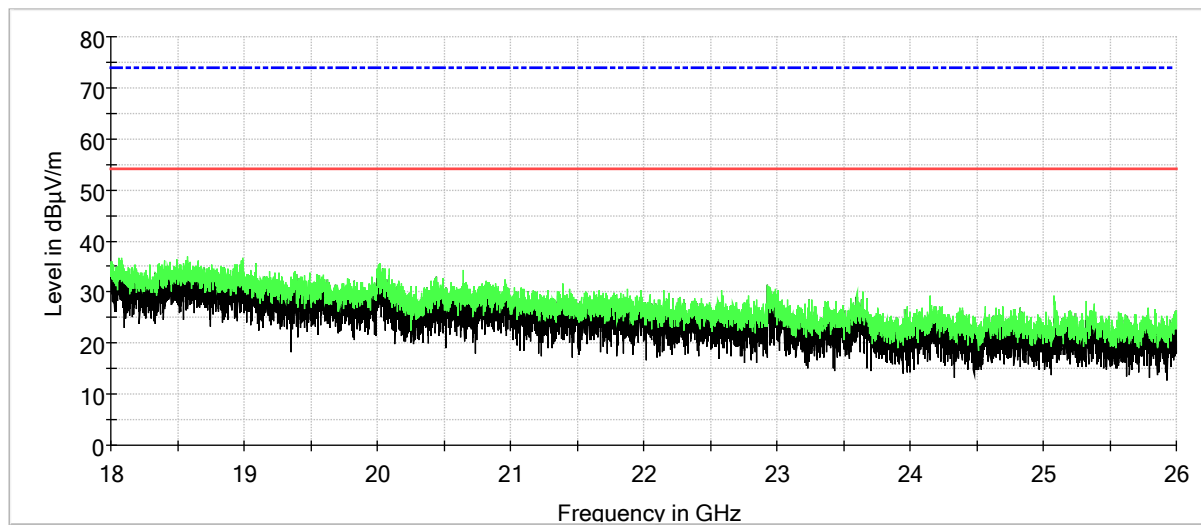




Channel 6: 1 GHz to 18 GHz - Horizontal

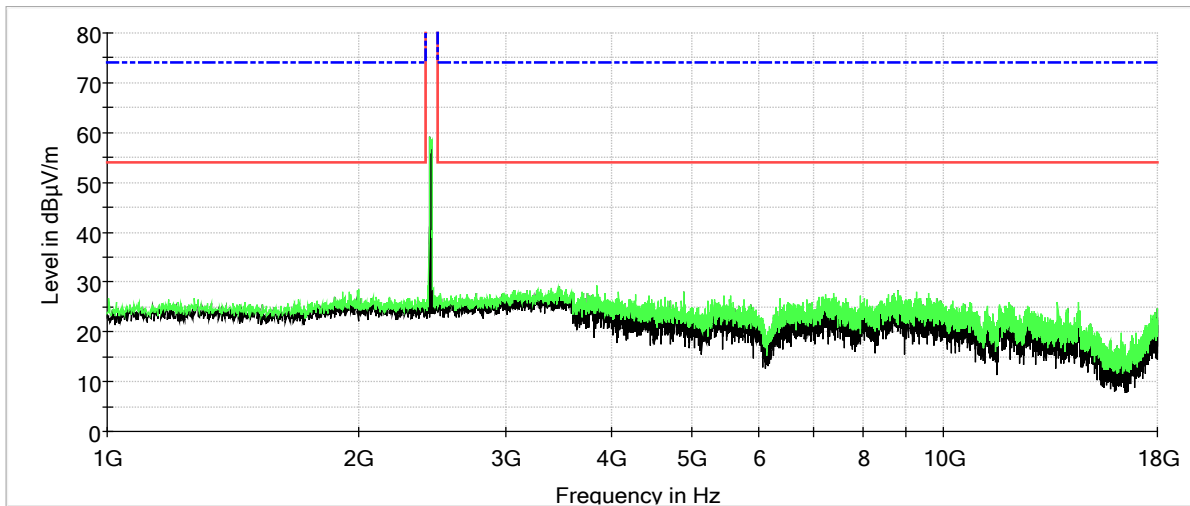


Channel 6: 18 GHz to 26 GHz - Horizontal

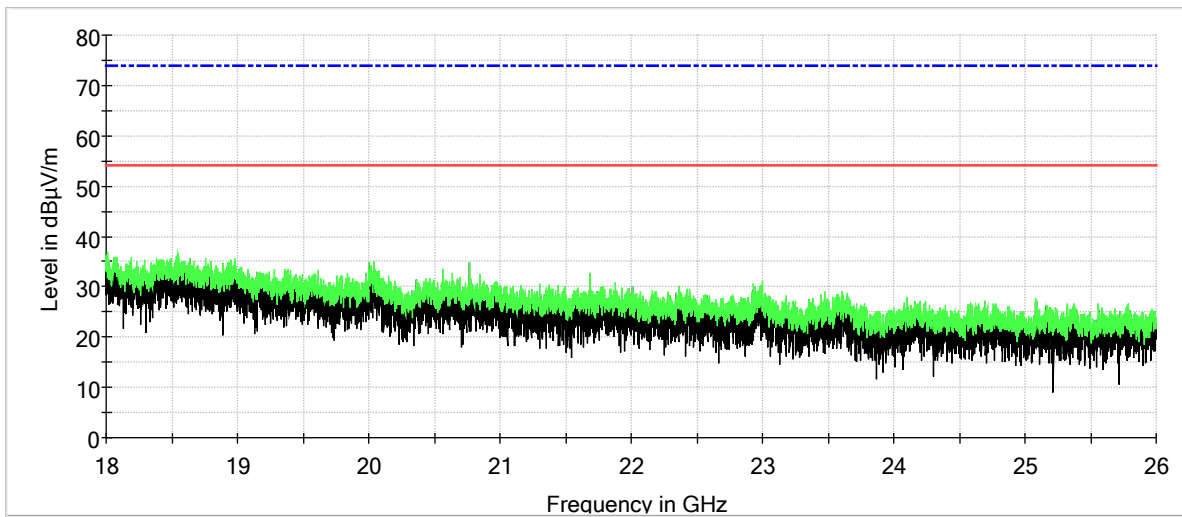




Channel 11: 1 GHz to 18 GHz - Vertical

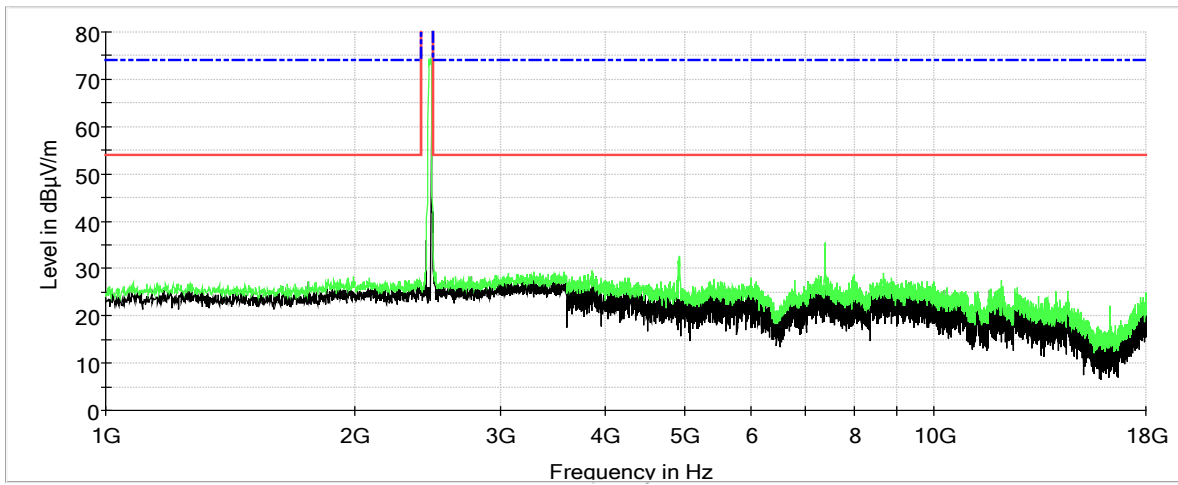


Channel 11: 18 GHz to 26 GHz - Vertical

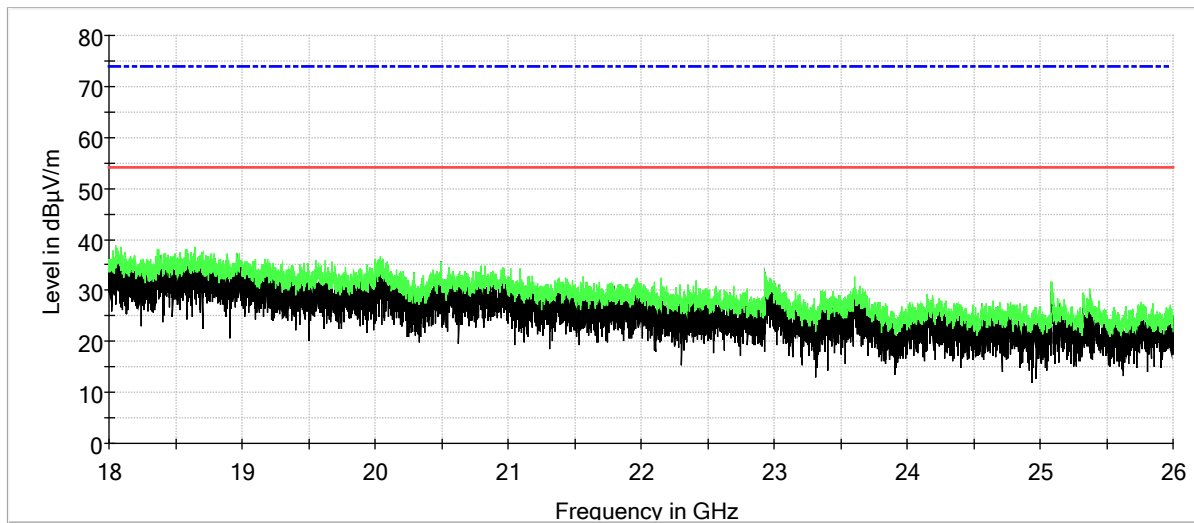




Channel 11: 1 GHz to 18 GHz - Horizontal

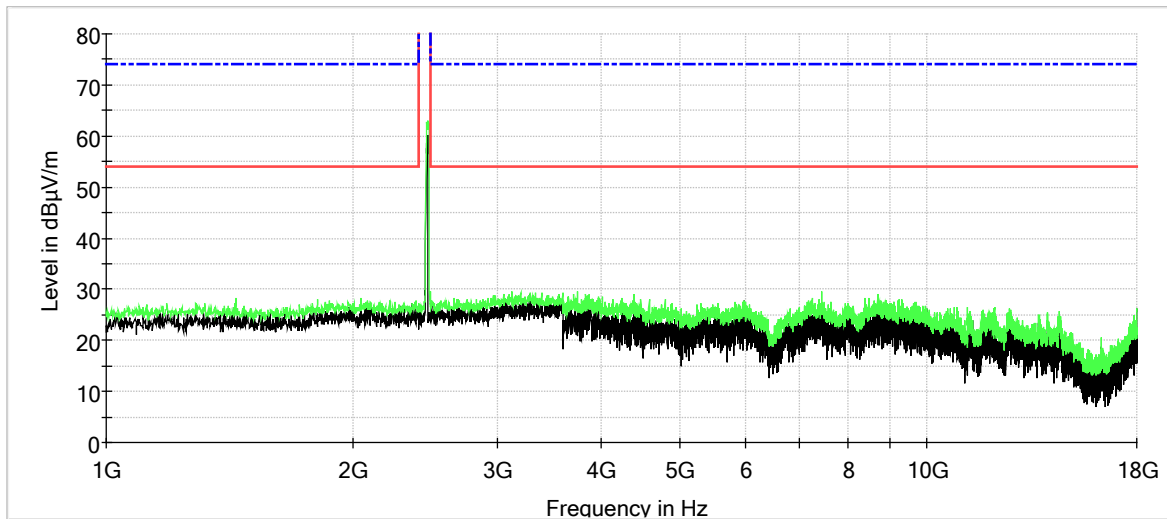

Channel 11: 18 GHz to 26 GHz - Horizontal

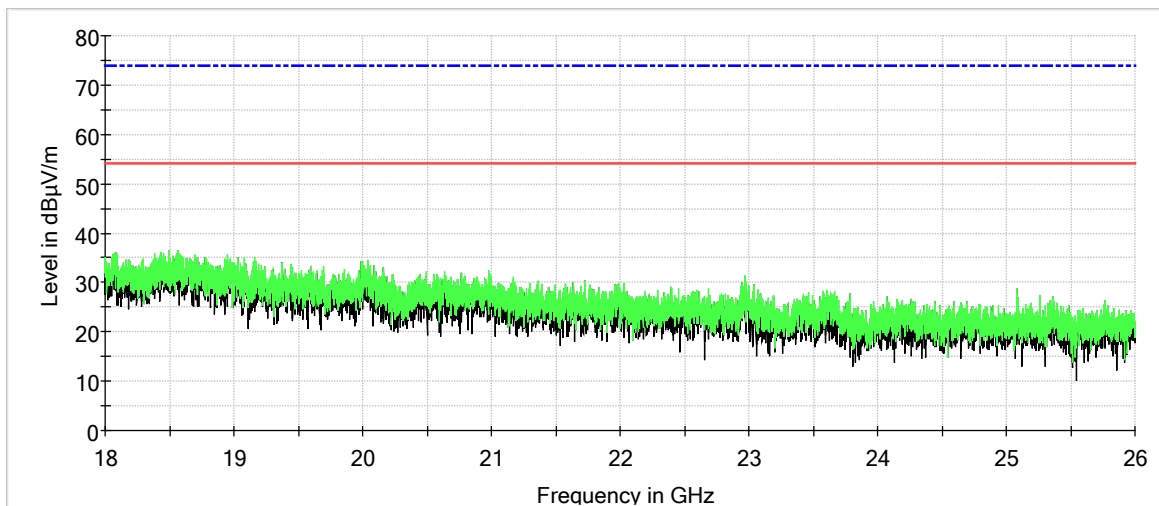




Measurements


Radiated Emissions with Restricted Bands

Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Azimuth (deg)	Reading (dB μ V)	Correction Factors (dB)	Emission (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.960000	V	100.00	295.00	23.2	5.9	29.10	40.0	-10.9
44.760000	V	105.00	10.00	30.4	-4.0	26.40	40.0	-13.6
47.840000	V	110.00	10.00	31.6	-5.7	25.90	40.0	-14.1
50.360000	V	110.00	10.00	31.7	-6.6	25.10	40.0	-14.9
59.480000	V	100.00	356.00	33.2	-7.5	25.70	40.0	-14.3
198.000000	H	100.00	248.00	31.0	-2.7	28.30	43.5	-15.2
312.840000	H	100.00	223.00	44.7	-1.2	43.50	46.0	-2.5
314.400000	V	100.00	189.00	37.3	-1.2	36.10	46.0	-9.9
315.760000	H	100.00	231.00	45.1	-1.1	44.00	46.0	-2.0
321.000000	V	100.00	189.00	39.0	-1.0	38.00	46.0	-8.0
322.560000	H	100.00	231.00	45.2	-1.0	44.20	46.0	-1.8
327.200000	H	100.00	231.00	45.6	-1.0	44.60	46.0	-1.4
334.200000	V	100.00	189.00	39.1	-0.9	38.20	46.0	-7.8
334.760000	H	100.00	231.00	45.3	-0.9	44.40	46.0	-1.6
340.600000	H	100.00	231.00	43.7	-0.8	42.90	46.0	-3.1
599.960000	V	100.00	125.00	33.0	3.7	36.70	46.0	-9.3

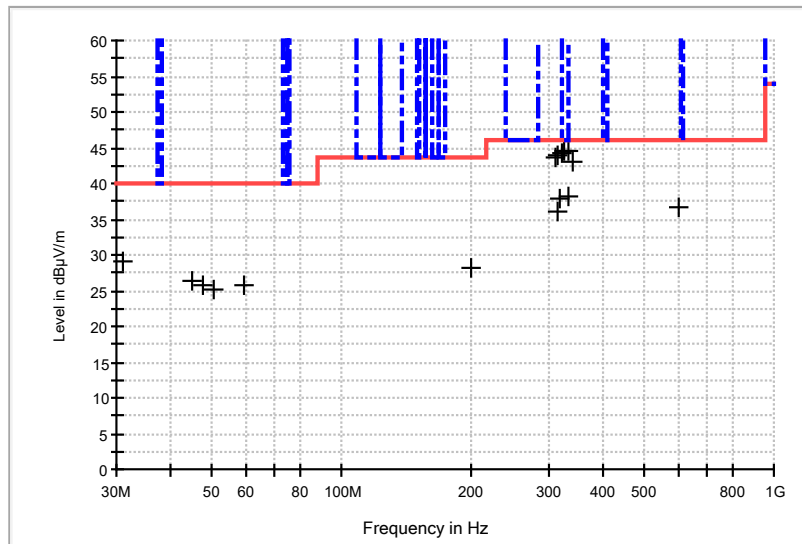


7 PHOTOGRAPHS


Radiated Spurious Emission, Loop Antenna

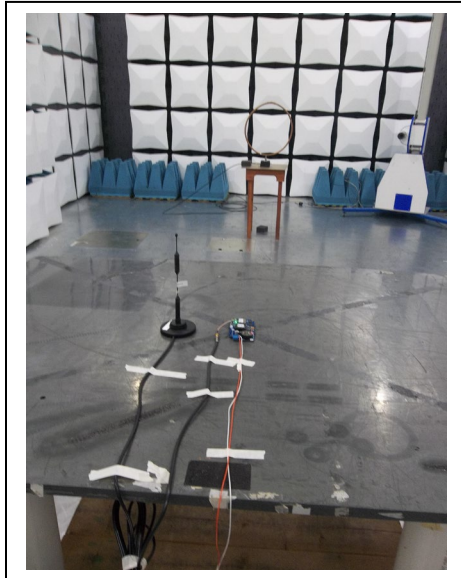

Radiated Spurious Emission, 30 MHz to 1 GHz

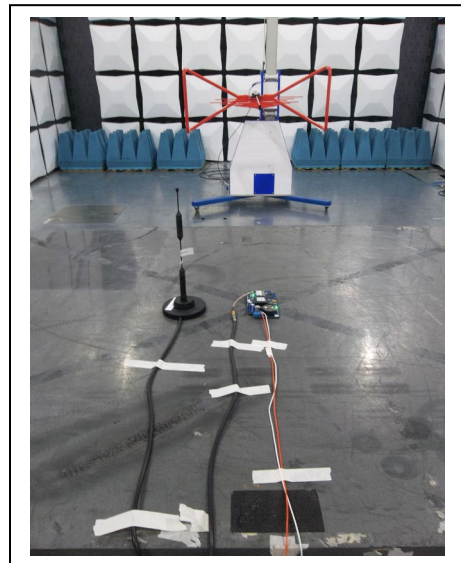

Radiated Spurious Emission, 1 GHz to 18 GHz

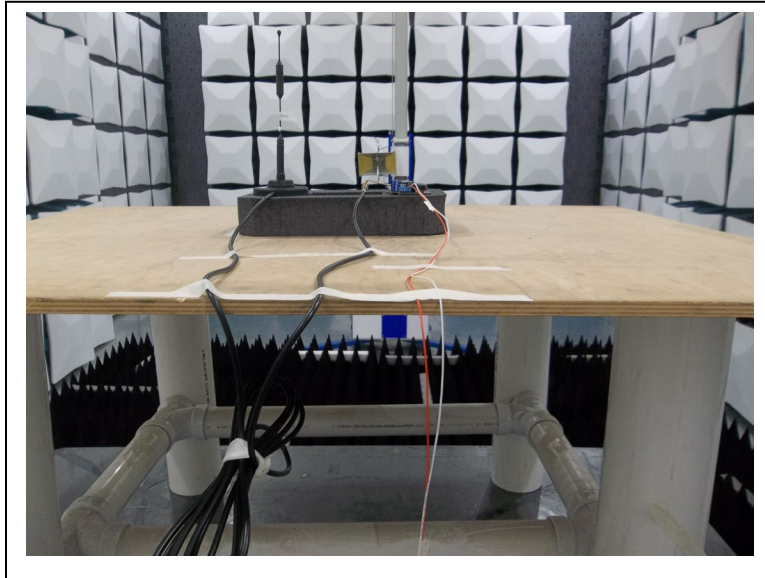

Radiated Spurious Emission, 18 GHz to 26 GHz

