

Appendix A

RF Test Data for BT(BLE) (Conducted Measurement)

Product Name: RCU

Trade Mark: N/A

Test Model: B100

FCC ID: 2AOVU-B100


Environmental Conditions

Temperature:	24.5° C
Relative Humidity:	60%
ATM Pressure:	100.0 kPa
Test Engineer:	Gary Qian
Supervised by:	Eden Hu


1.6dB Bandwidth

Test Mode	Test Channel	Ant	EBW[MHz]	Limit	Verdict
BLE	2402	Ant1	1.075	0.5	PASS
BLE	2440	Ant1	1.119	0.5	PASS
BLE	2480	Ant1	1.092	0.5	PASS


6dB Bandwidth_BLE_2402_Ant1

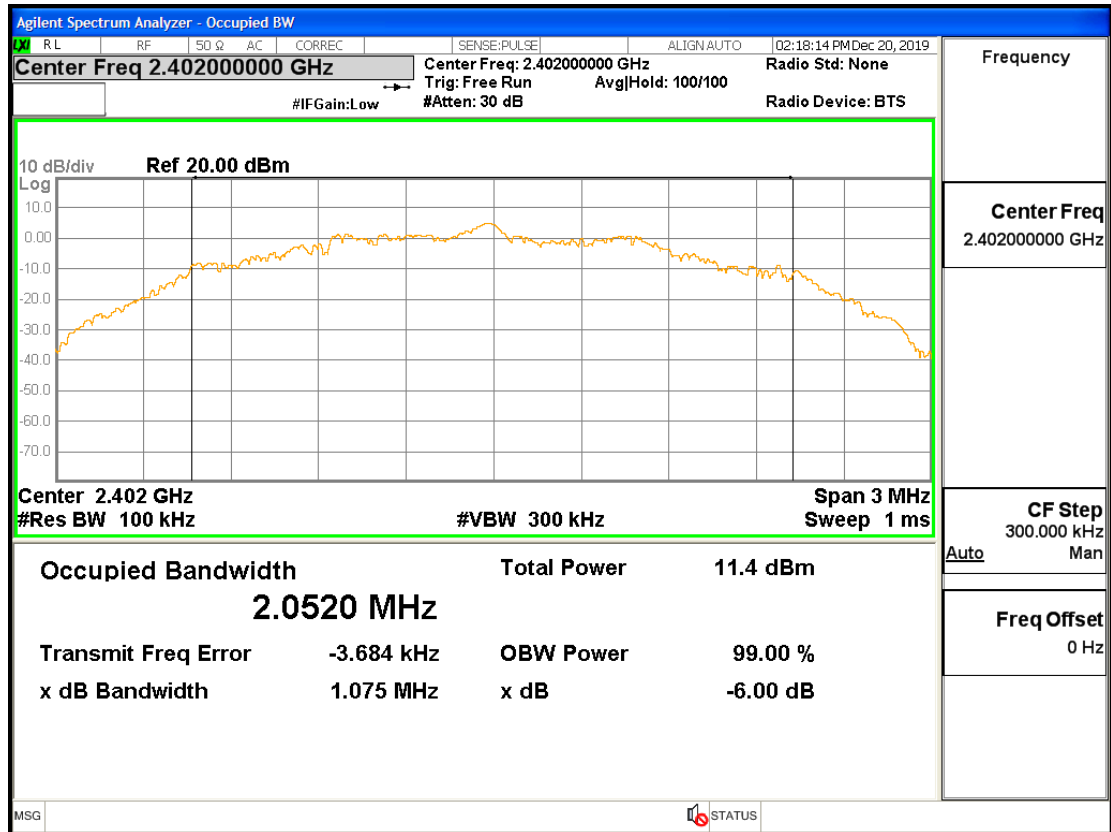

6dB Bandwidth_BLE_2440_Ant1

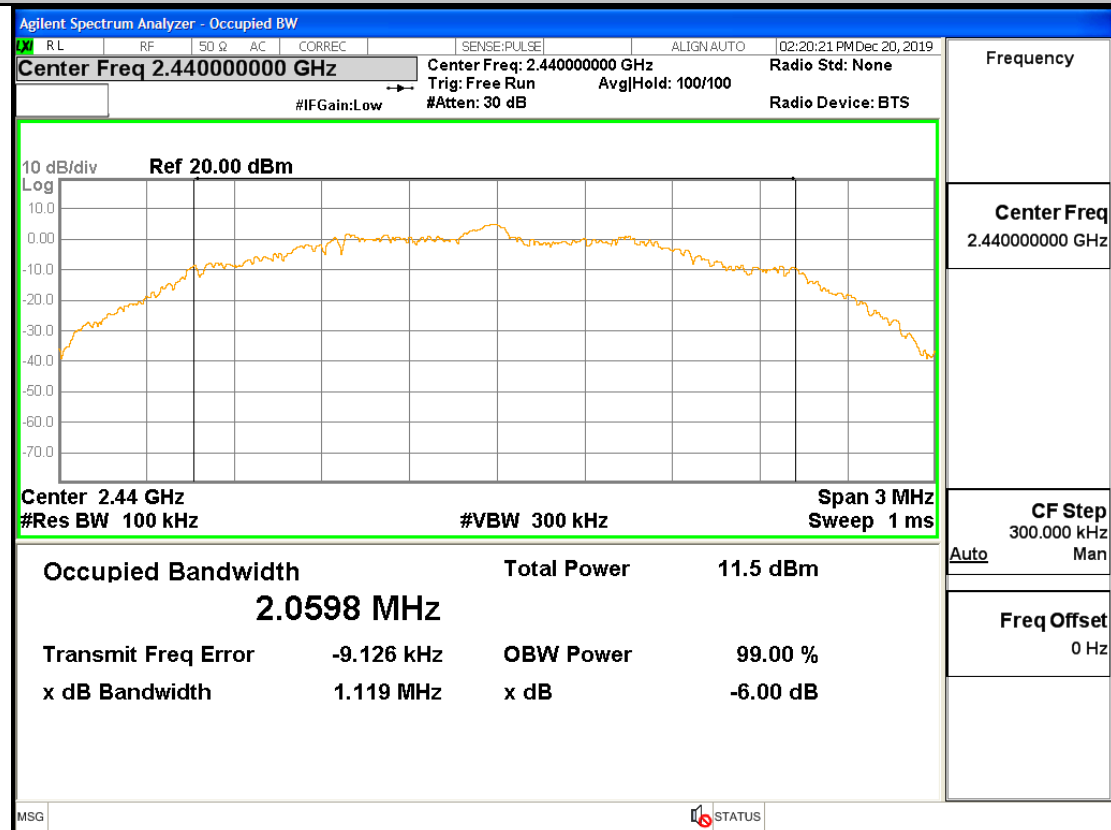

6dB Bandwidth_BLE_2480_Ant1

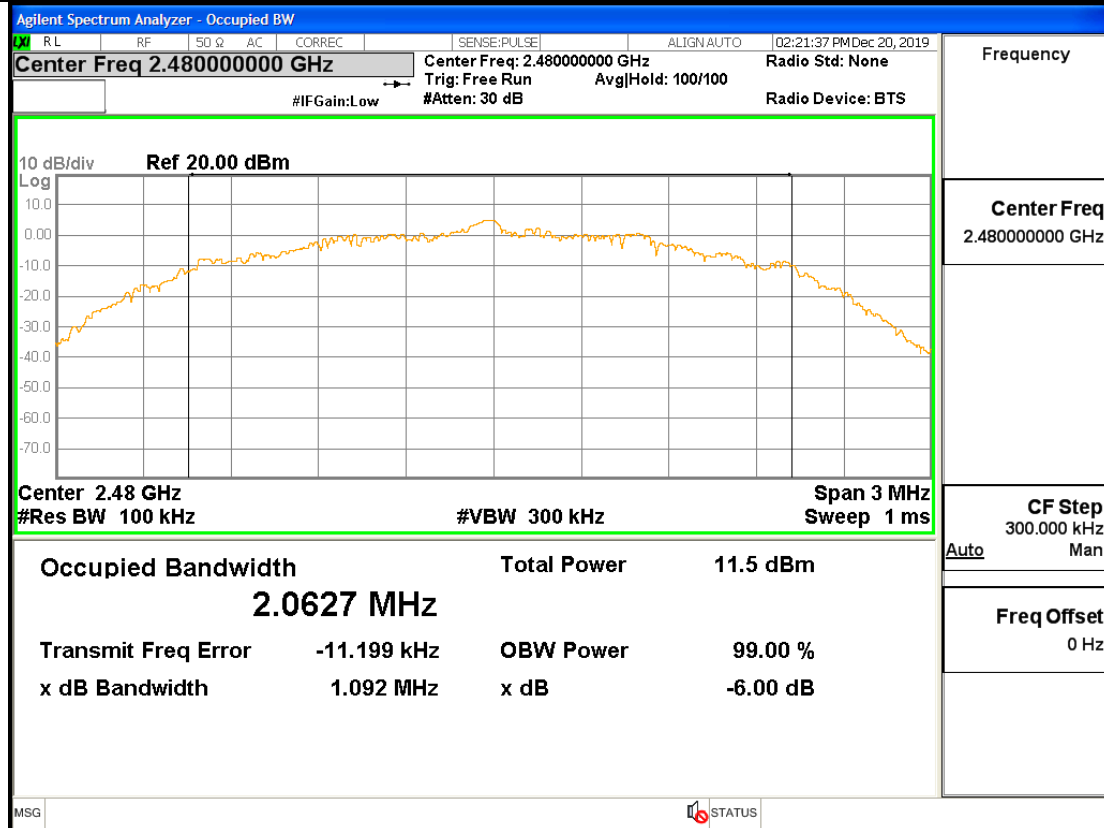


2.Occupied Bandwidth

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
-----------	--------------	-----	----------	------------	---------


3.Maximum peak conducted output power

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	5.023	30	PASS
BLE	2440	Ant1	5.191	30	PASS
BLE	2480	Ant1	5.287	30	PASS


Maximum peak conducted output power_BLE_2402_Ant1

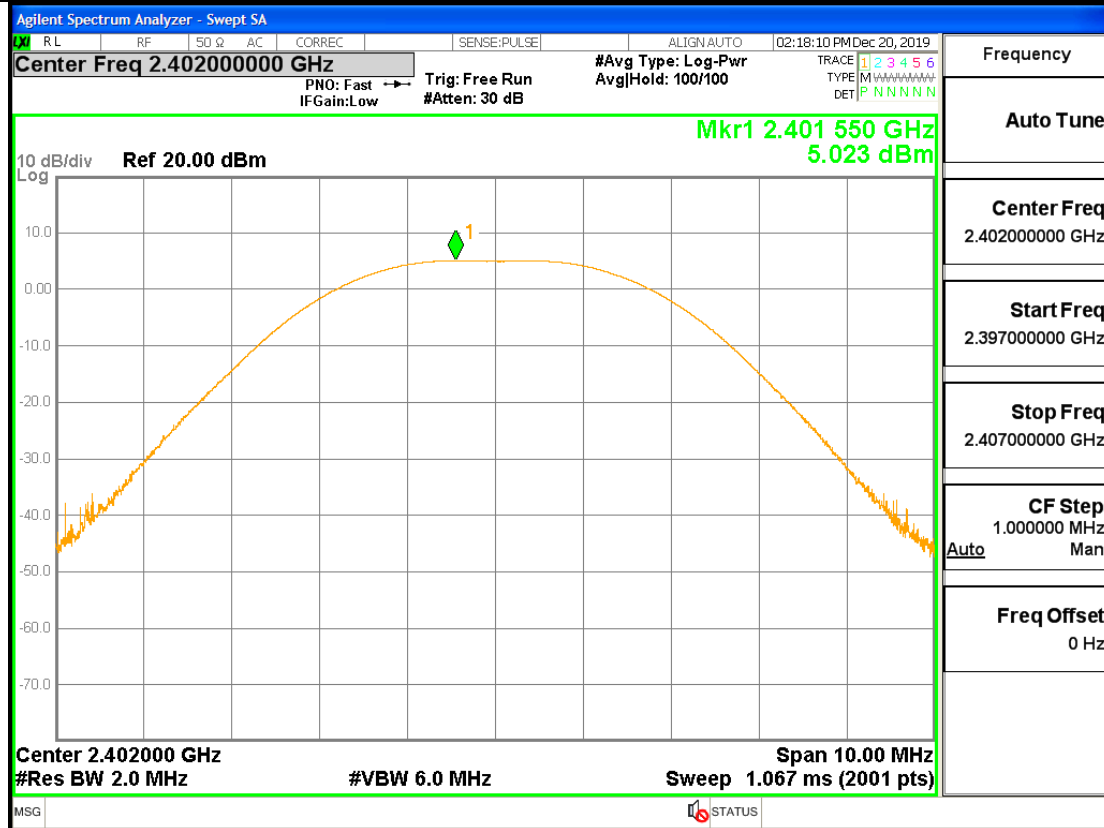

Maximum peak conducted output power_BLE_2440_Ant1

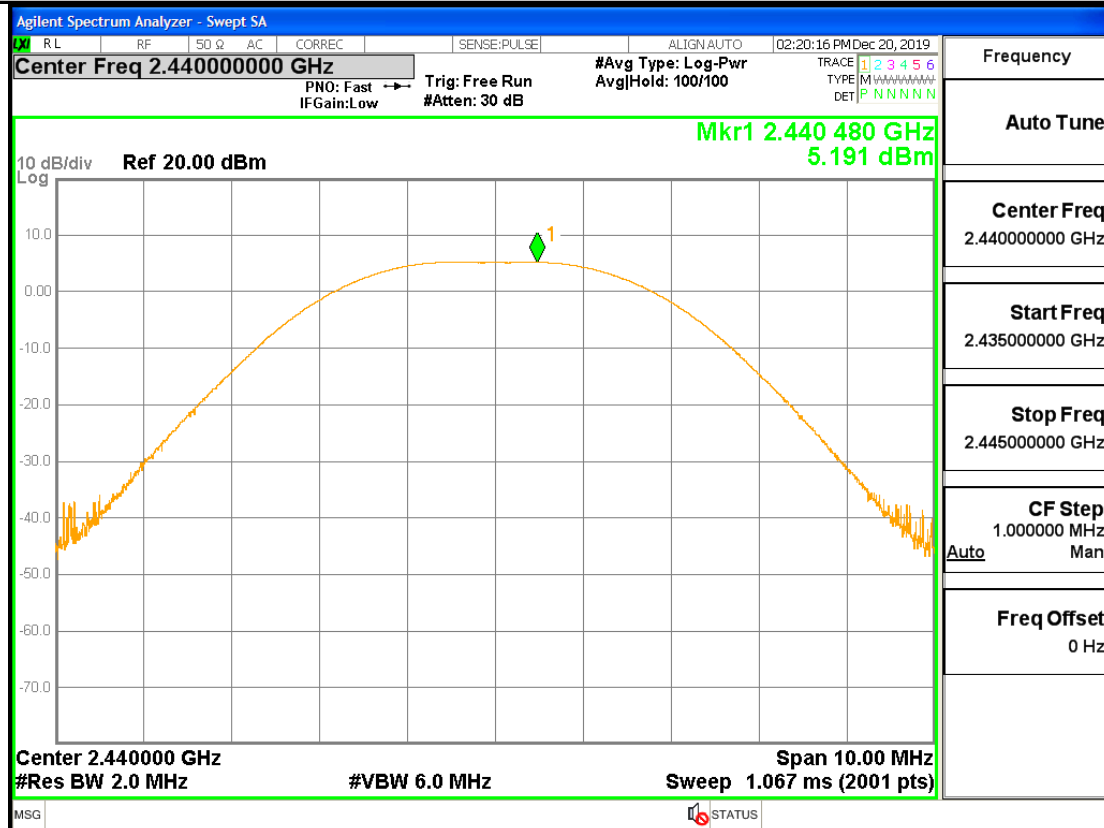


Maximum peak conducted output power_BLE_2480_Ant1

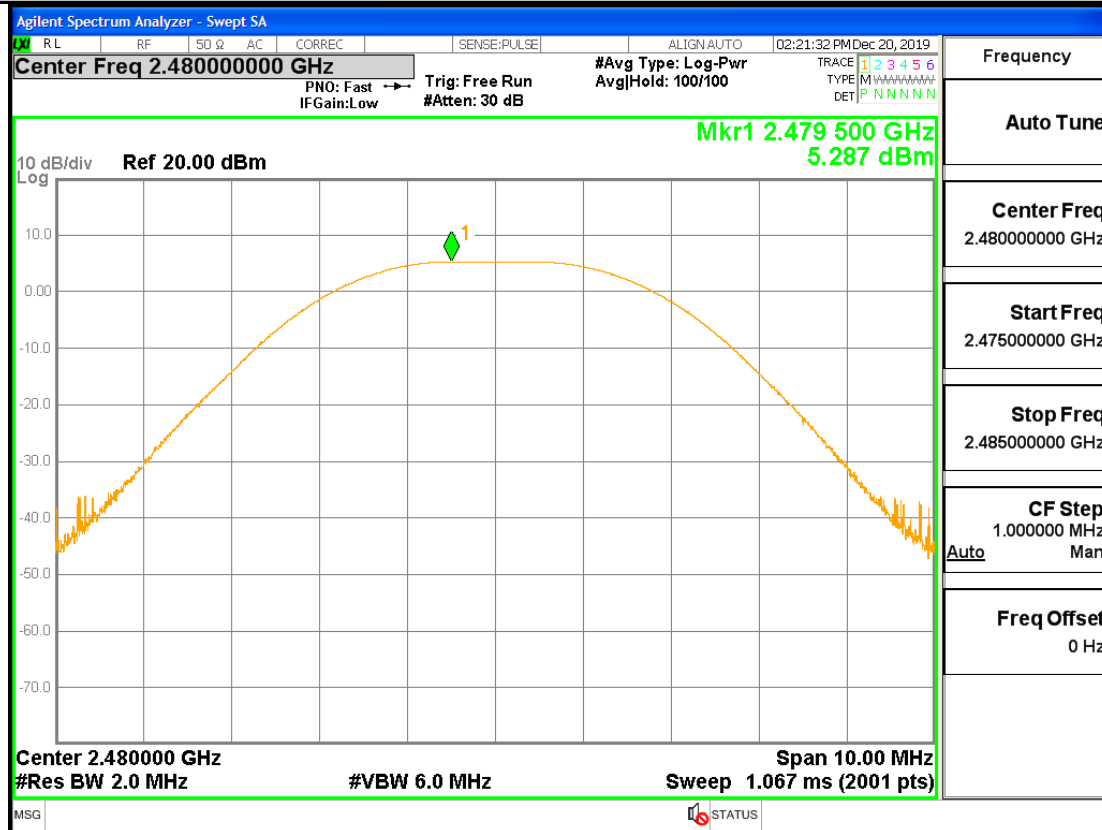


4.Maximum Peak power spectral density

Test Mode	Test Channel	Ant	PSD[dBm/3KHz]	Limit[dBm/3KHz]	Verdict
BLE	2402	Ant1	-12.224	8.00	PASS
BLE	2440	Ant1	-11.936	8.00	PASS
BLE	2480	Ant1	-12.269	8.00	PASS


Maximum Peak power spectral density_BLE_2402_Ant1

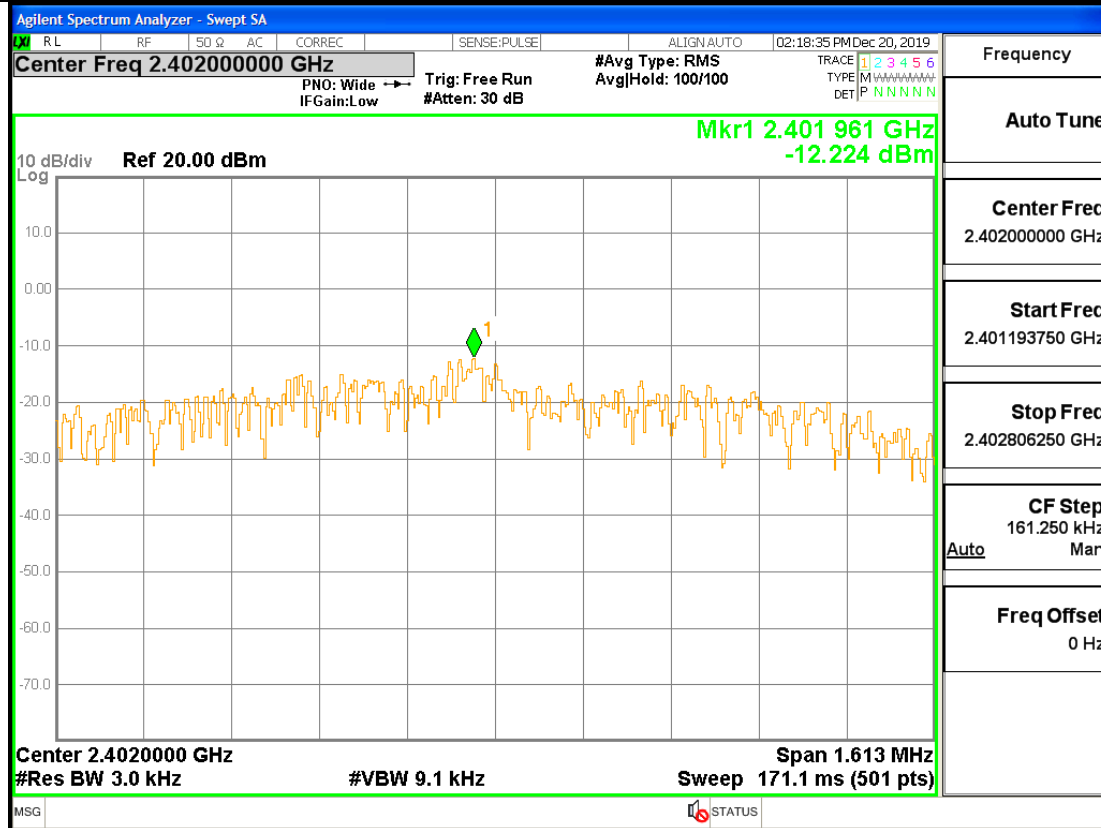

Maximum Peak power spectral density_BLE_2440_Ant1

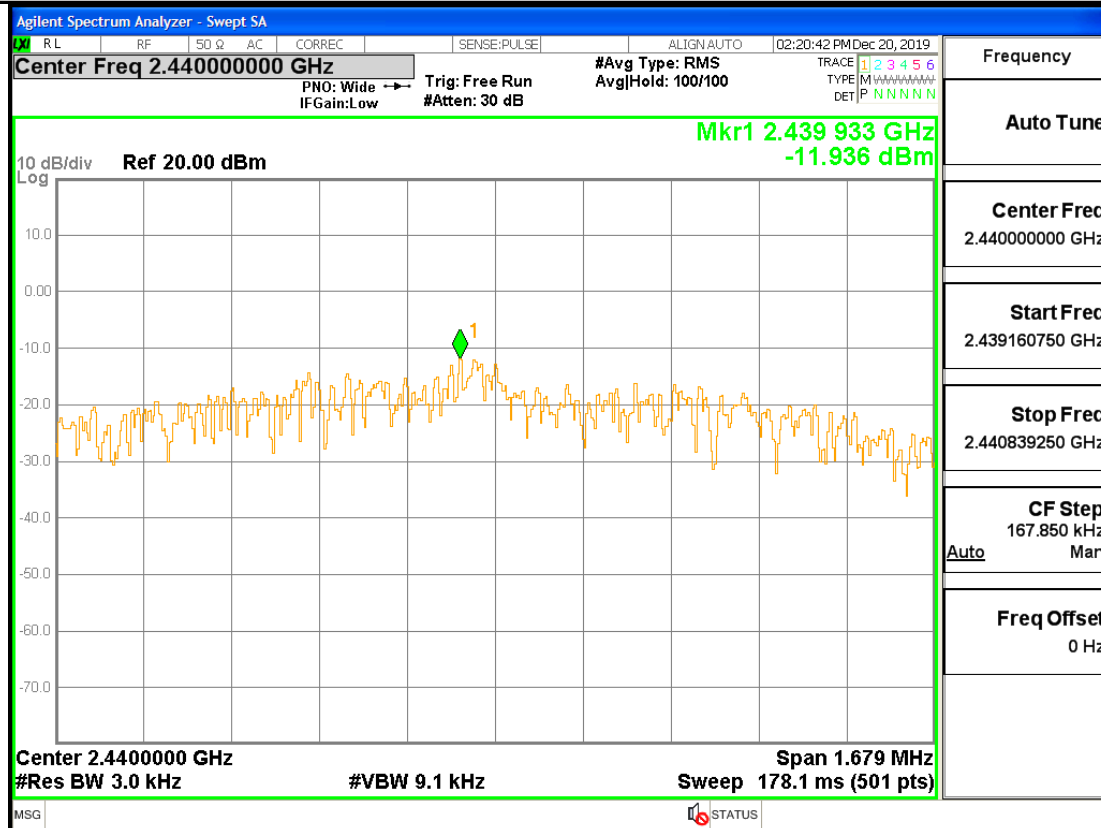


Maximum Peak power spectral density_BLE_2480_Ant1

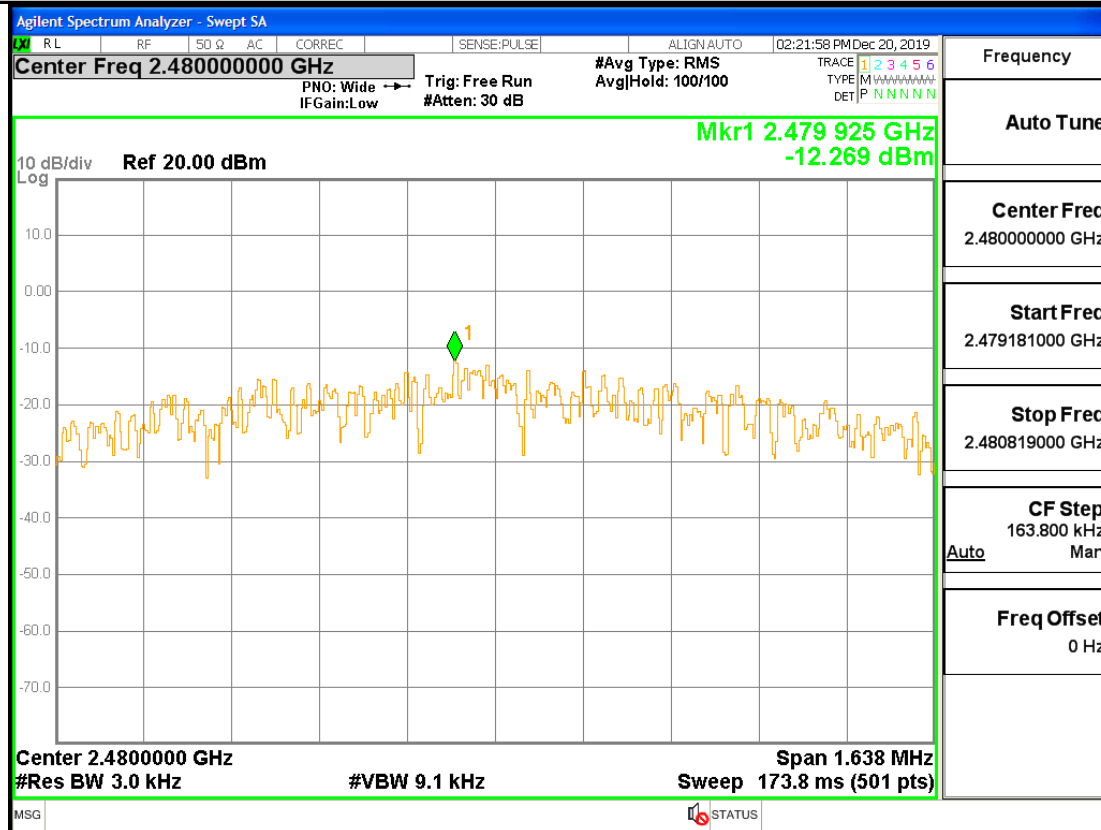


5.Band-edge for RF Conducted Emissions

Type	Carrier Frequency(MHz)	Frequency(MHz)	Carrier Frequency Power [dBm]	Bandedge Peak(dBm)	Upper limit(dBm)	Conclusion
BLE	2402	2400	4.756	-29.72	-15.244	Pass
BLE	2480	2483.714	4.997	-54.702	-15.003	Pass

Band-edge for RF Conducted Emissions_BLE_2402_Ant1


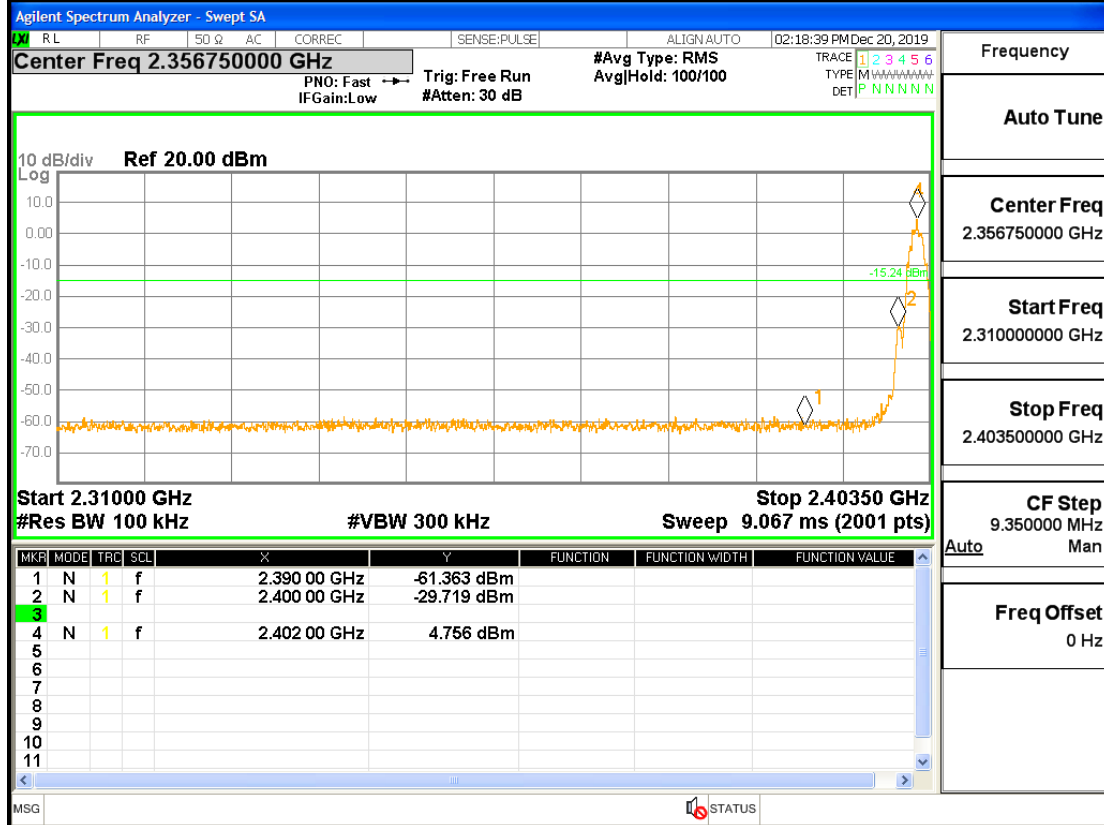


Band-edge for RF Conducted Emissions_BLE_2480_Ant1


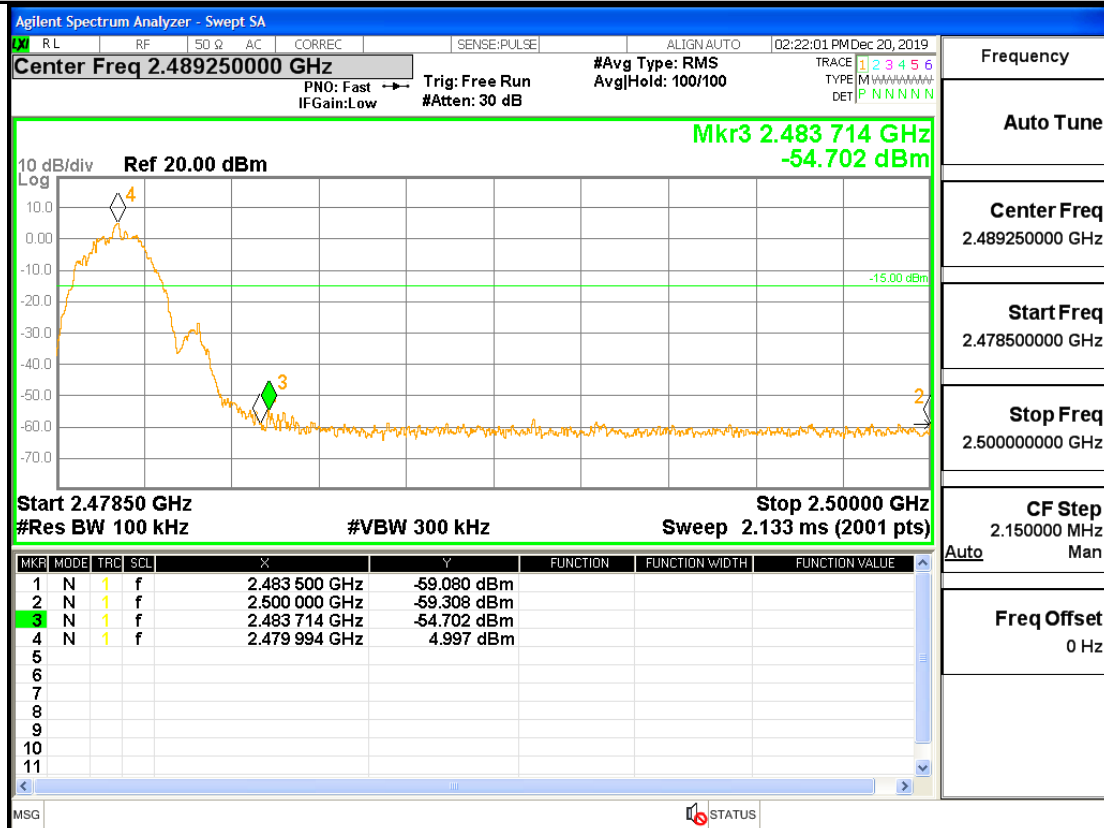


6.RF Conducted Spurious Emissions



RF Conducted Spurious Emissions_BLE_2402_Ant1

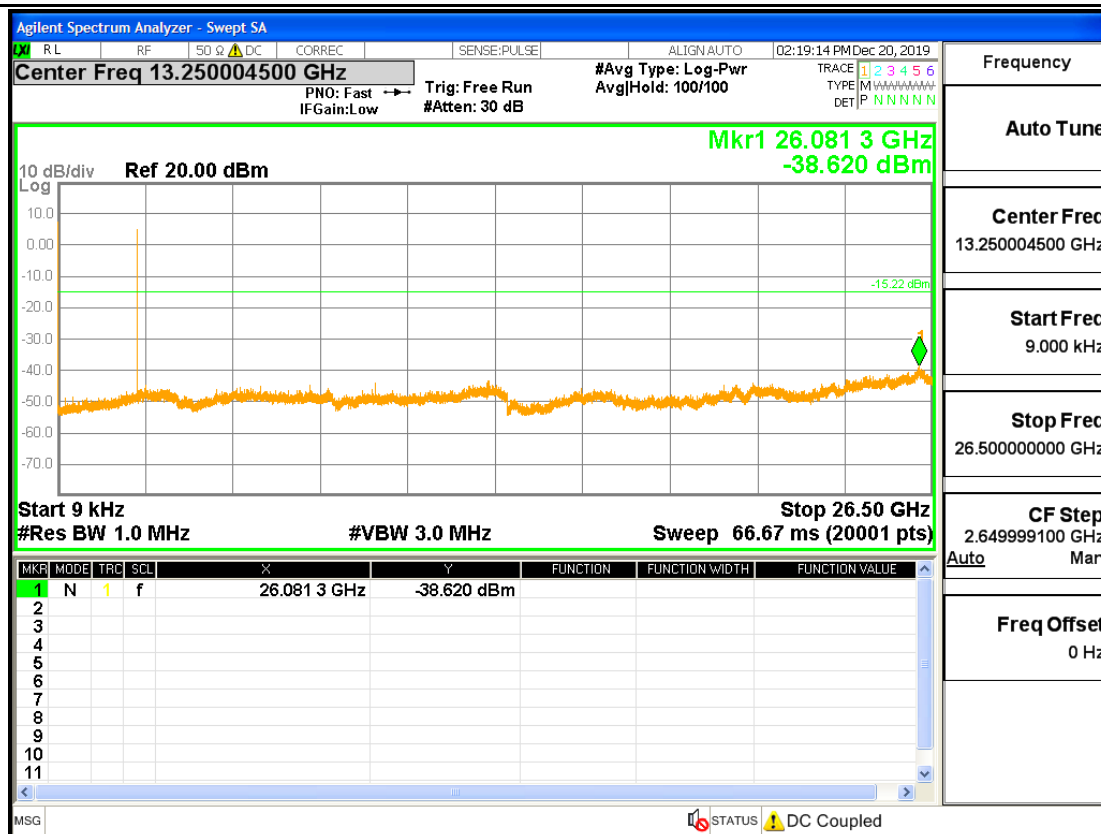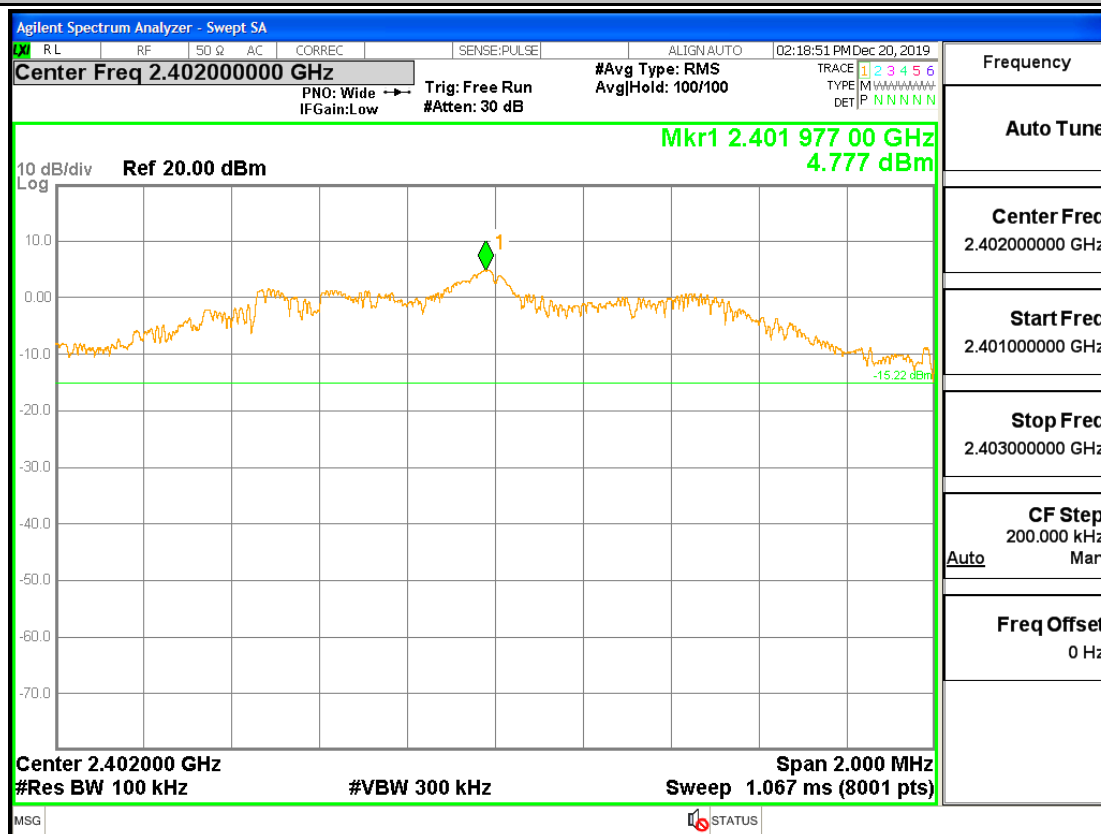

RF Conducted Spurious Emissions_BLE_2440_Ant1

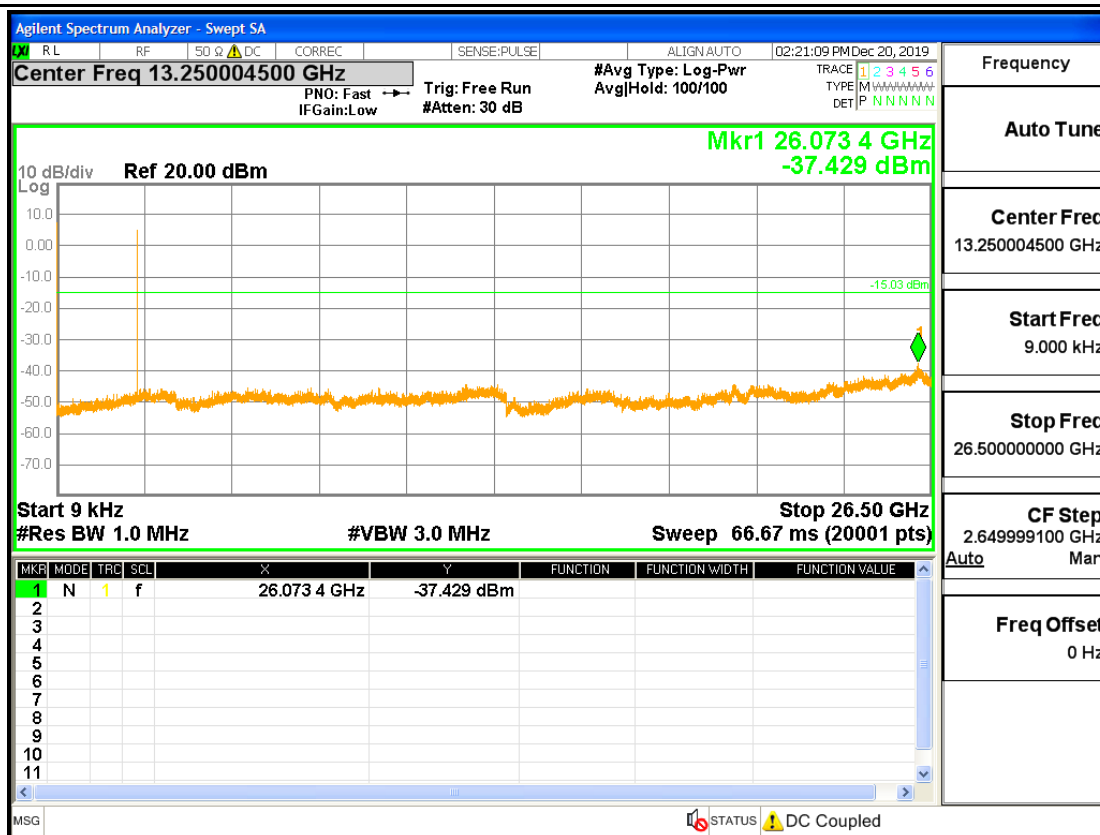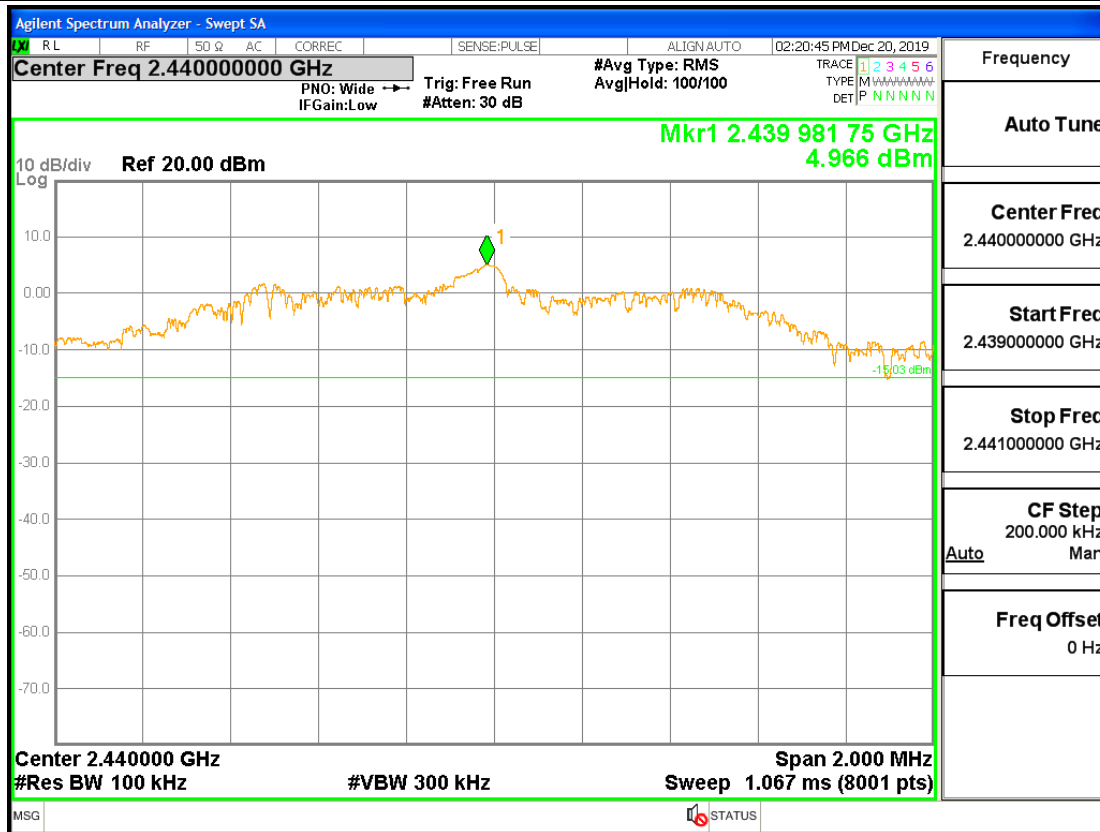

RF Conducted Spurious Emissions_BLE_2480_Ant1

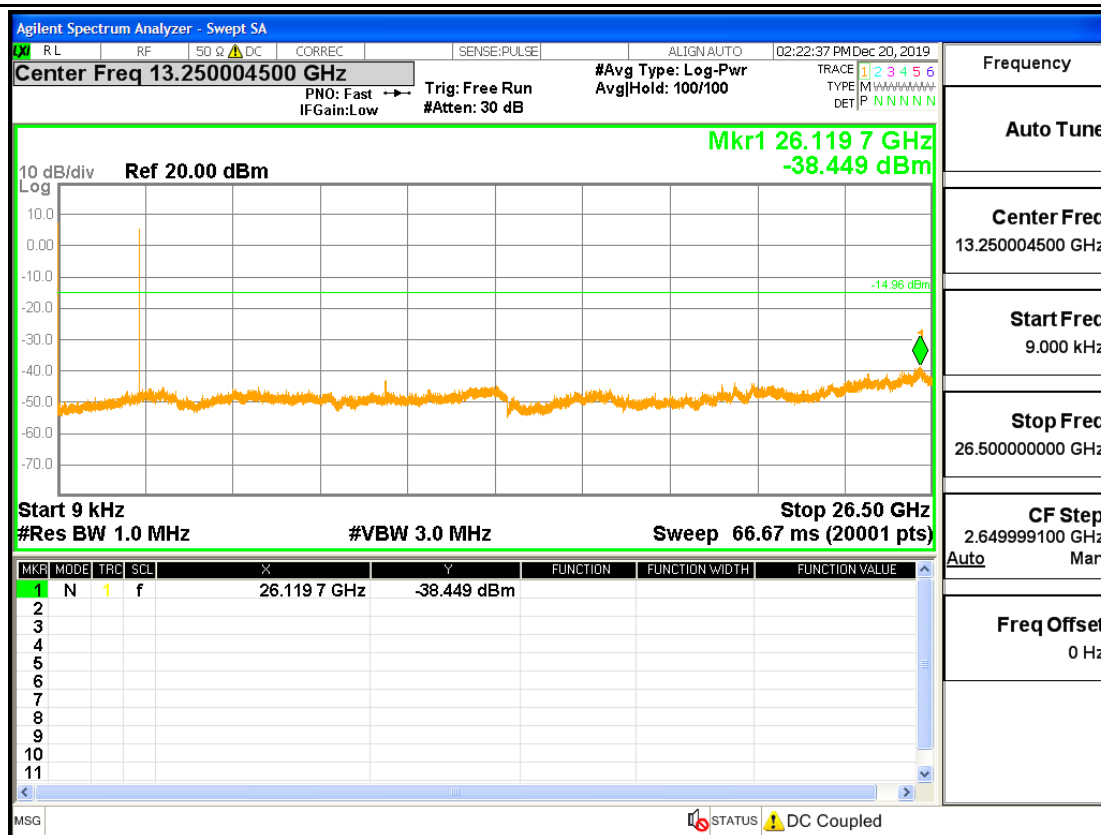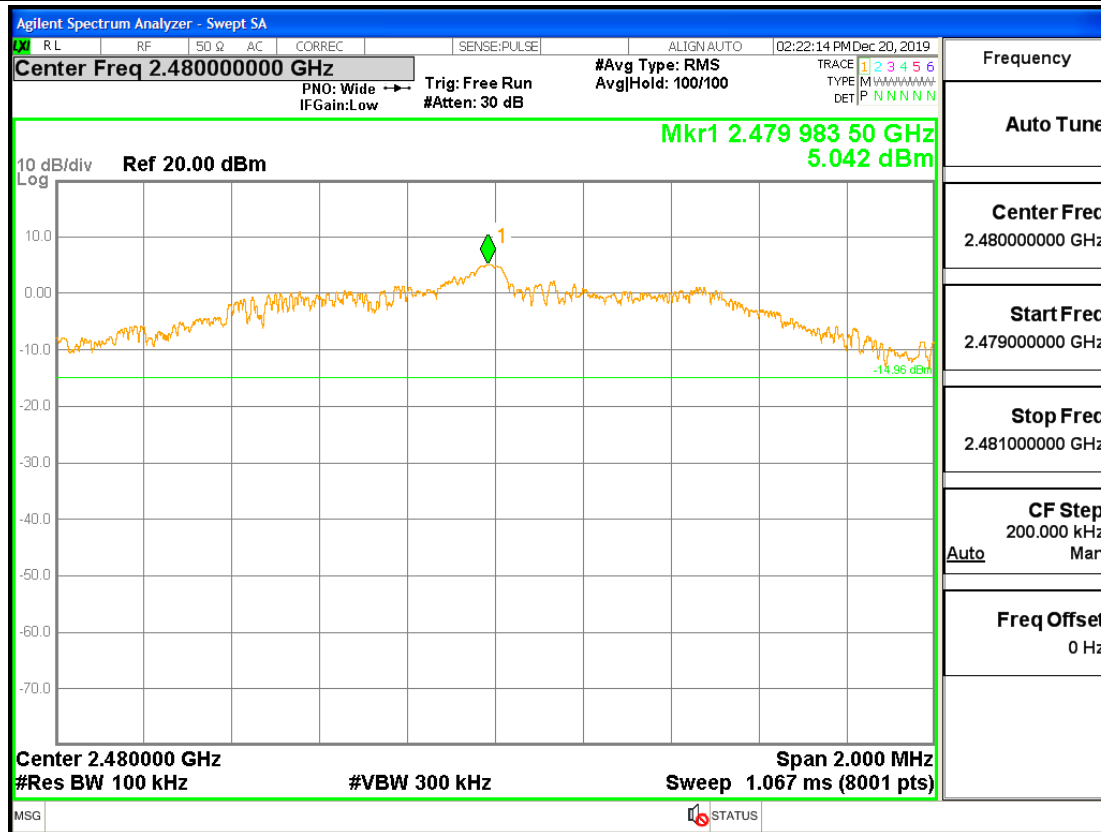


7.Restrict-band band-edge measurements


Type	Carrier Frequency (MHz)	Frequency(MHz)	Gain	Ground Factor	Peak Value(dBm)	E [dBuV/m]	Limit [dBuV/m]	Conclusion
1DH5	2402	2390	2.08	0.00	-51.402	45.878	74	Pass
1DH5	2480	2483.746	2.08	0.00	-38.774	58.506	74	Pass

Type	Carrier Frequency (MHz)	Frequency(MHz)	Gain	Ground Factor	Average Value(dBm)	E [dBuV/m]	Limit [dBuV/m]	Conclusion
1DH5	2402	2390	2.08	0.00	-57.272	40.008	54	Pass
1DH5	2480	2483.746	2.08	0.00	-46.305	50.975	54	Pass


Restrict-band band-edge measurements_BLE_2402_Ant1_PEAK

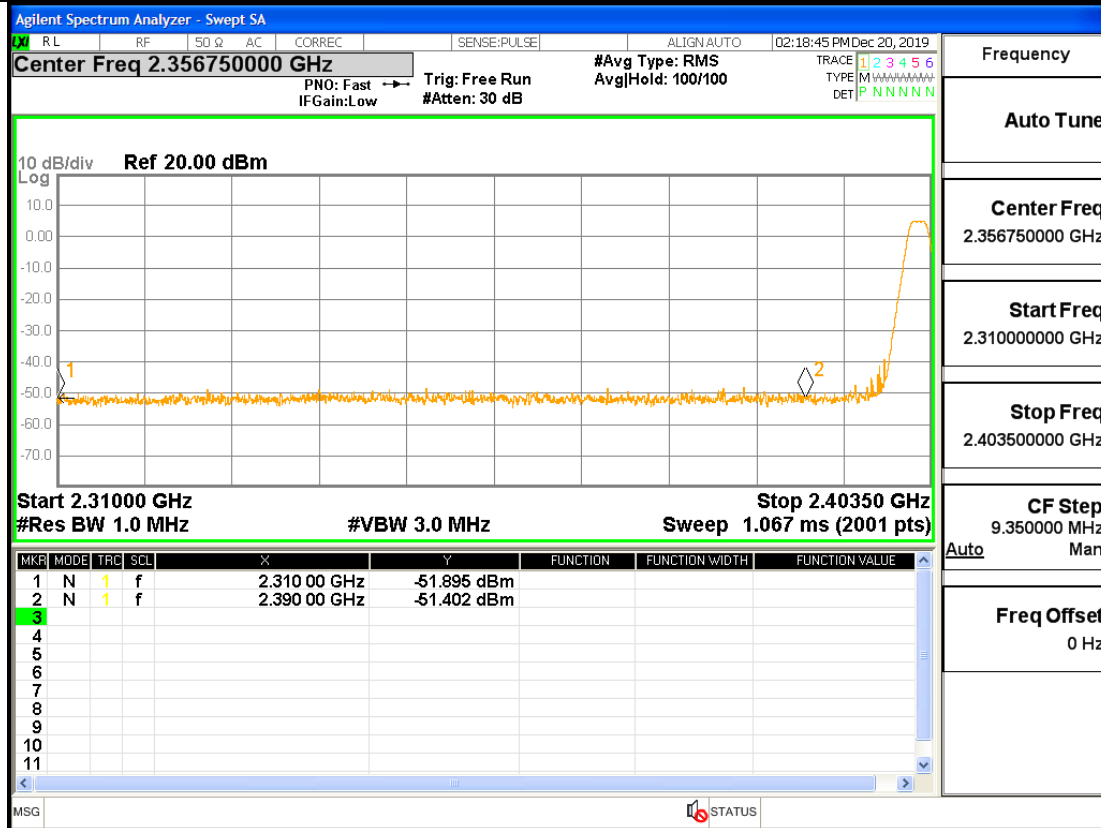


Restrict-band band-edge measurements_BLE_2402_Ant1_AV

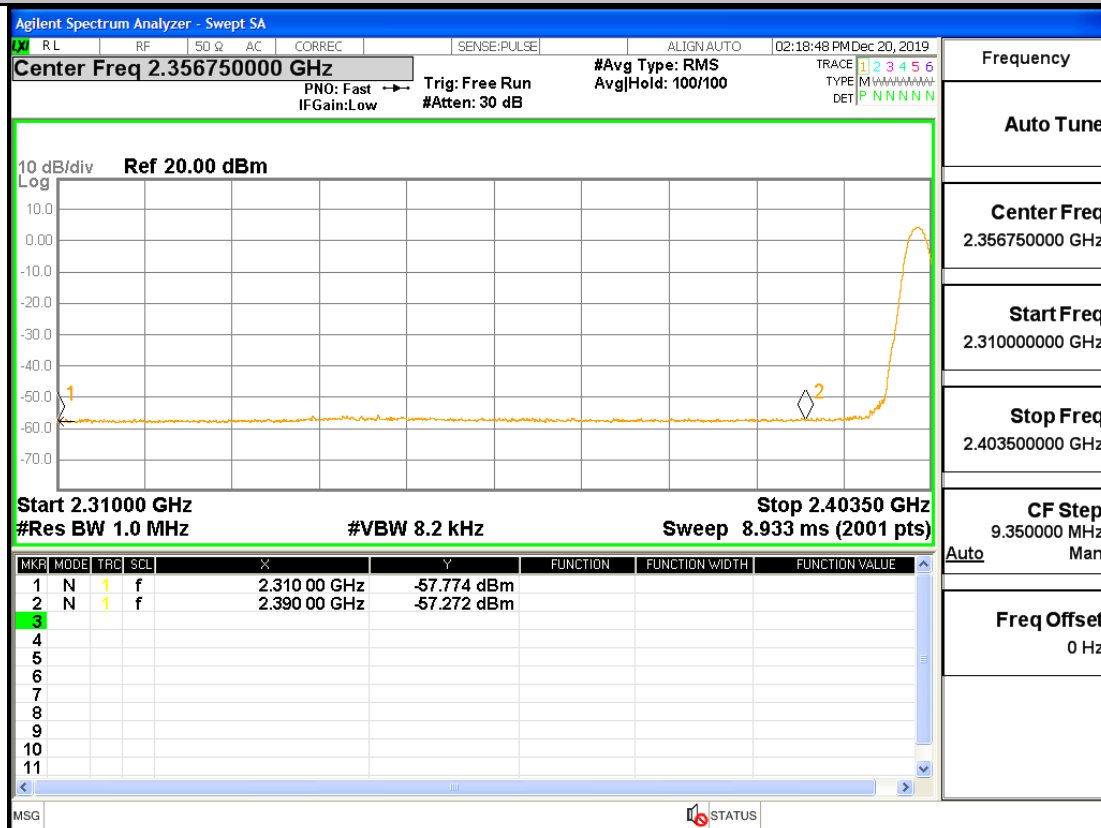

Restrict-band band-edge measurements_BLE_2480_Ant1_PEAK

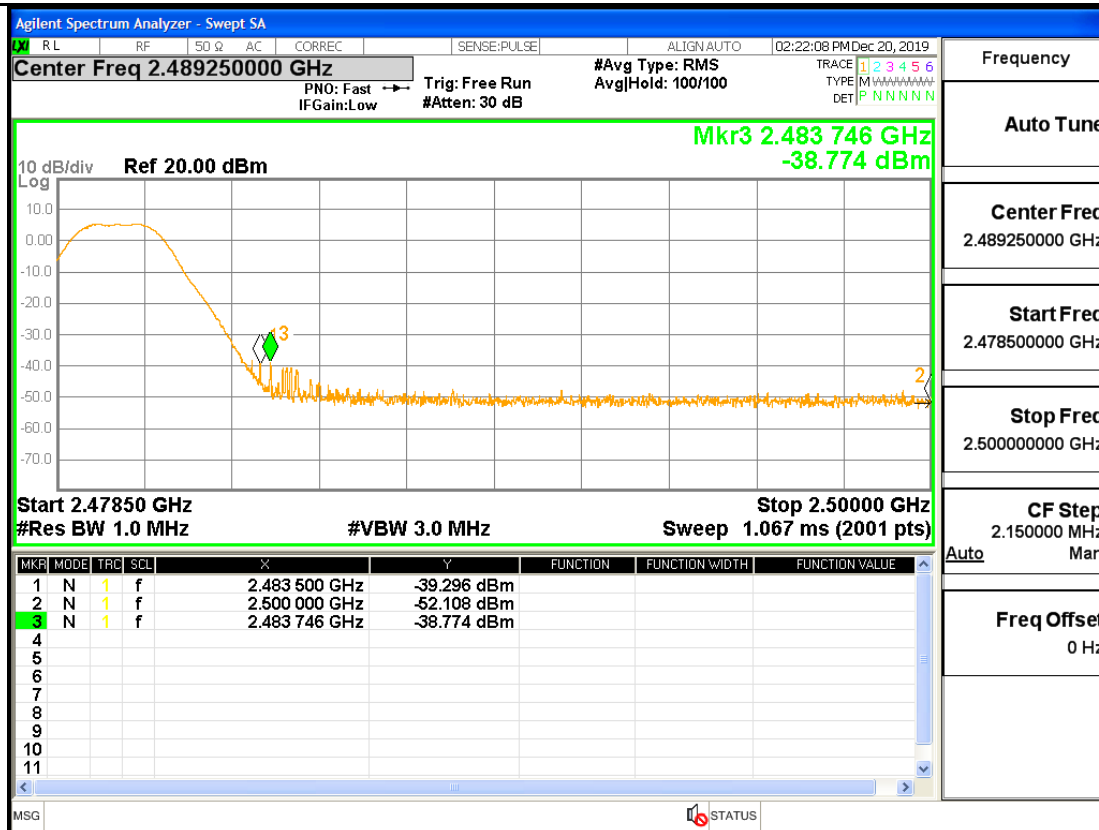

Restrict-band band-edge measurements_BLE_2480_Ant1_AV

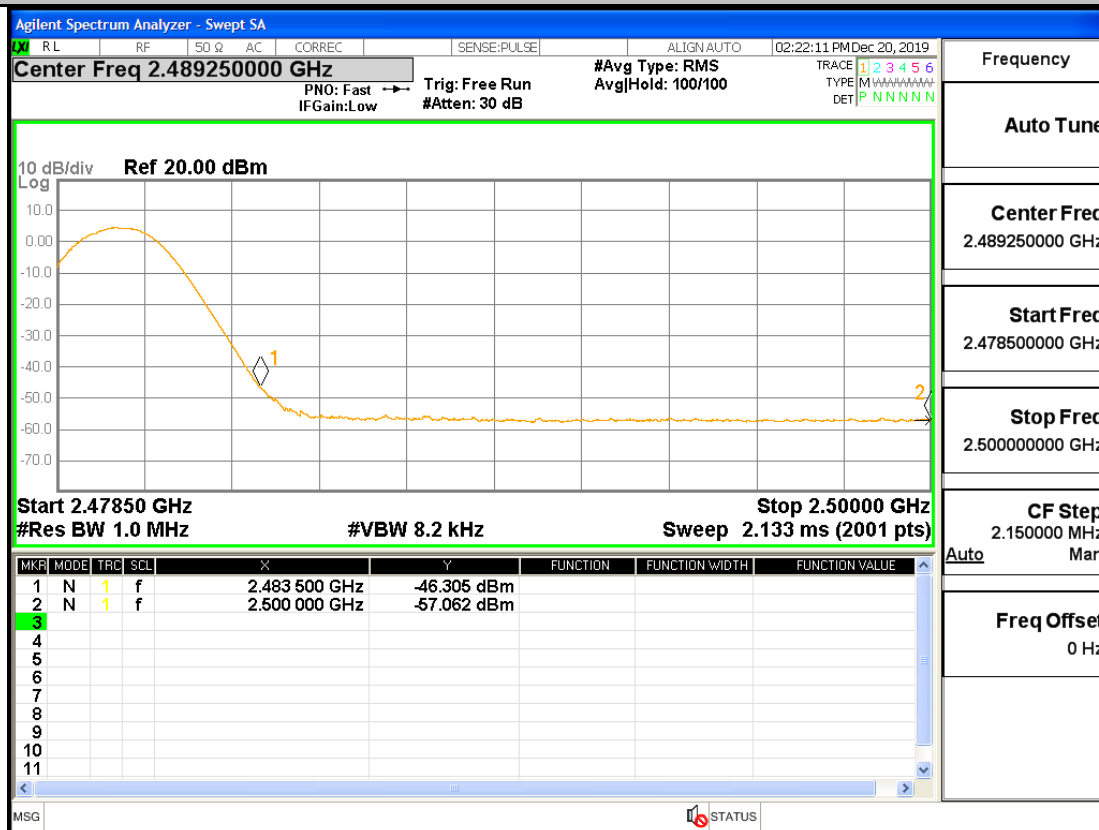

8.Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BLE	2440	Ant1	39.3	PASS

