



# FCC/ISED TEST REPORT

**Test report  
On Behalf of  
Shenzhen SEI Robotics Co., Ltd  
For  
4K Set Top Box  
Model No./HVIN: IPA2114HDW,SN6BEBGD**

**FCC ID: 2AOVU-IPA2114HDW  
IC: 25669-IPA2114HDW**

**Prepared for :** Shenzhen SEI Robotics Co., Ltd  
4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, China

**Prepared By :** Shenzhen Tongzhou Testing Co.,Ltd  
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang Street, Longhua, Shenzhen, China

**Date of Test:** Jun.30, 2021~ Jul.15, 2021

**Date of Report:** Jul.15, 2021

**Report Number:** TZ210602356-E5

The test report apply only to the specific sample(s) tested under stated test conditions

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**TEST RESULT CERTIFICATION**

**Applicant's name**..... **Shenzhen SEI Robotics Co., Ltd**  
Address ..... 4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road,  
Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, China  
**Manufacture's Name** ..... **Shenzhen SEI Robotics Co., Ltd**  
Address ..... 4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road,  
Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, China

**Product description**

Trade Mark ..... Force1  
Product name/PMN ..... 4K Set Top Box  
Model and/or type reference IPA2114HDW,SN6BEBGD  
.....

FCC Rules and Regulations Part 15 Subpart E Section 15.407

**Standards**..... RSS 247 Issue 2, February 2017

RSS GEN Issue 5, March 2019

ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :

Date (s) of performance of tests..... : **Jun.30, 2021~ Jul.15, 2021**

Date of Issue ..... : **Jul.15, 2021**

Test Result..... : **Pass**

Testing Engineer : \_\_\_\_\_

*Anna Hu*

(Anna Hu)

Technical Manager : \_\_\_\_\_

*Hugo Chen*

(Hugo Chen)

Authorized Signatory : \_\_\_\_\_

*Andy Zhang*

(Andy Zhang)



## Revision History

| Revision | Issue Date   | Revisions     | Revised By |
|----------|--------------|---------------|------------|
| 000      | Jul.15, 2021 | Initial Issue | Andy Zhang |
|          |              |               |            |
|          |              |               |            |



## TABLE OF CONTENTS

|                                                                           |           |
|---------------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                                       | <b>5</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT) .....                                    | 5         |
| 1.2 EUT CONFIGURATION .....                                               | 7         |
| 1.3. EXTERNAL I/O CABLE .....                                             | 7         |
| 1.4. DESCRIPTION OF TEST FACILITY .....                                   | 7         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....                       | 8         |
| 1.6. MEASUREMENT UNCERTAINTY .....                                        | 8         |
| 1.7. DESCRIPTION OF TEST MODES .....                                      | 8         |
| <b>2. TEST METHODOLOGY .....</b>                                          | <b>9</b>  |
| 2.1. EUT CONFIGURATION.....                                               | 9         |
| 2.2. EUT EXERCISE .....                                                   | 9         |
| 2.3. GENERAL TEST PROCEDURES .....                                        | 9         |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>                                  | <b>10</b> |
| 3.1. JUSTIFICATION.....                                                   | 10        |
| 3.2. EUT EXERCISE SOFTWARE.....                                           | 10        |
| 3.3. SPECIAL ACCESSORIES .....                                            | 10        |
| 3.4. BLOCK DIAGRAM/SCHEMATICS.....                                        | 10        |
| 3.5. EQUIPMENT MODIFICATIONS .....                                        | 10        |
| 3.6. TEST SETUP .....                                                     | 10        |
| <b>4. SUMMARY OF TEST RESULTS.....</b>                                    | <b>11</b> |
| <b>5. TEST RESULT .....</b>                                               | <b>12</b> |
| 5.1. ON TIME AND DUTY CYCLE .....                                         | 12        |
| 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....                      | 13        |
| 5.3. POWER SPECTRAL DENSITY MEASUREMENT .....                             | 15        |
| 5.4. 99% OCCUPIED BANDWIDTH AND 26dB EMISSION BANDWIDTH MEASUREMENT ..... | 17        |
| 5.5. RADIATED EMISSIONS MEASUREMENT .....                                 | 19        |
| 5.6. POWER LINE CONDUCTED EMISSIONS .....                                 | 35        |
| 5.7 UNDESIRABLE EMISSIONS MEASUREMENT .....                               | 38        |
| 5.8. ANTENNA REQUIREMENTS.....                                            | 46        |
| <b>6. LIST OF MEASURING EQUIPMENTS .....</b>                              | <b>48</b> |



## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| EUT               | :4K Set Top Box                                       |
| Model Number      | :IPA2114HDW,SN6BEBGD                                  |
| Model Declaration | :All the same except for model name                   |
| Test Model        | :IPA2114HDW                                           |
| Power Supply      | :DC 5V by adapter                                     |
| Hardware version  | :SMB.256.05                                           |
| Software version  | :SEI830-userdebug 11 RTT0.210414.001 135 release-keys |
| Sample ID         | :TZ210602356-2#&TZ210602356-4#                        |

#### Bluetooth

|                       |                                                                                 |
|-----------------------|---------------------------------------------------------------------------------|
| Bluetooth Version     | :V5.0                                                                           |
| Channel Number        | :79 Channels for Bluetooth BR/EDR(DSS)<br>:40 Channels for BLE (DTS)            |
| Modulation Technology | :GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth BR/EDR (DSS)<br>:GFSK for BLE (DTS) |
| Data Rates            | :Bluetooth BR/EDR (DSS): 1/2/3Mbps<br>:BLE (DTS): 1/2Mbps                       |
| Antenna Type And Gain | :Internal Antenna 1:<br>:2.86dBi                                                |

#### WiFi

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WLAN                         | :Supported IEEE 802.11a/b/g/n/ac/ax<br><br>IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz / 5745-5825MHz<br>IEEE 802.11a: 5180-5240MHz / 5745-5825MHz                                                                                                                                                                                                                                         |
| WLAN FCC Operation Frequency | :IEEE 802.11ac VHT20: 5180-5240MHz / 5745-5825MHz<br>:IEEE 802.11ac VHT40: 5190-5230MHz / 5755-5795MHz<br>IEEE 802.11ac VHT80: 5210MHz / 5775MHz<br>IEEE 802.11ax HT20: 2412-2462MHz / 5180-5240MHz / 5745-5825MHz<br>IEEE 802.11ax HT40: 5190-5230MHz / 5755-5795MHz<br>IEEE 802.11ax HT80: 5210MHz / 5775MHz                                                                                                                                         |
| WLAN Channel Number          | :11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20)<br>4 Channels for 5180-5240MHz (IEEE 802.11a/ac VHT20/n HT20/ax HT20)<br>2 Channels for 5190-5230MHz (IEEE 802.11ac VHT40/n HT40/ax HT40)<br>:1 Channels for 5210MHz (IEEE 802.11ac VHT80/ax HT80)<br>5 Channels for 5745-5825MHz(IEEE 802.11a/ac VHT20/n HT20/ax HT20)<br>2 Channels for 5755-5795MHz(IEEE 802.11ac VHT40/n HT40/ax HT40)<br>1 Channels for 5775MHz(IEEE 802.11ac VHT80/ax HT80) |
| WLAN Modulation Technology   | :IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>:IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>:IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)                                                                                                                                                                                                                                                              |



IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

IEEE 802.11ax: OFDM (1024-QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna 1:

2.86dBi(Max.), for TX/RX (WLAN 2.4G Band)

2.33dBi(Max.), for TX/RX (WLAN 5.2G Band)

2.33dBi (Max.), for TX/RX (WLAN 5.8G Band)

Antenna Type And Gain

:Antenna 2:

2.78dBi(Max.), for TX/RX (WLAN 2.4G Band)

2.14dBi(Max.), for TX/RX (WLAN 5.2G Band),

2.14dBi(Max.), for TX/RX (WLAN 5.8G Band)

802.11n/ac/ax support 2T2R.[Antenna 1 and Antenna 2]

*Note1: Antenna position refer to EUT Photos*



## 1.2 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☐ supplied by the lab    ☒ supplied by the manufacturer

| Manufacturer | Description | Model            | Serial Number | Certificate |
|--------------|-------------|------------------|---------------|-------------|
| Aohai        | N/A         | A912-050200W-US1 | N/A           | N/A         |

## 1.3. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| HDMI Port            | 1        | N/A   |
| Optical Port         | 1        | N/A   |
| LAN Port             | 1        | N/A   |
| USB Port             | 2        | N/A   |
| DC Port              | 1        | N/A   |
| MICRO SD Port        | 1        | N/A   |
| AV Port              | 1        | N/A   |

## 1.4. Description of Test Facility

### FCC

Designation Number: CN1275

Test Firm Registration Number: 167722

Shenzhen Tongzhou Testing Co.,Ltd has been listed on the US Federal Communications Commission

list of test facilities recognized to perform electromagnetic emissions measurements.

### A2LA

Certificate Number: 5463.01

Shenzhen Tongzhou Testing Co.,Ltd has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### IC

ISED#: 22033

CAB identifier: CN0099

Shenzhen Tongzhou Testing Co.,Ltd has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010



## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the Shenzhen Tongzhou Testing Co.,Ltd quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

| Test Item              |   | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty  | : | 9KHz~30MHz      | ±3.08dB     | (1)  |
|                        |   | 30MHz~1000MHz   | ±4.42dB     | (1)  |
|                        |   | 1GHz~40GHz      | ±4.06dB     | (1)  |
| Conduction Uncertainty | : | 150kHz~30MHz    | ±2.23dB     | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be 802.11ac VHT20 MIMO mode(High Channel, Chain 1&Chain 2).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11ac VHT20 MIMO mode(High Channel, Chain 1&Chain 2).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11a Mode : 6 Mbps, OFDM.  
IEEE 802.11ac VHT20 Mode: MCS0  
IEEE 802.11ax HT20 Mode: MCS0  
IEEE 802.11n HT20 Mode: MCS0  
IEEE 802.11ac VHT40 Mode: MCS0  
IEEE 802.11ax HT40 Mode: MCS0  
IEEE 802.11n HT40 Mode: MCS0  
IEEE 802.11ac VHT80 Mode: MCS0  
IEEE 802.11ax HT80 Mode: MCS0

### Antenna & Bandwidth

| Antenna        | Single (Port.1)          |                          |                          | Two (Port.1 + Port.2)               |                                     |                                     |
|----------------|--------------------------|--------------------------|--------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Bandwidth Mode | 20MHz                    | 40MHz                    | 80MHz                    | 20MHz                               | 40MHz                               | 80MHz                               |
| IEEE 802.11a   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| IEEE 802.11n   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
| IEEE 802.11ac  | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| IEEE 802.11ax  | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |



## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen Tongzhou Testing Co.,Ltd

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v02r01 and KDB 662911 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 2.4. Test Sample

The application provides 2 samples to meet requirement;

| Sample ID      | Description                                |
|----------------|--------------------------------------------|
| TZ210602356-2# | WLAN Engineer sample – continuous transmit |
| TZ210602356-4# | Normal sample – Intermittent transmit      |



### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (adb command) provided by application.

#### 3.3. Special Accessories

| No. | Equipment | Manufacturer | Model No./HVIN | Serial No. | Length | shielded/unshielded | Notes |
|-----|-----------|--------------|----------------|------------|--------|---------------------|-------|
| 1   | /         | /            | /              | /          | /      | /                   | /     |

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen Tongzhou Testing Co.,Ltd has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.



## 4. SUMMARY OF TEST RESULTS

| FCC Rules  | ISED Rules                      | Description of Test            | Sample ID                         | Result    |
|------------|---------------------------------|--------------------------------|-----------------------------------|-----------|
| §15.407(a) | /                               | Maximum Conducted Output Power | TZ210602356-2#                    | Compliant |
| §15.407(a) | /                               | Power Spectral Density         | TZ210602356-2#                    | Compliant |
| /          | RSS-247 6.2.1.1                 | Maximum e.i.r.p                | TZ210602356-2#                    | Compliant |
| /          | RSS-247 6.2.1.1                 | e.i.r.p. spectral density      | TZ210602356-2#                    | Compliant |
| §15.407(a) | RSS-247 6.2.1.2                 | 26dB Bandwidth                 | TZ210602356-2#                    | Compliant |
| /          | RSS-247 6.7                     | 99% Occupied Bandwidth         | TZ210602356-2#                    | Compliant |
| §15.407(b) | RSS-247 6.2.1.2<br>RSS-Gen 8.9  | Radiated Emissions             | TZ210602356-2#&<br>TZ210602356-4# | Compliant |
| §15.407(b) | RSS-247 6.2.1.2<br>RSS-Gen 8.9  | Band edge Emissions            | TZ210602356-2#                    | Compliant |
| §15.205    | RSS-247 6.2.1.2<br>RSS-Gen 8.10 | Emissions at Restricted Band   | TZ210602356-2#                    | Compliant |
| §15.407(g) | RSS-Gen 8.11                    | Frequency Stability            | TZ210602356-2#                    | Compliant |
| §15.207(a) | RSS-Gen 8.8                     | Line Conducted Emissions       | TZ210602356-4#                    | Compliant |
| §15.203    | RSS-Gen 6.8                     | Antenna Requirements           | N/A                               | Compliant |
| §2.1091    | RSS-102                         | RF Exposure                    | TZ210602356-2#                    | Compliant |

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

#### 5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=10MHz, VBW=10MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout



#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.6. Test result

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 25.5°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |

Remark:

1. Please refer to Appendix F of Appendix Test Data for RLAN(5.2G);



## 5.2. Maximum Conducted Output & e.i.r.p Power Measurement

### 5.2.1. Standard Applicable

#### **(1) For the band 5.15-5.25 GHz.**

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the power meter.

### 5.2.3. Test Procedures


The transmitter output (antenna port) was connected to the power meter.

According to KDB 789033 D02 Section 3 (a) Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
  - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
  - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.

- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding  $10 \log (1/x)$  where  $x$  is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25%).
- (v) For e.i.r.p Power, Add direction antenna gain.

#### 5.2.4. Test Setup Layout

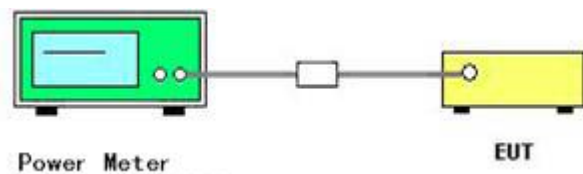

#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.2.6. Test Result of Maximum Conducted Output Power

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 25.5°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |

#### Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80, IEEE 802.11ax HT20, IEEE 802.11ax HT40 and IEEE 802.11ax HT80;
4. For MIMO mode, Directional Gain = 5.25 dBi < 6dBi; limit =  $24.0 - \max(\text{Directional Gain}, 6) - 6 = 24.0 \text{ dBm}$ ;
5. Report conducted power = Measured conducted average power + Duty Cycle factor;
6. Report conducted power = Measured conducted average power + Duty Cycle factor;
7. Please refer to Appendix B of Appendix Test Data for RLAN(5.2G);



### 5.3. Maximum & e.i.r.p Power Spectral Density Measurement

#### 5.3.1. Standard Applicable

##### **For 5150~5250MHz**

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.<sup>note1</sup>
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.<sup>note1</sup>
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.<sup>note1</sup>

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

#### 5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 1MHz.
4. Set the VBW  $\geq$  3MHz
5. Span=Encompass the entire emissions bandwidth (EBW) of the signal (or, alternatively, the entire 99% occupied bandwidth) of the signal.
6. Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
7. Manually set sweep time  $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$ .
8. Set detector = power averaging (rms).
9. Sweep time = auto couple.
10. Trace mode = max hold.
11. Allow trace to fully stabilize.
12. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively,
13. Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \log (1/0.25) = 6 \text{ dB}$  if the duty cycle is 25%.
14. Use the peak marker function to determine the maximum power level in any 1MHz band segment within the fundamental EBW.

15. For power spectral density, Add direction antenna gain.

#### 5.3.4. Test Setup Layout

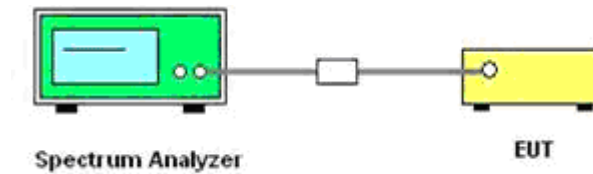

#### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 7.3.6. Test Result of Power Spectral Density

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 25.5°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |

#### Remark:

1. Measured power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80, IEEE 802.11ax HT20, IEEE 802.11ax HT40 and IEEE 802.11ax HT80;
4. For MIMO mode, Directional Gain = 5.25 dBi < 6dBi; limit = 11.0 – max(Directional Gain, 6) – 6 = 11.0 dBm;
5. Report conducted PSD = Measured conducted PSD + Duty Cycle factor;
6. Report conducted e.i.r.p PSD = Measured conducted PSD + Duty Cycle factor + direction antenna gain ;
7. Please refer to Appendix C of Appendix Test Data for RLAN(5.2G);

## 5.4. 99% Occupied Bandwidth and 26dB Emission Bandwidth

### Measurement

#### 5.4.1. Standard Applicable

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

#### 5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the Spectrum Analyzer.


| Spectrum Parameter | Setting          |
|--------------------|------------------|
| Attenuation        | Auto             |
| Span               | > 26dB Bandwidth |
| Detector           | Peak             |
| Trace              | Max Hold         |
| Sweep Time         | 100ms            |

5

#### 5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Set the RBW = approximately 1% of the emission bandwidth.
3. Set the VBW  $\geq 3 * RBW$
4. Measured the spectrum width with power higher than 26dB below carrier.

#### 5.4.4. Test Setup Layout

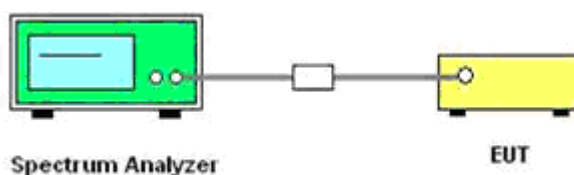

#### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.4.6. Test Result of 99% Occupied Bandwidth and 26dB Emission Bandwidth

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 25.5°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |



*Remark:*

1. *Measured 99% and 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.*
2. *Test results including cable loss;*
3. *Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40; , IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80, IEEE 802.11ax HT20, IEEE 802.11ax HT40 and IEEE 802.11ax HT80;*
4. *Please refer to Appendix A of Appendix Test Data for RLAN(5.2G);*



## 5.5. Radiated Emissions Measurement

### 5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                | MHz                 | MHz           | GHz         |
|--------------------|---------------------|---------------|-------------|
| 0.090-0.110        | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505    | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905      | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128        | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775    | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775    | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.Android 10-6.218 | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825    | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225    | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294        | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366        | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675    | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475    | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293       | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025  | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725  | 322-335.4           | 3600-4400     | (\2\)       |
| 13.36-13.41        |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                           |
|-------------------------------------------|---------------------------------------------------|
| Attenuation                               | Auto                                              |
| Start Frequency                           | 1000 MHz                                          |
| Stop Frequency                            | 10 <sup>m</sup> carrier harmonic                  |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter     | Setting                                    |
|------------------------|--------------------------------------------|
| Attenuation            | Auto                                       |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG  |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP   |

### 5.5.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### **Premeasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### **Premeasurement:**


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### **Final measurement:**


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.5.4. Test Setup Layout


For radiated emissions below 30MHz

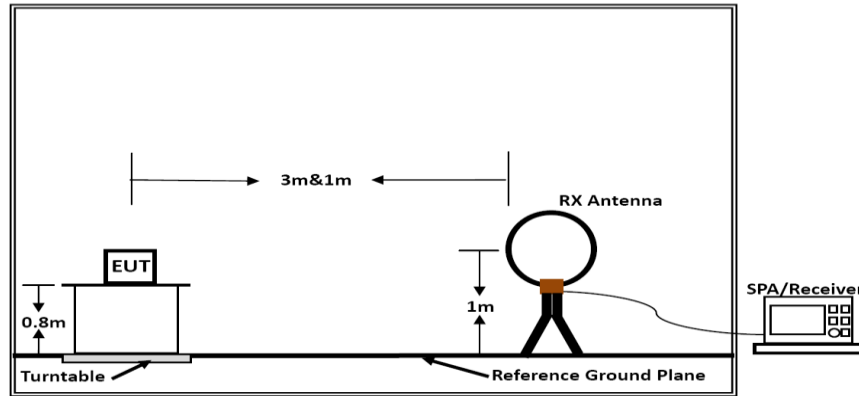

Below 30MHz

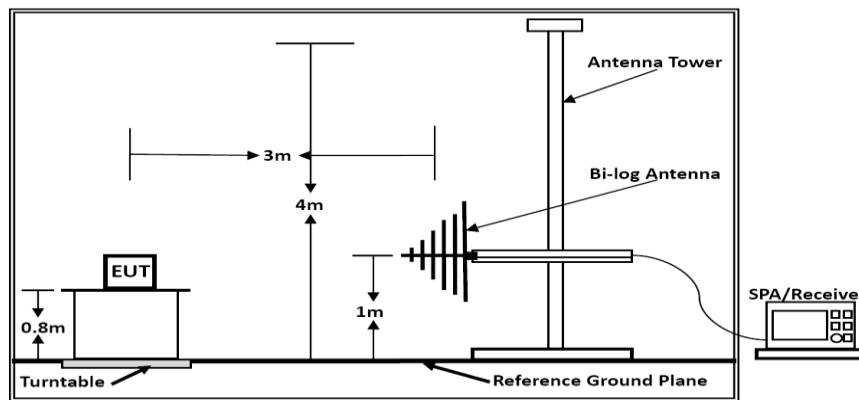

Below 1GHz

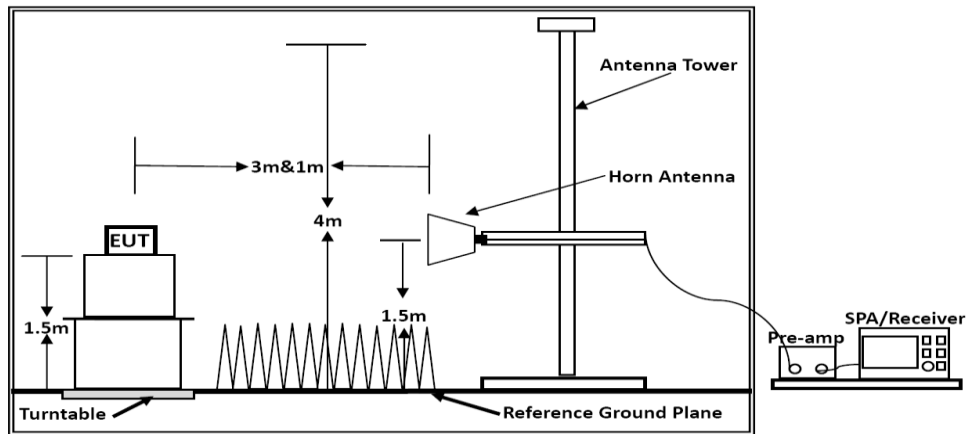

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



#### 5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 24.2℃   | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Over Limit<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 5.5.7. Results of Radiated Emissions (30MHz~1GHz)

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 24.2℃   | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |



Note: The Worst Test result for 802.11ac VHT20 MIMO mode(High Channel, Chain 1&Chain 2)

Vertical

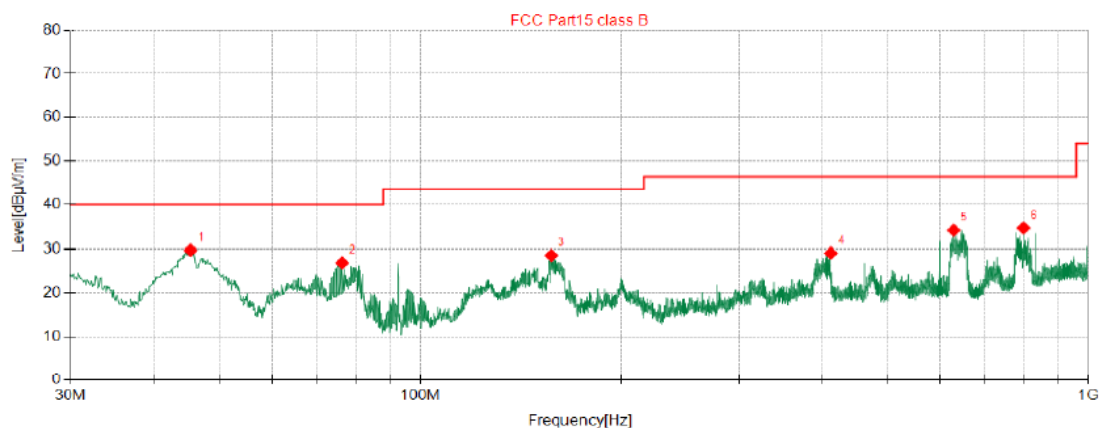

◆ QP Detector

| Suspected Data List |                |                   |                  |                       |                       |                |                |              |          |
|---------------------|----------------|-------------------|------------------|-----------------------|-----------------------|----------------|----------------|--------------|----------|
| NO.                 | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB/m] | Level<br>[dBμV/<br>m] | Limit<br>[dBμV/<br>m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity |
| 1                   | 45.27          | 43.64             | -13.91           | 29.73                 | 40.00                 | 10.27          | 100            | 264          | Vertical |
| 2                   | 76.31          | 45.51             | -18.62           | 26.89                 | 40.00                 | 13.11          | 100            | 22           | Vertical |
| 3                   | 156.9          | 46.27             | -17.67           | 28.60                 | 43.50                 | 14.90          | 100            | 10           | Vertical |
| 4                   | 411.5          | 38.85             | -9.76            | 29.09                 | 46.50                 | 17.41          | 100            | 313          | Vertical |
| 5                   | 629.0          | 40.00             | -5.80            | 34.20                 | 46.50                 | 12.30          | 100            | 301          | Vertical |
| 6                   | 800.0          | 38.70             | -4.00            | 34.70                 | 46.50                 | 11.80          | 100            | 209          | Vertical |

Note:

Pre-scan all modes and recorded the worst case results in this report.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Margin(dB)=Limit(dB μ V/m) – Result Level(dB μ V/m)



Horizontal

Report No.: TZ210602356-E5

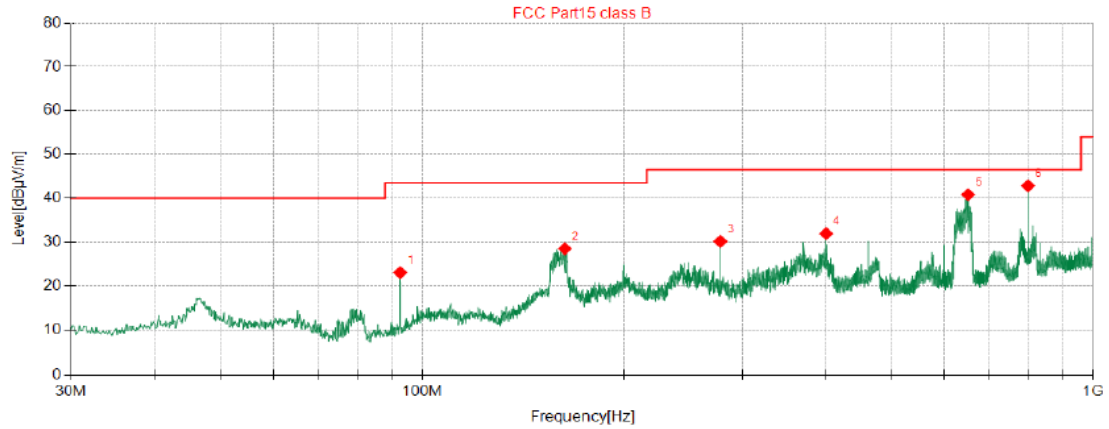

◆ QP Detector

| Suspected Data List |             |                |               |                |                |             |             |           |            |
|---------------------|-------------|----------------|---------------|----------------|----------------|-------------|-------------|-----------|------------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1                   | 92.68       | 40.27          | -17.22        | 23.05          | 43.50          | 20.45       | 100         | 332       | Horizontal |
| 2                   | 163.1       | 46.98          | -18.49        | 28.49          | 43.50          | 15.01       | 100         | 334       | Horizontal |
| 3                   | 278.1       | 43.44          | -13.27        | 30.17          | 46.50          | 16.33       | 100         | 313       | Horizontal |
| 4                   | 400.0       | 41.98          | -10.04        | 31.94          | 46.50          | 14.56       | 100         | 102       | Horizontal |
| 5                   | 651.7       | 45.77          | -4.95         | 40.82          | 46.50          | 5.68        | 100         | 347       | Horizontal |
| 6                   | 800.0       | 45.75          | -2.90         | 42.85          | 46.50          | 3.65        | 100         | 180       | Horizontal |

Note:

Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Margin(dB)=Limit(dB μ V/m) – Result Level(dB μ V/m)



## 5.5.8. Results for Radiated Emissions (1GHz ~ 40 GHz)

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 24.2°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |

*Remark: Measured all modes and recorded worst case;*

*IEEE 802.11a/ Ant.0*

*Channel 36 / 5180 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.54    | 57.96           | 33.06         | 35.04       | 3.94       | 59.92               | 68.20             | -8.28         | Peak    | Horizontal |
| 15.54    | 41.35           | 33.06         | 35.04       | 3.94       | 43.31               | 54.00             | -10.69        | Average | Horizontal |
| 15.54    | 56.58           | 33.06         | 35.04       | 3.94       | 58.54               | 68.20             | -9.66         | Peak    | Vertical   |
| 15.54    | 40.17           | 33.06         | 35.04       | 3.94       | 42.13               | 54.00             | -11.87        | Average | Vertical   |

*Channel 40 / 5200 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.60    | 56.27           | 33.16         | 35.15       | 3.96       | 58.24               | 68.20             | -9.96         | Peak    | Horizontal |
| 15.60    | 42.36           | 33.16         | 35.15       | 3.96       | 44.33               | 54.00             | -9.67         | Average | Horizontal |
| 15.60    | 57.41           | 33.16         | 35.15       | 3.96       | 59.38               | 68.20             | -8.82         | Peak    | Vertical   |
| 15.60    | 44.59           | 33.16         | 35.15       | 3.96       | 46.56               | 54.00             | -7.44         | Average | Vertical   |

*Channel 48 / 5240 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.72    | 55.83           | 33.26         | 35.14       | 3.98       | 57.93               | 68.20             | -10.27        | Peak    | Horizontal |
| 15.72    | 43.86           | 33.26         | 35.14       | 3.98       | 45.96               | 54.00             | -8.04         | Average | Horizontal |
| 15.72    | 54.18           | 33.26         | 35.14       | 3.98       | 56.28               | 68.20             | -11.92        | Peak    | Vertical   |
| 15.72    | 44.47           | 33.26         | 35.14       | 3.98       | 46.57               | 54.00             | -7.43         | Average | Vertical   |

*IEEE 802.11n-HT20/Combined Antenna Chain 0 and Antenna Chain 1**Channel 36 / 5180 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.54    | 56.24           | 33.06         | 35.04       | 3.94       | 58.20               | 68.20             | -10.00        | Peak    | Horizontal |
| 15.54    | 43.94           | 33.06         | 35.04       | 3.94       | 45.90               | 54.00             | -8.10         | Average | Horizontal |
| 15.54    | 56.87           | 33.06         | 35.04       | 3.94       | 58.83               | 68.20             | -9.37         | Peak    | Vertical   |
| 15.54    | 42.84           | 33.06         | 35.04       | 3.94       | 44.80               | 54.00             | -9.20         | Average | Vertical   |

*Channel 40 / 5200 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.60    | 57.97           | 33.16         | 35.15       | 3.96       | 59.94               | 68.20             | -8.26         | Peak    | Horizontal |
| 15.60    | 43.89           | 33.16         | 35.15       | 3.96       | 45.86               | 54.00             | -8.14         | Average | Horizontal |
| 15.60    | 58.53           | 33.16         | 35.15       | 3.96       | 60.50               | 68.20             | -7.70         | Peak    | Vertical   |
| 15.60    | 42.97           | 33.16         | 35.15       | 3.96       | 44.94               | 54.00             | -9.06         | Average | Vertical   |

*Channel 48 / 5240 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.72    | 54.21           | 33.26         | 35.14       | 3.98       | 56.31               | 68.20             | -11.89        | Peak    | Horizontal |
| 15.72    | 40.54           | 33.26         | 35.14       | 3.98       | 42.64               | 54.00             | -11.36        | Average | Horizontal |
| 15.72    | 58.16           | 33.26         | 35.14       | 3.98       | 60.26               | 68.20             | -7.94         | Peak    | Vertical   |
| 15.72    | 42.18           | 33.26         | 35.14       | 3.98       | 44.28               | 54.00             | -9.72         | Average | Vertical   |

*IEEE 802.11ac VHT20/ Combined Antenna Chain 0 and Antenna Chain 1**Channel 36 / 5180 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.54    | 55.95           | 33.06         | 35.04       | 3.94       | 57.91               | 68.20             | -10.29        | Peak    | Horizontal |
| 15.54    | 44.55           | 33.06         | 35.04       | 3.94       | 46.51               | 54.00             | -7.49         | Average | Horizontal |
| 15.54    | 57.27           | 33.06         | 35.04       | 3.94       | 59.23               | 68.20             | -8.97         | Peak    | Vertical   |
| 15.54    | 43.38           | 33.06         | 35.04       | 3.94       | 45.34               | 54.00             | -8.66         | Average | Vertical   |

*Channel 40 / 5200 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.60    | 58.68           | 33.16         | 35.15       | 3.96       | 60.65               | 68.20             | -7.55         | Peak    | Horizontal |
| 15.60    | 41.60           | 33.16         | 35.15       | 3.96       | 43.57               | 54.00             | -10.43        | Average | Horizontal |
| 15.60    | 57.99           | 33.16         | 35.15       | 3.96       | 59.96               | 68.20             | -8.24         | Peak    | Vertical   |
| 15.60    | 44.46           | 33.16         | 35.15       | 3.96       | 46.43               | 54.00             | -7.57         | Average | Vertical   |

*Channel 48 / 5240 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.72    | 54.26           | 33.26         | 35.14       | 3.98       | 56.36               | 68.20             | -11.84        | Peak    | Horizontal |
| 15.72    | 41.32           | 33.26         | 35.14       | 3.98       | 43.42               | 54.00             | -10.58        | Average | Horizontal |
| 15.72    | 58.15           | 33.26         | 35.14       | 3.98       | 60.25               | 68.20             | -7.95         | Peak    | Vertical   |
| 15.72    | 42.34           | 33.26         | 35.14       | 3.98       | 44.44               | 54.00             | -9.56         | Average | Vertical   |

*IEEE 802.11ax-HT20/Combined Antenna Chain 0 and Antenna Chain 1**Channel 36 / 5180 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.54    | 54.27           | 33.06         | 35.04       | 3.94       | 56.23               | 68.20             | -11.97        | Peak    | Horizontal |
| 15.54    | 42.73           | 33.06         | 35.04       | 3.94       | 44.69               | 54.00             | -9.31         | Average | Horizontal |
| 15.54    | 58.03           | 33.06         | 35.04       | 3.94       | 59.99               | 68.20             | -8.21         | Peak    | Vertical   |
| 15.54    | 43.67           | 33.06         | 35.04       | 3.94       | 45.63               | 54.00             | -8.37         | Average | Vertical   |

*Channel 40 / 5200 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.60    | 56.07           | 33.16         | 35.15       | 3.96       | 58.04               | 68.20             | -10.16        | Peak    | Horizontal |
| 15.60    | 42.65           | 33.16         | 35.15       | 3.96       | 44.62               | 54.00             | -9.38         | Average | Horizontal |
| 15.60    | 56.25           | 33.16         | 35.15       | 3.96       | 58.22               | 68.20             | -9.98         | Peak    | Vertical   |
| 15.60    | 43.66           | 33.16         | 35.15       | 3.96       | 45.63               | 54.00             | -8.37         | Average | Vertical   |

*Channel 48 / 5240 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.72    | 54.14           | 33.26         | 35.14       | 3.98       | 56.24               | 68.20             | -11.96        | Peak    | Horizontal |
| 15.72    | 42.15           | 33.26         | 35.14       | 3.98       | 44.25               | 54.00             | -9.75         | Average | Horizontal |
| 15.72    | 55.78           | 33.26         | 35.14       | 3.98       | 57.88               | 68.20             | -10.32        | Peak    | Vertical   |
| 15.72    | 42.45           | 33.26         | 35.14       | 3.98       | 44.55               | 54.00             | -9.45         | Average | Vertical   |

*IEEE 802.11n HT40/ Combined Antenna Chain 0 and Antenna Chain 1**Channel 38 / 5190 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.57    | 57.05           | 33.06         | 35.04       | 3.94       | 59.01               | 68.20             | -9.19         | Peak    | Horizontal |
| 15.57    | 41.02           | 33.06         | 35.04       | 3.94       | 42.98               | 54.00             | -11.02        | Average | Horizontal |
| 15.57    | 58.94           | 33.06         | 35.04       | 3.94       | 60.90               | 68.20             | -7.30         | Peak    | Vertical   |
| 15.57    | 40.70           | 33.06         | 35.04       | 3.94       | 42.66               | 54.00             | -11.34        | Average | Vertical   |

*Channel 46 / 5230 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.69    | 56.02           | 33.16         | 35.15       | 3.96       | 57.99               | 68.20             | -10.21        | Peak    | Horizontal |
| 15.69    | 44.85           | 33.16         | 35.15       | 3.96       | 46.82               | 54.00             | -7.18         | Average | Horizontal |
| 15.69    | 57.32           | 33.16         | 35.15       | 3.96       | 59.29               | 68.20             | -8.91         | Peak    | Vertical   |
| 15.69    | 44.71           | 33.16         | 35.15       | 3.96       | 46.68               | 54.00             | -7.32         | Average | Vertical   |

*IEEE 802.11ac VHT40 / Antenna Chain 0 and Antenna Chain 1**Channel 38 / 5190 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.57    | 56.24           | 33.06         | 35.04       | 3.94       | 58.20               | 68.20             | -10.00        | Peak    | Horizontal |
| 15.57    | 40.51           | 33.06         | 35.04       | 3.94       | 42.47               | 54.00             | -11.53        | Average | Horizontal |
| 15.57    | 58.99           | 33.06         | 35.04       | 3.94       | 60.95               | 68.20             | -7.25         | Peak    | Vertical   |
| 15.57    | 40.35           | 33.06         | 35.04       | 3.94       | 42.31               | 54.00             | -11.69        | Average | Vertical   |

*Channel 46 / 5230 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.69    | 56.79           | 33.16         | 35.15       | 3.96       | 58.76               | 68.20             | -9.44         | Peak    | Horizontal |
| 15.69    | 43.18           | 33.16         | 35.15       | 3.96       | 45.15               | 54.00             | -8.85         | Average | Horizontal |
| 15.69    | 54.61           | 33.16         | 35.15       | 3.96       | 56.58               | 68.20             | -11.62        | Peak    | Vertical   |
| 15.69    | 43.29           | 33.16         | 35.15       | 3.96       | 45.26               | 54.00             | -8.74         | Average | Vertical   |

*IEEE 802.11ax HT40/ Combined Antenna Chain 0 and Antenna Chain 1**Channel 38 / 5190 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.57    | 58.15           | 33.06         | 35.04       | 3.94       | 60.11               | 68.20             | -8.09         | Peak    | Horizontal |
| 15.57    | 43.24           | 33.06         | 35.04       | 3.94       | 45.20               | 54.00             | -8.80         | Average | Horizontal |
| 15.57    | 58.72           | 33.06         | 35.04       | 3.94       | 60.68               | 68.20             | -7.52         | Peak    | Vertical   |
| 15.57    | 44.46           | 33.06         | 35.04       | 3.94       | 46.42               | 54.00             | -7.58         | Average | Vertical   |

*Channel 46 / 5230 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.69    | 57.55           | 33.16         | 35.15       | 3.96       | 59.52               | 68.20             | -8.68         | Peak    | Horizontal |
| 15.69    | 44.16           | 33.16         | 35.15       | 3.96       | 46.13               | 54.00             | -7.87         | Average | Horizontal |
| 15.69    | 58.74           | 33.16         | 35.15       | 3.96       | 60.71               | 68.20             | -7.49         | Peak    | Vertical   |
| 15.69    | 42.17           | 33.16         | 35.15       | 3.96       | 44.14               | 54.00             | -9.86         | Average | Vertical   |

*IEEE 802.11ac VHT80 / Antenna Chain 0 and Antenna Chain 1**Channel 42 / 5210 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.63    | 55.91           | 33.06         | 35.04       | 3.94       | 57.87               | 68.20             | -10.33        | Peak    | Horizontal |
| 15.63    | 43.70           | 33.06         | 35.04       | 3.94       | 45.66               | 54.00             | -8.34         | Average | Horizontal |
| 15.63    | 54.44           | 33.06         | 35.04       | 3.94       | 56.40               | 68.20             | -11.80        | Peak    | Vertical   |
| 15.63    | 45.00           | 33.06         | 35.04       | 3.94       | 46.96               | 54.00             | -7.04         | Average | Vertical   |

*IEEE 802.11ax HT80 / Antenna Chain 0 and Antenna Chain 1**Channel 42 / 5210 MHz*

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 15.63    | 55.01           | 33.06         | 35.04       | 3.94       | 56.97               | 68.20             | -11.23        | Peak    | Horizontal |
| 15.63    | 41.52           | 33.06         | 35.04       | 3.94       | 43.48               | 54.00             | -10.52        | Average | Horizontal |
| 15.63    | 57.44           | 33.06         | 35.04       | 3.94       | 59.40               | 68.20             | -8.80         | Peak    | Vertical   |
| 15.63    | 44.17           | 33.06         | 35.04       | 3.94       | 46.13               | 54.00             | -7.87         | Average | Vertical   |

**Notes:**

1. Measuring frequencies from 9 KHz ~40 GHz, No emission found between lowest internal used/generated frequencies to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz ~40GHz were made with an instrument using Peak detector mode.



3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80, IEEE 802.11ax HT20, IEEE 802.11ax HT40 and IEEE 802.11ax HT80;
5.  $\text{Measured} = \text{Reading} + \text{Ant. Fac} - \text{Pre. Fac} + \text{Cab. Loss}$ ;  $\text{Margin} = \text{Limit} - \text{Measured}$

## 5.6. Power line conducted emissions


### 5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |           |
|-----------------------|---------------------|-----------|
|                       | Quasi-peak          | Average   |
| 0.15 to 0.50          | 66 to 56*           | 56 to 46* |
| 0.50 to 5             | 56                  | 46        |
| 5 to 30               | 60                  | 50        |

\* Decreasing linearly with the logarithm of the frequency

### 5.6.2 Block Diagram of Test Setup

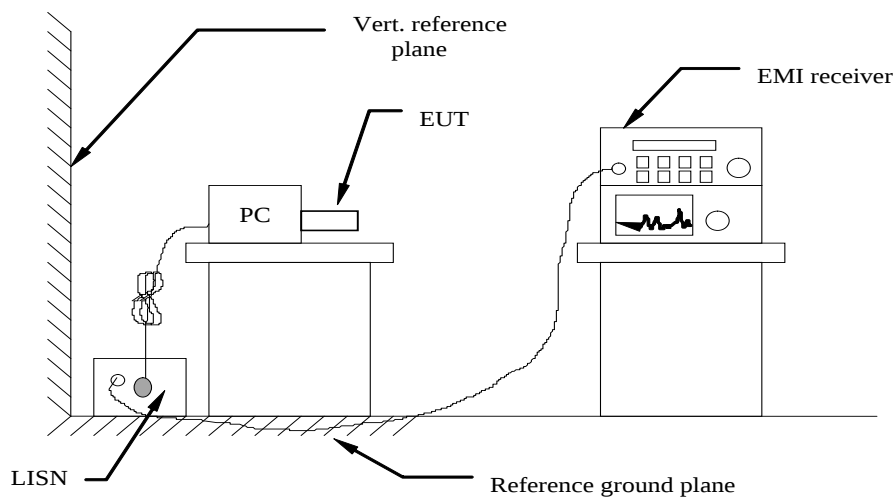

### 5.6.3 Test Results

PASS.


|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 24.2°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |

The test data please refer to following page.



**Note: The worst result for 802.11ac VHT20 MIMO mode(High Channel, Chain 1&Chain 2)**

Line

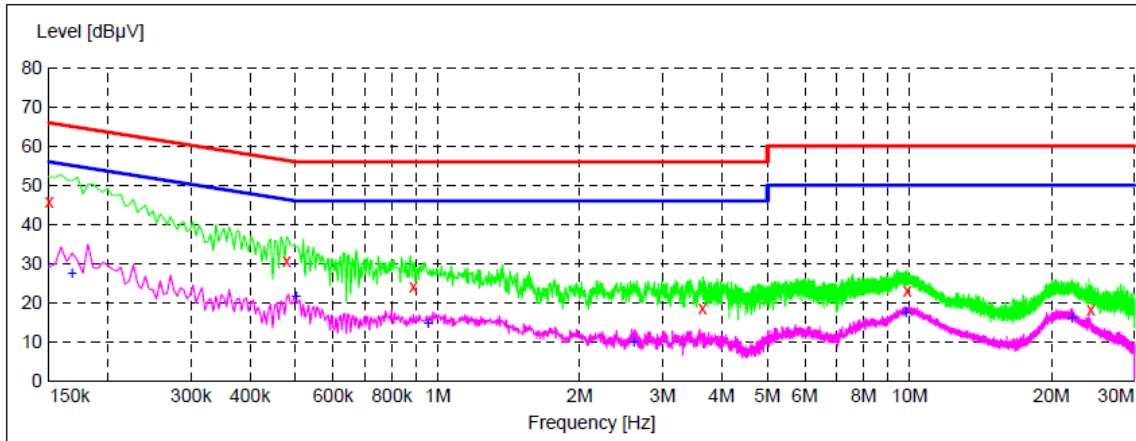


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.150000         | 45.80         | 9.8          | 66            | 20.2         | QP       | L1   | GND |
| 0.478500         | 30.80         | 10.0         | 56            | 25.6         | QP       | L1   | GND |
| 0.888000         | 24.20         | 9.8          | 56            | 31.8         | QP       | L1   | GND |
| 3.642000         | 18.70         | 9.7          | 56            | 37.3         | QP       | L1   | GND |
| 9.888000         | 23.00         | 9.8          | 60            | 37.0         | QP       | L1   | GND |
| 24.243000        | 18.30         | 10.1         | 60            | 41.7         | QP       | L1   | GND |

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.168000         | 27.70         | 10.1         | 55            | 27.4         | AV       | L1   | GND |
| 0.501000         | 21.60         | 9.9          | 46            | 24.4         | AV       | L1   | GND |
| 0.955500         | 14.80         | 9.8          | 46            | 31.2         | AV       | L1   | GND |
| 2.602500         | 10.00         | 9.7          | 46            | 36.0         | AV       | L1   | GND |
| 9.834000         | 17.70         | 9.8          | 50            | 32.3         | AV       | L1   | GND |
| 22.119000        | 16.20         | 10.2         | 50            | 33.8         | AV       | L1   | GND |

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report
- 2). Emission level (dBuV) = 20 log Emission level (uV).
- 3). Margin=Limit-Level

### Neutral

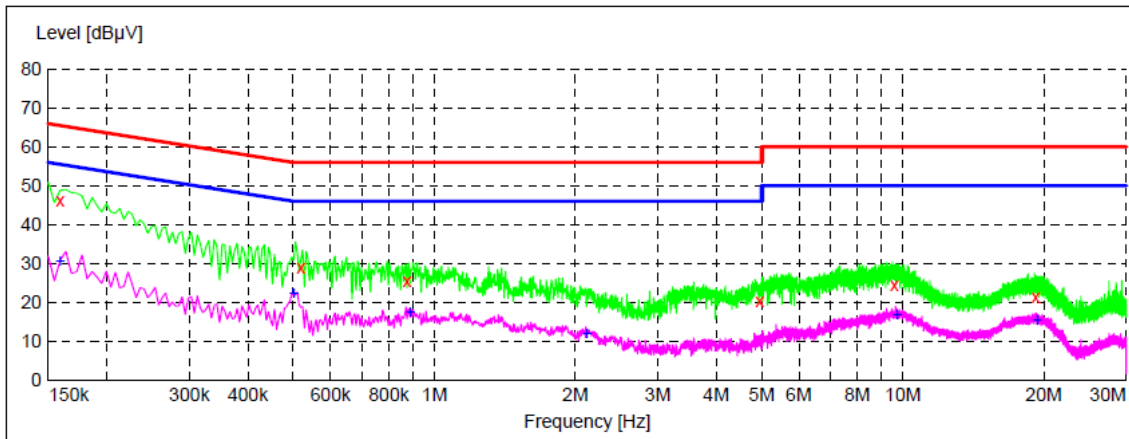

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.159000         | 46.30         | 10.0         | 66            | 19.2         | QP       | N    | GND |
| 0.519000         | 29.00         | 9.9          | 56            | 27.0         | QP       | N    | GND |
| 0.874500         | 25.40         | 9.8          | 56            | 30.6         | QP       | N    | GND |
| 4.947000         | 20.40         | 9.8          | 56            | 35.6         | QP       | N    | GND |
| 9.586500         | 24.60         | 9.8          | 60            | 35.4         | QP       | N    | GND |
| 19.198500        | 21.20         | 10.3         | 60            | 38.8         | QP       | N    | GND |

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.159000         | 30.70         | 10.0         | 56            | 24.8         | AV       | N    | GND |
| 0.501000         | 22.30         | 9.9          | 46            | 23.7         | AV       | N    | GND |
| 0.888000         | 17.40         | 9.8          | 46            | 28.6         | AV       | N    | GND |
| 2.116500         | 12.00         | 9.7          | 46            | 34.0         | AV       | N    | GND |
| 9.712500         | 16.90         | 9.8          | 50            | 33.1         | AV       | N    | GND |
| 19.356000        | 15.50         | 10.3         | 50            | 34.5         | AV       | N    | GND |

#### Note:

- 1). Pre-scan all modes and recorded the worst case results in this report
- 2). Emission level (dBμV) = 20 log Emission level (μV).
- 3). Margin=Limit-Level


## 5.7 Undesirable Emissions Measurement

### 5.7.1 LIMIT

According to §15.407 (b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (e) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (f) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (g) The provisions of §15.205 apply to intentional radiators operating under this section.
- (h) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### 5.7.2 TEST CONFIGURATION

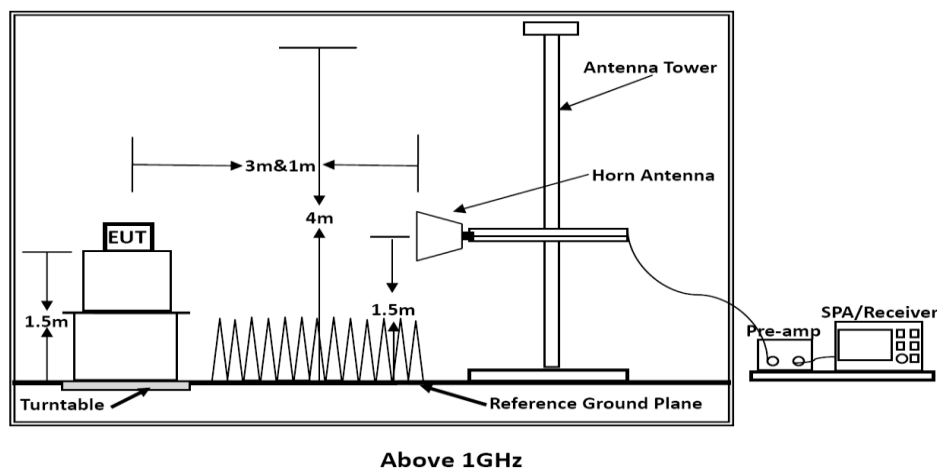

### 5.7.3 TEST PROCEDURE

#### Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.



- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Premeasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 5.7.4 TEST RESULT

|               |         |                |                      |
|---------------|---------|----------------|----------------------|
| Temperature   | 25.5°C  | Humidity       | 55%                  |
| Test Engineer | Anna Hu | Configurations | IEEE 802.11a/n/ac/ax |



| Ant1    |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|---------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode    | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11ASISO | Low    | 4500          | 54.24                   | 29.19                       | 30.13                 | 10.65                 | 63.95                       | 68.2              | -4.25                 | Peak              | Horizontal   |
|         |        | 4500          | 38.71                   | 29.19                       | 30.13                 | 10.65                 | 48.42                       | 54                | -5.58                 | AV <sup>[1]</sup> | Horizontal   |
|         |        | 4500          | 54.1                    | 29.19                       | 30.13                 | 10.65                 | 63.81                       | 68.2              | -4.39                 | Peak              | Vertical     |
|         |        | 4500          | 39.09                   | 29.19                       | 30.13                 | 10.65                 | 48.8                        | 54                | -5.2                  | AV <sup>[1]</sup> | Vertical     |
|         |        | 5150          | 53.43                   | 29.15                       | 29.63                 | 10.95                 | 63.9                        | 68.2              | -4.3                  | Peak              | Horizontal   |
|         |        | 5150          | 25.91                   | 29.15                       | 29.63                 | 10.95                 | 36.38                       | 54                | -17.62                | AV <sup>[1]</sup> | Horizontal   |
|         |        | 5150          | 53.5                    | 29.15                       | 29.63                 | 10.95                 | 63.97                       | 68.2              | -4.23                 | Peak              | Vertical     |
|         |        | 5150          | 26.47                   | 29.15                       | 29.63                 | 10.95                 | 36.94                       | 54                | -17.06                | AV <sup>[1]</sup> | Vertical     |
|         | High   | 5350          | 56.24                   | 29.19                       | 30.13                 | 10.65                 | 65.95                       | 68.2              | -2.25                 | Peak              | Horizontal   |
|         |        | 5350          | 40.44                   | 29.19                       | 30.13                 | 10.65                 | 50.15                       | 54                | -3.85                 | AV <sup>[1]</sup> | Horizontal   |
|         |        | 5350          | 55.98                   | 29.19                       | 30.13                 | 10.65                 | 65.69                       | 68.2              | -2.51                 | Peak              | Vertical     |
|         |        | 5350          | 39.58                   | 29.19                       | 30.13                 | 10.65                 | 49.29                       | 54                | -4.71                 | AV <sup>[1]</sup> | Vertical     |
|         |        | 5460          | 55.04                   | 29.15                       | 29.63                 | 10.95                 | 65.51                       | 68.2              | -2.69                 | Peak              | Horizontal   |
|         |        | 5460          | 29.74                   | 29.15                       | 29.63                 | 10.95                 | 40.21                       | 54                | -13.79                | AV <sup>[1]</sup> | Horizontal   |
|         |        | 5460          | 52.6                    | 29.15                       | 29.63                 | 10.95                 | 63.07                       | 68.2              | -5.13                 | Peak              | Vertical     |
|         |        | 5460          | 27.03                   | 29.15                       | 29.63                 | 10.95                 | 37.5                        | 54                | -16.5                 | AV <sup>[1]</sup> | Vertical     |

| Ant2    |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|---------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode    | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11ASISO | Low    | 4500          | 54.82                   | 29.19                       | 30.13                 | 10.65                 | 64.53                       | 68.2              | -3.67                 | Peak              | Horizontal   |
|         |        | 4500          | 40.31                   | 29.19                       | 30.13                 | 10.65                 | 50.02                       | 54                | -3.98                 | AV <sup>[1]</sup> | Horizontal   |
|         |        | 4500          | 53.07                   | 29.19                       | 30.13                 | 10.65                 | 62.78                       | 68.2              | -5.42                 | Peak              | Vertical     |
|         |        | 4500          | 39.32                   | 29.19                       | 30.13                 | 10.65                 | 49.03                       | 54                | -4.97                 | AV <sup>[1]</sup> | Vertical     |
|         |        | 5150          | 50.79                   | 29.15                       | 29.63                 | 10.95                 | 61.26                       | 68.2              | -6.94                 | Peak              | Horizontal   |
|         |        | 5150          | 30.83                   | 29.15                       | 29.63                 | 10.95                 | 41.3                        | 54                | -12.7                 | AV <sup>[1]</sup> | Horizontal   |
|         |        | 5150          | 52.18                   | 29.15                       | 29.63                 | 10.95                 | 62.65                       | 68.2              | -5.55                 | Peak              | Vertical     |
|         |        | 5150          | 27.7                    | 29.15                       | 29.63                 | 10.95                 | 38.17                       | 54                | -15.83                | AV <sup>[1]</sup> | Vertical     |
|         | High   | 5350          | 54.84                   | 29.19                       | 30.13                 | 10.65                 | 64.55                       | 68.2              | -3.65                 | Peak              | Horizontal   |
|         |        | 5350          | 40.36                   | 29.19                       | 30.13                 | 10.65                 | 50.07                       | 54                | -3.93                 | AV <sup>[1]</sup> | Horizontal   |
|         |        | 5350          | 55.48                   | 29.19                       | 30.13                 | 10.65                 | 65.19                       | 68.2              | -3.01                 | Peak              | Vertical     |
|         |        | 5350          | 39.34                   | 29.19                       | 30.13                 | 10.65                 | 49.05                       | 54                | -4.95                 | AV <sup>[1]</sup> | Vertical     |
|         |        | 5460          | 55.81                   | 29.15                       | 29.63                 | 10.95                 | 66.28                       | 68.2              | -1.92                 | Peak              | Horizontal   |
|         |        | 5460          | 28.64                   | 29.15                       | 29.63                 | 10.95                 | 39.11                       | 54                | -14.89                | AV <sup>[1]</sup> | Horizontal   |
|         |        | 5460          | 52.46                   | 29.15                       | 29.63                 | 10.95                 | 62.93                       | 68.2              | -5.27                 | Peak              | Vertical     |
|         |        | 5460          | 26.92                   | 29.15                       | 29.63                 | 10.95                 | 37.39                       | 54                | -16.61                | AV <sup>[1]</sup> | Vertical     |



| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11N20<br>MIMO    | Low    | 4500          | 55.66                   | 29.19                       | 30.13                 | 10.65                 | 65.37                       | 68.2              | -2.83                 | Peak              | Horizontal   |
|                  |        | 4500          | 38.99                   | 29.19                       | 30.13                 | 10.65                 | 48.7                        | 54                | -5.3                  | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 54.8                    | 29.19                       | 30.13                 | 10.65                 | 64.51                       | 68.2              | -3.69                 | Peak              | Vertical     |
|                  |        | 4500          | 36.47                   | 29.19                       | 30.13                 | 10.65                 | 46.18                       | 54                | -7.82                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 50.47                   | 29.15                       | 29.63                 | 10.95                 | 60.94                       | 68.2              | -7.26                 | Peak              | Horizontal   |
|                  |        | 5150          | 27.86                   | 29.15                       | 29.63                 | 10.95                 | 38.33                       | 54                | -15.67                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 50.08                   | 29.15                       | 29.63                 | 10.95                 | 60.55                       | 68.2              | -7.65                 | Peak              | Vertical     |
|                  |        | 5150          | 29.45                   | 29.15                       | 29.63                 | 10.95                 | 39.92                       | 54                | -14.08                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 57.12                   | 29.19                       | 30.13                 | 10.65                 | 66.83                       | 68.2              | -1.37                 | Peak              | Horizontal   |
|                  |        | 5350          | 36.06                   | 29.19                       | 30.13                 | 10.65                 | 45.77                       | 54                | -8.23                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 57.34                   | 29.19                       | 30.13                 | 10.65                 | 67.05                       | 68.2              | -1.15                 | Peak              | Vertical     |
|                  |        | 5350          | 40.04                   | 29.19                       | 30.13                 | 10.65                 | 49.75                       | 54                | -4.25                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 55.97                   | 29.15                       | 29.63                 | 10.95                 | 66.44                       | 68.2              | -1.76                 | Peak              | Horizontal   |
|                  |        | 5460          | 29.56                   | 29.15                       | 29.63                 | 10.95                 | 40.03                       | 54                | -13.97                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 51.13                   | 29.15                       | 29.63                 | 10.95                 | 61.6                        | 68.2              | -6.6                  | Peak              | Vertical     |
|                  |        | 5460          | 30.89                   | 29.15                       | 29.63                 | 10.95                 | 41.36                       | 54                | -12.64                | AV <sup>[1]</sup> | Vertical     |

| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11N40<br>MIMO    | Low    | 4500          | 53.29                   | 29.19                       | 30.13                 | 10.65                 | 63                          | 68.2              | -5.2                  | Peak              | Horizontal   |
|                  |        | 4500          | 38.69                   | 29.19                       | 30.13                 | 10.65                 | 48.4                        | 54                | -5.6                  | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 53.41                   | 29.19                       | 30.13                 | 10.65                 | 63.12                       | 68.2              | -5.08                 | Peak              | Vertical     |
|                  |        | 4500          | 39.27                   | 29.19                       | 30.13                 | 10.65                 | 48.98                       | 54                | -5.02                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 53.11                   | 29.15                       | 29.63                 | 10.95                 | 63.58                       | 68.2              | -4.62                 | Peak              | Horizontal   |
|                  |        | 5150          | 30.23                   | 29.15                       | 29.63                 | 10.95                 | 40.7                        | 54                | -13.3                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 51.55                   | 29.15                       | 29.63                 | 10.95                 | 62.02                       | 68.2              | -6.18                 | Peak              | Vertical     |
|                  |        | 5150          | 26.85                   | 29.15                       | 29.63                 | 10.95                 | 37.32                       | 54                | -16.68                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 56.15                   | 29.19                       | 30.13                 | 10.65                 | 65.86                       | 68.2              | -2.34                 | Peak              | Horizontal   |
|                  |        | 5350          | 39.46                   | 29.19                       | 30.13                 | 10.65                 | 49.17                       | 54                | -4.83                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 55.68                   | 29.19                       | 30.13                 | 10.65                 | 65.39                       | 68.2              | -2.81                 | Peak              | Vertical     |
|                  |        | 5350          | 38.16                   | 29.19                       | 30.13                 | 10.65                 | 47.87                       | 54                | -6.13                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 55.33                   | 29.15                       | 29.63                 | 10.95                 | 65.8                        | 68.2              | -2.4                  | Peak              | Horizontal   |
|                  |        | 5460          | 28.32                   | 29.15                       | 29.63                 | 10.95                 | 38.79                       | 54                | -15.21                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 53.21                   | 29.15                       | 29.63                 | 10.95                 | 63.68                       | 68.2              | -4.52                 | Peak              | Vertical     |
|                  |        | 5460          | 28.15                   | 29.15                       | 29.63                 | 10.95                 | 38.62                       | 54                | -15.38                | AV <sup>[1]</sup> | Vertical     |



| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11AC20<br>MIMO   | Low    | 4500          | 54.74                   | 29.19                       | 30.13                 | 10.65                 | 64.45                       | 68.2              | -3.75                 | Peak              | Horizontal   |
|                  |        | 4500          | 38.01                   | 29.19                       | 30.13                 | 10.65                 | 47.72                       | 54                | -6.28                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 55.19                   | 29.19                       | 30.13                 | 10.65                 | 64.9                        | 68.2              | -3.3                  | Peak              | Vertical     |
|                  |        | 4500          | 39.72                   | 29.19                       | 30.13                 | 10.65                 | 49.43                       | 54                | -4.57                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 53.76                   | 29.15                       | 29.63                 | 10.95                 | 64.23                       | 68.2              | -3.97                 | Peak              | Horizontal   |
|                  |        | 5150          | 28.48                   | 29.15                       | 29.63                 | 10.95                 | 38.95                       | 54                | -15.05                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 51.84                   | 29.15                       | 29.63                 | 10.95                 | 62.31                       | 68.2              | -5.89                 | Peak              | Vertical     |
|                  |        | 5150          | 28.16                   | 29.15                       | 29.63                 | 10.95                 | 38.63                       | 54                | -15.37                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 54.09                   | 29.19                       | 30.13                 | 10.65                 | 63.8                        | 68.2              | -4.4                  | Peak              | Horizontal   |
|                  |        | 5350          | 38.4                    | 29.19                       | 30.13                 | 10.65                 | 48.11                       | 54                | -5.89                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 56.59                   | 29.19                       | 30.13                 | 10.65                 | 66.3                        | 68.2              | -1.9                  | Peak              | Vertical     |
|                  |        | 5350          | 41.01                   | 29.19                       | 30.13                 | 10.65                 | 50.72                       | 54                | -3.28                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 56.01                   | 29.15                       | 29.63                 | 10.95                 | 66.48                       | 68.2              | -1.72                 | Peak              | Horizontal   |
|                  |        | 5460          | 26.94                   | 29.15                       | 29.63                 | 10.95                 | 37.41                       | 54                | -16.59                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 51.25                   | 29.15                       | 29.63                 | 10.95                 | 61.72                       | 68.2              | -6.48                 | Peak              | Vertical     |
|                  |        | 5460          | 27.94                   | 29.15                       | 29.63                 | 10.95                 | 38.41                       | 54                | -15.59                | AV <sup>[1]</sup> | Vertical     |

| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11AC40<br>MIMO   | Low    | 4500          | 54.98                   | 29.19                       | 30.13                 | 10.65                 | 64.69                       | 68.2              | -3.51                 | Peak              | Horizontal   |
|                  |        | 4500          | 40.49                   | 29.19                       | 30.13                 | 10.65                 | 50.2                        | 54                | -3.8                  | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 54.47                   | 29.19                       | 30.13                 | 10.65                 | 64.18                       | 68.2              | -4.02                 | Peak              | Vertical     |
|                  |        | 4500          | 40.22                   | 29.19                       | 30.13                 | 10.65                 | 49.93                       | 54                | -4.07                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 52.06                   | 29.15                       | 29.63                 | 10.95                 | 62.53                       | 68.2              | -5.67                 | Peak              | Horizontal   |
|                  |        | 5150          | 28.86                   | 29.15                       | 29.63                 | 10.95                 | 39.33                       | 54                | -14.67                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 51.54                   | 29.15                       | 29.63                 | 10.95                 | 62.01                       | 68.2              | -6.19                 | Peak              | Vertical     |
|                  |        | 5150          | 30.67                   | 29.15                       | 29.63                 | 10.95                 | 41.14                       | 54                | -12.86                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 56.35                   | 29.19                       | 30.13                 | 10.65                 | 66.06                       | 68.2              | -2.14                 | Peak              | Horizontal   |
|                  |        | 5350          | 36.39                   | 29.19                       | 30.13                 | 10.65                 | 46.1                        | 54                | -7.9                  | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 56.85                   | 29.19                       | 30.13                 | 10.65                 | 66.56                       | 68.2              | -1.64                 | Peak              | Vertical     |
|                  |        | 5350          | 38.83                   | 29.19                       | 30.13                 | 10.65                 | 48.54                       | 54                | -5.46                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 56.2                    | 29.15                       | 29.63                 | 10.95                 | 66.67                       | 68.2              | -1.53                 | Peak              | Horizontal   |
|                  |        | 5460          | 27.35                   | 29.15                       | 29.63                 | 10.95                 | 37.82                       | 54                | -16.18                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 50.07                   | 29.15                       | 29.63                 | 10.95                 | 60.54                       | 68.2              | -7.66                 | Peak              | Vertical     |
|                  |        | 5460          | 28.74                   | 29.15                       | 29.63                 | 10.95                 | 39.21                       | 54                | -14.79                | AV <sup>[1]</sup> | Vertical     |



| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11AC80<br>MIMO   | Low    | 4500          | 54.77                   | 29.19                       | 30.13                 | 10.65                 | 65.14                       | 68.2              | -3.06                 | Peak              | Horizontal   |
|                  |        | 4500          | 35.94                   | 29.19                       | 30.13                 | 10.65                 | 46.07                       | 54                | -7.93                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 52.35                   | 29.19                       | 30.13                 | 10.65                 | 63.13                       | 68.2              | -5.07                 | Peak              | Vertical     |
|                  |        | 4500          | 35.83                   | 29.19                       | 30.13                 | 10.65                 | 45.8                        | 54                | -8.2                  | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 52.34                   | 29.15                       | 29.63                 | 10.95                 | 63.72                       | 68.2              | -4.48                 | Peak              | Horizontal   |
|                  |        | 5150          | 27.28                   | 29.15                       | 29.63                 | 10.95                 | 38.27                       | 54                | -15.73                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 51.13                   | 29.15                       | 29.63                 | 10.95                 | 61.66                       | 68.2              | -6.54                 | Peak              | Vertical     |
|                  |        | 5150          | 25.42                   | 29.15                       | 29.63                 | 10.95                 | 37.46                       | 54                | -16.54                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 54.02                   | 29.19                       | 30.13                 | 10.65                 | 63.78                       | 68.2              | -4.42                 | Peak              | Horizontal   |
|                  |        | 5350          | 36.59                   | 29.19                       | 30.13                 | 10.65                 | 47.38                       | 54                | -6.62                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 59.46                   | 29.19                       | 30.13                 | 10.65                 | 66.57                       | 68.2              | -1.63                 | Peak              | Vertical     |
|                  |        | 5350          | 38.7                    | 29.19                       | 30.13                 | 10.65                 | 49.27                       | 54                | -4.73                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 53.2                    | 29.15                       | 29.63                 | 10.95                 | 63.74                       | 68.2              | -4.46                 | Peak              | Horizontal   |
|                  |        | 5460          | 28.91                   | 29.15                       | 29.63                 | 10.95                 | 41.62                       | 54                | -12.38                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 48.91                   | 29.15                       | 29.63                 | 10.95                 | 60.03                       | 68.2              | -8.17                 | Peak              | Vertical     |
|                  |        | 5460          | 26.45                   | 29.15                       | 29.63                 | 10.95                 | 39.98                       | 54                | -14.02                | AV <sup>[1]</sup> | Vertical     |

| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11AX20<br>MIMO   | Low    | 4500          | 54.6                    | 29.19                       | 30.13                 | 10.65                 | 64.31                       | 68.2              | -3.89                 | Peak              | Horizontal   |
|                  |        | 4500          | 37.69                   | 29.19                       | 30.13                 | 10.65                 | 47.4                        | 54                | -6.6                  | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 55.51                   | 29.19                       | 30.13                 | 10.65                 | 65.22                       | 68.2              | -2.98                 | Peak              | Vertical     |
|                  |        | 4500          | 39.33                   | 29.19                       | 30.13                 | 10.65                 | 49.04                       | 54                | -4.96                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 54.2                    | 29.15                       | 29.63                 | 10.95                 | 64.67                       | 68.2              | -3.53                 | Peak              | Horizontal   |
|                  |        | 5150          | 25.66                   | 29.15                       | 29.63                 | 10.95                 | 36.13                       | 54                | -17.87                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 52.14                   | 29.15                       | 29.63                 | 10.95                 | 62.61                       | 68.2              | -5.59                 | Peak              | Vertical     |
|                  |        | 5150          | 29.67                   | 29.15                       | 29.63                 | 10.95                 | 40.14                       | 54                | -13.86                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 54.05                   | 29.19                       | 30.13                 | 10.65                 | 63.76                       | 68.2              | -4.44                 | Peak              | Horizontal   |
|                  |        | 5350          | 38.27                   | 29.19                       | 30.13                 | 10.65                 | 47.98                       | 54                | -6.02                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 56.34                   | 29.19                       | 30.13                 | 10.65                 | 66.05                       | 68.2              | -2.15                 | Peak              | Vertical     |
|                  |        | 5350          | 41.17                   | 29.19                       | 30.13                 | 10.65                 | 50.88                       | 54                | -3.12                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 55.85                   | 29.15                       | 29.63                 | 10.95                 | 66.32                       | 68.2              | -1.88                 | Peak              | Horizontal   |
|                  |        | 5460          | 27.33                   | 29.15                       | 29.63                 | 10.95                 | 37.8                        | 54                | -16.2                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 50.93                   | 29.15                       | 29.63                 | 10.95                 | 61.4                        | 68.2              | -6.8                  | Peak              | Vertical     |
|                  |        | 5460          | 26.61                   | 29.15                       | 29.63                 | 10.95                 | 37.08                       | 54                | -16.92                | AV <sup>[1]</sup> | Vertical     |



| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11AX40<br>MIMO   | Low    | 4500          | 55.06                   | 29.19                       | 30.13                 | 10.65                 | 64.77                       | 68.2              | -3.43                 | Peak              | Horizontal   |
|                  |        | 4500          | 40.79                   | 29.19                       | 30.13                 | 10.65                 | 50.5                        | 54                | -3.5                  | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 55.16                   | 29.19                       | 30.13                 | 10.65                 | 64.87                       | 68.2              | -3.33                 | Peak              | Vertical     |
|                  |        | 4500          | 40.19                   | 29.19                       | 30.13                 | 10.65                 | 49.9                        | 54                | -4.1                  | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 52.01                   | 29.15                       | 29.63                 | 10.95                 | 62.48                       | 68.2              | -5.72                 | Peak              | Horizontal   |
|                  |        | 5150          | 28.4                    | 29.15                       | 29.63                 | 10.95                 | 38.87                       | 54                | -15.13                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 52.22                   | 29.15                       | 29.63                 | 10.95                 | 62.69                       | 68.2              | -5.51                 | Peak              | Vertical     |
|                  |        | 5150          | 29.62                   | 29.15                       | 29.63                 | 10.95                 | 40.09                       | 54                | -13.91                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 56.06                   | 29.19                       | 30.13                 | 10.65                 | 65.77                       | 68.2              | -2.43                 | Peak              | Horizontal   |
|                  |        | 5350          | 37.14                   | 29.19                       | 30.13                 | 10.65                 | 46.85                       | 54                | -7.15                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 56.79                   | 29.19                       | 30.13                 | 10.65                 | 66.5                        | 68.2              | -1.7                  | Peak              | Vertical     |
|                  |        | 5350          | 39.63                   | 29.19                       | 30.13                 | 10.65                 | 49.34                       | 54                | -4.66                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 56.37                   | 29.15                       | 29.63                 | 10.95                 | 66.84                       | 68.2              | -1.36                 | Peak              | Horizontal   |
|                  |        | 5460          | 29.97                   | 29.15                       | 29.63                 | 10.95                 | 40.44                       | 54                | -13.56                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 50.42                   | 29.15                       | 29.63                 | 10.95                 | 60.89                       | 68.2              | -7.31                 | Peak              | Vertical     |
|                  |        | 5460          | 26.81                   | 29.15                       | 29.63                 | 10.95                 | 37.28                       | 54                | -16.72                | AV <sup>[1]</sup> | Vertical     |

| Ant1 & Ant2 MIMO |        |               |                         |                             |                       |                       |                             |                   |                       |                   |              |
|------------------|--------|---------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-------------------|-----------------------|-------------------|--------------|
| Mode             | ChName | Freq<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector          | Polarization |
| 11AX80<br>MIMO   | Low    | 4500          | 54.77                   | 29.19                       | 30.13                 | 10.65                 | 64.97                       | 68.2              | -3.23                 | Peak              | Horizontal   |
|                  |        | 4500          | 35.94                   | 29.19                       | 30.13                 | 10.65                 | 46.51                       | 54                | -7.49                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 4500          | 52.35                   | 29.19                       | 30.13                 | 10.65                 | 62.65                       | 68.2              | -5.55                 | Peak              | Vertical     |
|                  |        | 4500          | 35.83                   | 29.19                       | 30.13                 | 10.65                 | 46.19                       | 54                | -7.81                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5150          | 52.34                   | 29.15                       | 29.63                 | 10.95                 | 63.55                       | 68.2              | -4.65                 | Peak              | Horizontal   |
|                  |        | 5150          | 27.28                   | 29.15                       | 29.63                 | 10.95                 | 40.36                       | 54                | -13.64                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5150          | 51.13                   | 29.15                       | 29.63                 | 10.95                 | 62.14                       | 68.2              | -6.06                 | Peak              | Vertical     |
|                  |        | 5150          | 25.42                   | 29.15                       | 29.63                 | 10.95                 | 38.02                       | 54                | -15.98                | AV <sup>[1]</sup> | Vertical     |
|                  | High   | 5350          | 54.02                   | 29.19                       | 30.13                 | 10.65                 | 63.81                       | 68.2              | -4.39                 | Peak              | Horizontal   |
|                  |        | 5350          | 36.59                   | 29.19                       | 30.13                 | 10.65                 | 46.65                       | 54                | -7.35                 | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5350          | 59.46                   | 29.19                       | 30.13                 | 10.65                 | 66.3                        | 68.2              | -1.9                  | Peak              | Vertical     |
|                  |        | 5350          | 38.7                    | 29.19                       | 30.13                 | 10.65                 | 49.07                       | 54                | -4.93                 | AV <sup>[1]</sup> | Vertical     |
|                  |        | 5460          | 53.2                    | 29.15                       | 29.63                 | 10.95                 | 64.24                       | 68.2              | -3.96                 | Peak              | Horizontal   |
|                  |        | 5460          | 28.91                   | 29.15                       | 29.63                 | 10.95                 | 39.52                       | 54                | -14.48                | AV <sup>[1]</sup> | Horizontal   |
|                  |        | 5460          | 48.91                   | 29.15                       | 29.63                 | 10.95                 | 60.43                       | 68.2              | -7.77                 | Peak              | Vertical     |
|                  |        | 5460          | 26.45                   | 29.15                       | 29.63                 | 10.95                 | 38.82                       | 54                | -15.18                | AV <sup>[1]</sup> | Vertical     |



*Remark:*

1. *Measured Undesirable emission at difference data rate for each mode and recorded worst case for each mode.*
2. *Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80, IEEE 802.11ax HT20, IEEE 802.11ax HT40 and IEEE 802.11ax HT80;*
3. *Result Level = Read Level + Antenna Factor – PRM + Cable Loss*
4. *Over Limit = Result Level - Limit*



## 5.8. Antenna Requirements

### 5.8.1. Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 5.8.2. Antenna Connector Construction

The directional gains of antenna refer to section 1.1, and the antenna is an internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

### 5.8.3. Results: Compliance.

## 5.9. Frequency Stability


### 5.9.1 Standard Applicable

According to FCC §15.407(g) “Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user manual.”

According to FCC §2.1055(a) “The frequency stability shall be measured with variation of ambient temperature as follows:”

- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (2) From  $-20^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.
- (3) From  $0^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

### 5.9.2 Test Configuration

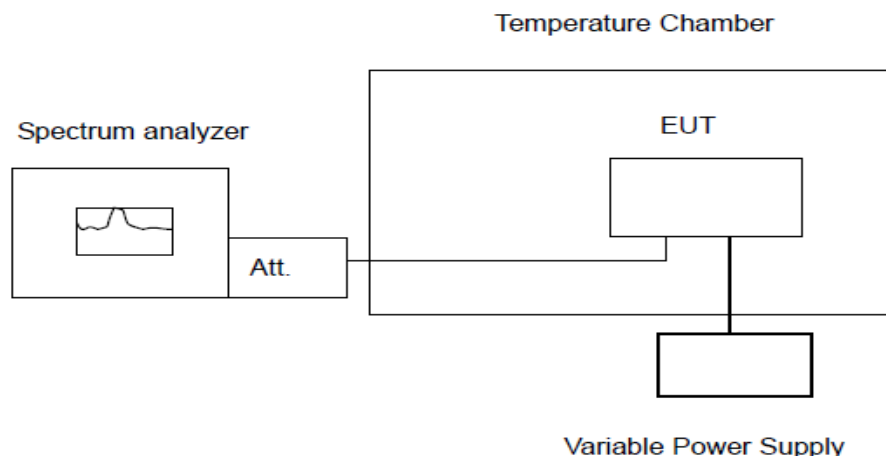

### 5.9.3 Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 degree operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30 degree. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 degree increased per stage until the highest temperature of +50 degree reached.

### 5.9.4 Test Results

PASS

Remark:

1. Measured all conditions and recorded worst case.
2. Please refer to Appendix G of Appendix Test Data for RLAN(5.2G);



## 6. LIST OF MEASURING EQUIPMENTS

| Item | Test Equipment       | Manufacturer    | Model No./HVIN | Serial No.   | Calibration Date | Calibration Due Date |
|------|----------------------|-----------------|----------------|--------------|------------------|----------------------|
| 1    | MXA Signal Analyzer  | Keysight        | N9020A         | MY52091623   | 2021/1/4         | 2022/1/3             |
| 2    | Power Sensor         | Agilent         | U2021XA        | MY5365004    | 2021/1/4         | 2022/1/3             |
| 3    | Power Meter          | Agilent         | U2531A         | TW53323507   | 2021/1/4         | 2022/1/3             |
| 4    | Loop Antenna         | schwarzbeck     | FMZB1519 B     | 00023        | 2019/11/16       | 2022/11/15           |
| 5    | Wideband Antenna     | schwarzbeck     | VULB 9163      | 958          | 2019/11/16       | 2022/11/15           |
| 6    | Horn Antenna         | schwarzbeck     | 9120D-114 1    | 1574         | 2019/11/16       | 2022/11/15           |
| 7    | EMI Test Receiver    | R&S             | ESCI           | 100849/003   | 2021/1/4         | 2022/1/3             |
| 8    | Controller           | MF              | MF7802         | N/A          | N/A              | N/A                  |
| 9    | Amplifier            | schwarzbeck     | BBV 9743       | 209          | 2021/1/4         | 2022/1/3             |
| 10   | Amplifier            | Tonscend        | TSAMP-05 18SE  | --           | 2021/1/4         | 2022/1/3             |
| 11   | RF Cable(below 1GHz) | HUBER+SUHNER    | RG214          | N/A          | 2021/1/4         | 2022/1/3             |
| 12   | RF Cable(above 1GHz) | HUBER+SUHNER    | RG214          | N/A          | 2021/1/4         | 2022/1/3             |
| 13   | Artificial Mains     | ROHDE & SCHWARZ | ENV 216        | 101333-IP    | 2021/1/4         | 2022/1/3             |
| 14   | EMI Test Software    | ROHDE & SCHWARZ | ESK1           | V1.71        | N/A              | N/A                  |
| 15   | RE test software     | Tonscend        | JS32-RE        | V2.0.2.0     | N/A              | N/A                  |
| 16   | Test Software        | Tonscend        | JS1120-3       | V2.5.77.0418 | N/A              | N/A                  |
| 17   | Horn Antenna         | A-INFO          | LB-180400-KF   | J211020657   | 2020/10/12       | 2022/10/11           |
| 18   | Amplifier            | CDSA            | PAP-1840       | 17021        | 2020/10/10       | 2021/10/09           |
| 19   | Spectrum Analyzer    | R&S             | FSP40          | 100550       | 2021/1/10        | 2022/1/9             |



## **7. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **8. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

## **9. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----