

TEST REPORT

Product Name : OTT+Speaker
Brand Mark : N/A
Model No. : SEI810CCOA
FCC ID : 2AOVU-SK330LA
Report Number : BLA-EMC-202112-A7605
Date of Sample Receipt : 2021/12/16
Date of Test : 2021/12/16 to 2022/1/13
Date of Issue : 2022/1/13
Test Standard : 47 CFR Part 15, Subpart E 15.407
Test Result : Pass

Prepared for:

Shenzhen SEI Robotics Co., Ltd.

**4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen
Hi-Tech Industrial Park, Nanshan District, Shenzhen, China**

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Jozu

Approved by:

Blue Zhong

Review by:

Sueels

Date:

2022/1/13



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/1/13	Original
01	2022/1/14	Model no. change form SK330LA to SEI810CCOA

TABLE OF CONTENTS

1	TEST SUMMARY.....	5
2	GENERAL INFORMATION.....	6
3	GENERAL DESCRIPTION OF E.U.T.....	6
4	TEST ENVIRONMENT.....	7
5	TEST MODE.....	7
6	MEASUREMENT UNCERTAINTY.....	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST.....	10
10	FREQUENCY STABILITY.....	14
10.1	LIMITS.....	14
10.2	BLOCK DIAGRAM OF TEST SETUP.....	14
10.3	TEST DATA.....	14
11	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	15
11.1	LIMITS.....	15
11.2	BLOCK DIAGRAM OF TEST SETUP.....	16
11.3	PROCEDURE.....	16
11.4	TEST DATA.....	18
12	RADIATED EMISSIONS.....	26
12.1	BLOCK DIAGRAM OF TEST SETUP.....	26
12.2	PROCEDURE.....	26
12.3	TEST DATA.....	28
13	PEAK POWER SPECTRUM DENSITY.....	44
13.1	LIMITS.....	44
13.2	BLOCK DIAGRAM OF TEST SETUP.....	44
13.3	TEST DATA.....	45
14	MAXIMUM CONDUCTED OUTPUT POWER.....	46
14.1	LIMITS.....	46
14.2	BLOCK DIAGRAM OF TEST SETUP.....	46
14.3	TEST DATA.....	47

15	MINIMUM 6 DB BANDWIDTH (5.725-5.85 GHZ BAND)	48
15.1	LIMITS	48
15.2	BLOCK DIAGRAM OF TEST SETUP	48
15.3	TEST DATA	48
16	99% BANDWIDTH	49
16.1	BLOCK DIAGRAM OF TEST SETUP	49
16.2	TEST DATA	49
17	DUTY CYCLE	50
17.1	BLOCK DIAGRAM OF TEST SETUP	50
17.2	TEST DATA	50
18	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	51
18.1	LIMITS	51
18.2	BLOCK DIAGRAM OF TEST SETUP	51
18.3	PROCEDURE	51
18.4	TEST DATA	53
19	ANTENNA REQUIREMENT	55
19.1	CONCLUSION	55
19.1	CONCLUSION	56
20	26DB EMISSION BANDWIDTH	57
20.1	BLOCK DIAGRAM OF TEST SETUP	57
20.2	TEST DATA	57
21	APPENDIX	58
21.1	MAXIMUM CONDUCTED OUTPUT POWER	58
21.2	-26DB BANDWIDTH	88
21.3	OCCUPIED CHANNEL BANDWIDTH	103
21.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL	133
21.5	BAND EDGE	163
21.6	FREQUENCY STABILITY	184
21.7	CONDUCTED RF SPURIOUS EMISSION	199
21.8	-6DB BANDWIDTH	229
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		244
APPENDIX B: PHOTOGRAPHS OF EUT		246

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
99% Bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 II D	N/A	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmitter Power Control	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (h)(1)	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass

2 GENERAL INFORMATION

Applicant	Shenzhen SEI Robotics Co., Ltd.
Address	4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, China
Manufacturer	Shenzhen SEI Robotics Co., Ltd.
Address	4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, China
Factory	Shenzhen SEI Robotics Co., Ltd.
Address	4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, China
Product Name	OTT+Speaker
Test Model No.	SEI810CCOA

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	SMB.263.08
Software Version	v10.8.245
Operation Frequency:	Band 1 : 5180MHz-5240MHz; Band 4 : 5745MHz-5825MHz
Channel numbers:	Band 1: 802.11a/802.11n(HT20)/802.11ac(HT20): 4, 802.11n(HT40)/802.11ac(HT40):2, 802.11ac(HT80): 1 Band 4: 802.11a/802.11(HT20)/802.11ac(HT20): 5, 802.11n(HT40)/802.11ac(HT40): 2, 802.11ac(HT80): 1
Channel separation:	802.11a/n/ac(HT20): 20MHz, 802.11n/ac(HT40): 40MHz, 802.11ac(HT80): 80MHz
Modulation technology: (IEEE 802.11a/n/ac)	BPSK, QPSK, 16-QAM, 64-QAM, 256QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n/ac):	Up to 866.7Mbps
Antenna Type:	Internal antenna
Antenna gain:	5dBi(Provided by the applicant)
Note:	Antenna number : 2 SISO mode: 802.11a MIMO mode: 802.11n(HT20)/ 802.11n(HT40)/ 802.11ac(HT20)/ 802.11ac(HT40)/ 802.11ac(HT80) Directional gain of MIMO mode: $5+10\log_2=8.01\text{dBi}$
Remark: The Antenna Gain is supplied by the customer. BlueAsia is not responsible for this data	

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25℃	12Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (The duty cycle is greater than 98%)
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Frequency Stability					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Radiated Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022

Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Peak Power spectrum density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Transmitter Power Control

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Maximum Conducted output power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022

Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of 99% Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Duty Cycle

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of 26dB Emission bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022


10 FREQUENCY STABILITY

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	ANSI C63.10 (2013) Section 6.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
---------------	---

10.2 BLOCK DIAGRAM OF TEST SETUP

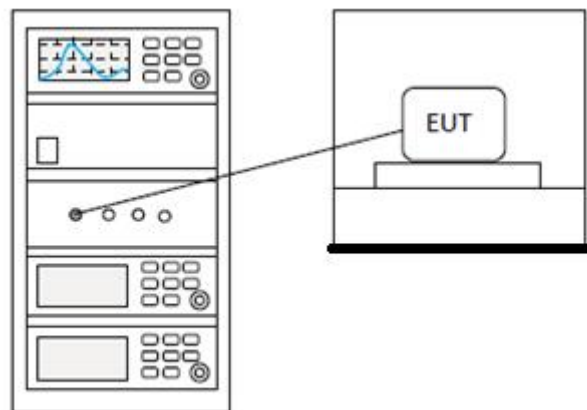

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

11 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

11.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

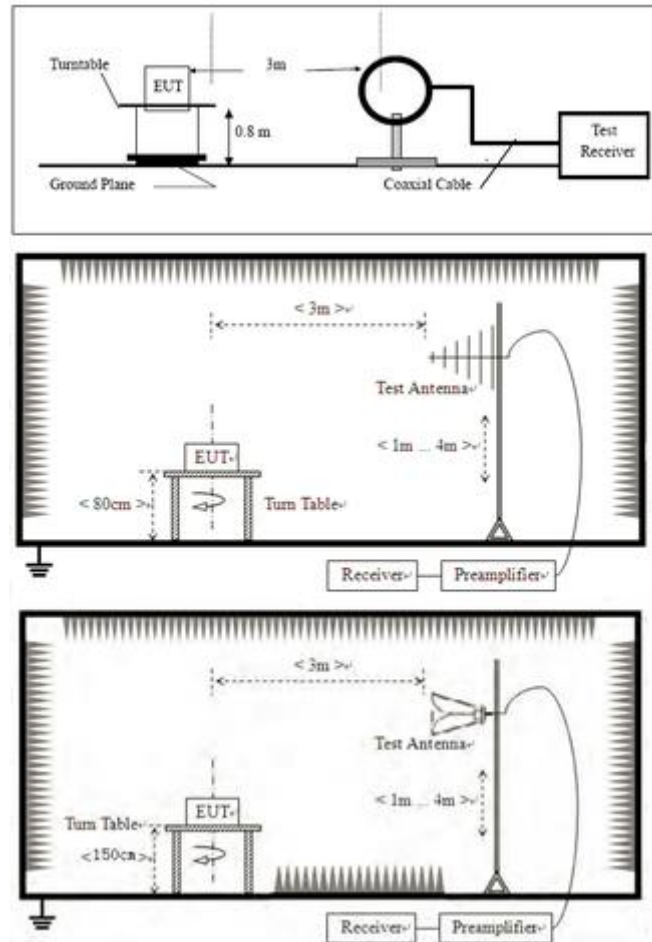

11.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

BlueAsia

11.4 TEST DATA

[TestMode: TX band1 A low channel]; [Polarity: Horizontal]

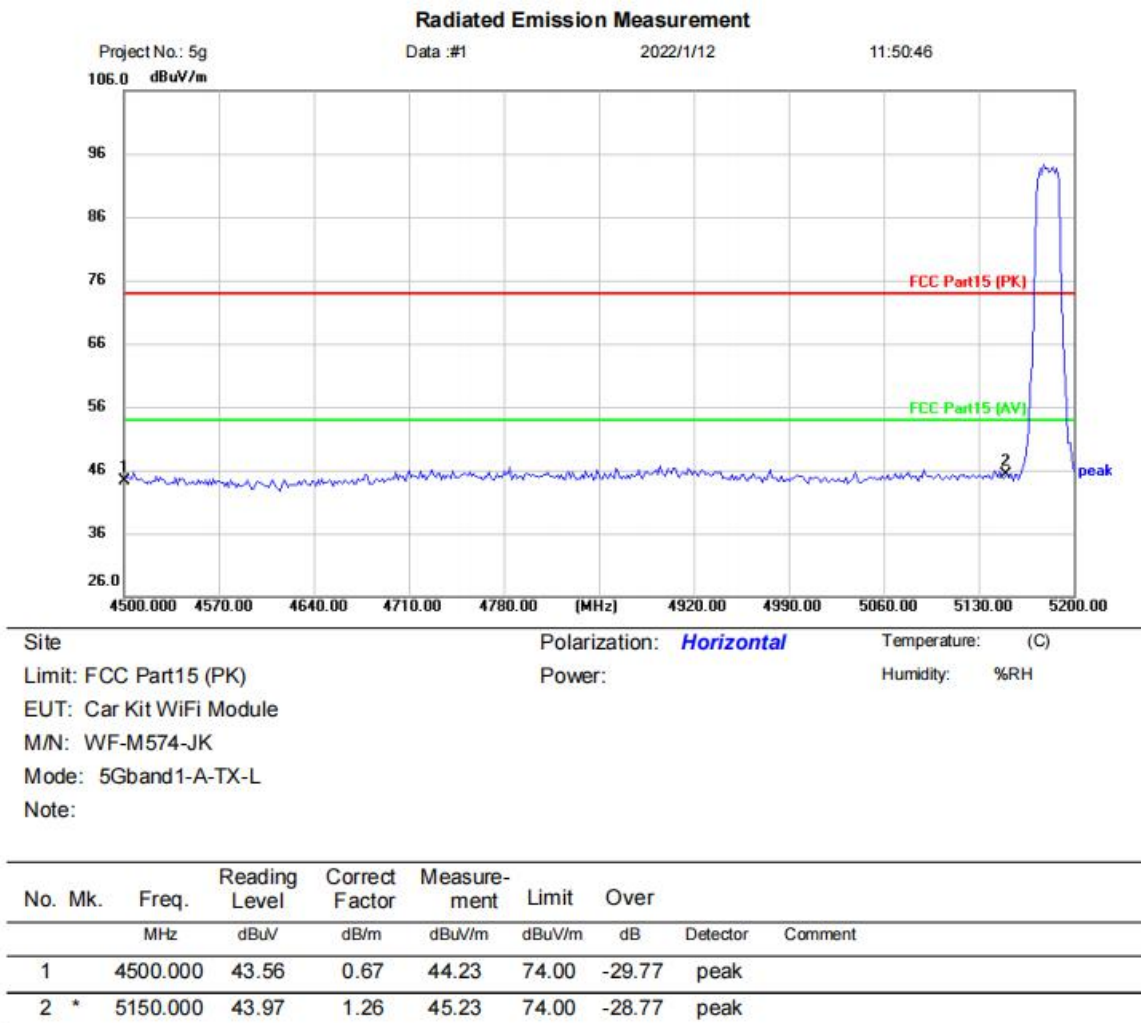


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band1 A low channel]; [Polarity: Vertical]

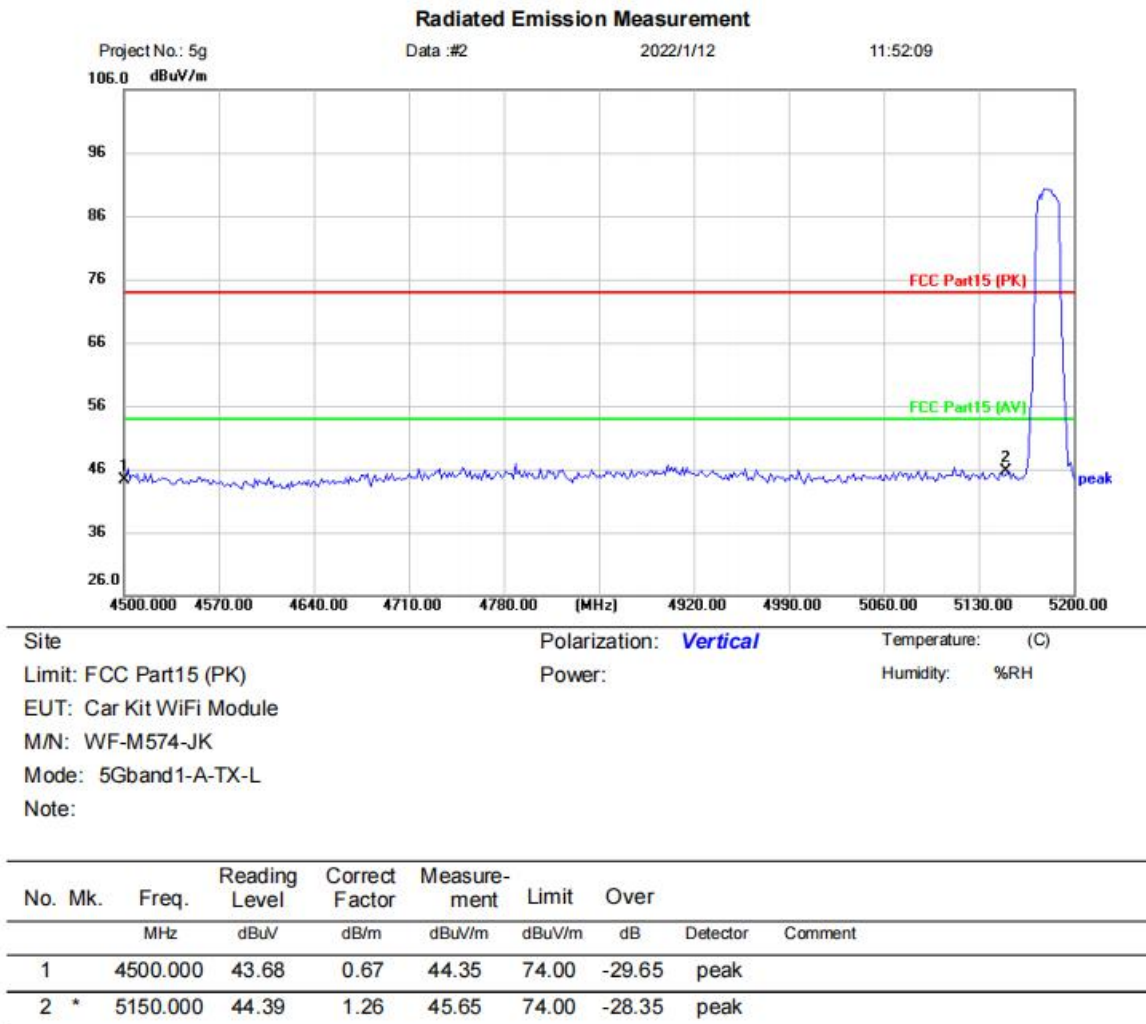


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band1 A high channel]; [Polarity: Horizontal]

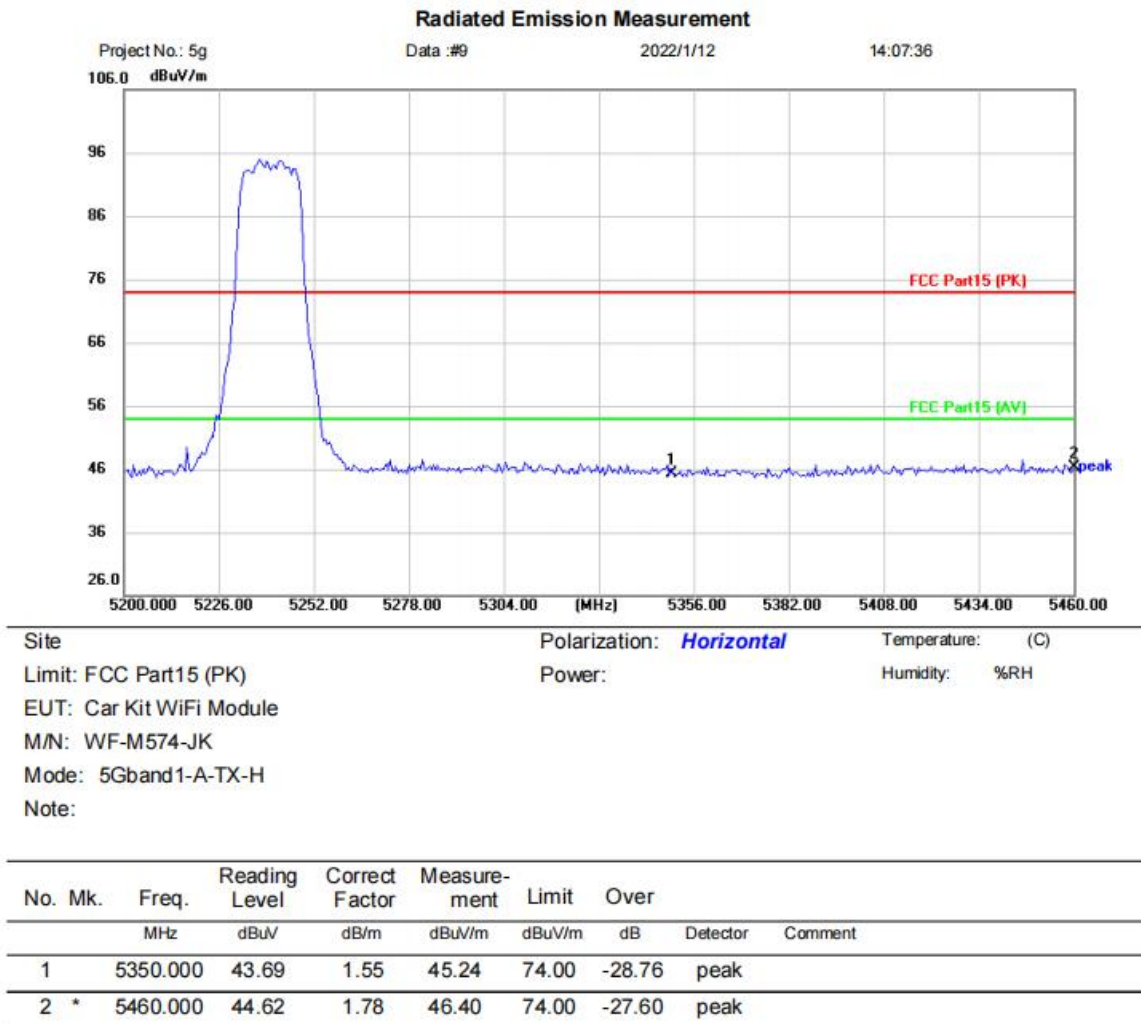


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band1 A high channel]; [Polarity: Vertical]

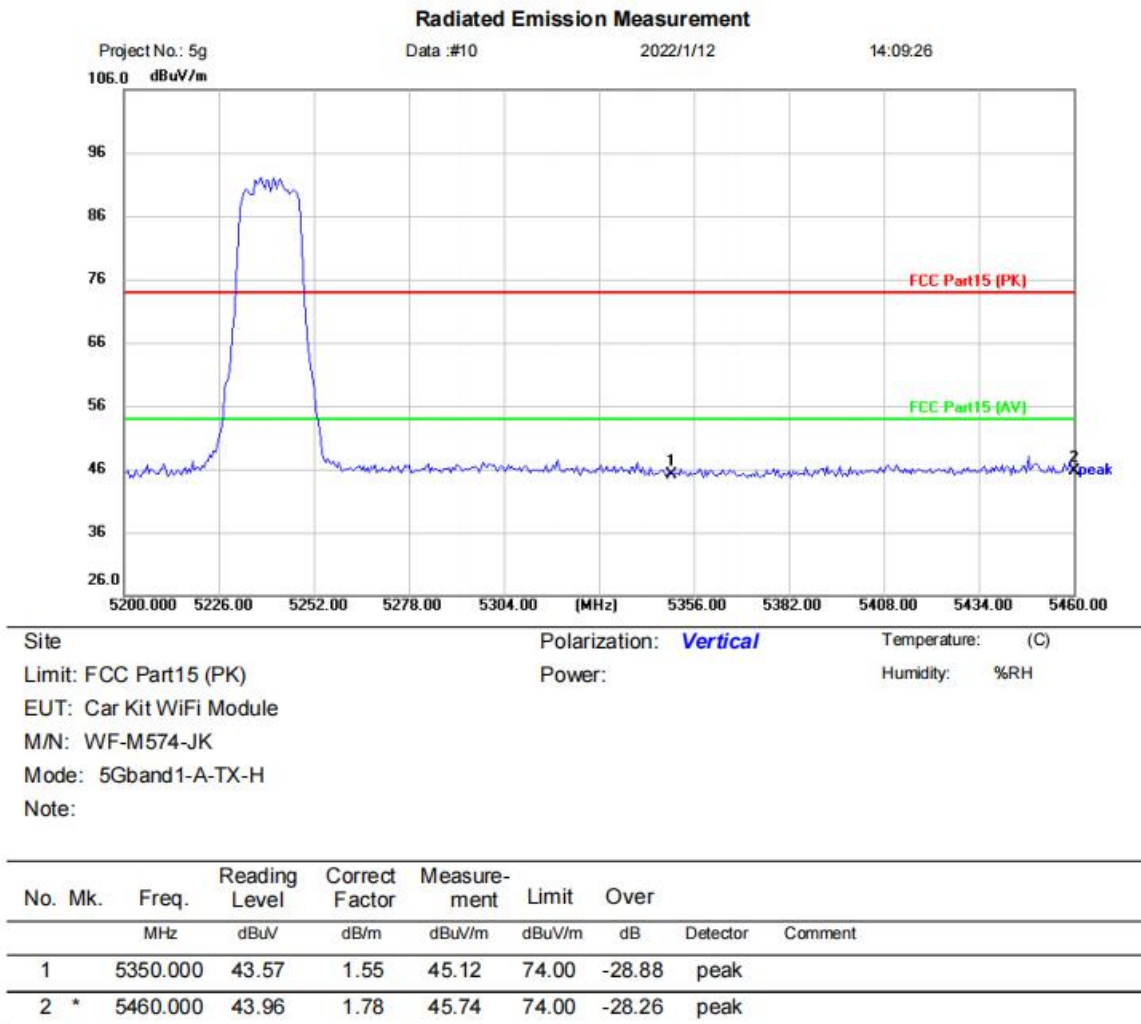


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band4 A low channel]; [Polarity: Horizontal]

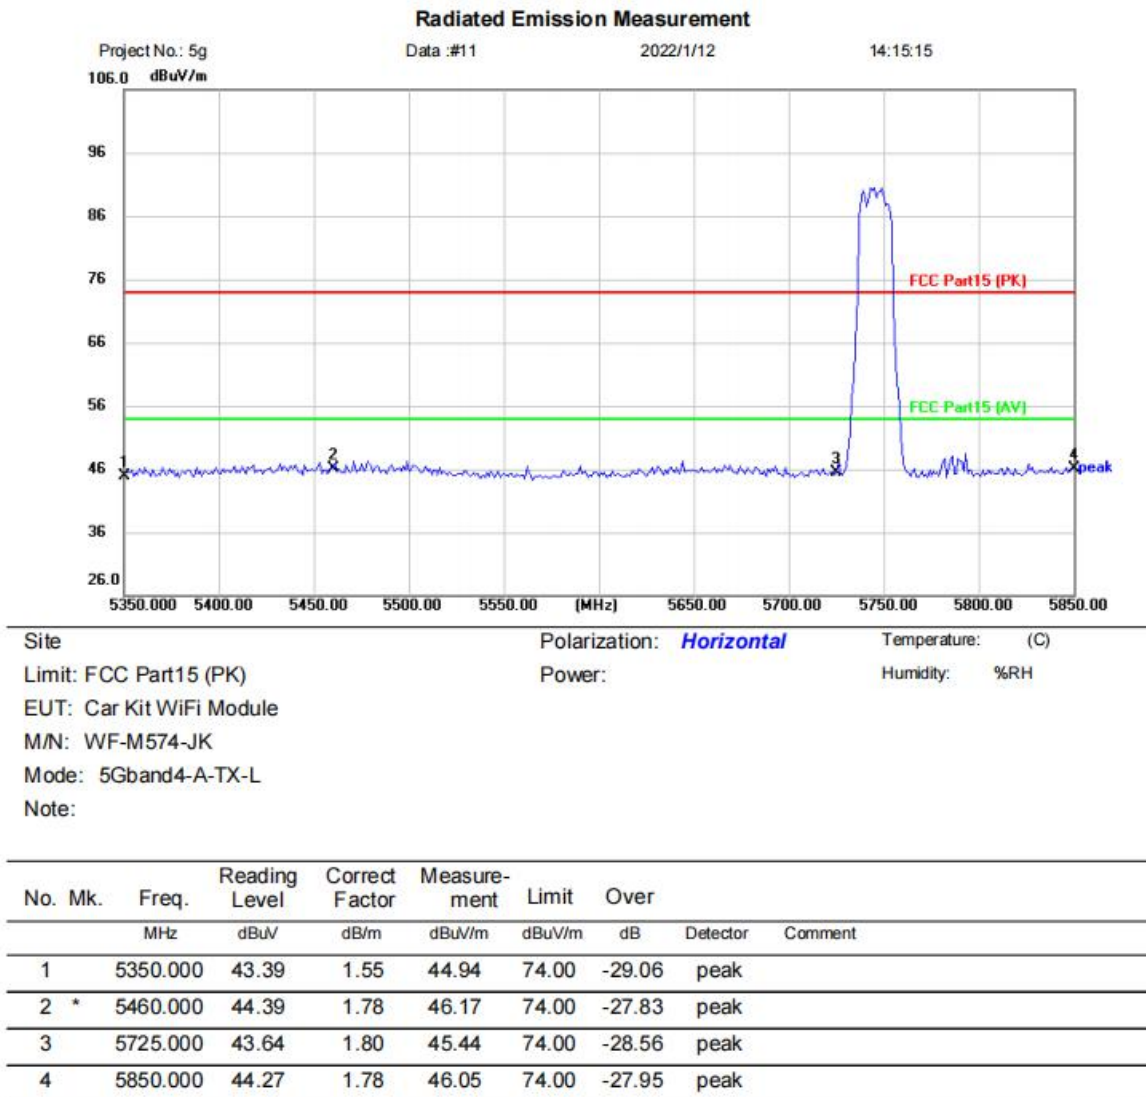


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band4 A low channel]; [Polarity: Vertical]

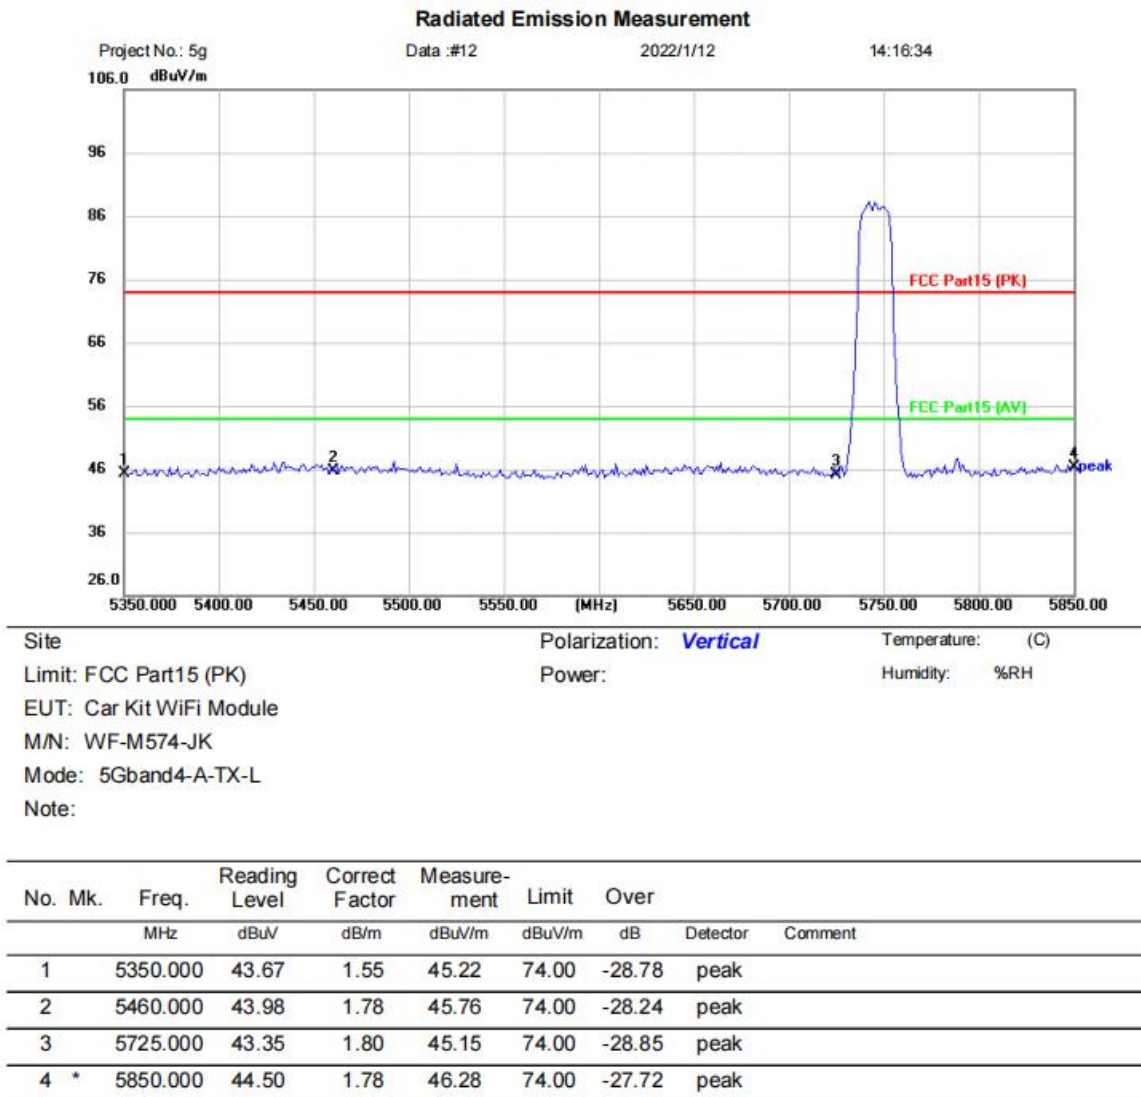


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band4 A Highest channel]; [Polarity: Horizontal]

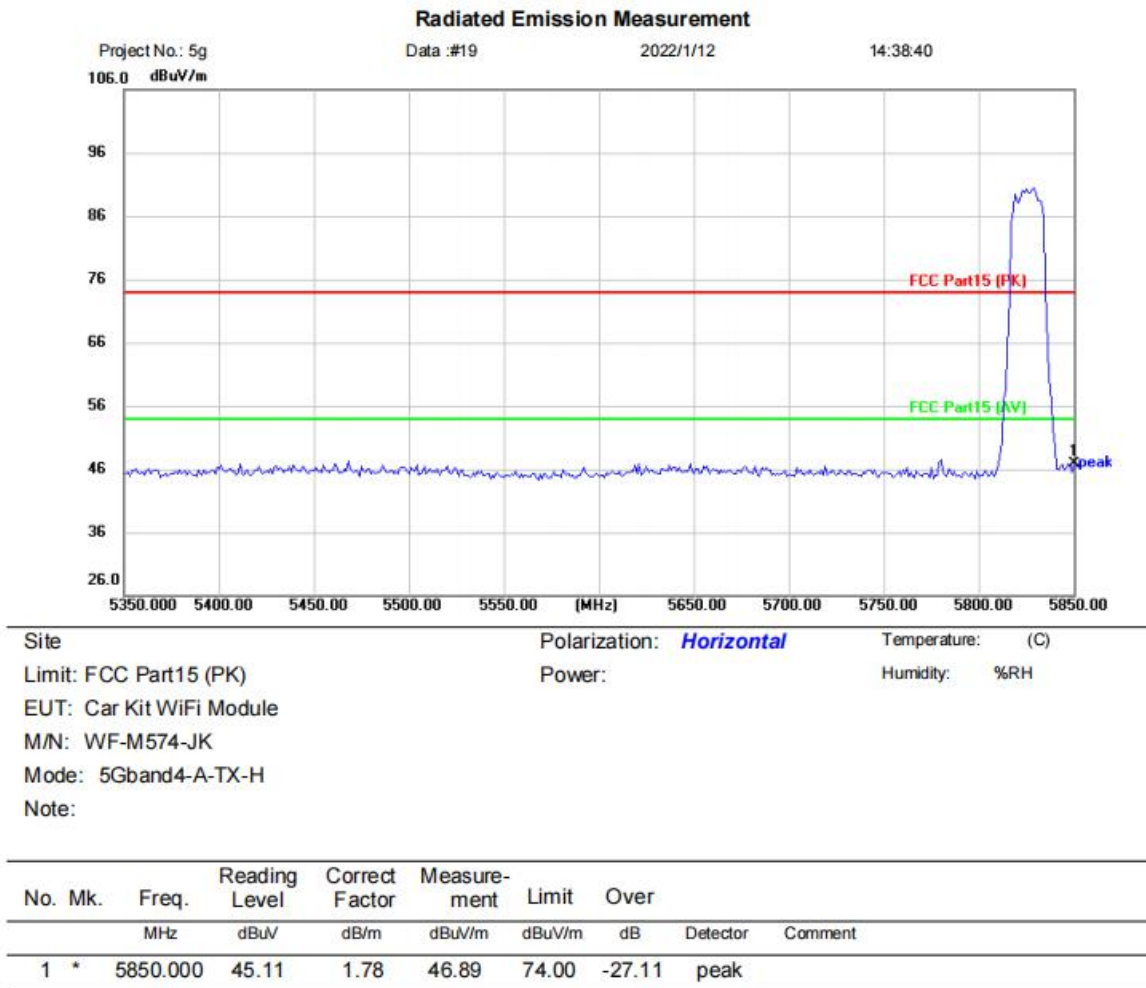


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX band4 A Highest channel]; [Polarity: Vertical]

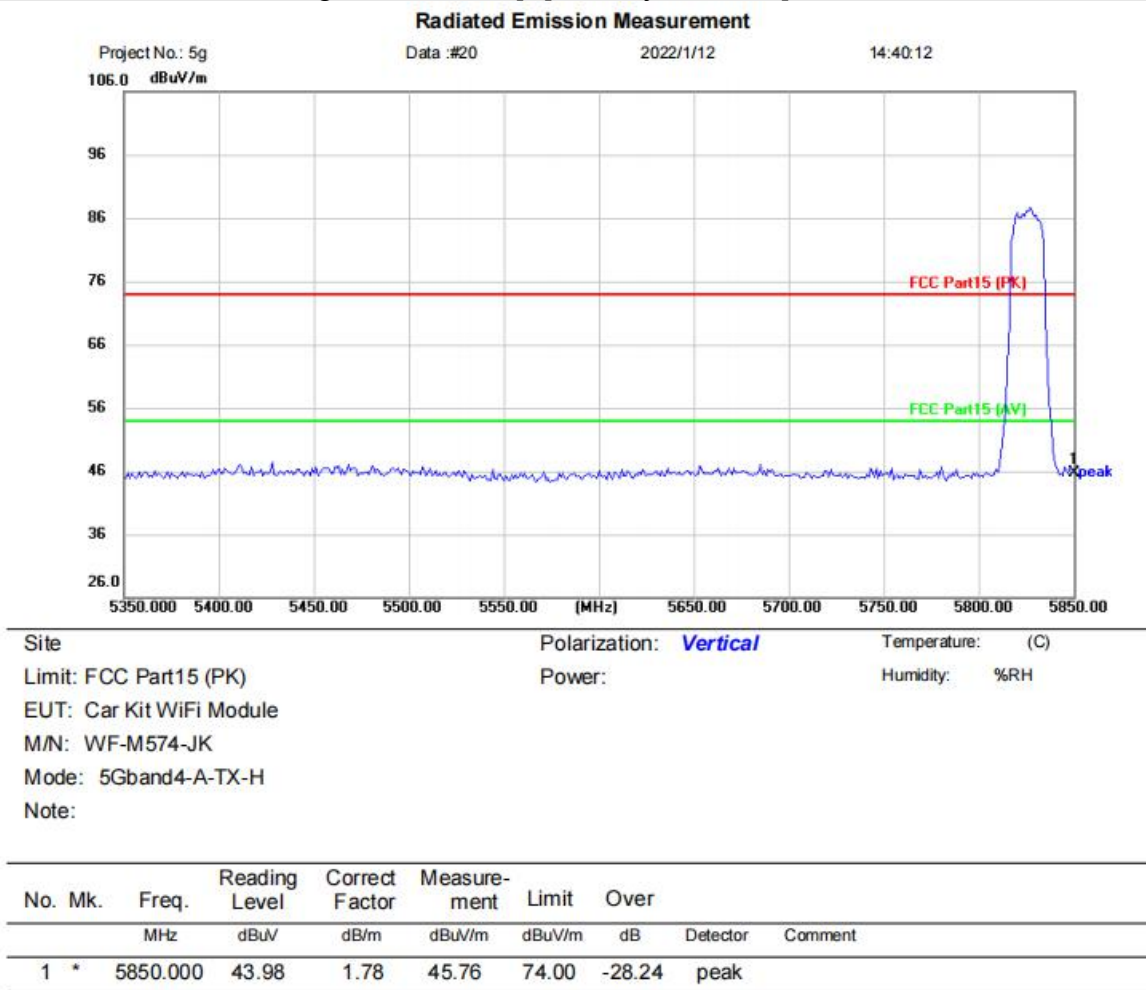

*:Maximum data x:Over limit !:over margin


(Reference Only)

Test Result: Pass

12 RADIATED EMISSIONS

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

12.1 BLOCK DIAGRAM OF TEST SETUP

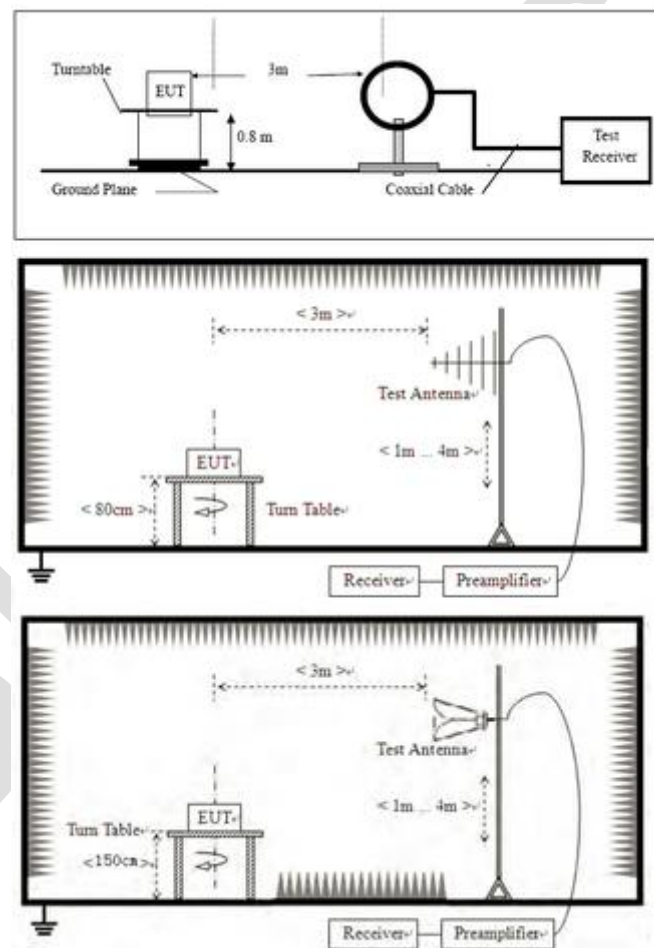

12.2 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest

radiation.

- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
- 2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
- 3. Scan from 9kHz to 40GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

12.3 TEST DATA

[TestMode: TX band1 below 1G]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202112-A76
EUT: OTT+Speaker	Test Engineer: York
M/N: SK330LA	Temperature:
S/N:	Humidity:
Test Mode: 5.1Gwifi mode	Test Voltage:
Note:	Test Data: 2021-12-21 13:50:05

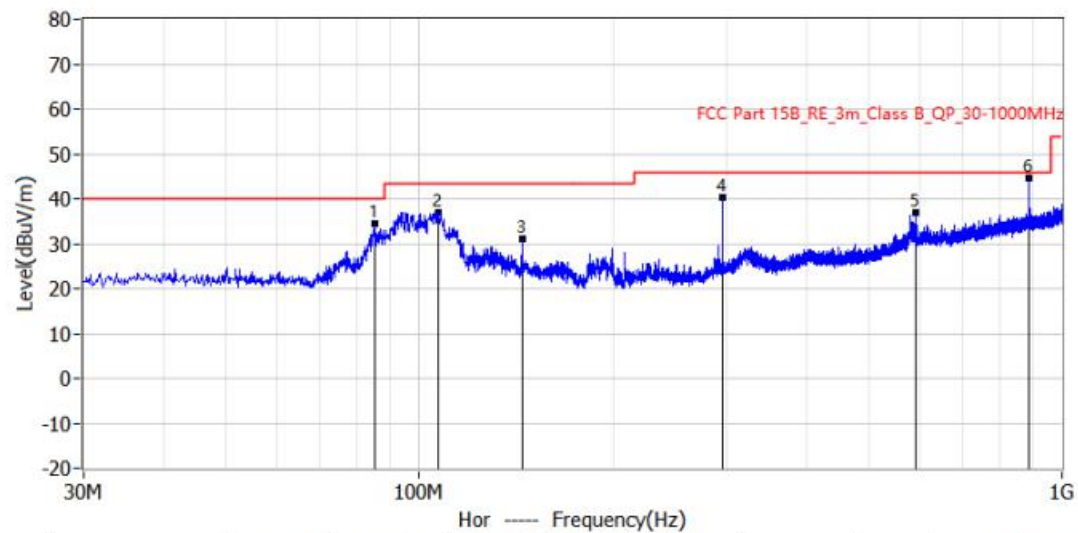

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	85.290MHz	40.0	34.4	-5.6	14.9	19.5	QP	Hor	100.0	346.0
2*	107.115MHz	43.5	37.0	-6.5	15.6	21.4	QP	Hor	100.0	30.0
3*	144.581MHz	43.5	31.1	-12.4	7.5	23.6	QP	Hor	100.0	336.0
4*	296.629MHz	46.0	40.2	-5.8	16.2	24.0	QP	Hor	100.0	333.0
5*	593.449MHz	46.0	36.8	-9.2	5.7	31.1	QP	Hor	100.0	176.0
6*	890.148MHz	46.0	44.5	-1.5	9.6	34.9	QP	Hor	100.0	58.0

Test Result: Pass