


TEST REPORT

Applicant: SHENZHEN 8BITDO TECH CO., LTD.
Address: Room 210, Building 1, Nanhai Ecool, No.6 Xinghua Road, Shekou, Nanshan District, Shenzhen, China
Equipment Type: 8BitDo NEOGEO Wireless Controller
Model Name: 80HC (refer to section 2.4)
Brand Name: 8BITDO
FCC ID: 2AOWF-NG30
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: Jun. 09, 2023
Test Date: Jun. 21, 2023 - Jul. 24, 2023
Date of Issue: Jul. 27, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 27, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	9
4.4	Description of Test Setup	10
4.5	Measurement Results Explanation Example	13
5	TEST ITEMS	14
5.1	Antenna Requirements	14
5.2	Number of Hopping Frequency	15
5.3	Peak Output Power	16
5.4	Occupied Bandwidth	17
5.5	Carrier Frequency Separation	18

5.6	Time of Occupancy (Dwell time)	19
5.7	Conducted Spurious Emission & Authorized-band band-edge	20
5.8	Conducted Emission	21
5.9	Radiated Spurious Emission	22
5.10	Band Edge (Restricted-band band-edge).....	24
ANNEX A	TEST RESULT	25
A.1	Number of Hopping Frequency	25
A.2	Peak Output Power	26
A.3	Occupied Bandwidth	27
A.4	Hopping Frequency Separation.....	29
A.5	Time of Occupancy (Dwell time)	30
A.6	Conducted Spurious Emissions & Authorized-band band-edge	31
A.7	Conducted Emissions.....	35
A.8	Radiated Emission	37
A.9	Band Edge (Restricted-band band-edge).....	45
ANNEX B	TEST SETUP PHOTOS	47
ANNEX C	EUT EXTERNAL PHOTOS	47
ANNEX D	EUT INTERNAL PHOTOS	47

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SHENZHEN 8BITDO TECH CO., LTD.
Address	Room 210, Building 1, Nanhai Ecool, No.6 Xinghua Road, Shekou, Nanshan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	SHENZHEN ONEBITDO TECH CO., LTD.
Address	Room 203, Building 1, Huajian Building, Xinghua Road, Shekou, Shuiwan Community, Zhaoshang Street, Nanshan District, Shenzhen, China

2.3 Factory Information

Factory	Shenzhen Zhongxingda Electronic Co., Ltd.
Address	3-4/F, Bldg 10, Tongfuyu Industrial Zone, Lezhujiao Village, Xixiang, Baoan District, Shenzhen, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	8BitDo NEOGEO Wireless Controller
Model Name Under Test	80HC
Series Model Name	80HC01, 80HC02, 80HC03, 80HC04, 80HC05, 80HC06, 80HC07, 80HC08
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name. (this information provided by the customer)
Hardware Version	V 2.00
Software Version	V 1.06
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth BLE 2.4G ISM Band
-----------------------------------	--------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	1 Mbps
Frequency Range	The frequency range used is 2402 MHz – 2480 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of channel	79
Tested Channel	Low (2402 MHz), Middle (2441 MHz), High (2480 MHz)
Antenna Type	PCB Antenna
Antenna Gain	2.89 dBi
Adaptive or Non-Adaptive	Non-Adaptive
The Max RF Output power	1.04 dBm

All Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	28	2429	55	2456
2	2403	29	2430	56	2457
3	2404	30	2431	57	2458
4	2405	31	2432	58	2459
5	2406	32	2433	59	2460
6	2407	33	2434	60	2461
7	2408	34	2435	61	2462
8	2409	35	2436	62	2463
9	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453	79	2480
26	2427	53	2454		
27	2428	54	2455		

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note 1}
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Hopping Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.8	Pass
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	ANNEX A.9	Pass
11	Receiver Spurious Emissions	--	--	N/A ^{Note 2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	53% to 67%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22.6°C to +24.4°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2023.05.16	2024.05.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2022.09.06	2023.09.05
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2022.02.03	2025.02.02
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2024.09.03
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2022.09.09	2023.09.08
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	00883	2022.04.01	2025.03.31
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.09	2023.09.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2020.09.08	2023.09.07
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2020.09.08	2023.09.07
Amplifier	COM-MV	KA_LNA18-40G-01	18050001	2020.09.08	2023.09.07
Amplifier	COM-MV	ZT30-1000M	B201711908 2	2022.12.07	2023.12.06

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

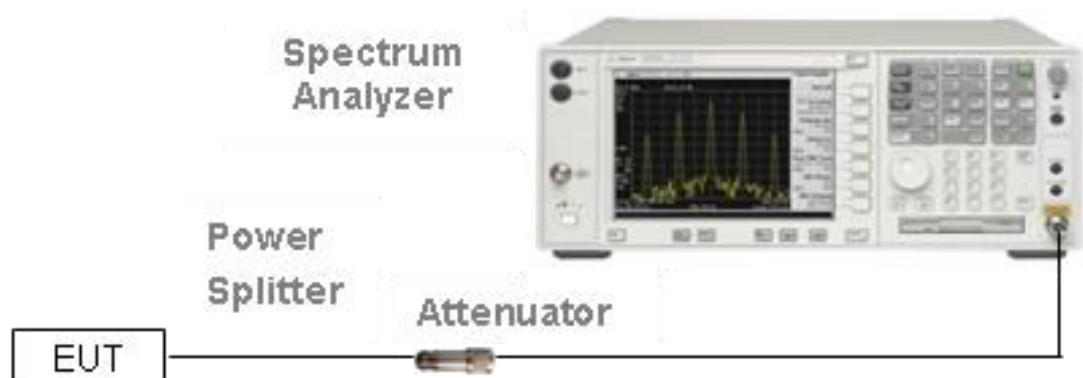


(Diagram 1)

4.4.2 For AC Power Supply Port Test

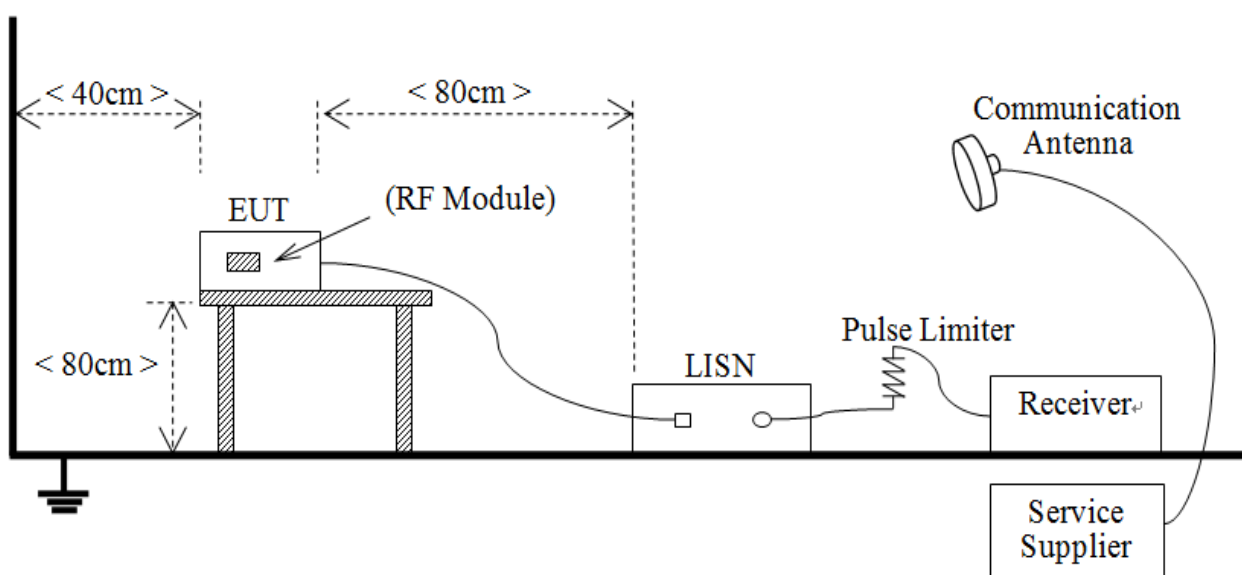


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

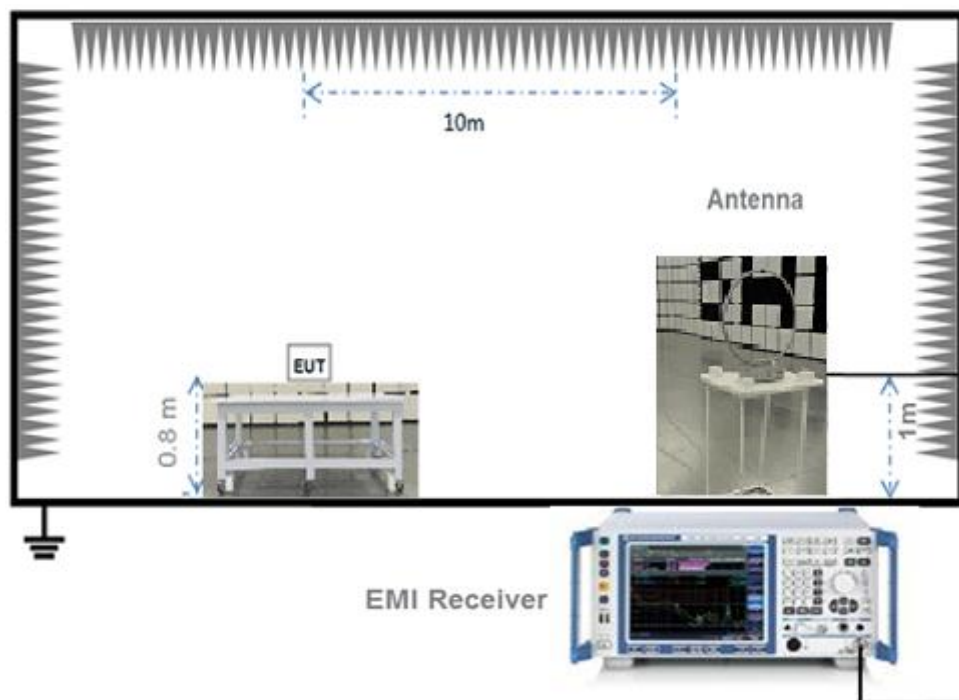


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

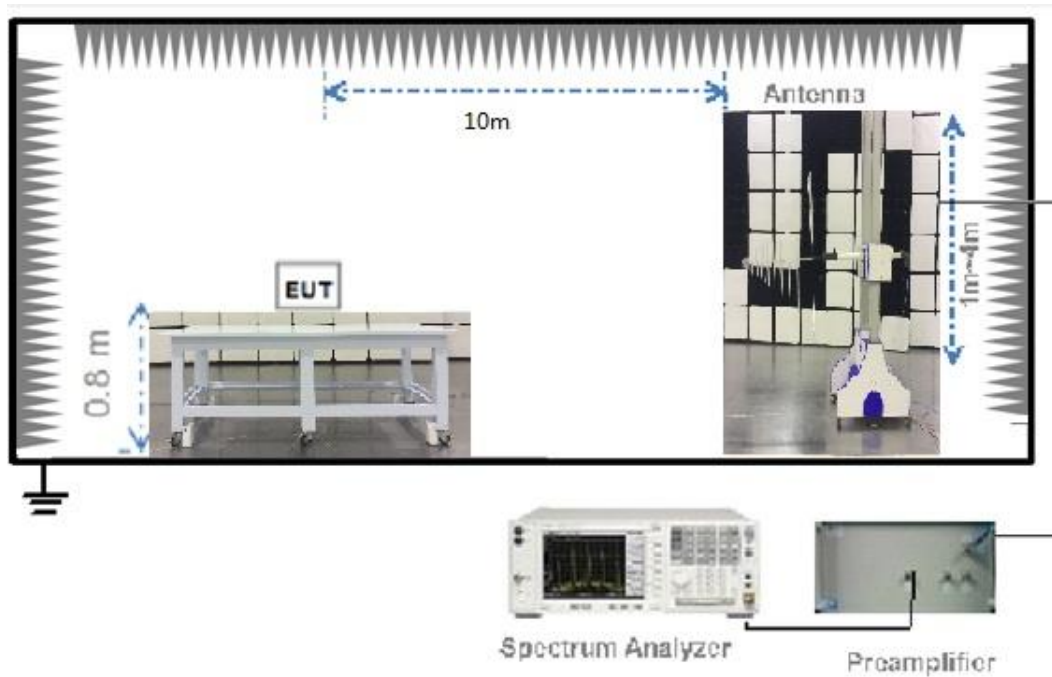

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

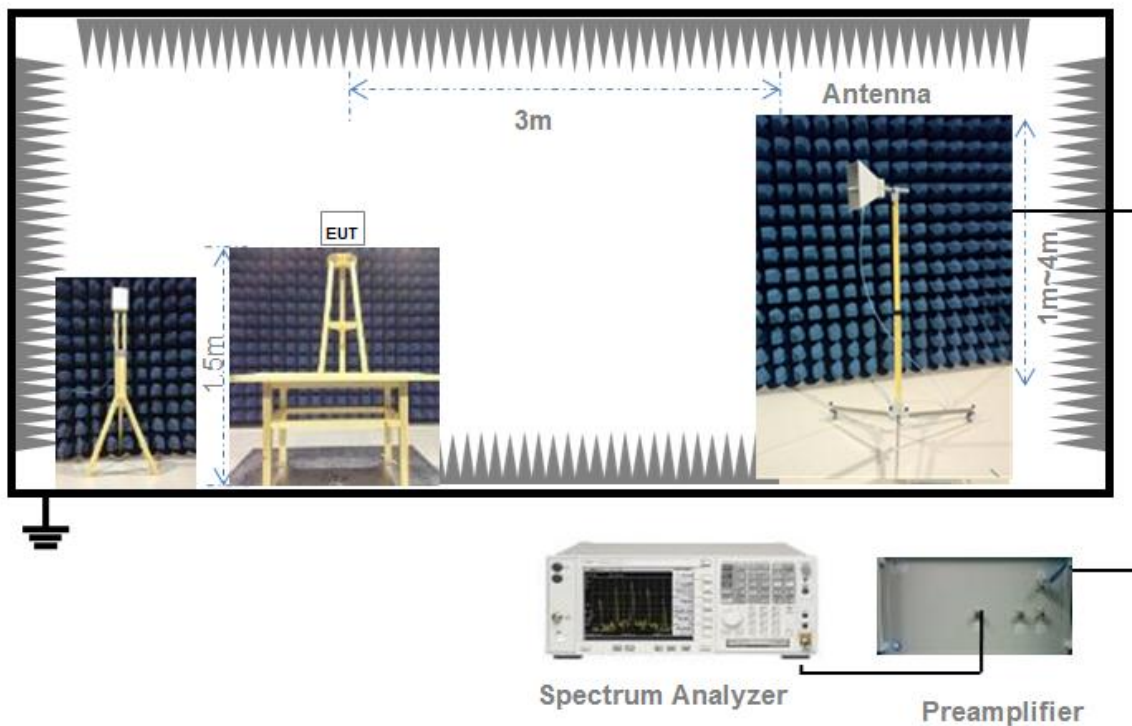

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)
= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass

Test plots

GFSK 2.4 GHz ~ 2.4835 GHz

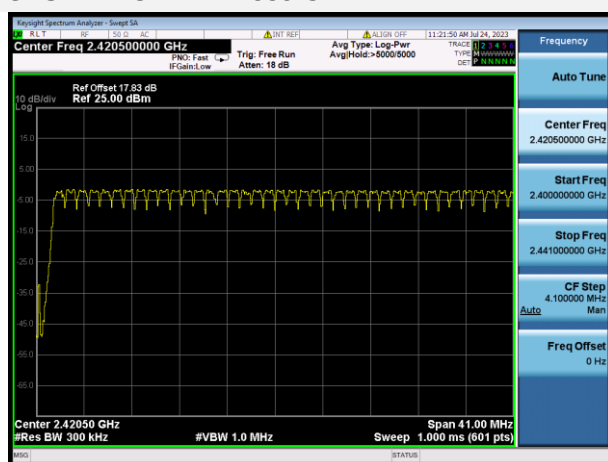

GFSK 2.4 GHz ~ 2.4835 GHz

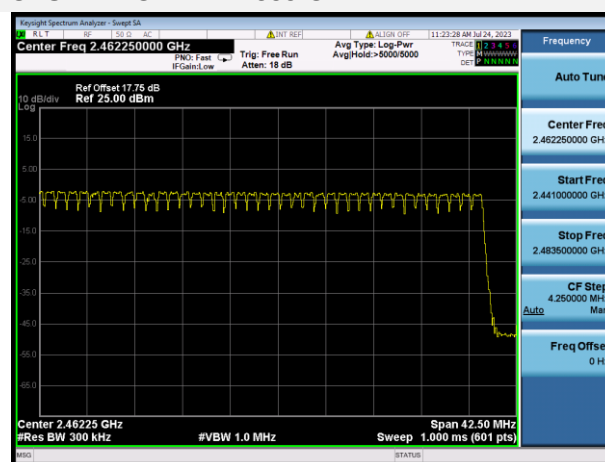


A.2 Peak Output Power

Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	0.63	1.16	21	125	Pass
Middle	0.92	1.24			Pass
High	1.04	1.27			Pass

Test plots


GFSK LOW CHANNEL

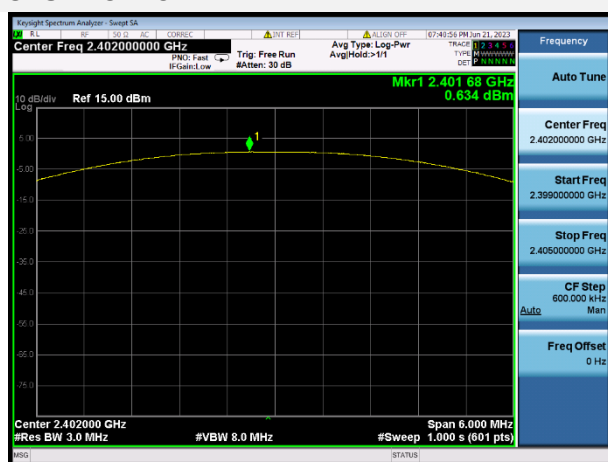

GFSK MIDDLE CHANNEL

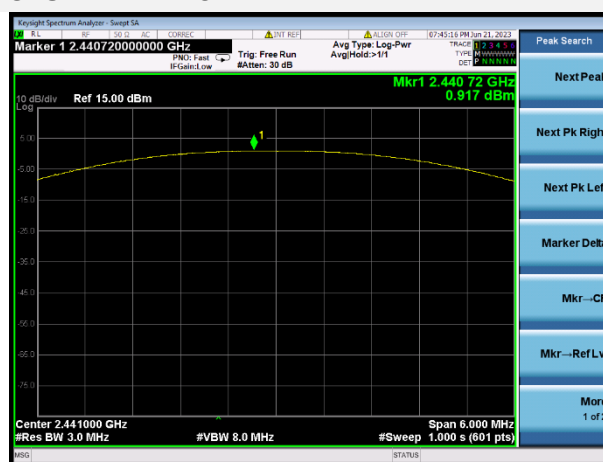

GFSK HIGH CHANNEL

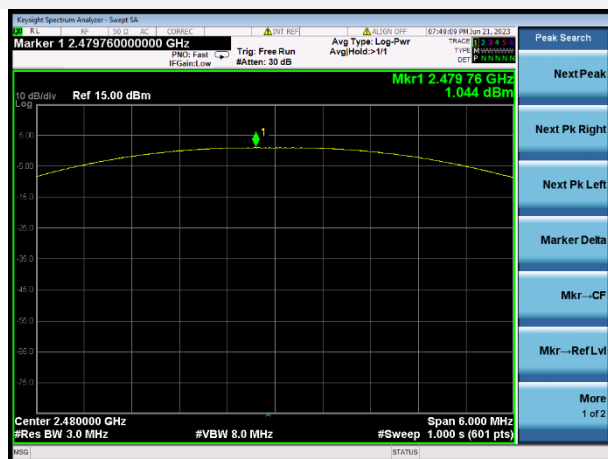

A.3 Occupied Bandwidth

Test Data

Test Mode	GFSK	
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	1.205000	1.009700
Middle Channel	1.205000	1.026000
High Channel	1.185000	1.014400


Test plots

20 dB Bandwidth


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL

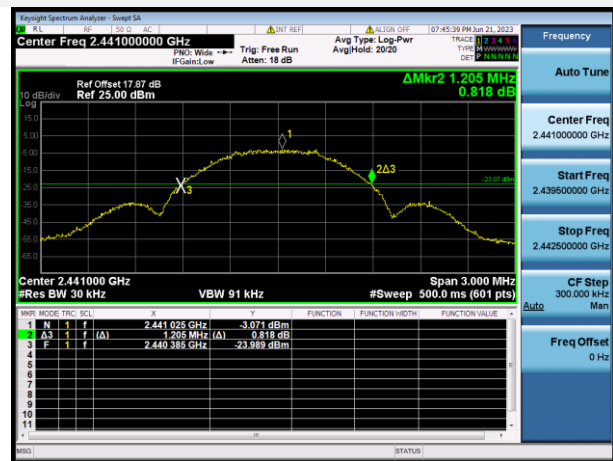

GFSK HIGH CHANNEL

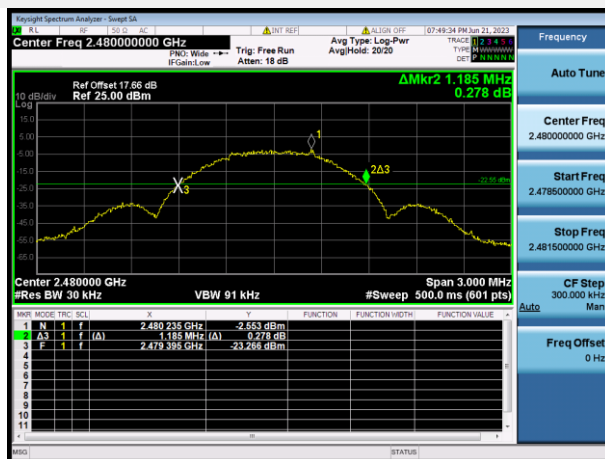

99% Bandwidth


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

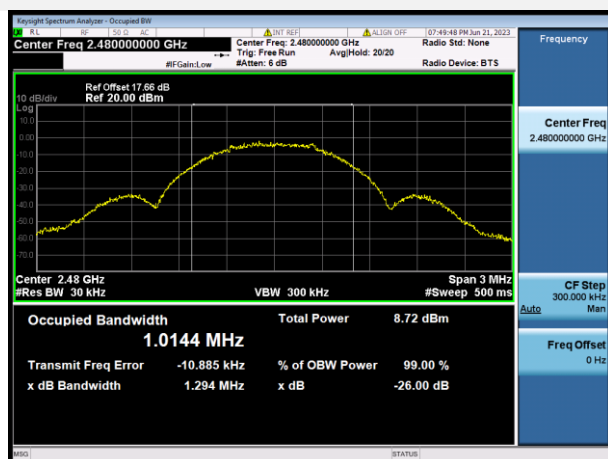


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.030	0.803	Pass

Test Plots

GFSK

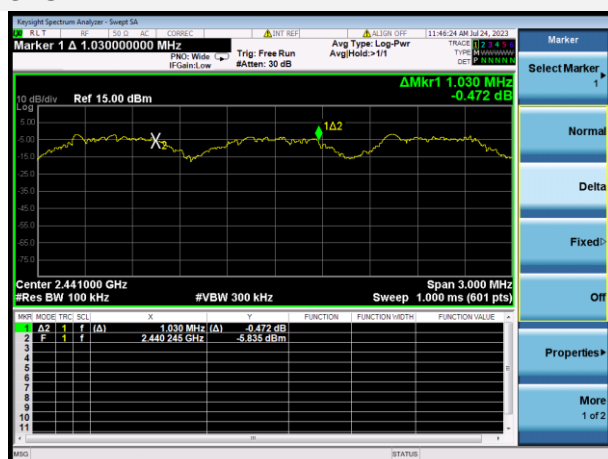


A.5 Time of Occupancy (Dwell time)

Test Data


GFSK			
Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
4.608	18.432	0.4	Pass

Test Plots

Pulse Width

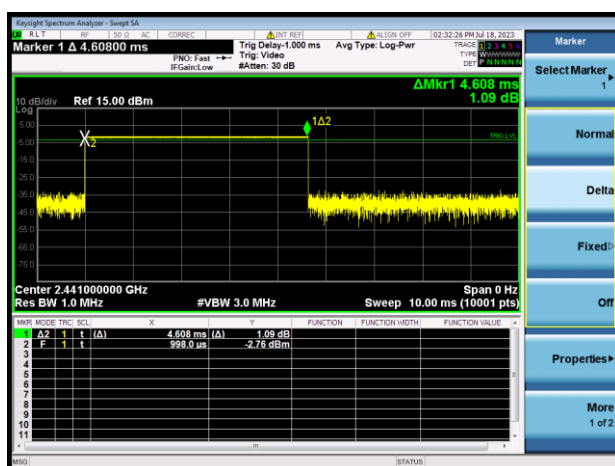

Total of Dwell

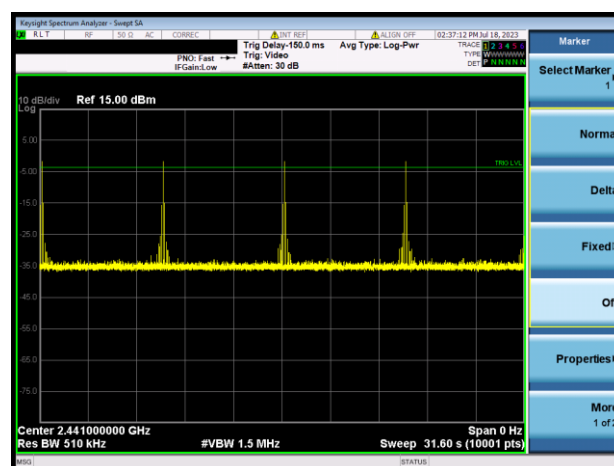

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-24.00	0.05	-19.95	Pass
Middle	-24.32	0.39	-19.61	Pass
High	-23.39	0.40	-19.60	Pass


Hopping Mode				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-27.71	-1.51	-21.51	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL

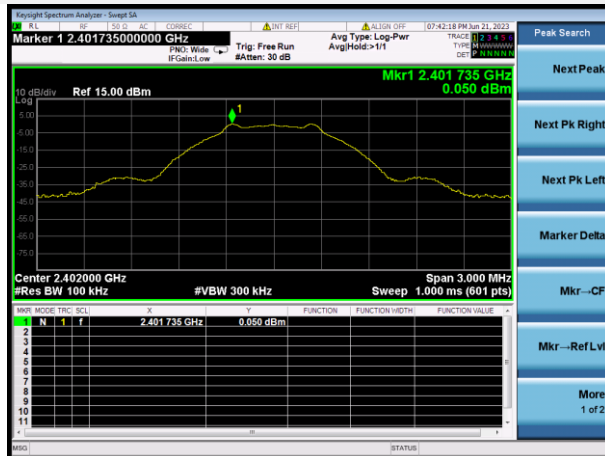


GFSK LOW CHANNEL, BAND EDGE

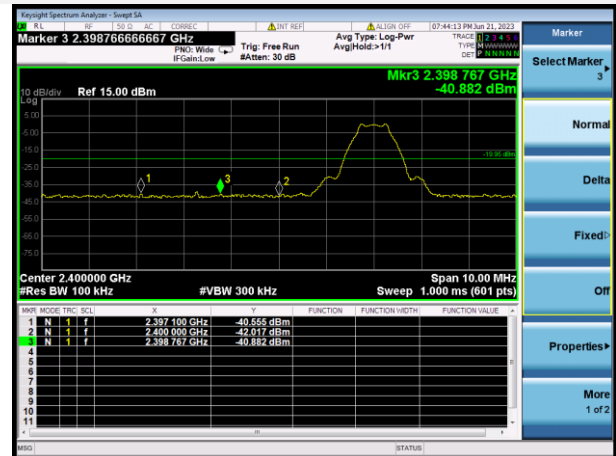


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

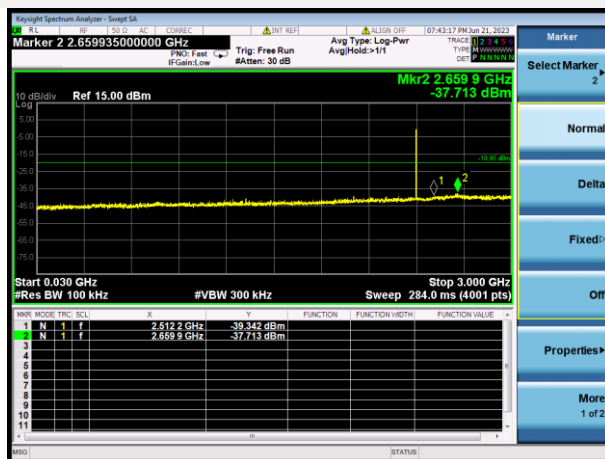


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

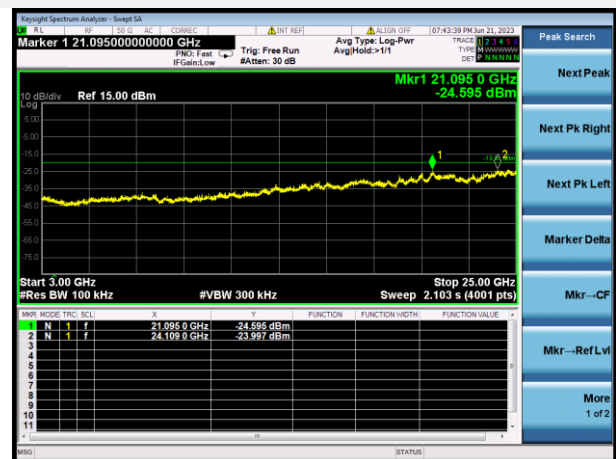


GFSK MIDDLE CHANNEL, CARRIER LEVEL

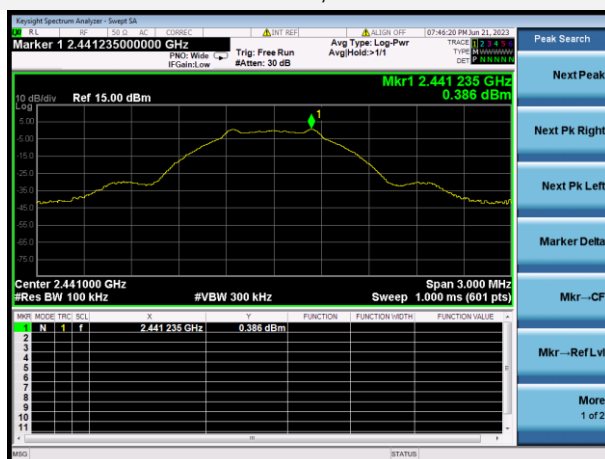

GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

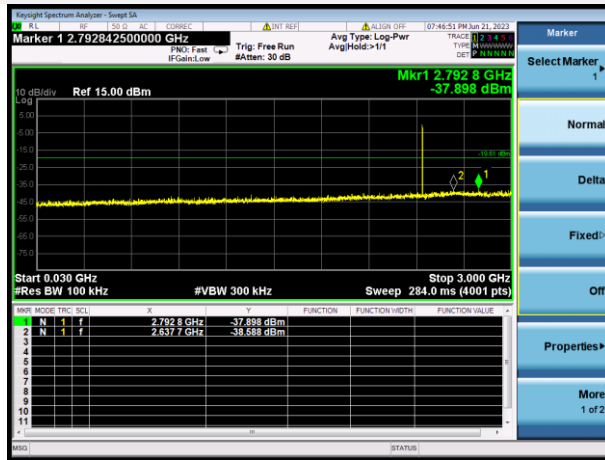


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

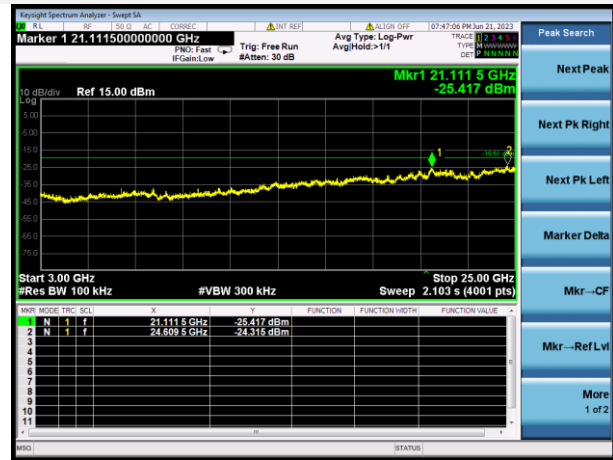


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE

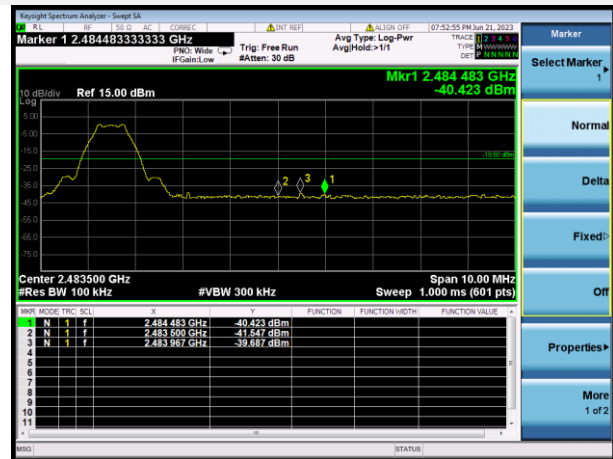


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

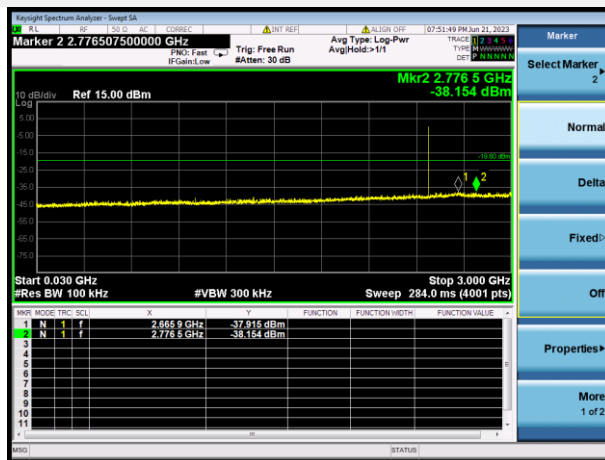

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

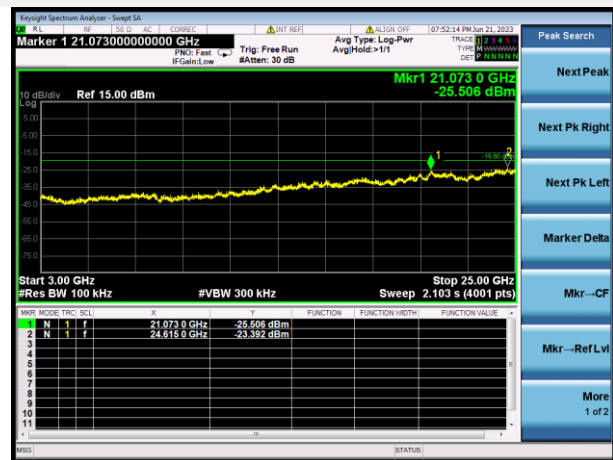

GFSK HOPPING, CARRIER LEVEL

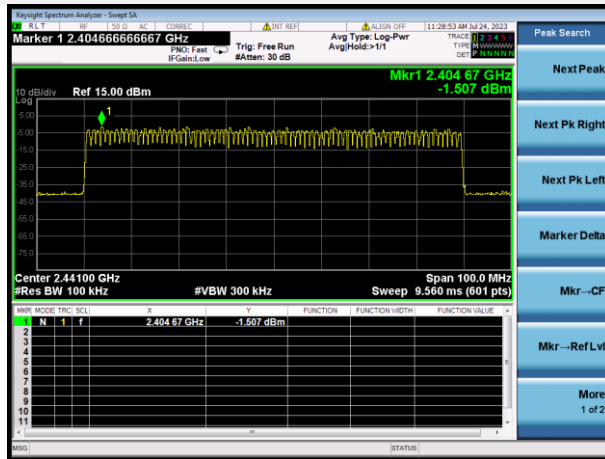

GFSK HOPPING LOW CHANNEL, BAND EDGE




GFSK HOPPING HIGH CHANNEL, BAND EDGE




GFSK HOPPING, SPURIOUS

30 MHz ~ 3 GHz

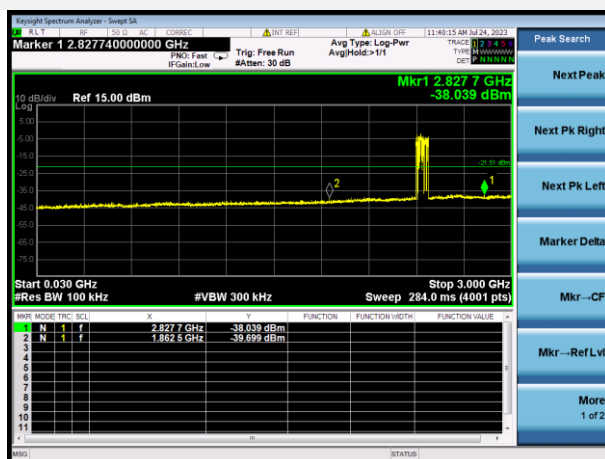

GFSK HOPPING SPURIOUS

3GHz ~ 25 GHz

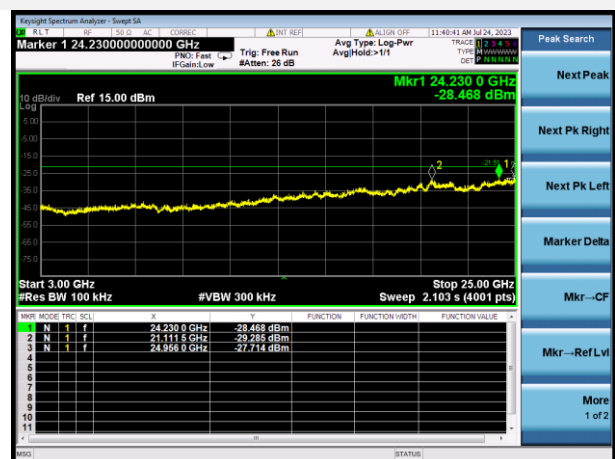

A.7 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

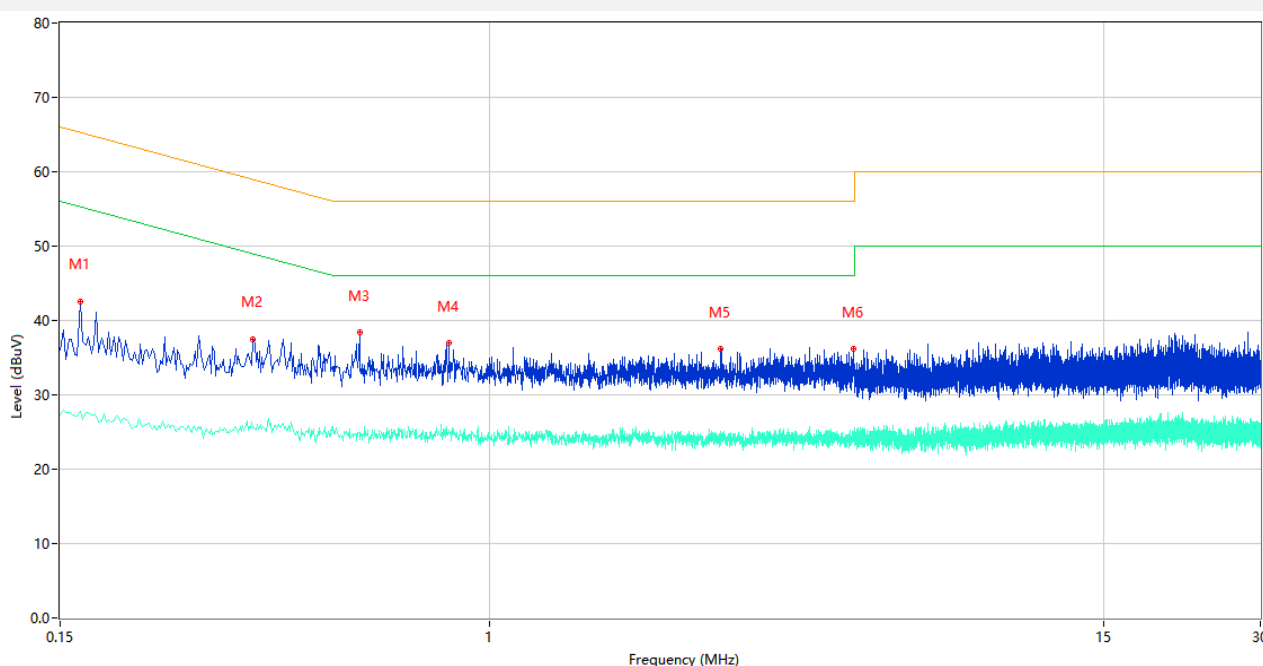

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	42.55	9.78	65.26	22.71	Peak	L	Pass
1**	0.164	27.77	9.78	55.26	27.49	AV	L	Pass
2	0.352	37.51	10.75	58.92	21.41	Peak	L	Pass
2**	0.352	25.53	10.75	48.92	23.39	AV	L	Pass
3	0.562	38.34	10.06	56.00	17.66	Peak	L	Pass
3**	0.562	24.99	10.06	46.00	21.01	AV	L	Pass
4	0.836	36.95	10.60	56.00	19.05	Peak	L	Pass
4**	0.836	25.17	10.60	46.00	20.83	AV	L	Pass
5	2.770	36.16	10.27	56.00	19.84	Peak	L	Pass
5**	2.770	24.28	10.27	46.00	21.72	AV	L	Pass
6	4.974	36.19	10.34	56.00	19.81	Peak	L	Pass
6**	4.974	25.05	10.34	46.00	20.95	AV	L	Pass

PHASE N

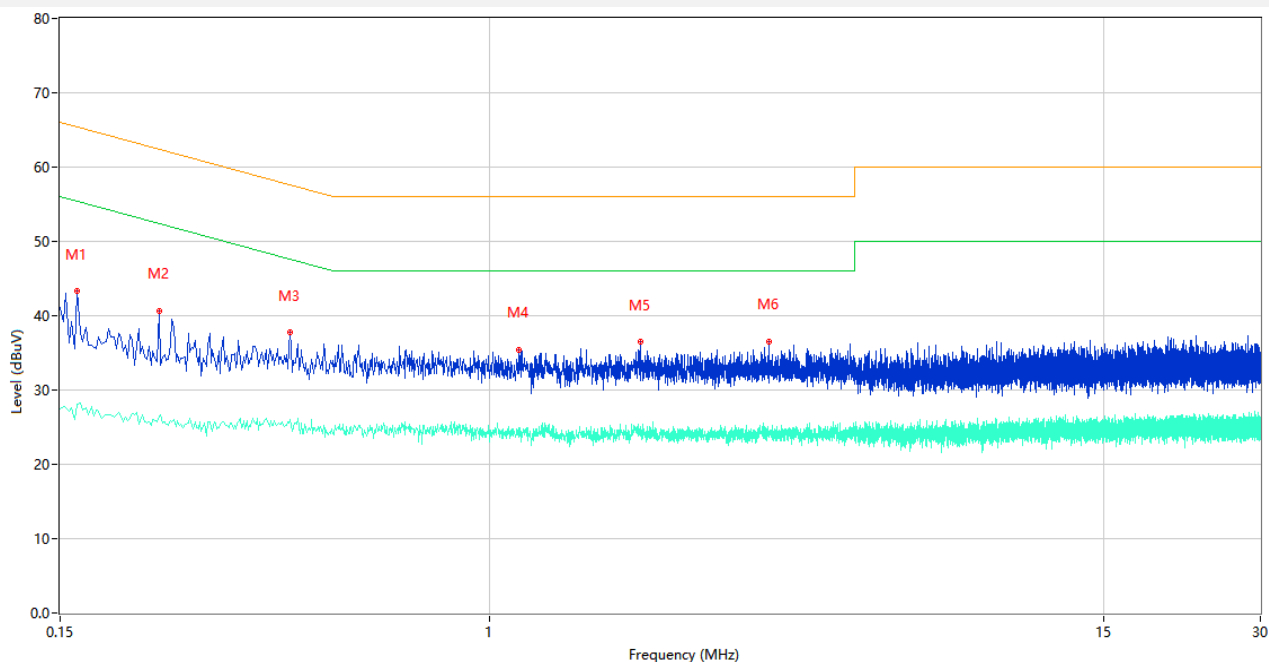

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	43.29	9.78	65.36	22.07	Peak	N	Pass
1**	0.162	28.12	9.78	55.36	27.24	AV	N	Pass
2	0.232	40.65	9.77	62.38	21.73	Peak	N	Pass
2**	0.232	26.35	9.77	52.38	26.03	AV	N	Pass
3	0.414	37.74	10.41	57.57	19.83	Peak	N	Pass
3**	0.414	26.03	10.41	47.57	21.54	AV	N	Pass
4	1.136	35.45	10.30	56.00	20.55	Peak	N	Pass
4**	1.136	23.65	10.30	46.00	22.35	AV	N	Pass
5	1.940	36.50	10.26	56.00	19.50	Peak	N	Pass
5**	1.940	25.11	10.26	46.00	20.89	AV	N	Pass
6	3.428	36.51	10.28	56.00	19.49	Peak	N	Pass
6**	3.428	24.36	10.28	46.00	21.64	AV	N	Pass

A.8 Radiated Emission

Test Data and Plots

Note ¹: The symbol of "--" in the table which means not application.


Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT H

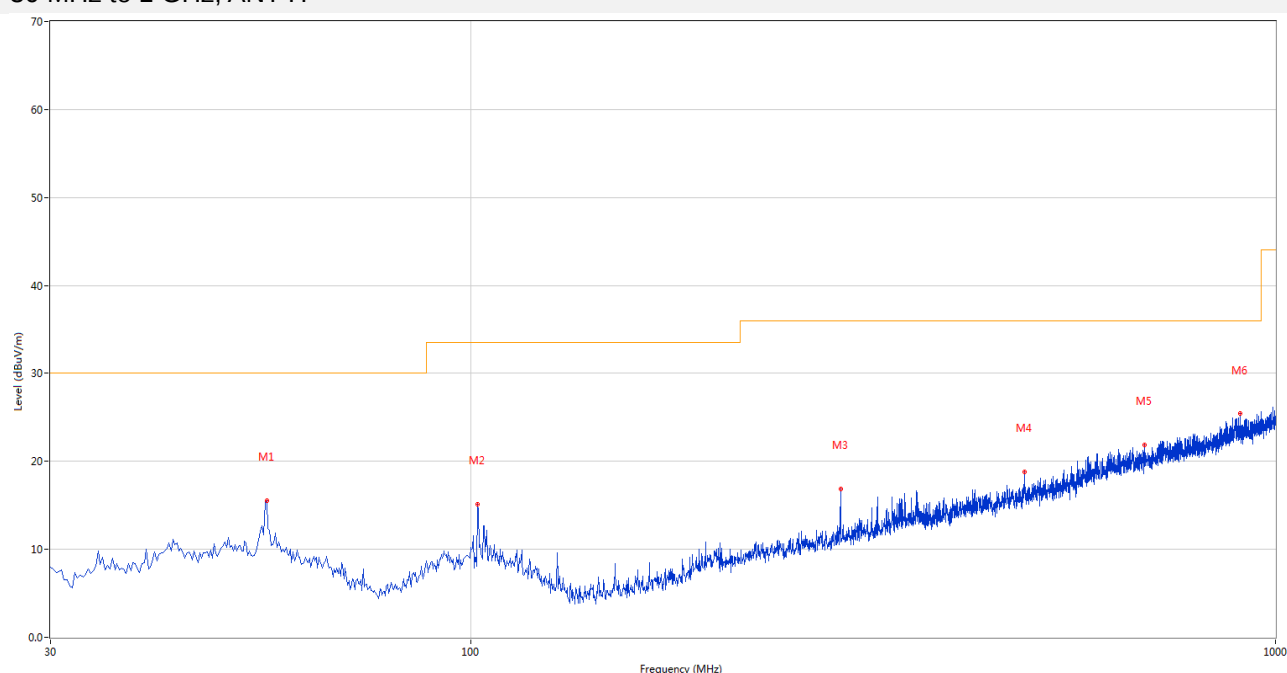

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.699	15.57	-26.72	30.0	14.43	Peak	96.00	100	Horizontal	Pass
2	101.762	15.12	-28.03	33.5	18.38	Peak	360.00	200	Horizontal	Pass
3	287.956	16.85	-25.19	36.0	19.15	Peak	223.00	200	Horizontal	Pass
4	487.241	18.76	-20.58	36.0	17.24	Peak	263.00	200	Horizontal	Pass
5	687.981	21.86	-16.28	36.0	14.14	Peak	214.00	100	Horizontal	Pass
6	903.509	25.40	-12.65	36.0	10.60	Peak	360.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

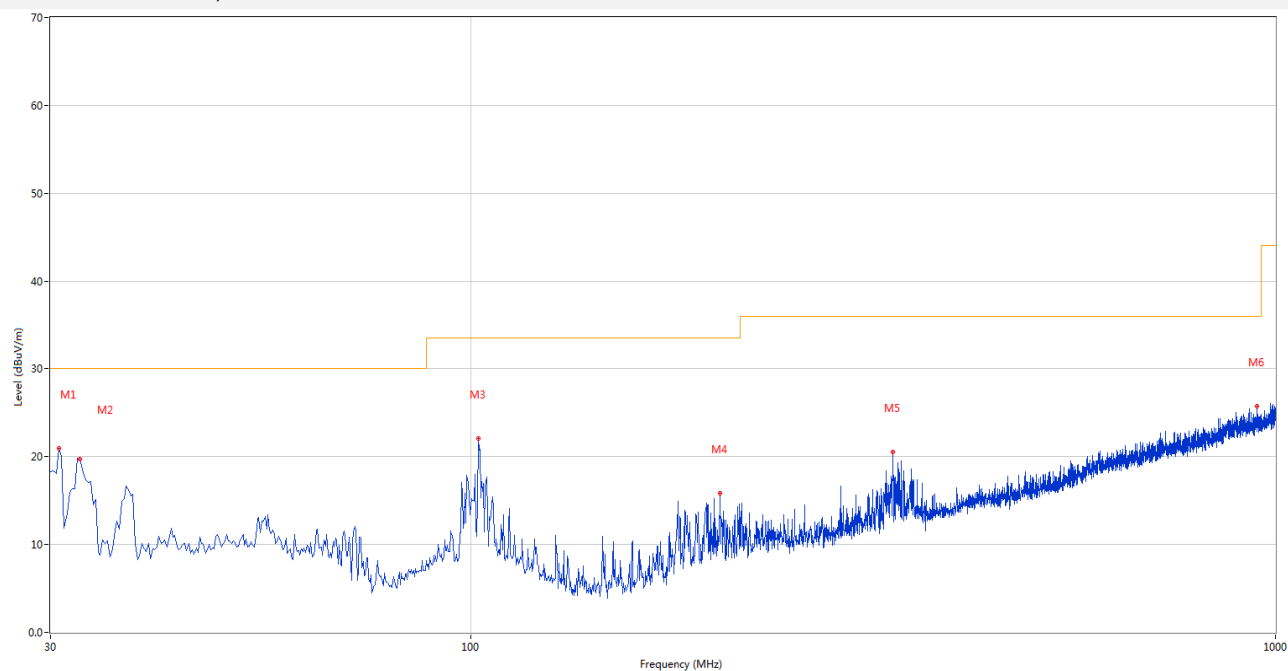

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.727	20.96	-29.50	30.0	9.04	Peak	90.00	100	Vertical	Pass
2	32.667	19.69	-29.13	30.0	10.31	Peak	360.00	200	Vertical	Pass
3	102.004	22.08	-28.05	33.5	11.42	Peak	106.00	100	Vertical	Pass
4	204.071	15.80	-27.87	33.5	17.70	Peak	16.00	100	Vertical	Pass
5	334.504	20.54	-24.04	36.0	15.46	Peak	78.00	100	Vertical	Pass
6	948.118	25.74	-12.03	36.0	10.26	Peak	341.00	100	Vertical	Pass


Test Data and Plots

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

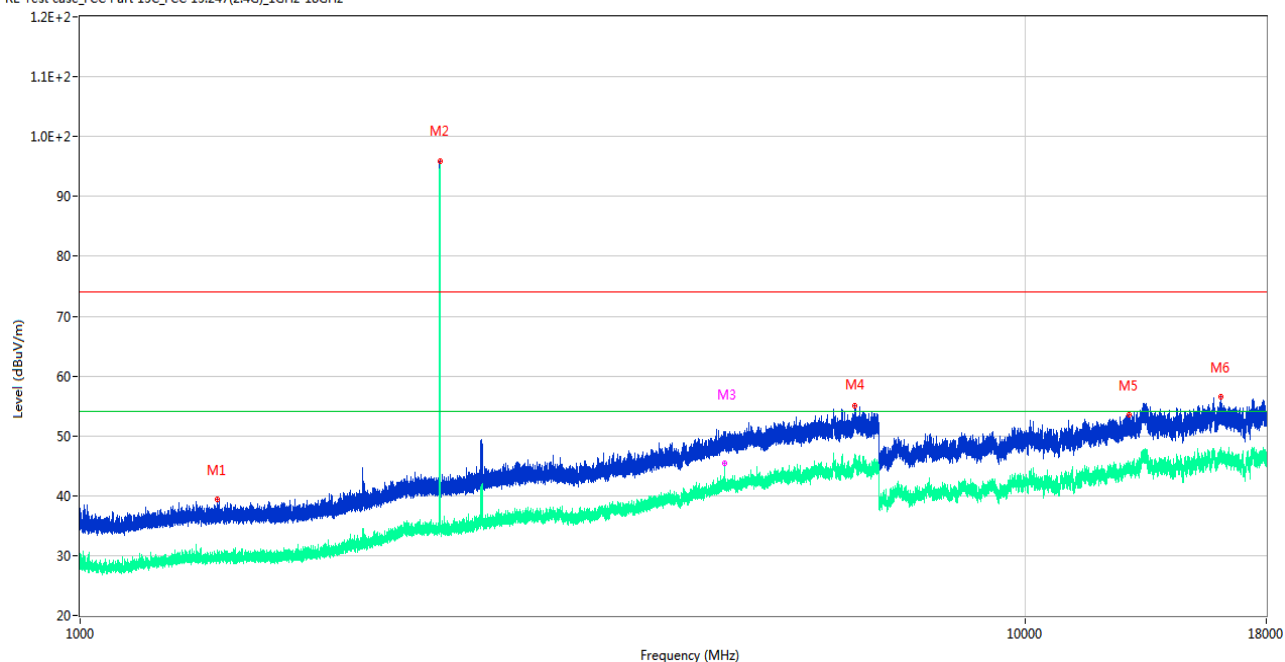

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1397.100	39.38	-17.53	74.0	34.62	Peak	174.00	300	Horizontal	Pass
1**	1397.100	29.73	-17.53	54.0	24.27	AV	174.00	300	Horizontal	Pass
2	2402.300	95.96	-12.41	74.0	-21.96	Peak	69.00	200	Horizontal	N/A
2**	2402.300	94.78	-12.41	54.0	-40.78	AV	69.00	200	Horizontal	N/A
3	4804.000	49.62	-3.14	74.0	24.38	Peak	8.00	150	Horizontal	Pass
3**	4804.000	45.45	-3.14	54.0	8.55	AV	8.00	150	Horizontal	Pass
4	6609.400	54.98	1.57	74.0	19.02	Peak	107.00	400	Horizontal	Pass
4**	6609.400	46.06	1.57	54.0	7.94	AV	107.00	400	Horizontal	Pass
5	12882.562	53.51	1.56	74.0	20.49	Peak	352.00	100	Horizontal	Pass
5**	12882.562	45.09	1.56	54.0	8.91	AV	352.00	100	Horizontal	Pass
6	16097.925	56.46	1.25	74.0	17.54	Peak	237.00	300	Horizontal	Pass
6**	16097.925	46.45	1.25	54.0	7.55	AV	237.00	300	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

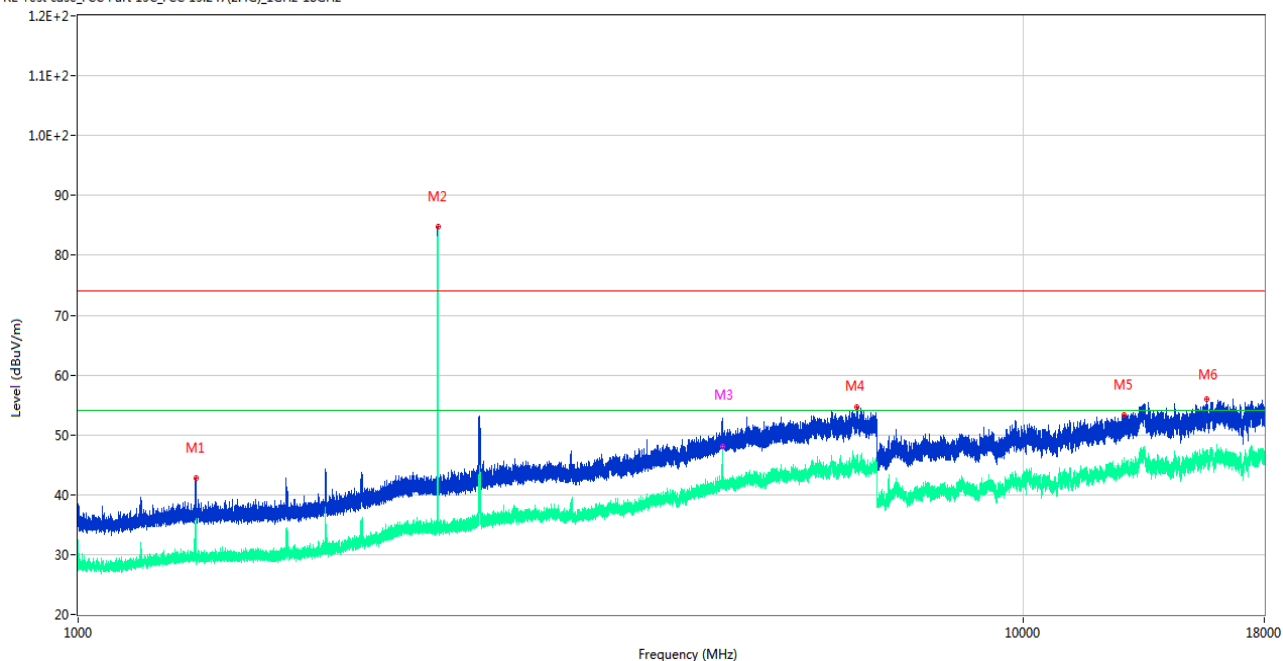

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.900	42.81	-17.51	74.0	31.19	Peak	82.00	400	Vertical	Pass
1**	1331.900	35.55	-17.51	54.0	18.45	AV	82.00	400	Vertical	Pass
2	2402.300	84.84	-12.41	74.0	-10.84	Peak	75.00	200	Vertical	N/A
2**	2402.300	84.41	-12.41	54.0	-30.41	AV	75.00	200	Vertical	N/A
3	4804.400	52.13	-3.18	74.0	21.87	Peak	28.00	150	Vertical	Pass
3**	4804.400	47.97	-3.18	54.0	6.03	AV	28.00	150	Vertical	Pass
4	6670.600	54.66	0.24	74.0	19.34	Peak	217.00	300	Vertical	Pass
4**	6670.600	45.59	0.24	54.0	8.41	AV	217.00	300	Vertical	Pass
5	12794.362	53.36	1.16	74.0	20.64	Peak	207.00	100	Vertical	Pass
5**	12794.362	44.57	1.16	54.0	9.43	AV	207.00	100	Vertical	Pass
6	15658.237	56.03	1.24	74.0	17.97	Peak	0.00	400	Vertical	Pass
6**	15658.237	47.13	1.24	54.0	6.87	AV	0.00	400	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

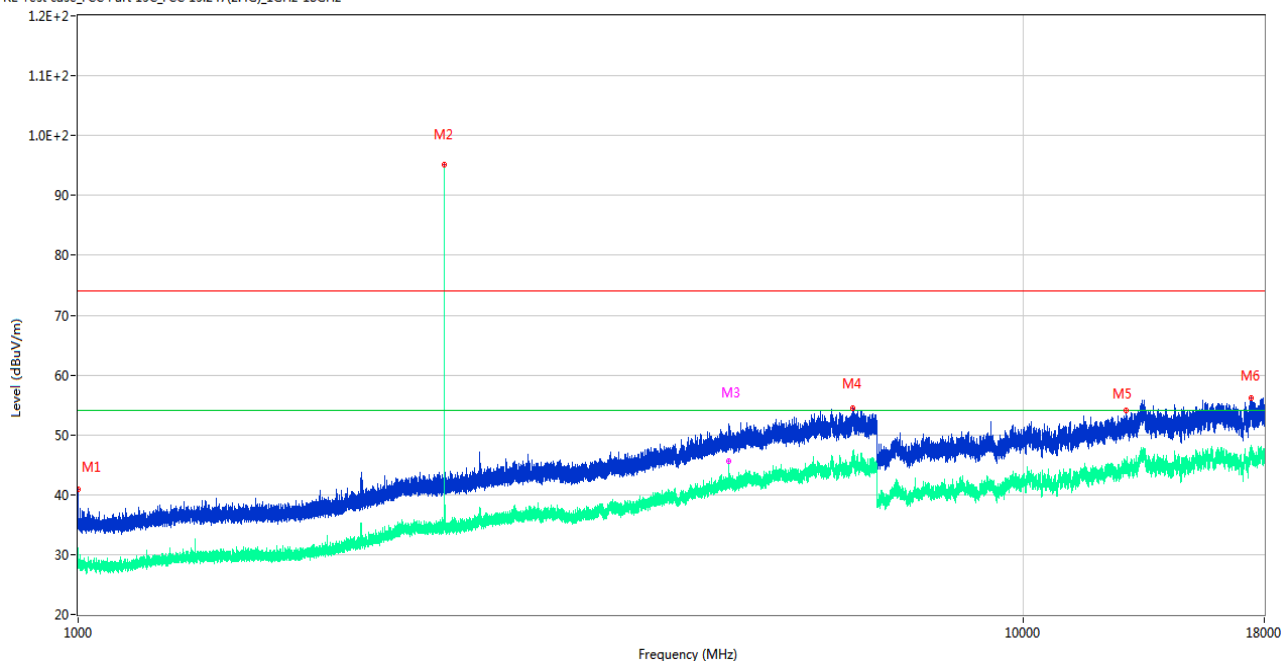

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1000.000	40.87	-18.20	74.0	33.13	Peak	93.00	200	Horizontal	Pass
1**	1000.000	28.15	-18.20	54.0	25.85	AV	93.00	200	Horizontal	Pass
2	2440.700	95.16	-12.43	74.0	-21.16	Peak	70.00	100	Horizontal	N/A
2**	2440.700	93.71	-12.43	54.0	-39.71	AV	70.00	100	Horizontal	N/A
3	4881.800	50.60	-3.39	74.0	23.40	Peak	328.00	150	Horizontal	Pass
3**	4881.800	45.52	-3.39	54.0	8.48	AV	328.00	150	Horizontal	Pass
4	6606.200	54.52	1.38	74.0	19.48	Peak	132.00	100	Horizontal	Pass
4**	6606.200	46.38	1.38	54.0	7.62	AV	132.00	100	Horizontal	Pass
5	12857.888	54.13	1.44	74.0	19.87	Peak	331.00	400	Horizontal	Pass
5**	12857.888	44.89	1.44	54.0	9.11	AV	331.00	400	Horizontal	Pass
6	17450.850	56.09	2.83	74.0	17.91	Peak	360.00	100	Horizontal	Pass
6**	17450.850	46.71	2.83	54.0	7.29	AV	360.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

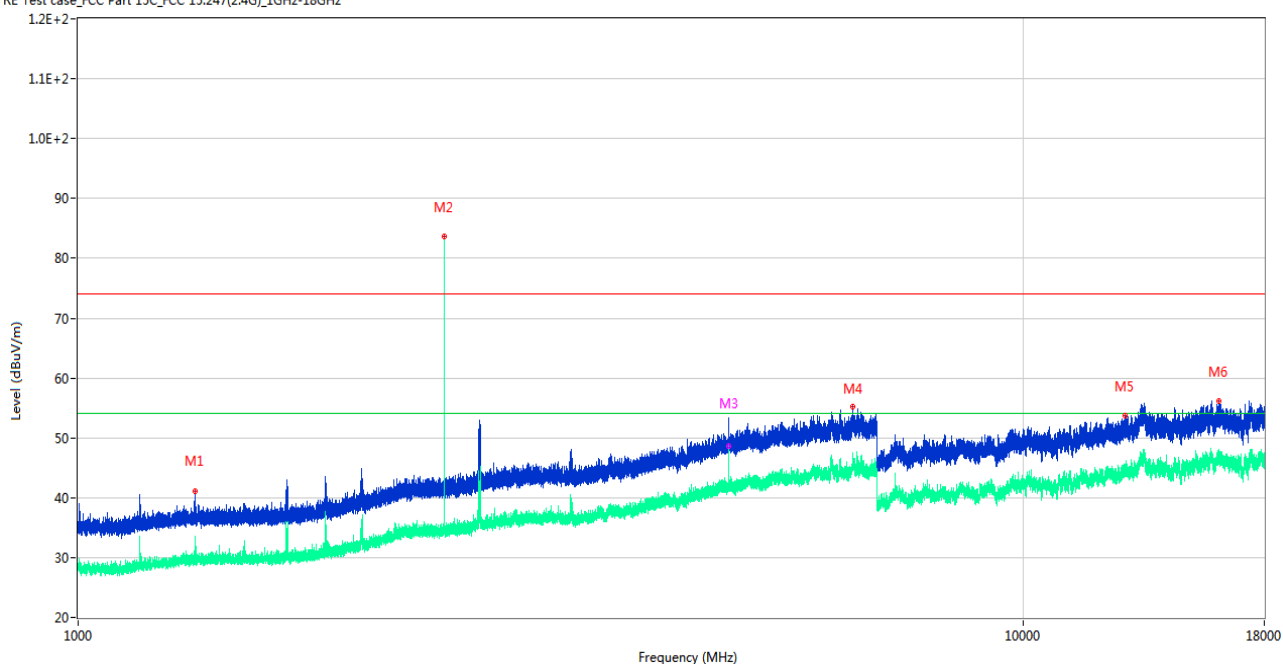

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.900	41.19	-17.64	74.0	32.81	Peak	104.00	400	Vertical	Pass
1**	1328.900	33.50	-17.64	54.0	20.50	AV	104.00	400	Vertical	Pass
2	2440.700	83.60	-12.43	74.0	-9.60	Peak	75.00	150	Vertical	N/A
2**	2440.700	82.21	-12.43	54.0	-28.21	AV	75.00	150	Vertical	N/A
3	4882.200	52.37	-3.41	74.0	21.63	Peak	348.00	150	Vertical	Pass
3**	4882.200	48.59	-3.41	54.0	5.41	AV	348.00	150	Vertical	Pass
4	6608.800	55.26	1.60	74.0	18.74	Peak	156.00	100	Vertical	Pass
4**	6608.800	46.51	1.60	54.0	7.49	AV	156.00	100	Vertical	Pass
5	12819.562	53.68	0.91	74.0	20.32	Peak	277.00	400	Vertical	Pass
5**	12819.562	43.85	0.91	54.0	10.15	AV	277.00	400	Vertical	Pass
6	16105.012	56.12	0.98	74.0	17.88	Peak	331.00	400	Vertical	Pass
6**	16105.012	46.57	0.98	54.0	7.43	AV	331.00	400	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

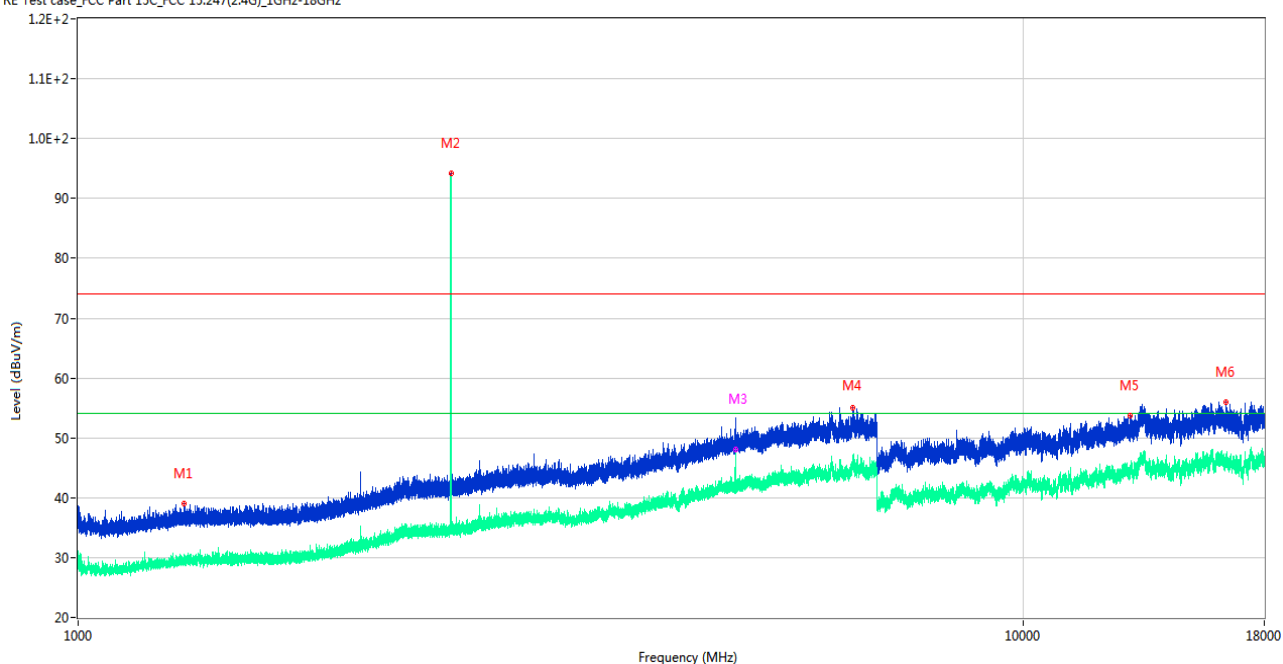

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1295.700	39.03	-17.48	74.0	34.97	Peak	203.00	300	Horizontal	Pass
1**	1295.700	29.63	-17.48	54.0	24.37	AV	203.00	300	Horizontal	Pass
2	2479.800	94.23	-12.03	74.0	-20.23	Peak	75.00	200	Horizontal	N/A
2**	2479.800	93.04	-12.03	54.0	-39.04	AV	75.00	200	Horizontal	N/A
3	4959.600	52.01	-2.99	74.0	21.99	Peak	62.00	150	Horizontal	Pass
3**	4959.600	48.14	-2.99	54.0	5.86	AV	62.00	150	Horizontal	Pass
4	6608.800	55.12	1.60	74.0	18.88	Peak	148.00	100	Horizontal	Pass
4**	6608.800	46.36	1.60	54.0	7.64	AV	148.00	100	Horizontal	Pass
5	12996.487	53.72	1.27	74.0	20.28	Peak	145.00	300	Horizontal	Pass
5**	12996.487	44.05	1.27	54.0	9.95	AV	145.00	300	Horizontal	Pass
6	16413.449	56.00	1.30	74.0	18.00	Peak	0.00	100	Horizontal	Pass
6**	16413.449	46.65	1.30	54.0	7.35	AV	0.00	100	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

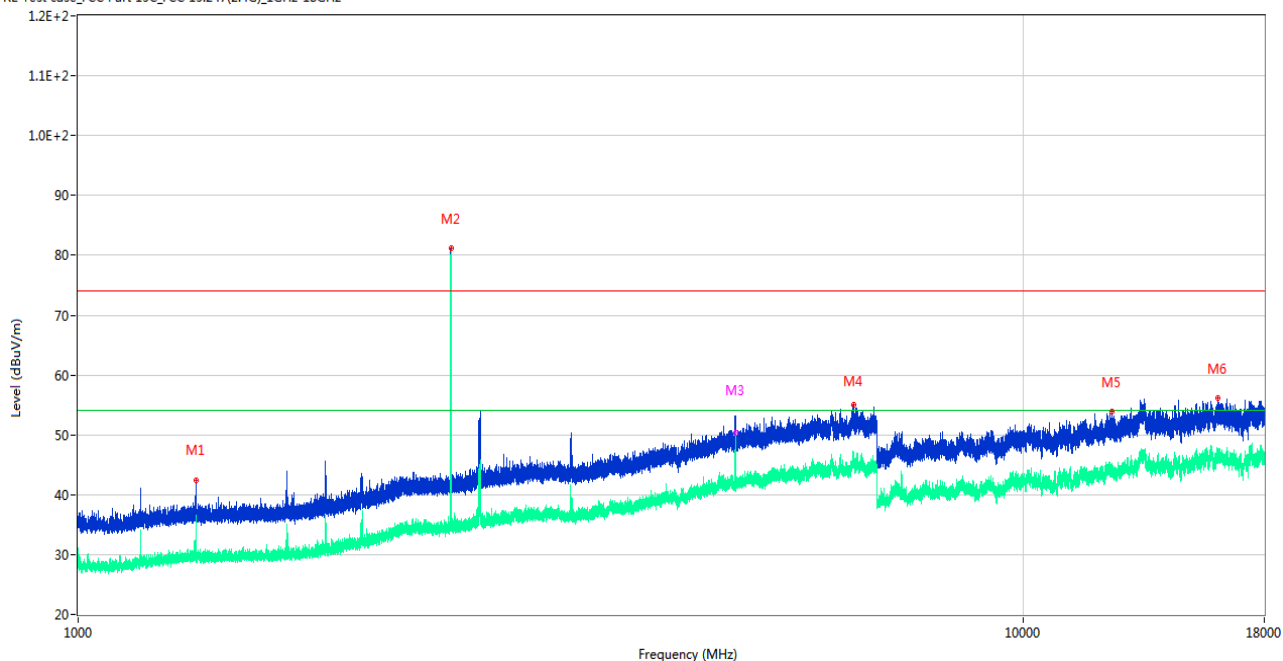

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.100	42.41	-17.51	74.0	31.59	Peak	123.00	100	Vertical	Pass
1**	1333.100	30.64	-17.51	54.0	23.36	AV	123.00	100	Vertical	Pass
2	2479.800	81.16	-12.03	74.0	-7.16	Peak	50.00	100	Vertical	N/A
2**	2479.800	80.13	-12.03	54.0	-26.13	AV	50.00	100	Vertical	N/A
3	4959.600	53.71	-2.99	74.0	20.29	Peak	220.00	150	Vertical	Pass
3**	4959.600	50.80	-2.99	54.0	3.20	AV	220.00	150	Vertical	Pass
4	6613.600	55.06	1.24	74.0	18.94	Peak	7.00	100	Vertical	Pass
4**	6613.600	45.70	1.24	54.0	8.30	AV	7.00	100	Vertical	Pass
5	12420.237	53.89	1.39	74.0	20.11	Peak	210.00	400	Vertical	Pass
5**	12420.237	43.56	1.39	54.0	10.44	AV	210.00	400	Vertical	Pass
6	16078.763	56.11	1.62	74.0	17.89	Peak	35.00	400	Vertical	Pass
6**	16078.763	47.17	1.62	54.0	6.83	AV	35.00	400	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.


Test Data

GFSK LOW CHANNEL

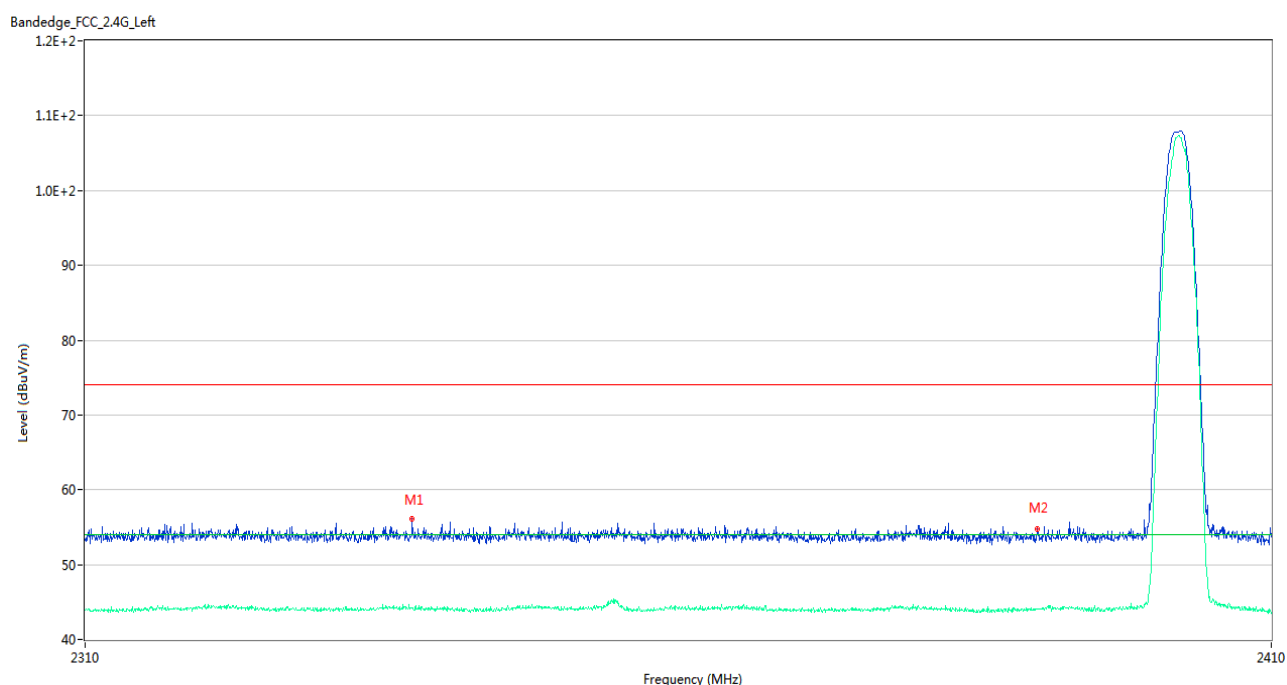

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2337.150	56.08	-0.71	74.0	17.92	Peak	260.00	150	Horizontal	Pass
1**	2337.150	44.17	-0.71	54.0	9.83	AV	260.00	150	Horizontal	Pass
2	2389.950	54.70	-0.59	74.0	19.30	Peak	28.00	150	Horizontal	Pass
2**	2389.950	44.03	-0.59	54.0	9.97	AV	28.00	150	Horizontal	Pass

GFSK HIGH CHANNEL

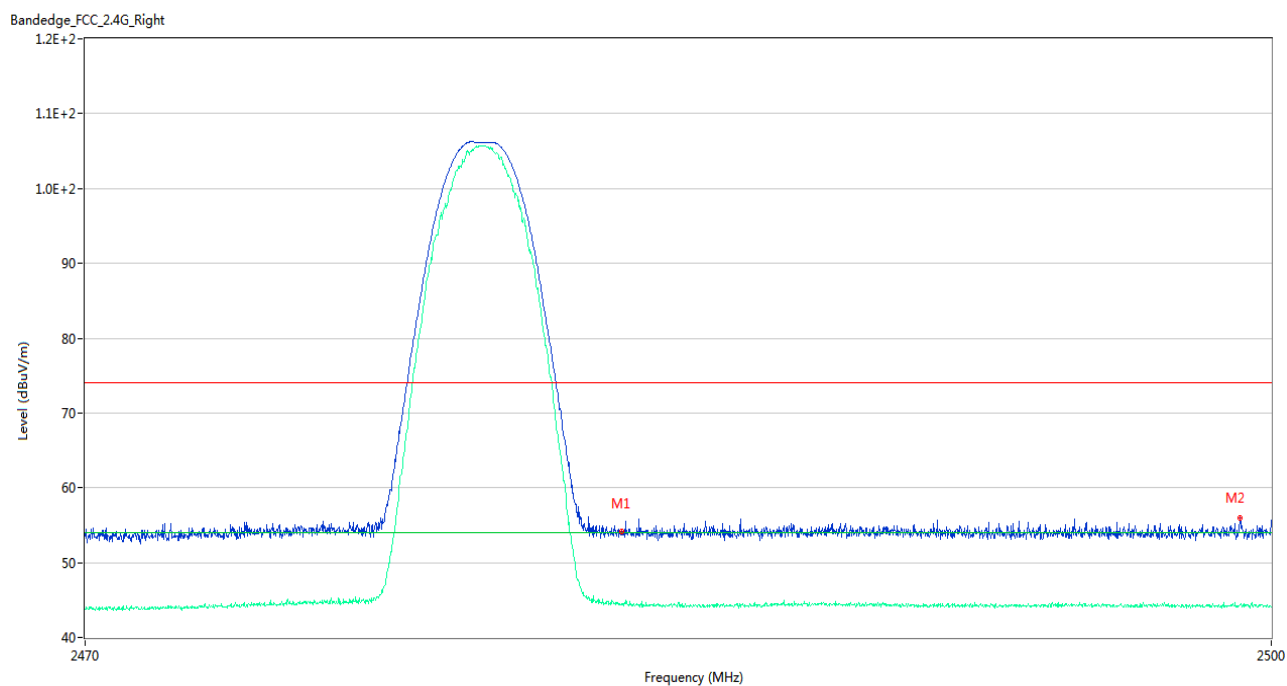

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.515	54.10	-0.05	74.0	19.90	Peak	235.00	200	Horizontal	Pass
1**	2483.515	44.49	-0.05	54.0	9.51	AV	235.00	200	Horizontal	Pass
2	2499.205	55.95	-0.16	74.0	18.05	Peak	331.00	100	Horizontal	Pass
2**	2499.205	44.30	-0.16	54.0	9.70	AV	331.00	100	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2360460-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2360460-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2360460-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--