
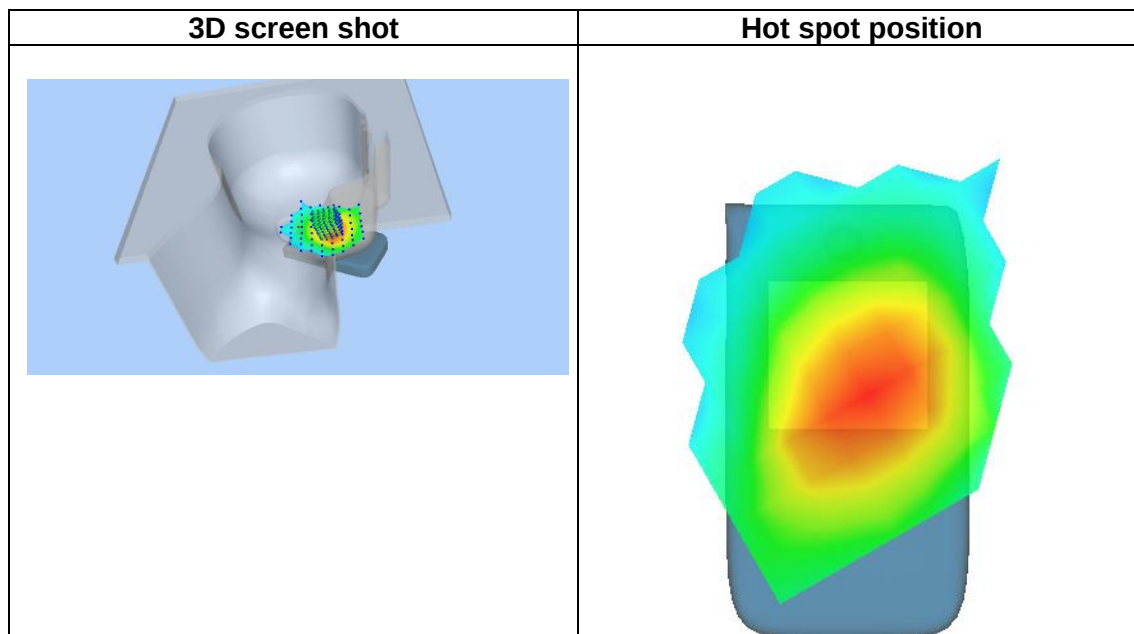


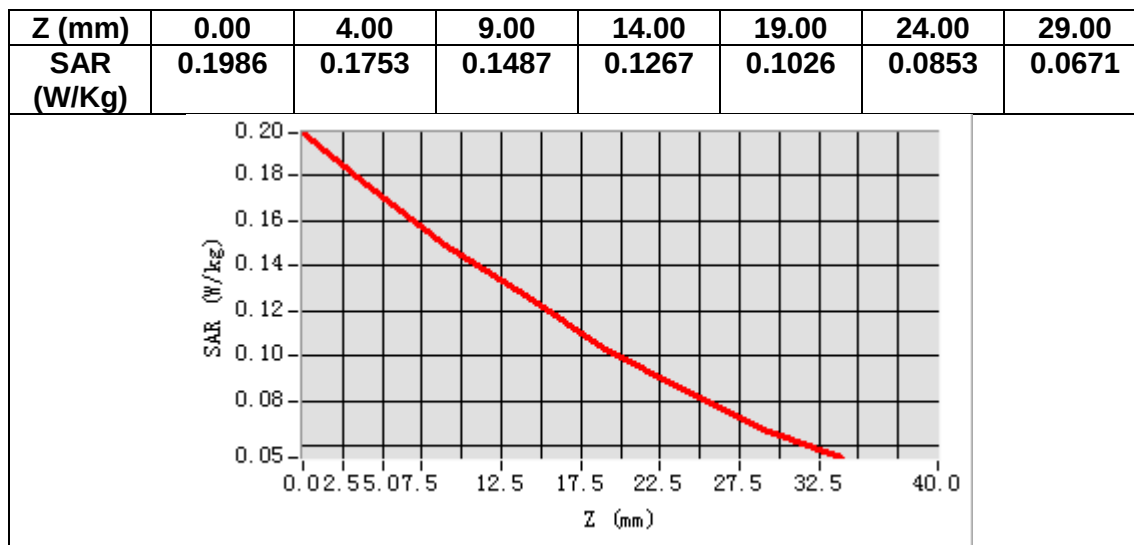

MEASUREMENT 2

Date of measurement: 30/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	43.085022
Relative permittivity (imaginary part)	19.124599
Conductivity (S/m)	0.888656
Variation (%)	-0.450000

SURFACE SAR

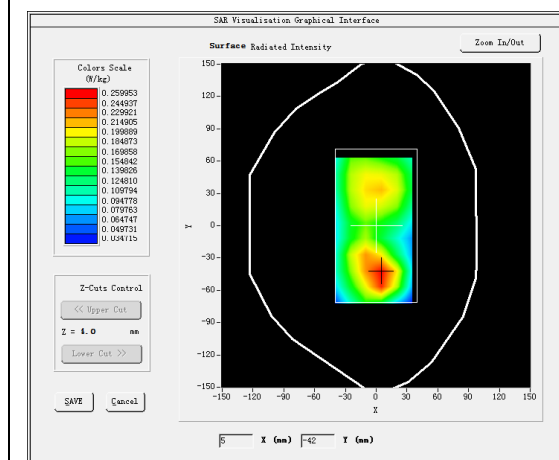



VOLUME SAR

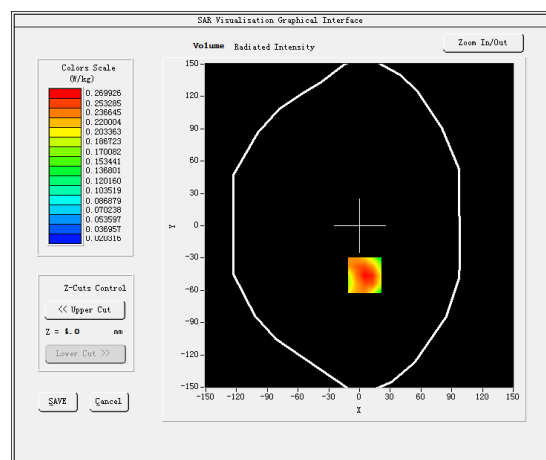

Maximum location: X=5.00, Y=-46.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.165756
SAR 1g (W/Kg)	0.260205

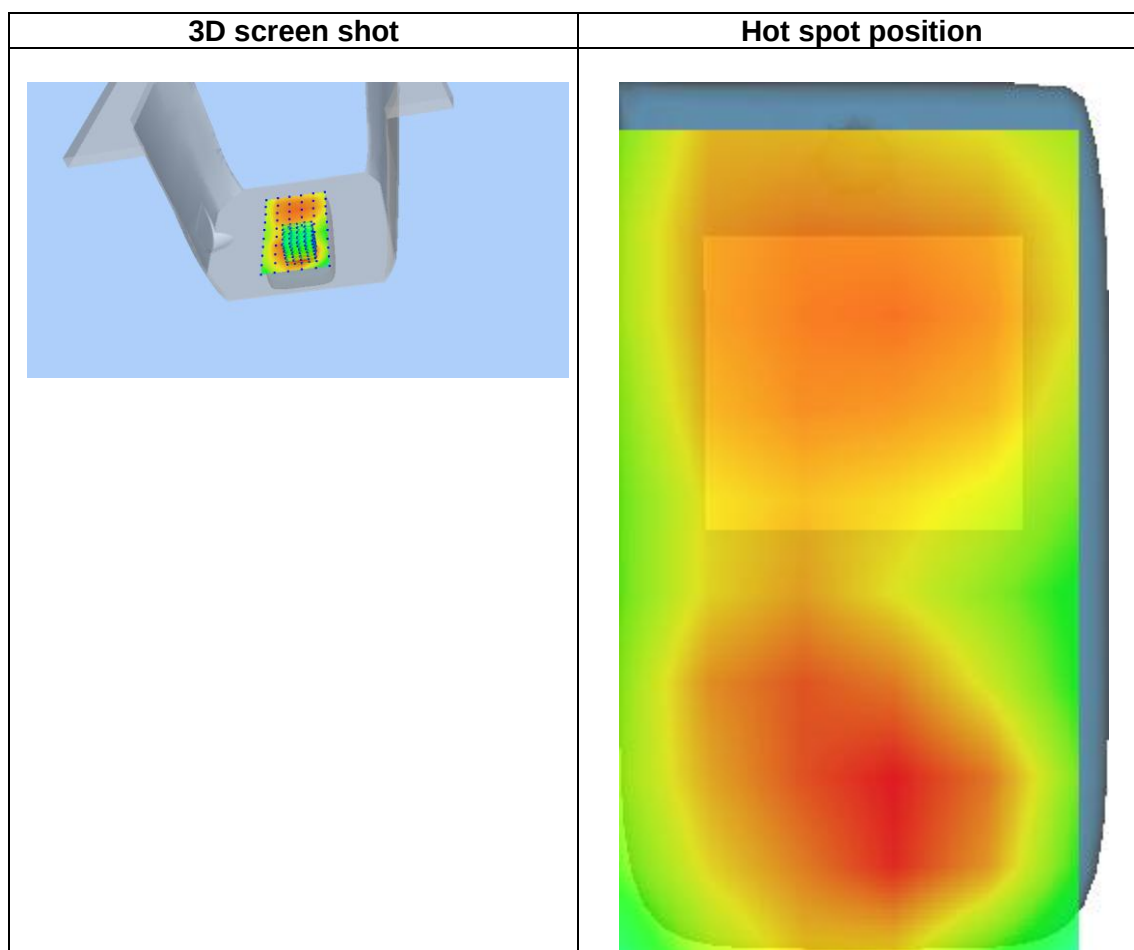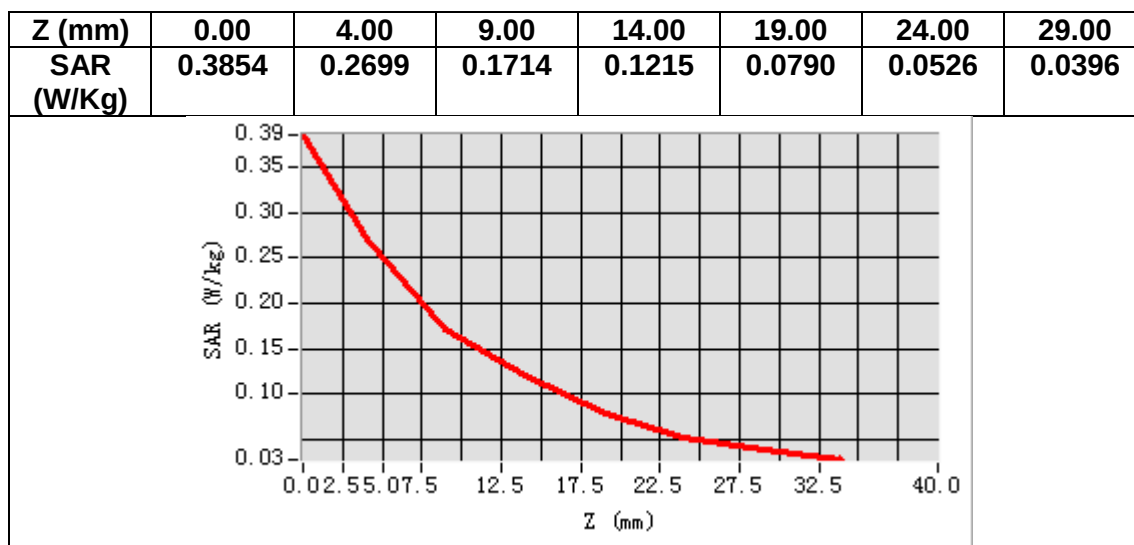

MEASUREMENT 3

Date of measurement: 10/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.674034
Relative permittivity (imaginary part)	13.850845
Conductivity (S/m)	1.446644
Variation (%)	-0.610000

SURFACE SAR

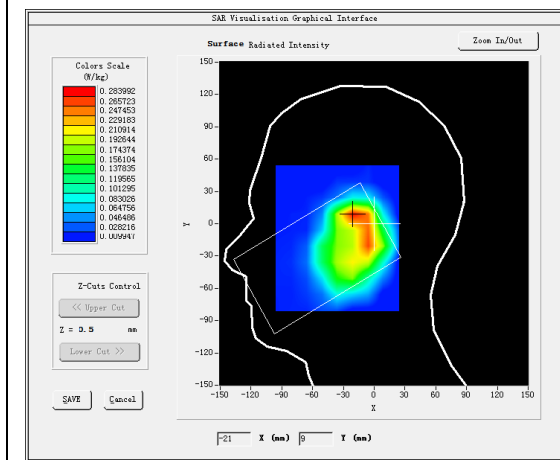



VOLUME SAR

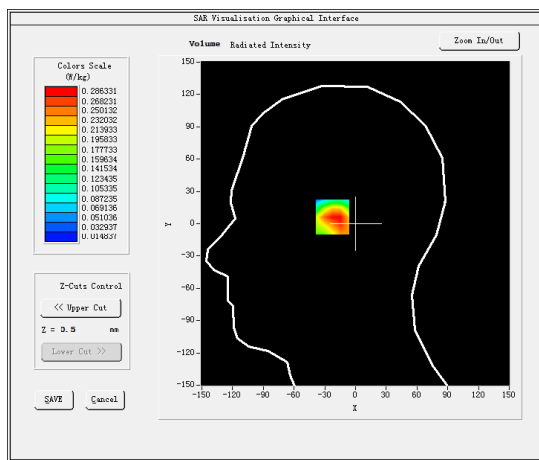

Maximum location: X=-19.00, Y=7.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.173731
SAR 1g (W/Kg)	0.284535

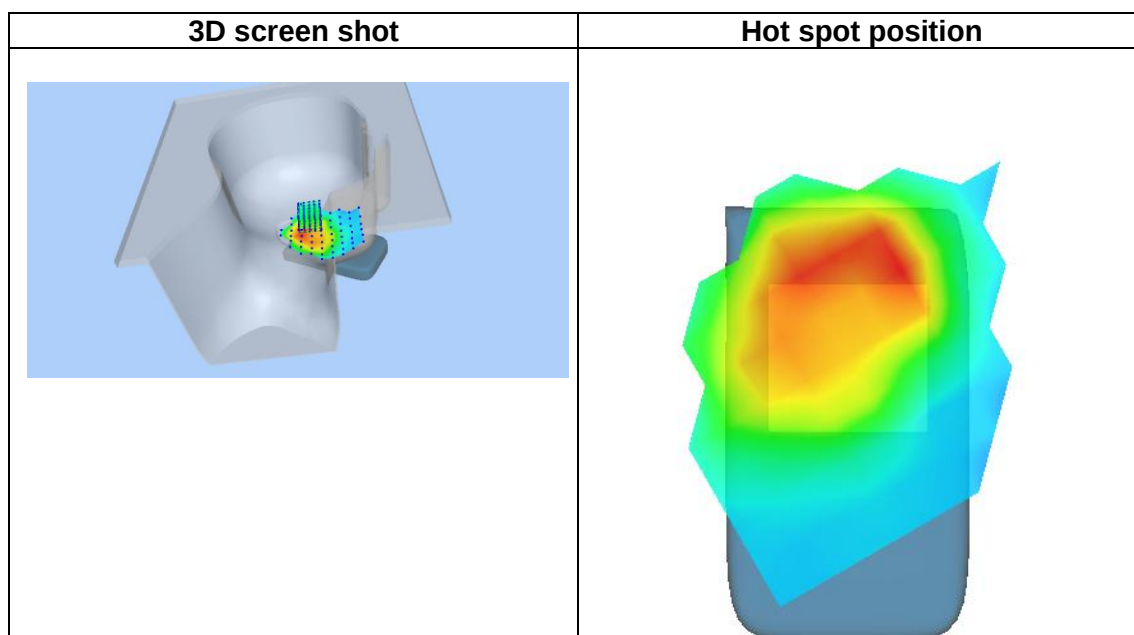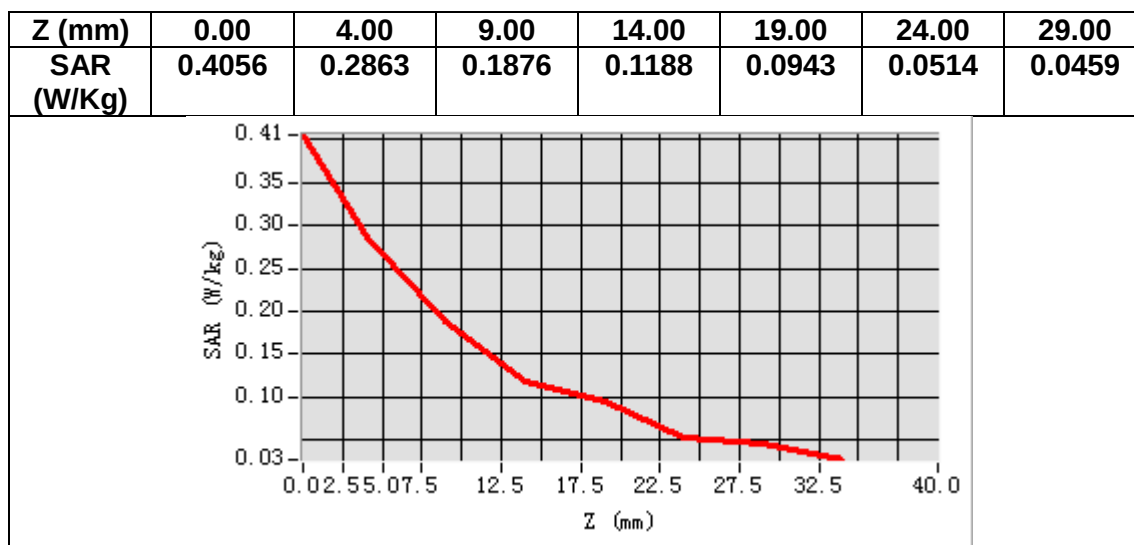

MEASUREMENT 4

Date of measurement: 10/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.674034
Relative permittivity (imaginary part)	13.850845
Conductivity (S/m)	1.446644
Variation (%)	-0.720000

SURFACE SAR

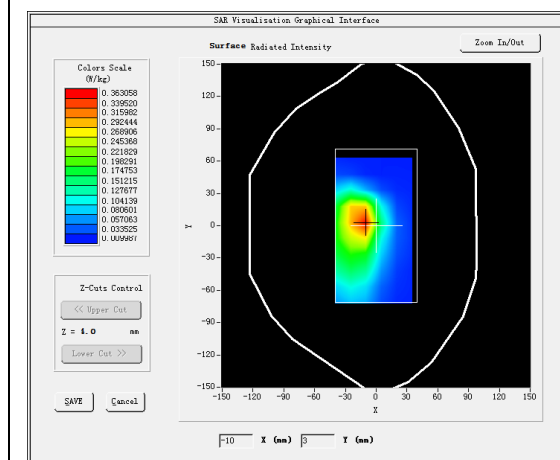



VOLUME SAR

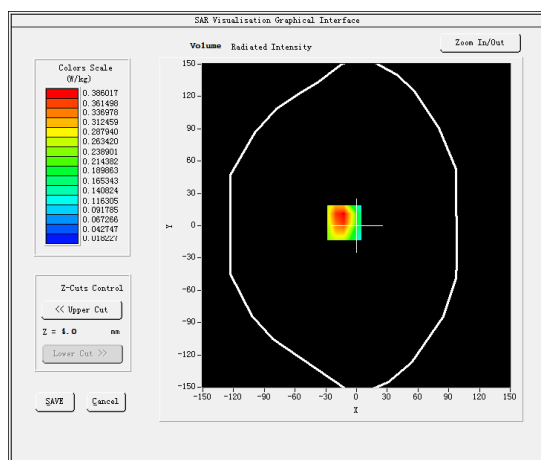

Maximum location: X=-12.00, Y=3.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.215570
SAR 1g (W/Kg)	0.380519

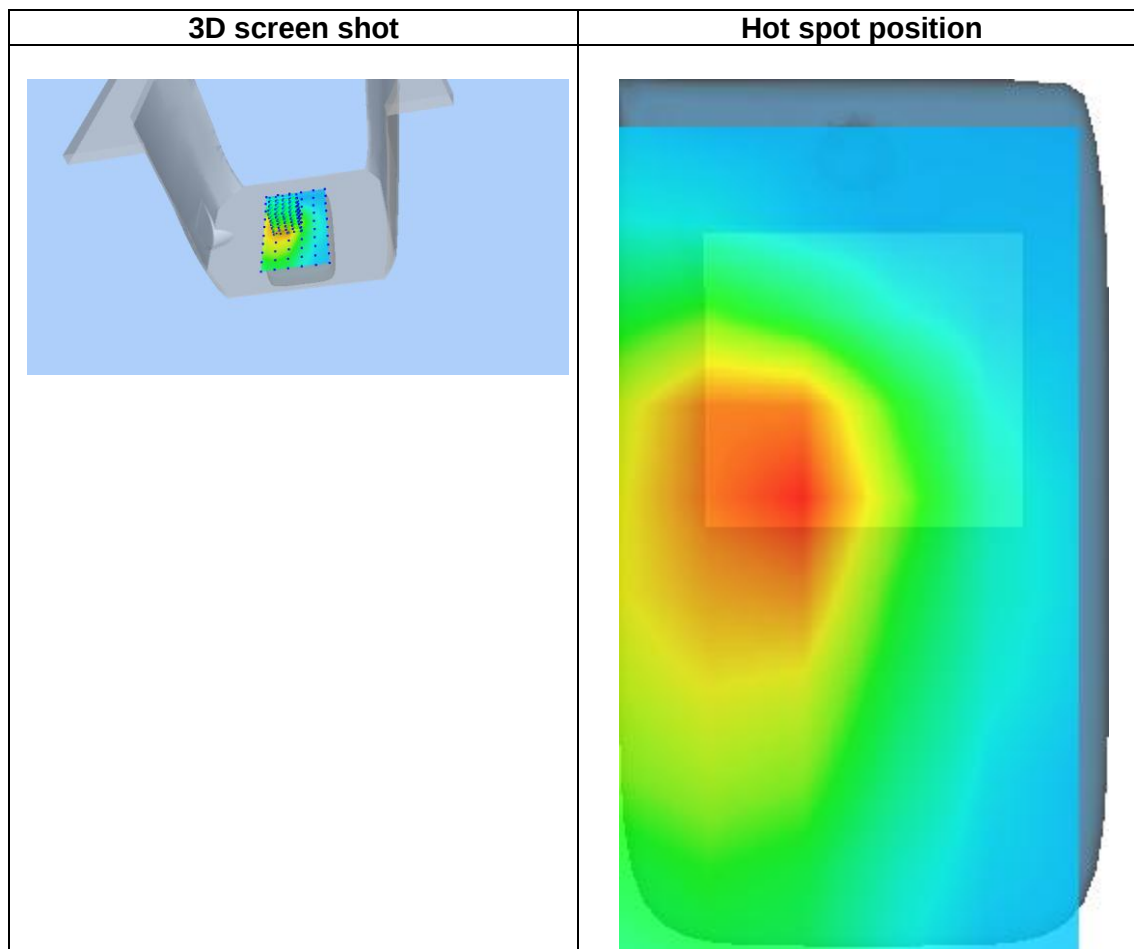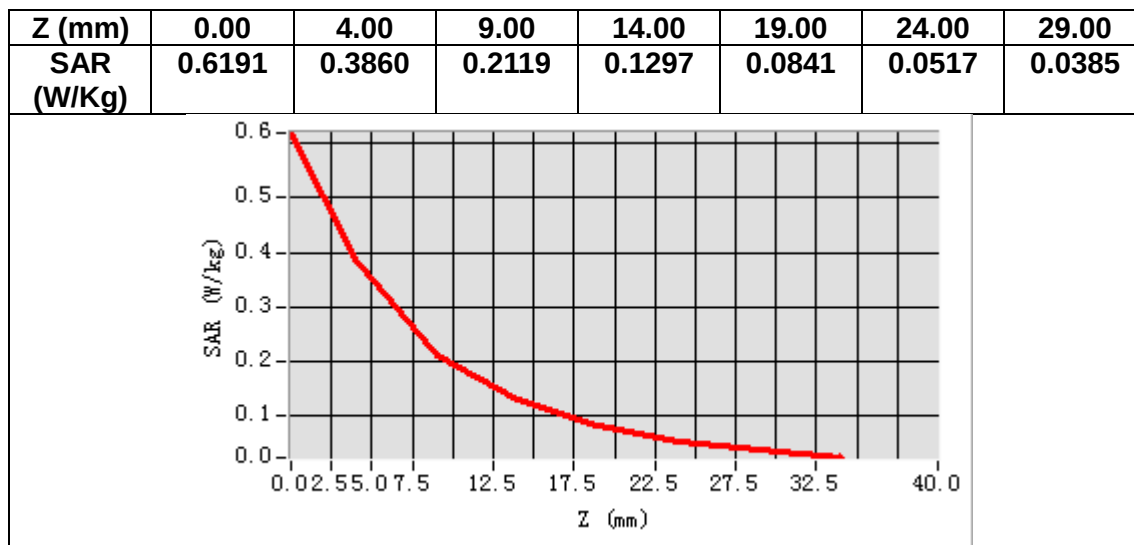

MEASUREMENT 5

Date of measurement: 10/9/2024


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band2 WCDMA1900</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>
ConvF	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.674034
Relative permittivity (imaginary part)	13.850845
Conductivity (S/m)	1.446644
Variation (%)	1.190000

SURFACE SAR

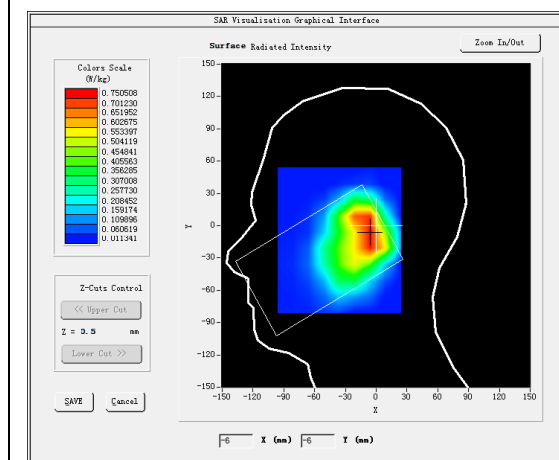



VOLUME SAR

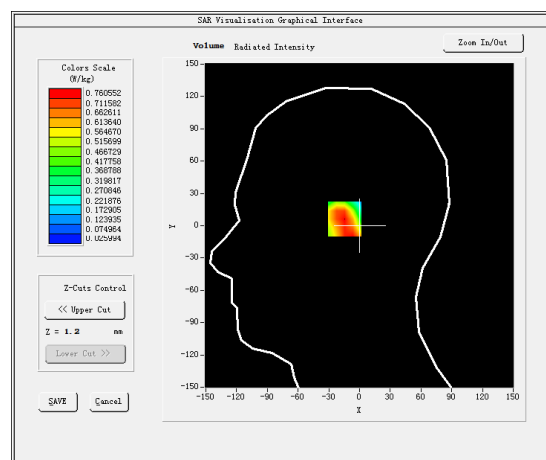

Maximum location: X=-10.00, Y=6.00

SAR Peak: 1.14 W/kg

SAR 10g (W/Kg)	0.430388
SAR 1g (W/Kg)	0.751577

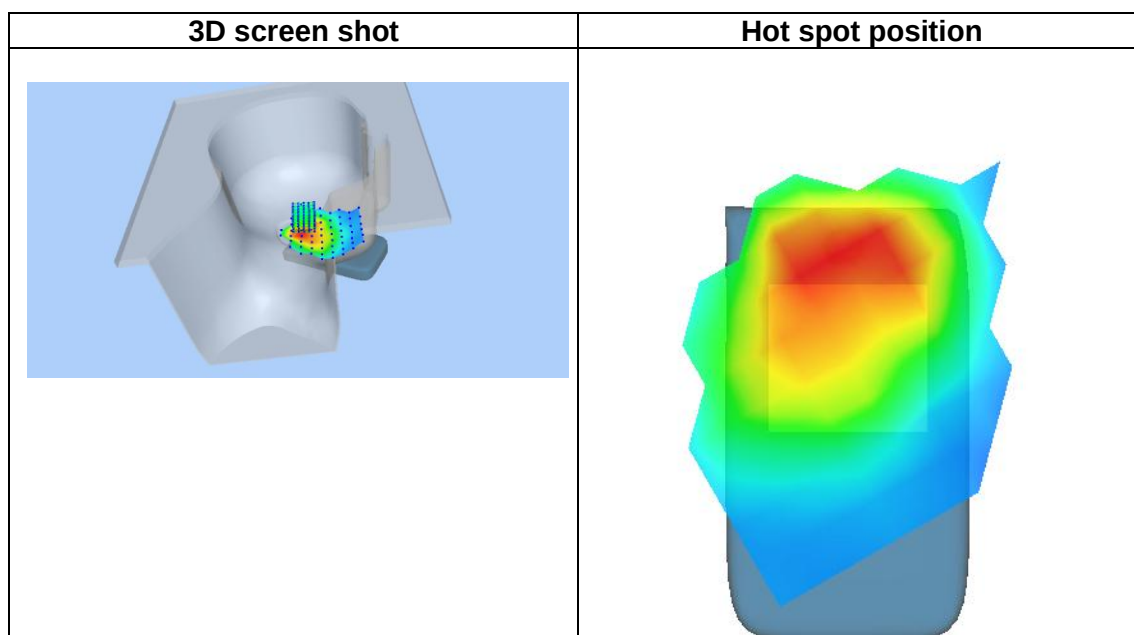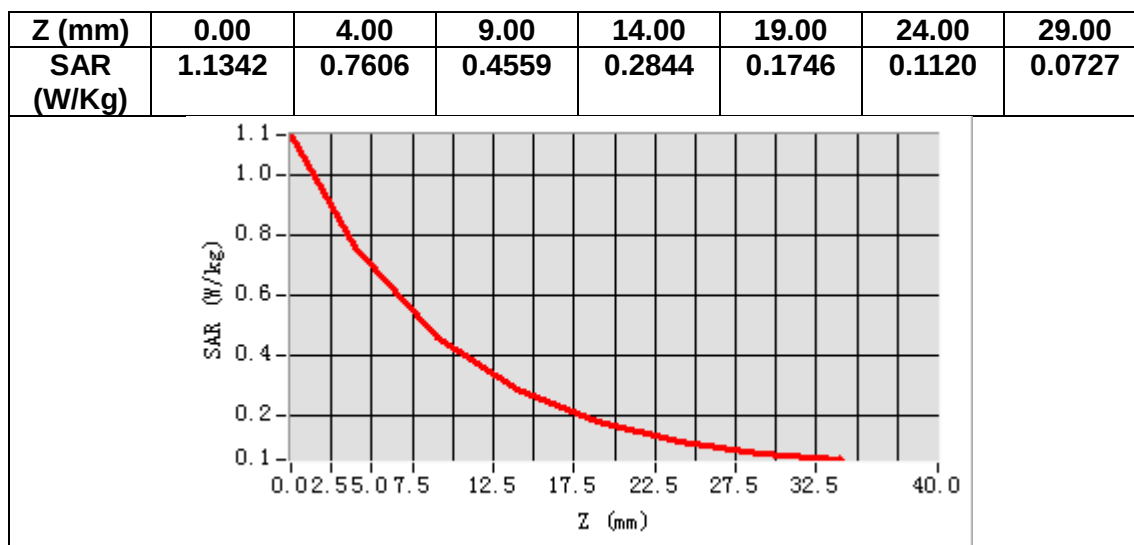

MEASUREMENT 6

Date of measurement: 10/9/2024


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band2 WCDMA1900</u>
Channels	<u>High</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>
ConvF	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative permittivity (real part)	38.560394
Relative permittivity (imaginary part)	13.787345
Conductivity (S/m)	1.461152
Variation (%)	0.680000

SURFACE SAR

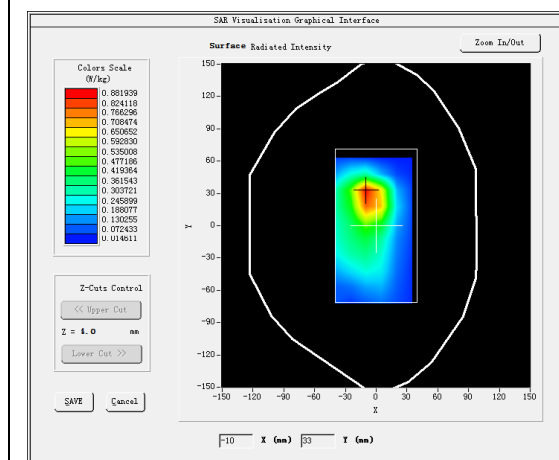



VOLUME SAR

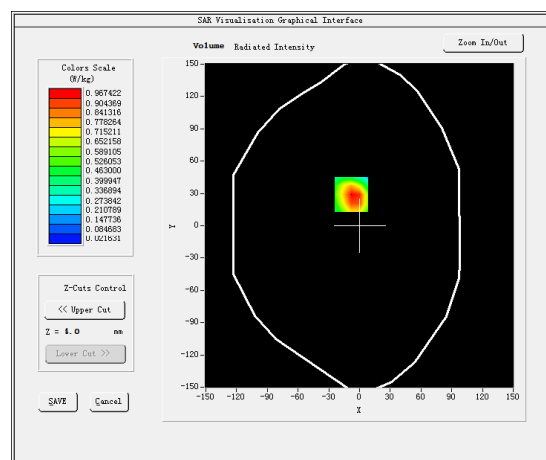

Maximum location: X=-8.00, Y=29.00

SAR Peak: 1.57 W/kg

SAR 10g (W/Kg)	0.517246
SAR 1g (W/Kg)	0.972470

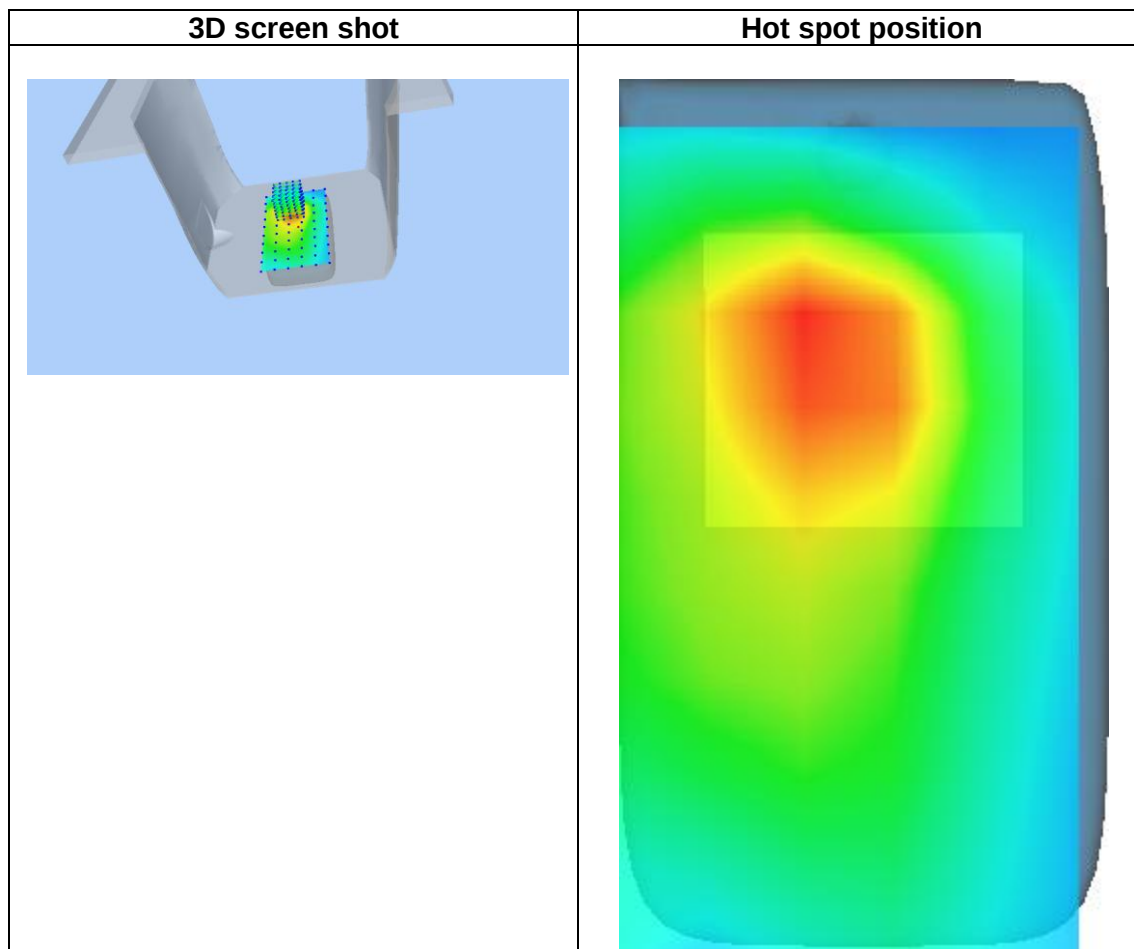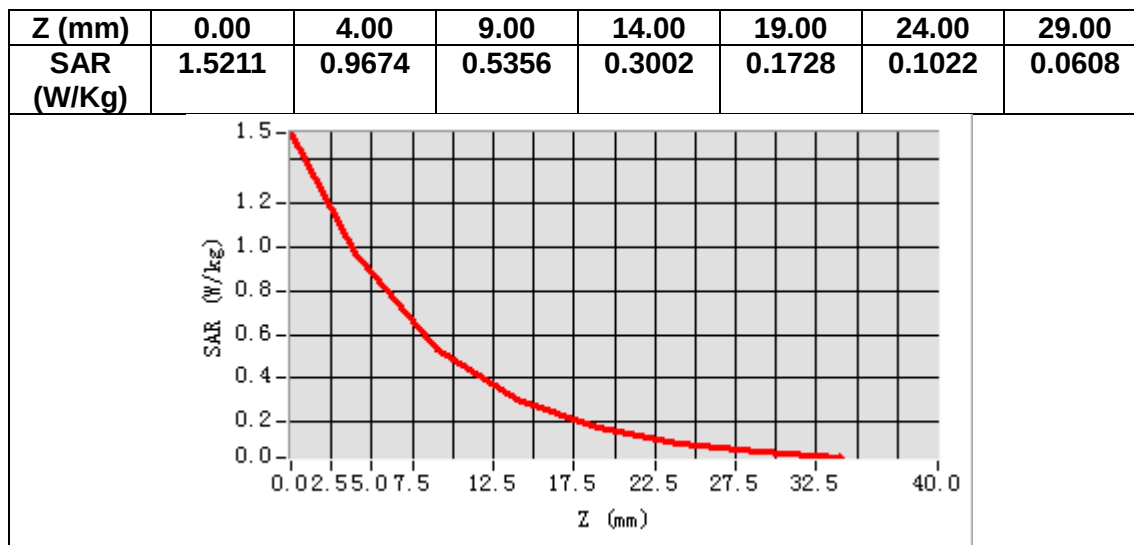

MEASUREMENT 7

Date of measurement: 30/8/2024


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band5 WCDMA850</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>
ConvF	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	43.093271
Relative permittivity (imaginary part)	19.965986
Conductivity (S/m)	0.888753
Variation (%)	1.720000

SURFACE SAR

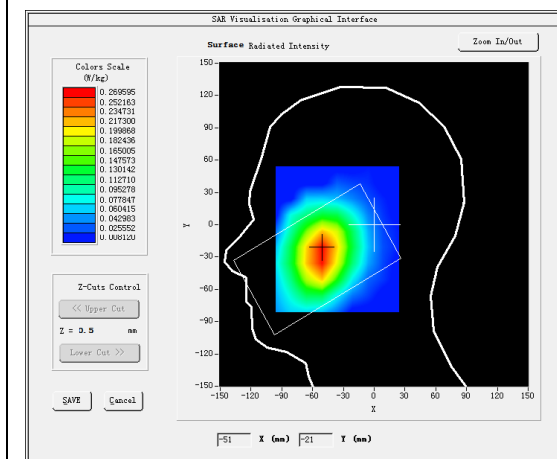



VOLUME SAR

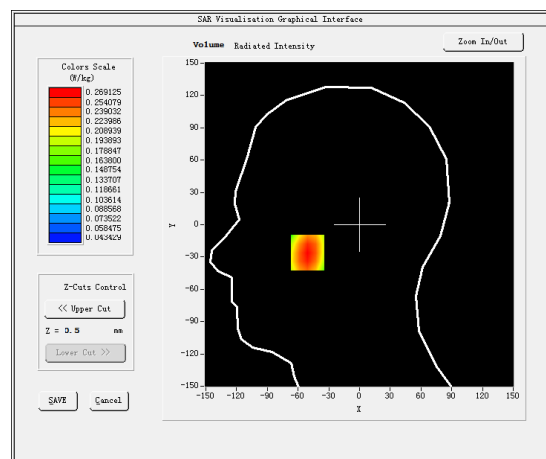

Maximum location: X=-51.00, Y=-26.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.201917
SAR 1g (W/Kg)	0.264880

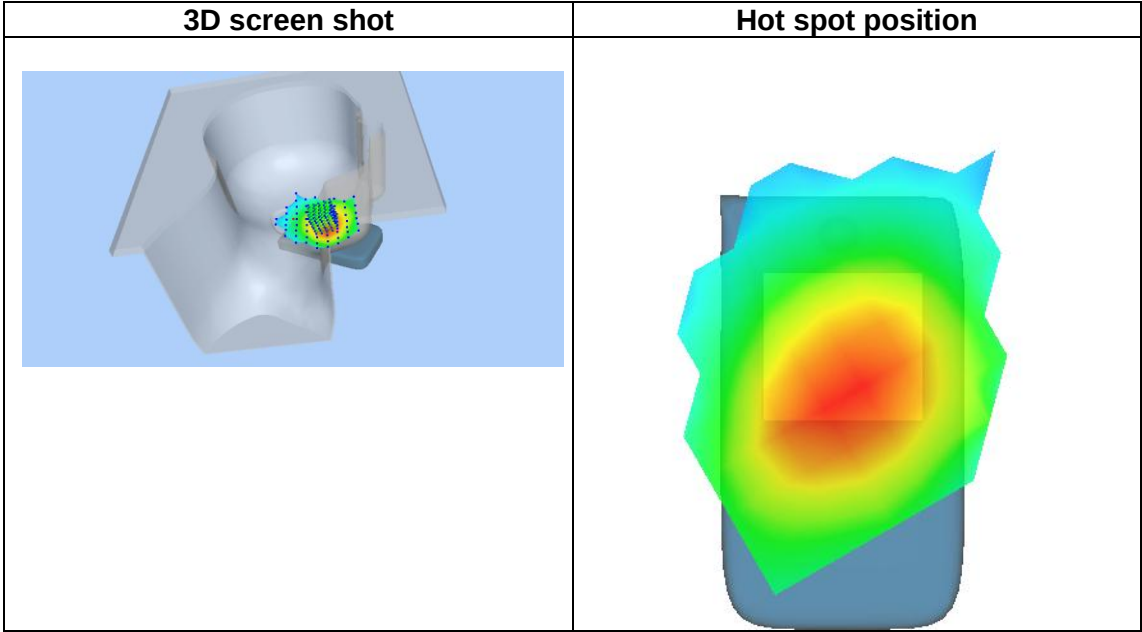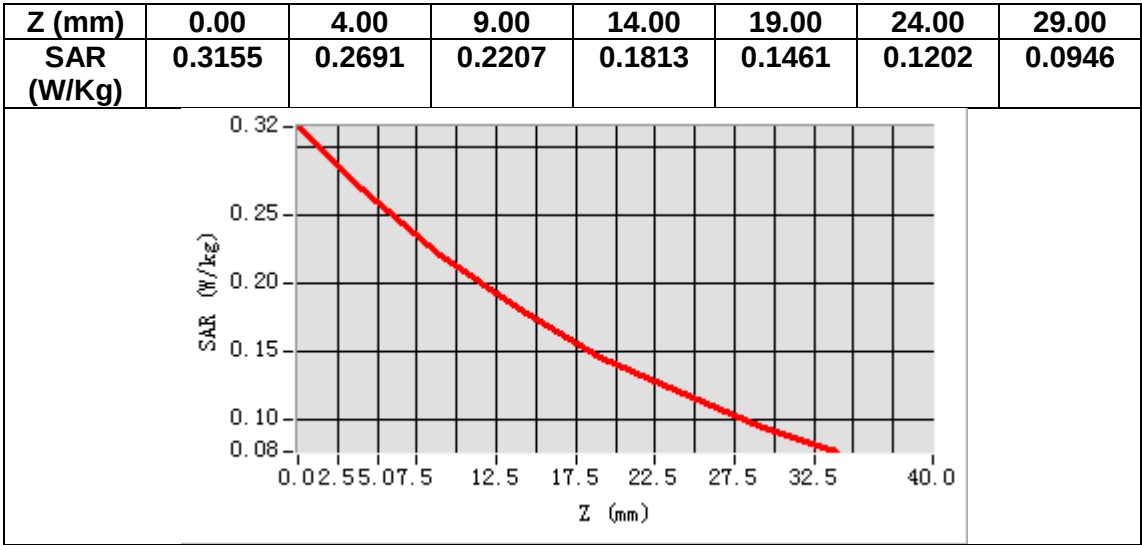

MEASUREMENT 8

Date of measurement: 30/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	43.093271
Relative permittivity (imaginary part)	19.965986
Conductivity (S/m)	0.888753
Variation (%)	-0.710000

SURFACE SAR

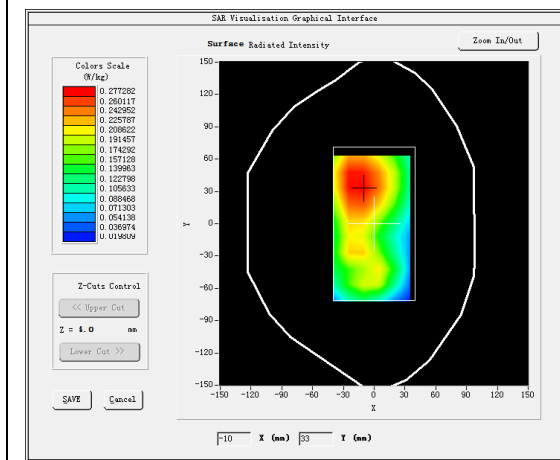



VOLUME SAR

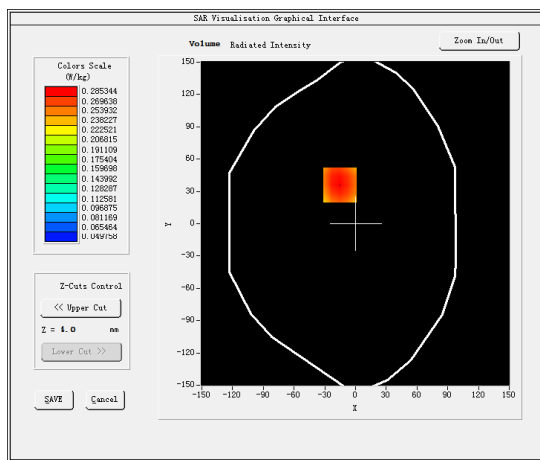

Maximum location: X=-15.00, Y=36.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.212271
SAR 1g (W/Kg)	0.283048

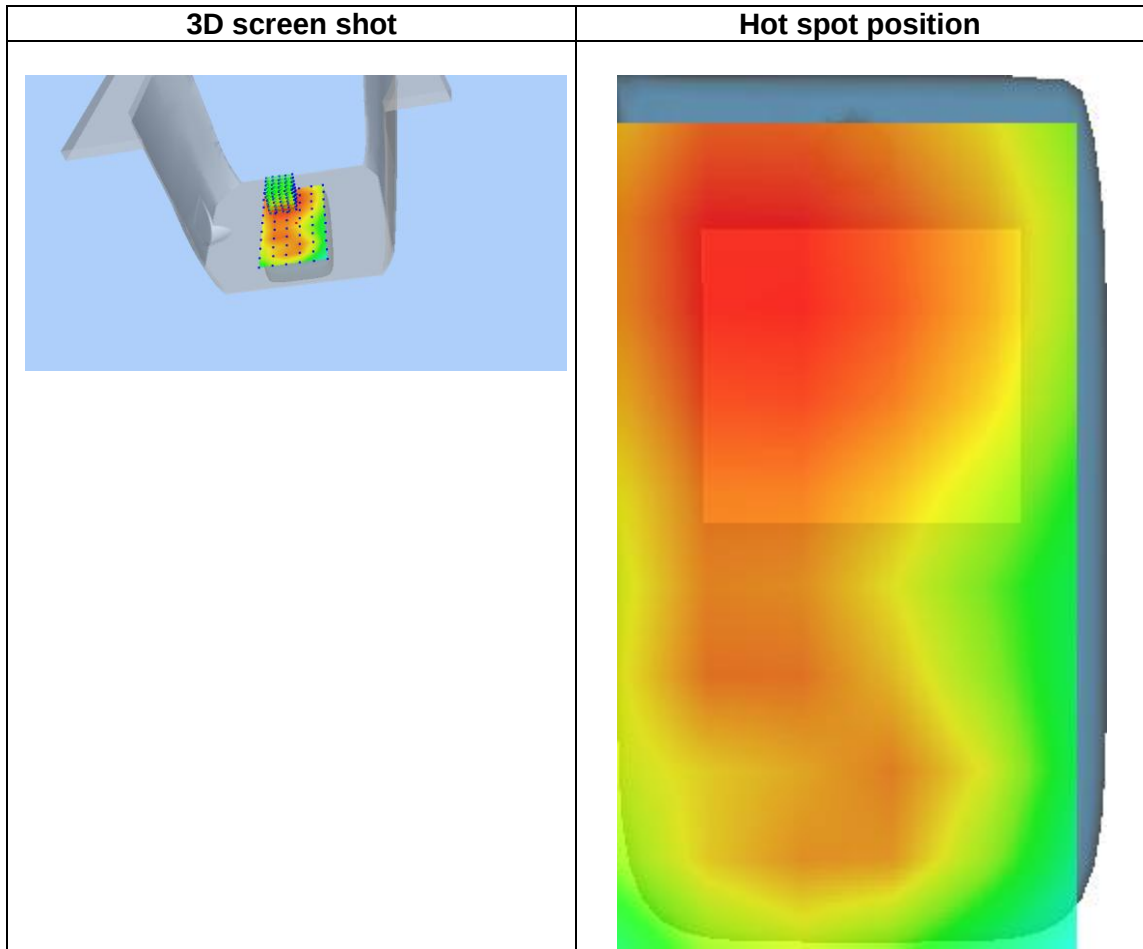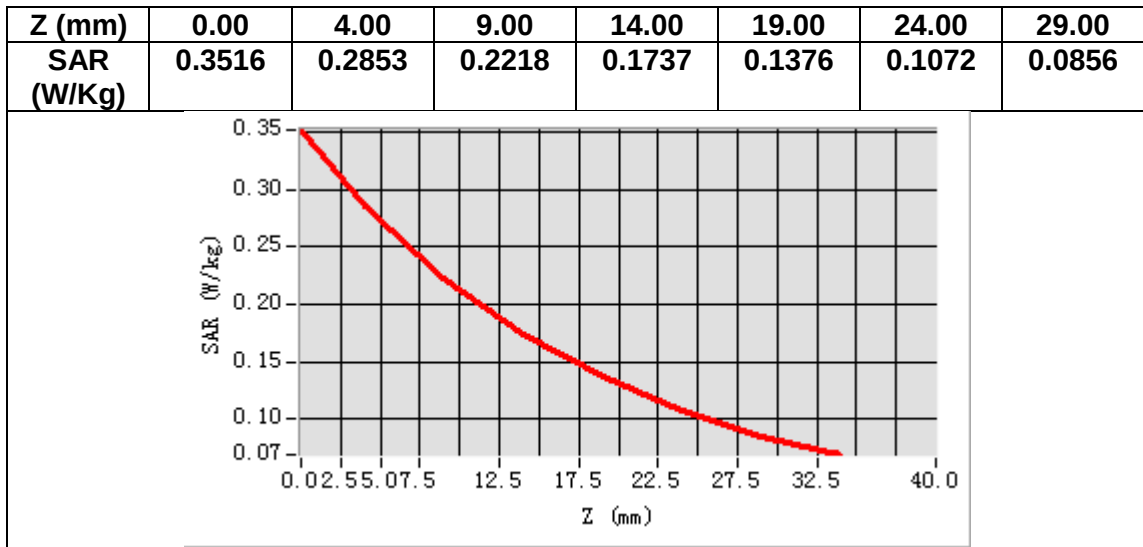

MEASUREMENT 9

Date of measurement: 16/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	40.163013
Relative permittivity (imaginary part)	13.349949
Conductivity (S/m)	1.807435
Variation (%)	0.520000

SURFACE SAR

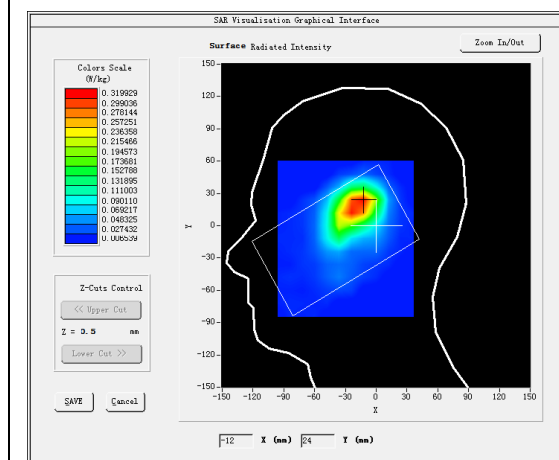



VOLUME SAR

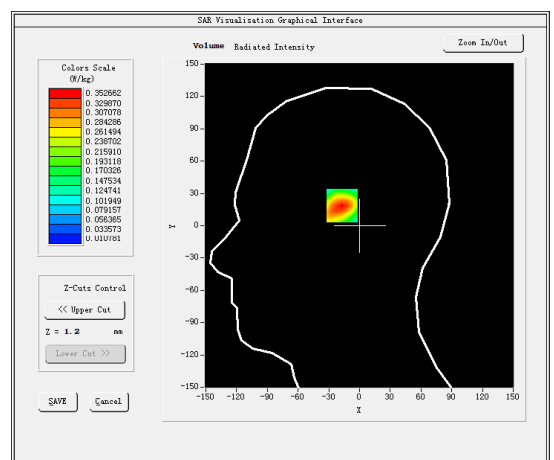

Maximum location: X=-16.00, Y=20.00

SAR Peak: 0.59 W/kg

SAR 10g (W/Kg)	0.172684
SAR 1g (W/Kg)	0.332675

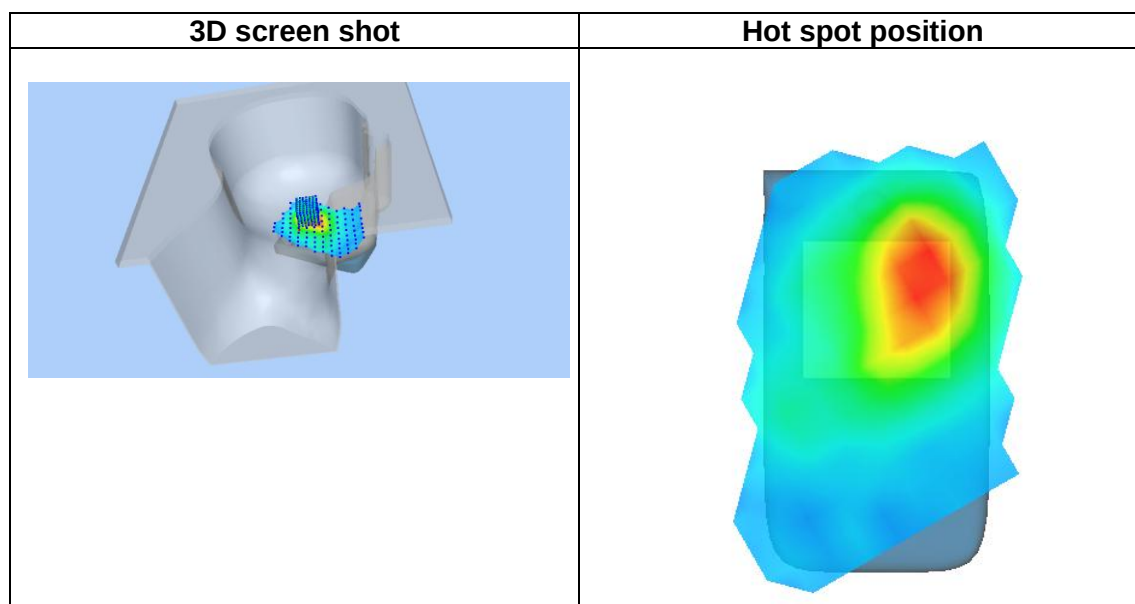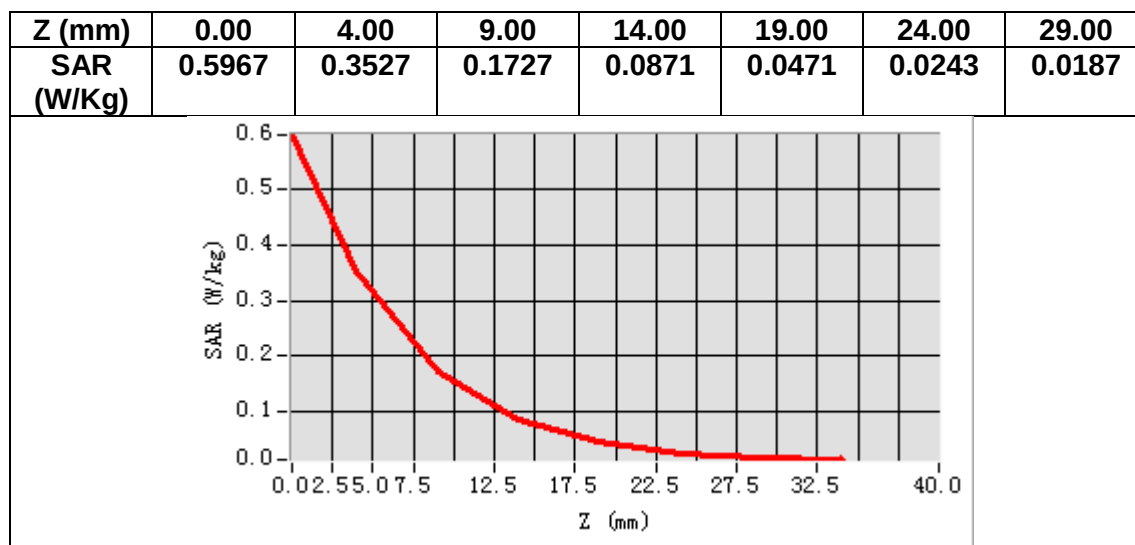

MEASUREMENT 10

Date of measurement: 16/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	40.163013
Relative permittivity (imaginary part)	13.349949
Conductivity (S/m)	1.807435
Variation (%)	1.040000

SURFACE SAR

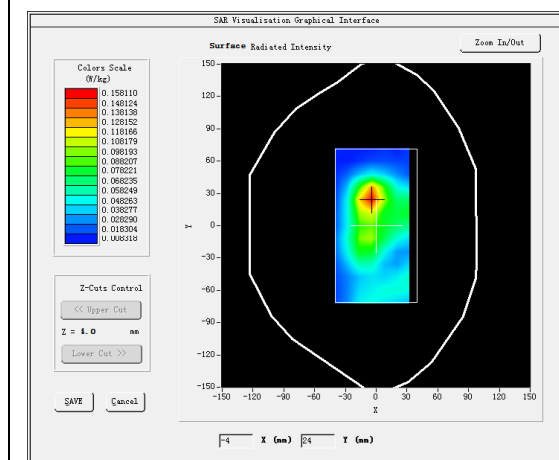



VOLUME SAR

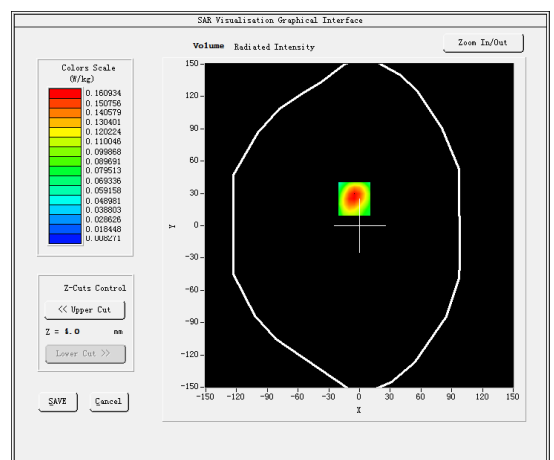

Maximum location: X=-5.00, Y=25.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.078842
SAR 1g (W/Kg)	0.154074

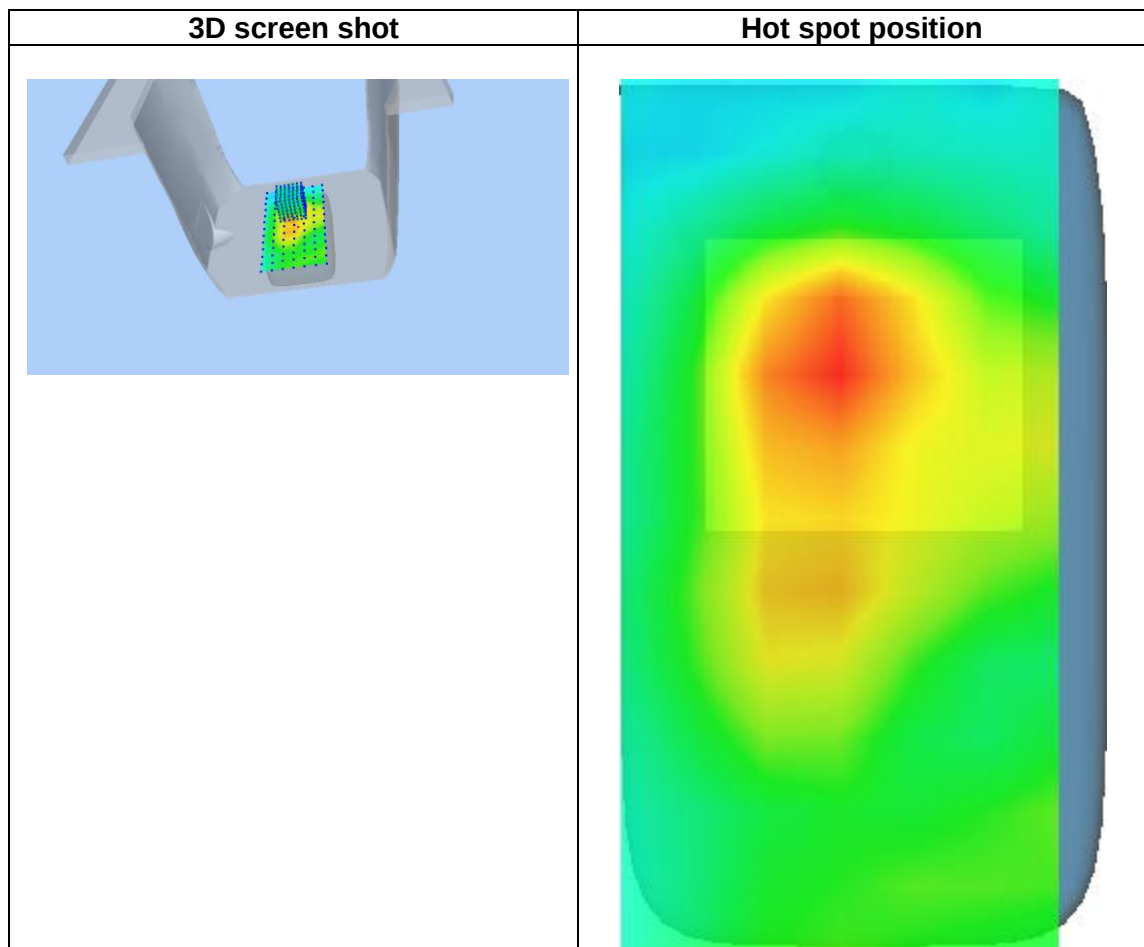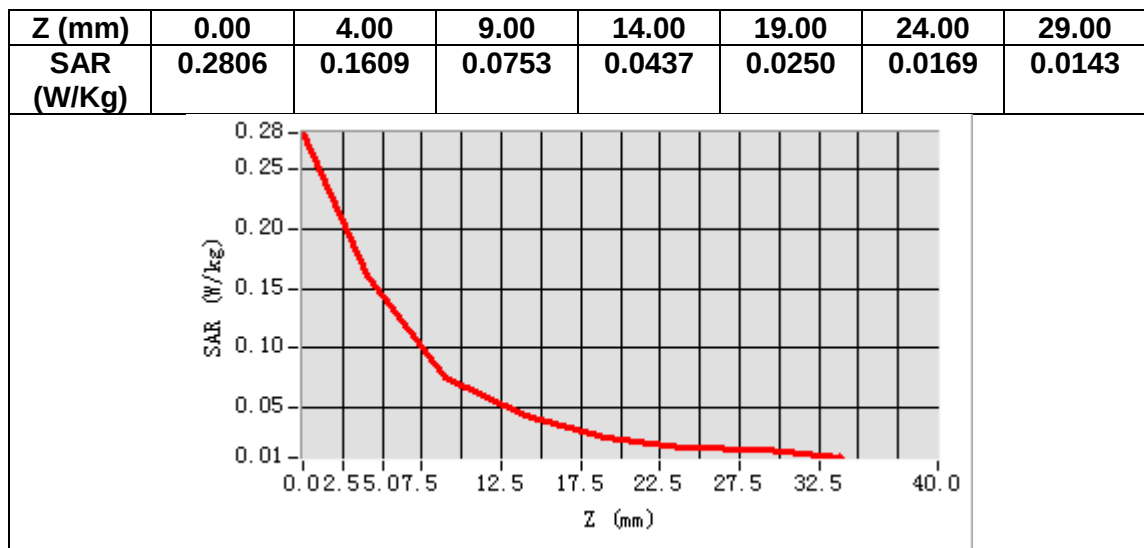

MEASUREMENT 11

Date of measurement: 10/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.674034
Relative permittivity (imaginary part)	13.850845
Conductivity (S/m)	1.446644
Variation (%)	0.210000

SURFACE SAR

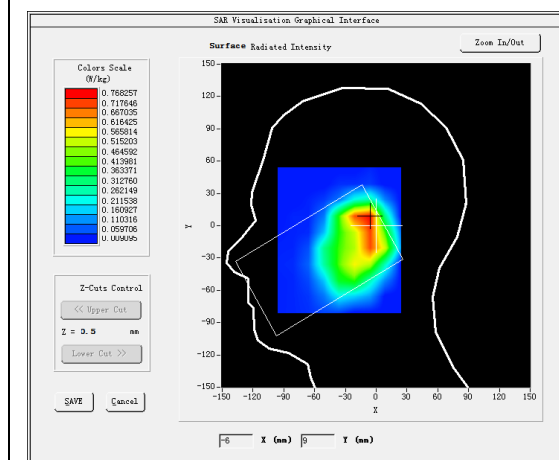



VOLUME SAR

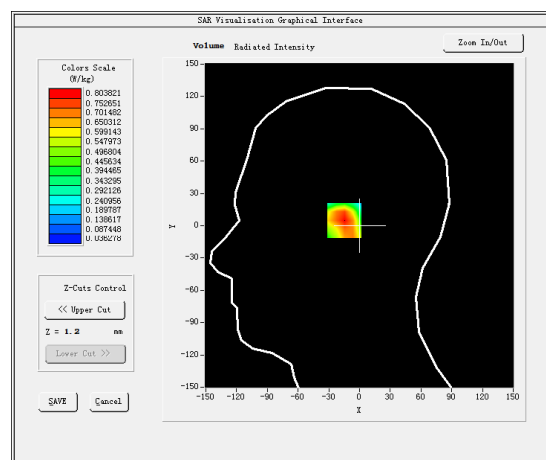

Maximum location: X=-10.00, Y=5.00

SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.469468
SAR 1g (W/Kg)	0.791203

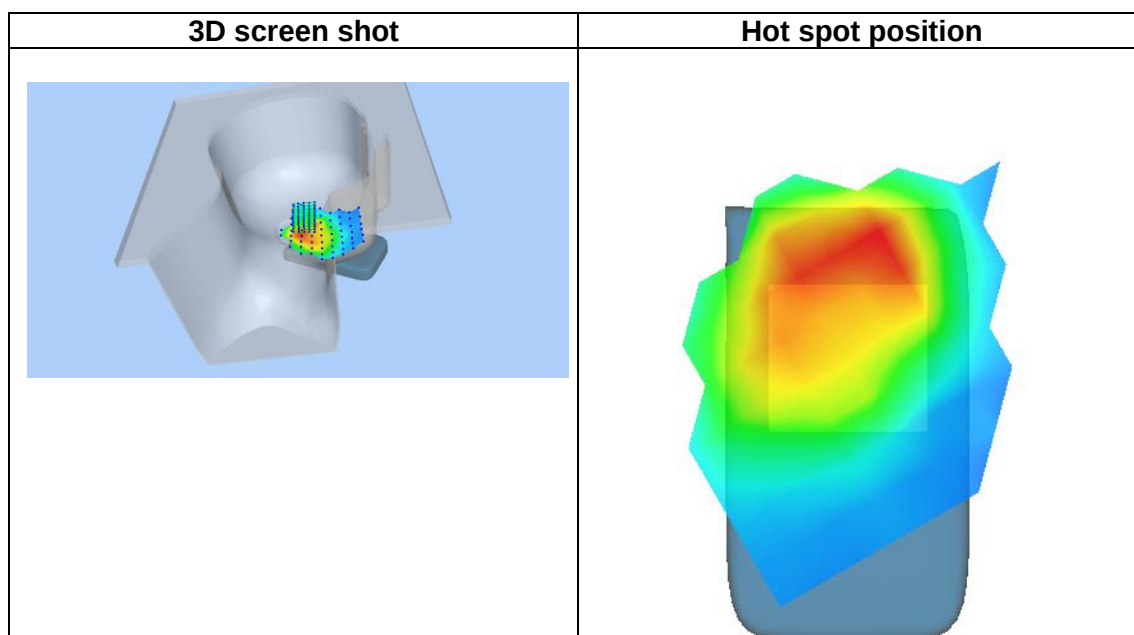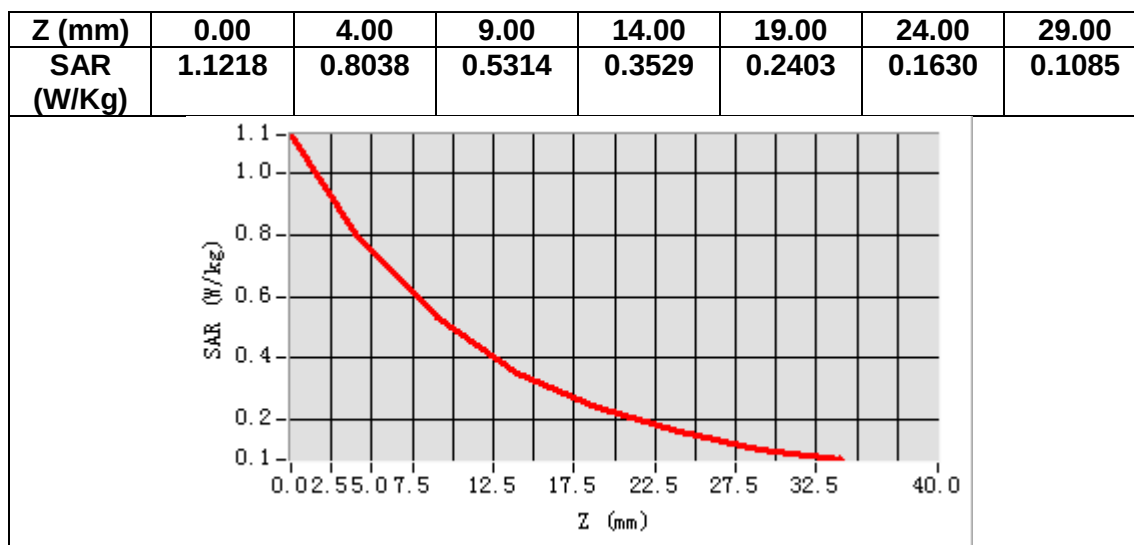

MEASUREMENT 12

Date of measurement: 10/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.674034
Relative permittivity (imaginary part)	13.850845
Conductivity (S/m)	1.446644
Variation (%)	-1.240000

SURFACE SAR

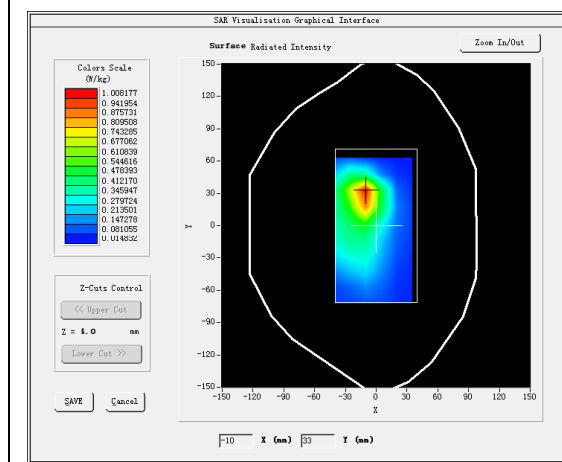



VOLUME SAR

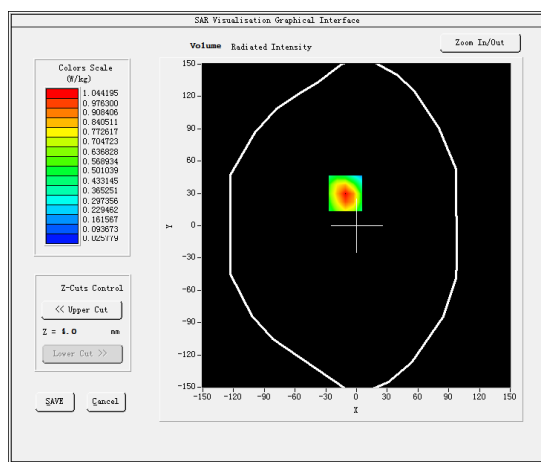

Maximum location: X=-11.00, Y=30.00

SAR Peak: 1.57 W/kg

SAR 10g (W/Kg)	0.559840
SAR 1g (W/Kg)	1.010005

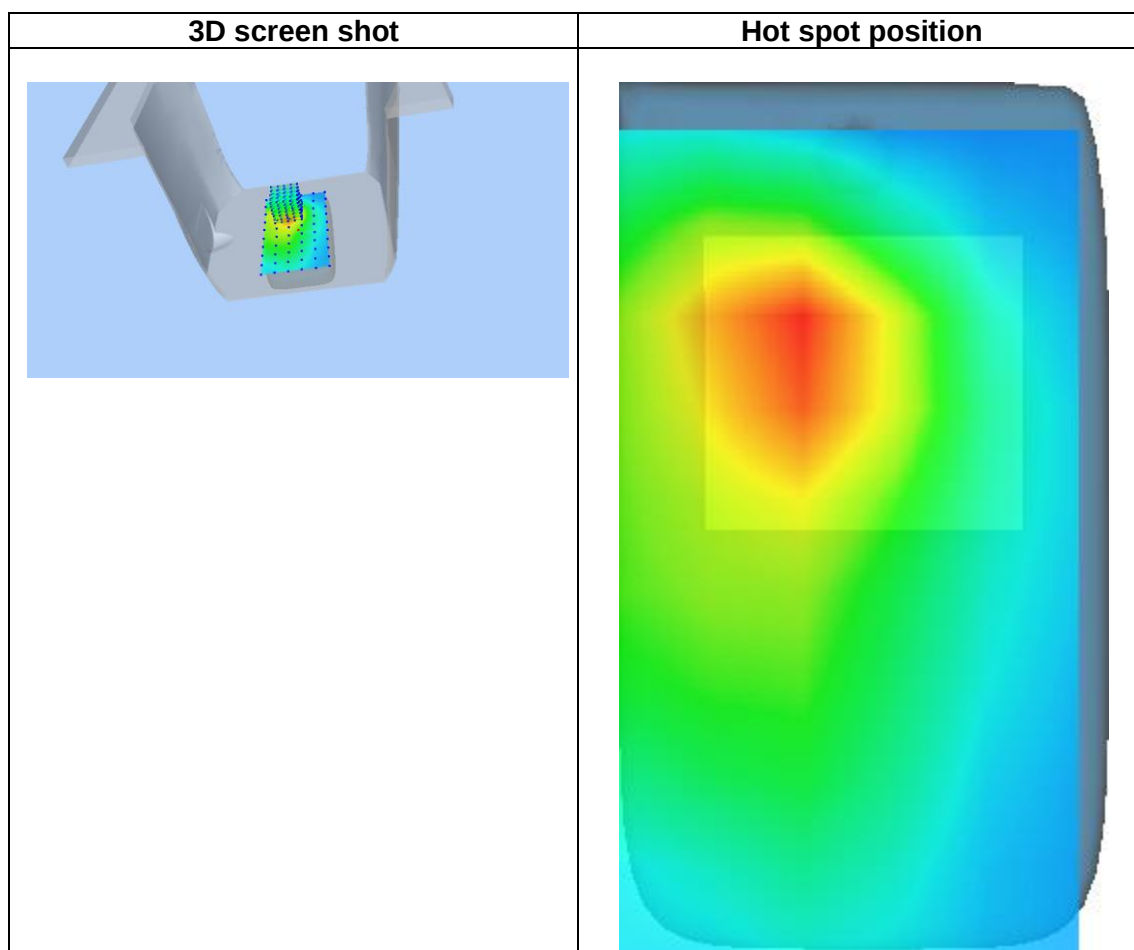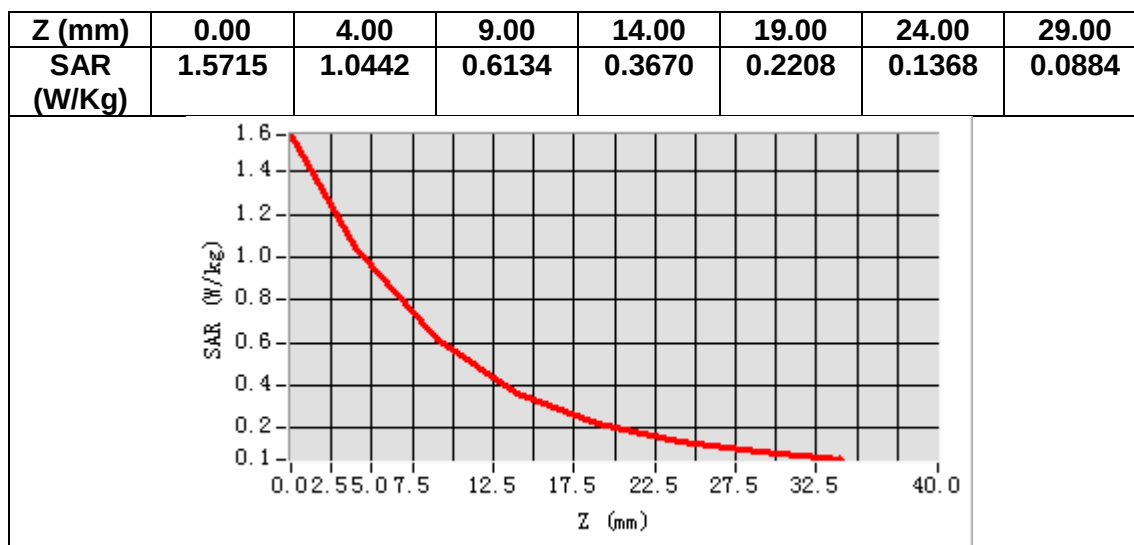

MEASUREMENT 13

Date of measurement: 18/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.788006
Relative permittivity (imaginary part)	13.679339
Conductivity (S/m)	1.316636
Variation (%)	-0.660000

SURFACE SAR

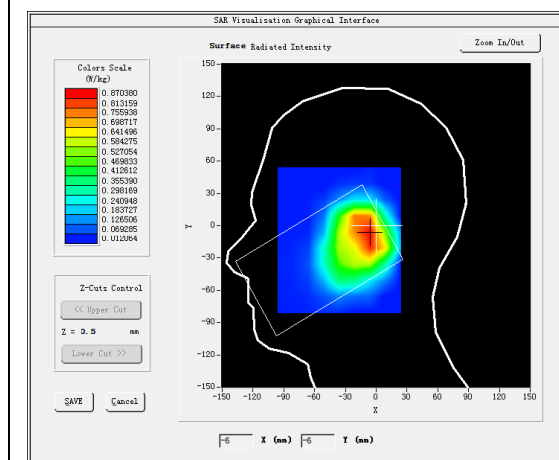



VOLUME SAR

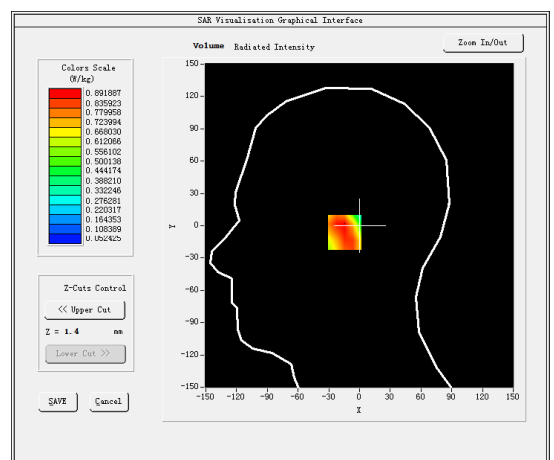

Maximum location: X=-8.00, Y=-6.00

SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.578571
SAR 1g (W/Kg)	0.865520

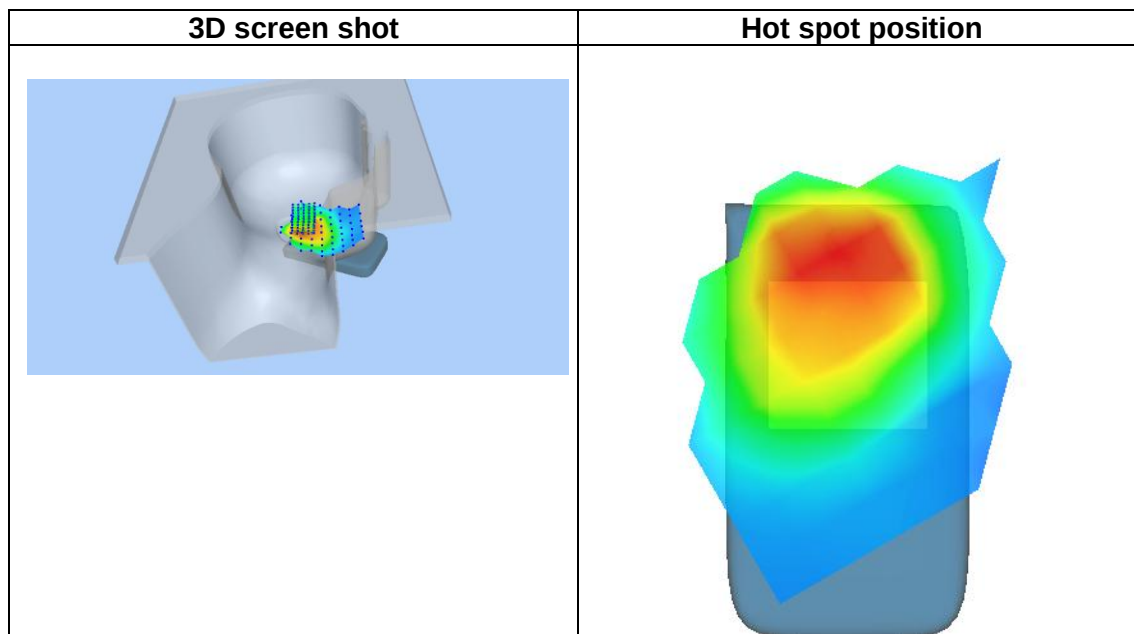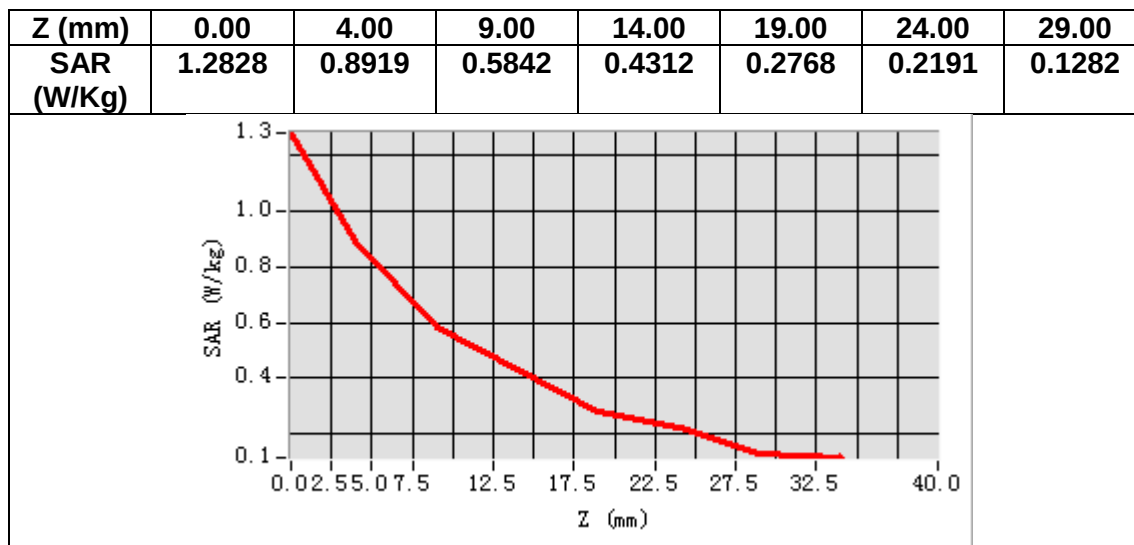

MEASUREMENT 14

Date of measurement: 18/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.788006
Relative permittivity (imaginary part)	13.679339
Conductivity (S/m)	1.316636
Variation (%)	-0.930000

SURFACE SAR

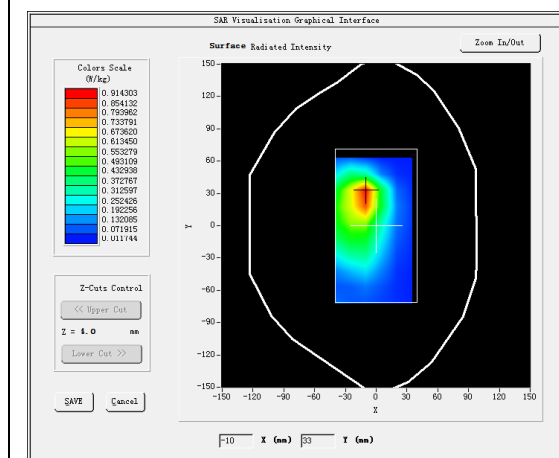



VOLUME SAR

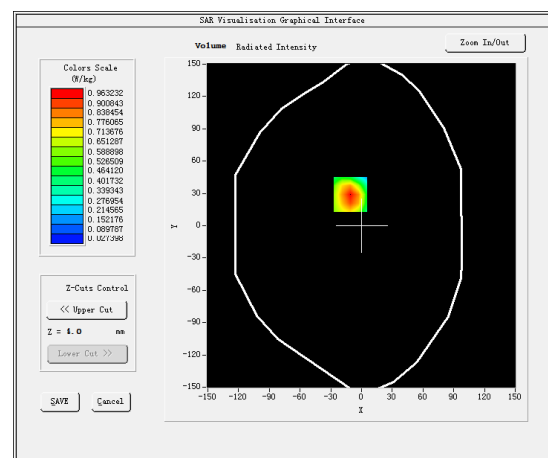

Maximum location: X=-11.00, Y=29.00

SAR Peak: 1.41 W/kg

SAR 10g (W/Kg)	0.534432
SAR 1g (W/Kg)	0.909351

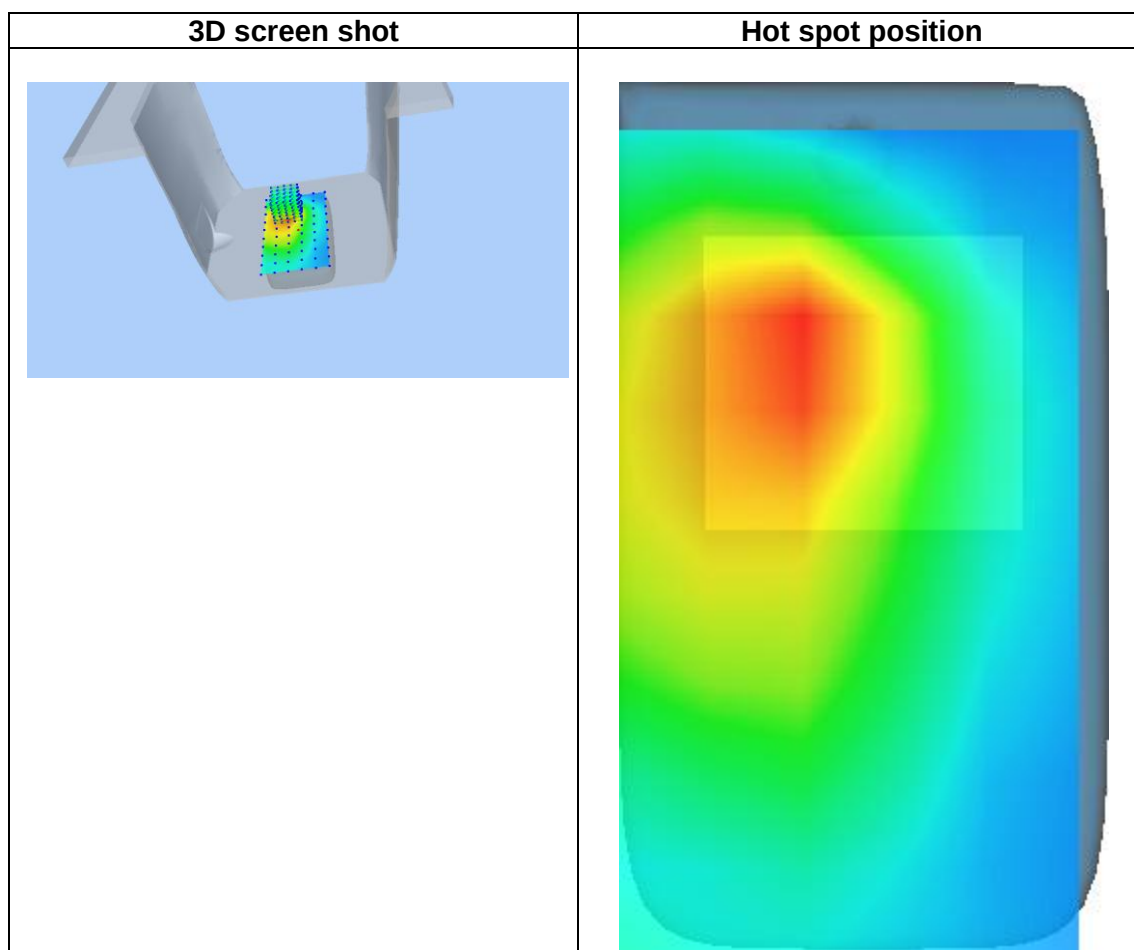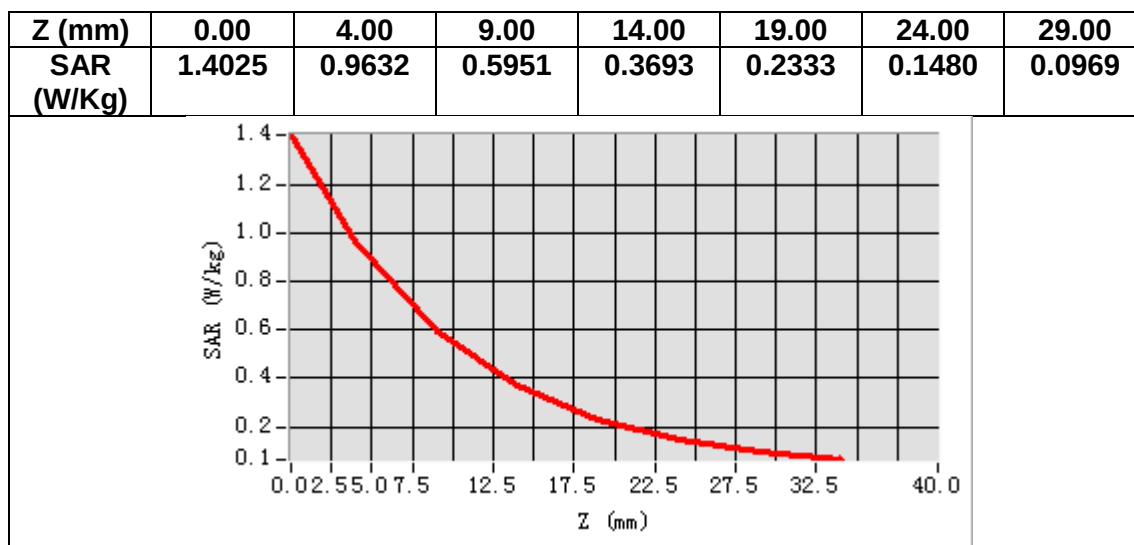

MEASUREMENT 15

Date of measurement: 30/8/2024


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 5</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>
ConvF	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	42.155861
Relative permittivity (imaginary part)	19.964647
Conductivity (S/m)	0.927802
Variation (%)	-1.040000

SURFACE SAR

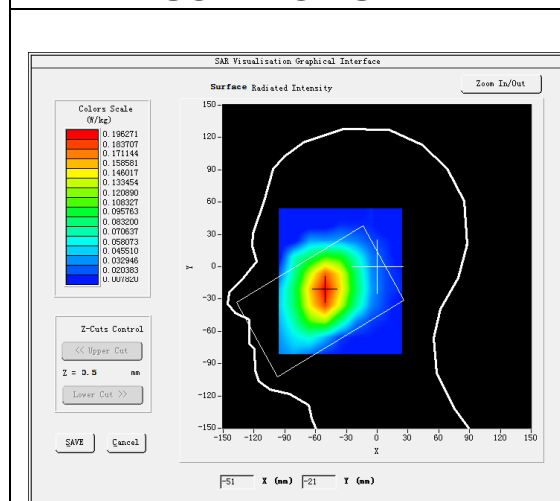



VOLUME SAR

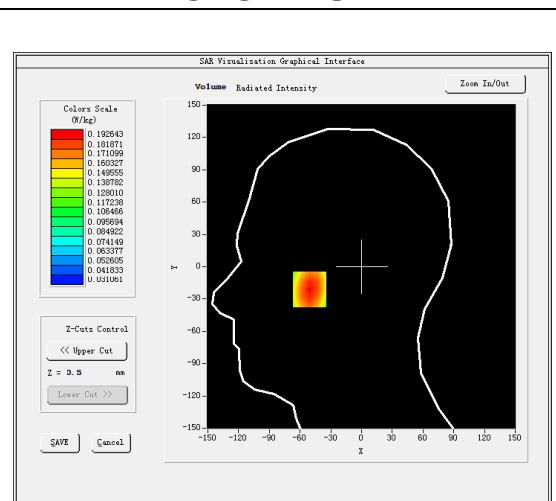

Maximum location: X=-51.00, Y=-21.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.149108
SAR 1g (W/Kg)	0.189986

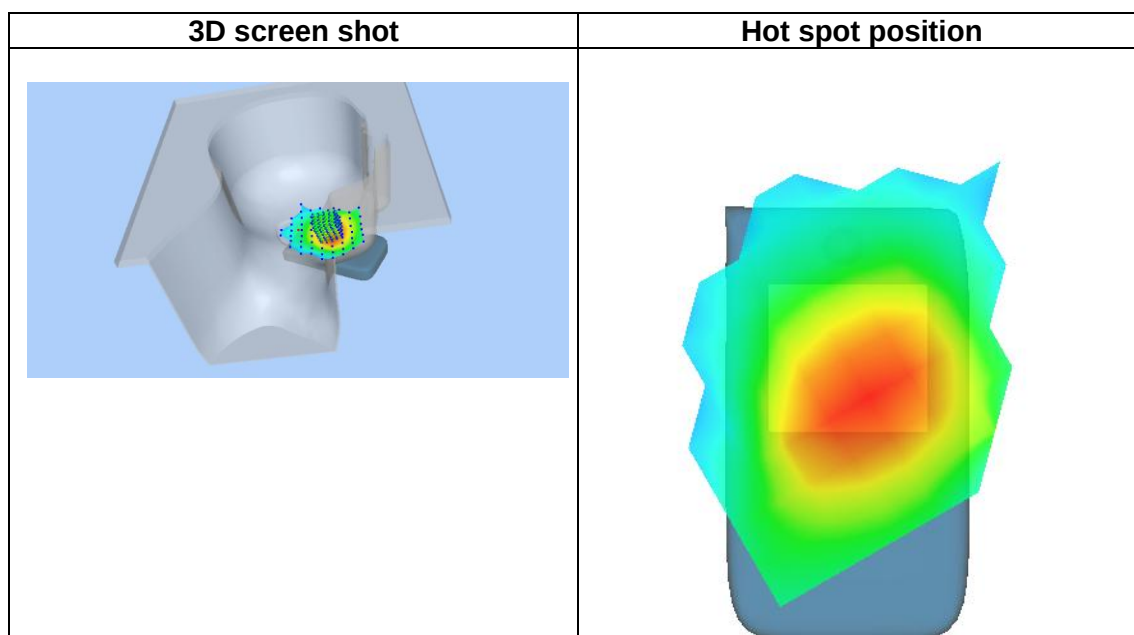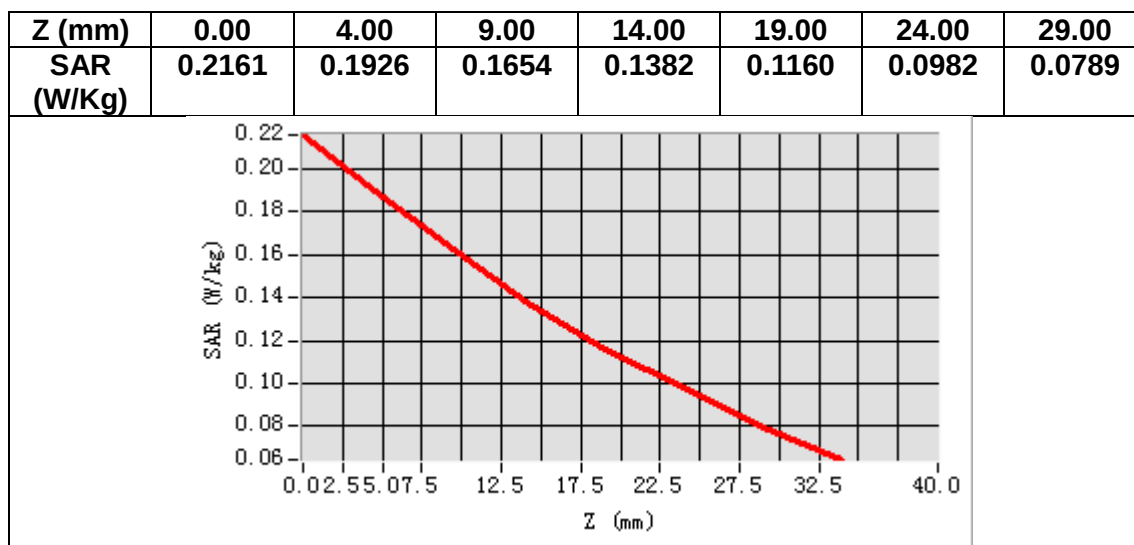

MEASUREMENT 16

Date of measurement: 30/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	42.155861
Relative permittivity (imaginary part)	19.964647
Conductivity (S/m)	0.927802
Variation (%)	-0.460000

SURFACE SAR

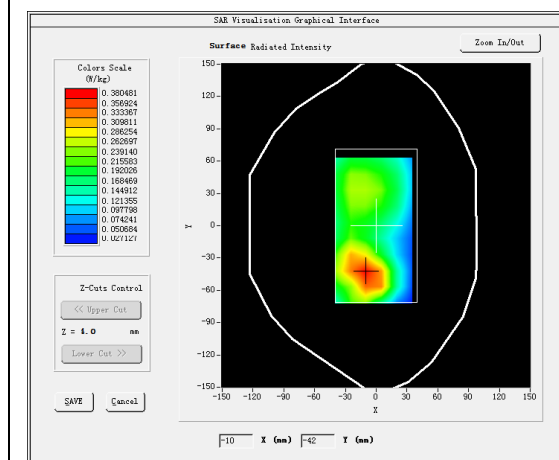



VOLUME SAR

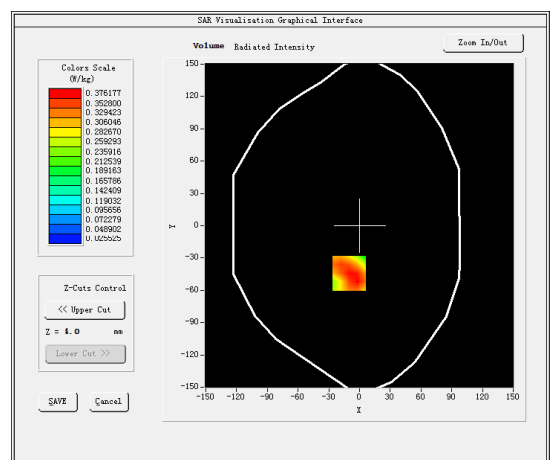

Maximum location: X=-10.00, Y=-44.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.244110
SAR 1g (W/Kg)	0.371661

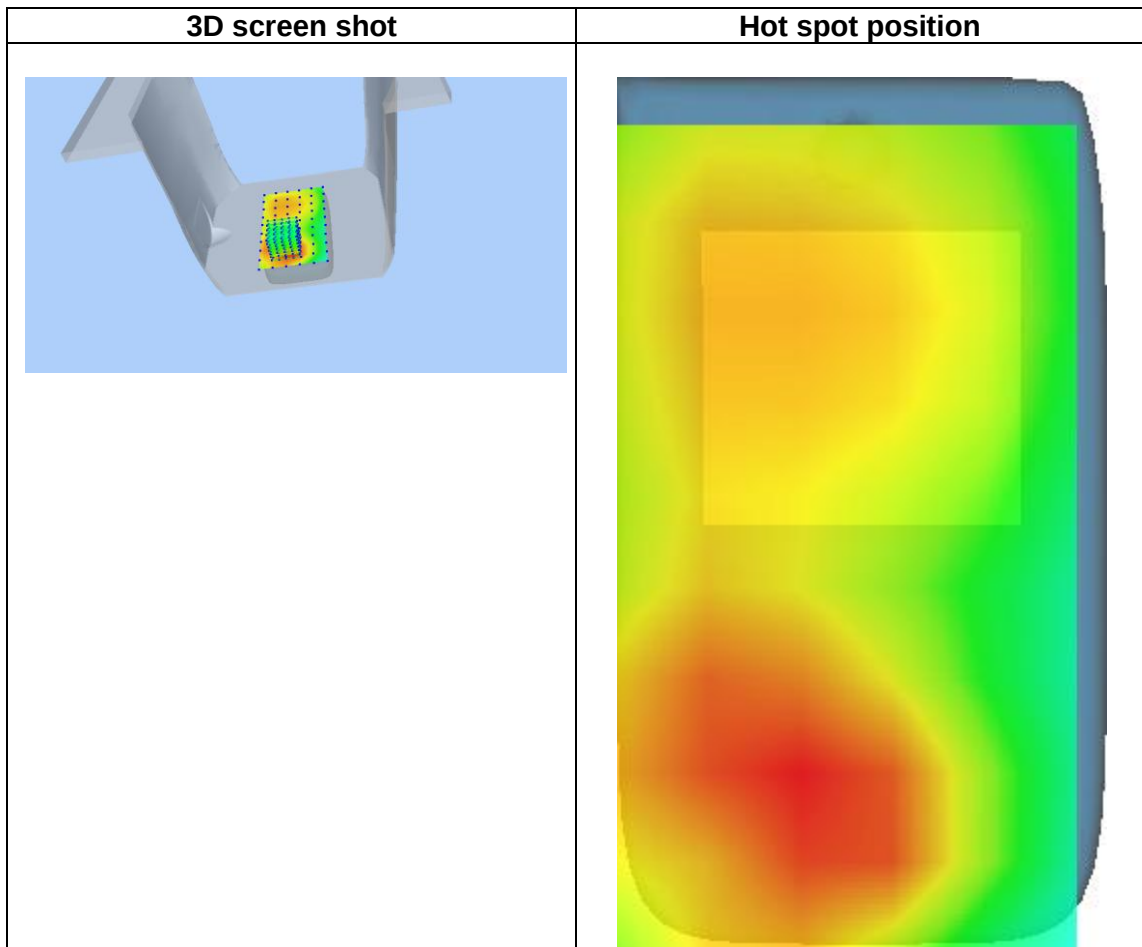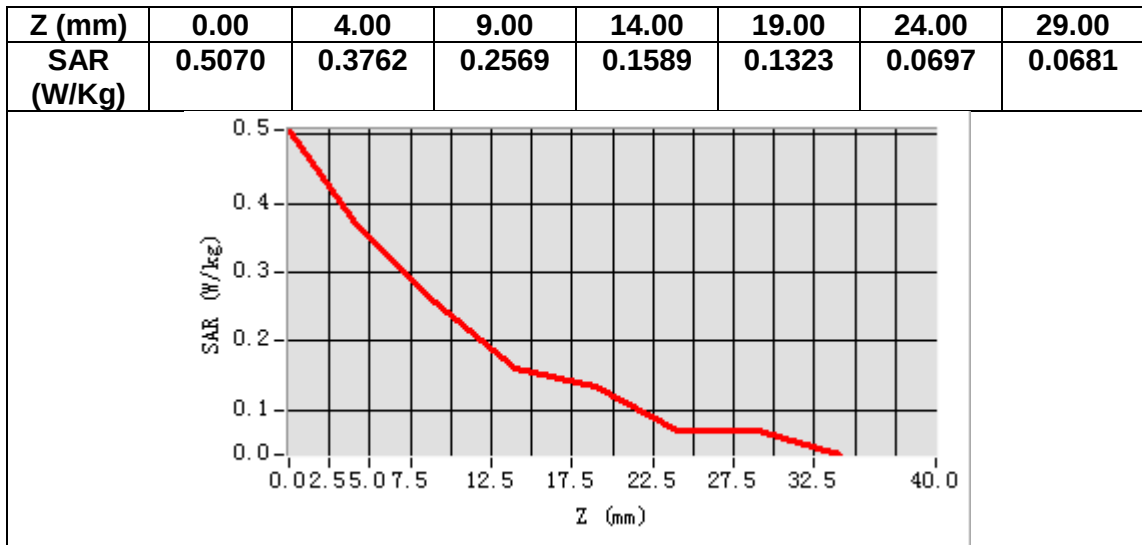

MEASUREMENT 17

Date of measurement: 27/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.433262
Relative permittivity (imaginary part)	13.789530
Conductivity (S/m)	1.942025
Variation (%)	1.560000

SURFACE SAR

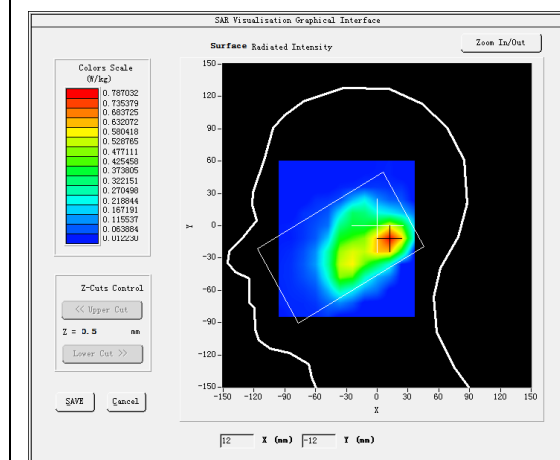



VOLUME SAR

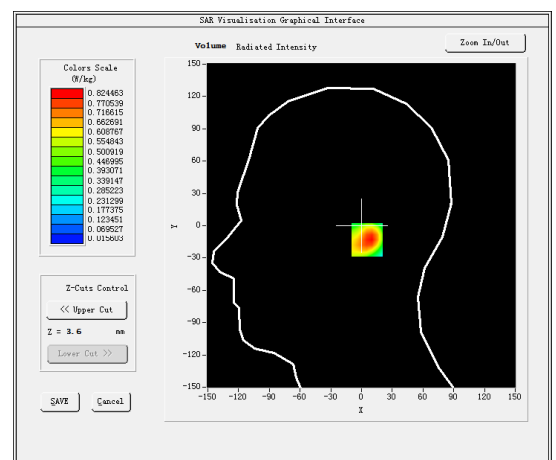

Maximum location: X=12.00, Y=-13.00

SAR Peak: 1.43 W/kg

SAR 10g (W/Kg)	0.384772
SAR 1g (W/Kg)	0.786213

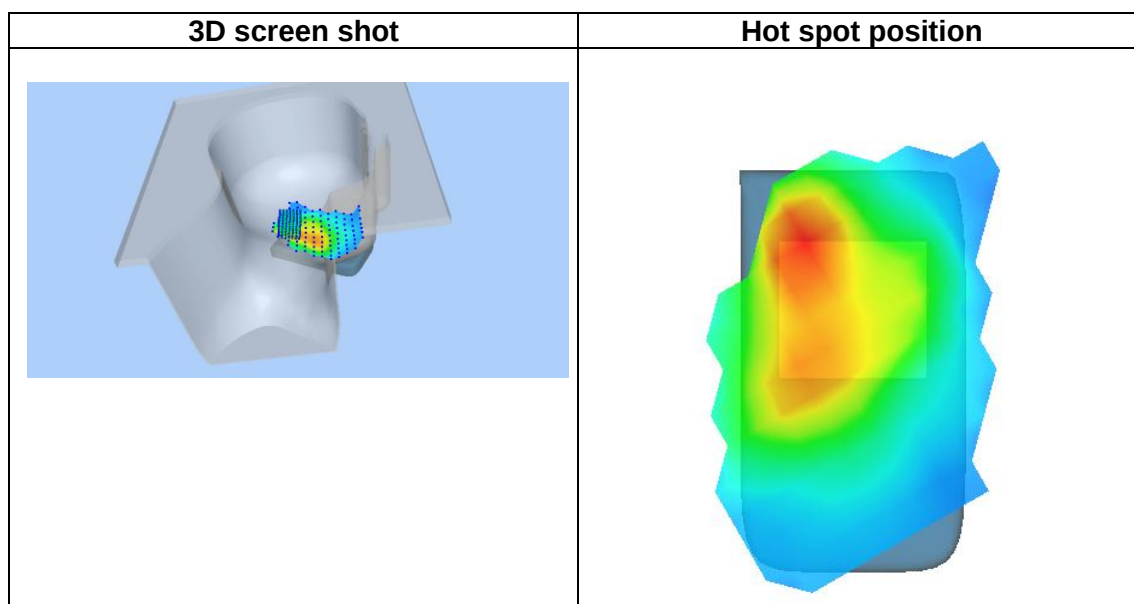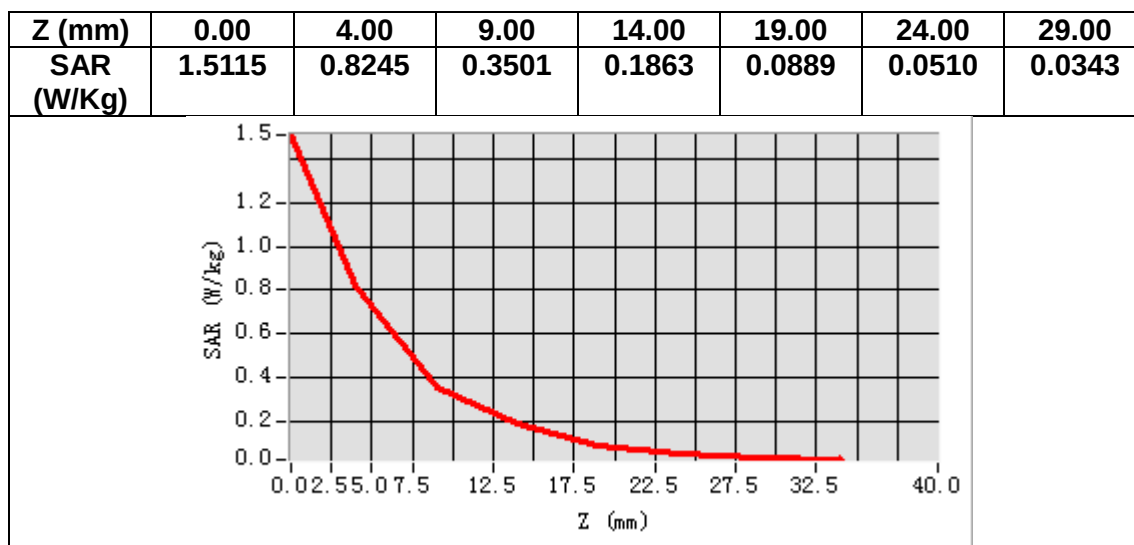

MEASUREMENT 18

Date of measurement: 27/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2510.000000
Relative permittivity (real part)	39.548363
Relative permittivity (imaginary part)	13.732230
Conductivity (S/m)	1.914883
Variation (%)	0.120000

SURFACE SAR

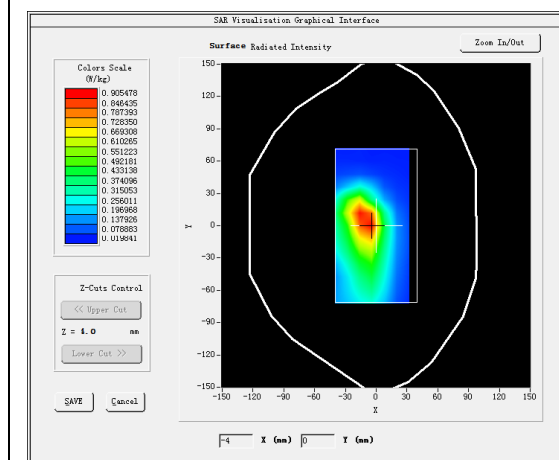



VOLUME SAR

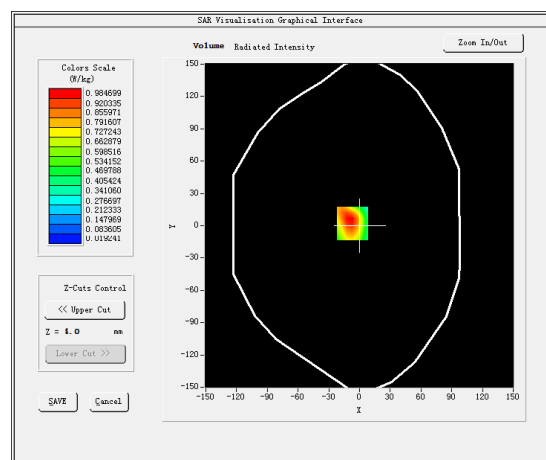

Maximum location: X=-7.00, Y=2.00

SAR Peak: 1.68 W/kg

SAR 10g (W/Kg)	0.485384
SAR 1g (W/Kg)	0.954904

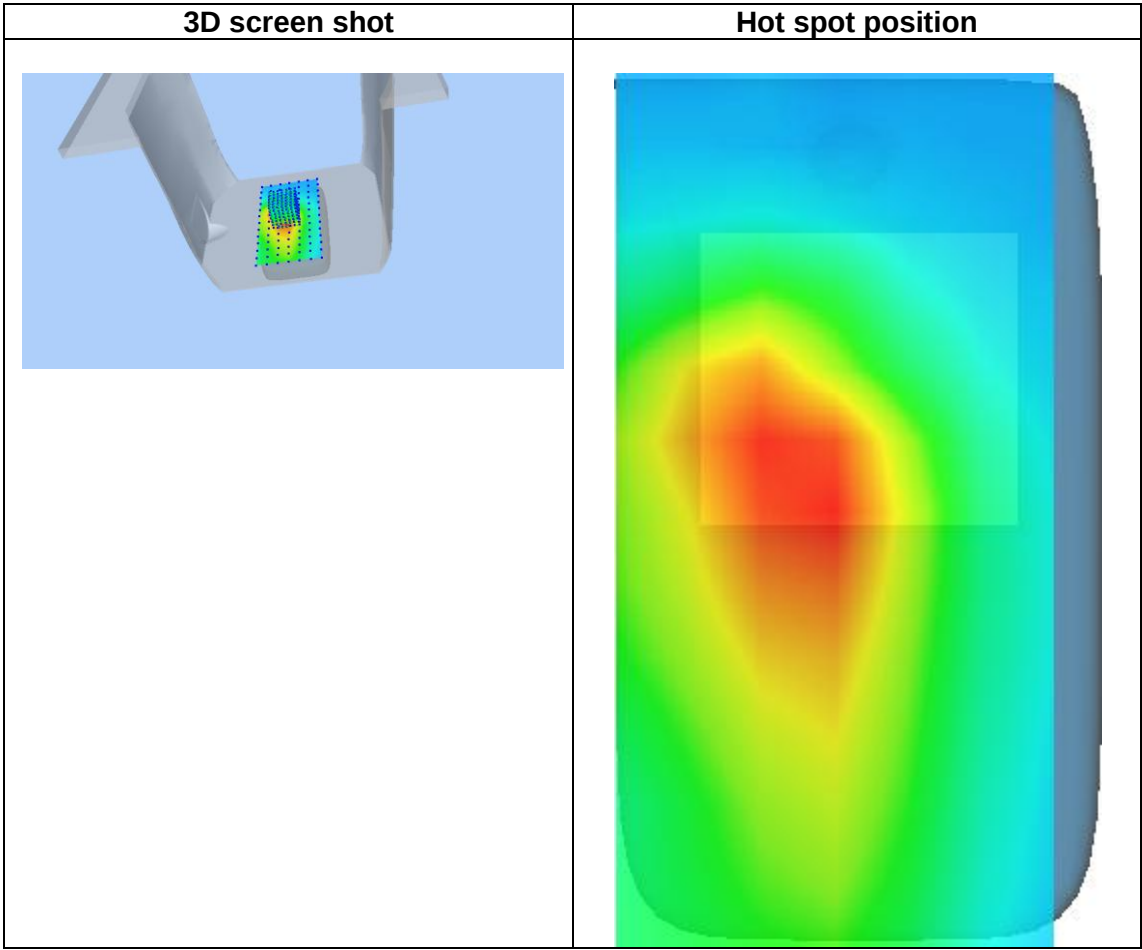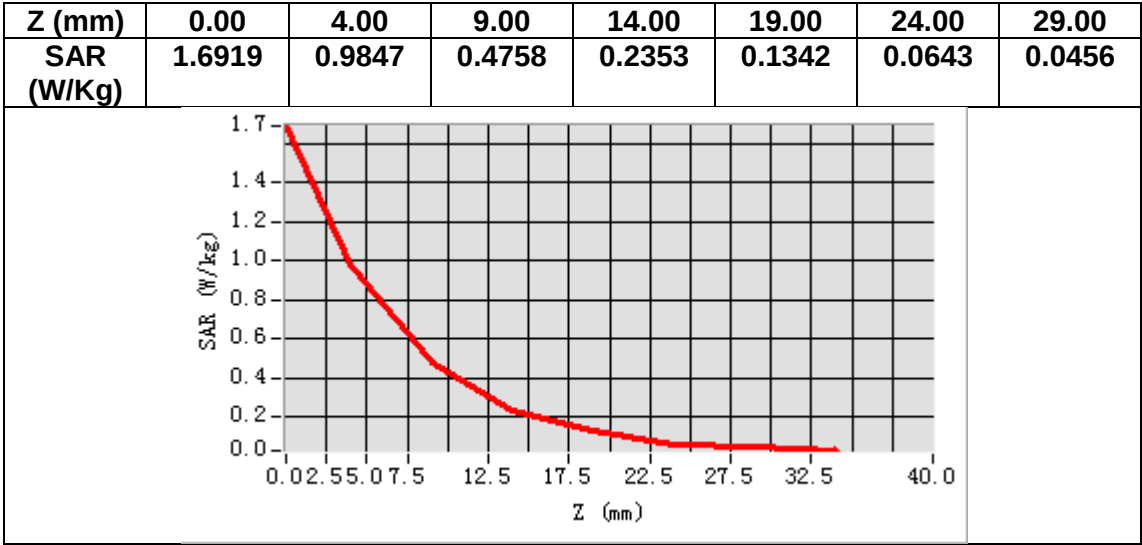

MEASUREMENT 19

Date of measurement: 9/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	41.114532
Relative permittivity (imaginary part)	21.862097
Conductivity (S/m)	0.859302
Variation (%)	0.300000

SURFACE SAR

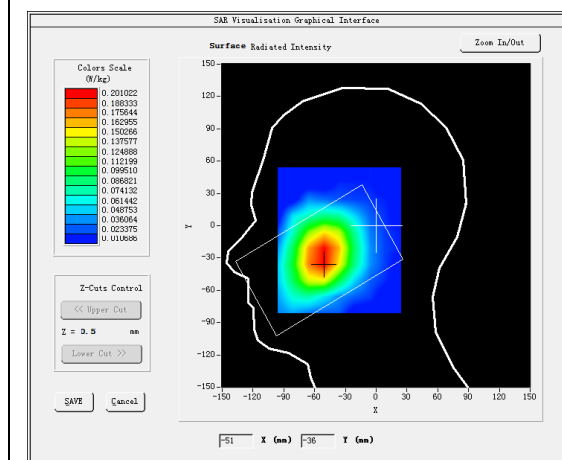



VOLUME SAR

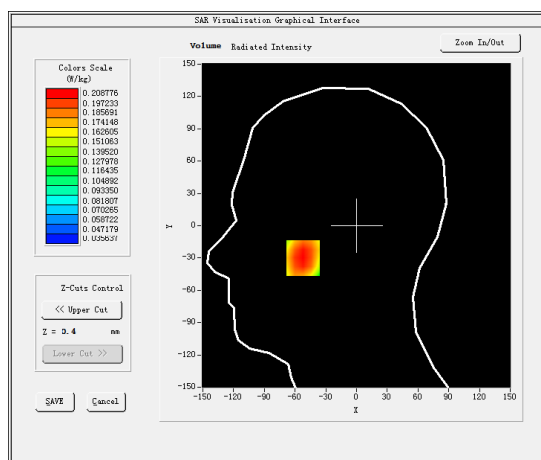

Maximum location: X=-52.00, Y=-30.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.164302
SAR 1g (W/Kg)	0.203995

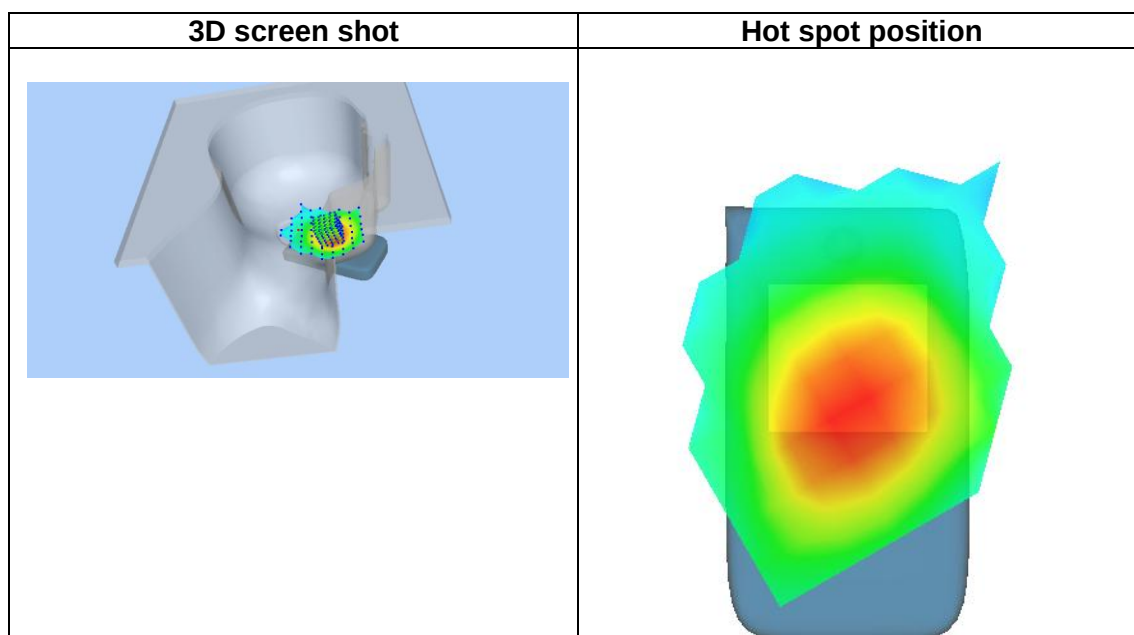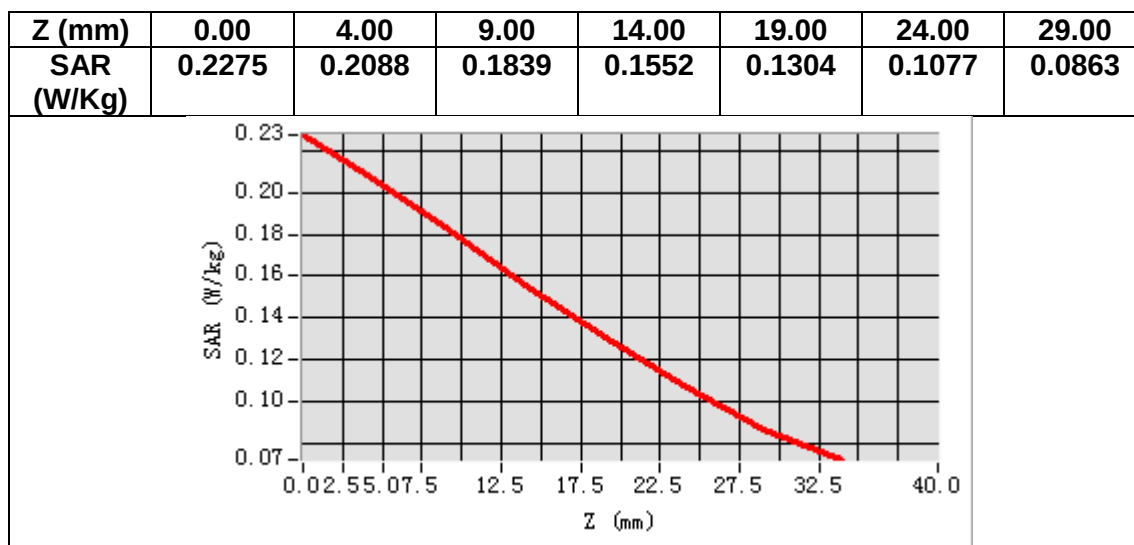

MEASUREMENT 20

Date of measurement: 9/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	41.114532
Relative permittivity (imaginary part)	21.862097
Conductivity (S/m)	0.859302
Variation (%)	-0.900000

SURFACE SAR

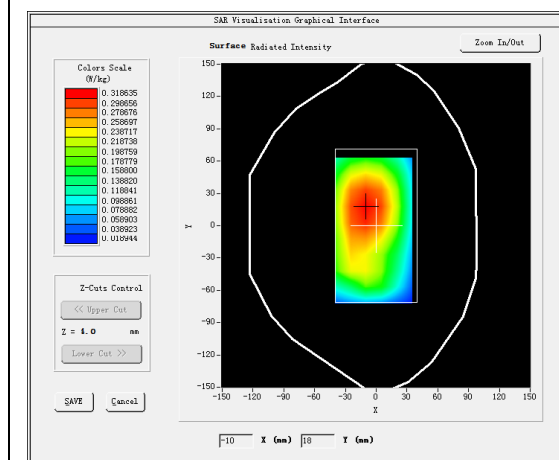



VOLUME SAR

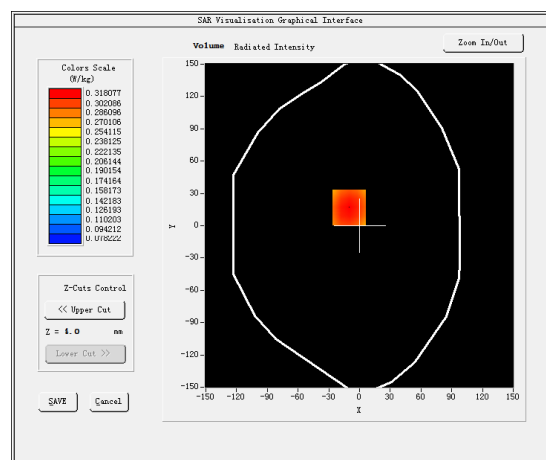

Maximum location: X=-10.00, Y=17.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.249395
SAR 1g (W/Kg)	0.310916

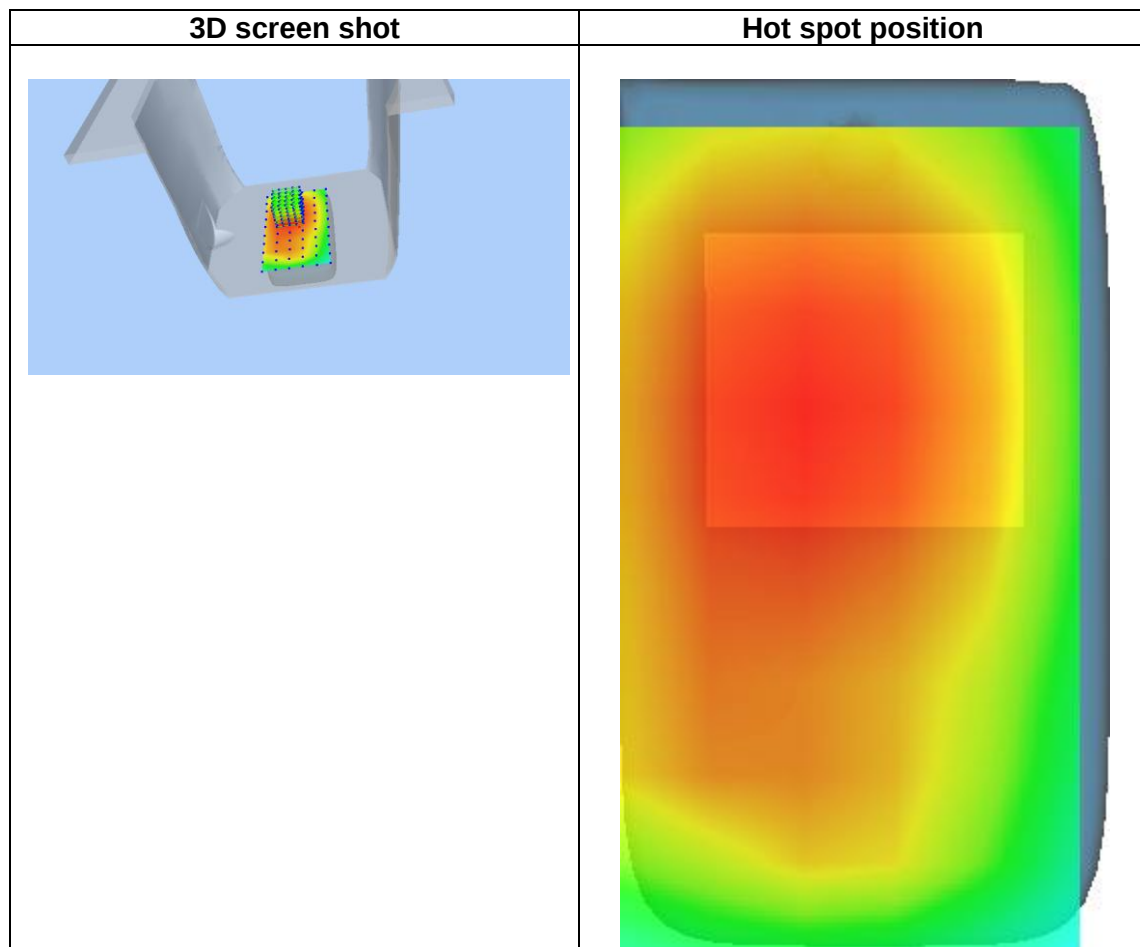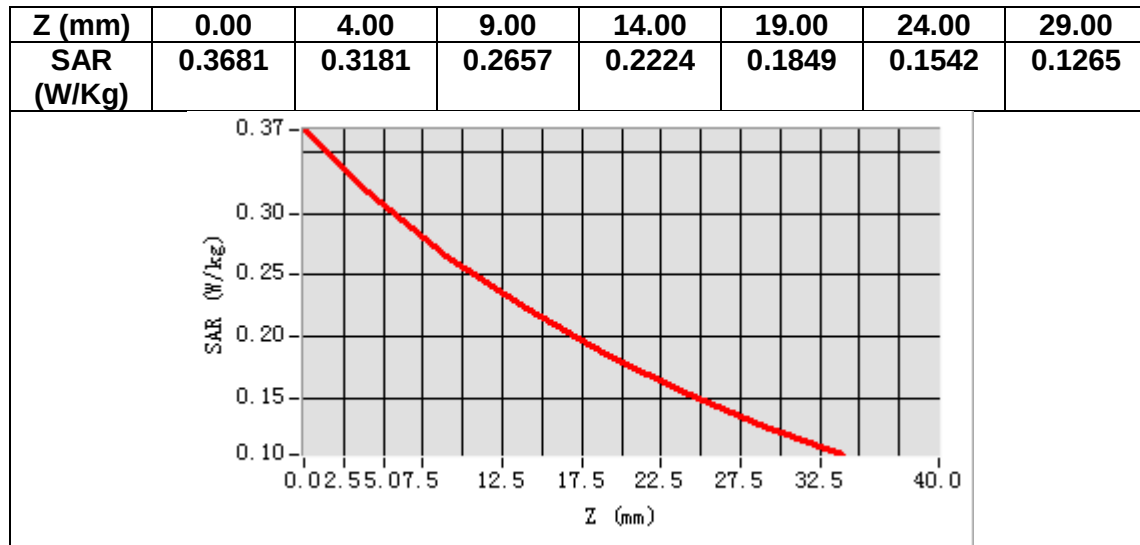

MEASUREMENT 21

Date of measurement: 9/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	41.099182
Relative permittivity (imaginary part)	21.802546
Conductivity (S/m)	0.859989
Variation (%)	4.330000

SURFACE SAR

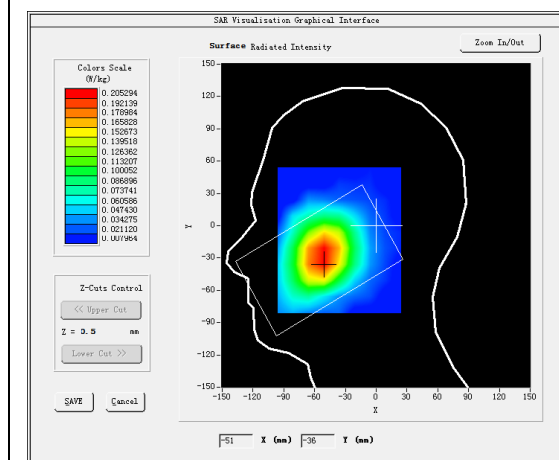



VOLUME SAR

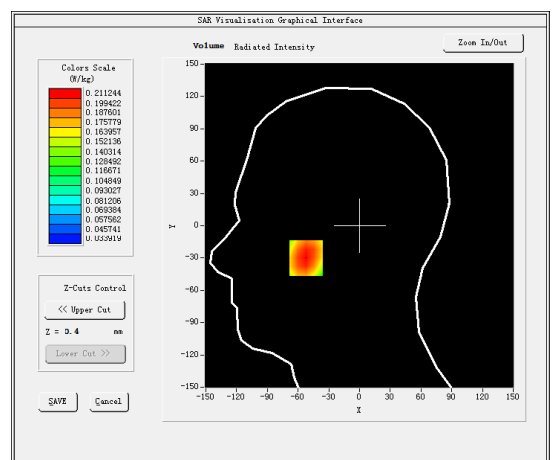

Maximum location: X=-52.00, Y=-30.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.165945
SAR 1g (W/Kg)	0.205467

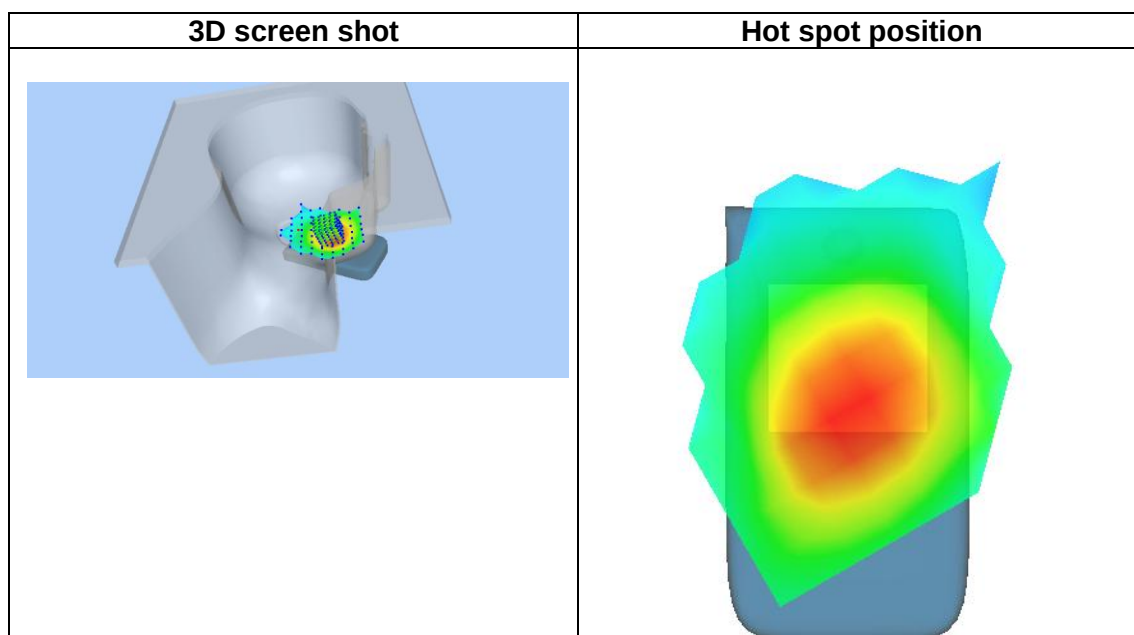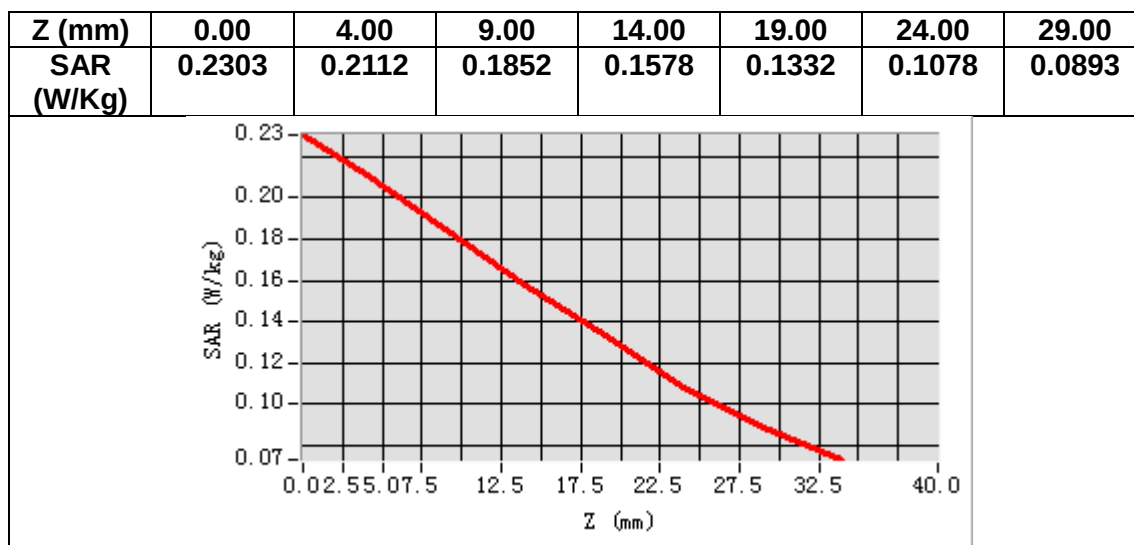

MEASUREMENT 22

Date of measurement: 9/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	41.099182
Relative permittivity (imaginary part)	21.802546
Conductivity (S/m)	0.859989
Variation (%)	-0.520000

SURFACE SAR

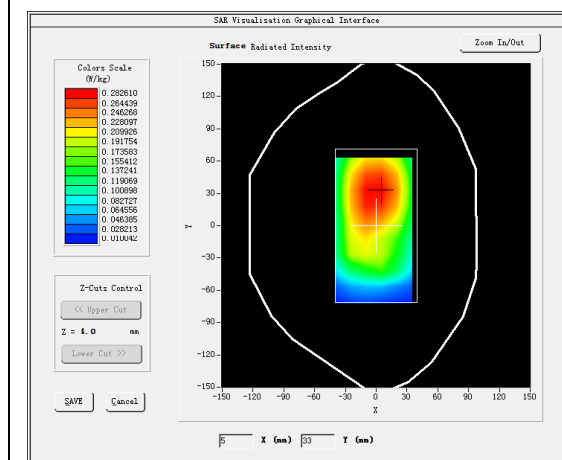



VOLUME SAR

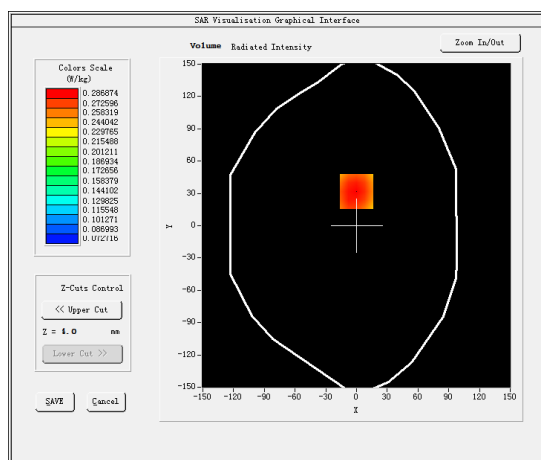

Maximum location: X=0.00, Y=32.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.225237
SAR 1g (W/Kg)	0.280157

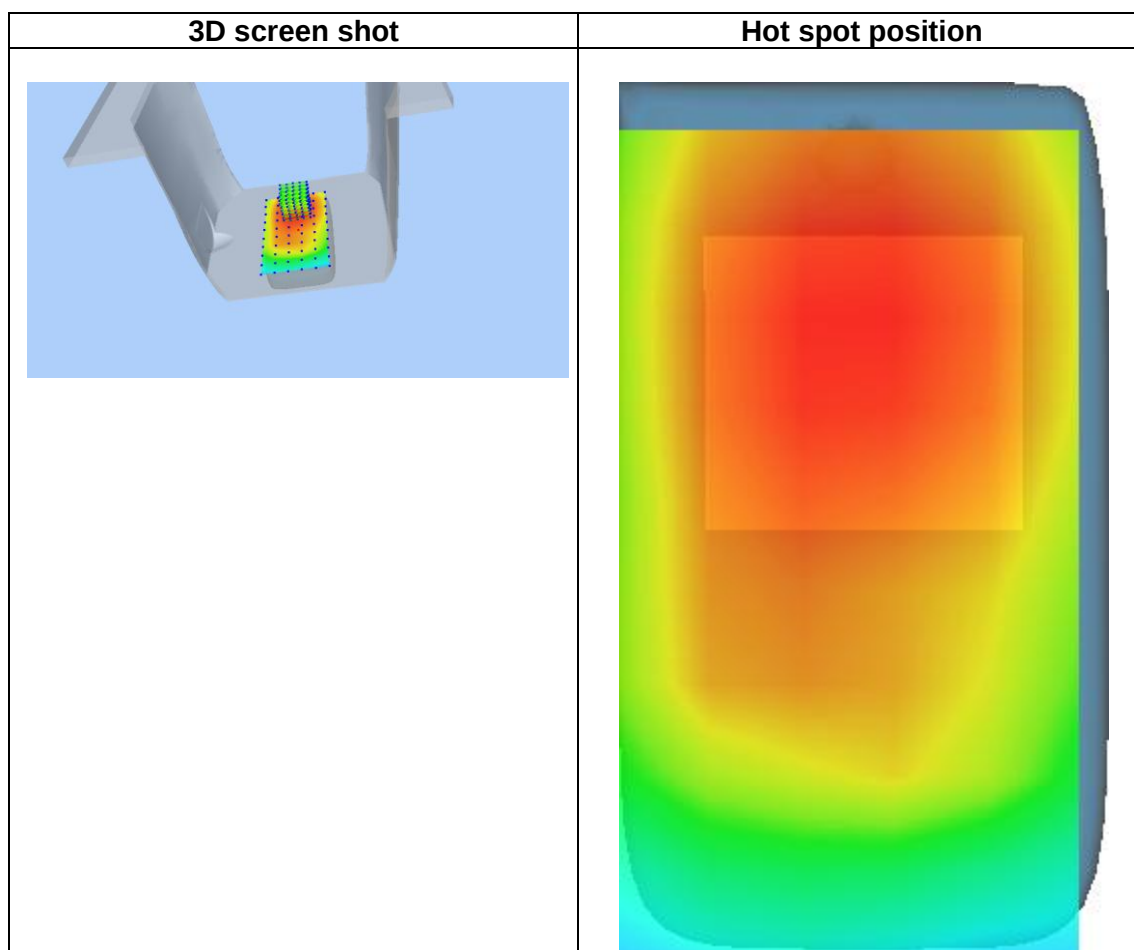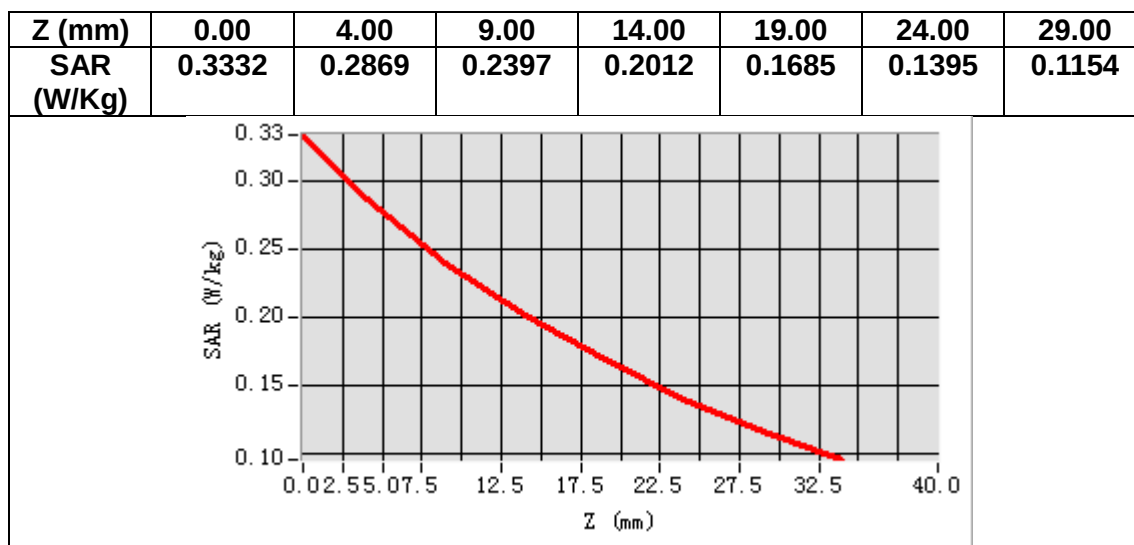

MEASUREMENT 23

Date of measurement: 27/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	39.151764
Relative permittivity (imaginary part)	13.953130
Conductivity (S/m)	2.010026
Variation (%)	3.890000

SURFACE SAR

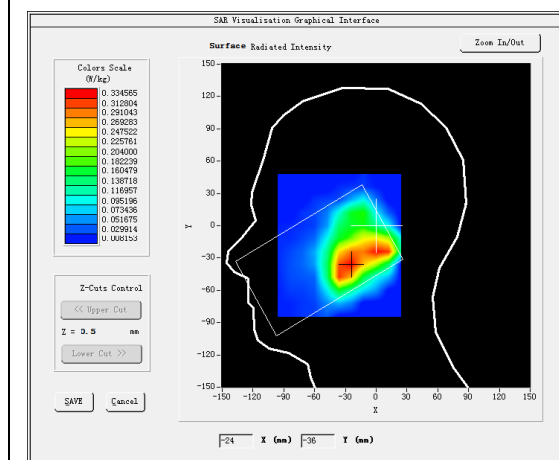



VOLUME SAR

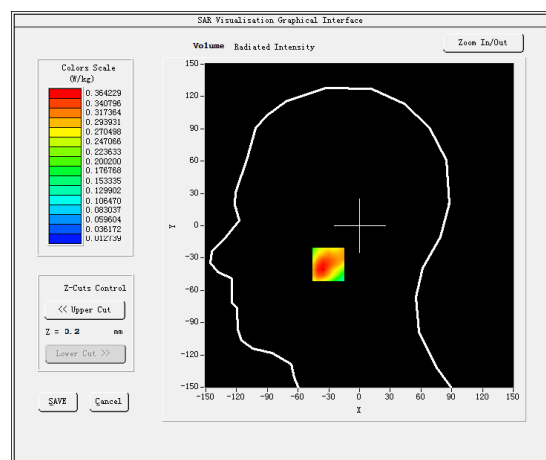

Maximum location: X=-25.00, Y=-36.00

SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.186652
SAR 1g (W/Kg)	0.349316

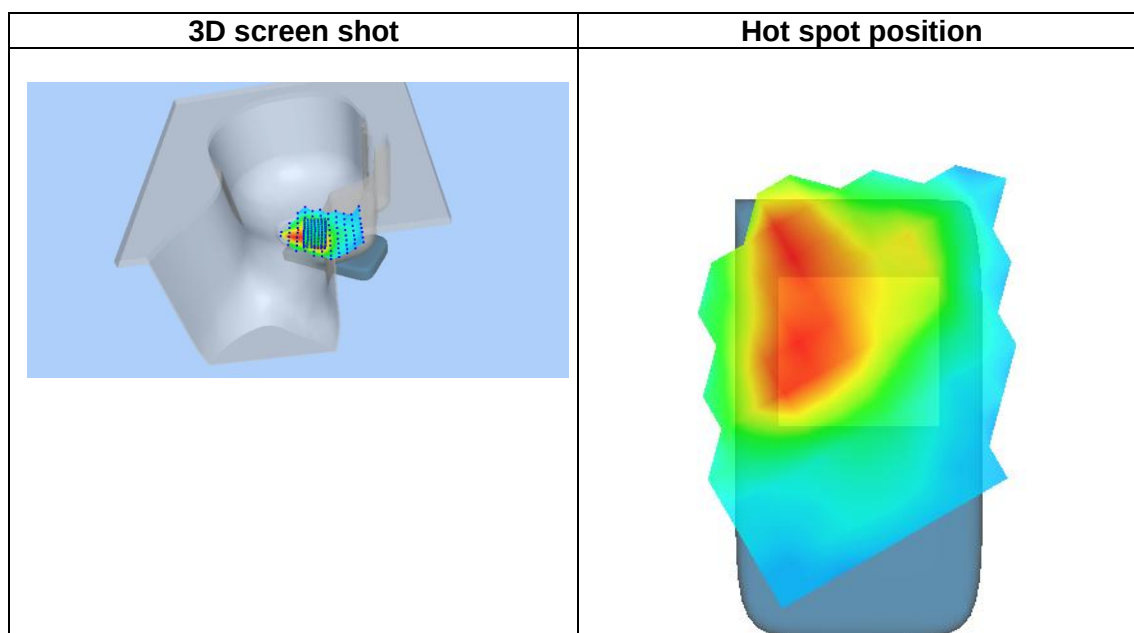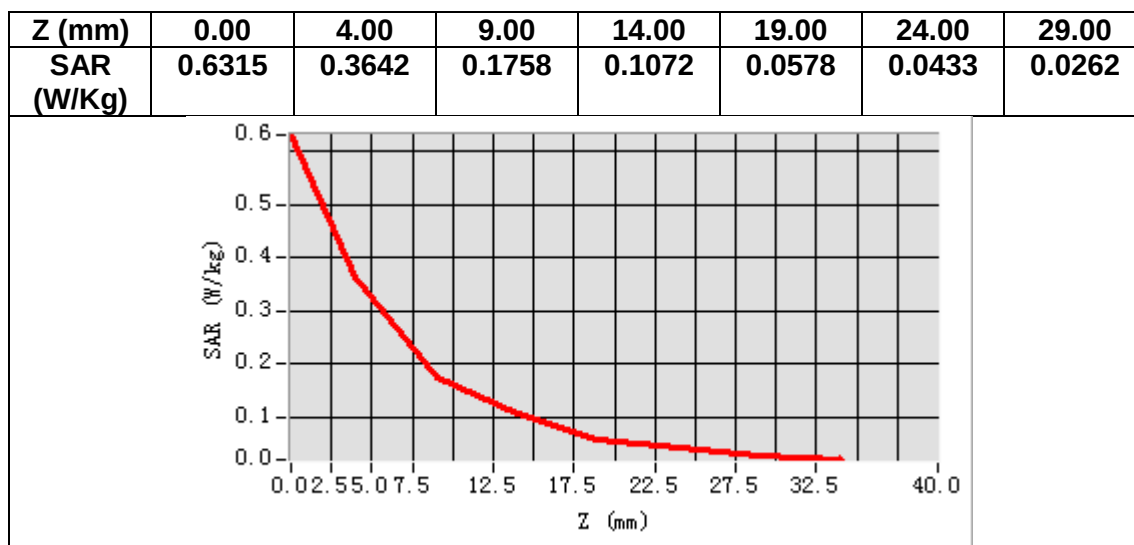

MEASUREMENT 24

Date of measurement: 27/8/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	39.151764
Relative permittivity (imaginary part)	13.953130
Conductivity (S/m)	2.010026
Variation (%)	-0.580000

SURFACE SAR

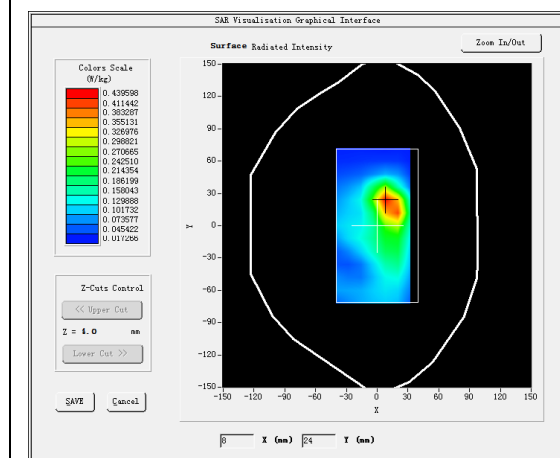



VOLUME SAR

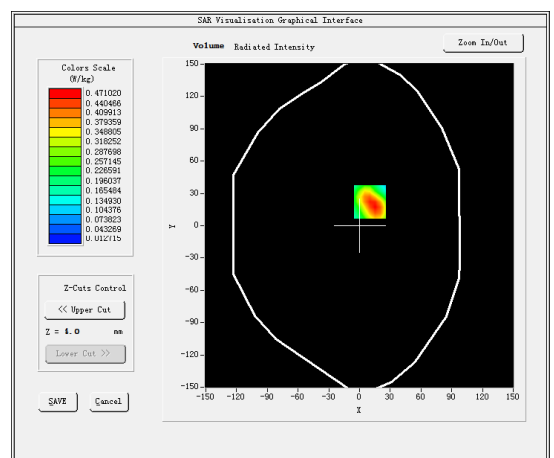

Maximum location: X=10.00, Y=22.00

SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.221389
SAR 1g (W/Kg)	0.446694

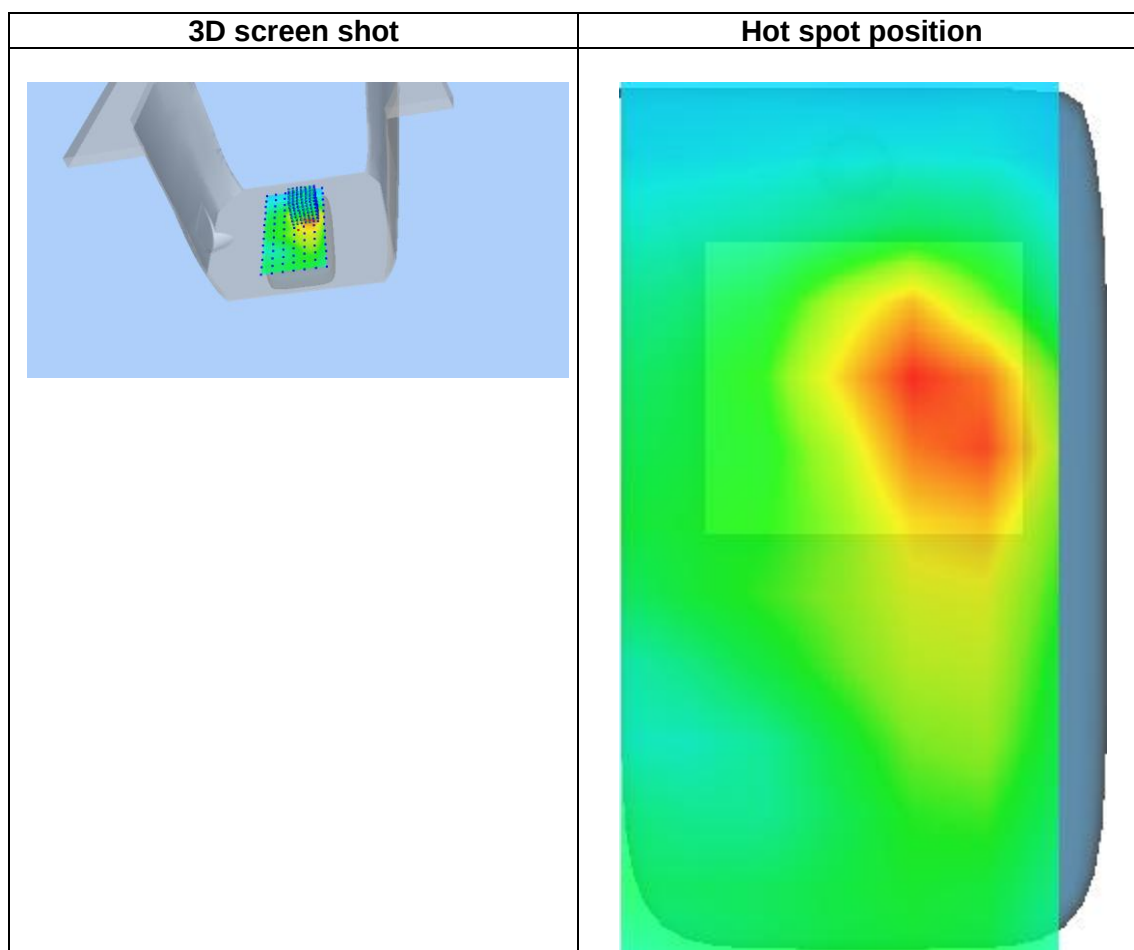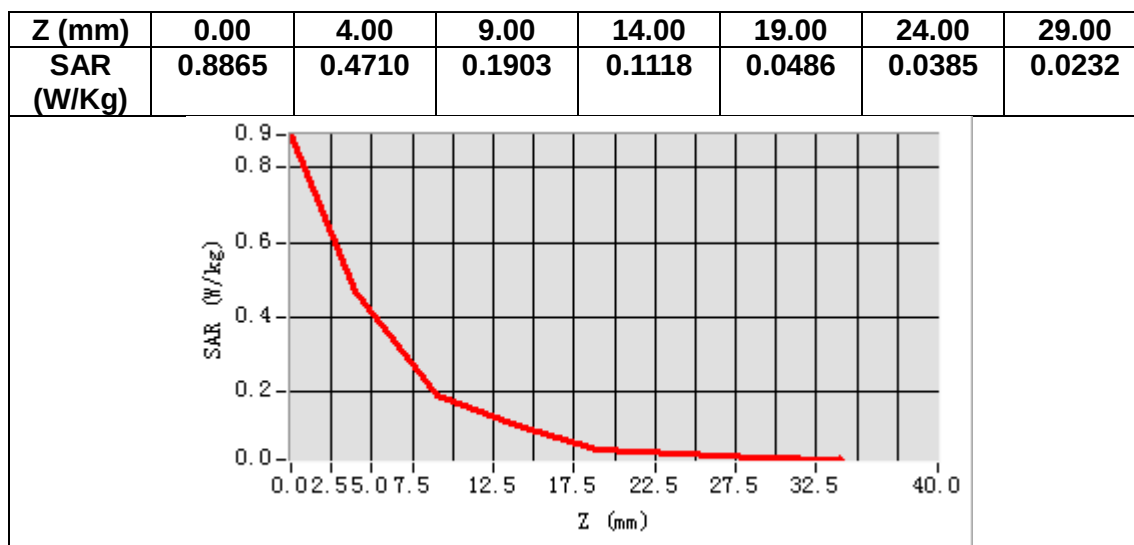

MEASUREMENT 25

Date of measurement: 18/9/2024


A. Experimental conditions.



<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.716206
Relative permittivity (imaginary part)	13.676889
Conductivity (S/m)	1.325898
Variation (%)	-0.910000

SURFACE SAR

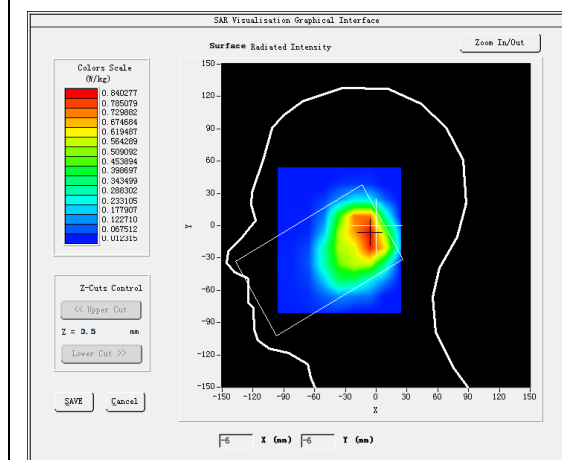

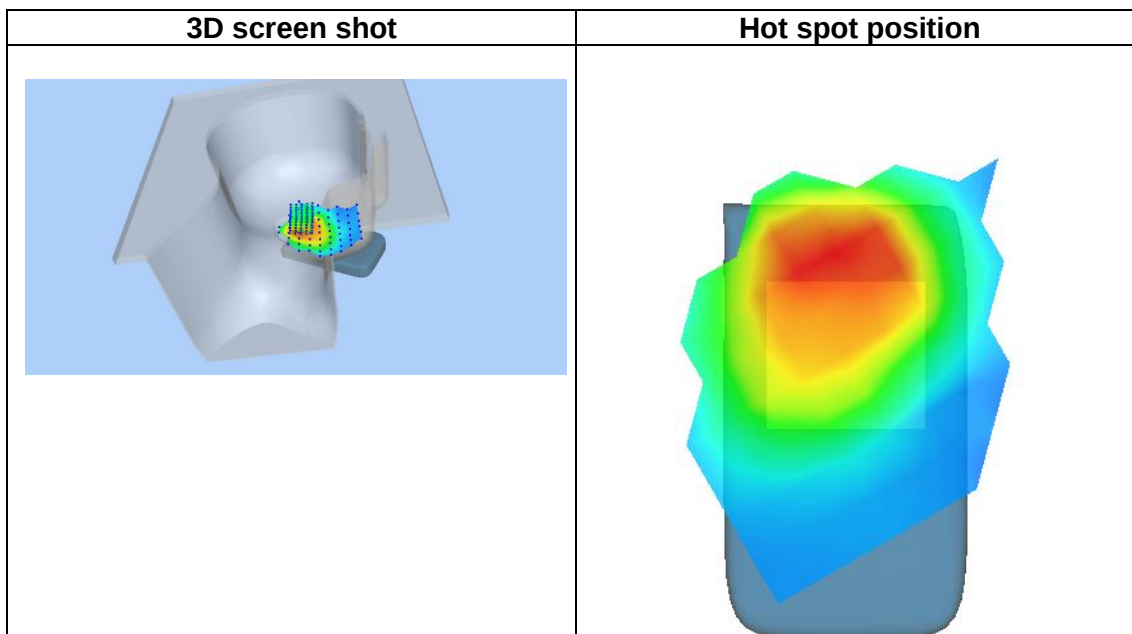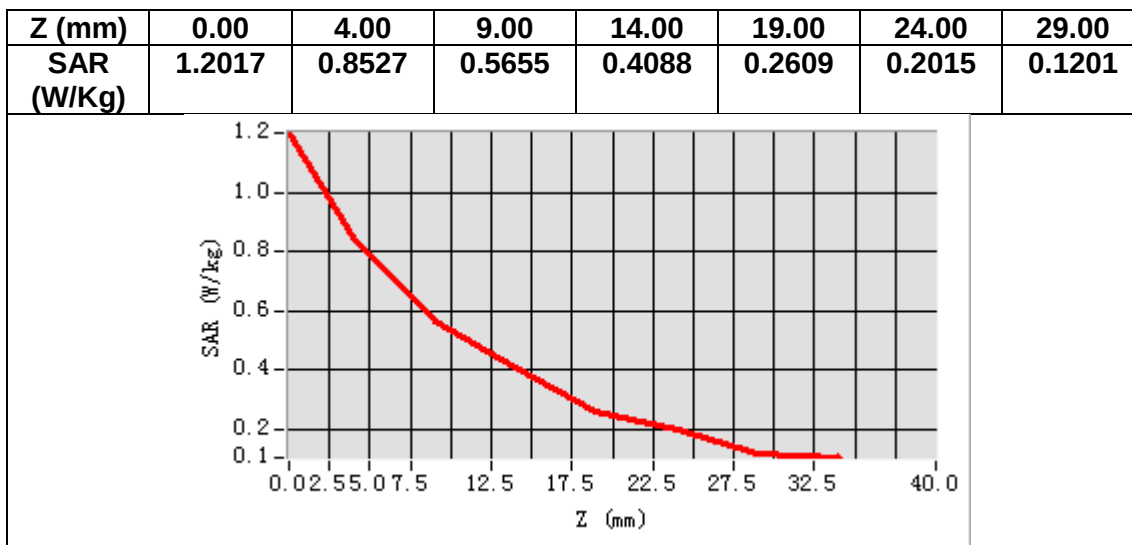

MEASUREMENT 26

Date of measurement: 18/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.716206
Relative permittivity (imaginary part)	13.676889
Conductivity (S/m)	1.325898
Variation (%)	0.990000

SURFACE SAR

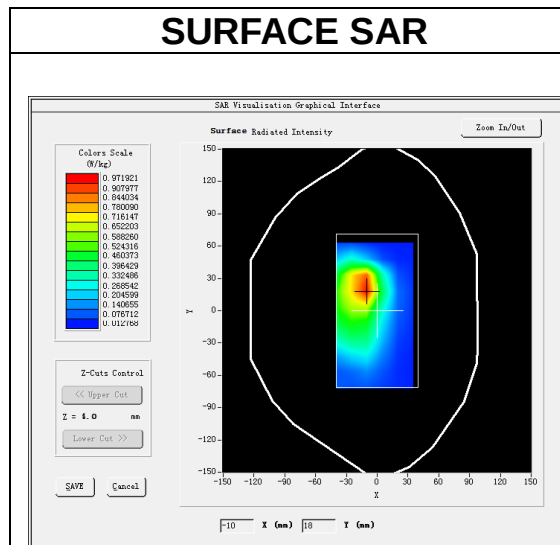



VOLUME SAR

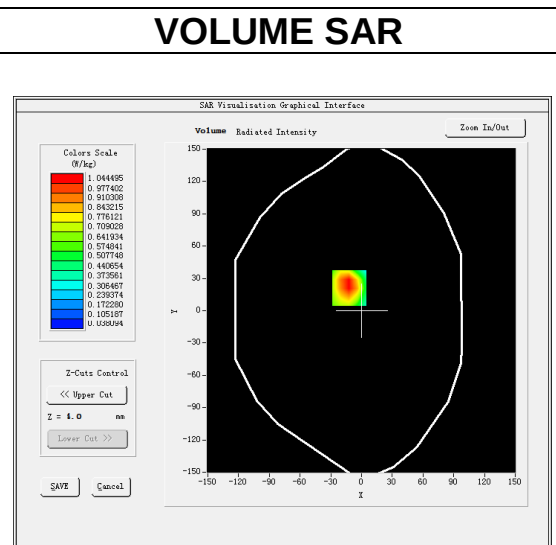

Maximum location: X=-12.00, Y=21.00

SAR Peak: 1.61 W/kg

SAR 10g (W/Kg)	0.586574
SAR 1g (W/Kg)	1.010894

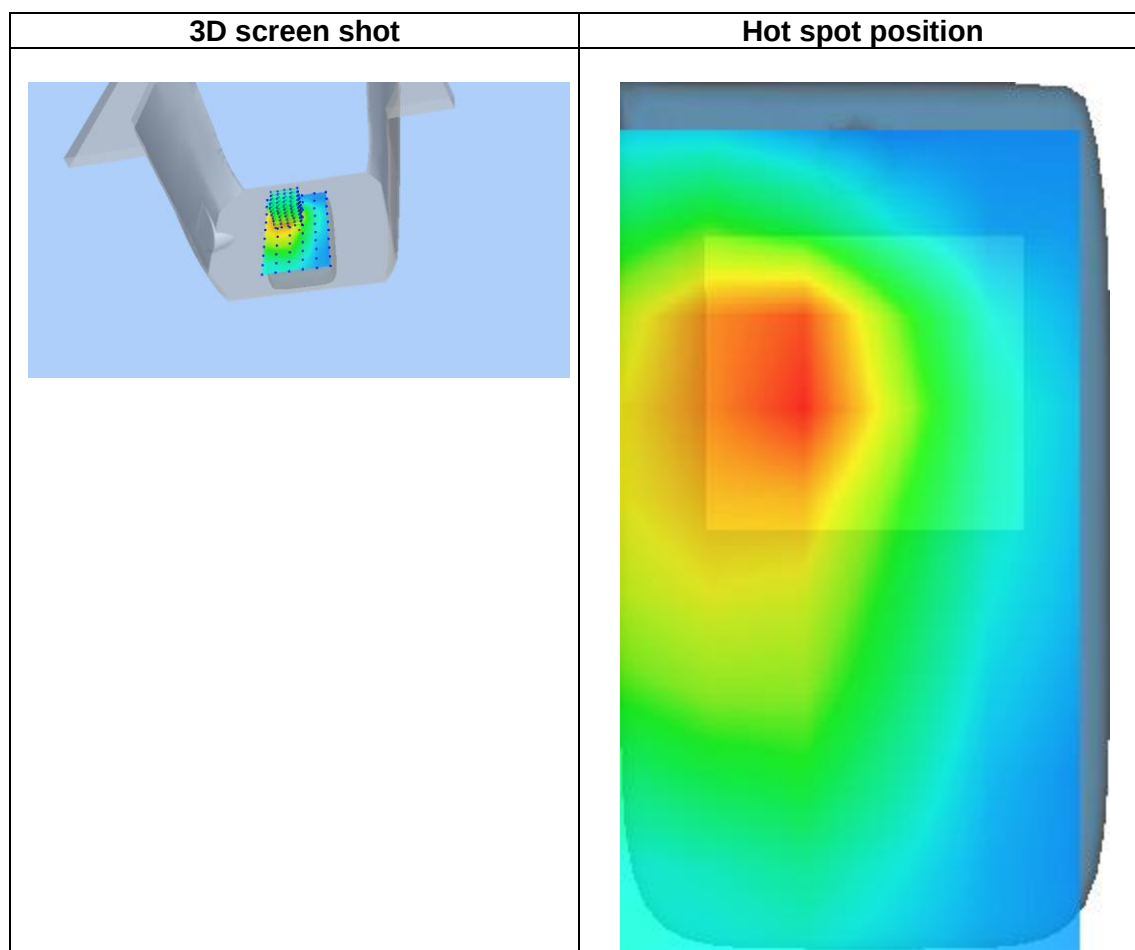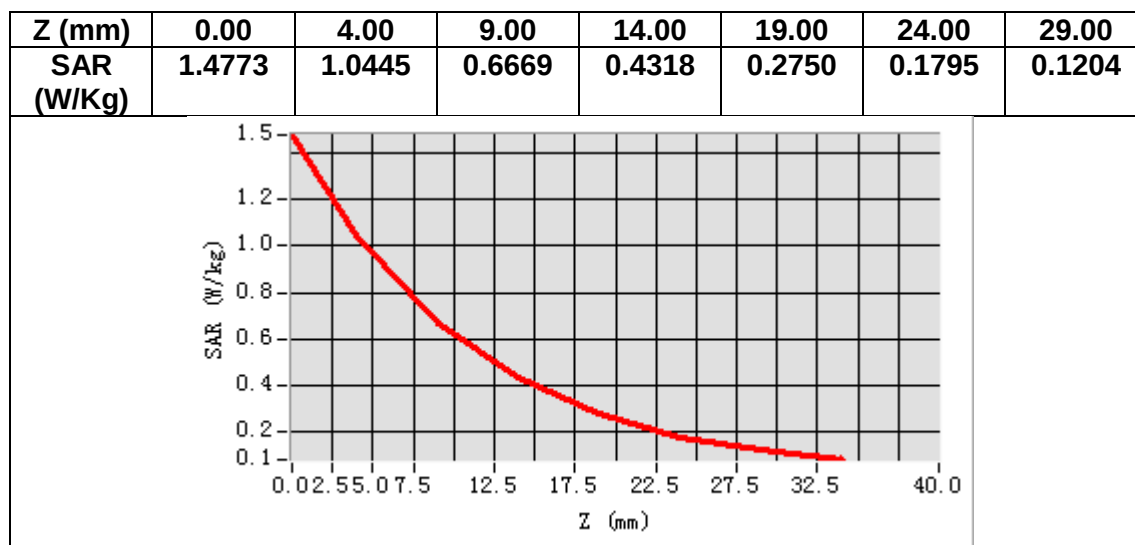

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - 3423-EPGO-426
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356



COMOSAR E-Field Probe Calibration Report

Ref : ACR.261.11.23.BES.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 3423-EPGO-426

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 09/18/2023



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Cyrille ONNEE	Measurement Responsible	9/18/2023	
<i>Checked & approved by:</i>	Jérôme Luc	Technical Manager	9/18/2023	
<i>Authorized by:</i>	Yann Toutain	Laboratory Director	9/19/2023	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2023.09.19
09:08:14 +02'00'

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Name</i>	<i>Date</i>	<i>Modifications</i>
A	Cyrille ONNEE	9/18/2023	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Sensitivity	4
3.2	Linearity	5
3.3	Isotropy	5
3.4	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Results	6
5.1	Calibration in air	6
5.2	Calibration in liquid	7
6	Verification Results	8
7	List of Equipment	9



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	3423-EPGO-426
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.261 MΩ Dipole 2: R2=0.213 MΩ Dipole 3: R3=0.233 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta/2})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14 \text{ mm}$ at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit, 2%).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

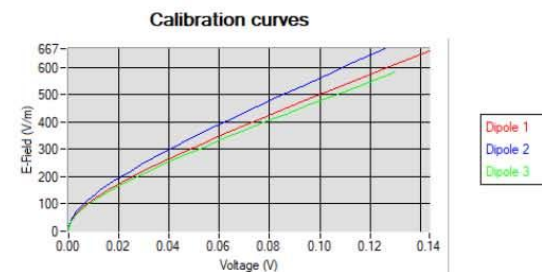

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

V_i =voltage readings on the 3 channels of the probe

DCP_i =diode compression point given below for the 3 channels of the probe

$Norm_i$ =dipole sensitivity given below for the 3 channels of the probe



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.78	0.62	0.85

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
105	108	107

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$\text{Conv}F = \frac{E_{\text{liquid}}^2}{E_{\text{air}}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{\text{liquid}}^2 = \frac{\rho \text{ SAR}}{\sigma}$$

where

σ =the conductivity of the liquid

ρ =the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$\text{SAR} = c \frac{dT}{dt}$$

where

c =the specific heat for the liquid

dT/dt =the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$\text{SAR} = \frac{4P_W}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

a =the larger cross-sectional of the waveguide

b =the smaller cross-sectional of the waveguide

δ =the skin depth for the liquid in the waveguide

P_W =the power delivered to the liquid





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.


Liquid	Frequency (MHz*)	ConvF
HL750	750	2.37
HL850	835	2.32
HL900	900	2.23
HL1800	1800	2.45
HL1900	1900	2.63
HL2000	2000	2.83
HL2300	2300	2.81
HL2450	2450	2.85
HL2600	2600	2.65
HL3300	3300	2.21
HL3500	3500	2.20
HL3700	3700	2.11
HL3900	3900	2.40
HL4200	4200	2.40
HL4600	4600	2.33
HL4900	4900	2.37
HL5200	5200	2.07
HL5400	5400	2.11
HL5600	5600	2.20
HL5800	5800	2.04

(*) Frequency validity is ± 50 MHz below 600 MHz, ± 100 MHz from 600 MHz to 6 GHz and ± 700 MHz above 6 GHz

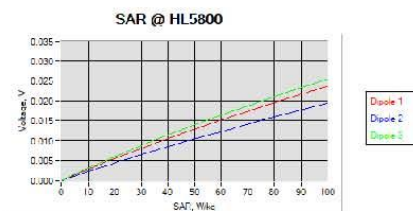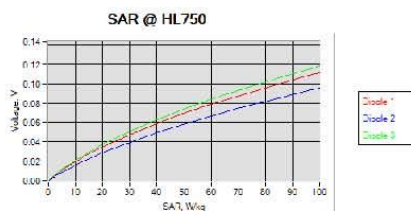


6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is ± 0.2 dB for linearity and ± 0.15 dB for axial isotropy.

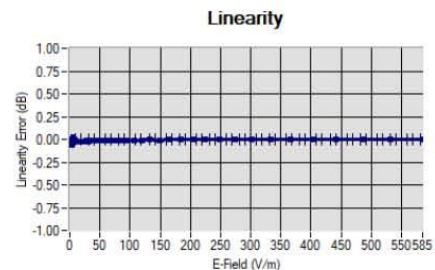

Linearity: $\pm 1.42\%$ (± 0.06 dB)



Isotropy: $\pm 0.21\%$ (± 0.01 dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
CALIPROBE Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer	Agilent 8753ES	MY40003210	10/2019	10/2023
Network Analyzer – Calibration kit	HP 85033D	3423A08186	06/2021	06/2027
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Fluoroptic Thermometer	LumaSense Luxtron 812	94264	09/2022	09/2025
Coaxial cell	MVG	SN 32/16 COAXCELL_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG2_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G600_1	Validated. No cal required.	Validated. No cal required.

Page: 9/10

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.