

FCC TEST REPORT

FOR

Shenzhen Millink SmarTech Co., Ltd.

Smart Doorbell

Test Model: MLK-SDB1

Additional Model No.: MLK-SDB2, MLK-SDB3, MLK-SDB4, MLK-SDB5,
MLK-SDB6

Prepared for : Shenzhen Millink SmarTech Co., Ltd.
Address : Qianhai Complex A201, Qianwan Road 1 Qianhai Shenzhen-Hong
Kong Cooperation Zone, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Sep 13, 2017
Number of tested samples : 1
Sample number : 170907033A
Date of Test : Sep 13, 2017- Jan 24, 2018
Date of Report : Jan 24, 2018

FCC TEST REPORT

FCC CFR 47 PART 15 C(15.249)

Report Reference No. : **LCS170907033AEA**

Date of Issue..... : Jan 24, 2018

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐

Applicant's Name : **Shenzhen Millink SmarTech Co., Ltd.**

Address..... : Qianhai Complex A201, Qianwan Road 1 Qianhai
Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013

Test Report Form No...... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Smart Doorbell**


Trade Mark..... : N/A

Test Model..... : MLK-SDB1

Ratings..... : AC 100-240V, 50/60Hz

Result : **Positive**

Compiled by:




Calvin Weng/ Administrators

Supervised by:



Dick Su / Technique principal

Approved by:



Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS170907033AEA

Jan 24, 2018

Date of issue

Test Model..... : MLK-SDB1

EUT..... : Smart Doorbell

Applicant..... : Shenzhen Millink SmarTech Co., Ltd.Address..... : Qianhai Complex A201,Qianwan Road 1 Qianhai
Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen Millink SmarTech Co., Ltd.Address..... : Qianhai Complex A201,Qianwan Road 1 Qianhai
Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen Millink SmarTech Co., Ltd.Address..... : Qianhai Complex A201,Qianwan Road 1 Qianhai
Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	Jan 24, 2018	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. Description of Device (EUT)	6
1.2. Support Equipment List.....	6
1.3. External I/O	6
1.4. Description of Test Facility.....	6
1.5. List of Measuring Equipment.....	7
1.6. Statement of the measurement uncertainty	8
1.7. Measurement Uncertainty	8
1.8. Description Of Test Modes.....	9
2. TEST METHODOLOGY	10
2.1. EUT Configuration	10
2.2. EUT Exercise.....	10
2.3. General Test Procedures	10
3. CONNECTION DIAGRAM OF TEST SYSTEM.....	11
3.1. Justification.....	11
3.2. EUT Exercise Software	11
3.3. Special Accessories	11
3.4. Block Diagram/Schematics.....	11
3.5. Equipment Modifications	11
3.6. Test Setup	11
4. SUMMARY OF TEST RESULTS	12
5. POWER LINE CONDUCTED EMISSIONS.....	13
5.1 Standard Applicable	13
5.2 Block Diagram of Test Setup	13
5.3 Test Results.....	13
6. RADIATED EMISSION MEASUREMENT	15
6.1. Standard Applicable	15
6.2. Instruments Setting	15
6.3. Test Procedure	16
6.4. Block Diagram of Test Setup	20
6.5. Test Results.....	21
6.6. Results for Radiated Emissions (Above 1GHz)	23
6.7. Results for Band edge Testing.....	24
7. 20 DB BANDWIDTH MEASUREMENT.....	26
7.1. Standard Applicable	26
7.2. Block Diagram of Test Setup	26
7.3. Test Procedure	26
7.4. Test Results.....	27
8. ANTENNA REQUIREMENTS	28
8.1 Standard Applicable	28
8.2 Antenna Connected Construction	28
9. TEST SETUP PHOTOGRAPHS	29
10. EXTERIOR HOTOGRAPHS.....	29
11. INTERIOR PHOTOGRAPHS	29

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	Smart Doorbell
Test Model	MLK-SDB1
List Model No.	MLK-SDB2, MLK-SDB3, MLK-SDB4, MLK-SDB5, MLK-SDB6
Model Declaration	All the models are identical with each other, except the colour is different, therefore, full test was applied on MLK-SDB1, other models are deemed to fulfill the requirement without further test.
Hardware Version	/
Software Version	/
Power Supply	AC 100-240V, 50/60Hz
2.4G	
Frequency Range	2425MHz
Channel Number	1 channel
Modulation Type	GFSK
Antenna Description	PCB Antenna, 0dBi (Max.)
Wi-Fi	
Frequency Range	2412MHz-2462MHz
Channel Spacing	5MHz
Channel Number	11 channels for 802.11b/g/n20
Modulation Type	802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	PCB Antenna, 0dBi (Max.)

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
---	---	---	---	---

1.3. External I/O

I/O Port Description	Quantity	Cable
----	---	---

1.4. Description of Test Facility

FCC Registration Number. is 254912.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. List of Measuring Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R&S	NRVS	100444	2017-06-17	2018-06-16
2	Power Sensor	R&S	NRV-Z81	100458	2017-06-17	2018-06-16
3	Power Sensor	R&S	NRV-Z32	10057	2017-06-17	2018-06-16
4	ESA-E SERIES SPECTRUM ANALYZER	Agilent	E4407B	MY41440754	2017-11-17	2018-11-16
5	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2017-06-17	2018-06-16
6	SPECTRUM ANALYZER	R&S	FSP	100503	2017-06-17	2018-06-16
7	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2017-06-17	2018-06-16
8	Positioning Controller	MF	MF-7082	/	2017-06-17	2018-06-16
9	EMI Test Software	AUDIX	E3	N/A	2017-06-17	2018-06-16
10	EMI Test Receiver	R&S	ESR 7	101181	2017-06-17	2018-06-16
11	AMPLIFIER	QuieTek	QTK-A2525G	CHM10809065	2017-11-17	2018-11-16
12	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2017-06-23	2018-06-22
13	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2017-05-02	2018-05-01
14	Horn Antenna	EMCO	3115	6741	2017-06-23	2018-06-22
15	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2017-09-21	2018-09-20
16	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-025	2017-09-21	2018-09-20
17	RF Cable-R03m	Jye Bao	RG142	CB021	2017-06-17	2018-06-16
18	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2017-06-17	2018-06-16
19	TEST RECEIVER	R&S	ESCI	101142	2017-06-17	2018-06-16
20	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	2017-06-17	2018-06-16
21	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-0032	2017-06-17	2018-06-16
22	Artificial Mains	R&S	ENV216	101288	2017-06-17	2018-06-16
23	RF Control Unit	Tonscend	JS0806-2	178060073	2017-10-28	2018-10-27
24	BT/WIFI Test Software	Tonscend	JS1120-3	/	N/A	N/A

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

1.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	3.10dB	(1)
		30MHz~200MHz	2.96dB	(1)
		200MHz~1000MHz	3.10dB	(1)
		1GHz~26.5GHz	4.00dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	1.63dB	(1)
Power disturbance	:	30MHz~300MHz	1.60dB	(1)

- (1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.8. Description of Test Modes

The EUT operates in the unlicensed ISM band at 2.4GHz. The following operating modes were applied for the related test items.

All test modes were tested, only the result of the worst case was recorded in the report. It was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane.

Mode of Operations	Transmitting Frequency (MHz)
GFSK	2425
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

***Note: Using a temporary antenna connector for the EUT when the conducted measurements(Band Edges Measurement and 20 dB Bandwidth) are performed.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. CONNECTION DIAGRAM OF TEST SYSTEM

3.1. Justification

The system was configured for testing in a continuous transmitting condition.

3.2. EUT Exercise Software

The EUT was controlled by build-in software to enter RF test mode, just by powered on the transmitter and receiver together, then the EUT will keep transmitting continuously.

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249	Band Edges Measurement	Compliant
§15.249, §15.215	20 dB Bandwidth	Compliant


5. POWER LINE CONDUCTED EMISSIONS

5.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limit at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


5.2 Block Diagram of Test Setup

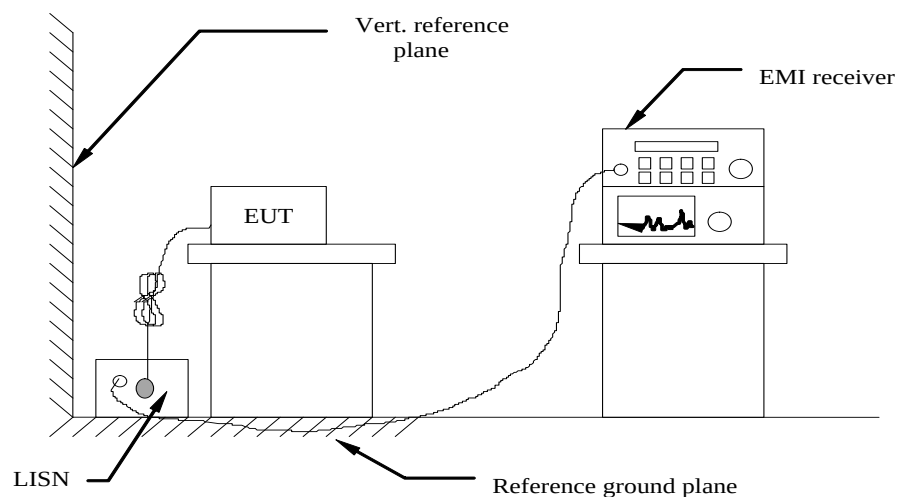

5.3 Test Results

Pass.

Line:

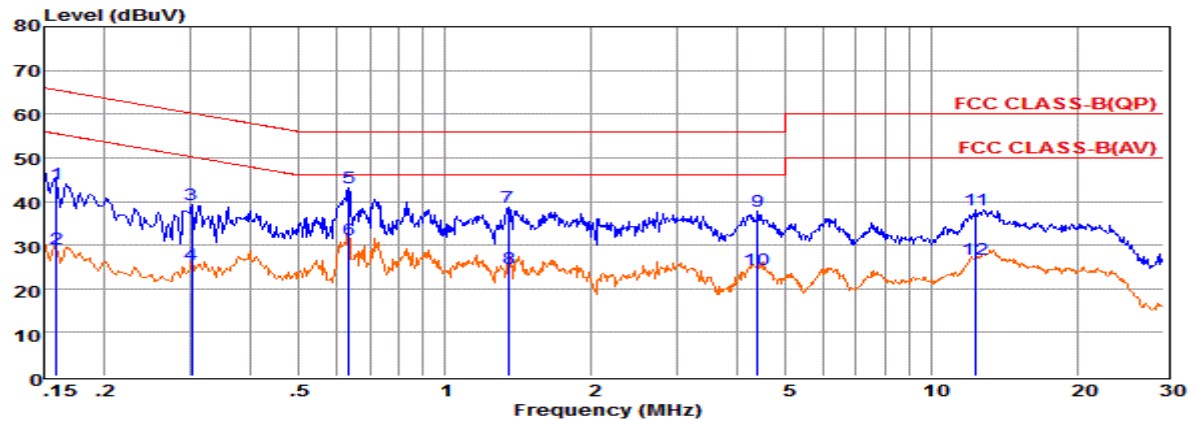


	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.16	24.52	9.58	0.02	44.12	65.52	-21.40	QP
2	0.16	9.49	9.58	0.02	29.09	65.51	-36.42	Average
3	0.30	19.49	9.63	0.03	39.15	60.19	-21.04	QP
4	0.30	5.80	9.63	0.03	25.46	60.19	-34.73	Average
5	0.63	23.52	9.63	0.04	43.19	56.00	-12.81	QP
6	0.63	11.61	9.63	0.04	31.28	56.00	-24.72	Average
7	1.35	19.06	9.63	0.05	38.74	56.00	-17.26	QP
8	1.35	5.00	9.63	0.05	24.68	56.00	-31.32	Average
9	4.38	18.03	9.65	0.06	37.74	56.00	-18.26	QP
10	4.38	4.75	9.65	0.06	24.46	56.00	-31.54	Average
11	12.32	18.19	9.70	0.09	37.98	60.00	-22.02	QP
12	12.32	7.06	9.70	0.09	26.85	60.00	-33.15	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.

2. The emission levels that are 20dB below the official limit are not reported.

Neutral:

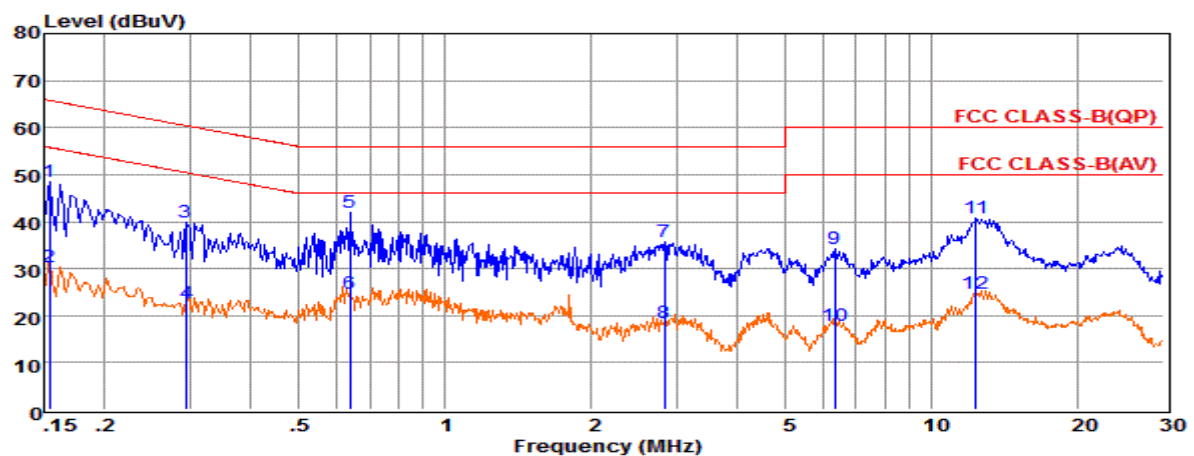

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.15	28.65	9.69	0.02	48.36	65.78	-17.42	QP
2	0.15	10.51	9.69	0.02	30.22	65.77	-35.55	Average
3	0.29	20.19	9.60	0.03	39.82	60.41	-20.59	QP
4	0.29	3.04	9.60	0.03	22.67	60.41	-37.74	Average
5	0.64	22.18	9.63	0.04	41.85	56.00	-14.15	QP
6	0.64	5.00	9.63	0.04	24.67	56.00	-31.33	Average
7	2.82	15.96	9.64	0.06	35.66	56.00	-20.34	QP
8	2.82	-1.20	9.64	0.06	18.50	56.00	-37.50	Average
9	6.32	14.42	9.68	0.07	34.17	60.00	-25.83	QP
10	6.32	-1.79	9.68	0.07	17.96	60.00	-42.04	Average
11	12.32	20.92	9.73	0.09	40.74	60.00	-19.26	QP
12	12.32	4.94	9.73	0.09	24.76	60.00	-35.24	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.

2. The emission levels that are 20dB below the official limit are not reported.

6. RADIATED EMISSION MEASUREMENT

6.1. Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) and 15.249 limit in the table below has to be followed.

Fundamental Frequency	Field Strength of fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

6.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak

6.3. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
 - The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


6.4. Block Diagram of Test Setup

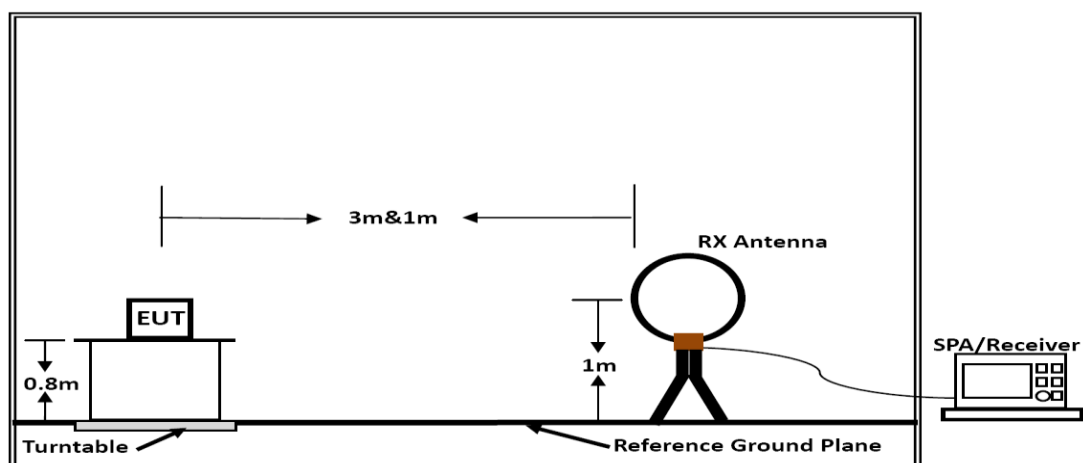

Below 30MHz

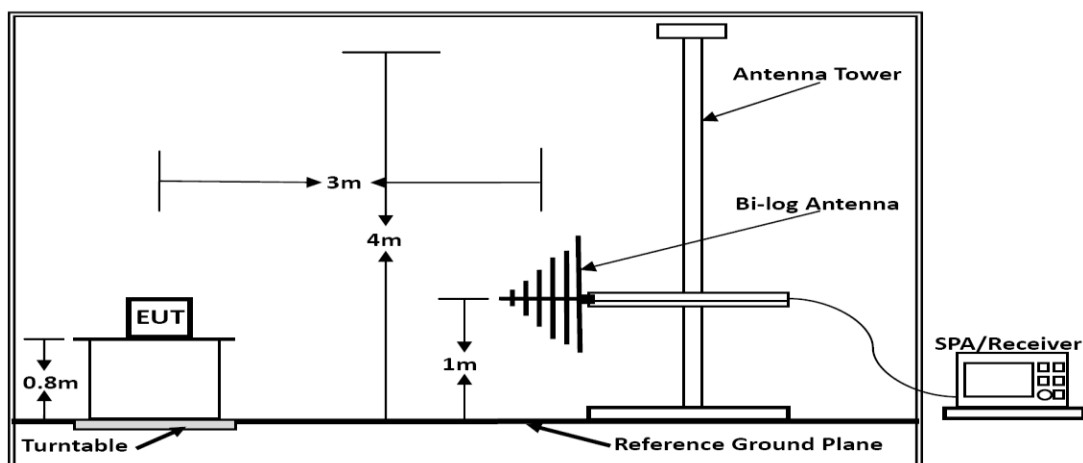

Below 1GHz

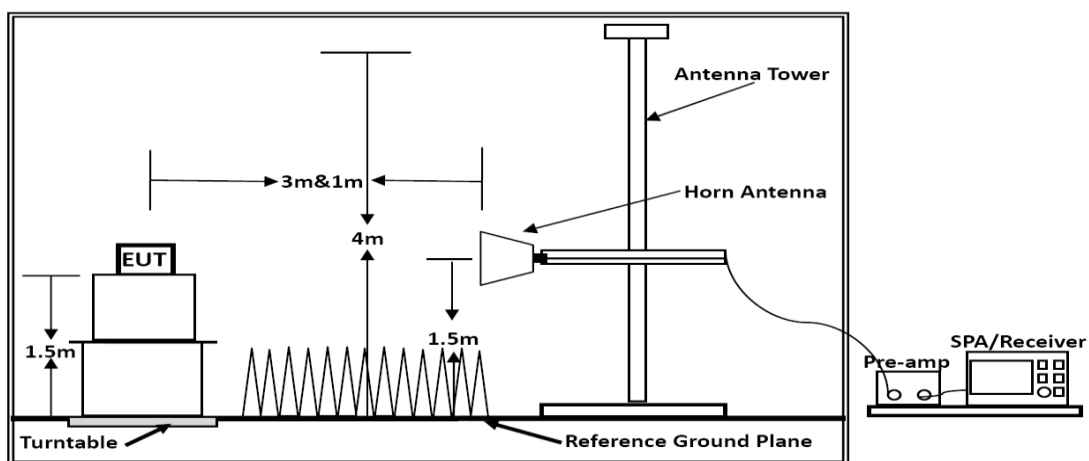

Above 1GHz

6.5. Test Results

Results of Radiated Emissions (9 kHz~30MHz)

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note


Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

Results of Radiated Emissions (30MHz~1000MHz)

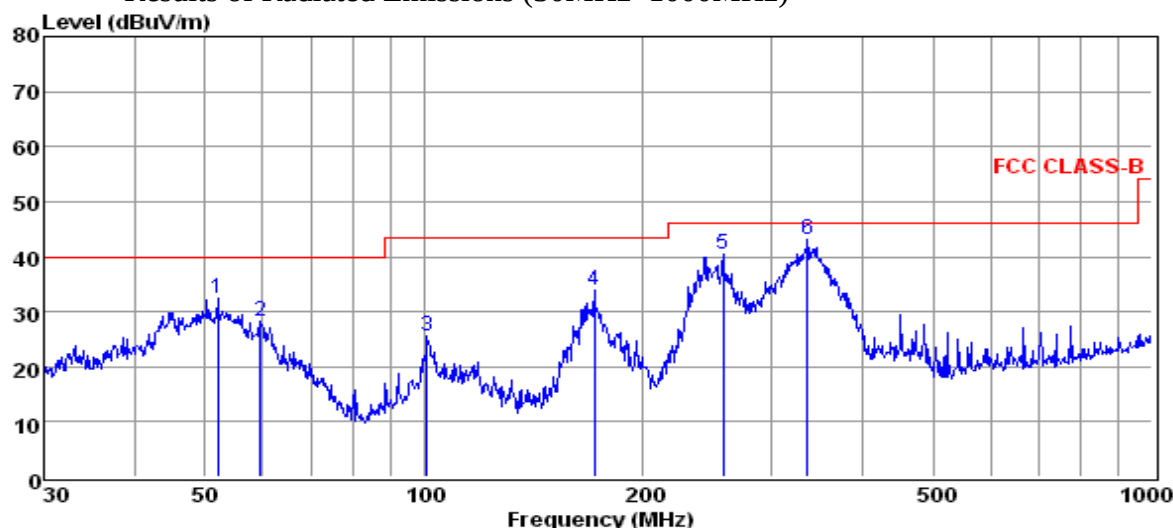


pol:

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	52.03	18.68	0.54	13.16	32.38	40.00	-7.62	QP
2	59.44	15.10	0.49	12.73	28.32	40.00	-11.68	QP
3	100.93	11.78	0.60	13.08	25.46	43.50	-18.04	QP
4	171.39	23.95	0.91	9.07	33.93	43.50	-9.57	QP
5	257.42	27.26	1.01	12.06	40.33	46.00	-5.67	QP
6	336.04	27.94	1.09	13.96	42.99	46.00	-3.01	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

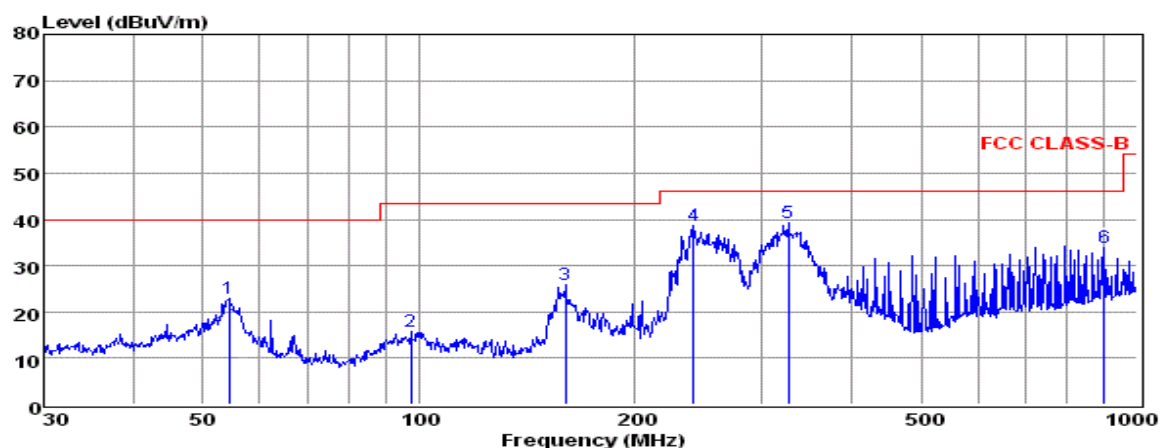

pol:

	HORIZONTAL							
	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	54.44	9.53	0.46	13.04	23.03	40.00	-15.97	QP
2	97.46	2.03	0.61	13.00	15.64	43.50	-27.86	QP
3	159.78	16.36	0.75	8.66	25.77	43.50	-17.73	QP
4	240.83	25.60	1.01	12.09	38.70	46.00	-7.30	QP
5	326.74	24.61	1.04	13.60	39.25	46.00	-6.75	QP
6	900.15	12.01	1.88	21.09	34.98	46.00	-10.42	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20dB below the official limit are not reported

***Note: Pre-scan all modes and recorded the worst case results in this report (TX-2425MHz).

6.6. Results for Radiated Emissions (Above 1GHz)

Field Strength Of Fundamental (TX-2425MHz)						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2425	H	84.37	75.58	114	94	Pass
2425	V	93.15	84.45	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4850.00	47.41	33.16	35.15	3.96	49.38	74.00	-24.62	Peak	Horizontal
4850.00	32.23	33.16	35.15	3.96	34.20	54.00	-19.80	Average	Horizontal
4850.00	49.38	33.16	35.15	3.96	51.35	74.00	-22.65	Peak	Vertical
4850.00	33.98	33.16	35.15	3.96	35.95	54.00	-18.05	Average	Vertical
9700.00	45.57	33.21	35.82	9.52	52.48	74.00	-21.52	Peak	Horizontal
9700.00	34.90	33.21	35.82	9.52	41.81	54.00	-12.19	Average	Horizontal
9700.00	46.55	32.82	35.82	9.52	53.07	74.00	-20.93	Peak	Vertical
9700.00	35.16	32.82	35.82	9.52	41.68	54.00	-12.32	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. No emission was be recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



6.7. Results for Band edge Testing

GFSK (Radiated-converted)							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-58.22	2.0	0.0	38.98	Peak	74.00	PASS
2310.000	-72.73	2.0	0.0	24.47	AV	54.00	PASS
2390.000	-46.09	2.0	0.0	51.11	Peak	74.00	PASS
2390.000	-72.32	2.0	0.0	24.88	AV	54.00	PASS
2483.500	-49.39	2.0	0.0	47.81	Peak	74.00	PASS
2483.500	-72.75	2.0	0.0	24.45	AV	54.00	PASS
2500.000	-51.63	2.0	0.0	45.57	Peak	74.00	PASS
2500.000	-72.72	2.0	0.0	24.48	AV	54.00	PASS


NOTE: Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

Please refer to following test plots;


Test plot of Band Edge (Conducted)

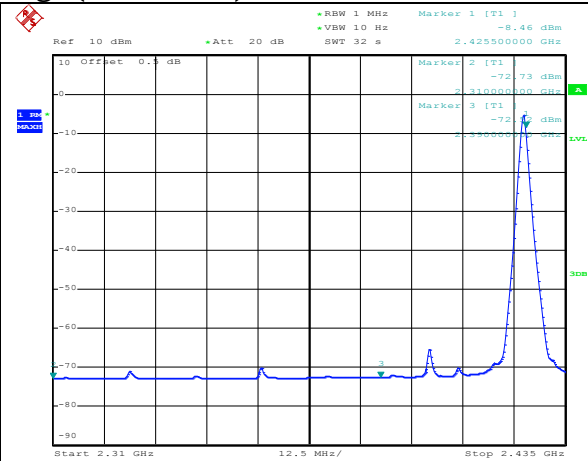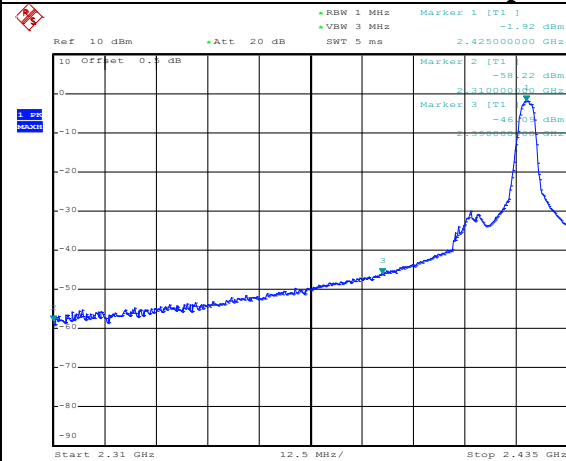

2425MHz – Peak - left

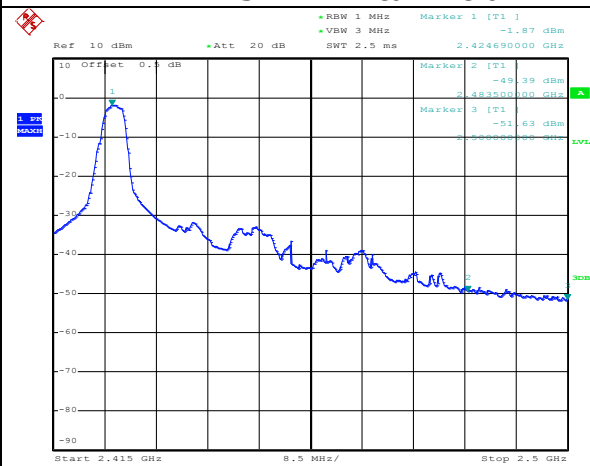

Low Channel / 2425MHz – Average- left

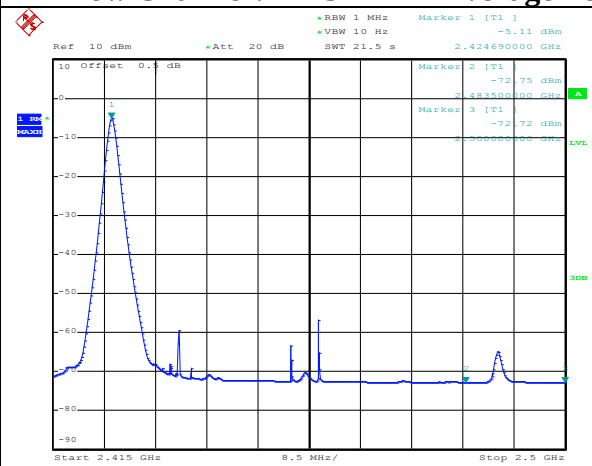

High Channel / 2475MHz - Peak- right


High Channel / 2475MHz – Average- right

7. 20 DB BANDWIDTH MEASUREMENT

7.1. Standard Applicable

According to §15.215

7.2. Block Diagram of Test Setup

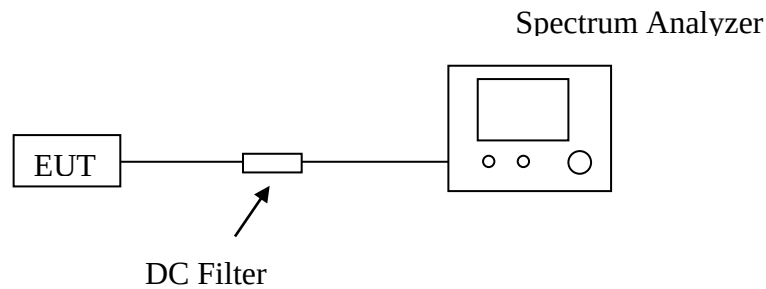

7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 3MHz

RBW = 30KHz

VBW = 100KHz

Sweep = auto


Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

7.4. Test Results

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
2425	2.02	Non-Specified

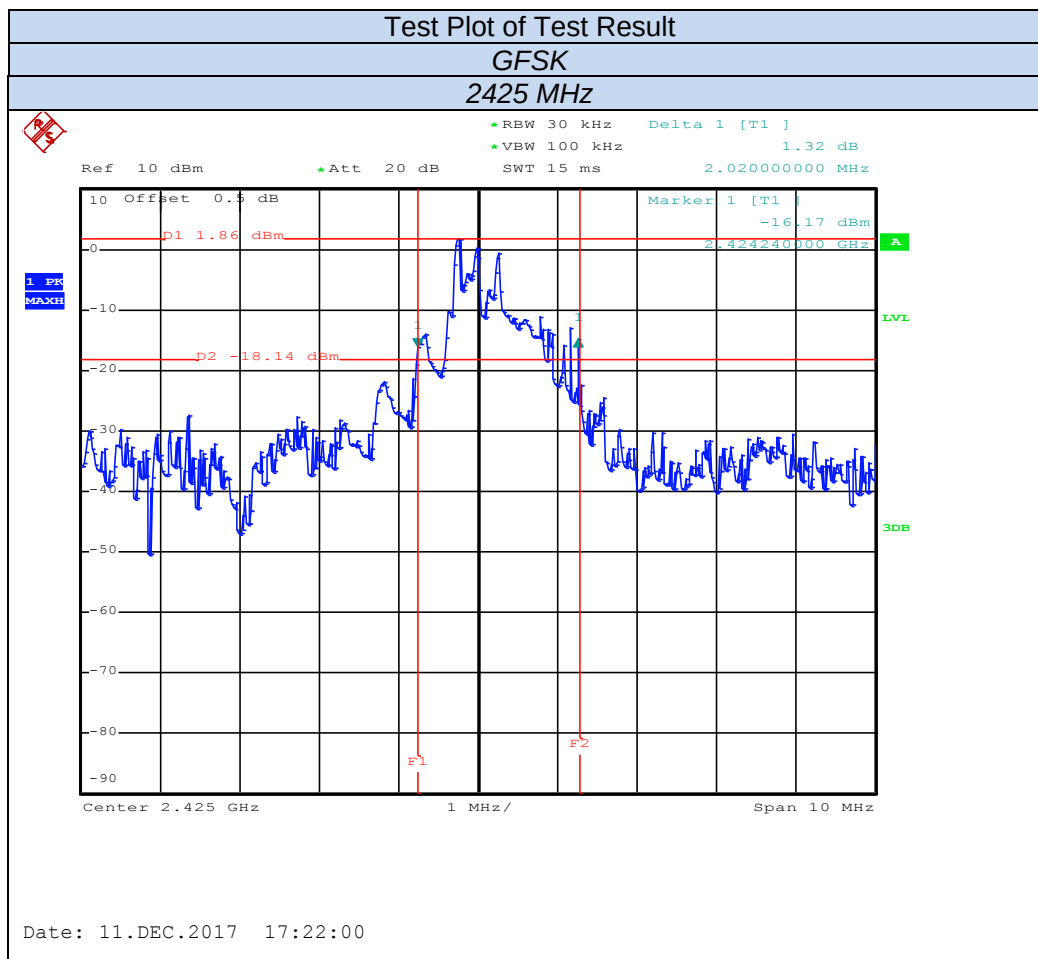

8. ANTENNA REQUIREMENTS

8.1 Standard Applicable

According to antenna requirement of §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

8.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0dBi, and the antenna is a PCB antenna built on PCB board and no consideration of replacement. Please see EUT photo for details.

8.2.3. Results: Compliance.

9. TEST SETUP PHOTOGRAPHS

Please refer to appendix A for test setup photographs.

10. EXTERIOR PHOTOGRAPHS OF EUT

Please refer to appendix B for exterior photographs.

11. INTERIOR PHOTOGRAPHS OF EUT

Please refer to appendix C for interior photographs.

-----THE END OF TEST REPORT-----