



# LTE Smart Dashboard Camera

## UCM3300 series

### User Manual

• Verison 1.01

Alleswolke Inc. all right reserved

# Menu

Disclaimer

Acknowledgement

what's included

Device Instruction

Hardware Specs

LED Indicators

Installation Instructions

- Installation position
- Installation procedure

Operating instructions

- Download and Install Smartphone Application
- Registration, log-in and pairing
- Connect Wi-Fi Hotspot
- **Input SIM card's phone number for system wake-up\***
- Video streaming, playback and download via local Wi-Fi
- Video streaming, remote access via LTE
- Normal Running Operation
- Two-Way audio feature
- Shot Picture and video for sharing
- Real time GPS location and route recording
- Shock/Impact detection
- Device setting and reset
- Auto patrol
- remote button's pairing

Firmware update

Q&A

RoHS disclaimer

## Disclaimer

Without the written authorization by Alleswolke Inc., any content that is provided in this user manual is not permitted to be published, spread, transcribed or stored in any searchable system with indices or journals, or translated into any other languages, to or via any form of media.

Alleswolke Inc. reserves the rights of modification, alteration, removal and any other acts to the contents in this user manual, including but not limited to the hardware and software specifications, user instructions and other general contents without any previous notification to customers or users.

Under any circumstances, Alleswolke Inc. does not assume any liabilities caused by the improper use of this product, including but not limited to the operations contradictory to the user instructions, use of excessive or abusive force against the products and accessories, or any activities in commission of criminal activities and/or civil rights.

Alleswolke Inc. exerts our utmost to ensure the accuracy and integrity of contents within this user manual. We are sincerely thankful should you discover and notify any errors or misses to us.

## Acknowledgement

Dear Respected User: We sincerely thank you for choosing our product. Before using the product, please carefully read the Precaution for the correct installation and use of the product.

- The product is designed with a high standard and contains sophisticated electronic circuits. The LTE hub in this product is suitable for 12V automotive battery voltage. The camera is suitable for 5V voltage and works only with accessories designed and manufactured specifically for this product and security needs. **Any improper use of non-compliant third-party accessories may cause incidental and consequential damages of product and users, which are not subject to the coverage of warranty service or other liabilities by the manufacturers or service providers.**
- Should there be any need to install or remove the SIM card or Micro SD card within the device, please ensure that the power status of device is OFF when doing so.
- When it is necessary to remove the stain or dirt on the surface of product, it is recommended to wipe it using soft cloth or wet tissue paper. Do not use any chemical solvents that have a irritating or corrosive nature. Please try to keep the lens clean as lens with stains or dirts on the surface may affect the picture quality. If it is necessary to clean the lens, please wipe lightly with soft cloth, suede, or any tissue paper that is designed to wipe lens glasses.
- This product is not water-proof and will cause damages if submerged into water or places within an environment with high humidity. Permanent damage will be caused by the rust generated with the contact or exposure to water or such an environment.
- Do not expose the product into an environment with strong electromagnetic radiation or a strong magnetic field, or place any device/object with such a nature nearby. Objects and equipments that generate strong static electricity or magnetic fields may interfere with the product performance, damage data storage of memory card, or affect the internal circuitry.
- Do not try to open the product or repair it by self. Please contact customer service or the official designated maintenance point for testing, repair or replacement should there be any problems or failures of the product.
- It is recommended to disconnect the power cable from the vehicle in case of long-term storage or parking of vehicle, in order to prevent the drainage of battery power.
- If there is any other problems during the use of device, please read the Frequently Asked Questions at the later sections of this user manual, or contact Alleswolke Inc. for additional consultation.


## What's included

1. Smart Dashboard Camera ×1
2. Smart LTE Hub×1
3. Dashboard Camera Stand ×1
4. Type-C Data Cable ×1
5. OBDII Power/Data Cable ×1
6. Remote Emergency Button ×1
7. Windshield Clean Wipe ×1
8. Windshield film ×1
9. 3M double sides adhesive tape ×1 ( backup )
10. Remote Emergency Button belt ×1
11. Wire Clamp ×5
12. User Manual ×1


**Warning:** it is strongly prohibited to plug the attached power and data cables into any other electronic devices not designated to use with, such as cell phones. Alleswolke does not assume any liability of damages cased by the contradictory use against this instruction.

## Device Instruction

- Smart Dashboard Camera

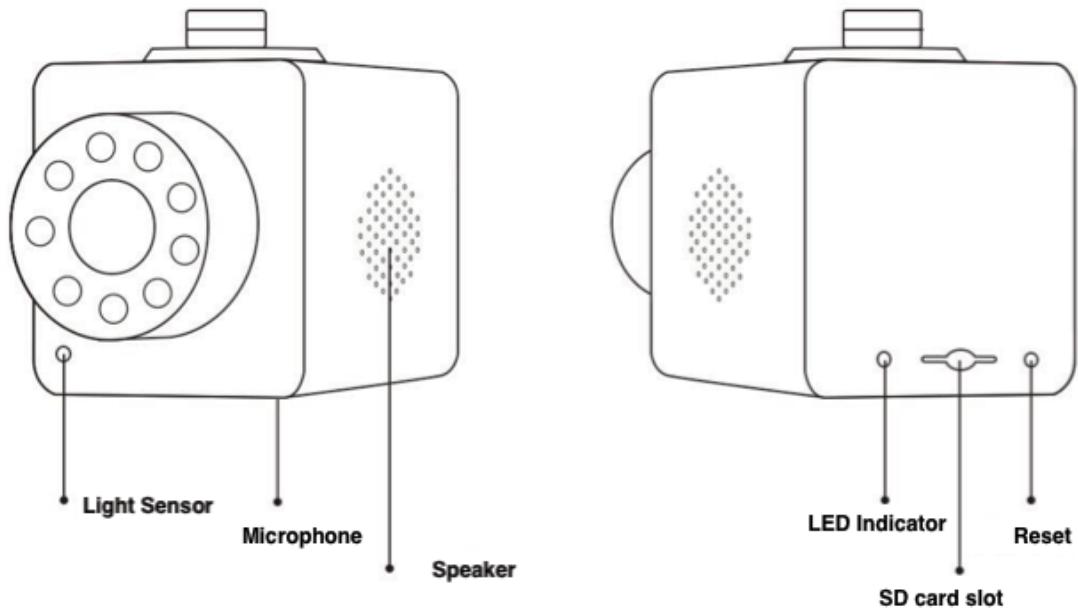

- Smart LTE Hub

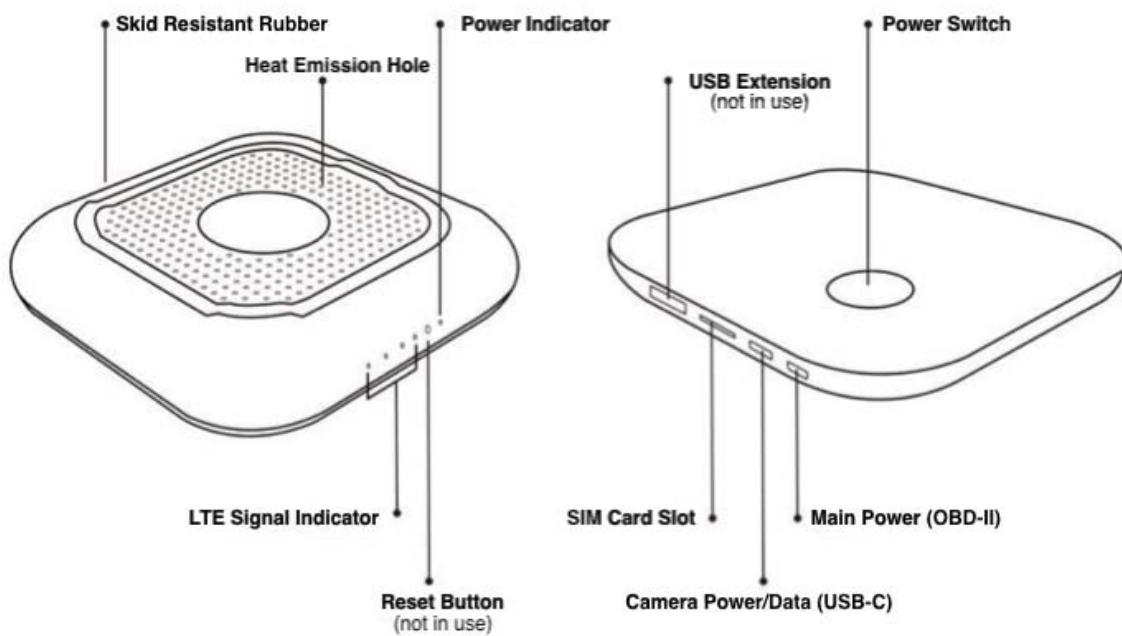

## Hardware specs

<b>Product Model</b>	UCM3310
<b>Dimensions</b>	CAM : 74×43×45mm      HUB : 92×92×15mm
<b>LTE Module</b>	Sierra Wireless WP7504
<b>Main Chip</b>	Hisilicon Hi3516C-V200
<b>Lens</b>	6-layers glass and IR-Cut with IR LED
<b>Aperture</b>	F1.9
<b>Viewing Angle</b>	Diagonal 162°/ Horizontal129°
<b>CMOS</b>	APTINA AR0230 CMOS 1/2.7
<b>Focal Length</b>	2.9mm
<b>Sensors</b>	G-Sensor, gyroscope, GPS
<b>Resolution</b>	1920x1080 ( 1080P )
<b>Audio Format</b>	ADPCM
<b>Video Format</b>	H.264
<b>Picture Format</b>	JPG
<b>Memory Card</b>	Micro SD ( CLASS10 and above )
<b>SD Max Capacity</b>	64GB
<b>LTE/3G Network</b>	TDSCDMA/FDD-LTE
<b>WiFi</b>	IEEE 802.11b/g/n
<b>SIM Type</b>	Micro SIM Card
<b>LTE Speed</b>	LTE download150Mbps
<b>Max Wi-Fi connect#</b>	Up to 8 devices
<b>Port</b>	Micro usb/ Usb/Type-C
<b>Current</b>	500mA
<b>Voltage</b>	12V (Hub) 5V (Camera)
<b>Working Temp</b>	-20 to 60°C
<b>Storage Temp</b>	-20 to 80°C
<b>Humidity</b>	15-85%RH
<b>Power Consumption</b>	5W

## LED Indicators


The LED indicators include the Power Indicator on the top of device and the series of Status Indicators on the bottom of device, with their status and colors representing the Status of Device.

Device	Type	Color	Status	Device Status
Camera	Indicator	Green	On	Device Starting
		Blue	On	Normal
		Green	Blink	Firmware update
		Red	Blink	SD Card Failure
Hub	Power Indicator	Blue	On	Normal
		Blue	Blink	F/W update
	LTE signal Indicator	Green	Marquee LED	Dialing
		Green	On (1-4)	Normal
		Green	Blink	No SIM or Network

# Installation Instructions

- Position of Installation

For the best performance and the prevention of interfering visual coverage, it is recommended to install the camera unit at a proper position behind the driver's sight of rear view mirror. At the meantime, to avoid the obstruction of camera's lens visual coverage when it rotates toward the inside of vehicle, it is recommended to keep the camera lens exposed within the sight of passengers and drivers below the rear view mirror.

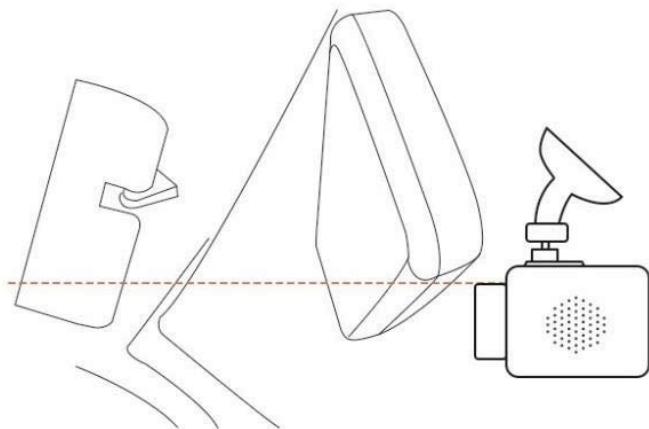

Position of Installation Diagram

- Installation procedure

1) Insert Micro SD card into Camera's Micro SD card Slot ;

**⚠ Pay attention to Micro SD card's direction of insertion. The maximum capacity of the SD card supported is 64G with Class 10 and above.**

2) Install the camera to the mount ;

3) Clean the windshield using windshield clean wipe ;

4) (Optional) attach the windshield film to the place on the windshield that the camera mount is to be attached ;

**⚠ The purpose of windshield film is to ease the need of taking down the mount with less force applied, as double sided tapes or sticky pads are strongly adhesive and may be difficult to remove. The suitable circumstances of using the windshield films are when there is a need of frequent attach or removal of the camera, such as for a rental car.**

5) Attach the camera and mount on the windshield using double sided tapes (included) firmly attached on.

6) Insert Micro SIM card into Camera's Micro SIM card Slot.

**⚠ Pay attention to micro SIM card's direction.**

7) Attach the LTE Hub on the top on the dashboard using the included double sided tape.

8) Connect the Type-C cable between the Hub and camera.

9) Use the Power Cable to connect OBD-II port with the Hub. The OBD-II port of vehicles is usually located underneath the dashboard, please check the manual of your vehicle or consult professionals to locate it in your vehicle.



For video link of installation, please scan:



<https://www.youtube.com/watch?v=y8FeValuL3o>

- ⚠ The OBD-II port generally provides constant power that supports video streaming access by smartphone application and web no matter car engine is on/off. Exceptions may exist, please consult automobile professionals for further questions.
- ⚠ The device switches to sleep mode 3 minutes after the ignition turns off, which consumes very little power and generally does not drain the vehicle battery in a short while. If the battery voltage drops below the sufficient power range during the sleep mode, the device will send a low battery alert to user.

10) Press the device power button, a prompt tone will sound and the device suppose to work properly.

## Operating instructions

- Download and Install Smartphone application

**⚠ At present the smartphone application is only available for Android OS. The iOS application will be published soon.**

You can download the Application in the following ways:

1. Scan the following QR code:



2. By searching “LTEdashcam” (without the quotation marks) in Google Play Store:


<https://play.google.com/store/search?q=LTEdashcam>


- Registration, log-in and pair-up

Please register your account using a valid smartphone number that can receive SMS

**⚠ When input smartphone number, please following the format: 14151234567**

Don't forget input “1” before your 10 digits phone number, the system only can recognize phone numbers in 11-digit format.

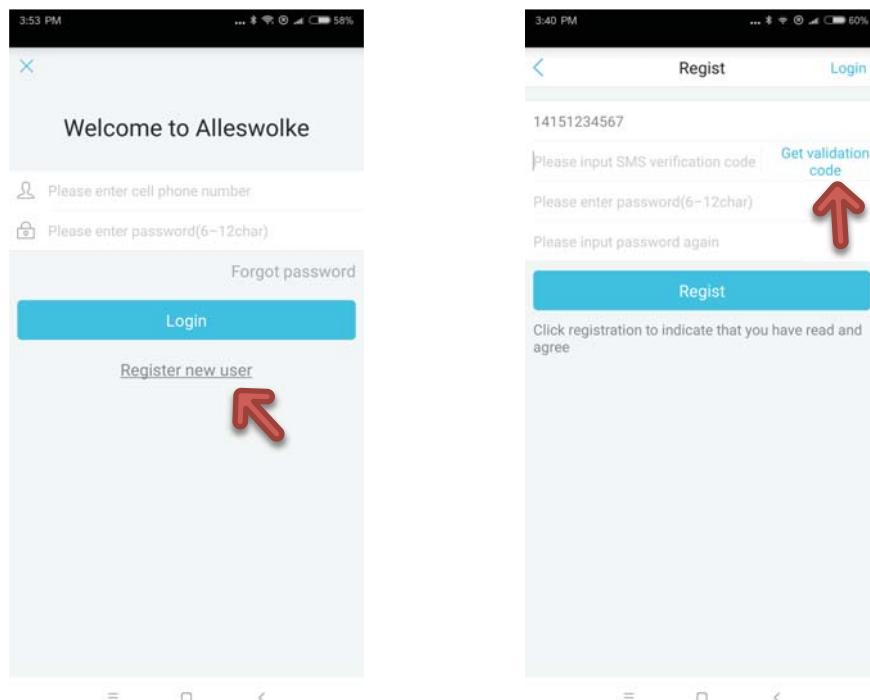

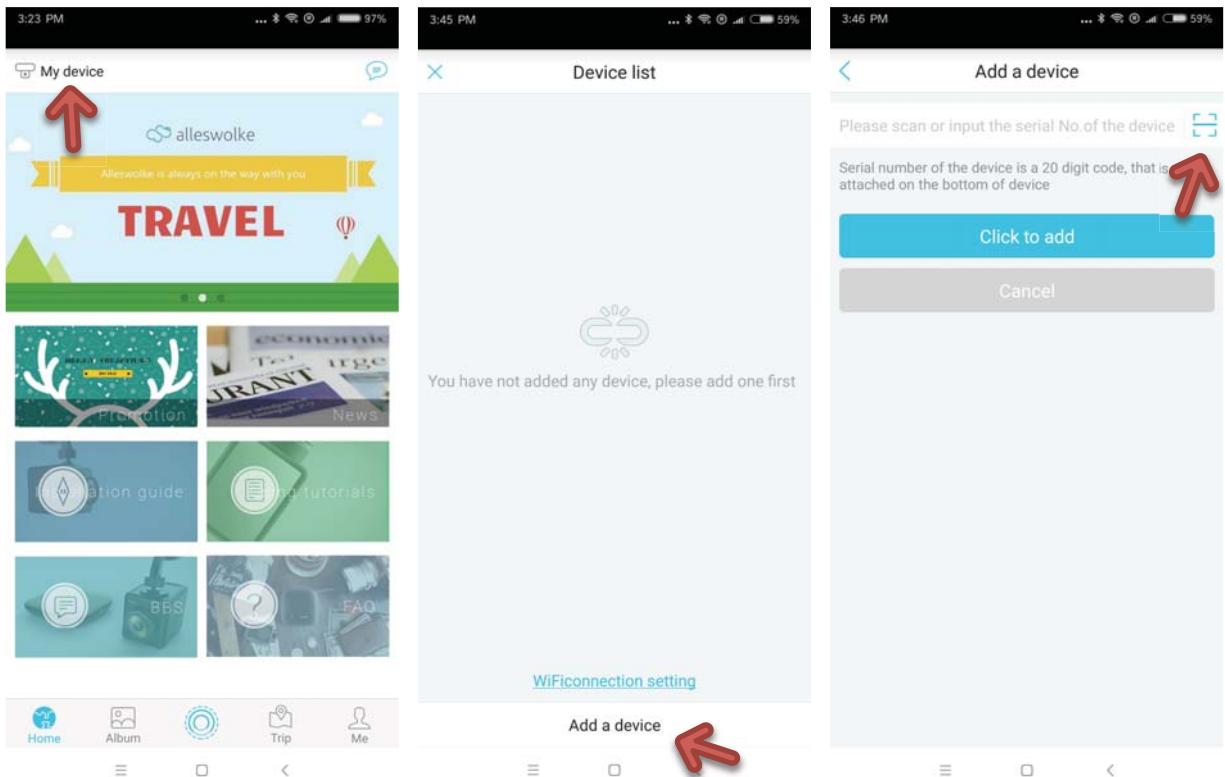


Scan the QR code under the Hub or Camera.

After Login your account, Tap the button “My device”, Tap “Add a device”, Tap the scan button to scan the QR code under the Hub or Camera. The code is an 20-digits code with alphanumerical combination.

- Connect to Wi-Fi hotspot



- ◊ Android OS: Settings – WLAN – Wi-Fi list, select Wi-Fi SSID: MPXXXXX, Password is miaomiao
- ◊ iOS: Settings – Wi-Fi, select Wi-Fi SSID: MPXXXXX, Password is miaomiao
- ⚠ The default Wi-Fi SSID is MPXXXX, password is miaomiao. SSID and password can be modified after the initial successful connection to the camera locally or remotely, in smartphone application's setting menu.
- ⚠ User and passengers also can connect the Wi-Fi hotspot and surf the internet for entertainment
- Input SIM card's phone number for system activation  
User needs to manually input the phone number linked to the SIM card. please use the 11-digit format: 14151234567.
- ⚠ This step only applies to model UCM3310 that uses Sierra Wireless WP7504 module.

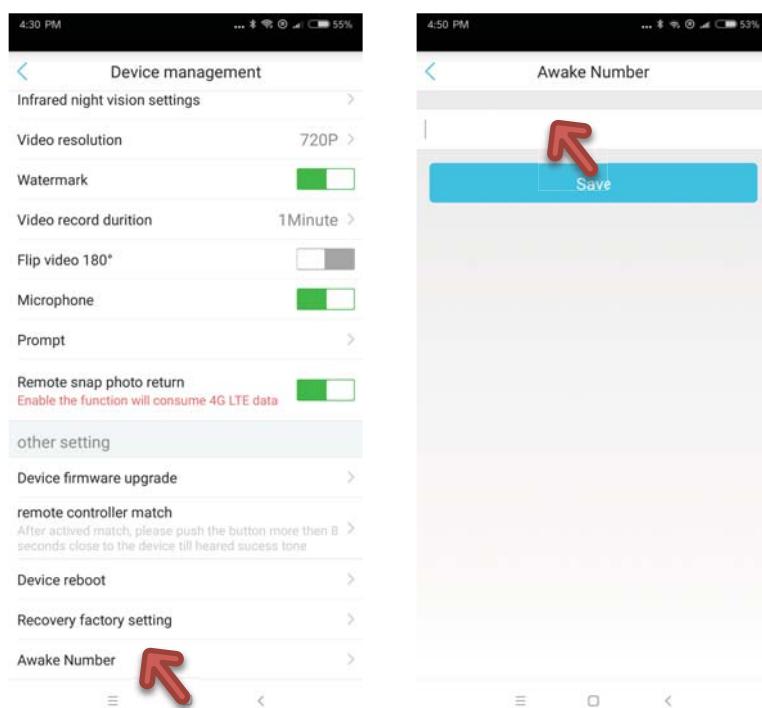

- Video streaming, playback and download via local Wi-Fi

Connect with local WiFi,

When engine is started and other Wi-Fi devices are inside or close to the vehicle, user can use Wi-Fi local connection feature to connect the device for browsing and downloading the recorded video.

- ◊ The smartphone is capable to stream the video realtime
- ◊ Smartphone can control camera to perform 360 degree rotation
- ◊ Take pictures and record a short video for 15 seconds. The picture and video will directly stored into smartphone via Wi-Fi
- ◊ SD card video playback, download and management
- ◊ SD card event playback, download and management
- ◊ Share pictures and video to social media
- ◊ Real time GPS location
- ◊ Settings adjustment


**⚠ When connected to local WiFi for the access to SD card data, it does not consume any cell carrier's metered data plan limit or generate any bills.**

- Video streaming and remote access via LTE

Connect remotely using LTE

When the engine is off, or user is far away from the vehicle, user can use smartphone to wake up and access camera. User can also take photos and videos, use two-way audio features, and remotely adjust settings.

Remote connect requires the device with activated LTE SIM card equipped, also with a good LTE signal coverage. The system need to be paired with a smartphone application.

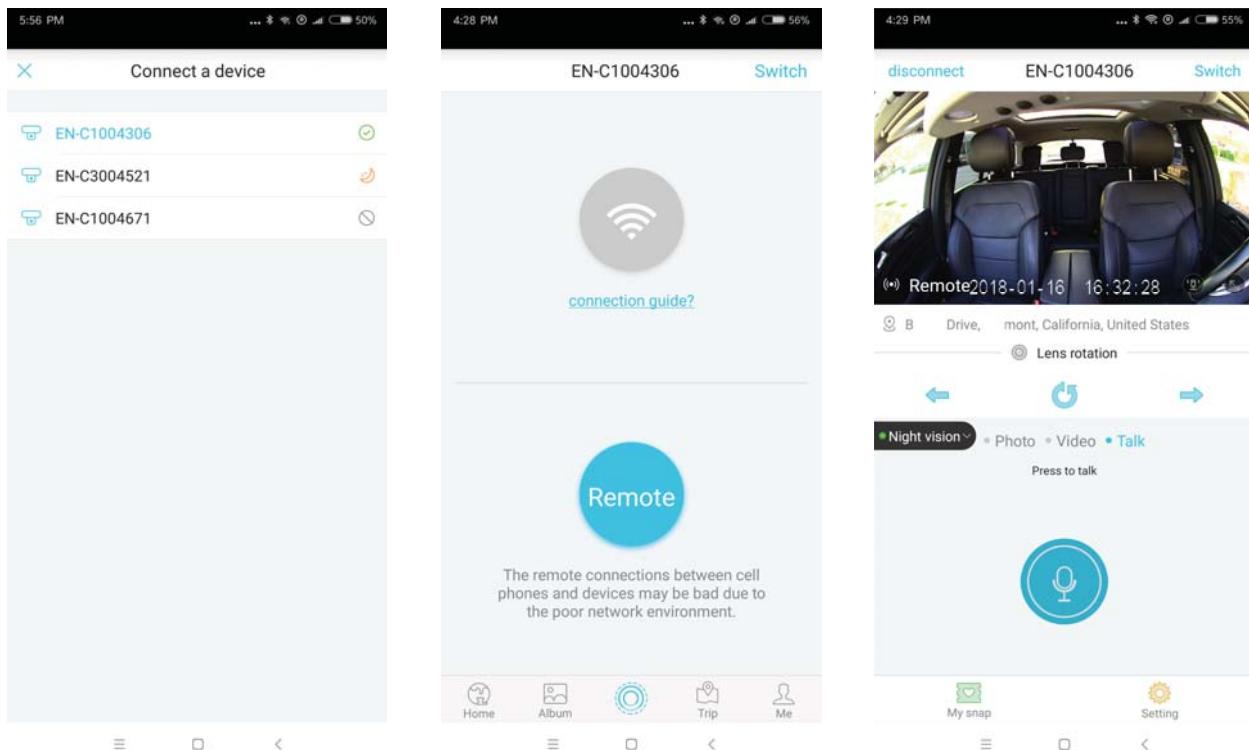

#### Device status

- ✓ Device in Normal Mode, ready for remote access
- ⌚ Device in Sleep Mode, ready for wake-up for remote access.
- ⚠ For model UCM3310 with WP7504 module, the offline mode may also display as Sleep Mode.
- 🚫 Offline mode, cannot wake up for remote access
- ⚠ Offline mode does not apply for model UCM3310 with WP7504 module.
- ⌚ Patrol mode, camera keeps auto 360 degree rotation surveillance

When connected remotely via LTE,

- ◊ The smartphone can stream the video real-time
- ◊ Smartphone can control camera 360 degree rotation
- ◊ Take pictures and recording 15s video, the picture and video will recording to smartphone via Wi-Fi
- ◊ Two-Way audio
- ◊ Share pictures and video to social media
- ◊ Real-time GPS location
- ◊ Settings adjustment

 For the conservation of data plan, the resolution of video streaming can be less than Wi-Fi video streaming with the SD card video playback and download features turned off.


When the remote connection to the device fails, please check:

- ◊ If the smartphone that is used to access the system has internet connection issue
- ◊ If any device's power supply been took down
- ◊ If the LTE network coverage is unstable in the area of the vehicle
- ◊ If the data plan of device has reached its limit

- Normal Runtime Operation

1. Normal streaming

- ◊ Using LTE to remote access or Wi-Fi to local access, the system allows user to have real-time streaming.
- ◊ The smartphone application can control dashboard camera to perform rotate 360 degree to any direction.

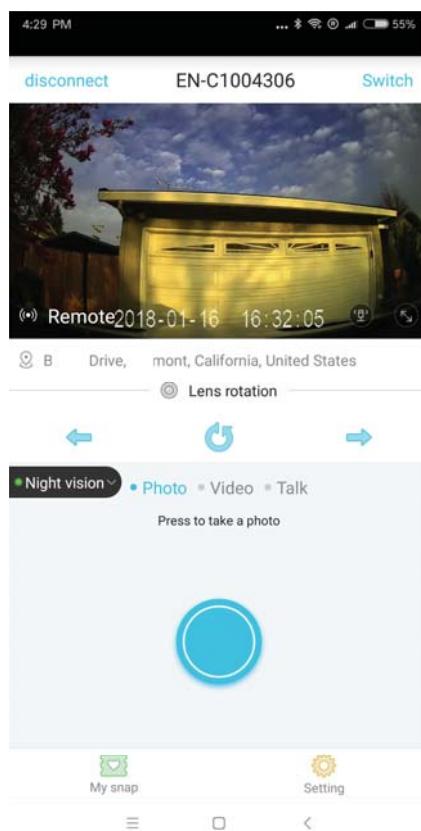

2. Impact/incident video recording. When system detects any impact or abnormal differences of pictures, the device will recording the current video into event list in the micro SD card. The event can be playback.


**⚠** Currently in beta version, the feature of event cloud upload is turned off for saving cloud memory and data plan, the feature will be enabled in the future.

**⚠** The earliest video clips will be overwritten by the newest video clips when the SD card is full.

- Two-way audio

The system supports two-way audio. The system must be in remote access mode to use this feature with the smartphone's microphone and speaker enabled and accessible by the application.

- 1) When remote access the device, slide to the “Talk” panel
- 2) The listen mode is default mode
- 3) Press the Talk button to speak and release button to listen
- 4) The driver can talk and speak directly with no distractive interactions needed

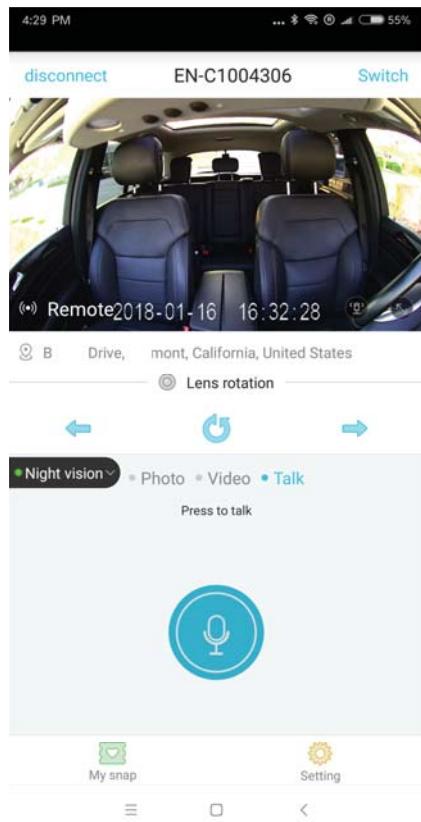

- Take picture and video

## 1、Using panic button

- ◊ When the panic button is pressed, a photo and a 15-second video clip will be taken with a SMS message sent to user's phone, and the photo and video uploaded to cloud at the meantime.

**⚠ in the beta release of application, the emergency SMS, photo and video clips to cloud are disabled, which can be enabled in the future.**

## 2、Using Smartphone Application

### With local Wi-Fi connection or remote LTE

connection, the streaming view

- ◊ Tap "Photo" to take a picture
- ◊ Tap "Video" to take a 15-second video clip.

- 1) With Local Wi-Fi connection, photos and video clips will be downloaded directly to smartphone.
- 2) With Remote LTE connection, by the default setting, photos and video clips will be stored in Micro SD card's event video folder, which will be automatically downloaded to smartphone upon next local Wi-Fi connection.
- 3) Remote LTE connection, the photo can be downloaded to the smartphone via LTE if turn on the "remote photo return" button in the Application's setting manual.

**⚠ In this beta release, only photo can be downloaded to the smartphone via LTE, the video download feature is turned off, in may turn on in the future.**

## 3、Photo and Video Management

In the application's main menu, tap "album", the downloaded photos, video clips can be viewed, managed and shared. It can also be managed In local Wi-Fi connection mode by tapping "my snap".


- GPS Location and Route tracking.

In Main menu, tap “Trip”. The system provides 2 features regarding to GPS.

The GPS waypoint history is stored in the cloud, at present the Application is set to display tracking history on the map in the last 3 days.

- ◊ Real Time Location mode
- ◊ Route tracking mode

**⚠ Application will display the latest GPS location if the system offline and can not get the real-time GPS location**

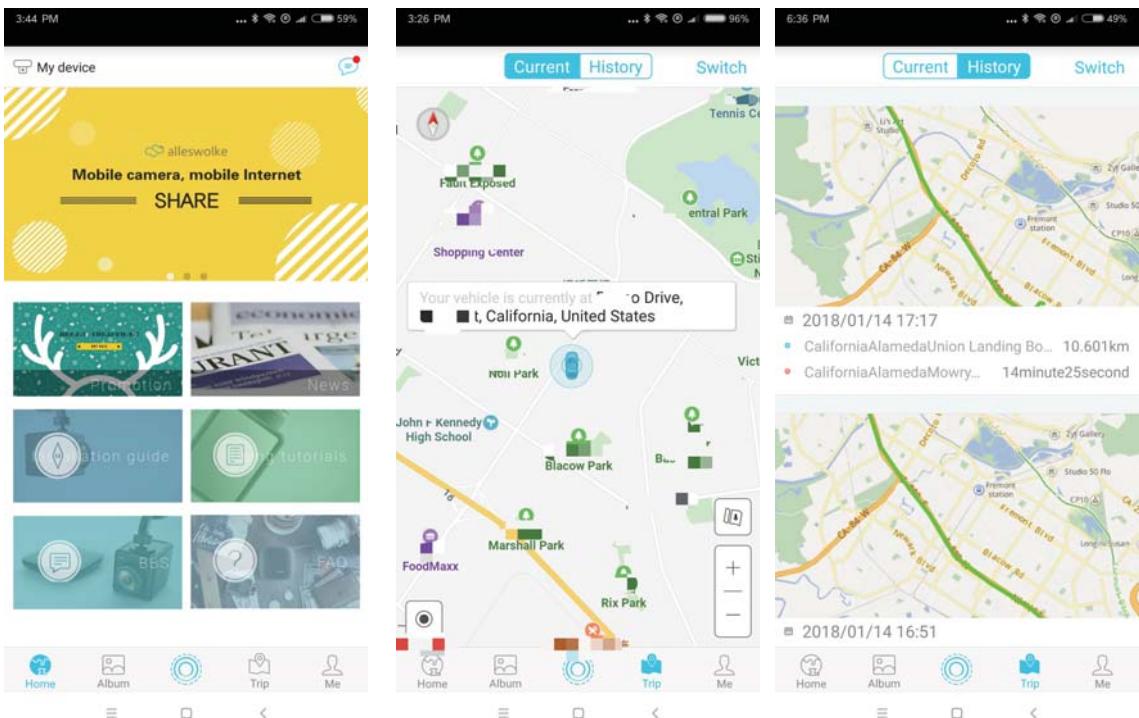

- Shock/Impact Detection
  - ◊ When vehicle's engine is turned off, car is locked, if the device detects any shock or impact, the system will notify user via SMS along with a combination of panoramic pictures (4 photos). The vibration sensitivity can be adjust in settings. The SMS and photo sending feature can be turned on/off in the Settings.
  - ◊ When a low voltage from vehicle battery is detected, it sends a low-battery SMS to user and won't be wake-up until battery is charged or engine is on in order to saving batteries.

**⚠ Model UCM3310 only sent SMS when car is in ACC/ACCESSORY position**

- Device Settings and Reset

In the Setting menu, Wi-Fi SSID and password, video duration, video resolution, audio on/off, wake up time durations and other settings can be modified.

**⚠ When system is working normally, use a pin to push camera's reset button, to he system will reset to factory settings.**

- Patrol mode

If the vehicle is left unattended in an area with elevated security concerns, before leaving the vehicle, long press the emergency button for 3 seconds. The system will change to patrol mode, the camera will keep rotating 360 degree and recording. To cancel the patrol mode, press the button again for 3 seconds.

**⚠** The feature will keep the camera recording and will consume more power than the regular sleep mode. Please do not use this feature for a prolonged period in order to preserve the car battery life, especially for vehicles that use old batteries that have not been maintained after a long period.

**⚠** When the system detects a low voltage from the battery, the device will stop patrol mode and switch to sleep mode.

- Emergency Button Pairing

All Emergency Remote button has been pre-paired in factory, however, in Application Setting menu, it also supports pairing in a manual way.

- 1) System working in Normal mode with application in Wi-Fi or LTE connect ion mode
- 2) Emergency Button should be less than 5 feet from camera
- 3) In Application Setting menu, tap “Remote Controller Match”
- 4) Long press button for 8 seconds, camera will have voice notice to indicate pairing success

**⚠** If still cannot pair, please check Emergency button's battery, it using CR2032 battery.

- Firmware update

- ◊ Firmware can be updated via Application. The Application will download the latest Firmware in Wi-Fi connect mode or LTE connect mode.

**⚠** Please make sure that the system is in the following status before performing the firmware update:

- ◊ System working in Normal mode
- ◊ Engine turned on
- ◊ Do not turn off engine or the device during update
- ◊ Do not remove MicroSD card during update

If the system crash caused by update failure, please contact our customer support for further help.

- Q & A

Please visit the Q&A section in [alleswolke.com](http://alleswolke.com)

- RoHS Disclaimer

	Hazardous substance or element					
	Pb	Hg	Cb	Cr <sup>6+</sup>	PBB	PBDE
Device Housing	O	O	O	O	O	O
Data/Power Cable	O	O	O	O	O	O
PCB	X	O	O	O	O	O
Instruction	<p>O : The content of the hazardous substance or elements meet or less than the criterion of SJ/T11363-2006 standard requirement.</p> <p>X : The content of the hazardous substance or elements large than the criterion of SJ/T11363-2006 standard requirement*.</p>					

\*The product meets the full compliance with RoHS standard. Currently there is no proven technology or common method to substitute or reduce the use of lead content in electronic component, electronic ceramics, optical glass, steel and copper alloy.

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
  - (1) This device may not cause harmful interference.
  - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
3. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

**FCC ID: 2AOYPUCM3310**