



Registration  
No. 788871

---

# TEST REPORT FOR WLAN TESTING

---

Report No: SRTC2018-9004(F)-18030601(F)

Product Name: Mobile Phone

Product Model: H1A1000

Applicant: RED Technologies LLC

Manufacturer: RED Technologies LLC

Specification: FCC Part 15, Subpart C (2018)

FCC ID: 2AOYWH1A1000

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30, Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

## CONTENTS

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                           | <b>2</b>  |
| 1.1 NOTES OF THE TEST REPORT .....                            | 2         |
| 1.2 INFORMATION ABOUT THE TESTING LABORATORY .....            | 2         |
| 1.3 APPLICANT'S DETAILS .....                                 | 2         |
| 1.4 MANUFACTURER'S DETAILS .....                              | 2         |
| 1.5 TEST ENVIRONMENT .....                                    | 3         |
| <b>2 DESCRIPTION OF THE DEVICE UNDER TEST .....</b>           | <b>4</b>  |
| 2.1 FINAL EQUIPMENT BUILD STATUS .....                        | 4         |
| 2.2 DESCRIPTION OF TEST MODES .....                           | 5         |
| 2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... | 5         |
| 2.3 DUTY CYCLE OF TEST SIGNAL .....                           | 6         |
| 2.4 EUT OPERATING CONDITIONS .....                            | 7         |
| <b>3 REFERENCE SPECIFICATION .....</b>                        | <b>8</b>  |
| <b>4 KEY TO NOTES AND RESULT CODES .....</b>                  | <b>9</b>  |
| <b>5 RESULT SUMMARY .....</b>                                 | <b>10</b> |
| <b>6 TEST RESULT .....</b>                                    | <b>11</b> |
| 6.1 PEAK POWER OUTPUT .....                                   | 11        |
| 6.2 OCCUPIED BANDWIDTH .....                                  | 12        |
| 6.3 TRANSMITTER POWER SPECTRAL DENSITY .....                  | 13        |
| 6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....          | 14        |
| 6.5 BAND-EDGE MEASUREMENT .....                               | 15        |
| 6.6 SPURIOUS RADIATED EMISSIONS .....                         | 16        |
| 6.7 AC POWER LINE CONDUCTED EMISSION .....                    | 21        |
| <b>7 MEASUREMENT UNCERTAINTIES .....</b>                      | <b>23</b> |
| <b>8 TEST EQUIPMENTS .....</b>                                | <b>24</b> |
| <b>APPENDIX A – TEST DATA OF CONDUCTED EMISSION .....</b>     | <b>25</b> |
| <b>APPENDIX B – TEST DATA OF RADIATED EMISSION .....</b>      | <b>76</b> |

## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### **1.2 Information about the testing laboratory**

|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| Company:           | The State Radio_monitoring_center Testing Center (SRTC)              |
| Address:           | 15th Building, No.30 Shixing Street, Shijingshan District, P.R.China |
| City:              | Beijing                                                              |
| Country or Region: | P.R.China                                                            |
| Contacted person:  | Liu Jia                                                              |
| Tel:               | +86 10 57996183                                                      |
| Fax:               | +86 10 57996388                                                      |
| Email:             | liujiaf@srtc.org.cn                                                  |

### **1.3 Applicant's details**

|                    |                                              |
|--------------------|----------------------------------------------|
| Company:           | RED Technologies LLC                         |
| Address:           | 34 Parker, Irvine, California, United States |
| City:              | Irvine                                       |
| Country or Region: | United States                                |
| Contacted person:  | Doug Kwon                                    |
| Tel:               | 9492067900 ext 7794                          |
| Fax:               | ---                                          |
| Email:             | Doug.kwon@Red.com                            |

### **1.4 Manufacturer's details**

|                    |                                              |
|--------------------|----------------------------------------------|
| Company:           | RED Technologies LLC                         |
| Address:           | 34 Parker, Irvine, California, United States |
| City:              | Irvine                                       |
| Country or Region: | United States                                |
| Contacted person:  | Doug Kwon                                    |
| Tel:               | 9492067900 ext 7794                          |
| Fax:               | ---                                          |
| Email:             | Doug.kwon@Red.com                            |

## 1.5 Test Environment

|                                         |            |
|-----------------------------------------|------------|
| Date of Receipt of test sample at SRTC: | 2018-03-06 |
| Testing Start Date:                     | 2018-04-11 |
| Testing End Date:                       | 2018-05-09 |

| Environmental Data: | Temperature (°C) | Humidity (%) |
|---------------------|------------------|--------------|
| Ambient             | 25               | 30           |
| Maximum Extreme     | 55               | ---          |
| Minimum Extreme     | -10              | ---          |

|                                 |      |
|---------------------------------|------|
| Normal Supply Voltage (V d.c.): | 3.85 |
|---------------------------------|------|

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

|                             |                                                                                                                                                                                                                                         |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Band              | 2.412GHz~2.462GHz                                                                                                                                                                                                                       |
| Number of Channel For 20MHz | 11                                                                                                                                                                                                                                      |
| Number of Channel For 40MHz | 7                                                                                                                                                                                                                                       |
| Modulation Type             | DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM                                                                                                                                                                                                   |
| Duplex Mode                 | TDD                                                                                                                                                                                                                                     |
| Channel Spacing             | 5MHz                                                                                                                                                                                                                                    |
| Data Rate                   | 1Mbps/2Mbps/5.5Mbps/11Mbps/6Mbps/9Mbps/12Mbps<br>/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps/6.5Mbps<br>/13.0Mbps/13.5Mbps/19.5Mbps/26.0Mbps/27.0Mbps<br>/39.0Mbps/40.5Mbps/52.0Mbps/58.5Mbps/65Mbps<br>/81.0Mbps/108.0Mbps/121.5Mbps/135.0Mbps |
| Duty Cycles                 | 98%                                                                                                                                                                                                                                     |
| Power Supply                | Battery/AC adapter                                                                                                                                                                                                                      |
| Rated Power Supply Voltage  | 3.85V                                                                                                                                                                                                                                   |
| HW Version                  | EVT2.1                                                                                                                                                                                                                                  |
| SW Version                  | HiA1000.005ho.01.00.01d.403                                                                                                                                                                                                             |
| IMEI                        | 355929090014854                                                                                                                                                                                                                         |
| Antenna type                | Refer to Note                                                                                                                                                                                                                           |
| Antenna connector           | Refer to Note                                                                                                                                                                                                                           |

**Note:**

The antenna provide to the EUT, please refer to the following table:

| Brand                                                                                                                                   | Model | Antenna gain                 | Frequency range(GHz) | Antenna type    | Connector Type |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------------|----------------------|-----------------|----------------|
| N/A                                                                                                                                     | N/A   | Ant0:-1.5dBi<br>Ant1:-1.5dBi | 2.402GHz~2.480GHz    | PIFA<br>Antenna | N/A            |
| Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. |       |                              |                      |                 |                |

## 2.2 Description of Test Modes

11 channels are provided to this EUT:

| CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) |
|---------|-------------|---------|-------------|
| 1       | 2412        | 7       | 2442        |
| 2       | 2417        | 8       | 2447        |
| 3       | 2422        | 9       | 2452        |
| 4       | 2427        | 10      | 2457        |
| 5       | 2432        | 11      | 2462        |
| 6       | 2437        | ---     | ---         |

### 2.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE<br>MODE | APPLICABLE TO |       |     |      | DESCRIPTION |
|-----------------------|---------------|-------|-----|------|-------------|
|                       | RE $\geq$ 1G  | RE<1G | PLC | APCM |             |
| -                     | √             | √     | √   | √    | -           |

Where **RE 1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE<br>CHANNEL | TESTED CHANNEL | MODULATION TYPE | DATA RATE (Mbps) |
|----------------------|----------------|-----------------|------------------|
| 1 to 11              | 6              | DBPSK/ BPSK     | 1,6,6.5,13.5     |

### Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE | DATA RATE (Mbps) |
|-------------------|----------------|-----------------|------------------|
| 1 to 11           | 6              | DBPSK/ BPSK     | 1,6,6.5,13.5     |

### Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE | DATA RATE (Mbps) |
|-------------------|----------------|-----------------|------------------|
| 1 to 11           | 6              | DBPSK           | 1                |

### Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE | DATA RATE (Mbps) |
|-------------------|----------------|-----------------|------------------|
| 1 to 11           | 1,3, 6,9, 11   | DBPSK/ BPSK     | 1,6,6.5,13.5     |

### 2.3 Duty Cycle of Test Signal

| Modulation Type                                                                                                                      | Data Rate | Duty Cycle | Correction factor |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|-------------------|
| 11b                                                                                                                                  | 1Mbps     | 98.9%      | N/A               |
| 11g                                                                                                                                  | 6Mbps     | 93.9%      | 0.27dB            |
| 11n(HT20)                                                                                                                            | 6.5Mbps   | 93.4%      | 0.30dB            |
| 11n(HT40)                                                                                                                            | 13.5Mbps  | 88.2%      | 0.55dB            |
| Duty cycle of test signal is $> 98\%$ , duty factor shall not be considered.<br>Correction factor = $10 * \log(1/\text{duty cycle})$ |           |            |                   |

## 2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually. EUT uses USB charging to work.

The following support equipment was used to exercise the DUT during testing:

|               |                             |
|---------------|-----------------------------|
| Equipment     | Charger                     |
| Manufacturer  | TEN PAO INDUSTRIAL CO., LTD |
| Model Number  | S018CDU1200150              |
| Serial Number | ---                         |

|               |                                 |
|---------------|---------------------------------|
| Equipment     | Battery                         |
| Manufacturer  | DONGGUAN DRN NEW ENERGY CO.,LTD |
| Model Number  | RED-A2H-4500                    |
| Serial Number | ---                             |

|               |               |
|---------------|---------------|
| Equipment     | Notebook      |
| Manufacturer  | LENOVO        |
| Model Number  | ThinkPad E420 |
| Serial Number | ---           |

### **3 REFERENCE SPECIFICATION**

| Specification<br>n | Version       | Title                                                                                                                |
|--------------------|---------------|----------------------------------------------------------------------------------------------------------------------|
| 15.35              | 2018          | Measurement detector functions and bandwidths.                                                                       |
| 15.209             | 2018          | Radiated emission limits; general requirements.                                                                      |
| 15.247             | 2018          | Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.                                          |
| 15.203             | 2018          | Antenna requirement                                                                                                  |
| ANSI C63.10        | 2013          | Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                         |
| KDB 558074         | April 5, 2017 | GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247 |



## **4 KEY TO NOTES AND RESULT CODES**

The following are the definition of the test result.

| Code | Meaning                                                                                  |
|------|------------------------------------------------------------------------------------------|
| PASS | Test result shows that the requirements of the relevant specification have been met.     |
| FAIL | Test result shows that the requirements of the relevant specification have not been met. |
| N/T  | Test case is not tested.                                                                 |
| NTC  | Nominal voltage, Normal Temperature                                                      |
| HV   | High voltage, Normal Temperature                                                         |
| LV   | Low voltage, Normal Temperature                                                          |
| HTHV | high voltage, High Temperature                                                           |
| LTHV | High voltage, Low Temperature                                                            |
| HTLV | Low voltage, High Temperature                                                            |
| LTLV | Low voltage, Low Temperature                                                             |

## 5 RESULT SUMMARY

| No. | Test case                                  | Reference                 | Verdict                     |
|-----|--------------------------------------------|---------------------------|-----------------------------|
| 1   | Peak Power Output                          | 15.247(a)(2)              | Pass                        |
| 2   | Occupied Bandwidth                         | 15.247(b)(3) )            | Pass                        |
| 3   | Transmitter Power Spectral Density         | 15.247(e) )               | Pass                        |
| 4   | Conducted Out of band emission measurement | 15.247(d)                 | Pass                        |
| 5   | Band Edge                                  | 15.247(d)                 | Pass                        |
| 6   | Spurious Radiated Emissions                | 15.247(d)/15.35(b)/15.209 | Pass                        |
| 7   | AC Power line Conducted Emission           | 15.207                    | Pass                        |
| 8   | Antenna requirement                        | 15.203                    | Pass (refer to section 2.1) |

|                                                                                                                                        |                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| This Test Report Is Issued by:<br>Mr. Peng Zhen<br> | Checked by:<br>Mr. Li Bin<br> |
| Tested by:<br>Mr. HeDengshun<br>                    | Issued date:<br><br>20180719                                                                                       |

## **6 TEST RESULT**

### **6.1 Peak Power Output**

#### **6.1.1 Ambient condition**

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

#### **6.1.2 Test Description**

A transmitter antenna terminal of EUT is connected to the power meter. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

#### **6.1.3 Test limit**

FCC Part15.247(b)(3)

The maximum permissible conducted output power is 1 Watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30.0 dBm

#### **6.1.4 Test Procedure Used**


KDB 558074 D01 DTS Meas Guidance v04 - Section 9.1.3

#### **6.1.5 Test Settings**

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### **6.1.6 Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



#### **6.1.7 Test result**

The test results are shown in Appendix A .

## 6.2 Occupied Bandwidth

### 6.2.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.2.2 Test Description

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss. Which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

### 6.2.3 Test limit

FCC Part15.247(a)(2)

The minimum permissible 6dB bandwidth is 500 kHz

### 6.2.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v04 – Section 8.1 Option 1

### 6.2.5 Test Settings

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.2.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

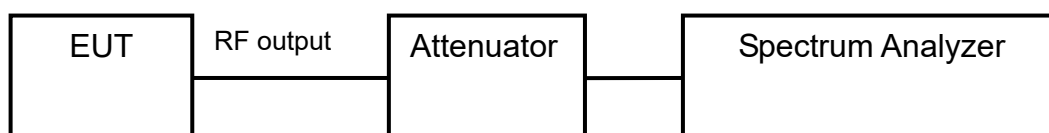

### 6.2.7 Test result

The test results are shown in Appendix A.

## 6.3 Transmitter Power Spectral Density

### 6.3.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.3.2 Test Description

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

### 6.3.3 Test limit

FCC Part15.247(e)

The maximum permissible power spectral density is 8.0 dBm in any 3 kHz band.

### 6.3.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v04 Section 10.2.

### 6.3.5 Test Settings

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

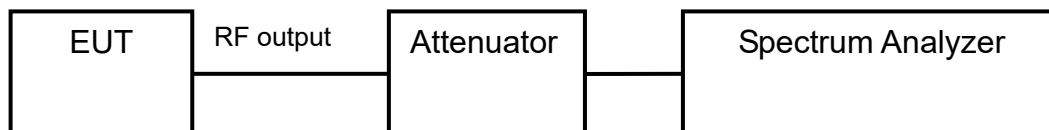

### 6.3.7 Test result

The test results are shown in Appendix A.

## 6.4 Conducted Out of band emission measurement

### 6.4.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.4.2 Test Description

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration.

### 6.4.3 Test limit

FCC Part 15.247(d)

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.


### 6.4.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v04 Section 11.3

### 6.4.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100kHz.
- Set the VBW  $\geq$  300kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### 6.4.6 Test Setup

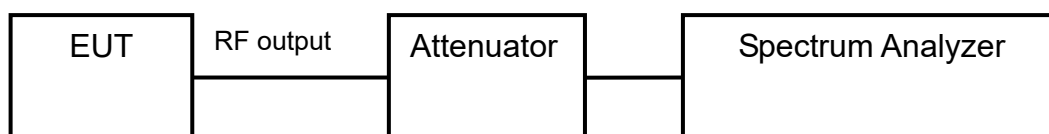

### 6.4.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

The test results are shown in Appendix A.


## 6.5 Band-edge measurement

### 6.5.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.5.2 Test Description

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

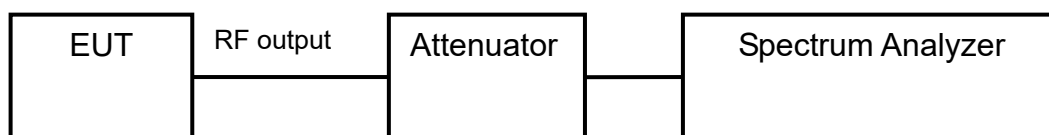

### 6.5.3 Test limit

Part 15.247(d)

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.5.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v04 Section 12.1

### 6.5.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100kHz.
- Set the VBW  $\geq$  300kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### 6.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

### 6.5.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A .

## 6.6 Spurious Radiated Emissions

### 6.6.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

### 6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.

| Frequency [MHz] | Field strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[meters] |
|-----------------|---------------------------------------|-------------------------------|
| 0.009~0.490     | 2400/F(kHz)                           | 300                           |
| 0.490~1.705     | 24000/F(kHz)                          | 30                            |
| 1.705~30.0      | 30                                    | 30                            |
| 30~88           | 100                                   | 3                             |
| 88~216          | 150                                   | 3                             |
| 216~960         | 200                                   | 3                             |
| Above 960       | 500                                   | 3                             |

**Radiated Limits**

Part15.35(b):

there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

**Used conversion factor: Limit (dB $\mu\text{V/m}$ ) = 20 log (Limit ( $\mu\text{V/m}$ )/1 $\mu\text{V/m}$ )**

| Frequency [MHz]                                                            | Detector   | Unit (dB $\mu\text{V/m}$ ) |
|----------------------------------------------------------------------------|------------|----------------------------|
| 30~88                                                                      | Quasi-peak | 40.0                       |
| 88~216                                                                     | Quasi-peak | 43.5                       |
| 216~960                                                                    | Quasi-peak | 46.0                       |
| 960~1000                                                                   | Quasi-peak | 54.0                       |
| 1000~5th harmonic of the highest frequency<br>or 40GHz, whichever is lower | Average    | 54.0                       |
|                                                                            | Peak       | 74.0                       |

**Conversion Radiated limits**

#### 6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v04 – Section 12.2.7

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the

emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 6.6.5 Test Settings

#### **Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

#### **Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

| Frequency  | RBW        |
|------------|------------|
| 9-150kHz   | 200-300Hz  |
| 0.15-30MHz | 9-10kHz    |
| 30-1000MHz | 100-120kHz |
| >1000MHz   | 1MHz       |


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

## 6.6.6 Test Setup


### For Radiated emission below 30MHz

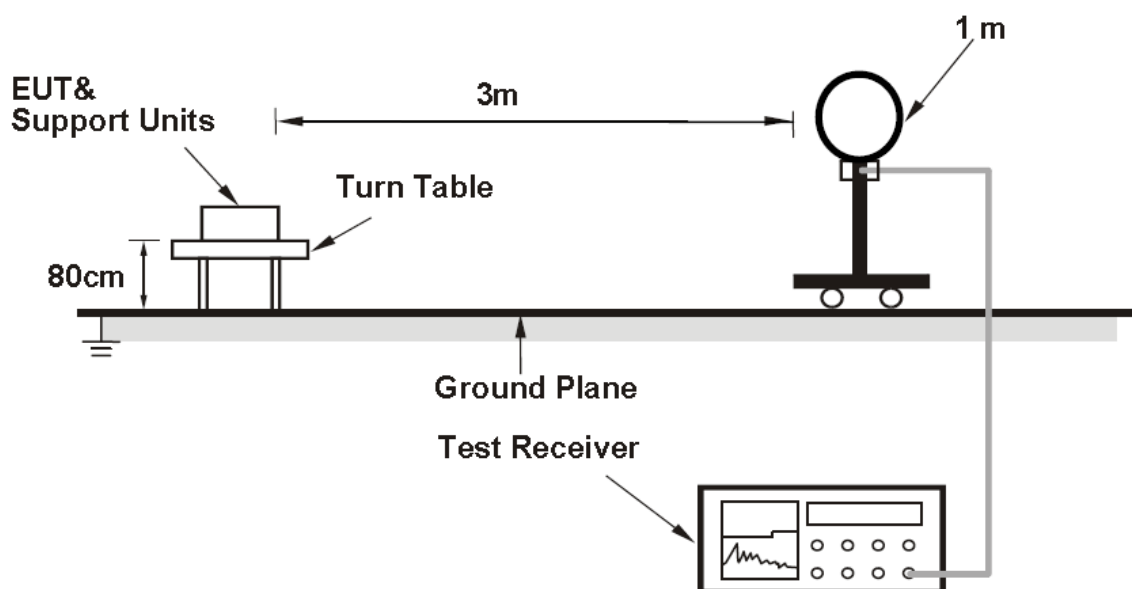

### For Radiated emission 30MHz to 1GHz

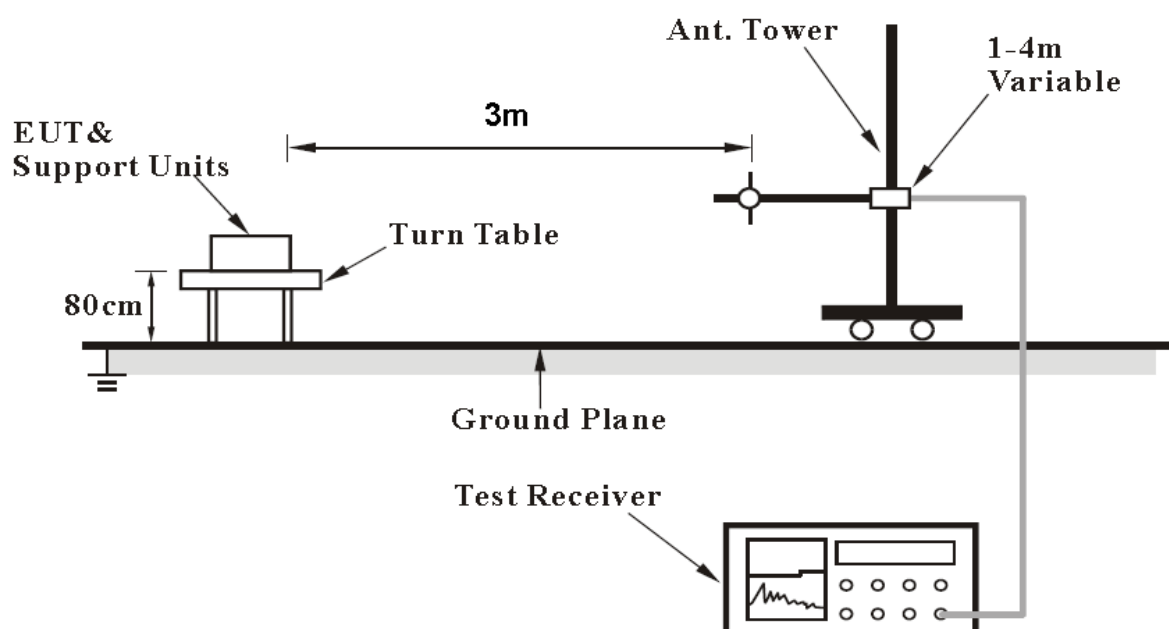

## For Radiated emission above 1GHz

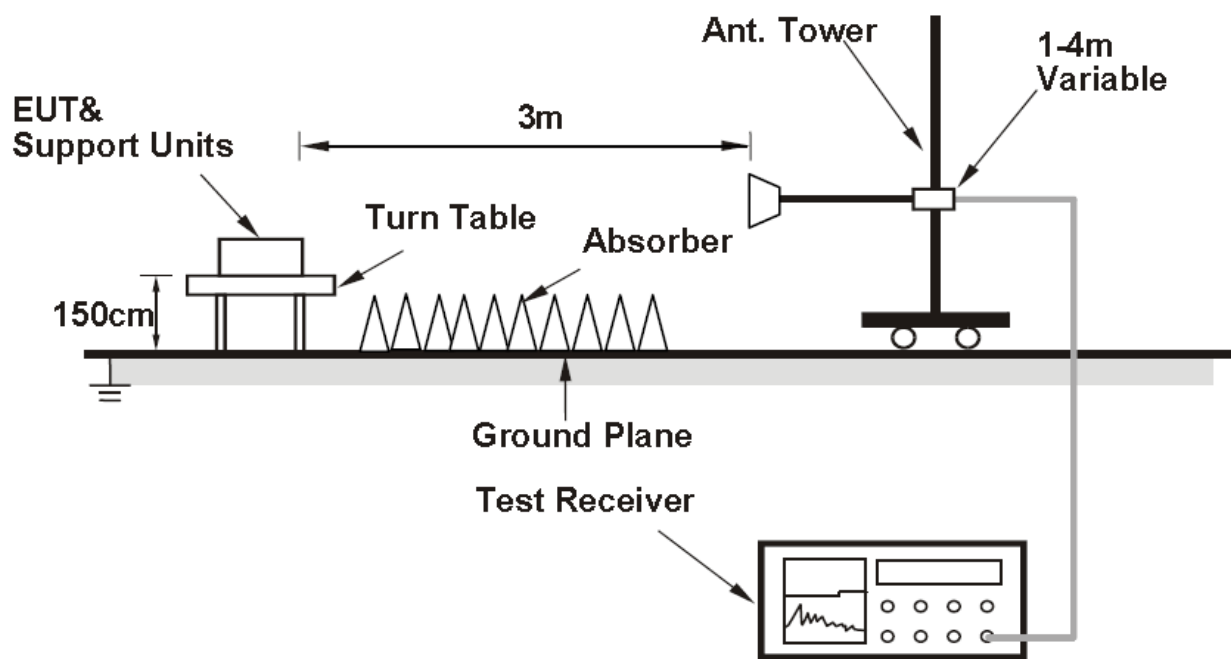

## 6.6.7 Test result

The test results are shown in Appendix B.

## 6.7 AC Power line Conducted Emission

### 6.7.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.7.2 Test limit

FCC Part15.207, RSS-247

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |            |
|-----------------------------|------------------------|------------|
| 0.15-0.5<br>0.5-5<br>5-30   | Quasi-peak             | Average    |
|                             | 66 to 56 *             | 56 to 46 * |
|                             | 56                     | 46         |
|                             | 60                     | 50         |

\* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

### 6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

#### 6.7.4 Test Setup

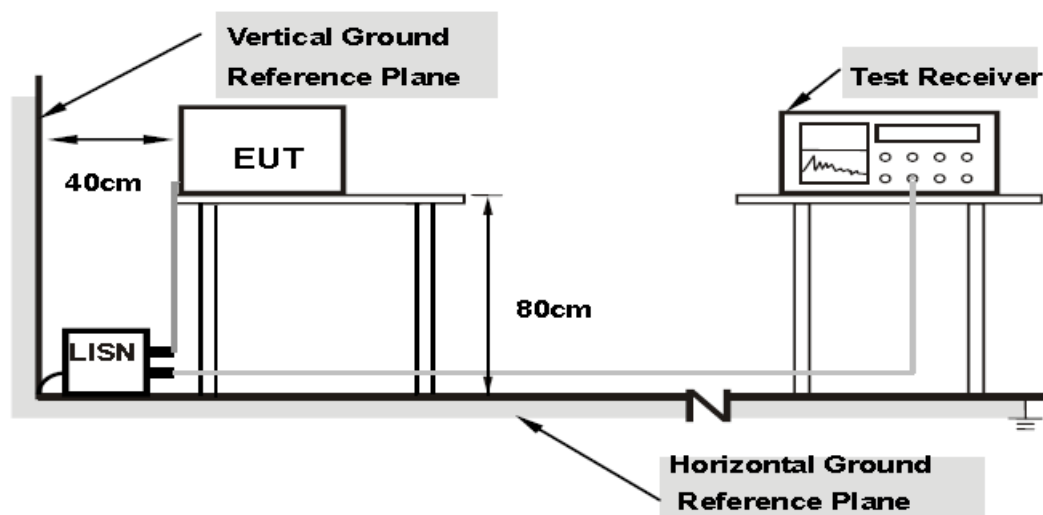

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 6.7.5 Test result

The test results are shown in AppendixB .

## **7 MEASUREMENT UNCERTAINTIES**

| Items                | Uncertainty    |        |
|----------------------|----------------|--------|
| Occupied Bandwidth   | 3kHz           |        |
| Peak power output    | 0.67dB         |        |
| Band edge compliance | 1.20dB         |        |
| Spurious emissions   | 30MHz~1GHz     | 2.83dB |
|                      | 1GHz~12.75GHz  | 2.50dB |
|                      | 12.75GHz~25GHz | 2.75dB |

## **8 TEST EQUIPMENTS**

| No. | Name/ Model                                       | Manufacturer  | S/N        | Cal date   | Cal Due date |
|-----|---------------------------------------------------|---------------|------------|------------|--------------|
| 1.  | Spectrum Analyzer FSV                             | ROHDE&SCHWARZ | 101065     | 2017.08.20 | 2018.08.19   |
| 2.  | Power Meter E4416A                                | Agilent       | MY52370013 | 2018.03.01 | 2019.02.28   |
| 3.  | Power Sensor E9327A                               | Agilent       | MY52420006 | 2018.03.01 | 2019.02.28   |
| 4.  | 23.18m×16.88m×9.60m<br>Semi-Anechoic Chamber      | FRANKONIA     | ---        | ----       | ----         |
| 5.  | 12.65m×8.03m×7.50m<br>Fully-Anechoic Chamber      | FRANKONIA     | ----       | ----       | ----         |
| 6.  | Turn table Diameter:5m                            | HD            | ----       | ----       | ----         |
| 7.  | Turn table Diameter:1m                            | HD            | ----       | ----       | ----         |
| 8.  | Antenna master<br>FAC(MA4.0)                      | MATURO        | ----       | ----       | ----         |
| 9.  | Antenna master<br>SAC(MA4.0)                      | MATURO        | ----       | ----       | ----         |
| 10. | 9.080m×5.255m×3.525m<br>Shielding room            | FRANKONIA     | ----       | ----       | ----         |
| 11. | HF 906 Double-Ridged<br>Waveguide Horn<br>Antenna | R&S           | 100029     | 2017.08.20 | 2018.08.19   |
| 12. | HF 906 Double-Ridged<br>Waveguide Horn<br>Antenna | R&S           | 100030     | 2017.08.20 | 2018.08.19   |
| 13. | HL562 Ultra log antenna                           | R&S           | 100016     | 2017.08.20 | 2018.08.19   |
| 14. | 3160-09 Receive antenna                           | SCHWARZ-BECK  | 002058-002 | 2017.08.20 | 2018.08.19   |
| 15. | ESI 40 EMI test receiver                          | R&S           | 100015     | 2017.08.20 | 2018.08.19   |
| 16. | ESCS30 EMI test<br>receiver                       | R&S           | 100029     | 2017.08.20 | 2018.08.19   |
| 17. | ESH3-Z5 LISN                                      | R&S           | 100020     | 2017.08.20 | 2018.08.19   |
| 18. | HFH2-Z2                                           | R&S           | 100340     | 2017.08.20 | 2018.08.19   |

## **APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

Please refer to the attachment.

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

Please refer to the attachment.

## APPENDIX A – TEST DATA OF CONDUCTED EMISSION

### Peak Power Output test result (SISO Ant0)

| Modulation type |            | Peak power output (dBm) |         |         |
|-----------------|------------|-------------------------|---------|---------|
|                 |            | 2412MHz                 | 2437MHz | 2462MHz |
| 11b             | 1 Mbps     | 20.77                   | 20.83   | 20.87   |
|                 | 2 Mbps     | 20.76                   | 20.82   | 20.85   |
|                 | 5.5 Mbps   | 20.75                   | 20.79   | 20.79   |
|                 | 11 Mbps    | 20.70                   | 20.76   | 20.78   |
| 11g             | 6 Mbps     | 22.01                   | 22.13   | 22.14   |
|                 | 9 Mbps     | 22.23                   | 22.45   | 22.34   |
|                 | 12 Mbps    | 22.45                   | 22.52   | 22.45   |
|                 | 18 Mbps    | 22.67                   | 22.67   | 22.64   |
|                 | 24 Mbps    | 22.89                   | 22.85   | 22.87   |
|                 | 36 Mbps    | 22.93                   | 23.23   | 22.93   |
|                 | 48 Mbps    | 23.14                   | 23.67   | 23.45   |
|                 | 54 Mbps    | 23.37                   | 23.94   | 23.87   |
| 11n<br>HT20     | 6.5 Mbps   | 21.13                   | 21.27   | 21.32   |
|                 | 13 Mbps    | 21.24                   | 21.45   | 21.45   |
|                 | 19.5 Mbps  | 21.34                   | 21.78   | 21.67   |
|                 | 26 Mbps    | 21.56                   | 21.93   | 21.73   |
|                 | 39 Mbps    | 22.04                   | 22.34   | 22.03   |
|                 | 52 Mbps    | 22.67                   | 22.67   | 22.35   |
|                 | 58.5 Mbps  | 22.75                   | 22.86   | 22.78   |
|                 | 65 Mbps    | 23.13                   | 23.37   | 23.34   |
| Modulation type |            | Peak power output (dBm) |         |         |
|                 |            | 2422MHz                 | 2437MHz | 2452MHz |
| 11n<br>HT40     | 13.5 Mbps  | 19.54                   | 19.60   | 19.66   |
|                 | 27 Mbps    | 19.78                   | 19.78   | 19.75   |
|                 | 40.5 Mbps  | 20.12                   | 19.82   | 19.83   |
|                 | 54 Mbps    | 20.23                   | 19.93   | 20.13   |
|                 | 81 Mbps    | 20.34                   | 20.13   | 20.34   |
|                 | 108 Mbps   | 20.42                   | 20.34   | 20.45   |
|                 | 121.5 Mbps | 20.56                   | 20.56   | 20.62   |
|                 | 135 Mbps   | 20.68                   | 20.75   | 20.75   |

| Modulation type |            | Average power output (dBm) |         |         |
|-----------------|------------|----------------------------|---------|---------|
|                 |            | 2412MHz                    | 2437MHz | 2462MHz |
| 11b             | 1 Mbps     | 18.56                      | 18.59   | 18.74   |
|                 | 2 Mbps     | 18.48                      | 18.48   | 18.68   |
|                 | 5.5 Mbps   | 18.39                      | 18.42   | 18.62   |
|                 | 11 Mbps    | 18.29                      | 18.36   | 18.54   |
| 11g             | 6 Mbps     | 17.65                      | 17.83   | 18.03   |
|                 | 9 Mbps     | 17.56                      | 17.45   | 17.89   |
|                 | 12 Mbps    | 17.45                      | 17.35   | 17.68   |
|                 | 18 Mbps    | 17.12                      | 17.12   | 17.52   |
|                 | 24 Mbps    | 16.87                      | 16.67   | 17.46   |
|                 | 36 Mbps    | 16.45                      | 16.38   | 16.56   |
|                 | 48 Mbps    | 15.78                      | 15.89   | 16.21   |
|                 | 54 Mbps    | 15.66                      | 15.72   | 15.82   |
| 11n<br>HT20     | 6.5 Mbps   | 16.65                      | 16.77   | 16.89   |
|                 | 13 Mbps    | 16.43                      | 16.45   | 16.54   |
|                 | 19.5 Mbps  | 16.23                      | 16.37   | 16.37   |
|                 | 26 Mbps    | 16.12                      | 16.13   | 16.23   |
|                 | 39 Mbps    | 16.01                      | 15.87   | 15.69   |
|                 | 52 Mbps    | 15.78                      | 15.46   | 15.34   |
|                 | 58.5 Mbps  | 15.23                      | 15.12   | 15.12   |
|                 | 65 Mbps    | 14.55                      | 14.67   | 14.79   |
| Modulation type |            | Average power output (dBm) |         |         |
|                 |            | 2422MHz                    | 2437MHz | 2452MHz |
| 11n<br>HT40     | 13.5 Mbps  | 16.12                      | 16.08   | 16.14   |
|                 | 27 Mbps    | 15.88                      | 15.97   | 16.01   |
|                 | 40.5 Mbps  | 15.67                      | 15.87   | 15.89   |
|                 | 54 Mbps    | 15.45                      | 15.64   | 15.78   |
|                 | 81 Mbps    | 15.39                      | 15.37   | 15.54   |
|                 | 108 Mbps   | 15.32                      | 15.32   | 15.42   |
|                 | 121.5 Mbps | 15.24                      | 15.24   | 15.25   |
|                 | 135 Mbps   | 15.08                      | 15.11   | 15.12   |

### Peak Power Output test result (SISO Ant1)

| Modulation type |            | Peak power output (dBm) |         |         |
|-----------------|------------|-------------------------|---------|---------|
|                 |            | 2412MHz                 | 2437MHz | 2462MHz |
| 11b             | 1 Mbps     | 20.74                   | 20.82   | 20.84   |
|                 | 2 Mbps     | 20.73                   | 20.81   | 20.84   |
|                 | 5.5 Mbps   | 20.74                   | 20.76   | 20.82   |
|                 | 11 Mbps    | 20.72                   | 20.73   | 20.84   |
| 11g             | 6 Mbps     | 22.02                   | 22.08   | 22.11   |
|                 | 9 Mbps     | 22.13                   | 22.13   | 22.34   |
|                 | 12 Mbps    | 22.34                   | 22.35   | 22.45   |
|                 | 18 Mbps    | 22.35                   | 22.46   | 22.46   |
|                 | 24 Mbps    | 22.45                   | 22.57   | 22.78   |
|                 | 36 Mbps    | 22.68                   | 22.78   | 23.01   |
|                 | 48 Mbps    | 22.87                   | 23.12   | 23.34   |
|                 | 54 Mbps    | 23.34                   | 23.67   | 23.74   |
| 11n<br>HT20     | 6.5 Mbps   | 21.12                   | 21.23   | 21.16   |
|                 | 13 Mbps    | 21.23                   | 21.46   | 21.23   |
|                 | 19.5 Mbps  | 21.35                   | 21.78   | 21.45   |
|                 | 26 Mbps    | 21.46                   | 22.21   | 21.67   |
|                 | 39 Mbps    | 22.34                   | 22.45   | 22.34   |
|                 | 52 Mbps    | 22.56                   | 22.67   | 22.37   |
|                 | 58.5 Mbps  | 22.78                   | 23.01   | 22.78   |
|                 | 65 Mbps    | 23.05                   | 23.24   | 23.12   |
| Modulation type |            | Peak power output (dBm) |         |         |
|                 |            | 2422MHz                 | 2437MHz | 2452MHz |
| 11n<br>HT40     | 13.5 Mbps  | 19.52                   | 19.47   | 19.39   |
|                 | 27 Mbps    | 19.67                   | 19.65   | 19.58   |
|                 | 40.5 Mbps  | 19.82                   | 19.83   | 19.78   |
|                 | 54 Mbps    | 19.97                   | 20.01   | 19.97   |
|                 | 81 Mbps    | 20.11                   | 20.20   | 20.16   |
|                 | 108 Mbps   | 20.26                   | 20.38   | 20.35   |
|                 | 121.5 Mbps | 20.41                   | 20.56   | 20.55   |
|                 | 135 Mbps   | 20.56                   | 20.74   | 20.73   |

| Modulation type |            | Average power output (dBm) |         |         |
|-----------------|------------|----------------------------|---------|---------|
|                 |            | 2412MHz                    | 2437MHz | 2462MHz |
| 11b             | 1 Mbps     | 18.53                      | 18.52   | 18.74   |
|                 | 2 Mbps     | 18.43                      | 18.47   | 18.68   |
|                 | 5.5 Mbps   | 18.34                      | 18.41   | 18.54   |
|                 | 11 Mbps    | 18.24                      | 18.35   | 18.47   |
| 11g             | 6 Mbps     | 17.63                      | 17.82   | 18.02   |
|                 | 9 Mbps     | 17.35                      | 17.52   | 17.71   |
|                 | 12 Mbps    | 17.07                      | 17.22   | 17.39   |
|                 | 18 Mbps    | 16.79                      | 16.92   | 17.08   |
|                 | 24 Mbps    | 16.50                      | 16.62   | 16.76   |
|                 | 36 Mbps    | 16.22                      | 16.32   | 16.45   |
|                 | 48 Mbps    | 15.94                      | 16.02   | 16.13   |
|                 | 54 Mbps    | 15.66                      | 15.72   | 15.82   |
| 11n<br>HT20     | 6.5 Mbps   | 16.64                      | 16.74   | 16.86   |
|                 | 13 Mbps    | 16.48                      | 16.38   | 16.55   |
|                 | 19.5 Mbps  | 16.32                      | 16.08   | 16.23   |
|                 | 26 Mbps    | 16.16                      | 15.79   | 15.92   |
|                 | 39 Mbps    | 16.01                      | 15.50   | 15.61   |
|                 | 52 Mbps    | 15.85                      | 15.21   | 15.30   |
|                 | 58.5 Mbps  | 15.69                      | 14.91   | 14.98   |
|                 | 65 Mbps    | 14.53                      | 14.62   | 14.76   |
| Modulation type |            | Average power output (dBm) |         |         |
|                 |            | 2422MHz                    | 2437MHz | 2452MHz |
| 11n<br>HT40     | 13.5 Mbps  | 16.14                      | 16.05   | 16.12   |
|                 | 27 Mbps    | 15.99                      | 15.92   | 15.98   |
|                 | 40.5 Mbps  | 15.85                      | 15.79   | 15.84   |
|                 | 54 Mbps    | 15.70                      | 15.66   | 15.70   |
|                 | 81 Mbps    | 15.55                      | 15.52   | 15.57   |
|                 | 108 Mbps   | 15.40                      | 15.39   | 15.43   |
|                 | 121.5 Mbps | 15.26                      | 15.26   | 15.29   |
|                 | 135 Mbps   | 15.11                      | 15.13   | 15.15   |

### Peak Power Output test result (MIMO Ant0+Ant1)

| Modulation type               |           | Peak power output (dBm) |         |         |
|-------------------------------|-----------|-------------------------|---------|---------|
|                               |           | 2412MHz                 | 2437MHz | 2462MHz |
| 11n<br>HT20<br>MIMO Ant0      | 6.5 Mbps  | 21.03                   | 21.19   | 21.35   |
|                               | 13 Mbps   | 21.18                   | 21.39   | 21.46   |
|                               | 19.5 Mbps | 21.32                   | 21.60   | 21.57   |
|                               | 26 Mbps   | 21.47                   | 21.80   | 21.68   |
|                               | 39 Mbps   | 21.62                   | 22.01   | 21.80   |
|                               | 52 Mbps   | 21.77                   | 22.21   | 21.91   |
|                               | 58.5 Mbps | 21.91                   | 22.42   | 22.02   |
|                               | 65 Mbps   | 22.06                   | 22.62   | 22.13   |
| 11n<br>HT20<br>MIMO Ant1      | 6.5 Mbps  | 20.43                   | 20.17   | 19.94   |
|                               | 13 Mbps   | 20.69                   | 20.48   | 20.31   |
|                               | 19.5 Mbps | 20.95                   | 20.78   | 20.68   |
|                               | 26 Mbps   | 21.21                   | 21.09   | 21.05   |
|                               | 39 Mbps   | 21.47                   | 21.40   | 21.43   |
|                               | 52 Mbps   | 21.73                   | 21.71   | 21.80   |
|                               | 58.5 Mbps | 21.99                   | 22.01   | 22.17   |
|                               | 65 Mbps   | 22.25                   | 22.32   | 22.54   |
| 11n<br>HT20<br>MIMO Ant0+Ant1 | 6.5 Mbps  | 23.75                   | 23.72   | 23.71   |
|                               | 13 Mbps   | 23.95                   | 23.97   | 23.93   |
|                               | 19.5 Mbps | 24.15                   | 24.22   | 24.16   |
|                               | 26 Mbps   | 24.35                   | 24.47   | 24.39   |
|                               | 39 Mbps   | 24.56                   | 24.73   | 24.63   |
|                               | 52 Mbps   | 24.76                   | 24.98   | 24.87   |
|                               | 58.5 Mbps | 24.96                   | 25.23   | 25.11   |
|                               | 65 Mbps   | 25.17                   | 25.48   | 25.35   |

| Modulation type               |            | Peak power output (dBm) |         |         |
|-------------------------------|------------|-------------------------|---------|---------|
|                               |            | 2422MHz                 | 2437MHz | 2452MHz |
| 11n<br>HT40<br>MIMO Ant0      | 13.5 Mbps  | 20.05                   | 20.21   | 20.13   |
|                               | 27 Mbps    | 20.11                   | 20.35   | 20.23   |
|                               | 40.5 Mbps  | 20.18                   | 20.50   | 20.34   |
|                               | 54 Mbps    | 20.24                   | 20.64   | 20.44   |
|                               | 81 Mbps    | 20.31                   | 20.78   | 20.55   |
|                               | 108 Mbps   | 20.37                   | 20.92   | 20.65   |
|                               | 121.5 Mbps | 20.44                   | 21.07   | 20.76   |
|                               | 135 Mbps   | 20.50                   | 21.21   | 20.86   |
| 11n<br>HT40<br>MIMO Ant1      | 13.5 Mbps  | 19.56                   | 20.07   | 19.66   |
|                               | 27 Mbps    | 19.76                   | 20.21   | 19.76   |
|                               | 40.5 Mbps  | 19.95                   | 20.34   | 19.85   |
|                               | 54 Mbps    | 20.15                   | 20.48   | 19.95   |
|                               | 81 Mbps    | 20.34                   | 20.61   | 20.04   |
|                               | 108 Mbps   | 20.54                   | 20.75   | 20.14   |
|                               | 121.5 Mbps | 20.73                   | 20.88   | 20.23   |
|                               | 135 Mbps   | 20.93                   | 21.02   | 20.33   |
| 11n<br>HT40<br>MIMO Ant0+Ant1 | 13.5 Mbps  | 22.82                   | 23.15   | 22.91   |
|                               | 27 Mbps    | 22.95                   | 23.29   | 23.01   |
|                               | 40.5 Mbps  | 23.08                   | 23.43   | 23.11   |
|                               | 54 Mbps    | 23.21                   | 23.57   | 23.21   |
|                               | 81 Mbps    | 23.34                   | 23.71   | 23.31   |
|                               | 108 Mbps   | 23.47                   | 23.85   | 23.41   |
|                               | 121.5 Mbps | 23.60                   | 23.99   | 23.51   |
|                               | 135 Mbps   | 23.73                   | 24.13   | 23.61   |

| Modulation type               |           | Average power output (dBm) |         |         |
|-------------------------------|-----------|----------------------------|---------|---------|
|                               |           | 2412MHz                    | 2437MHz | 2462MHz |
| 11n<br>HT20<br>MIMO Ant0      | 6.5 Mbps  | 16.72                      | 16.86   | 16.95   |
|                               | 13 Mbps   | 16.38                      | 16.50   | 16.59   |
|                               | 19.5 Mbps | 16.03                      | 16.14   | 16.24   |
|                               | 26 Mbps   | 15.69                      | 15.78   | 15.88   |
|                               | 39 Mbps   | 15.35                      | 15.42   | 15.52   |
|                               | 52 Mbps   | 15.01                      | 15.06   | 15.16   |
|                               | 58.5 Mbps | 14.66                      | 14.70   | 14.81   |
|                               | 65 Mbps   | 14.32                      | 14.34   | 14.45   |
| 11n<br>HT20<br>MIMO Ant1      | 6.5 Mbps  | 16.38                      | 16.25   | 16.16   |
|                               | 13 Mbps   | 16.04                      | 15.93   | 15.87   |
|                               | 19.5 Mbps | 15.69                      | 15.61   | 15.57   |
|                               | 26 Mbps   | 15.35                      | 15.29   | 15.28   |
|                               | 39 Mbps   | 15.01                      | 14.98   | 14.99   |
|                               | 52 Mbps   | 14.67                      | 14.66   | 14.70   |
|                               | 58.5 Mbps | 14.32                      | 14.34   | 14.40   |
|                               | 65 Mbps   | 13.98                      | 14.02   | 14.11   |
| 11n<br>HT20<br>MIMO Ant0+Ant1 | 6.5 Mbps  | 19.56                      | 19.58   | 19.58   |
|                               | 13 Mbps   | 19.22                      | 19.23   | 19.26   |
|                               | 19.5 Mbps | 18.87                      | 18.89   | 18.93   |
|                               | 26 Mbps   | 18.53                      | 18.55   | 18.60   |
|                               | 39 Mbps   | 18.19                      | 18.22   | 18.27   |
|                               | 52 Mbps   | 17.85                      | 17.87   | 17.95   |
|                               | 58.5 Mbps | 17.50                      | 17.53   | 17.62   |
|                               | 65 Mbps   | 17.16                      | 17.19   | 17.29   |

| Modulation type               |            | Average power output (dBm) |         |         |
|-------------------------------|------------|----------------------------|---------|---------|
|                               |            | 2422MHz                    | 2437MHz | 2452MHz |
| 11n<br>HT40<br>MIMO Ant0      | 13.5 Mbps  | 16.13                      | 16.06   | 16.16   |
|                               | 27 Mbps    | 15.65                      | 15.59   | 15.68   |
|                               | 40.5 Mbps  | 15.18                      | 15.13   | 15.21   |
|                               | 54 Mbps    | 14.70                      | 14.66   | 14.73   |
|                               | 81 Mbps    | 14.22                      | 14.19   | 14.26   |
|                               | 108 Mbps   | 13.74                      | 13.72   | 13.78   |
|                               | 121.5 Mbps | 13.27                      | 13.26   | 13.31   |
|                               | 135 Mbps   | 12.79                      | 12.78   | 12.83   |
| 11n<br>HT40<br>MIMO Ant1      | 13.5 Mbps  | 15.27                      | 15.54   | 15.42   |
|                               | 27 Mbps    | 14.81                      | 15.08   | 14.97   |
|                               | 40.5 Mbps  | 14.35                      | 14.63   | 14.52   |
|                               | 54 Mbps    | 13.89                      | 14.17   | 14.07   |
|                               | 81 Mbps    | 13.43                      | 13.71   | 13.63   |
|                               | 108 Mbps   | 12.97                      | 13.25   | 13.18   |
|                               | 121.5 Mbps | 12.51                      | 12.80   | 12.73   |
|                               | 135 Mbps   | 12.05                      | 12.34   | 12.28   |
| 11n<br>HT40<br>MIMO Ant0+Ant1 | 13.5 Mbps  | 18.73                      | 18.82   | 18.82   |
|                               | 27 Mbps    | 18.26                      | 18.35   | 18.35   |
|                               | 40.5 Mbps  | 17.80                      | 17.90   | 17.89   |
|                               | 54 Mbps    | 17.32                      | 17.43   | 17.42   |
|                               | 81 Mbps    | 16.85                      | 16.97   | 16.97   |
|                               | 108 Mbps   | 16.38                      | 16.50   | 16.50   |
|                               | 121.5 Mbps | 15.92                      | 16.05   | 16.04   |
|                               | 135 Mbps   | 15.45                      | 15.58   | 15.57   |

In order to find the worst case condition,Pre-tests are needed at the presence of different data rate.Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.


| Test Mode    | Data Rate       |
|--------------|-----------------|
| 802.11b      | 1Mbps           |
| 802.11g      | 6Mbps           |
| 802.11n HT20 | MCS0(6.5 Mbps)  |
| 802.11n HT40 | MCS0(13.5 Mbps) |

## Occupied Bandwidth

Offset 10.5dB = Attenuator 10dB+ Temporary Ant connector loss 0.5dB

Test Mode: 802.11b(SISO Ant0)

| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2412                    | 1           | 9059.1              |
| 2437                    | 6           | 8999.1              |
| 2462                    | 11          | 9054.1              |

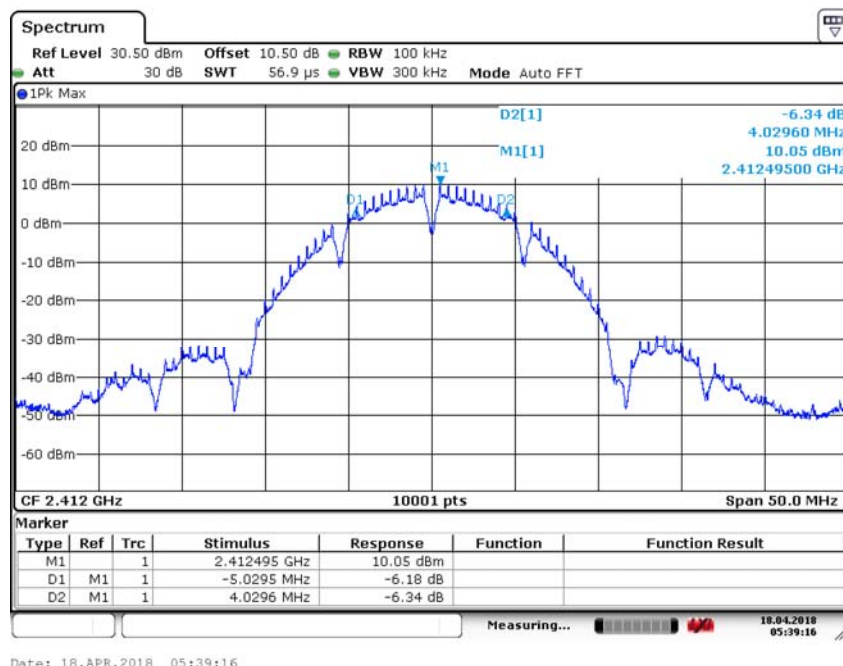


Date: 18.APR.2018 05:39:16


Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

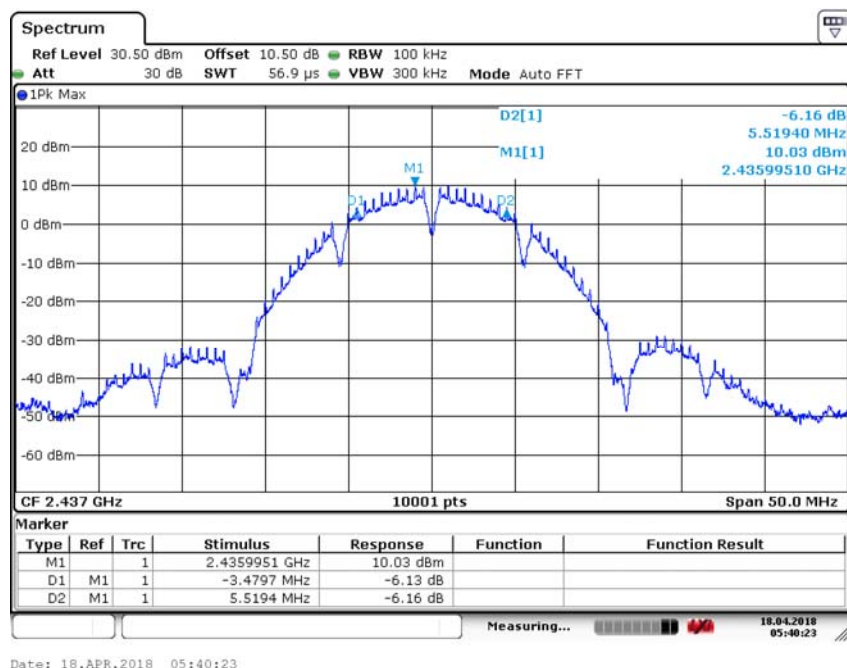


Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11b

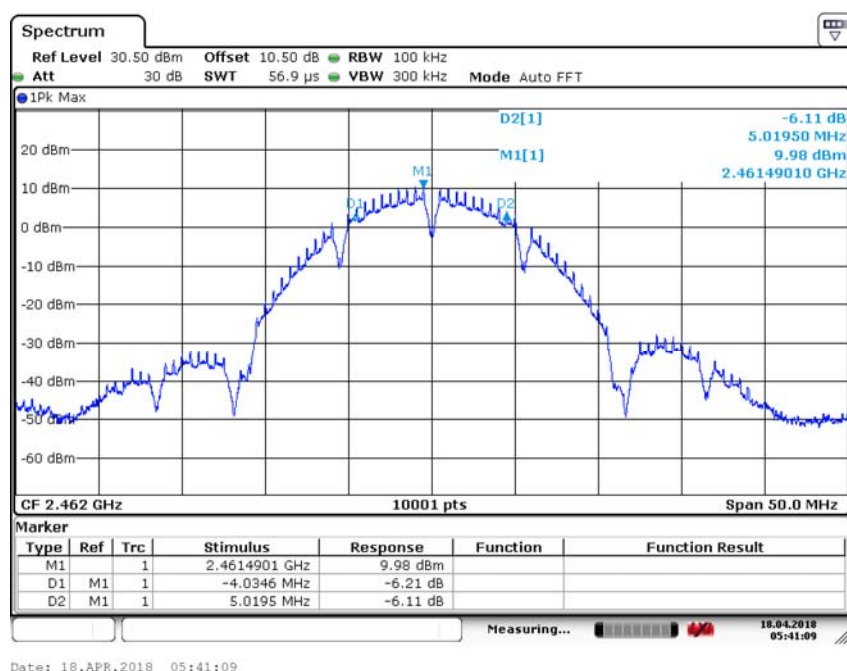

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b

Test Mode: 802.11g(SISO Ant0)


| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2412                    | 1           | 16283.4             |
| 2437                    | 6           | 16288.4             |
| 2462                    | 11          | 15843.4             |

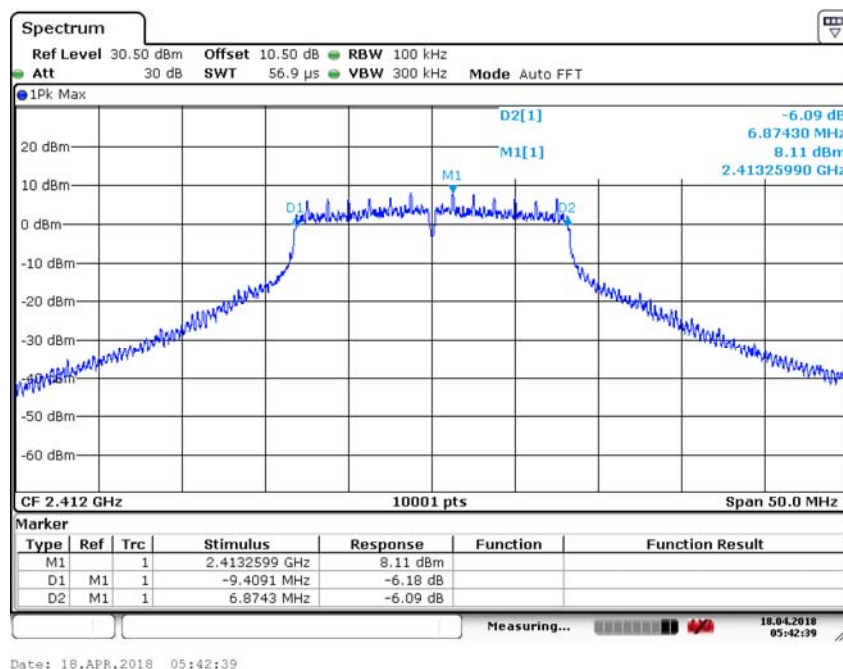


Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

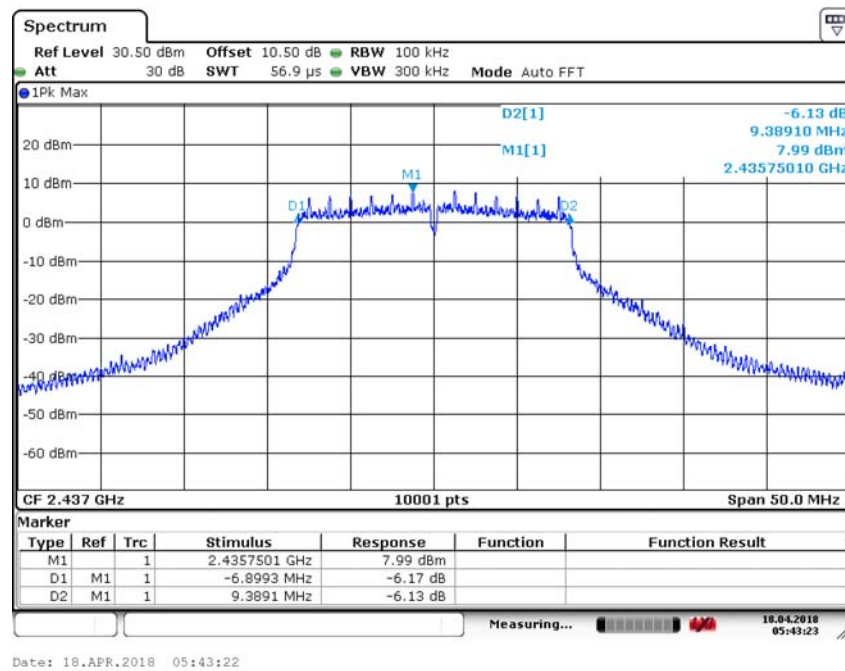


Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11g

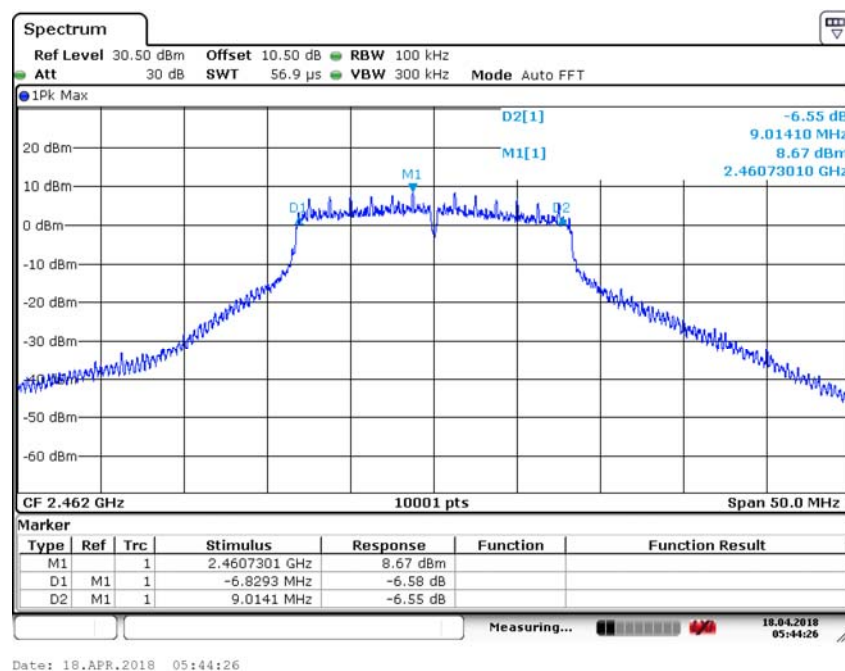

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g

Test Mode: 802.11n (HT20) (SISO Ant0)


| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2412                    | 1           | 16918.3             |
| 2437                    | 6           | 17138.3             |
| 2462                    | 11          | 16513.4             |

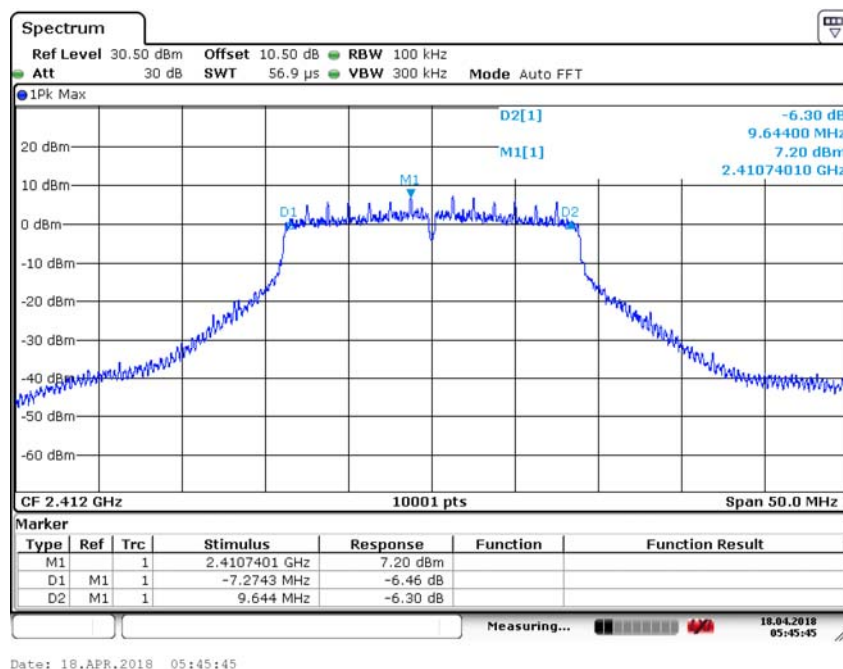


Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n (HT20)

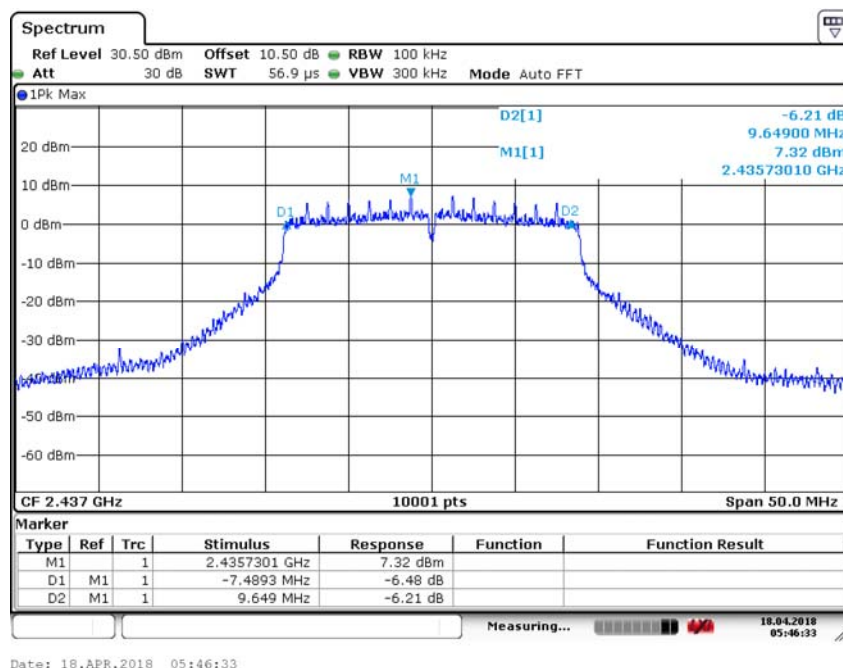


Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11n (HT20)

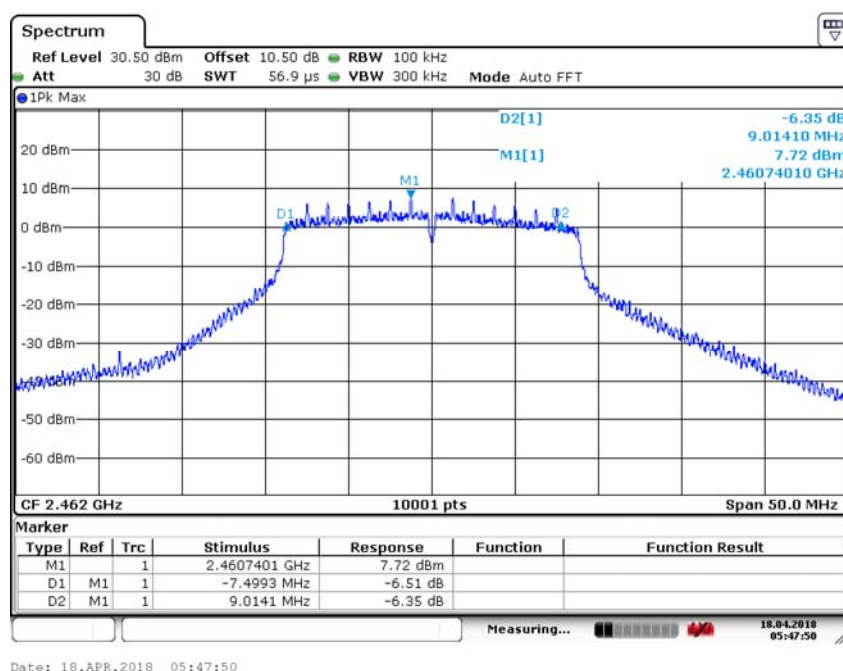

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n (HT20)

Test Mode: 802.11n (HT40) (SISO Ant0)


| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2422                    | 3           | 35897.0             |
| 2437                    | 6           | 35987.0             |
| 2452                    | 9           | 35687.0             |

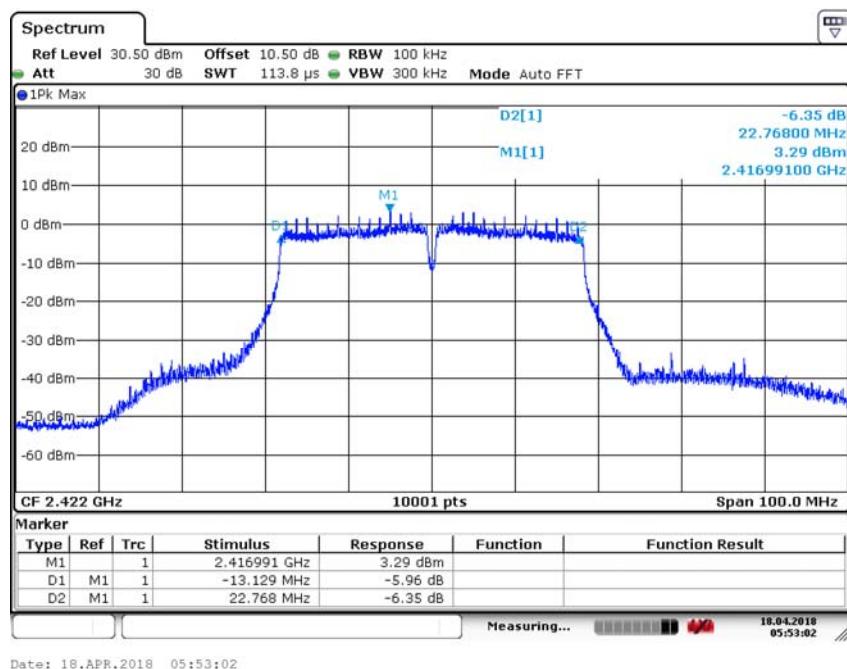

Carrier frequency (MHz): 2422

Channel No.:3


Test Mode: 802.11n (HT40)

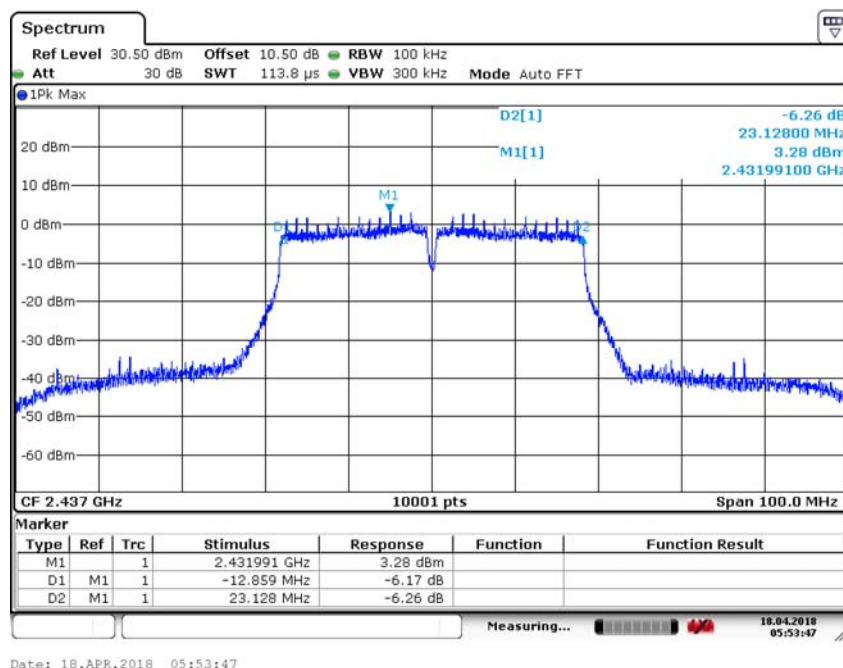

Carrier frequency (MHz): 2437

Channel No.:6

Test Mode: 802.11n (HT40)

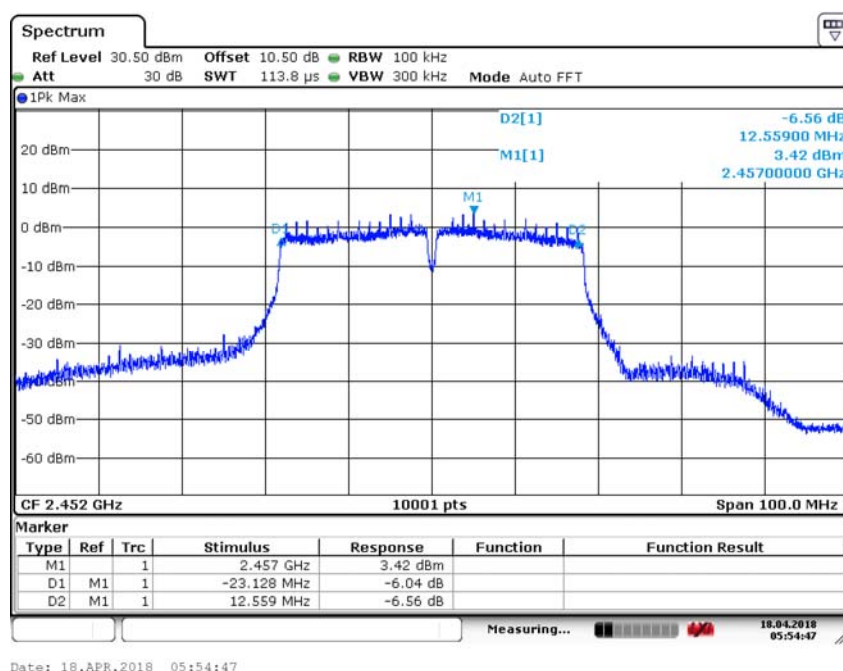


Carrier frequency (MHz): 2452

Channel No.:9

Test Mode: 802.11n (HT40)


Test Mode: 802.11n (HT20) (MIMO Ant0)

| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2412                    | 1           | 16763.3             |
| 2437                    | 6           | 16718.3             |
| 2462                    | 11          | 16328.4             |

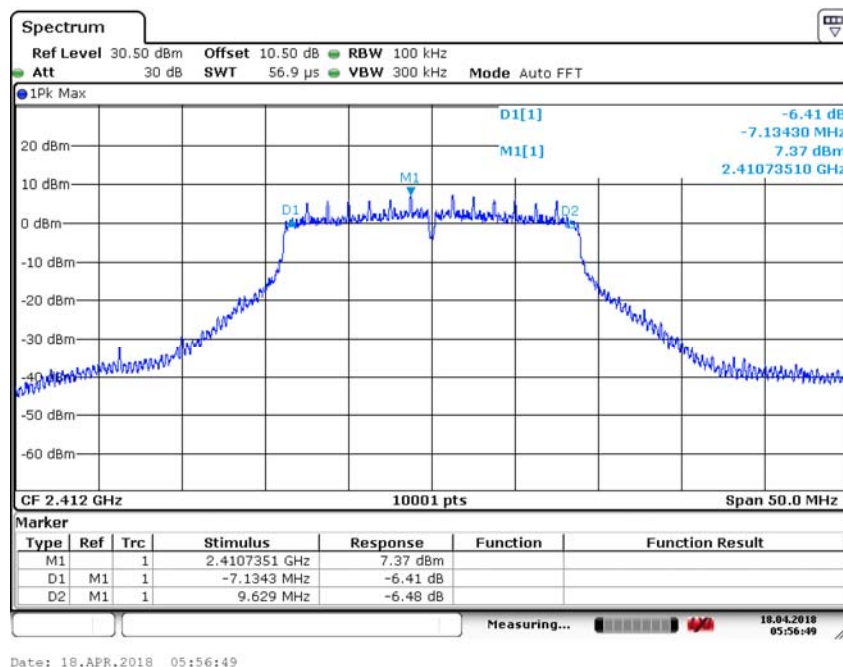


Date: 18.APR.2018 05:56:49

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n (HT20)

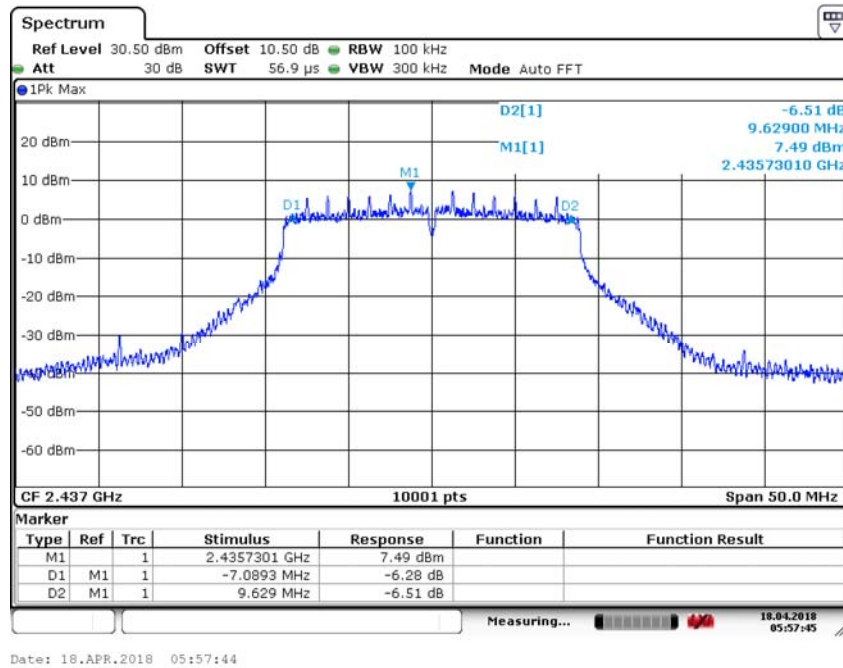


Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11n (HT20)

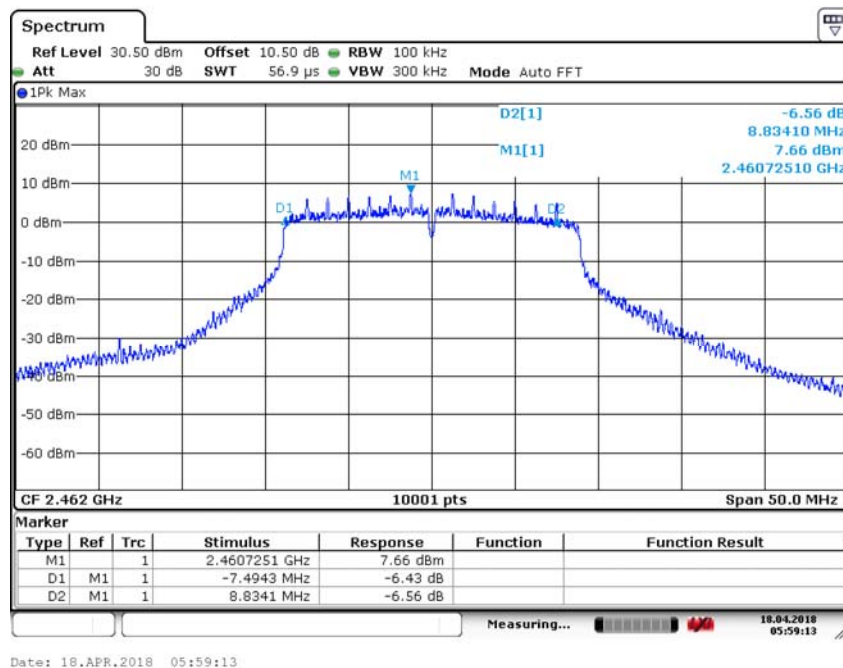

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n (HT20)


Test Mode: 802.11n (HT20) (MIMO Ant1)

| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2412                    | 1           | 15723.5             |
| 2437                    | 6           | 16688.4             |
| 2462                    | 11          | 16863.4             |

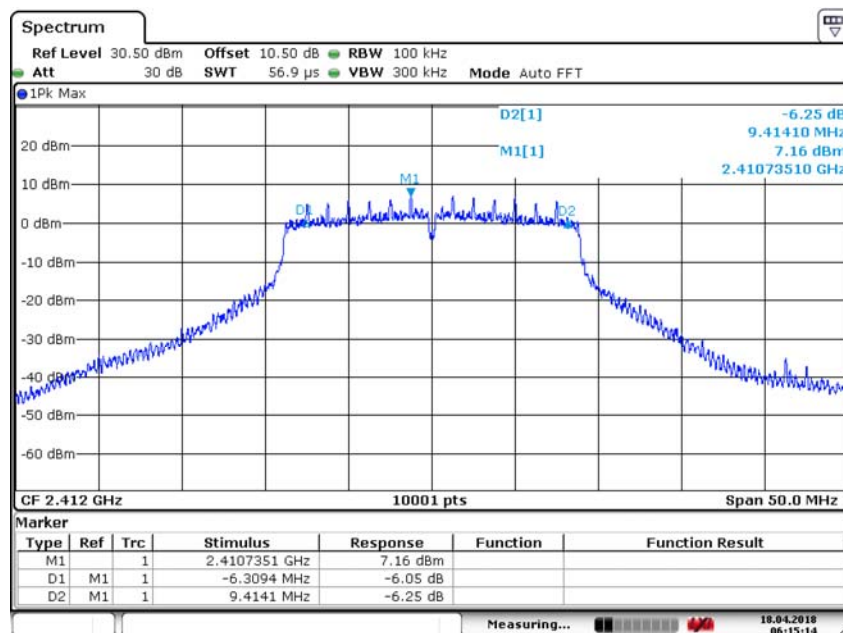


Date: 18.APR.2018 06:15:13

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n (HT20)

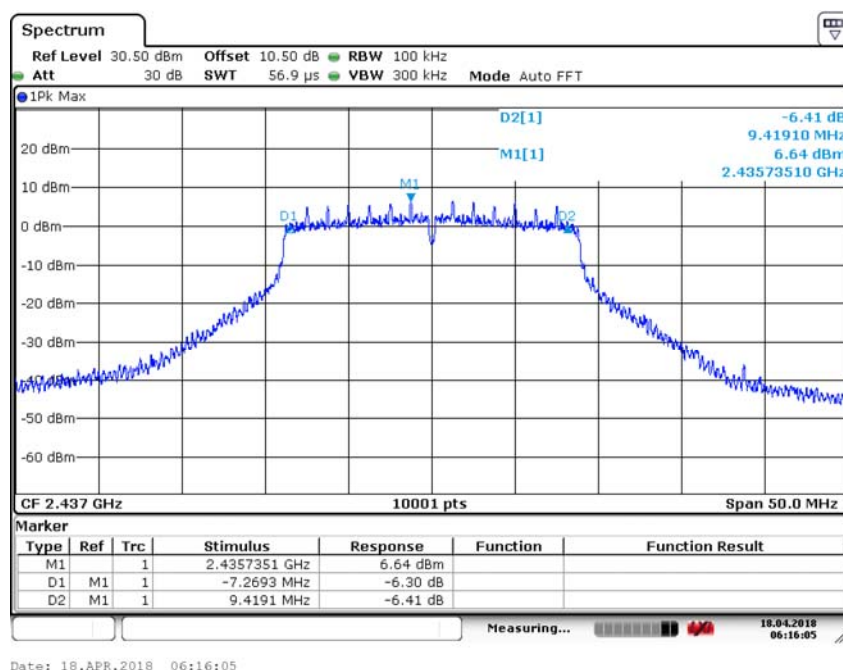


Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11n (HT20)

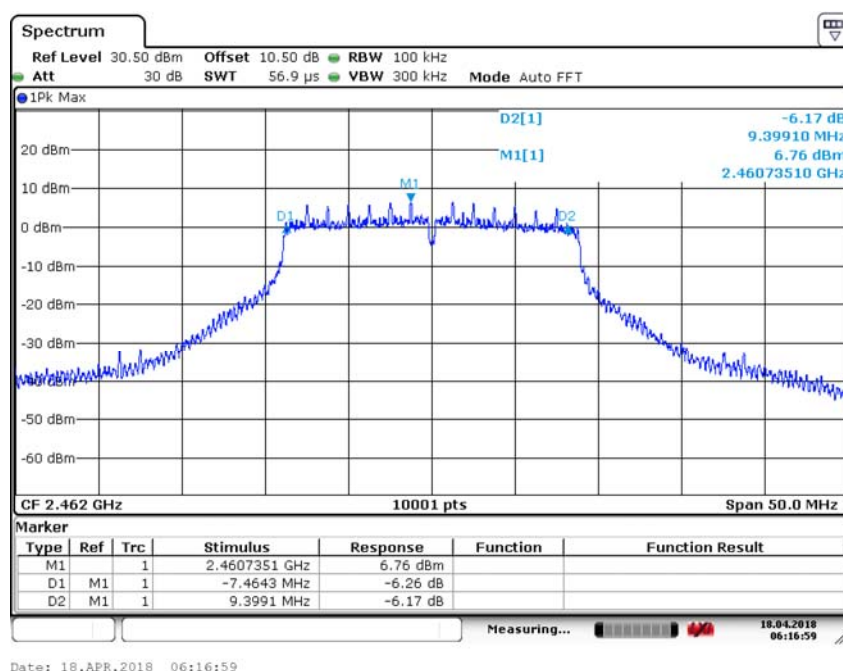


Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n (HT20)

Test Mode: 802.11n (HT40) (MIMO Ant0)

| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2422                    | 3           | 35137.0             |
| 2437                    | 6           | 35147.0             |
| 2452                    | 9           | 35437.0             |

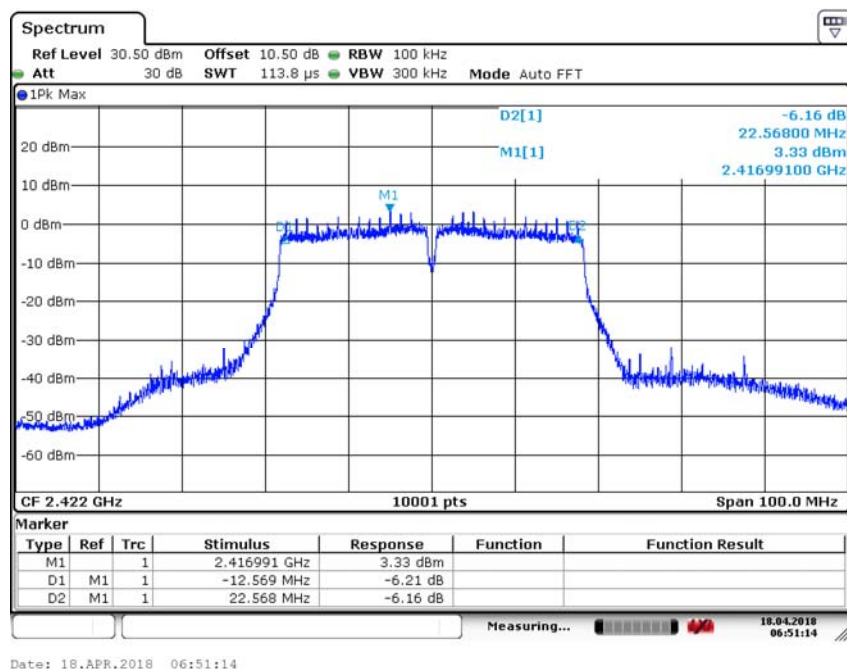


Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n (HT40)

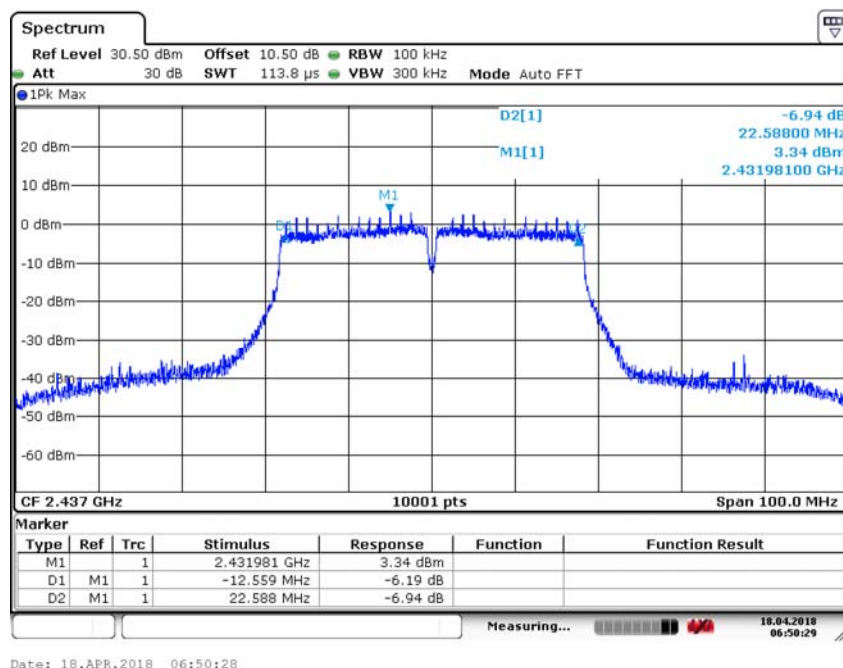

Carrier frequency (MHz): 2437

Channel No.:6

Test Mode: 802.11n (HT40)

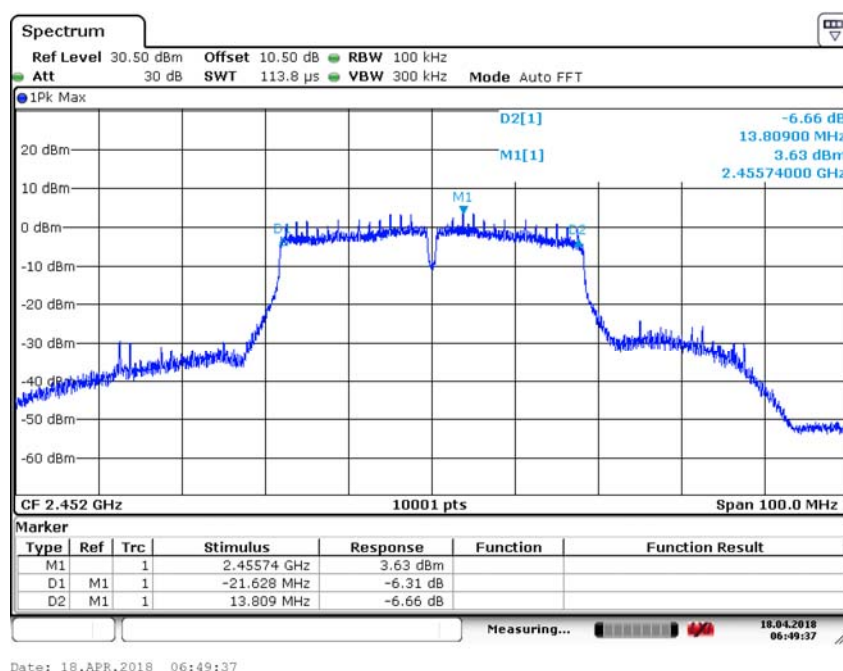


Carrier frequency (MHz): 2452

Channel No.:9

Test Mode: 802.11n (HT40)


Test Mode: 802.11n (HT40) (MIMO Ant1)

| Carrier frequency (MHz) | Channel No. | 6 dB bandwidth(kHz) |
|-------------------------|-------------|---------------------|
| 2422                    | 3           | 35517.0             |
| 2437                    | 6           | 35717.0             |
| 2452                    | 9           | 35327.0             |

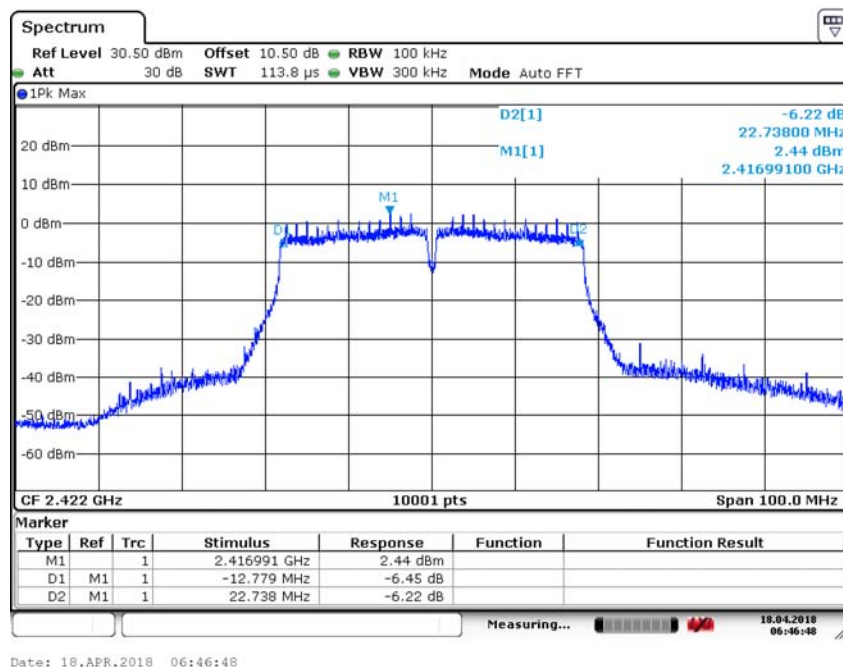


Date: 18.APR.2018 06:46:48

Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n (HT40)

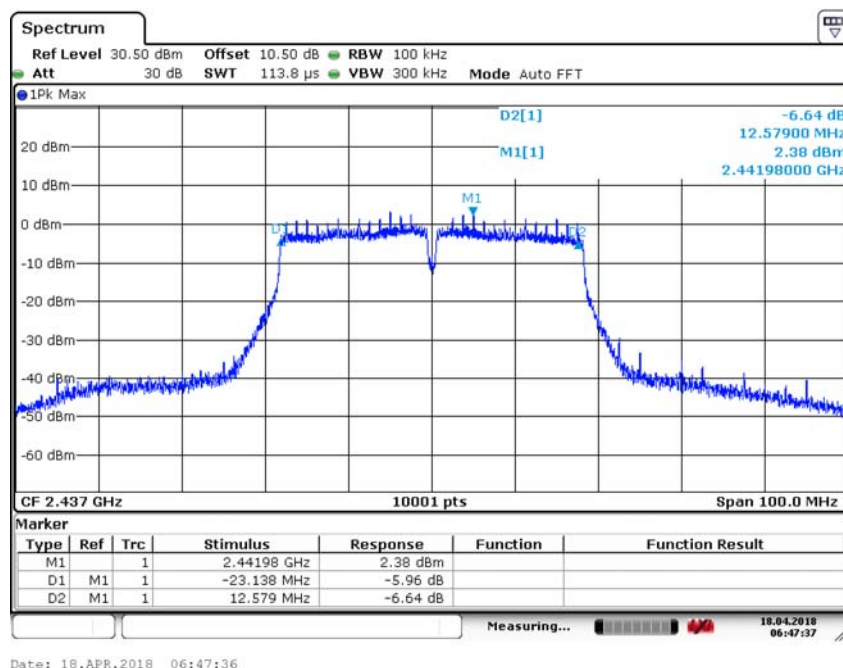

Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11n (HT40)

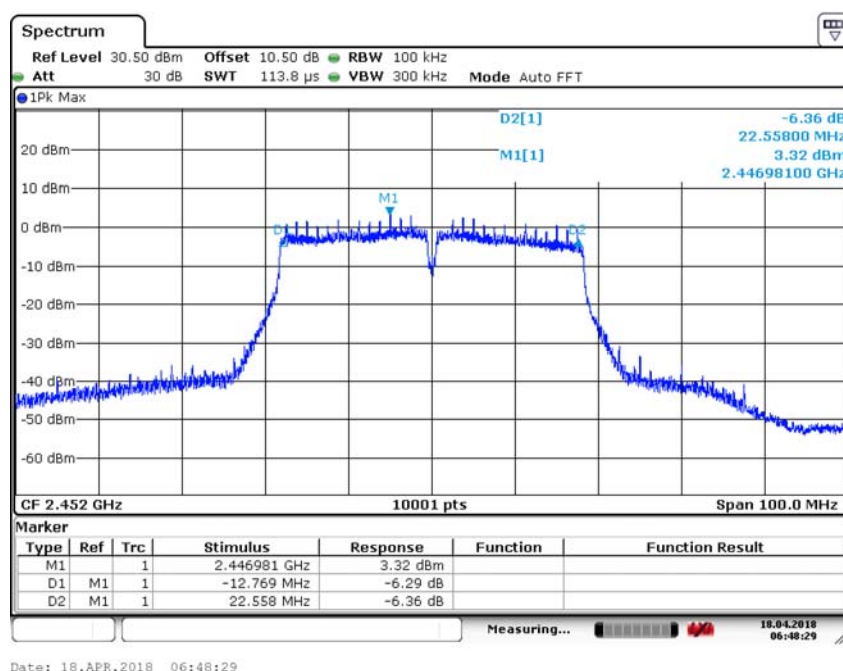


Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n (HT40)

## Transmitter Power Spectral Density


Offset 10.5dB = Attenuator 10dB+ Temporary Ant connector loss 0.5dB

Test Mode: 802.11b (SISO Ant 0)


| Carrier frequency (MHz) | Channel No | Power Density (dBm) |
|-------------------------|------------|---------------------|
| 2412                    | 1          | -3.55               |
| 2437                    | 6          | -4.57               |
| 2462                    | 11         | -3.33               |

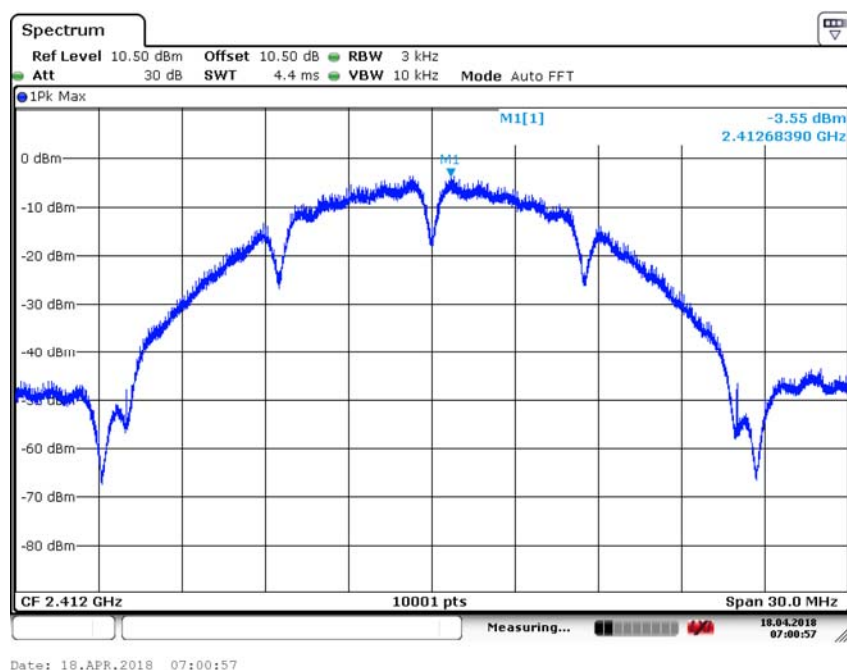

Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11b

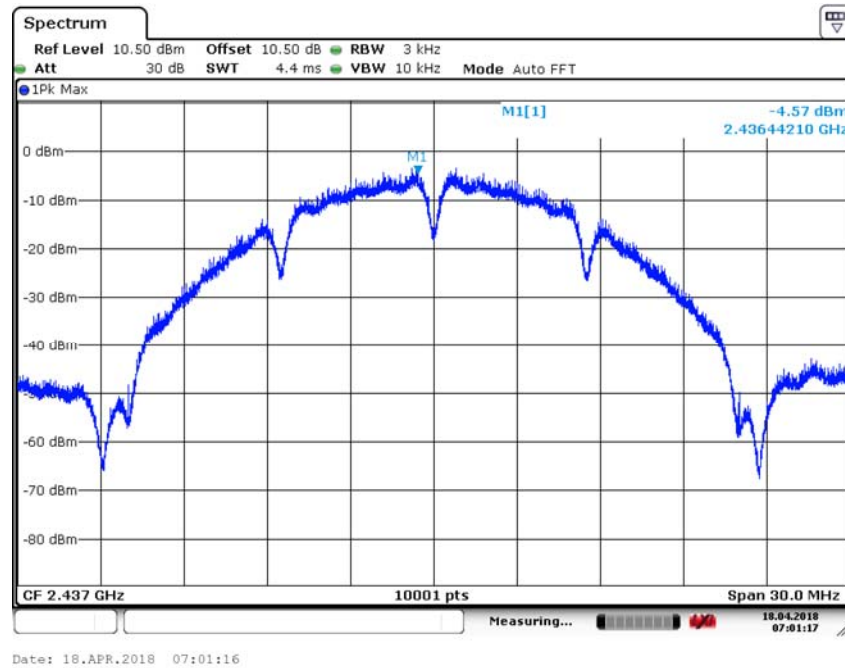


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11b

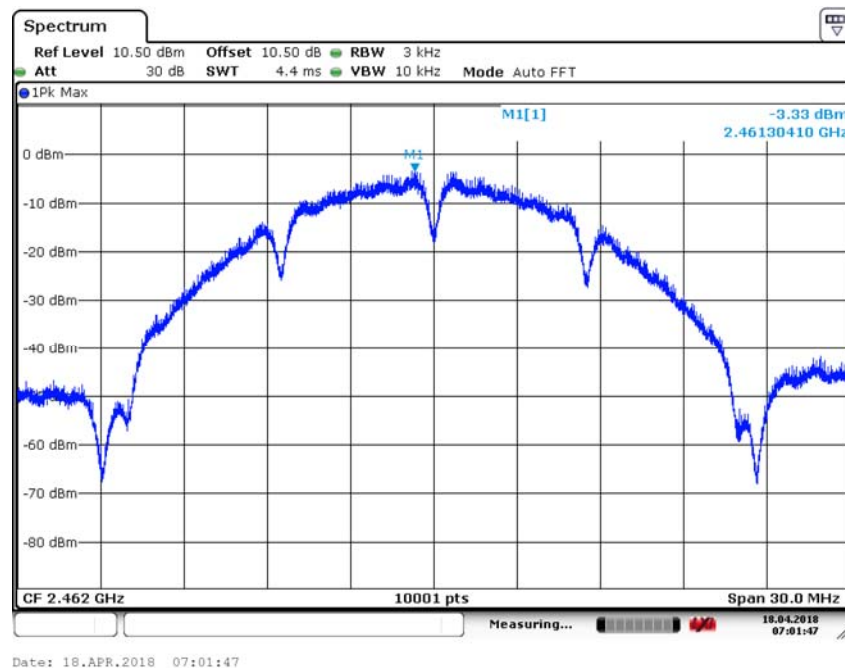


Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11b

Test Mode: 802.11g (SISO Ant 0)


| Carrier frequency (MHz) | Channel No | Power Density (dBm) |
|-------------------------|------------|---------------------|
| 2412                    | 1          | -5.45               |
| 2442                    | 6          | -6.02               |
| 2472                    | 11         | -5.40               |

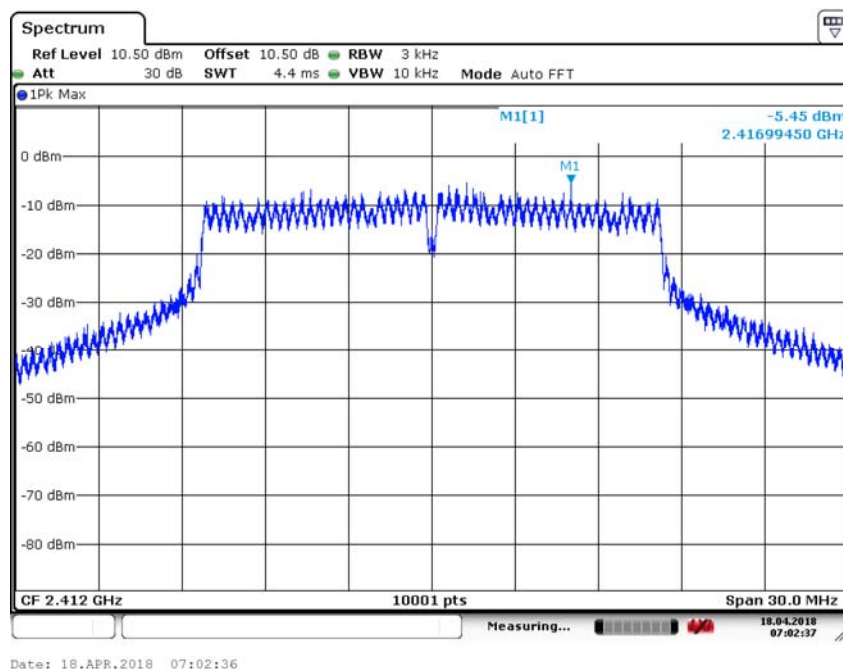

Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11g

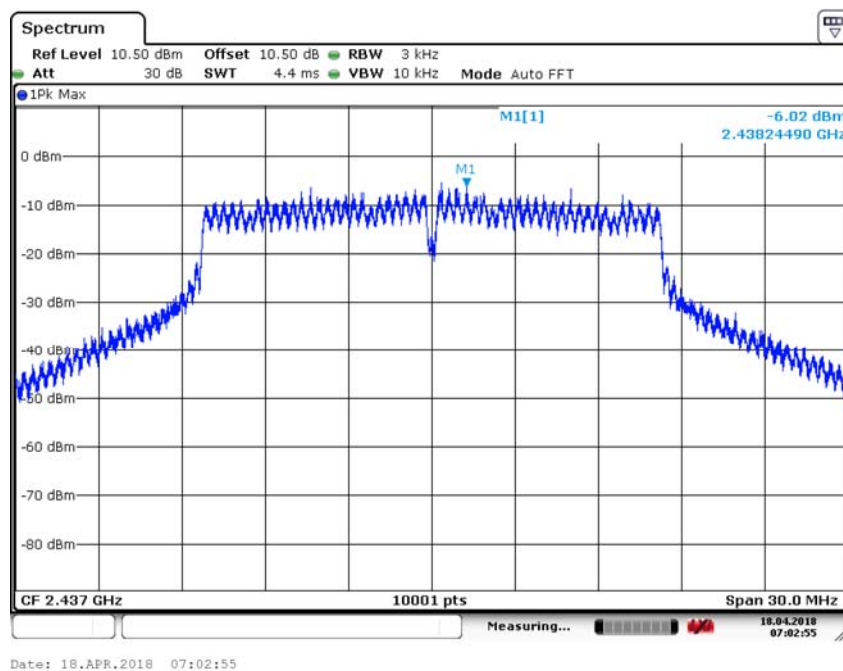


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11g

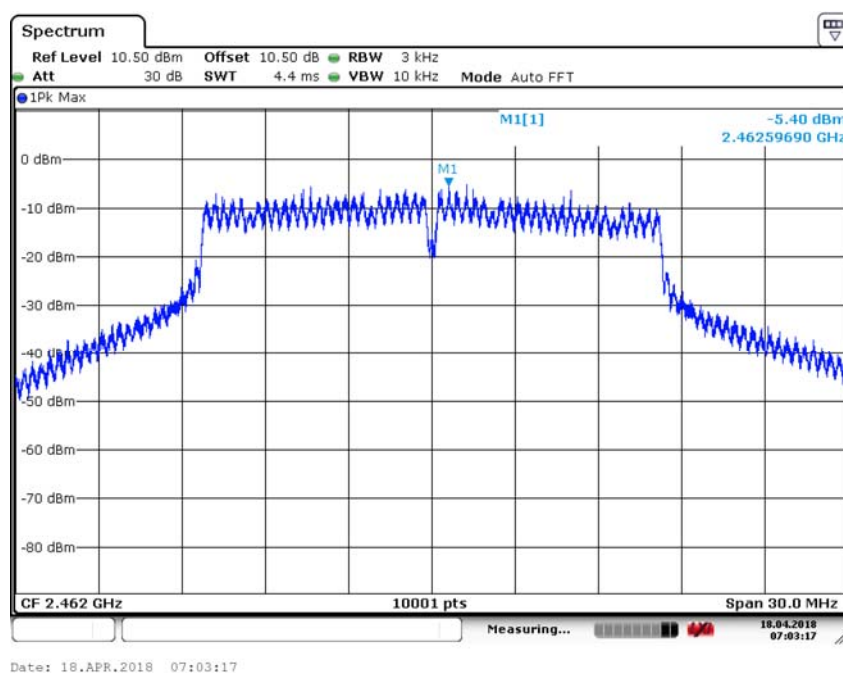


Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11g

Test Mode: 802.11n (HT20) (SISO Ant 0)


| Carrier frequency (MHz) | Channel No | Power Density (dBm) |
|-------------------------|------------|---------------------|
| 2412                    | 1          | -6.90               |
| 2437                    | 6          | -6.90               |
| 2462                    | 11         | -6.78               |

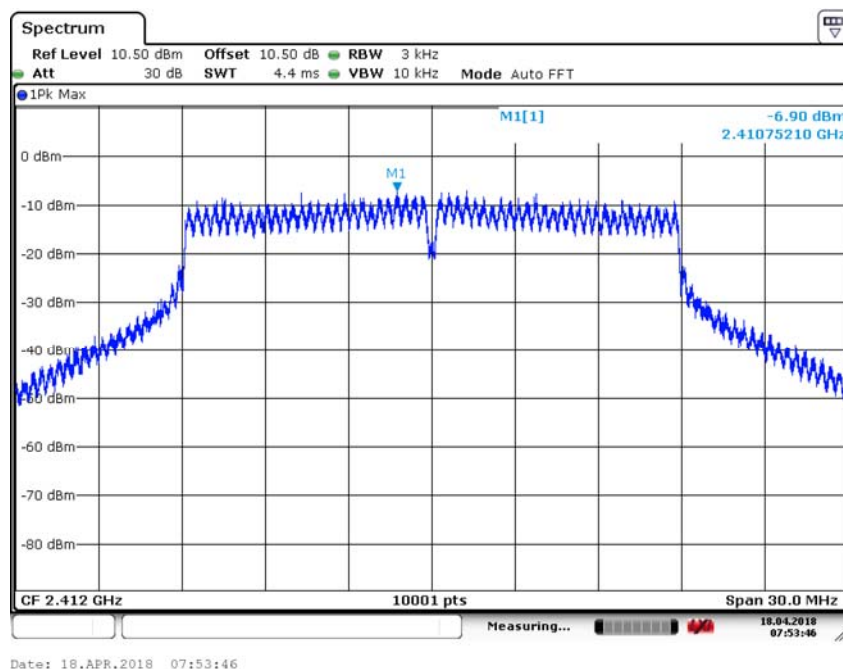

Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11n (HT20)

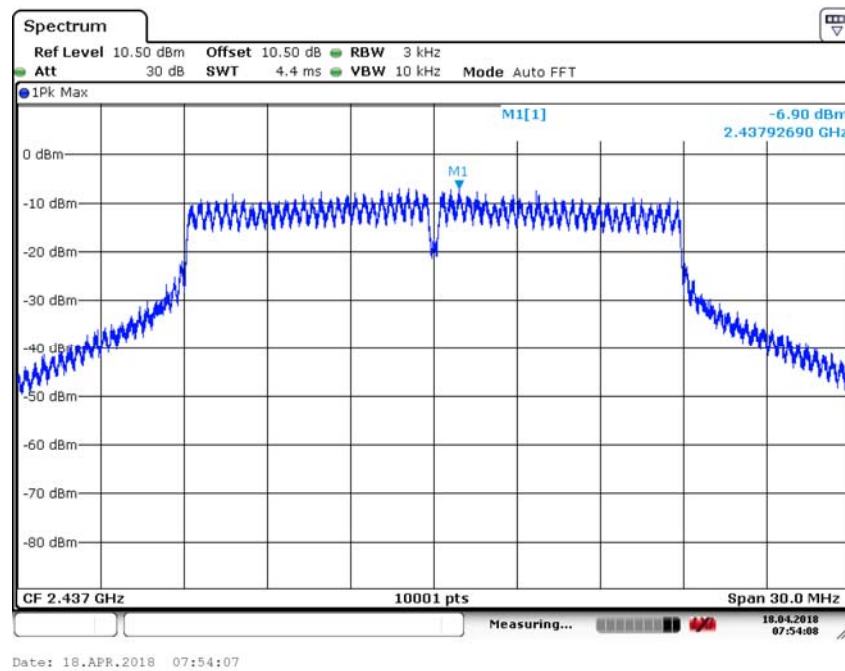


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT20)

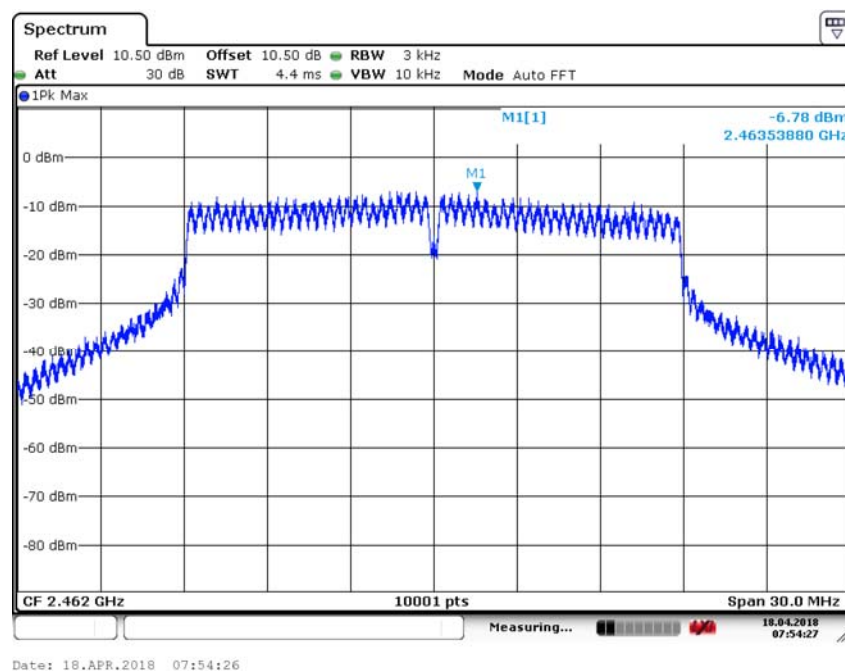

Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11n (HT20)


Test Mode: 802.11n (HT40) (SISO Ant 0)

| Carrier frequency (MHz) | Channel No | Power Density (dBm) |
|-------------------------|------------|---------------------|
| 2422                    | 3          | -10.81              |
| 2437                    | 6          | -10.10              |
| 2452                    | 9          | -9.81               |

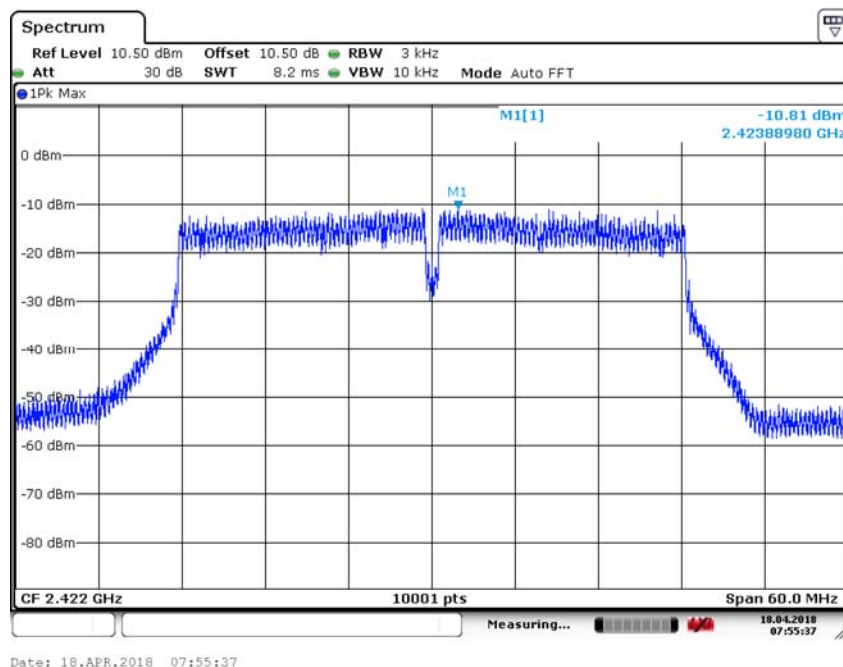


Date: 18.APR.2018 07:55:37

Carrier frequency (MHz): 2422  
Channel No.3  
Test Mode: 802.11n (HT40)

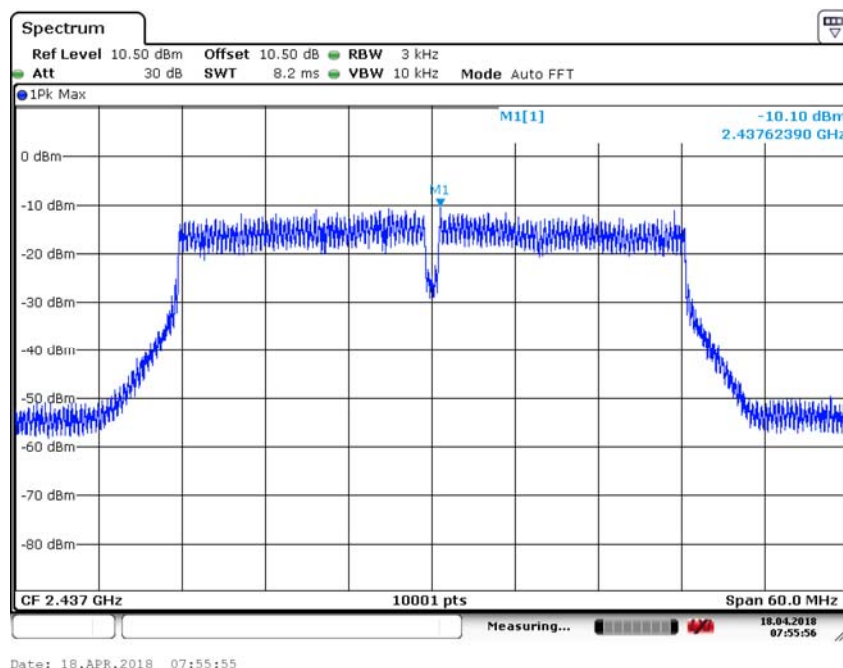


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT40)

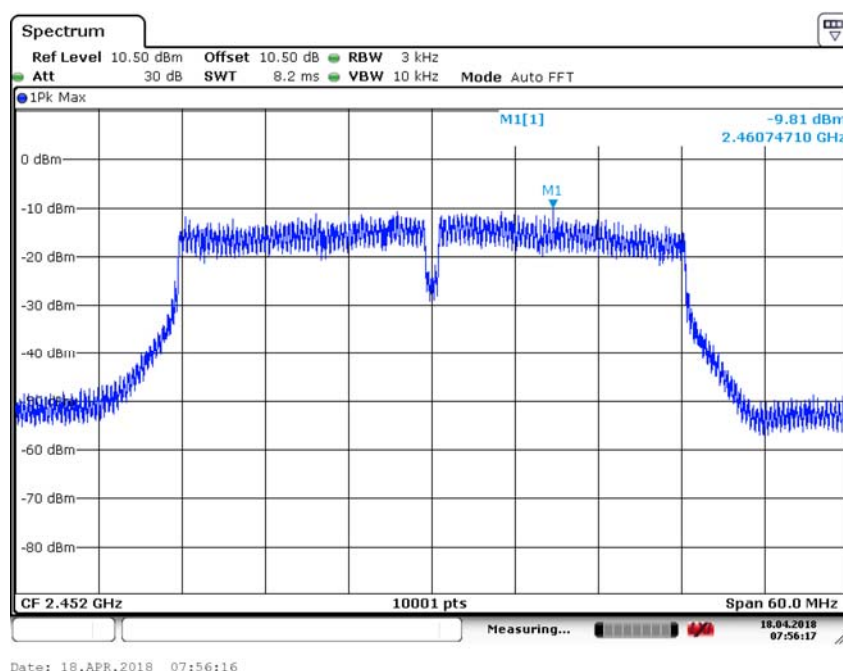


Carrier frequency (MHz): 2452  
Channel No.9  
Test Mode: 802.11n (HT40)

Test Mode: 802.11n (HT20) (MIMO Ant0 + Ant 1)


| Carrier frequency (MHz) | Channel No | Power Density (dBm)( Ant0) | Power Density (dBm)( Ant1) | Total Corr'd (dBm) |
|-------------------------|------------|----------------------------|----------------------------|--------------------|
| 2412                    | 1          | -7.72                      | -7.33                      | -4.51              |
| 2437                    | 6          | -7.34                      | -7.67                      | -4.49              |
| 2462                    | 11         | -7.72                      | -7.79                      | -4.74              |

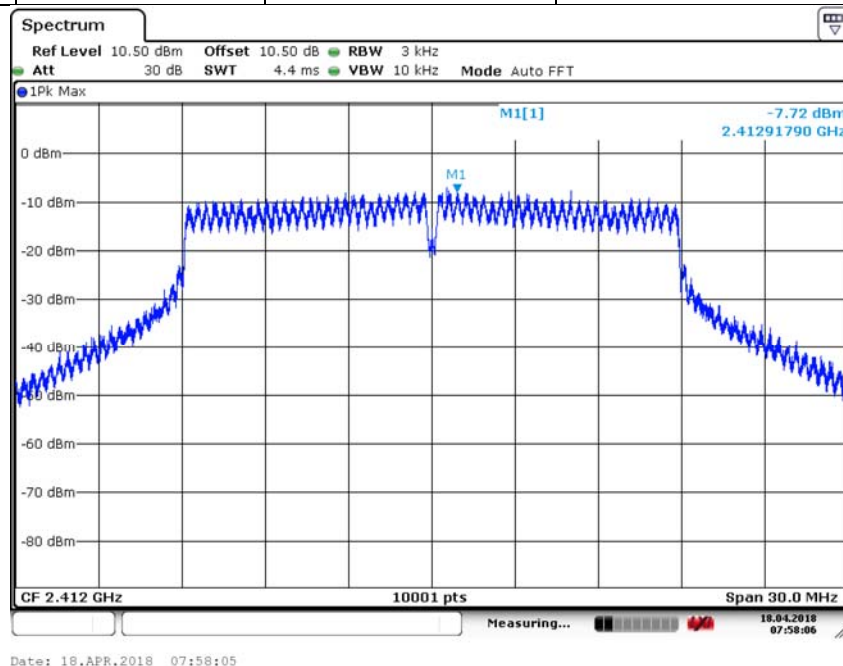


Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11n (HT20 MIMO Ant0)

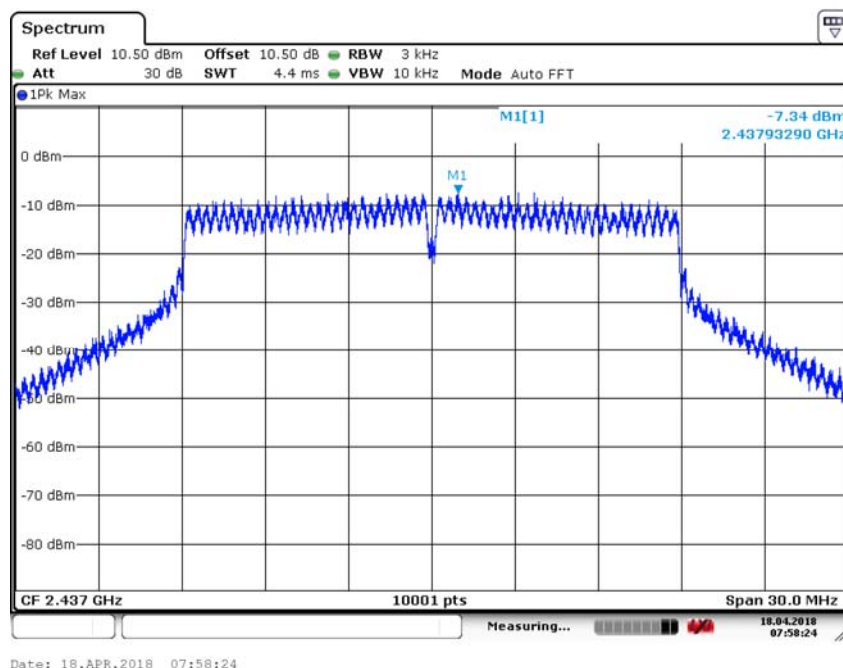


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT20 MIMO Ant0)

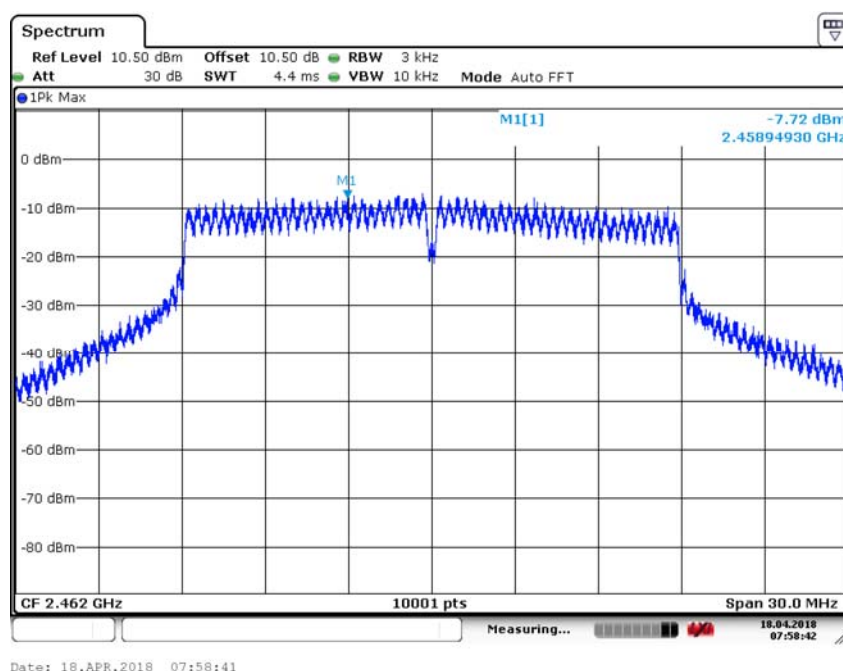


Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11n (HT20 MIMO Ant0)

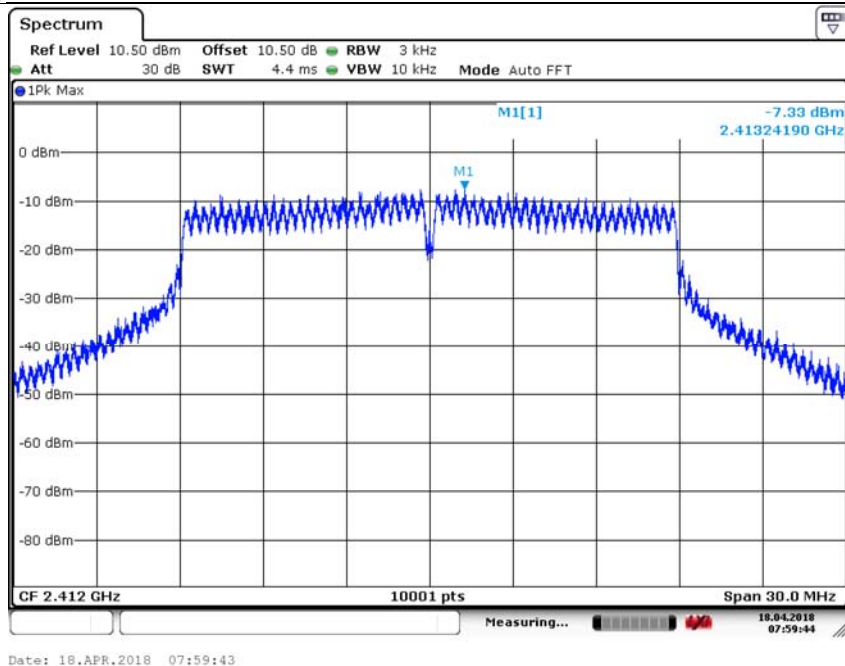

Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11n (HT20 MIMO Ant1)

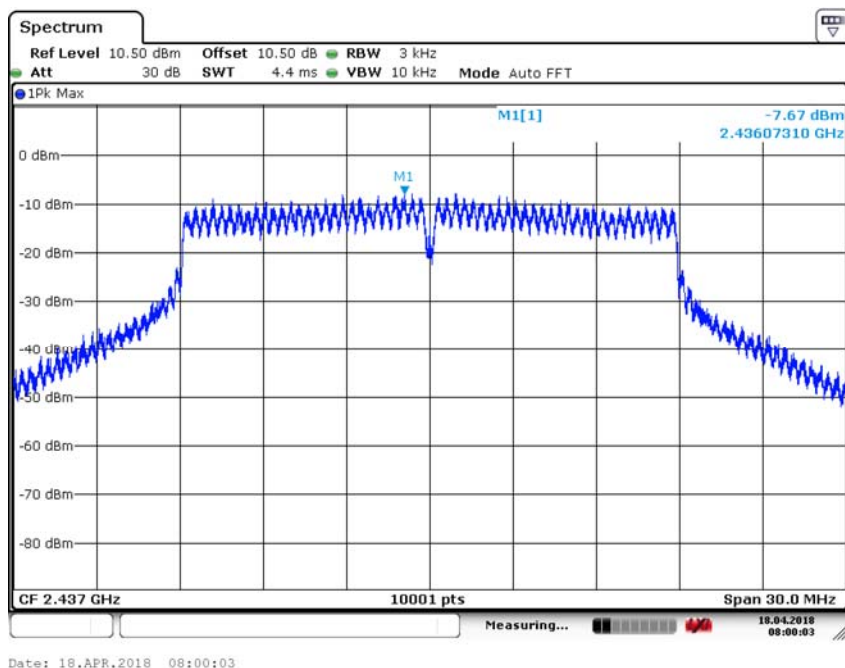


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT20 MIMO Ant1)

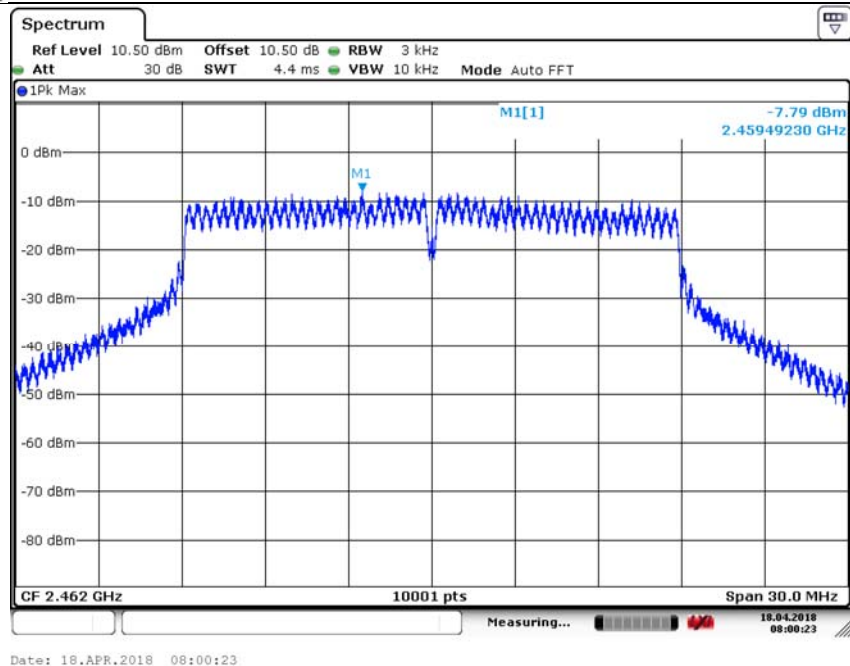


Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11n (HT20 MIMO Ant1)

Test Mode: 802.11n (HT40) (MIMO Ant0 + Ant 1)


| Carrier frequency (MHz) | Channel No | Power Density (dBm)( Ant0) | Power Density (dBm)( Ant1) | Total Corr'd (dBm) |
|-------------------------|------------|----------------------------|----------------------------|--------------------|
| 2422                    | 3          | -10.87                     | -11.44                     | -8.14              |
| 2437                    | 6          | -10.95                     | -11.19                     | -8.06              |
| 2452                    | 9          | -10.93                     | -11.20                     | -8.05              |

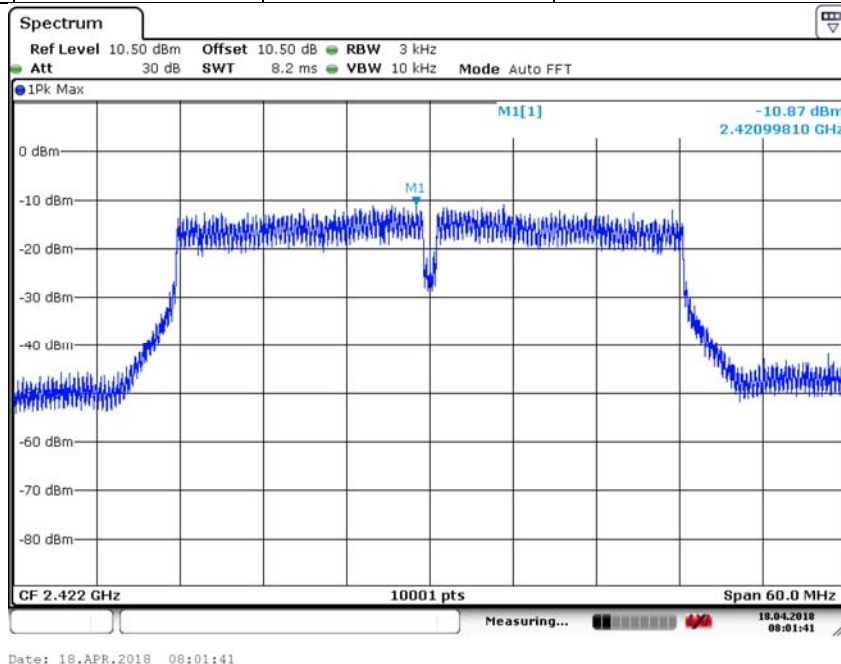


Carrier frequency (MHz): 2422  
Channel No.3  
Test Mode: 802.11n (HT40 MIMO Ant0)

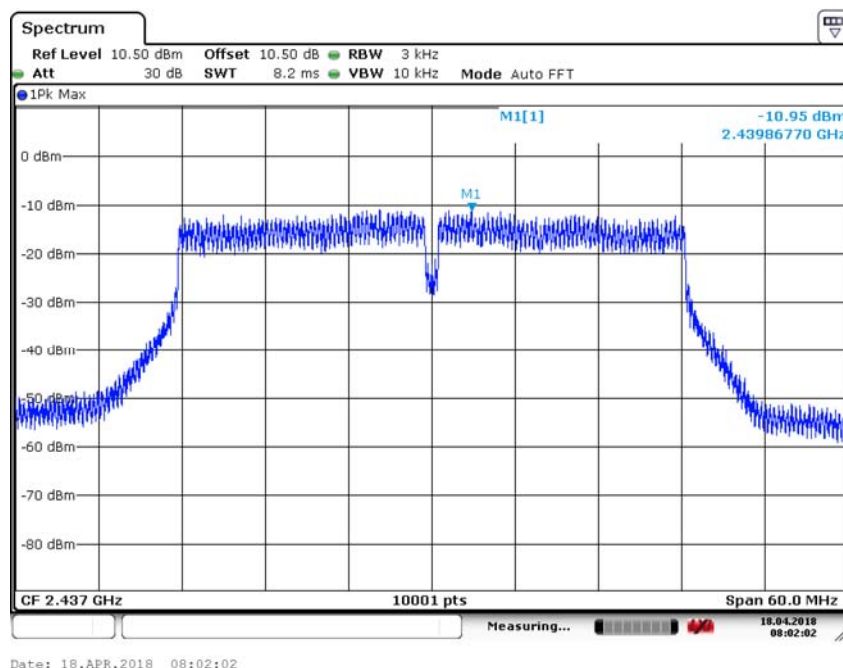


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT40 MIMO Ant1)

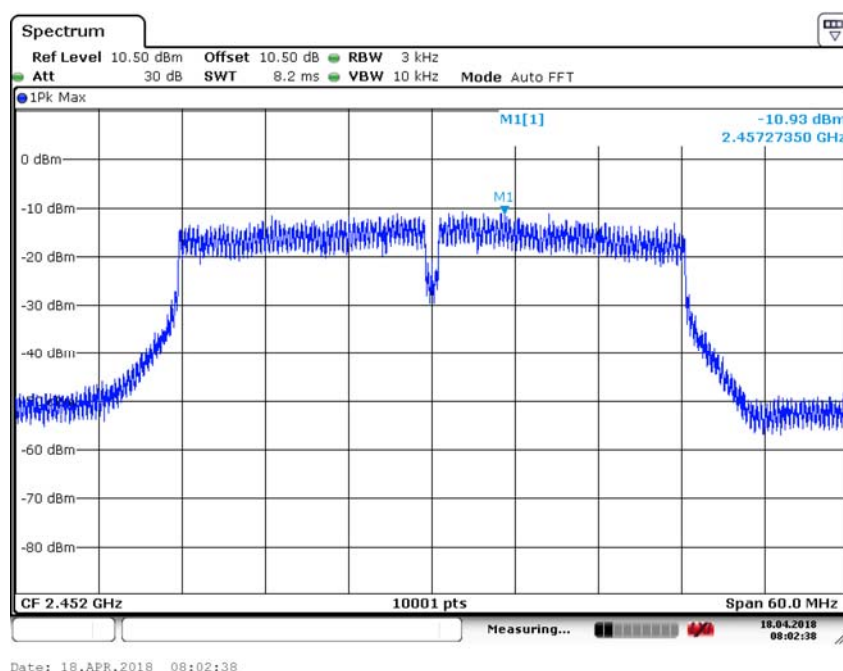


Carrier frequency (MHz): 2452  
Channel No.9  
Test Mode: 802.11n (HT40 MIMO Ant0)

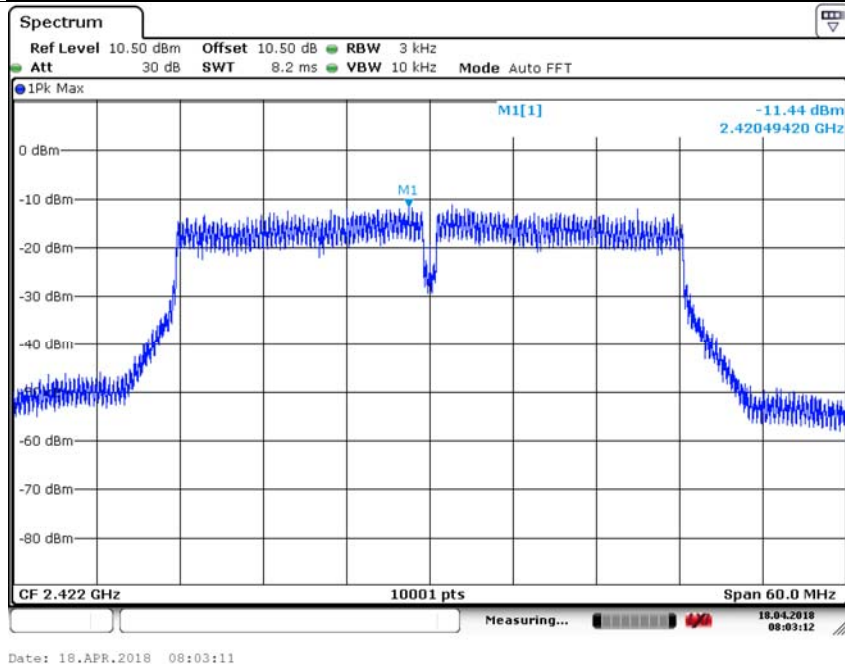

Carrier frequency (MHz): 2422  
Channel No.3  
Test Mode: 802.11n (HT40 MIMO Ant1)

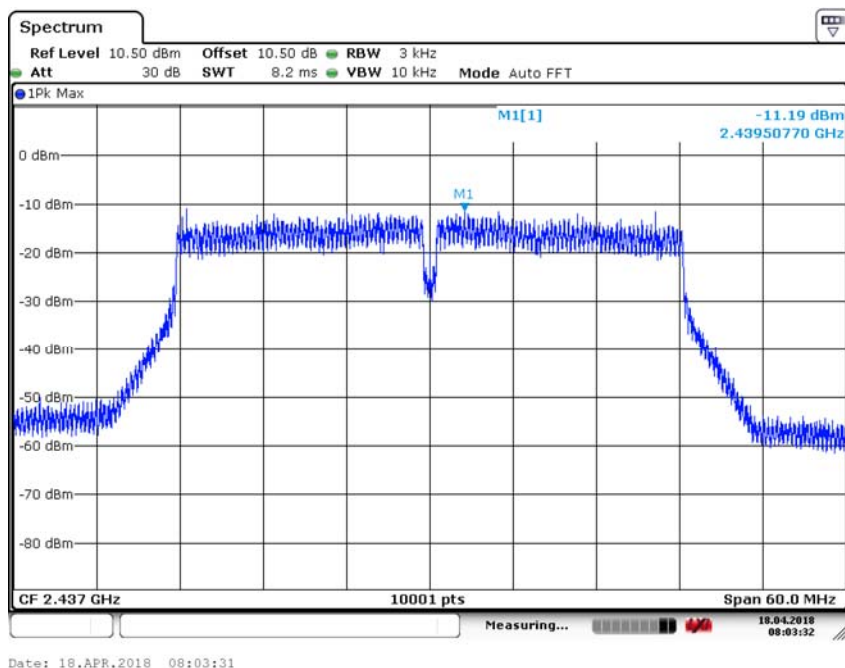

Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT40 MIMO Ant1)

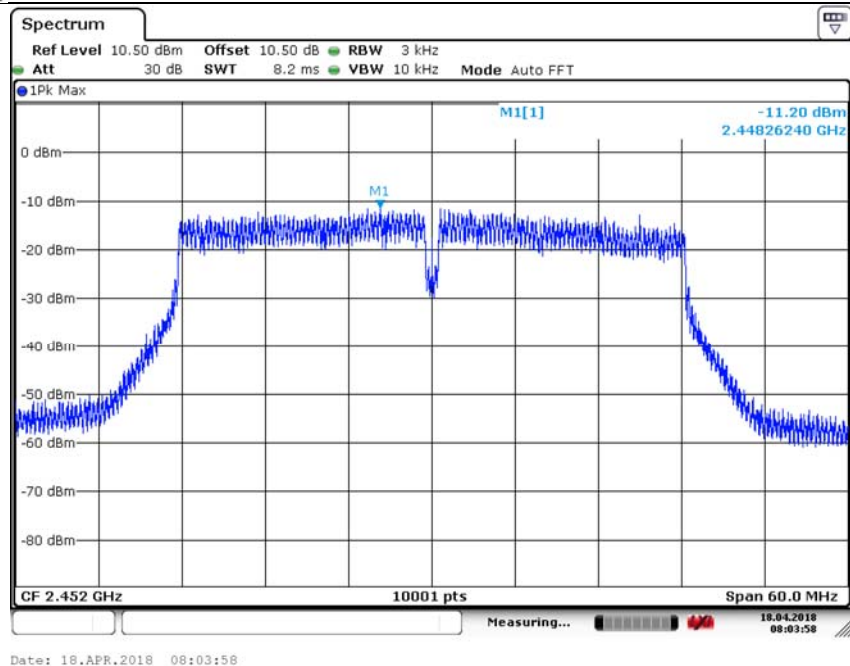

Date: 18.APR.2018 08:03:58



Carrier frequency (MHz): 2452  
Channel No.9  
Test Mode: 802.11n (HT40 MIMO Ant1)

## Conducted Out of band emission measurement



Offset 10.5dB = Attenuator 10dB+ Temporary Ant connector loss 0.5dB

802.11b(SISO Ant0)



CH1

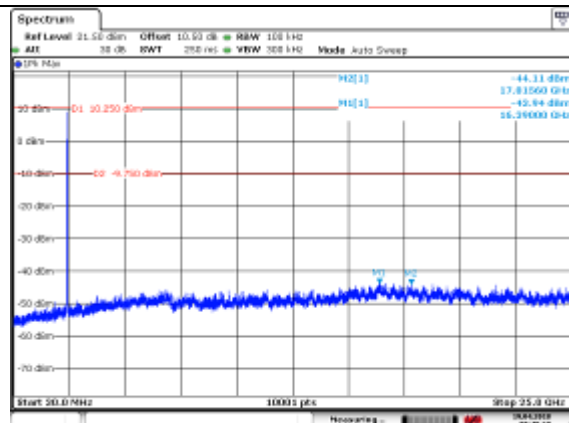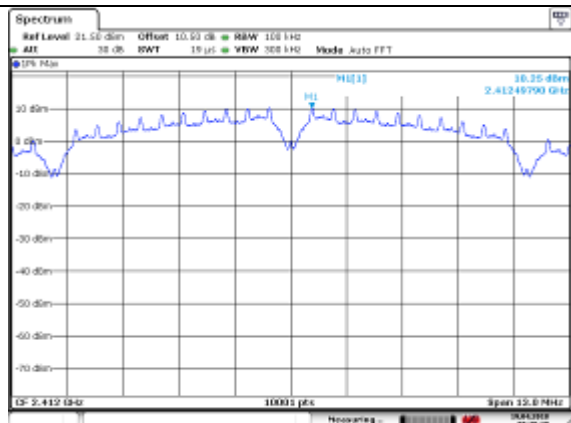

CH6

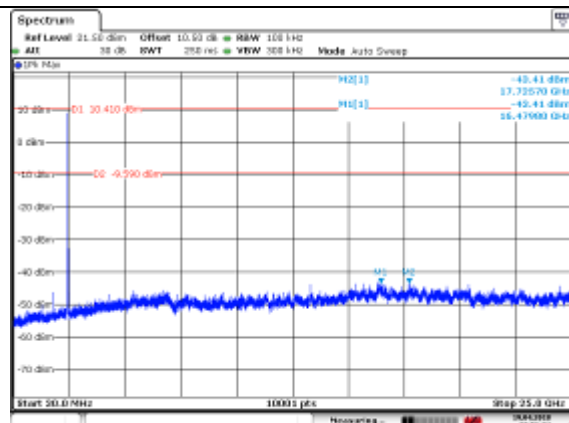
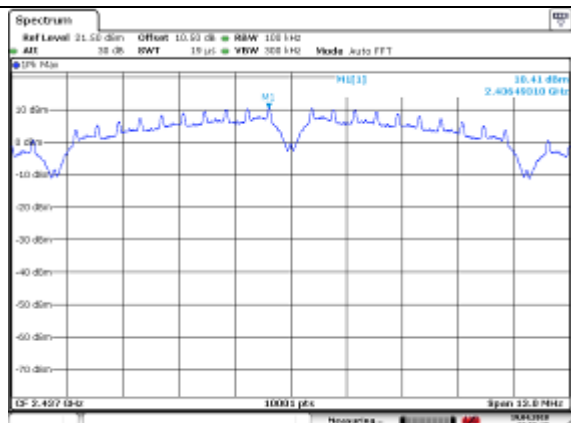


CH11

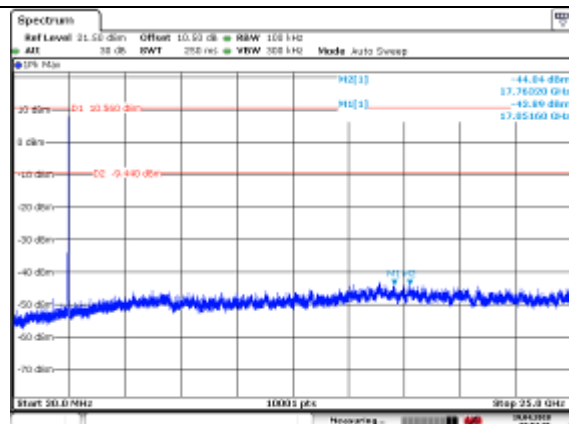
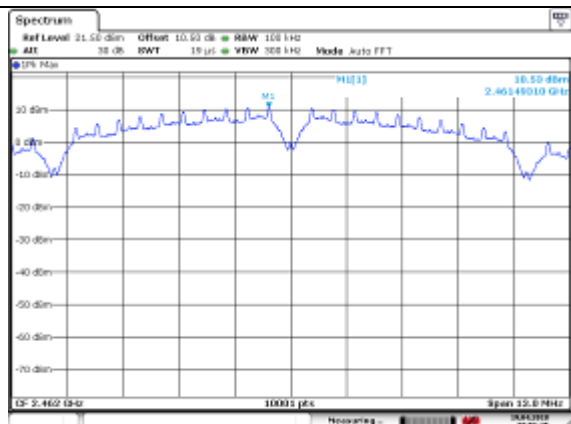


## 802.11g(SISO Ant0)



### CH1

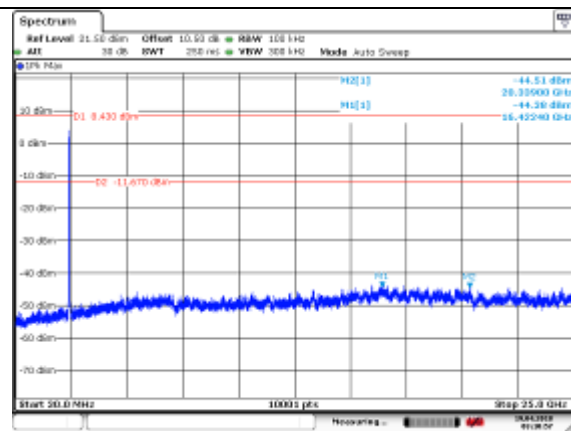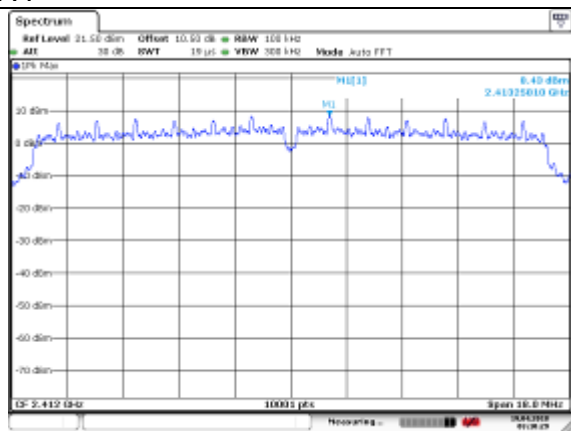

### CH6

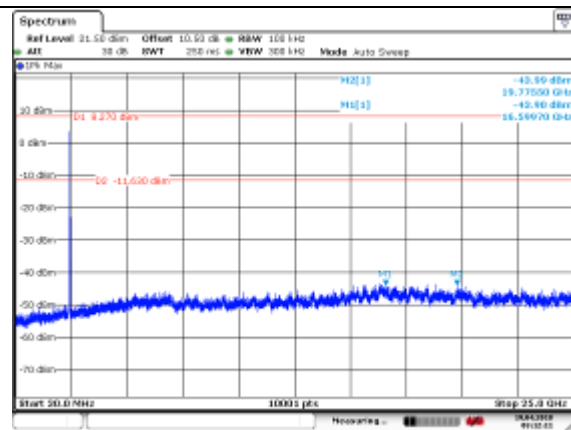
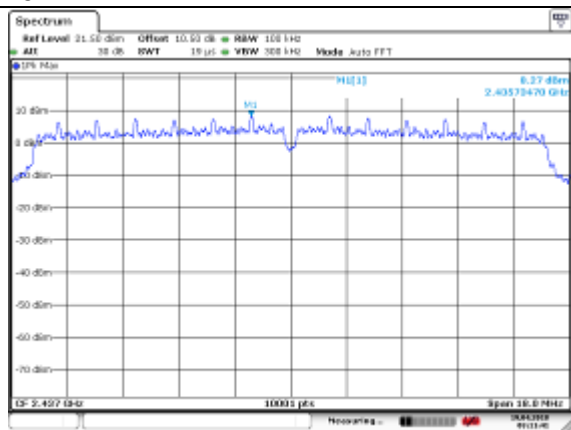


### CH11

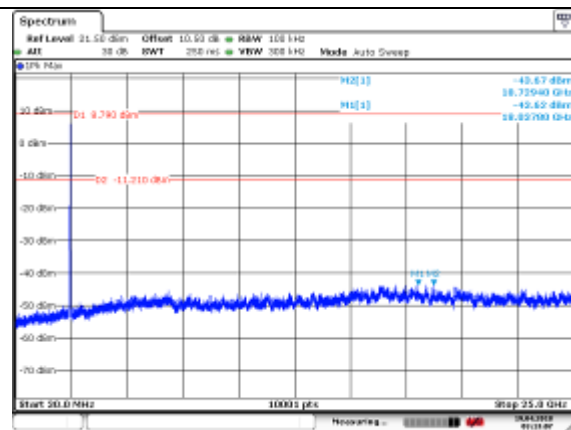
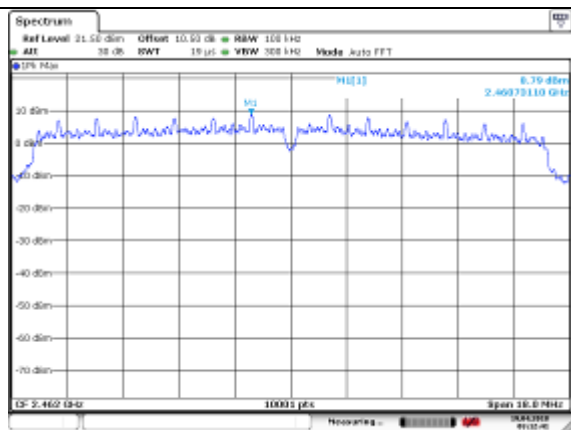


## 802.11n (20MHz) (SISO Ant0)



### CH1

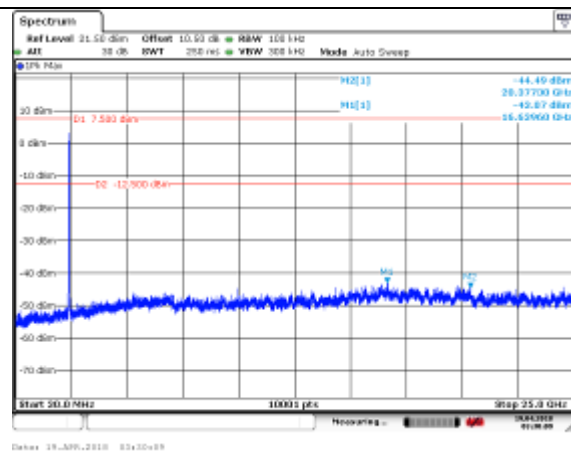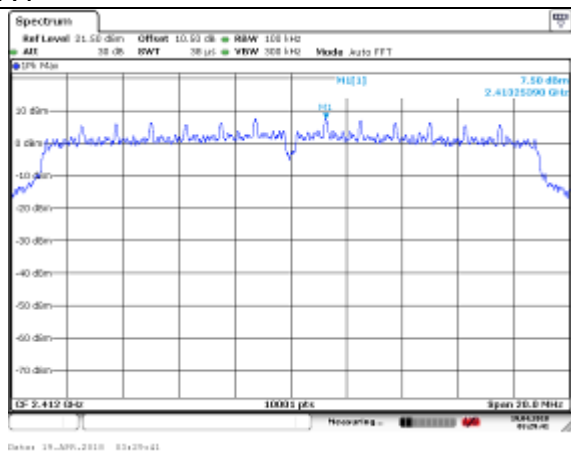

### CH6

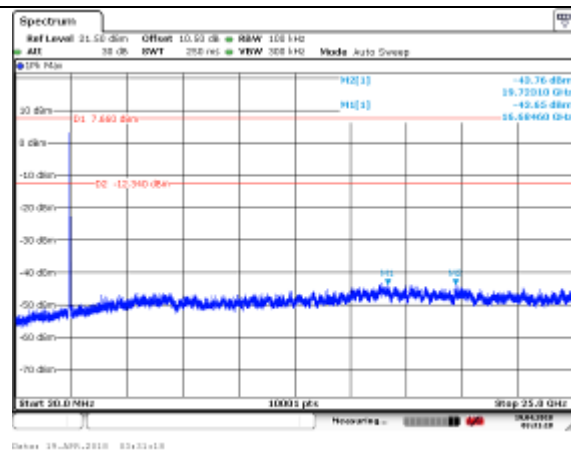
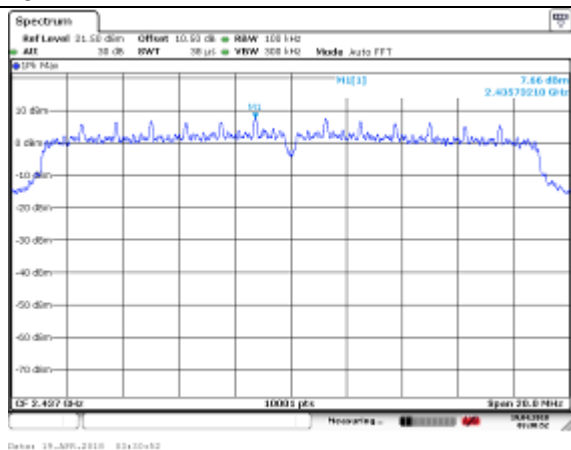


### CH11

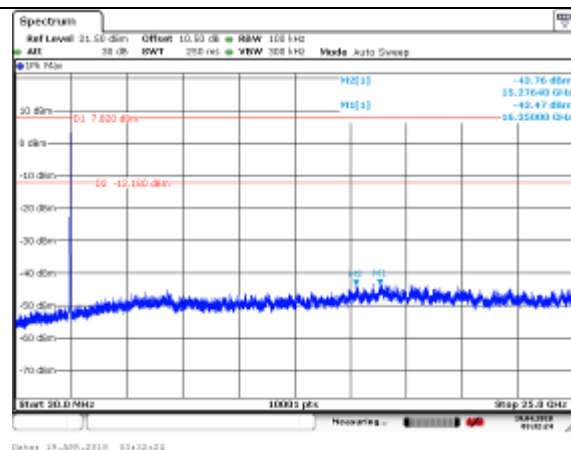
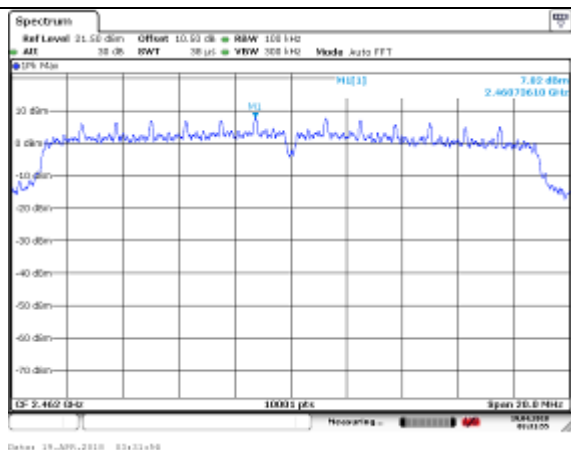


## 802.11n (40MHz) (SISO Ant0)



### CH3

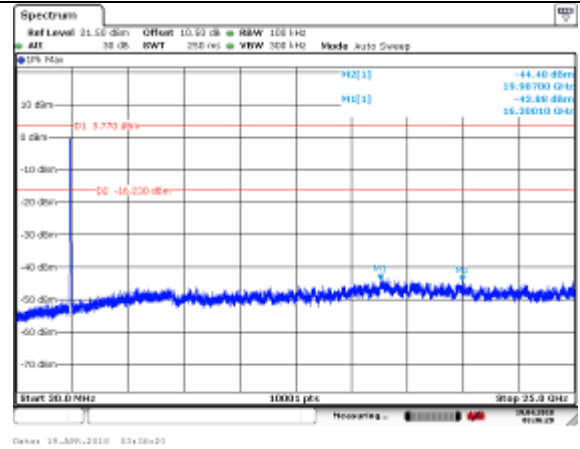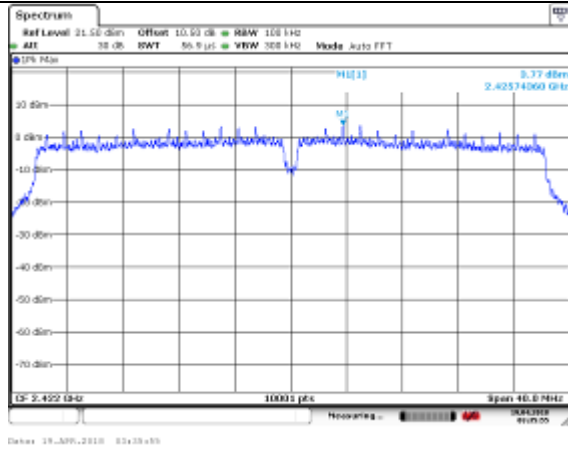

### CH6

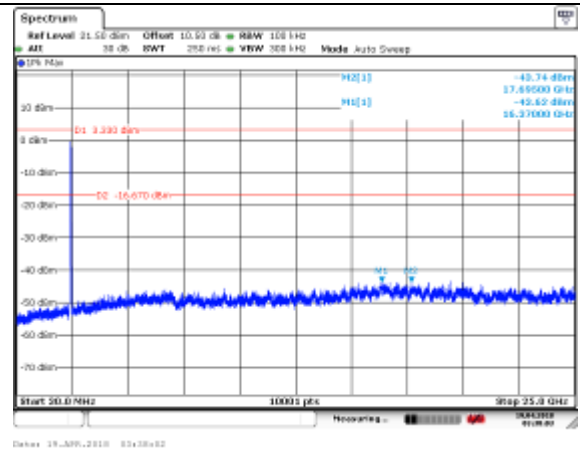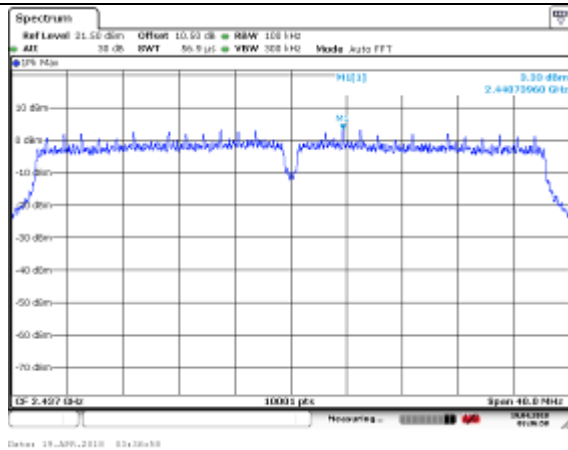


### CH9

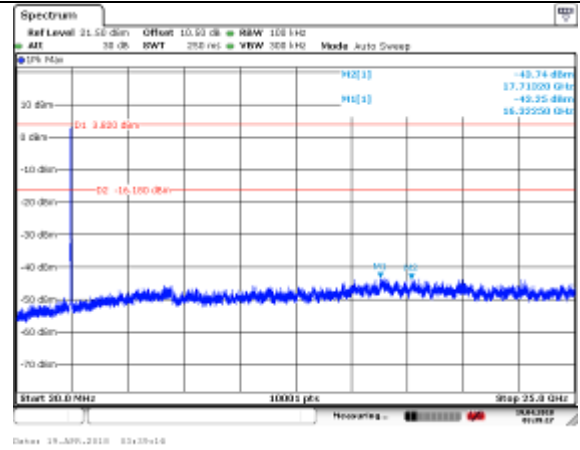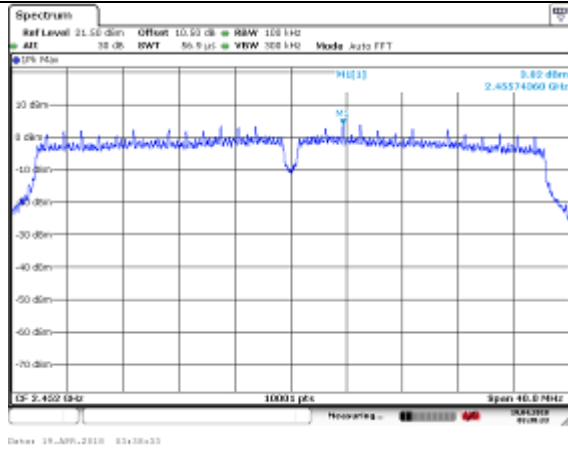


## 802.11n (20MHz) (MIMO Ant0)

### CH1

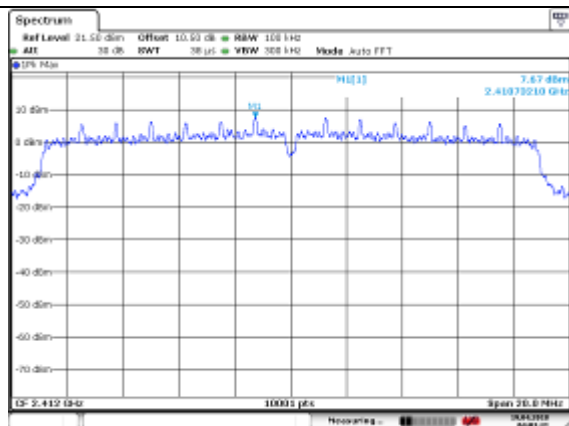


Date: 19-Apr-2018 02:03:31

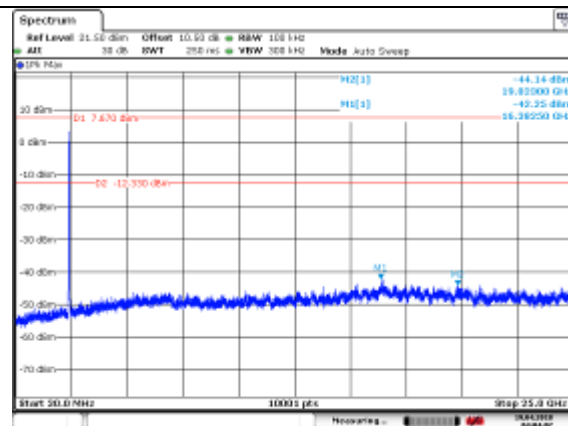


Date: 19-Apr-2018 02:04:02

### CH6

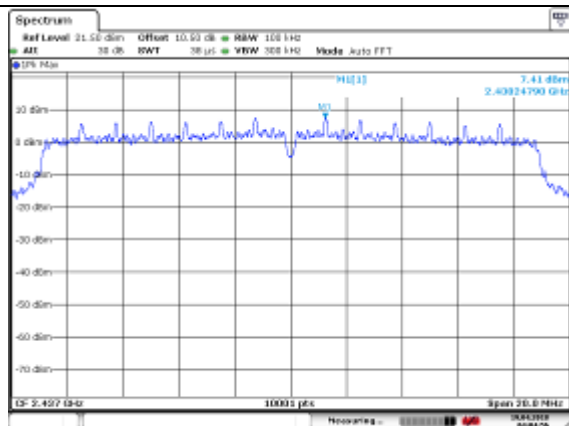


Date: 19-Apr-2018 02:04:00

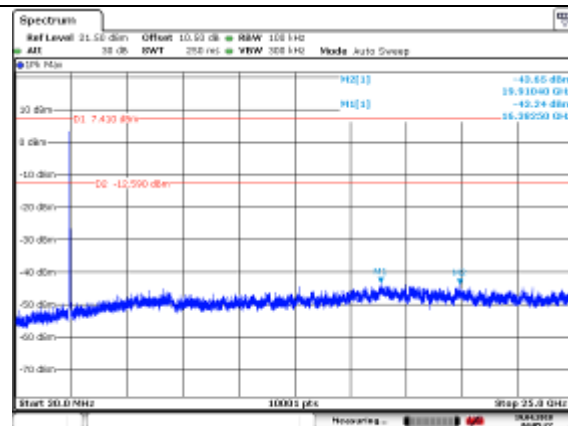


Date: 19-Apr-2018 02:04:02

### CH11

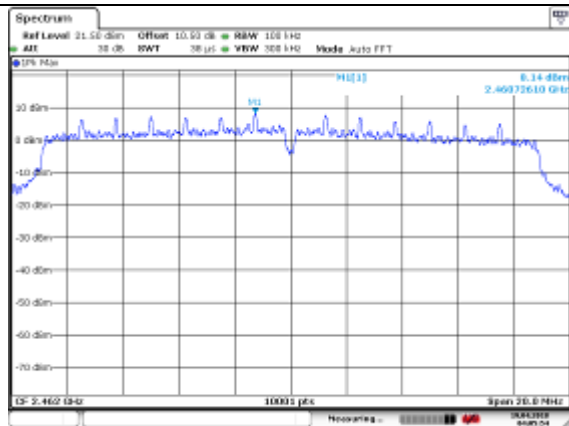



Date: 19-Apr-2018 02:04:00

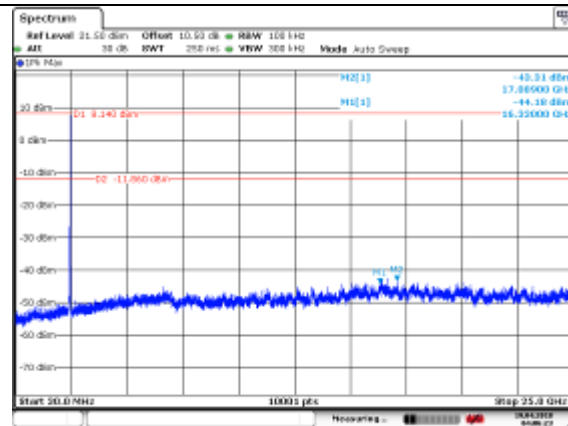



Date: 19-Apr-2018 02:04:02

## 802.11n (20MHz) (MIMO Ant1)



### CH1

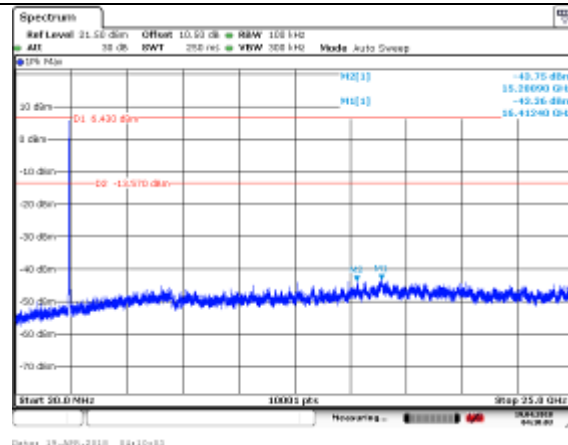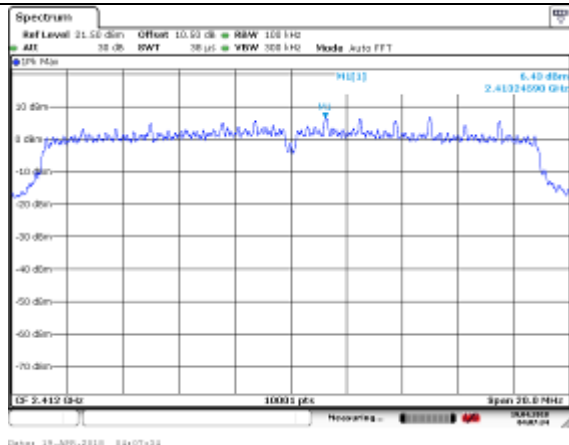

### CH6

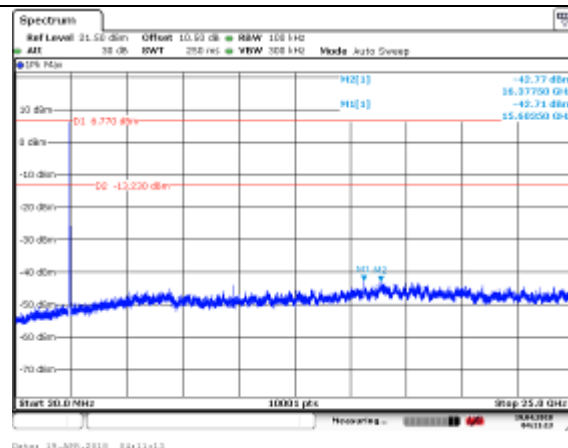
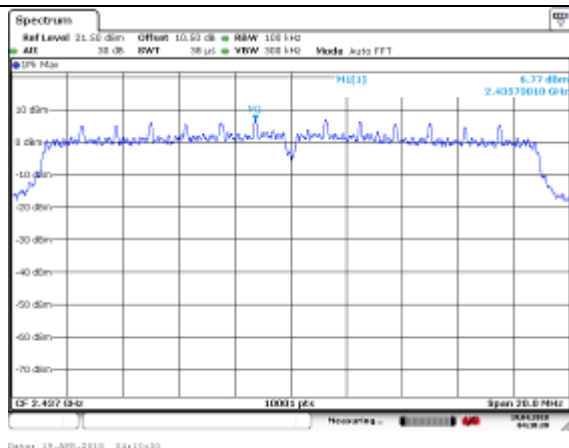


### CH11

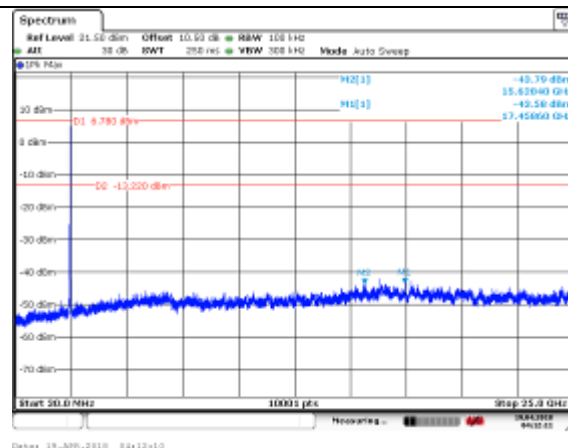
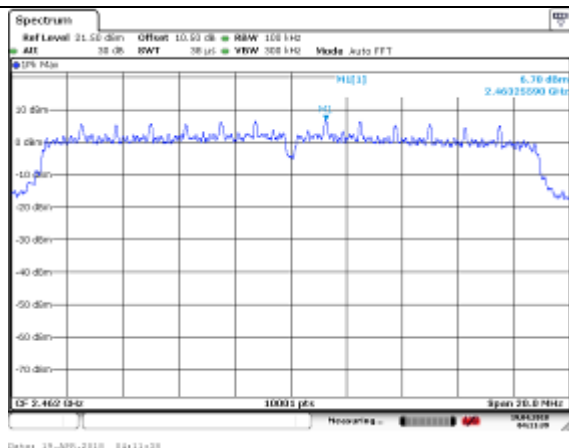


## 802.11n (40MHz) (MIMO ant0)



### CH3

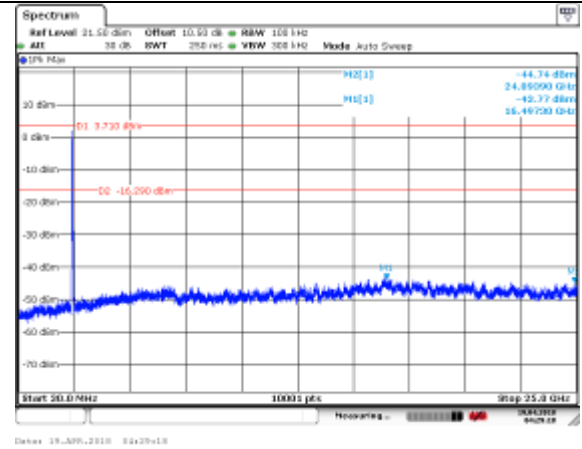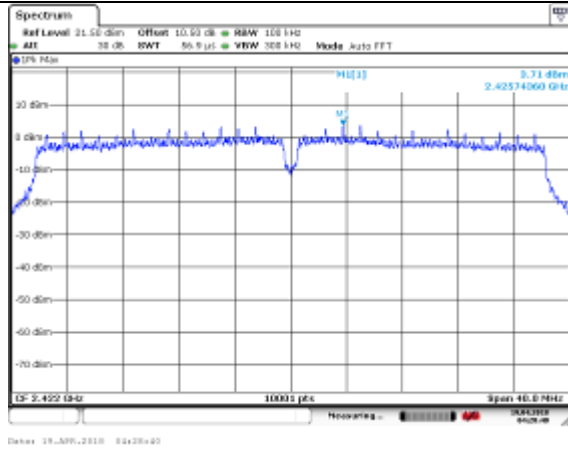

### CH6

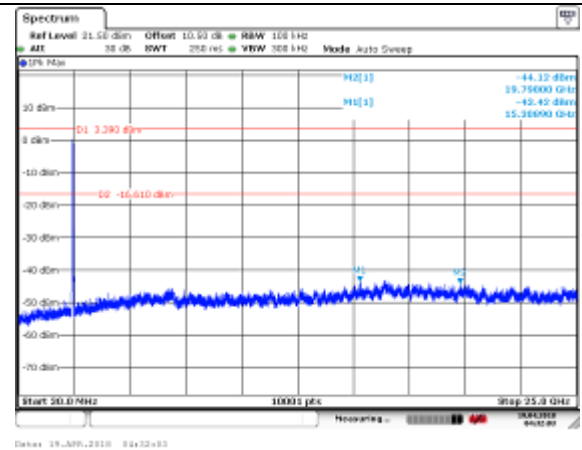
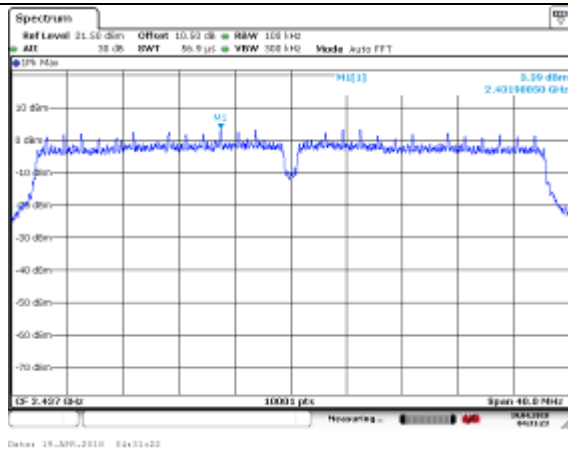


### CH9

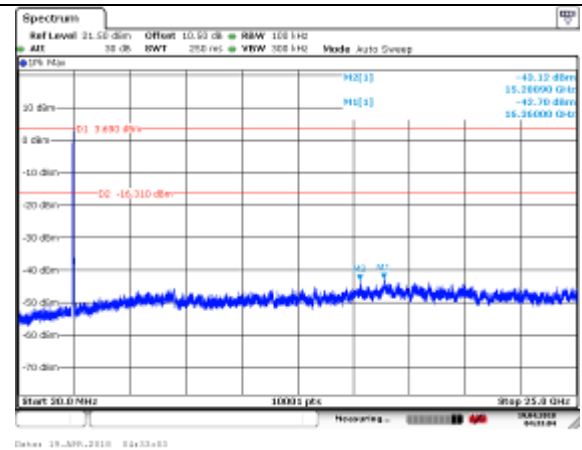
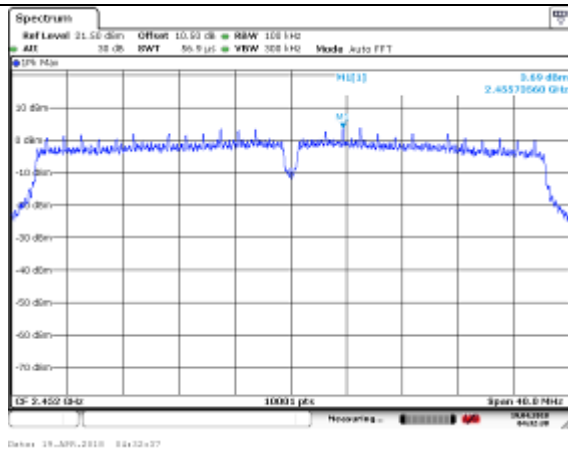


## 802.11n (40MHz) (MIMO ant1)



### CH3

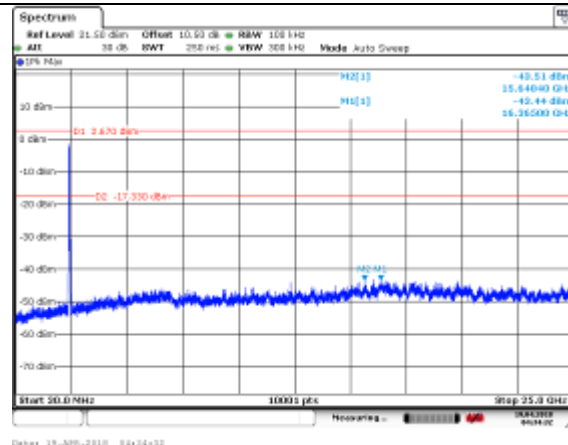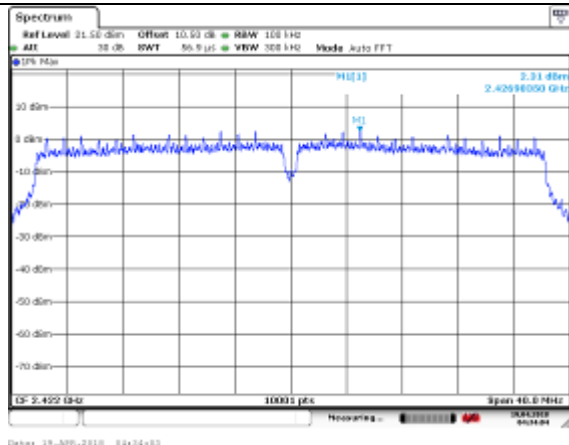

### CH6

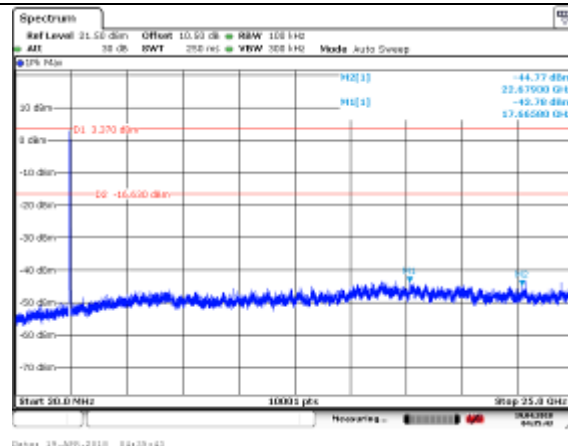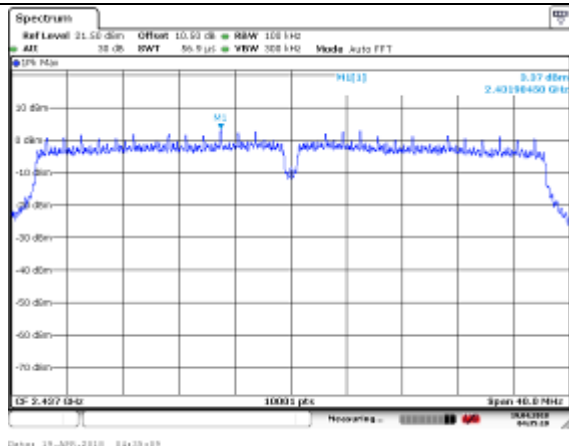

### CH9

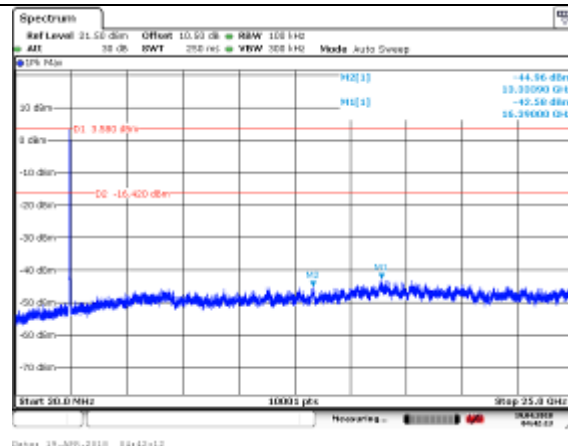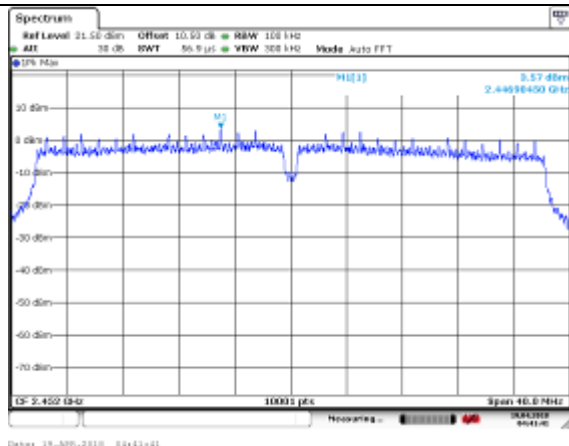


## Band edge measurement (RF Conducted measurement)


Offset 10.5dB = Attenuator 10dB+ Temporary Ant connector loss 0.5dB

802.11b(SISO Ant0)

CH1

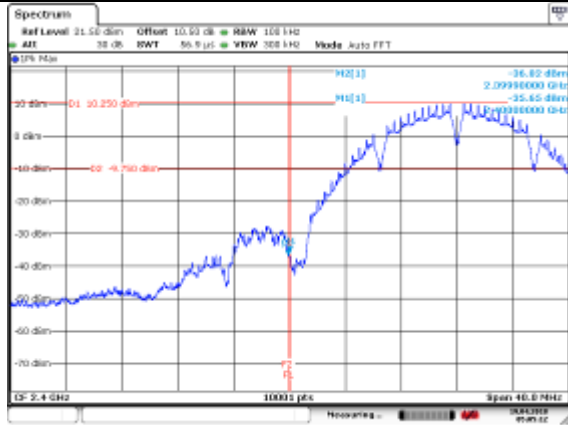


CH11

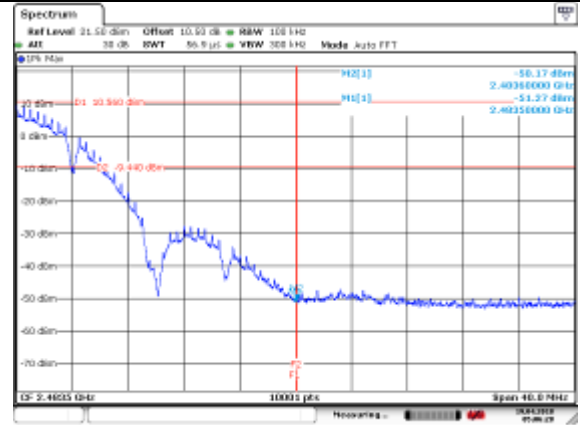


802.11g(SISO Ant0)

CH1

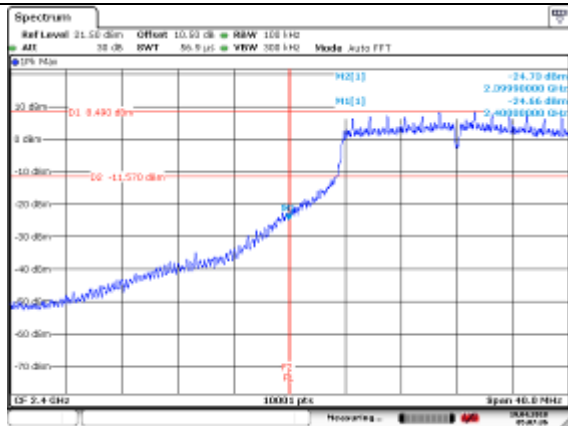


CH11

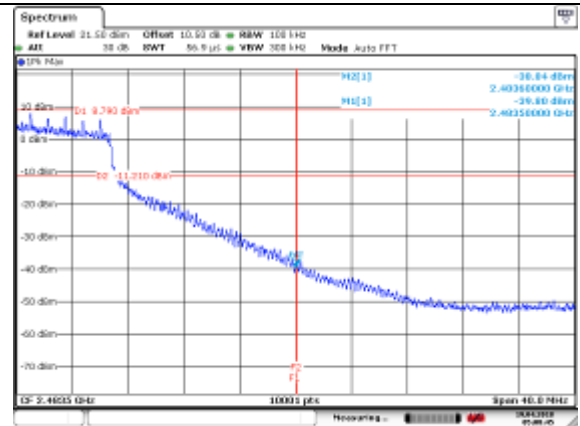


802.11n(20MHz)(SISO Ant0)

CH1

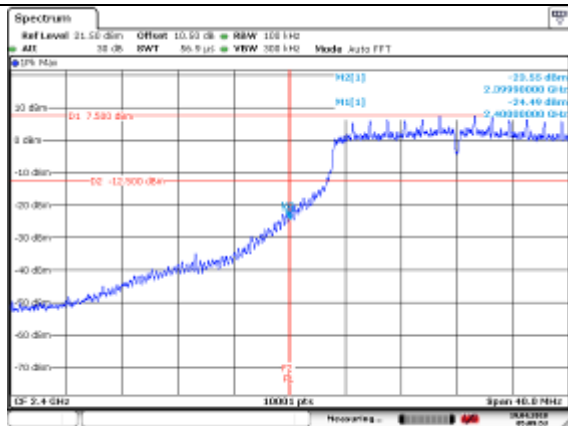


CH11

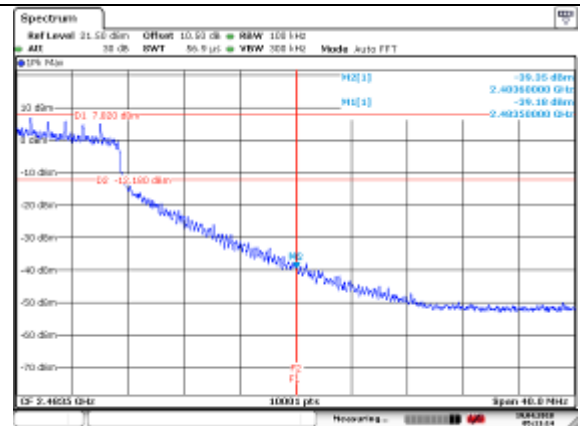


## 802.11n(40MHz)(SISO Ant0)

### CH3

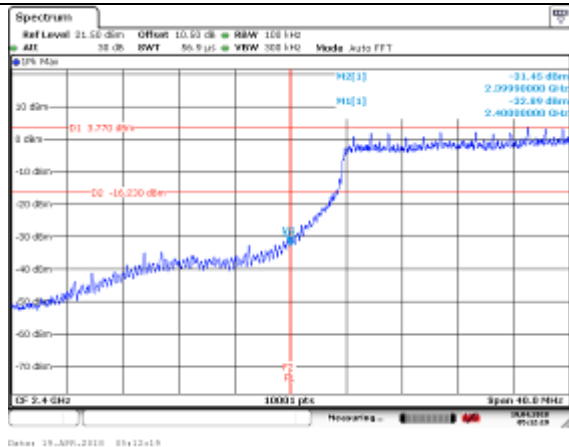


### CH9

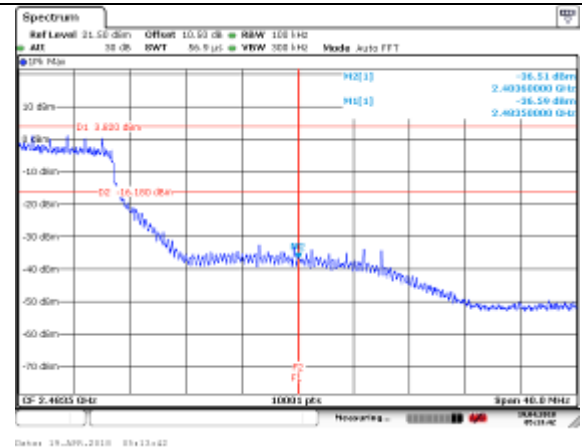


## 802.11n(20MHz)(MIMO Ant0)

### CH1

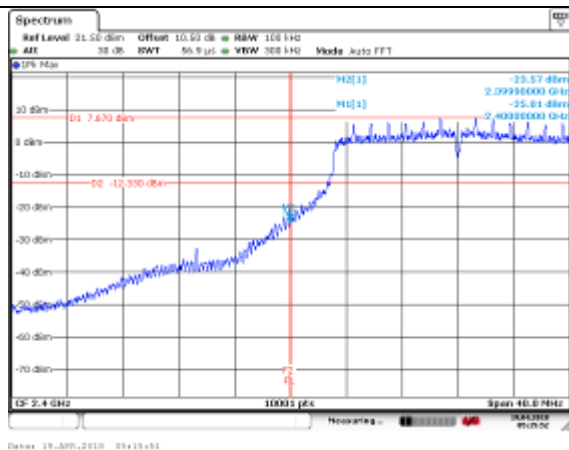


### CH11

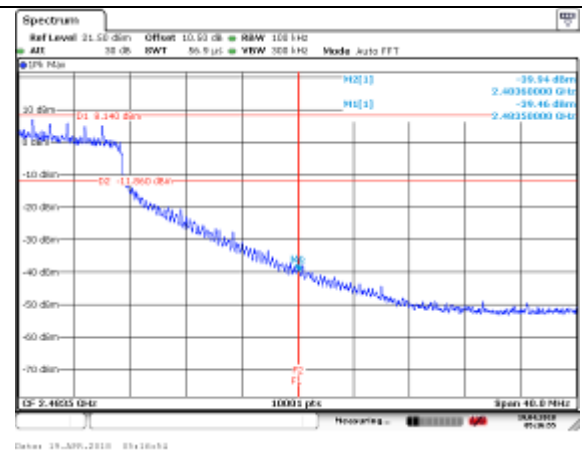


## 802.11n(20MHz)(MIMO Ant1)

### CH1

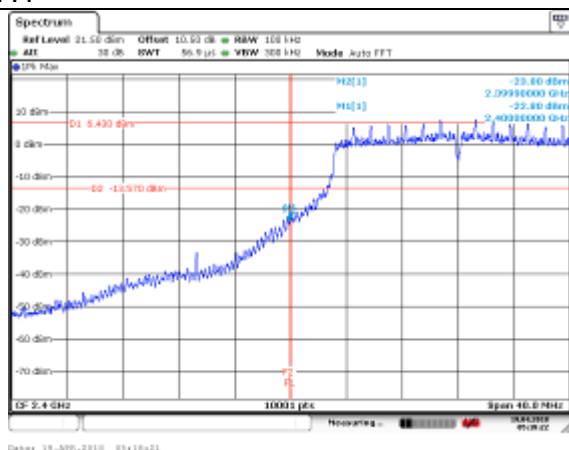


### CH11

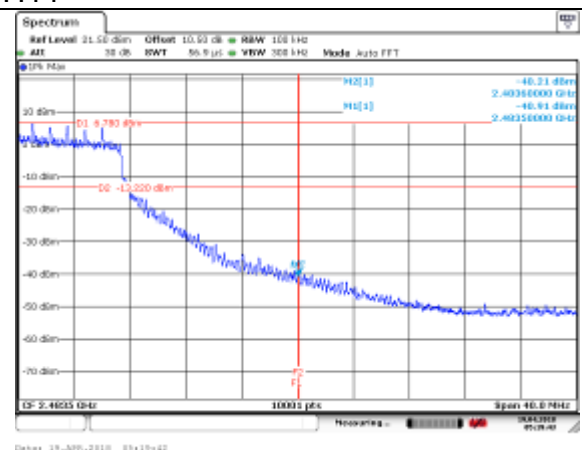


### 802.11n(40MHz)(MIMO Ant0)

CH3

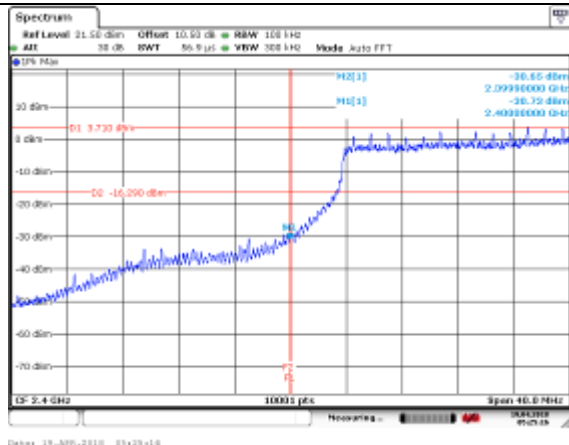


CH9

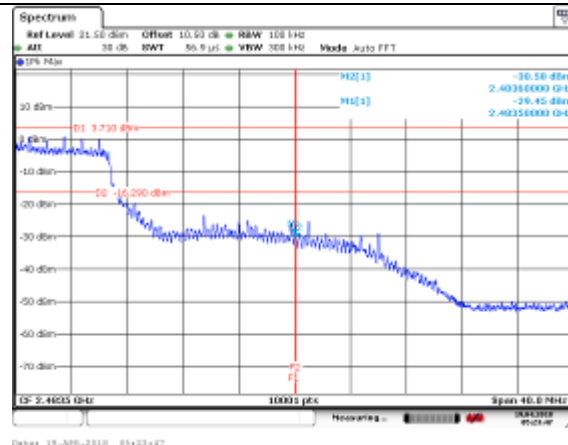


### 802.11n(40MHz)(MIMO Ant1)

CH3

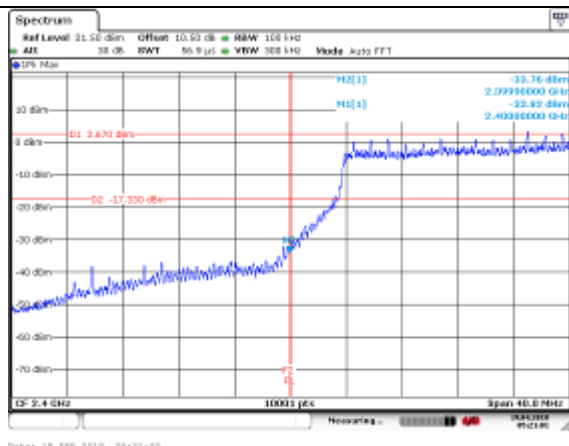

CH9

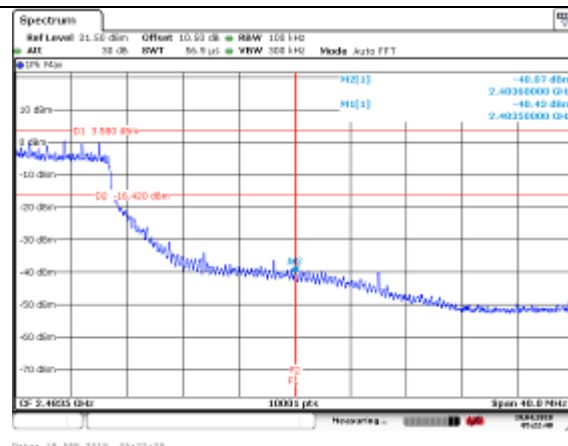

## APPENDIX B – TEST DATA OF RADIATED EMISSION

### Radiated Emission Band Edge

The worst case attitude: The mobile lay down. MIMO Ant0+Ant1

Peak detector: RBW=1MHz,VBW=3MHz,sweep time=200ms;

Average detector: RBW=1MHz,VBW=3MHz,sweep time=auto;

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2412               | 101.65                       | 67.65                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2390               | 50.12                        | 16.12                      | -23.88                | 74.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2412               | 96.24                        | 62.24                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2390               | 42.98                        | 8.98                       | -31.02                | 74.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: AVerage

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2412               | 87.21                        | 53.21                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2390               | 36.92                        | 2.92                       | -17.08                | 54.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: AVerage

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2412               | 85.57                        | 51.57                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2390               | 35.29                        | 1.29                       | -18.71                | 54.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 102.77                 | 68.77                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 47.84                  | 13.84                | -26.16          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 104.26                 | 55.38                | 21.38           | -18.62         | 8.90            | 25.10               |
| 2  | 2483.5          | 55.38                  | 21.38                | -18.62          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Vertical  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 87.58                  | 53.58                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 36.50                  | 2.50                 | -17.50          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 84.38                  | 50.38                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 37.16                  | 3.16                 | -16.84          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 102.36                 | 68.36                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 49.38                  | 15.38                | -24.62          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity:Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 97.38                  | 63.38                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 46.65                  | 12.65                | -27.35          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity: Vertical  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 88.91                  | 54.91                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 38.21                  | 4.21                 | -15.79          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 84.33                  | 50.33                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 35.67                  | 1.67                 | -18.33          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 103.25                 | 69.25                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 47.97                  | 13.97                | -26.03          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g  
Polarity:Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 96.15                  | 62.15                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 43.32                  | 9.32                 | -27.20          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g  
Polarity: Vertical  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 89.76                  | 55.76                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 37.48                  | 3.48                 | -16.52          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 84.75                  | 50.75                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 36.15                  | 2.15                 | -17.85          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 103.16                 | 69.16                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 48.43                  | 14.43                | -25.57          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity:Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 96.97                  | 62.97                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 45.40                  | 11.40                | -28.60          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity: Vertical  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 86.74                  | 52.74                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 37.48                  | 3.48                 | -16.52          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2412            | 87.13                  | 53.13                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 36.63                  | 2.63                 | -17.37          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n(HT20)  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 103.22                 | 69.22                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 47.26                  | 13.26                | -26.74          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n(HT20)  
Polarity:Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 96.87                  | 62.87                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 45.93                  | 11.93                | -28.07          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n(HT20)  
Polarity: Vertical  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 87.29                  | 53.29                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 37.19                  | 3.19                 | -16.81          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n(HT20)  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2462            | 84.79                  | 50.79                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 36.67                  | 2.67                 | -17.33          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n(HT40)  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2422            | 102.40                 | 68.40                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 49.88                  | 15.88                | -24.12          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n(HT40)  
Polarity:Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2422            | 95.82                  | 61.82                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 45.53                  | 11.53                | -28.47          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n(HT40)  
Polarity: Vertical  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2422            | 86.77                  | 52.77                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 37.16                  | 3.16                 | -16.84          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n(HT40)  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2422            | 87.17                  | 53.17                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 36.69                  | 2.69                 | -17.31          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n(HT40)  
Polarity: Vertical  
Detector: Peak

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2462               | 102.91                       | 68.91                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2483.5             | 49.24                        | 15.24                      | -24.76                | 74.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n(HT40)  
Polarity:Horizontal  
Detector: Peak

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2462               | 95.99                        | 61.99                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2483.5             | 43.55                        | 9.55                       | -30.45                | 74.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n(HT40)  
Polarity: Vertical  
Detector: AVerage

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2462               | 87.32                        | 53.32                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2483.5             | 36.61                        | 2.61                       | -17.39                | 54.00             | 8.90                  | 25.10                     |

Carrier frequency (MHz): 2452  
Channel No.9  
Test Mode: 802.11n(HT40)  
Polarity:Horizontal  
Detector: AVerage

| No | Frequency<br>(MHz) | Measure<br>Level<br>(dBuV/m) | Reading<br>Level<br>(dBuV) | Over<br>Limit<br>(dB) | Limit<br>(dBuV/m) | cable<br>loss<br>(dB) | antenna<br>factor<br>(dB) |
|----|--------------------|------------------------------|----------------------------|-----------------------|-------------------|-----------------------|---------------------------|
| 1  | 2462               | 83.40                        | 49.40                      | N/A                   | N/A               | 8.90                  | 25.10                     |
| 2  | 2483.5             | 35.35                        | 1.35                       | -18.65                | 54.00             | 8.90                  | 25.10                     |

For 802.11b

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 38.932083       | 21.91           | 12.4      | 9.51          | Horizontal | 40             |
| 47.09625        | 24.67           | 7.6       | 17.07         | Vertical   | 40             |
| 54.330833       | 23.44           | 4.6       | 18.84         | Horizontal | 40             |
| 83.430833       | 11.34           | 6.4       | 4.94          | Vertical   | 43.5           |
| 102.588333      | 26.27           | 8.2       | 18.07         | Vertical   | 43.5           |
| 167.9825        | 29.8            | 6.9       | 22.9          | Vertical   | 43.5           |
| 207.307917      | 21.58           | 7.8       | 13.78         | Vertical   | 43.5           |
| 330.740417      | 8.72            | 12.4      | -3.68         | Horizontal | 46             |
| 447.019167      | 17.08           | 15.9      | 1.18          | Vertical   | 46             |
| 637.9475        | 14.69           | 19.8      | -5.11         | Vertical   | 46             |
| 959.340833      | 17.19           | 25.2      | -8.01         | Vertical   | 46             |

For 802.11g

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 38.891667       | 22.79           | 12.4      | 10.39         | Horizontal | 40             |
| 42.97375        | 24.76           | 10.2      | 14.56         | Vertical   | 40             |
| 84.966667       | 13.87           | 6.6       | 7.27          | Horizontal | 40             |
| 101.739583      | 25.35           | 8.2       | 17.15         | Vertical   | 43.5           |
| 102.952083      | 26.4            | 8.2       | 18.2          | Vertical   | 43.5           |
| 167.9825        | 29.38           | 6.9       | 22.48         | Vertical   | 43.5           |
| 208.965         | 21.73           | 7.9       | 13.83         | Vertical   | 43.5           |
| 343.795         | 8.08            | 12.9      | -4.82         | Horizontal | 46             |
| 444.9175        | 19.29           | 15.9      | 3.39          | Vertical   | 46             |
| 551.98125       | 25.99           | 18.4      | 7.59          | Vertical   | 46             |
| 957.764583      | 17.01           | 25.2      | -8.19         | Vertical   | 46             |


For 802.11n(HT20)

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 38.12375        | 17.7            | 12.4      | 5.3           | Horizontal | 40             |
| 42.97375        | 22.95           | 10.2      | 12.75         | Vertical   | 40             |
| 85.65375        | 13.48           | 6.6       | 6.88          | Horizontal | 40             |
| 101.618333      | 24.95           | 8.2       | 16.75         | Vertical   | 43.5           |
| 142.924167      | 27.81           | 8.2       | 19.61         | Vertical   | 43.5           |
| 146.965833      | 27.76           | 6.9       | 20.86         | Vertical   | 43.5           |
| 202.498333      | 19.76           | 7.9       | 11.86         | Vertical   | 43.5           |
| 249.9475        | 10.14           | 12.9      | -2.76         | Horizontal | 46             |
| 481.939167      | 11.61           | 15.9      | -4.29         | Vertical   | 46             |
| 513.7875        | 14.62           | 18.4      | -3.78         | Vertical   | 46             |
| 943.255         | 16.29           | 25.2      | -8.91         | Vertical   | 46             |

For 802.11n(HT40)

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 53.64375        | 23              | 4.8       | 18.2          | Horizontal | 40             |
| 85.492083       | 13.69           | 6.6       | 7.09          | Vertical   | 40             |
| 103.154167      | 25.32           | 8.2       | 17.12         | Horizontal | 40             |
| 135.447083      | 25.93           | 7.5       | 18.43         | Vertical   | 43.5           |
| 143.328333      | 26.42           | 7.1       | 19.32         | Vertical   | 43.5           |
| 148.0975        | 28.6            | 7         | 21.6          | Vertical   | 43.5           |
| 167.9825        | 29.51           | 6.9       | 22.61         | Vertical   | 43.5           |
| 210.945417      | 20.88           | 8         | 12.88         | Vertical   | 43.5           |
| 333.044167      | 11.56           | 12.5      | -0.94         | Horizontal | 46             |
| 447.382917      | 17.72           | 15.9      | 1.82          | Vertical   | 46             |
| 679.010833      | 15.77           | 20.6      | -4.83         | Vertical   | 46             |
| 946.205417      | 16.58           | 25        | -8.42         | Vertical   | 46             |

Full Spectrum

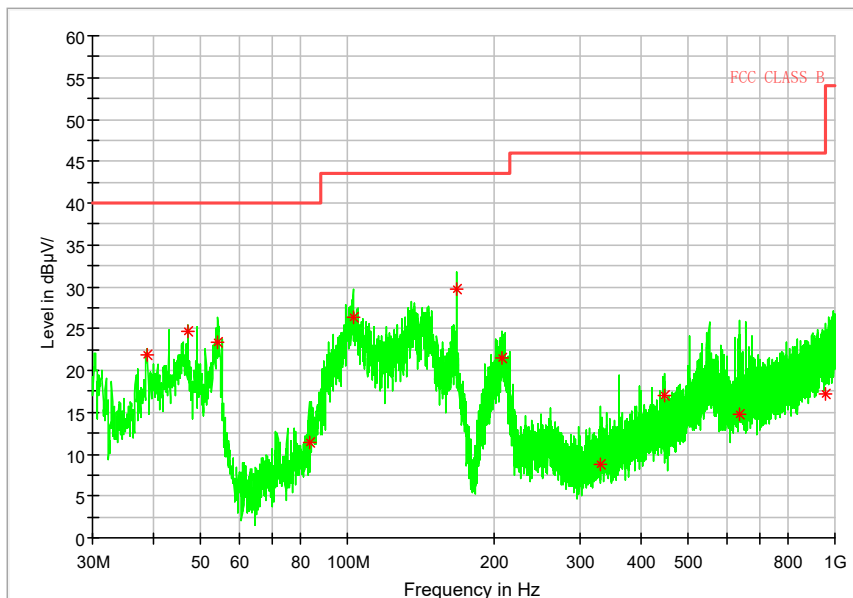


Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11b

Full Spectrum

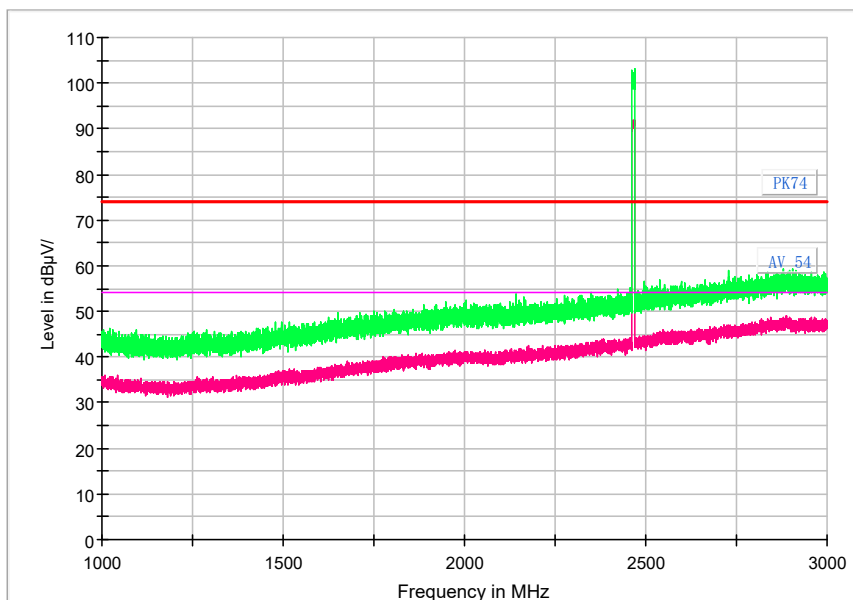


Frequency Range: 1GHz -3GHz

Detector: AV mode and PK mode


Modulation type: 802.11b

Full Spectrum

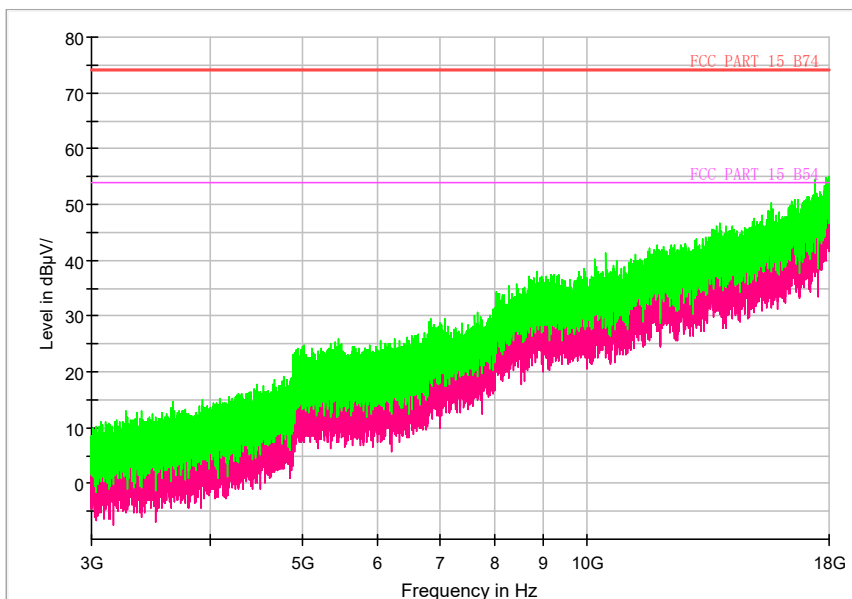


Frequency Range: 3GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11b

Full Spectrum

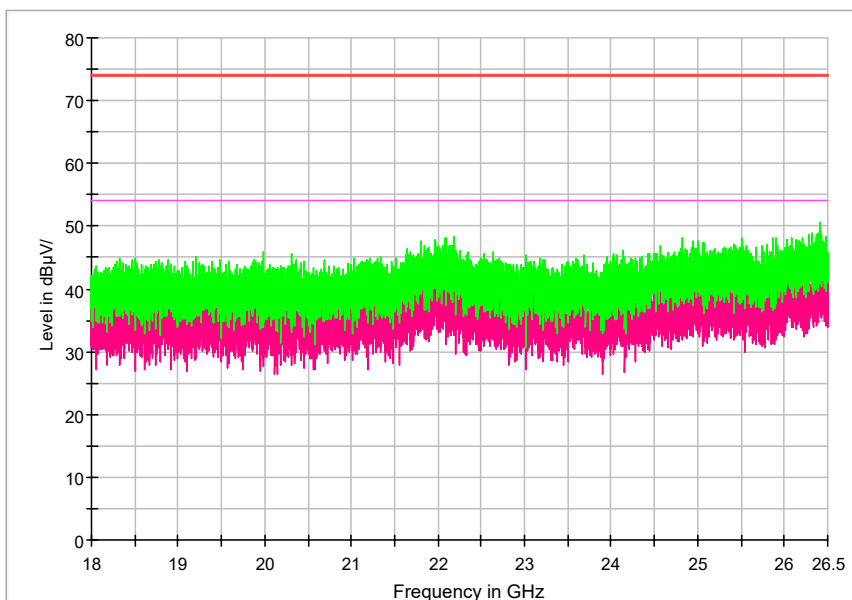


Frequency Range: 18GHz -26.5GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11b

Full Spectrum

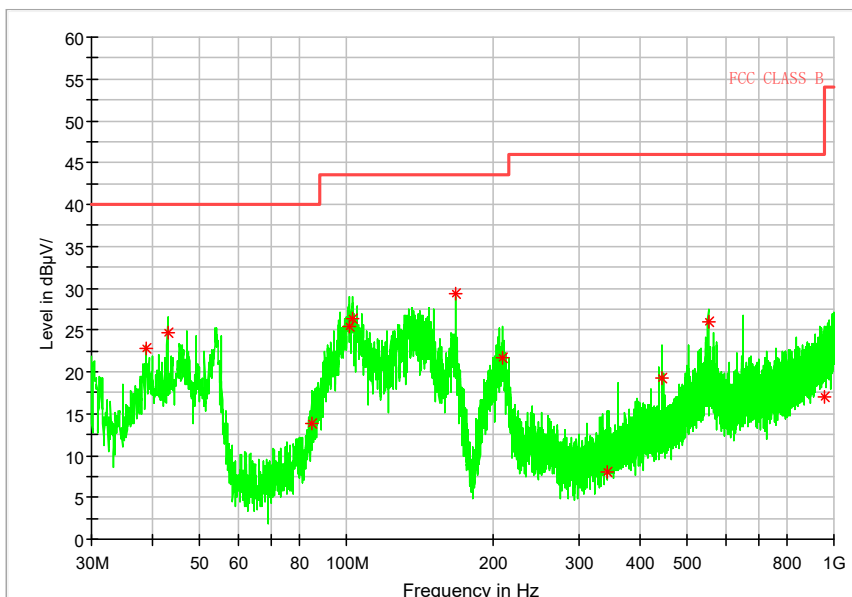


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Modulation type: 802.11g

Full Spectrum

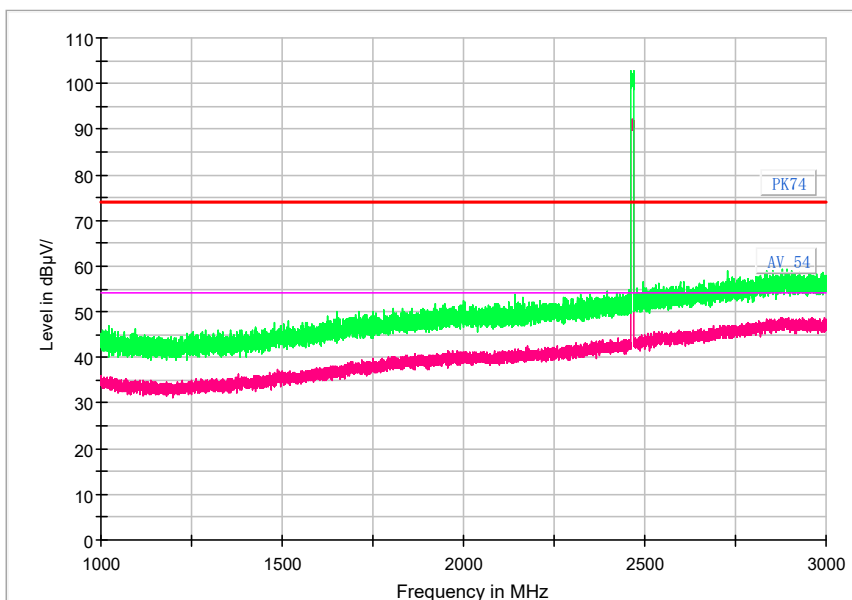


Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11g

Full Spectrum

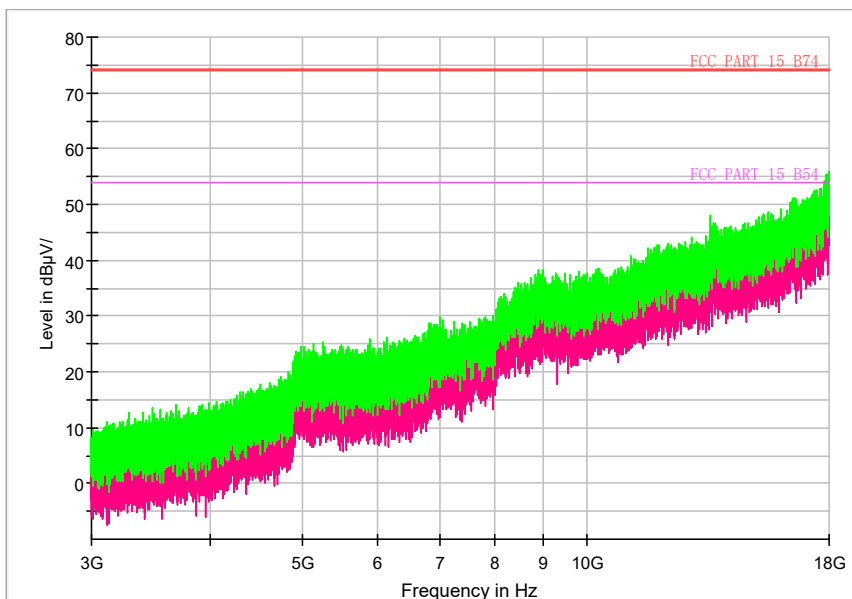


Frequency Range: 3GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11g

Full Spectrum

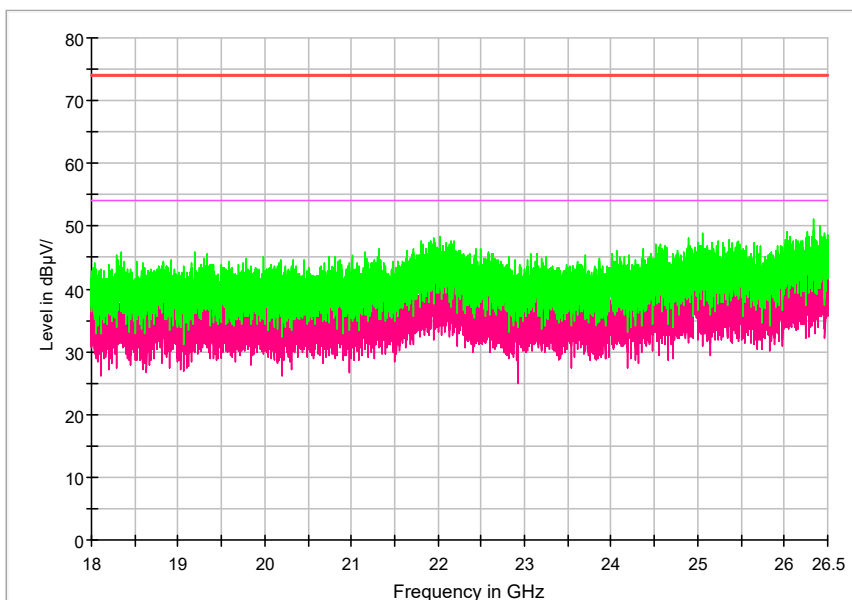


Frequency Range: 18GHz -26.5GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11g

Full Spectrum

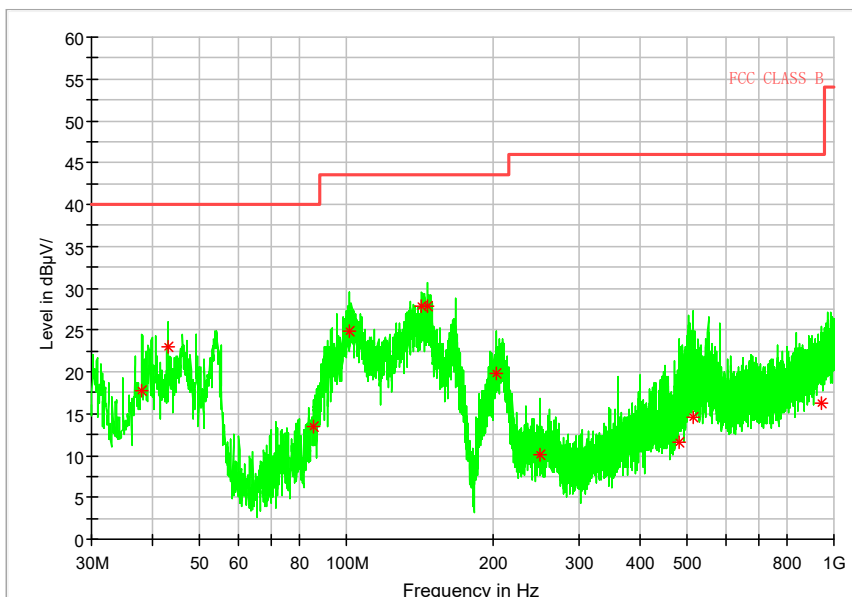


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11n(HT20)

Full Spectrum

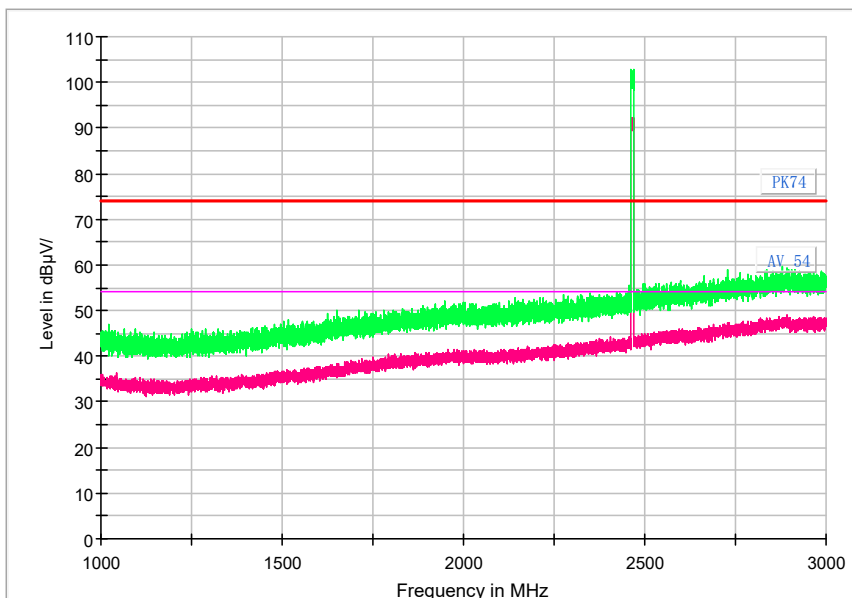


Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

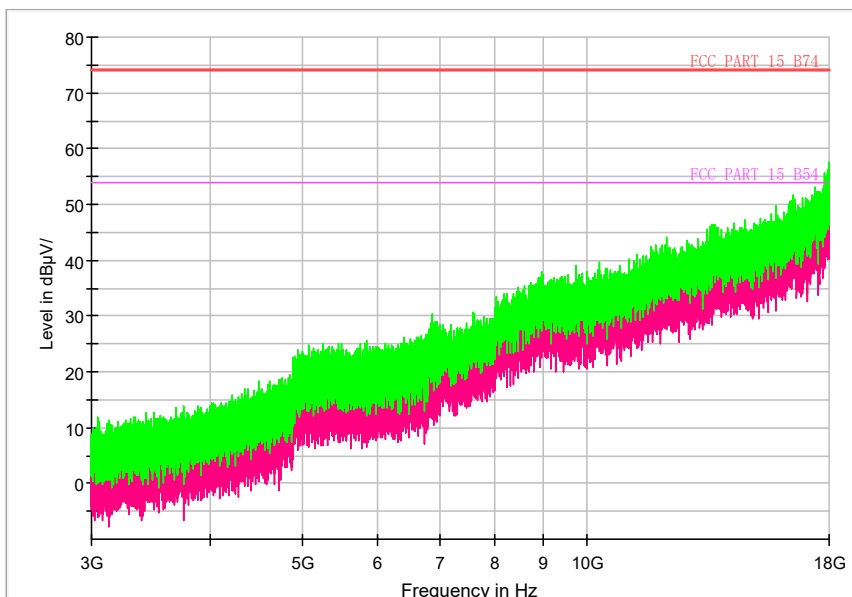


Frequency Range: 3GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

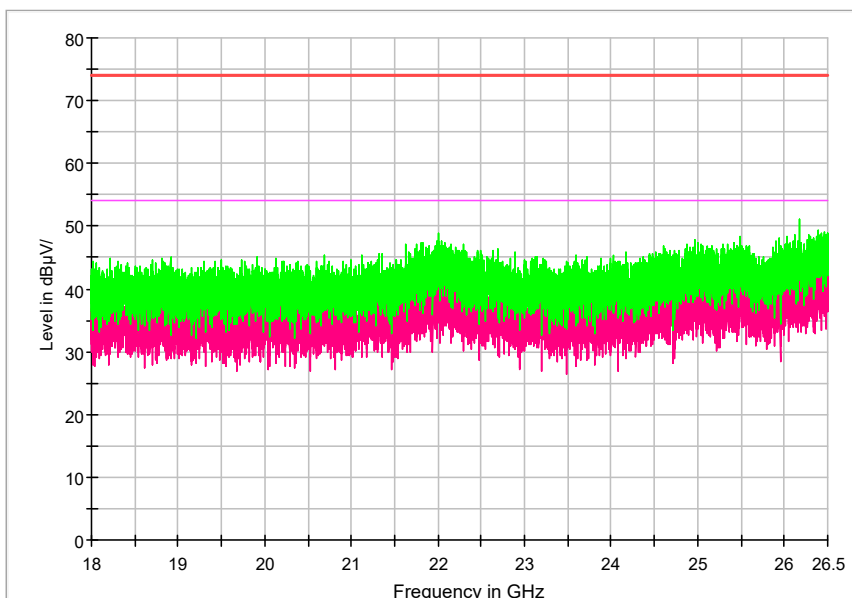


Frequency Range: 18GHz -26.5GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

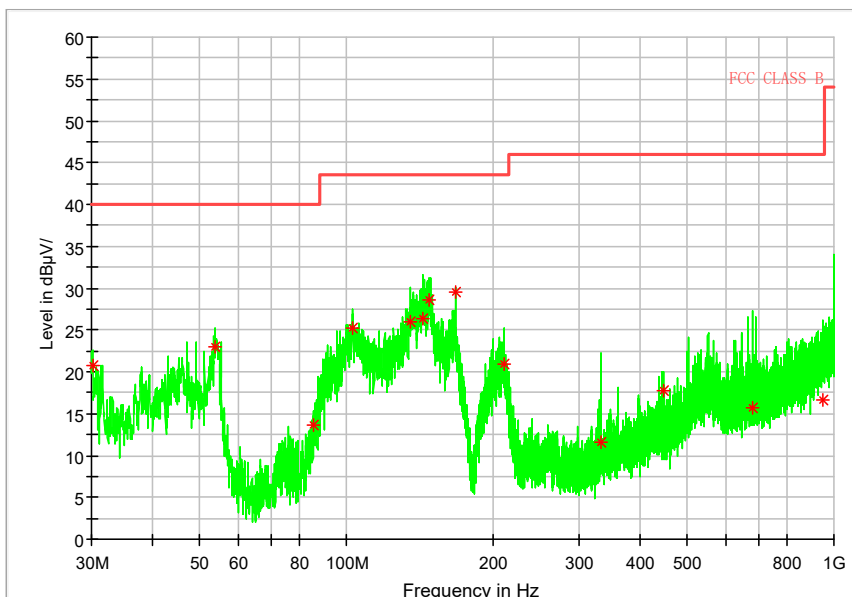


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Modulation type: 802.11n(HT40)

Full Spectrum

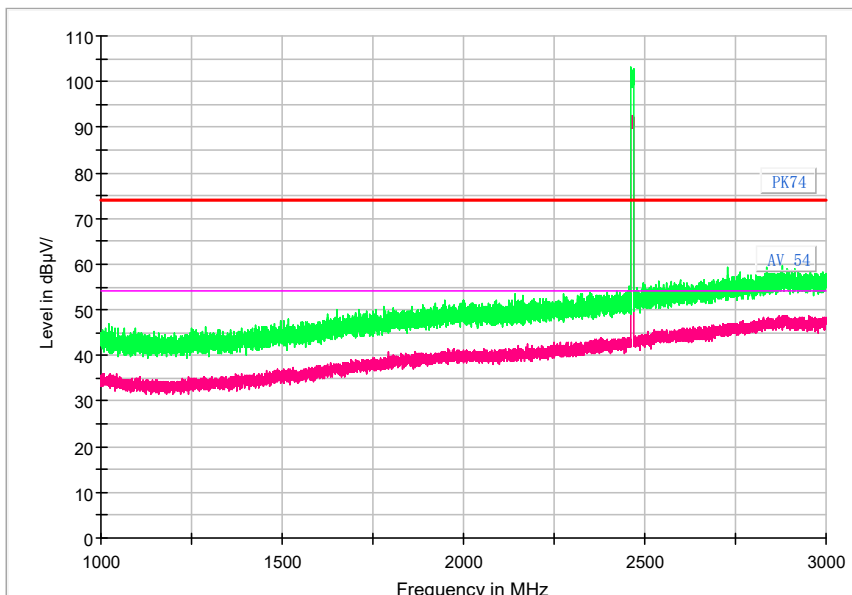


Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40)

Full Spectrum

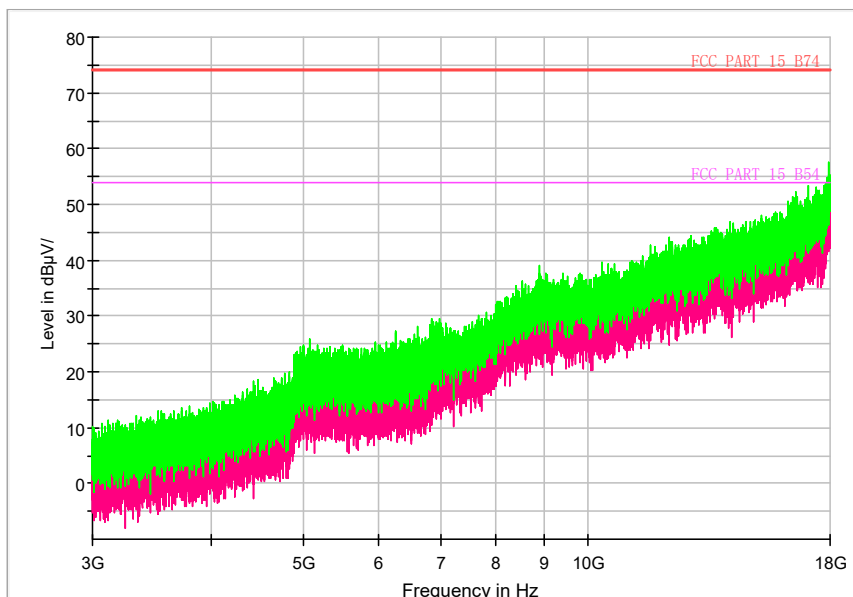

Frequency Range: 3GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40)


Full Spectrum

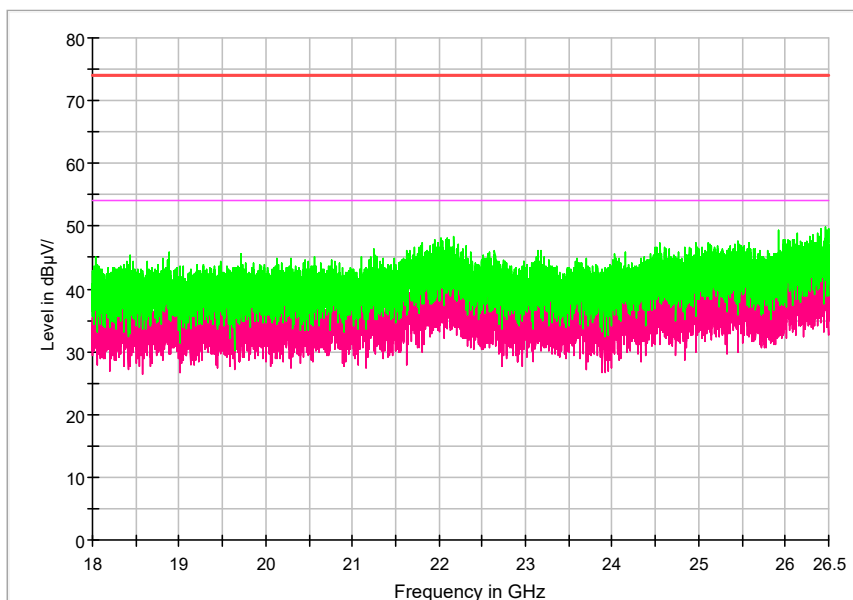

Frequency Range: 18GHz -26.5GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40)

## AC Power line Conducted Emission

Full Spectrum

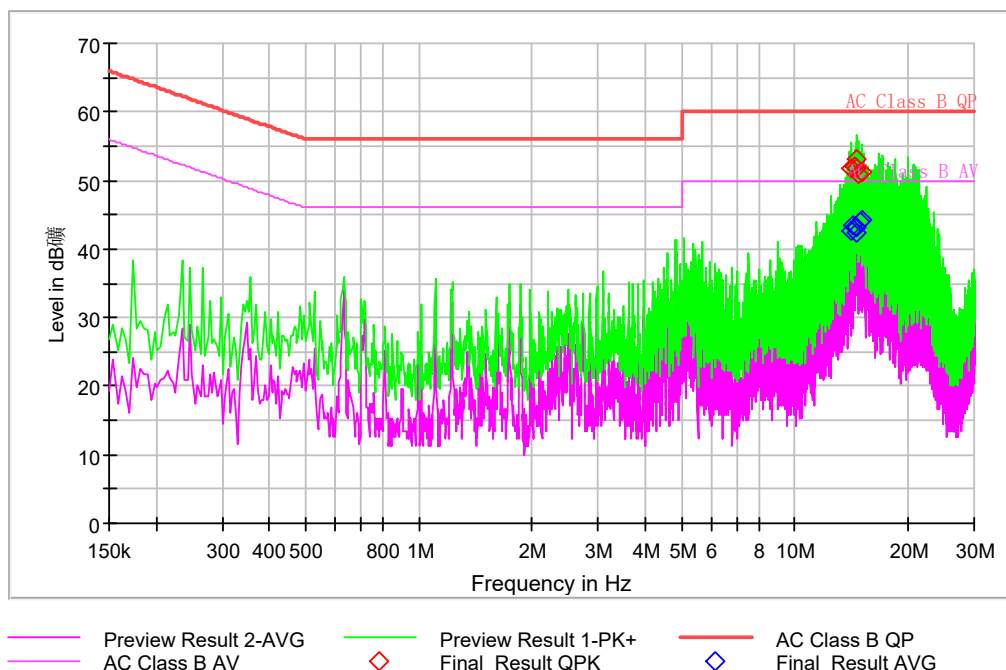

Comment

L +N Line

### MEASUREMENT RESULT:

| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 14.055000       | ---            | 43.49          | 50.00        | 6.51        | L1   | 29.9       |
| 14.059000       | 49.27          | ---            | 60.00        | 10.73       | L1   | 29.9       |
| 14.295000       | ---            | 43.66          | 50.00        | 6.34        | N    | 29.9       |
| 14.419000       | 56.39          | ---            | 60.00        | 3.61        | N    | 29.9       |
| 14.531000       | 55.77          | ---            | 60.00        | 4.23        | L1   | 29.9       |
| 14.535000       | ---            | 43.66          | 50.00        | 6.34        | L1   | 29.9       |
| 14.647000       | 55.68          | ---            | 60.00        | 4.32        | L1   | 29.9       |
| 14.655000       | ---            | 44.02          | 50.00        | 5.98        | L1   | 29.9       |
| 14.843000       | 57.82          | ---            | 60.00        | 2.18        | N    | 29.9       |
| 14.911000       | ---            | 44.37          | 50.00        | 5.63        | L1   | 29.9       |
| 15.143000       | 52.93          | ---            | 60.00        | 7.07        | L1   | 29.9       |
| 15.155000       | ---            | 44.54          | 50.00        | 5.46        | N    | 29.9       |

---End of Test Report---