



D2450V2-SN:968; 2450Head

Calibrated impedance: $53.9\Omega + 3.68j\Omega$; Measurement impedance: $53.0\Omega - 4.8j\Omega$ (within 5Ω)

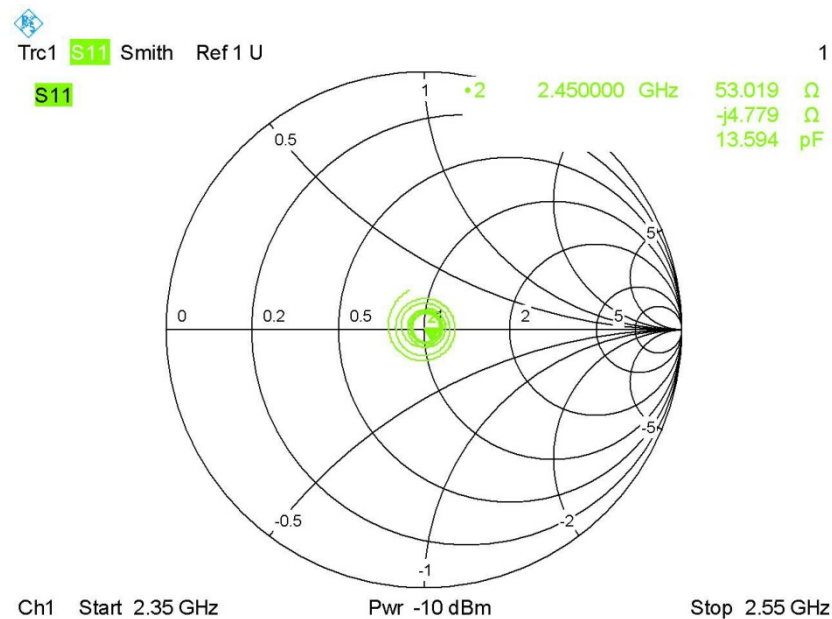


Calibrated return loss: -25.70dB; Measurement return loss: -24.48 dB (within 20%)

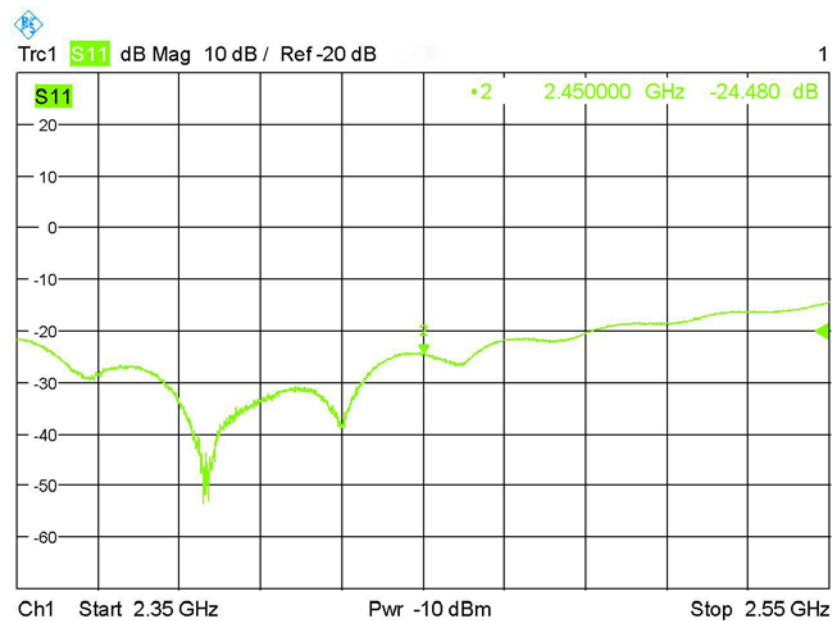


SN 15/15 WGA 36; 5200Head

Calibrated impedance: $25.40\Omega + 9.93j\Omega$; Measurement impedance: $26.54\Omega - 3.46j\Omega$ (within 5Ω)

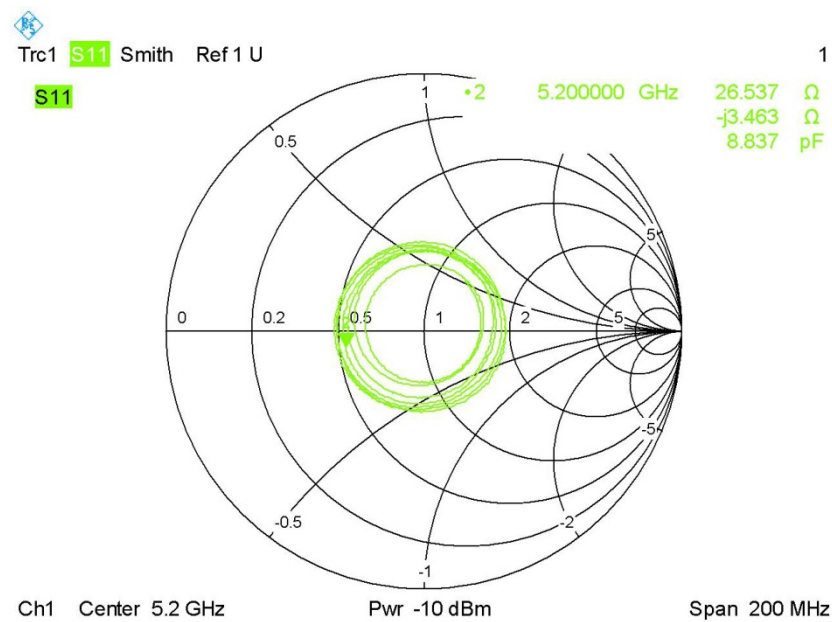


Calibrated return loss: -9.15dB; Measurement return loss: -10.40 dB (within 20%)

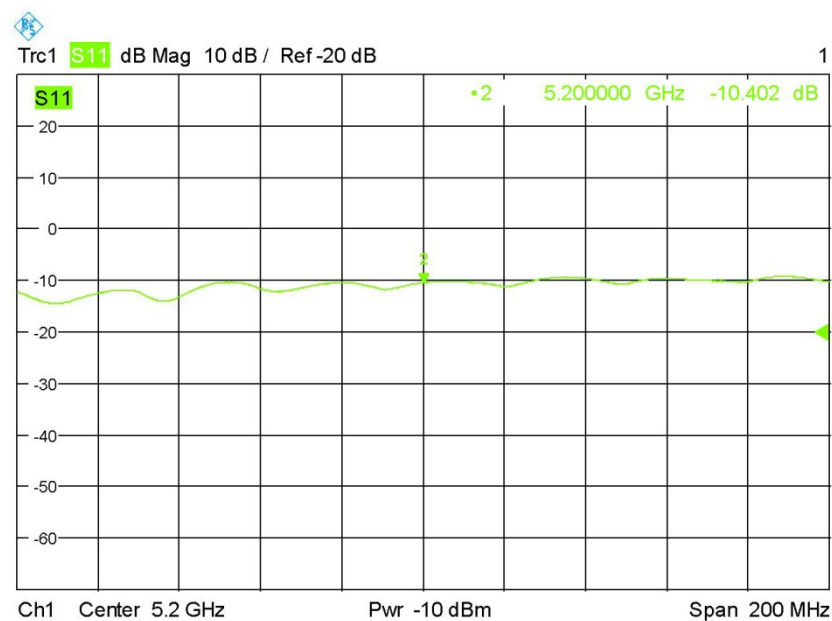

SN 15/15 WGA 36; 5800Head

Calibrated impedance: $52.55\Omega + 23.38j\Omega$; Measurement impedance: $53.08\Omega + 5.56j\Omega$ (within 5Ω)

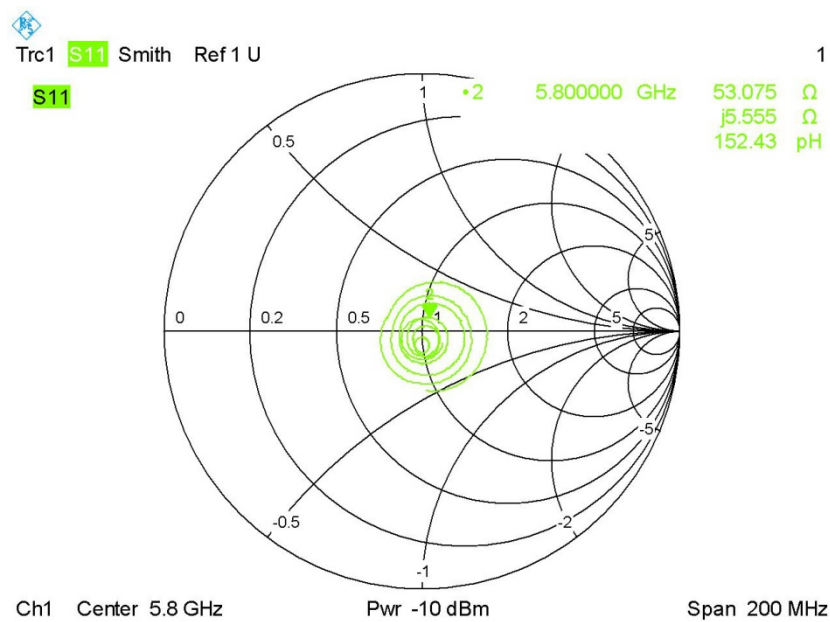

Calibrated return loss: -13.02dB; Measurement return loss: -13.42 dB (within 20%)

