



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1810196061-WF01

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Happy Guo

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name : Langie Speaking Translator

Model/Type reference : S2

List Model(s)..... : S2-i, S2-a, S2-x, S2-n, S2-b

Trade Mark..... : Langie

FCC ID..... : 2AOZK-S2

Applicant's name : Comet Innovation Limited

Address of applicant : Unit 1204, Winful Centre, 30 Shing Yip Street, Kwun Tong,
Kowloon, Hong Kong

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF : Dated 2011-01

Date of Receipt..... : Oct. 23, 2018

Date of Test Date..... : Oct. 23, 2018 – Dec. 09, 2018

Data of Issue..... : Dec. 10, 2018

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1810196061-WF01	Dec. 10, 2018
		Date of issue

Equipment under Test : Langie Speaking Translator

Model /Type : S2

Listed Models : S2-i, S2-a, S2-x, S2-n, S2-b

Applicant : **Comet Innovation Limited**

Address : Unit 1204, Winful Centre, 30 Shing Yip Street, Kwun Tong, Kowloon, Hong Kong

Manufacturer : **Comet Innovation Limited**

Address : Unit 1204, Winful Centre, 30 Shing Yip Street, Kwun Tong, Kowloon, Hong Kong

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2018-12-10	CTL1810196061-WF01	Tracy Qi



Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT (S)	9
2.6. MODIFICATIONS	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	13
3.3. MAXIMUM PEAK OUTPUT POWER	20
3.4. 20dB BANDWIDTH	21
3.5. FREQUENCY SEPARATION	25
3.6. NUMBER OF HOPPING FREQUENCY	27
3.7. TIME OF OCCUPANCY (DWELL TIME)	29
3.8. OUT-OF-BAND EMISSIONS	33
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	41
3.10. ANTENNA REQUIREMENT	42
4. TEST SETUP PHOTOS OF THE EUT	43
5. PHOTOS OF THE EUT	44

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25℃
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Langie Speaking Translator
Model/Type reference:	S2
Power supply:	DC 3.7V from battery
Adapter information:	Input: 100-240V~, 50/60Hz, 0.3A Max Output: 5V---1500mA
Bluetooth :	
Supported type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA antenna
Antenna gain:	1.0 dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date recent	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2018/06/01	2019/05/31
LISN	R&S	ESH2-Z5	860014/010	2018/06/01	2019/05/31
Power Meter	Agilent	U2531A	TW53323507	2018/06/01	2019/05/31
Power Sensor	Agilent	U2021XA	MY5365004	2018/05/20	2019/05/19
EMI Test Receiver	R&S	ESCI	103710	2018/06/01	2019/05/31
Spectrum Analyzer	Agilent	E4407B	MY41440676	2018/05/20	2019/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2018/01/16	2019/01/15
Controller	EM Electronics	Controller EM 1000	N/A	2018/05/20	2019/05/19
Active Loop Antenna	Daze	ZN30900A	N/A	2018/05/18	2019/05/17
Bilog Antenna	Schwarzbeck	VULB 9168	00824	2018/10/25	2019/10/24
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2018/05/18	2019/05/17
Horn Antenna	SCHWARZBACK	BBHA 9170	BBHA9170184	2018/05/18	2019/05/17
Amplifier	Agilent	8349B	3008A02306	2018/05/18	2019/05/17
Amplifier	Agilent	8447D	2944A10176	2018/05/18	2019/05/17
Temperature/Humidity Meter	Gangxing	CTH-608	02	2018/05/19	2019/05/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2018/05/19	2019/05/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2018/05/19	2019/05/18
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2018/06/01	2019/05/31
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/06/01	2019/05/31
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/06/01	2019/05/31
RF Cable	Megalon	RF-A303	N/A	2018/06/01	2019/05/31
EMI Test Software	R&S	ES-K1	V1.7.1	2018/06/01	2019/05/31
EMI Test Software	AUDIX	E3	V6.0	2018/06/01	2019/05/31

The calibration interval was one year

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
/	/	/	/	/
/	/	/	/	/

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

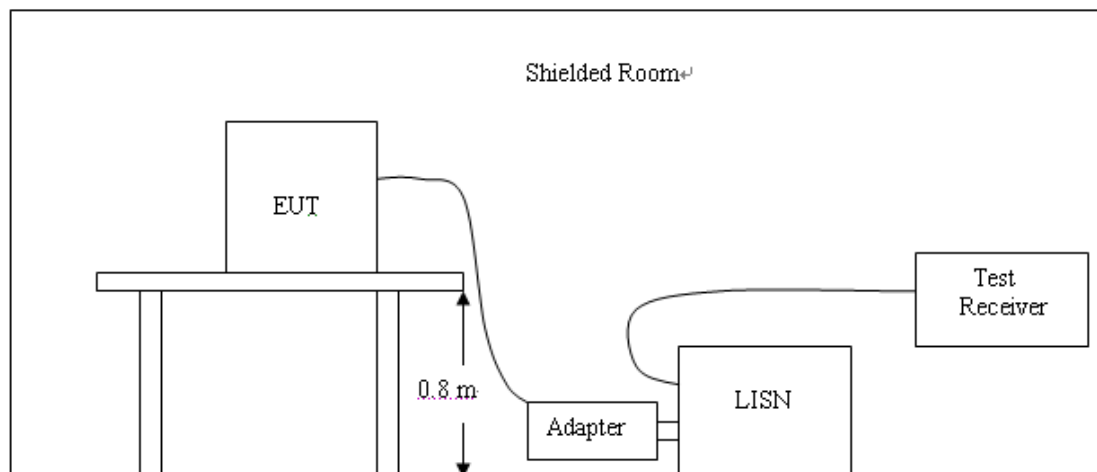

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


TEST RESULTS

Remark:

1. All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

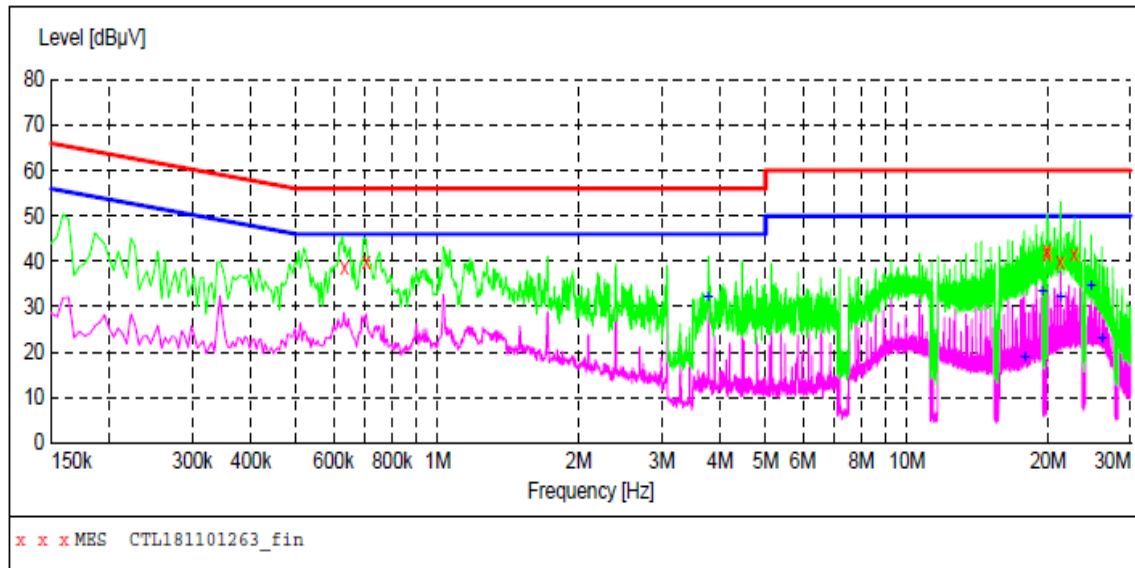

MEASUREMENT RESULT: "CTL181101263_fin"

2018-10-28 02:14??

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.632000	38.70	10.2	56	17.3	QP	L1	GND
0.704000	40.10	10.2	56	15.9	QP	L1	GND
19.874000	42.40	10.9	60	17.6	QP	L1	GND
19.880000	41.70	10.9	60	18.3	QP	L1	GND
21.248000	39.70	11.0	60	20.3	QP	L1	GND
22.754000	41.50	11.0	60	18.5	QP	L1	GND


MEASUREMENT RESULT: "CTL181101263_fin2"

2018-10-28 02:14??

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
3.770000	31.90	10.4	46	14.1	AV	L1	GND
17.834000	18.80	10.8	50	31.2	AV	L1	GND
19.460000	33.30	10.9	50	16.7	AV	L1	GND
21.266000	31.90	11.0	50	18.1	AV	L1	GND
24.680000	34.40	11.1	50	15.6	AV	L1	GND
26.036000	23.10	11.1	50	26.9	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

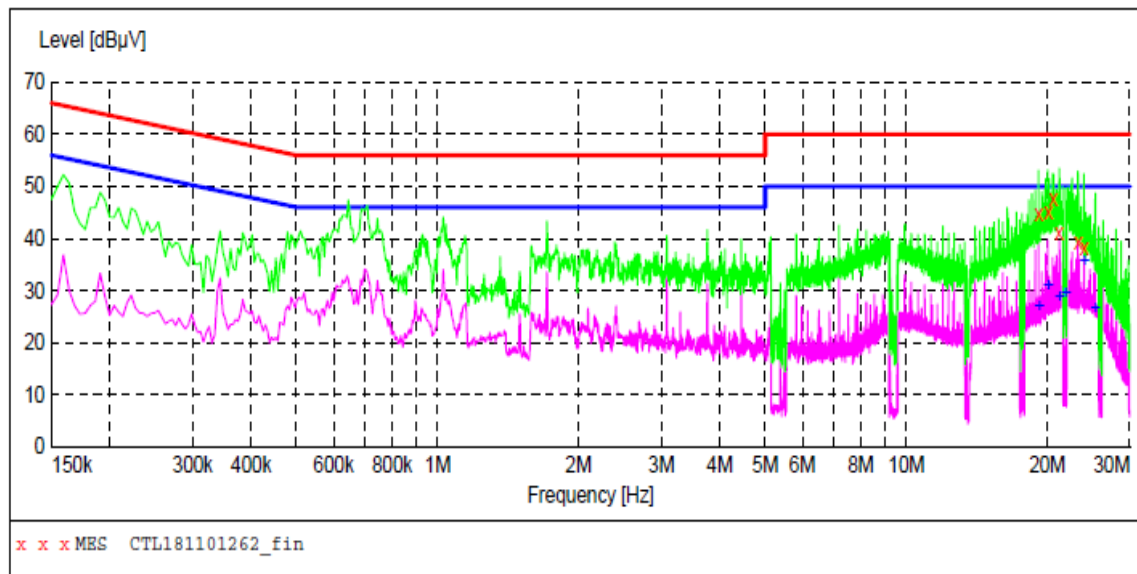**MEASUREMENT RESULT: "CTL181101262_fin"**

2018-10-28 02:10??

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
19.154000	44.70	10.9	60	15.3	QP	N	GND
20.066000	44.90	11.0	60	15.1	QP	N	GND
20.558000	47.60	11.0	60	12.4	QP	N	GND
21.182000	41.10	11.0	60	18.9	QP	N	GND
23.300000	39.10	11.1	60	20.9	QP	N	GND
23.972000	38.30	11.1	60	21.7	QP	N	GND

MEASUREMENT RESULT: "CTL181101262_fin2"

2018-10-28 02:10??

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
19.172000	26.80	10.9	50	23.2	AV	N	GND
20.066000	30.80	11.0	50	19.2	AV	N	GND
21.230000	28.90	11.0	50	21.1	AV	N	GND
21.908000	29.30	11.0	50	20.7	AV	N	GND
23.990000	35.70	11.1	50	14.3	AV	N	GND
25.334000	26.40	11.1	50	23.6	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

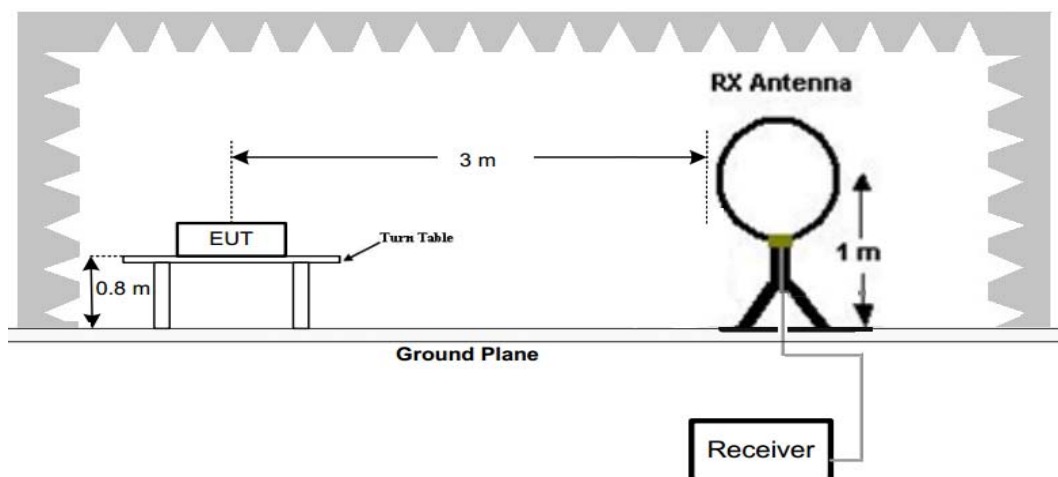

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

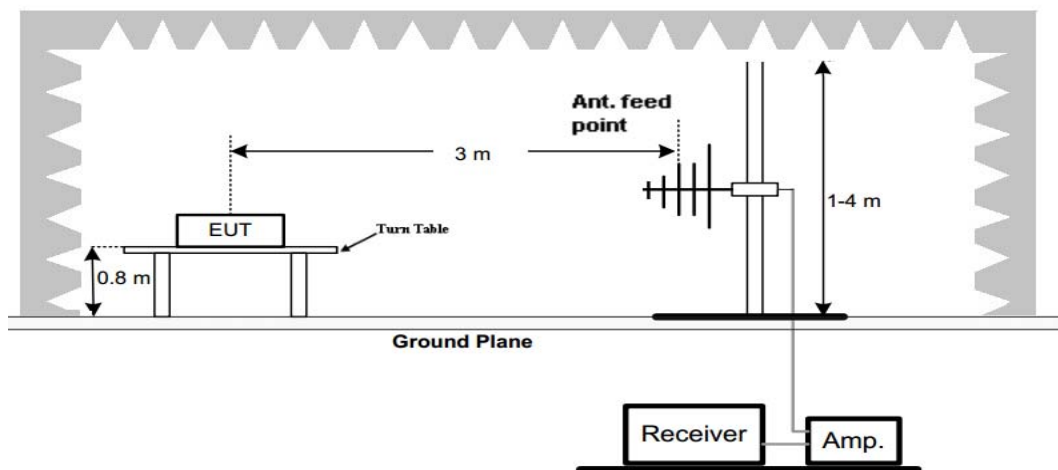

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

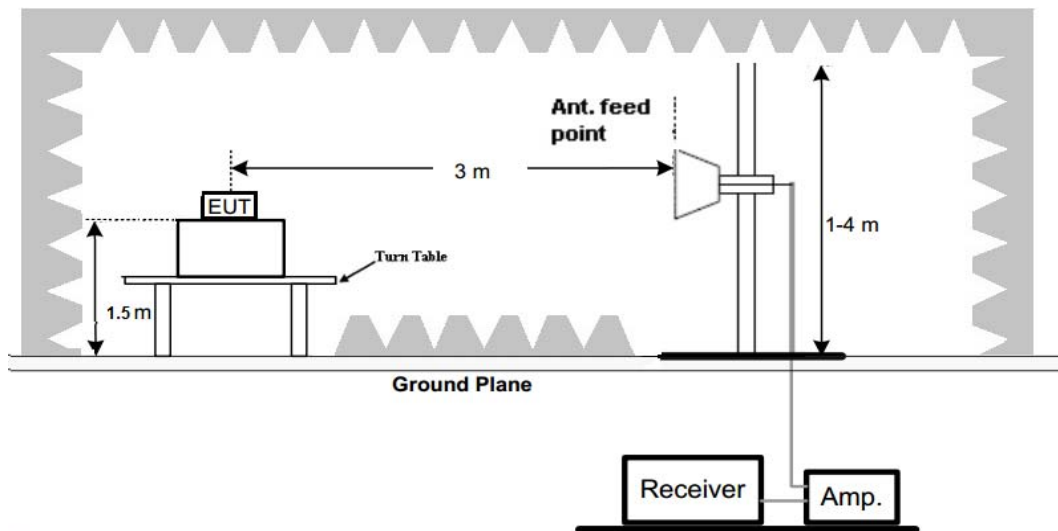

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:


- We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
- For below 1GHz testing recorded worst at GFSK DH5 low channel.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Z position.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	200.0 ms	120 kHz	VULB 9168

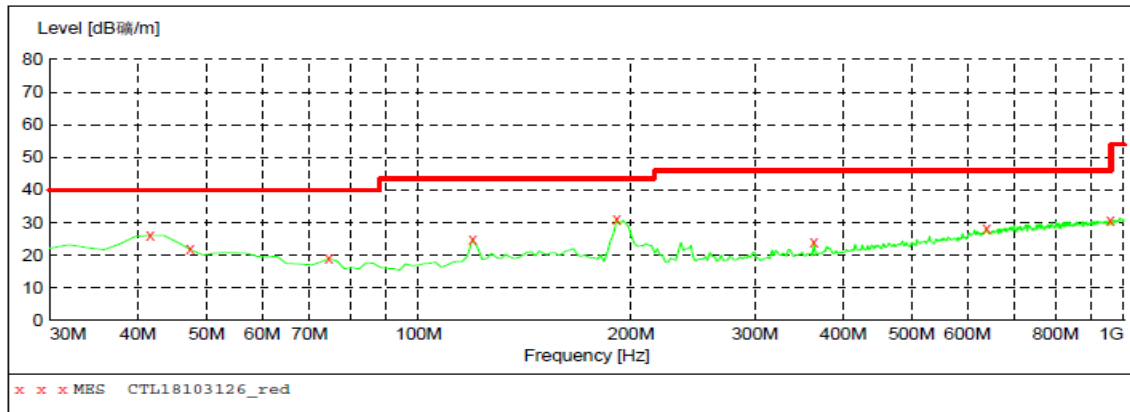**MEASUREMENT RESULT: "CTL18103126_red"**


2018-10-31 9:34

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	26.10	14.7	40.0	13.9	---	0.0	0.00	HORIZONTAL
47.460000	21.90	14.3	40.0	18.1	---	0.0	0.00	HORIZONTAL
74.620000	19.00	10.9	40.0	21.0	---	0.0	0.00	HORIZONTAL
119.240000	24.80	13.1	43.5	18.7	---	0.0	0.00	HORIZONTAL
191.020000	31.10	11.5	43.5	12.4	---	0.0	0.00	HORIZONTAL
363.680000	23.90	15.5	46.0	22.1	---	0.0	0.00	HORIZONTAL
639.160000	28.10	20.8	46.0	17.9	---	0.0	0.00	HORIZONTAL
955.380000	30.70	24.3	46.0	15.3	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	200.0 ms	120 kHz	VULB 9168

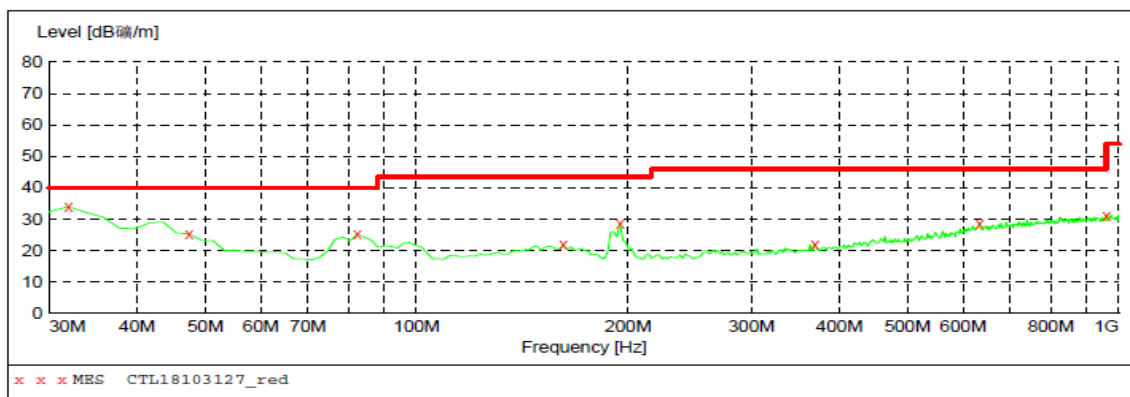**MEASUREMENT RESULT: "CTL18103127_red"**

2018-10-31 9:36

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	34.00	13.9	40.0	6.0	---	0.0	0.00	VERTICAL
47.460000	25.40	14.3	40.0	14.6	---	0.0	0.00	VERTICAL
82.380000	25.20	10.2	40.0	14.8	---	0.0	0.00	VERTICAL
161.920000	21.80	15.0	43.5	21.7	---	0.0	0.00	VERTICAL
194.900000	28.60	11.3	43.5	14.9	---	0.0	0.00	VERTICAL
369.500000	22.00	15.6	46.0	24.0	---	0.0	0.00	VERTICAL
633.340000	28.70	20.7	46.0	17.3	---	0.0	0.00	VERTICAL
959.260000	31.20	24.3	46.0	14.8	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz**Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.****GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	52.41	PK	74	21.59	47.90	33.49	6.91	35.89	4.51
4804.00	--	AV	54	--	--	--	--	--	--
6016.00	45.93	PK	74	28.07	37.78	35.13	7.61	34.60	8.15
6016.00	--	AV	54	--	--	--	--	--	--
7206.00	46.79	PK	74	27.21	35.68	36.95	9.18	35.03	11.11
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	50.52	PK	74	23.48	46.01	33.49	6.91	35.89	4.51
4804.00	--	AV	54	--	--	--	--	--	--
4996.00	45.75	PK	74	28.25	38.99	33.97	7.03	34.23	6.76
4996.00	--	AV	54	--	--	--	--	--	--
7206.00	44.36	PK	74	29.64	33.25	36.95	9.18	35.03	11.11
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	51.66	PK	74	22.34	47.01	33.60	6.95	35.90	4.65
4882.00	--	AV	54	--	--	--	--	--	--
7019.00	44.94	PK	74	29.06	34.63	36.28	9.11	35.08	10.31
7019.00	--	AV	54	--	--	--	--	--	--
7323.00	45.80	PK	74	28.20	34.10	37.46	9.23	35.00	11.70
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	51.83	PK	74	22.17	47.18	33.60	6.95	35.90	4.65
4882.00	--	AV	54	--	--	--	--	--	--
6651.00	43.49	PK	74	30.51	34.20	35.63	8.57	34.91	9.29
6651.00	--	AV	54	--	--	--	--	--	--
7323.00	46.10	PK	74	27.90	34.40	37.46	9.23	35.00	11.70
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	51.28	PK	74	22.72	46.36	33.84	7.00	35.92	4.92
4960.00	--	AV	54	--	--	--	--	--	--
5072.00	46.05	PK	74	27.95	39.00	34.23	7.07	34.26	7.05
5072.00	--	AV	54	--	--	--	--	--	--
7440.00	45.10	PK	74	28.90	33.15	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	52.50	PK	74	21.50	47.58	33.84	7.00	35.92	4.92
4960.00	--	AV	54	--	--	--	--	--	--
7158.00	43.34	PK	74	30.66	32.49	36.73	9.16	35.04	10.85
7158.00	--	AV	54	--	--	--	--	--	--
7440.00	47.13	PK	74	26.87	35.18	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)**Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	97.88	PK	--	--	64.48	28.78	4.61	0.00	33.40
2402.00	90.87	AV	--	--	57.47	28.78	4.61	0.00	33.40
2370.00	44.05	PK	74	29.95	10.88	28.59	4.58	0.00	33.17
2370.00	--	AV	54	--	--	--	--	--	--
2390.00	45.71	PK	74	28.29	12.39	28.72	4.60	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	50.27	PK	74	23.73	16.88	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	95.63	PK	--	--	62.23	28.78	4.61	0.00	33.40
2402.00	89.15	AV	--	--	55.75	28.78	4.61	0.00	33.40
2370.00	44.89	PK	74	29.11	11.72	28.59	4.58	0.00	33.17
2370.00	--	AV	54	--	--	--	--	--	--
2390.00	44.25	PK	74	29.75	10.93	28.72	4.60	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	49.77	PK	74	24.23	16.38	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	97.46	PK	--	--	63.84	28.92	4.70	0.00	33.62
2480.00	91.04	AV	--	--	57.42	28.92	4.70	0.00	33.62
2483.50	48.80	PK	74	25.20	15.17	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2490.00	43.95	PK	74	30.05	10.30	28.94	4.71	0.00	33.65
2490.00	--	AV	54	--	--	--	--	--	--
2500.00	41.27	PK	74	32.73	7.59	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	96.00	PK	--	--	62.38	28.92	4.70	0.00	33.62
2480.00	90.22	AV	--	--	56.60	28.92	4.70	0.00	33.62
2483.50	46.25	PK	74	27.75	12.62	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2490.00	43.83	PK	74	30.17	10.18	28.94	4.71	0.00	33.65
2490.00	--	AV	54	--	--	--	--	--	--
2500.00	41.29	PK	74	32.71	7.61	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

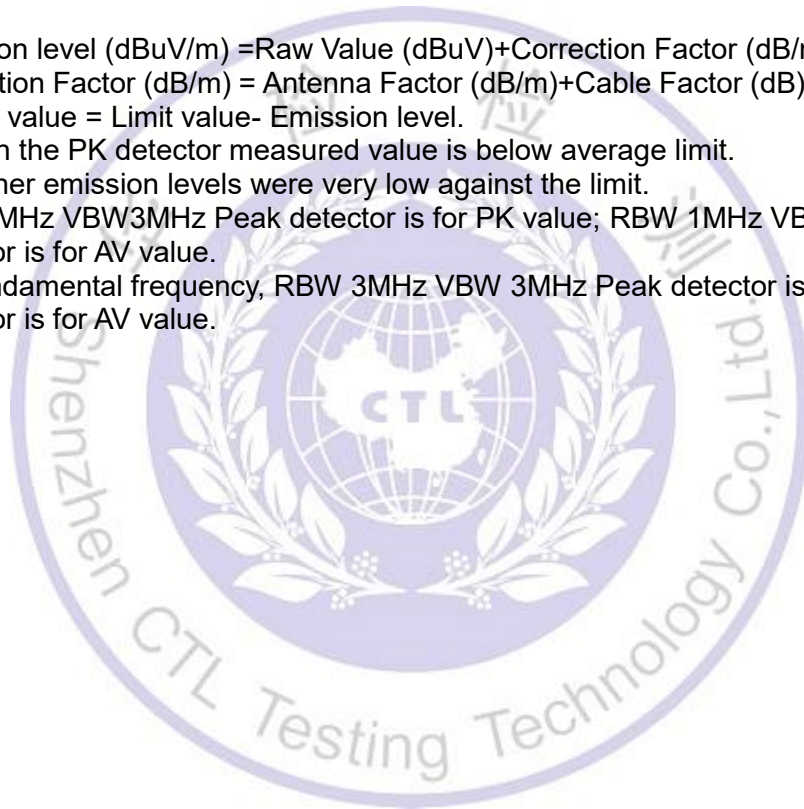

3.3. Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 125mW(20.97).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration



Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	2.75	20.97	Pass
	39	2.96		
	78	2.73		
π/4DQPSK	00	2.50	20.97	Pass
	39	2.63		
	78	2.76		
8DPSK	00	2.67	20.97	Pass
	39	2.57		
	78	2.63		

Note: 1.The test results including the cable lose.

Test plot as follows:

3.4. 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

Modulation	Channel	20dB bandwidth (MHz)	99% OBW (MHz)	Result
GFSK	CH00	1.037	0.90446	Pass
	CH39	1.017	0.90667	
	CH78	1.012	0.89620	
$\pi/4$ DQPSK	CH00	1.321	1.1879	
	CH39	1.289	1.1769	
	CH78	1.314	1.1803	
8DPSK	CH00	1.308	1.2097	
	CH39	1.295	1.1960	
	CH78	1.300	1.1806	

Test plot as follows:

Agilent Spectrum Analyzer - Occupied BW

RL [] RF [] 50.000 kHz [] SEIZE INT [] ALIGN/AUTO [] 10:45:42 AM Nov 27, 2018

Center Freq 2.402000000 GHz

Trig: Free Run

Radio Std: None

#IFGain: Low

#Att: 30 dB

Avgl/Hold: > 10/10

Radio Device: BTS

Ref Offset 1 dB

Ref 20.00 dBm

10 dB/div

Log

Center 2.402 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 3 MHz

Sweep 3.2 ms

Auto

Occupied Bandwidth	Total Power	9.52 dBm
904.46 kHz		
Transmit Freq Error	1.316 kHz	OBW Power
x dB Bandwidth	1.037 MHz	x dB
		99.00 %
		-20.00 dB

MSG [] STATUS []

Frequency

Center Freq 2.402000000 GHz

CF Step 300.000 kHz

Auto

Freq Offset 0 Hz

Agilent Spectrum Analyzer - Occupied BW

RAL	CF	F0: 2.44 GHz	SESS INT	ALIGN/AUTO	B0: 47:30 AM Nov 27, 2018
-----	----	--------------	----------	------------	---------------------------

Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None
 Trig: Free Run Avg/Hold: 10/10
 #IFGain: low #Atten: 30 dB Radio Device: BTS

Ref Offset 1 dB
Ref 20.00 dBm

10 dB/div
Log

Center 2.441 GHz Span 3 MHz
#Res BW 30 kHz Sweep 3.2 ms
#VBW 100 kHz

Occupied Bandwidth	Total Power	9.87 dBm
906.67 kHz		
Transmit Freq Error	1.283 kHz	OBW Power
x dB Bandwidth	1.017 MHz	x dB
		-20.00 dB

MSG STATUS

Agilent Spectrum Analyzer - Occupied BW

RL: [] SENSE [INT] ALIGN [AUTO] 10:51:57 AM Nov 27, 2018

Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None

#IF Gain: Low → Trig: Free Run Avg/Hold: 10/10

Radio Device: BTS

Ref Offset 1 dB
Ref 20.00 dBm

Center 2.48 GHz Span 3 MHz
#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms

Occupied Bandwidth		Total Power	9.62 dBm
896.20 kHz			
Transmit Freq Error	2.068 kHz	OBW Power	99.00 %
x dB Bandwidth	1.012 MHz	x dB	-20.00 dB

MSG [] STATUS []

CH78

Agilent Spectrum Analyzer - Occupied BW

[L] [RL] [RF] [50.000 kHz] [SENSE INT] [ALPHA AUTO] [11:01:31 AM Nov 27, 2018]

Center Freq 2.402000000 GHz
 Center Freq: 2.402000000 GHz
 Radio Std: None

Trig: Free Run
 Avg/Hold: 10/10

#IF Gain: Low
 #Att: 30 dB
 Radio Device: BTS

Ref Offset 1 dB
 Ref 20.00 dBm

10 dB/div
 Log

Center 2.402 GHz
 Span 3 MHz

#Res BW 30 kHz
 #VBW 100 kHz
 Sweep 3.2 ms

Occupied Bandwidth	Total Power
1.1879 MHz	8.86 dBm

Transmit Freq Error	OBW Power
-2.022 kHz	99.00 %

x dB Bandwidth	x dB
1.321 MHz	-20.00 dB

Agilent Spectrum Analyzer - Occupied BW

REF	CF	SE	ALIGN/AUTO	11-03-21 AM Nov 27, 2018
Center Freq 2.441000000 GHz	Center Freq: 2.441000000 GHz	Trig: Free Run	Avg/Hold: 10/10	Radio Std: None
#IF Gain: Low	#Atten: 30 dB			Radio Device: BTS

The spectrum plot displays a yellow trace representing the signal's power spectral density. The vertical axis is logarithmic, ranging from -70 dBm to 10 dBm. The horizontal axis shows frequency. A prominent signal is visible between 2.440 GHz and 2.442 GHz, peaking around -10 dBm. The rest of the spectrum is flat at approximately -45 dBm.

Center 2.441 GHz	Span 3 MHz
#Res BW 30 kHz	Sweep 3.2 ms
#VBW 100 kHz	

Metric	Value
Occupied Bandwidth	1.1769 MHz
Total Power	-8.98 dBm
Transmit Freq Error	-2.750 kHz
OBW Power	99.00 %
x dB Bandwidth	1.289 MHz
x dB	-20.00 dB

Agilent Spectrum Analyzer - Occupied BW

RL RF EDC Mode SENSE INT ALIGN AUTO 11:07:22 AM Nov 27, 2018

Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None
 Trig: Free Run Avg/Hold: >10/10
 #IF Gain: Low #Atten: 30 dB Radio Device: BST

Ref Offset 1 dB
Ref 20.00 dBm

Center 2.48 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms

Occupied Bandwidth		Total Power	7.81 dBm
1.1803 MHz			
Transmit Freq Error	-3.623 kHz	OBW Power	99.00 %
x dB Bandwidth	1.314 MHz	x dB	-20.00 dB

MSG STATUS

CH78



3.5. Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS


Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.163	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	1.020	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	1.083	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			

Note:


We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:

GFSK Modulation

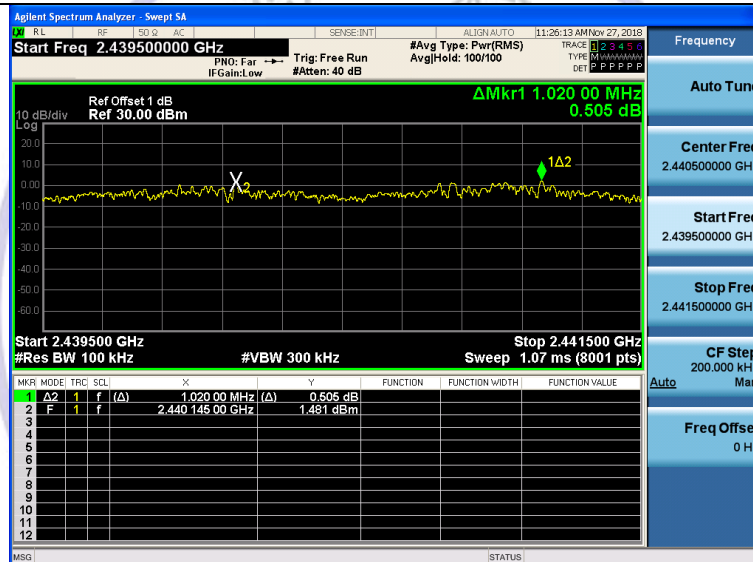 $\pi/4$ DQPSK Modulation

8DPSK Modulation

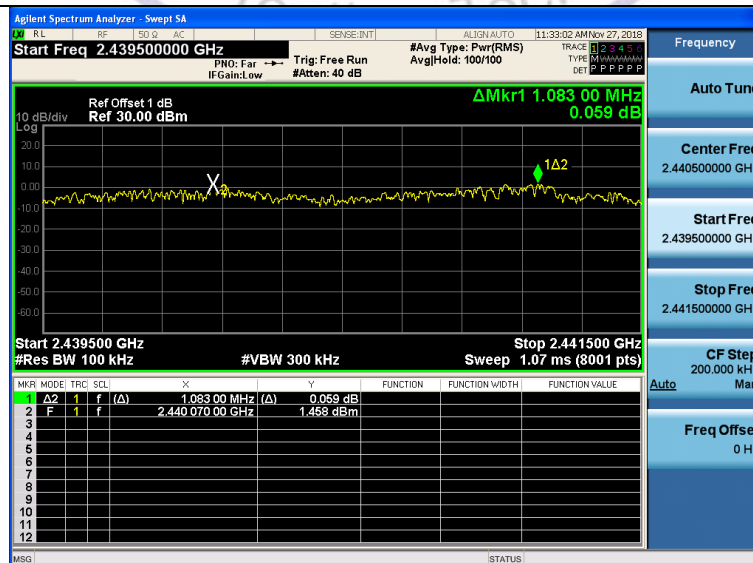

3.6. Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration





Test Results


Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
π/4DQPSK	79		
8DPSK	79		

Test plot as follows:

GFSK Modulation

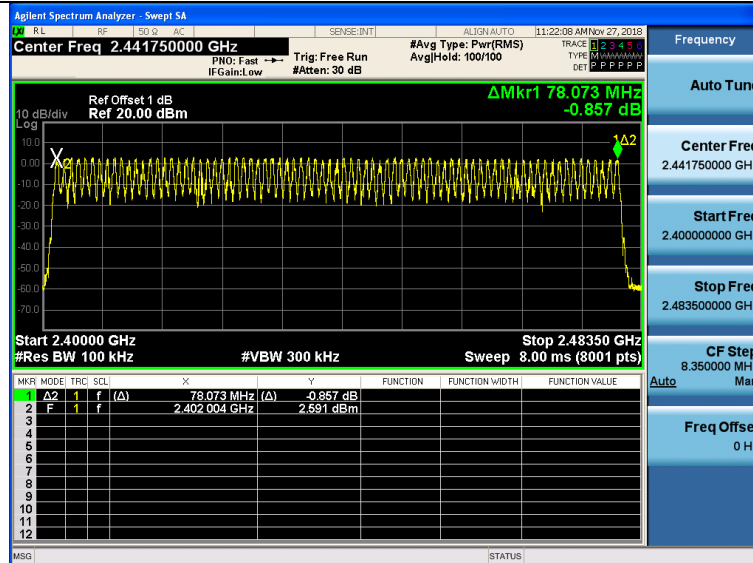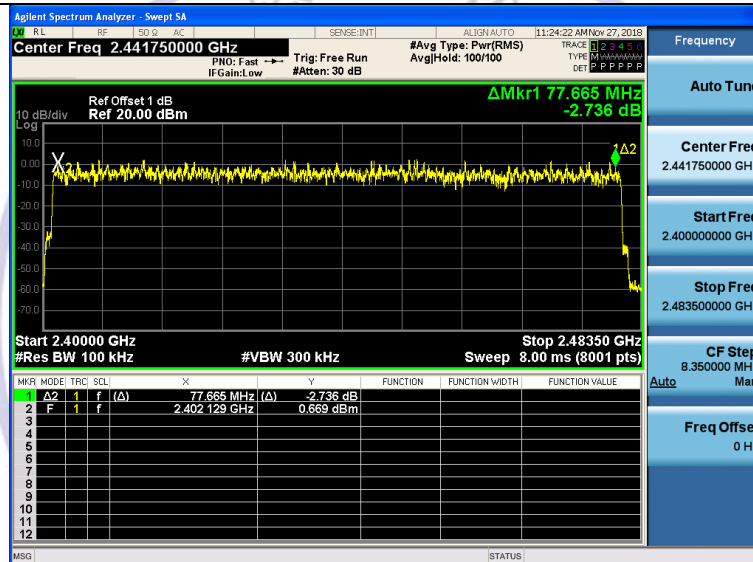 $\pi/4$ DQPSK Modulation

8DPSK Modulation

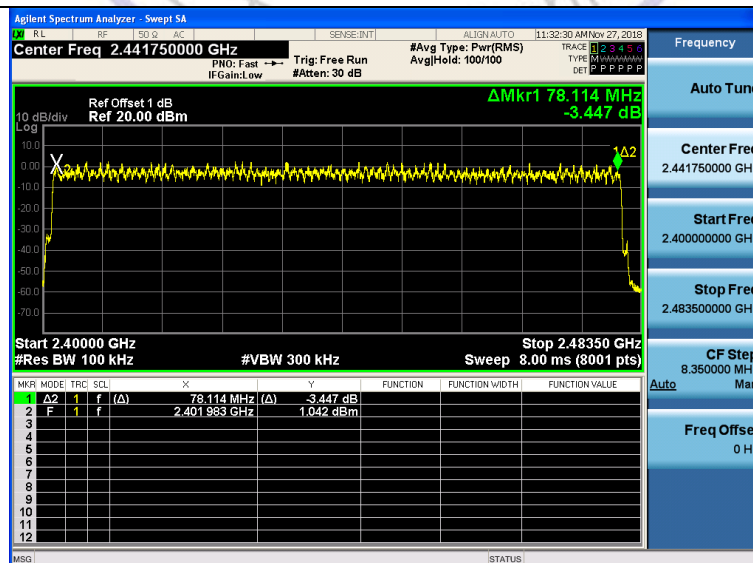

3.7. Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results


Modulation	Packet	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.370	0.118	0.40	Pass
	DH3	1.626	0.260		
	DH5	2.872	0.306		
π/4DQPSK	2-DH1	0.378	0.121	0.40	Pass
	2-DH3	1.629	0.261		
	2-DH5	2.876	0.307		
8DPSK	3-DH1	0.380	0.122	0.40	Pass
	3-DH3	1.575	0.252		
	3-DH5	2.878	0.307		

Note:


- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6$ Second for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6$ Second for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6$ Second for DH5, 2-DH5, 3-DH5

Test plot as follows:


GFSK Modulation

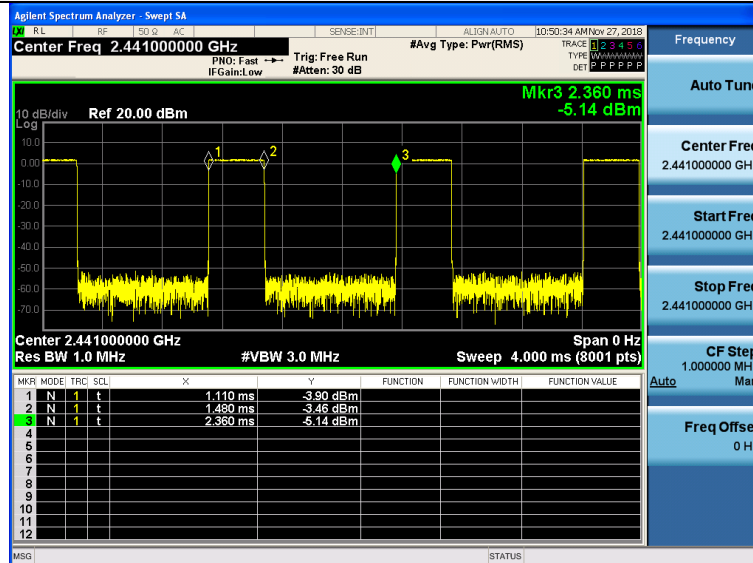

DH1

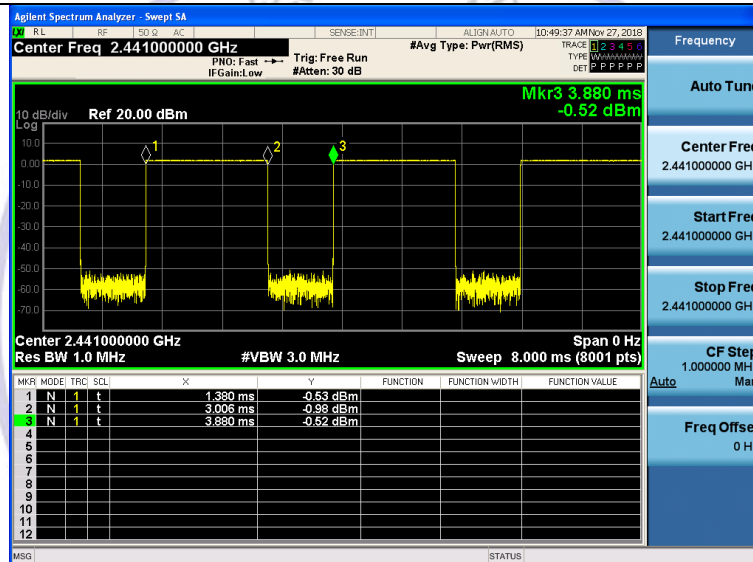

DH3

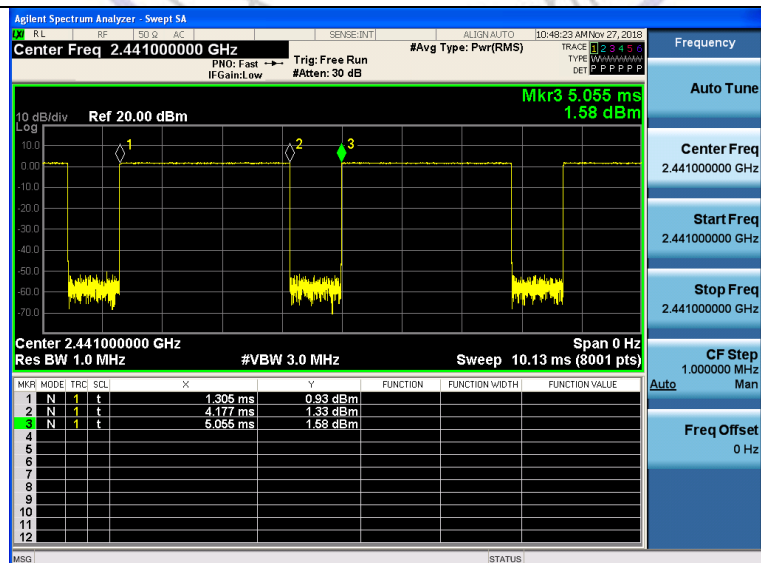

DH5

Agilent Spectrum Analyzer - Swept SA

1 | RL | BW | RF | F | SLO | AC | SENSE:INT | ALIGN:AUTO | 11:06:20 AM Nov 27, 2019

Center Freq 2.441000000 GHz #Avg Type: Pwr(RMS) TRACE 1 2 3 4 5
 PNG: Fast IFGain:Low Trig: Free Run TYPE WXXXXXXXXXX
 #Atten: 30 dB DET PPPPP

10 dB/div Ref 20.00 dBm Mkr3 2.406 ms -6.79 dBm

MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	1.156 ms	-4.79 dBm		
2	N	1	t	1.534 ms	-5.27 dBm		
3	N	1	t	2.406 ms	-6.79 dBm		
4							
5							
6							
7							
8							
9							
10							
11							
12							

Center 2.441000000 GHz Span 0 Hz
 Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (8001 pts)

Agilent Spectrum Analyzer - Swept SA

ALN: L1:05:37 AM Nov 27, 2019

Center Freq 2.441000000 GHz

PNO: Fast IF Gain: Low Trig: Free Run #Avg Type: Pwr(RMS) Span 0 Hz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 8.000 ms (8001 pts)

Mkr3 2.884 ms
0.86 dBm

N	F	T	D
1	N	t	384.0 μs
2	N	t	2.013 ms
3	N	t	2.884 ms

Agilent Spectrum Analyzer - Swept SA

RL RF LO G VDC SENSE [INT] ALIGN/AUTO 11:04:19 AM Nov 27, 2018

Center Freq 2.441000000 GHz #Avg Type: Pwr(RMS) TRACE BW 3.0 MHz
 PNG: Fast → Trig: Free Run TYPE W W W W W W W W
 IF Gain: Low #Assert: 30 dB DET P P P P P P

Mkr3 5.003 ms 1.16 dBm

Ref 20.00 dBm

Center 2.441000000 GHz Span 0 Hz
Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	↑	t	1.253 ms	0.04 dBm			
2	N	↑	t	4.129 ms	-0.03 dBm			
3	N	↑	t	5.003 ms	1.16 dBm			
4								
5								
6								
7								
8								
9								
10								
11								
12								

MSG STATUS

Frequency
Auto Tuning
Center Freq 2.441000000 GHz
Start Freq 2.441000000 GHz
Stop Freq 2.441000000 GHz
CF Step 1.000000 MHz
Auto Manual
Freq Offset 0 Hz

2-DH5



3.8. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

Test plot as follows:


GFSK CH00




GFSK CH39



Reference

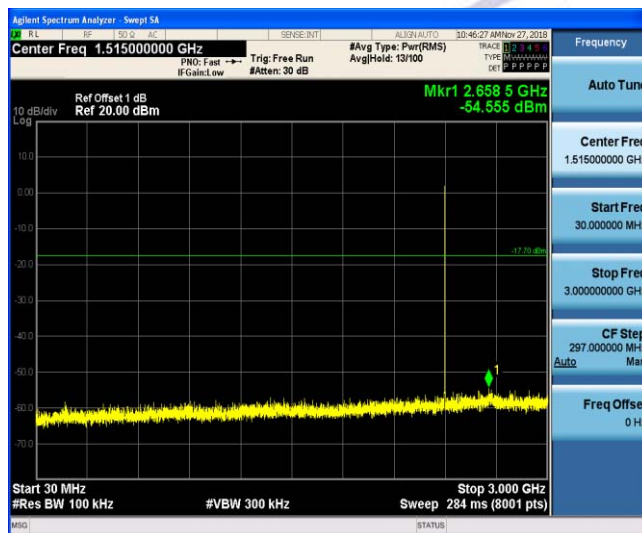

Reference

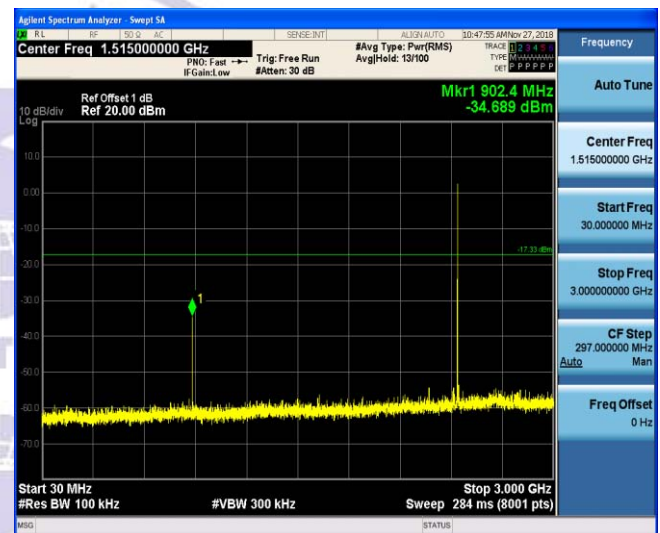

30MHz-3GHz



30MHz-3GHz




3GHz-25GHz

3GHz-25GHz


GFSK CH78

 $\pi/4$ DQPSK CH00

Reference

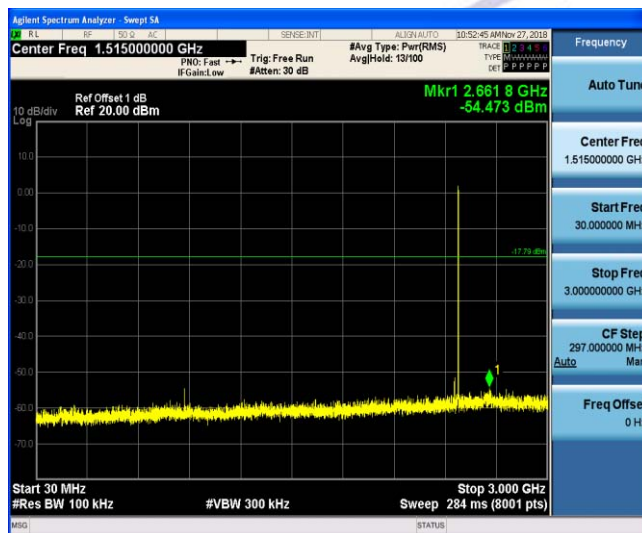

Reference

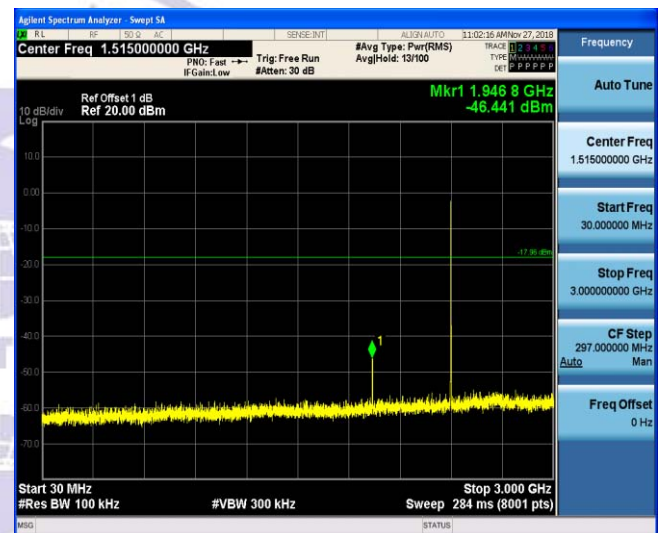

30MHz-3GHz



30MHz-3GHz




3GHz-25GHz


3GHz-25GHz

$\pi/4$ DQPSK CH39 $\pi/4$ DQPSK CH78

Reference

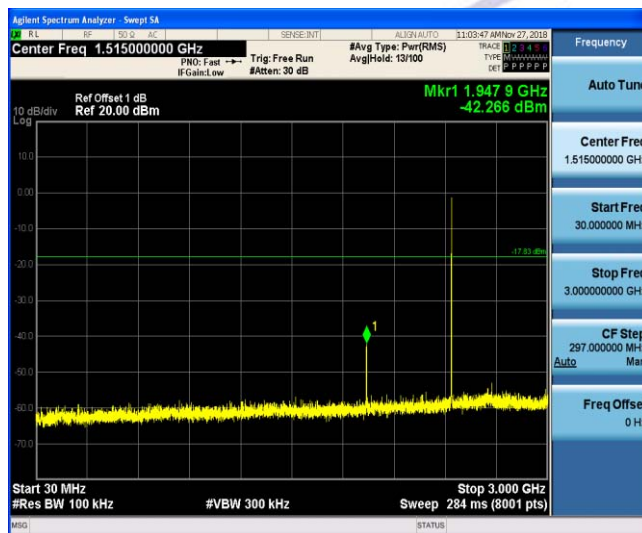

Reference

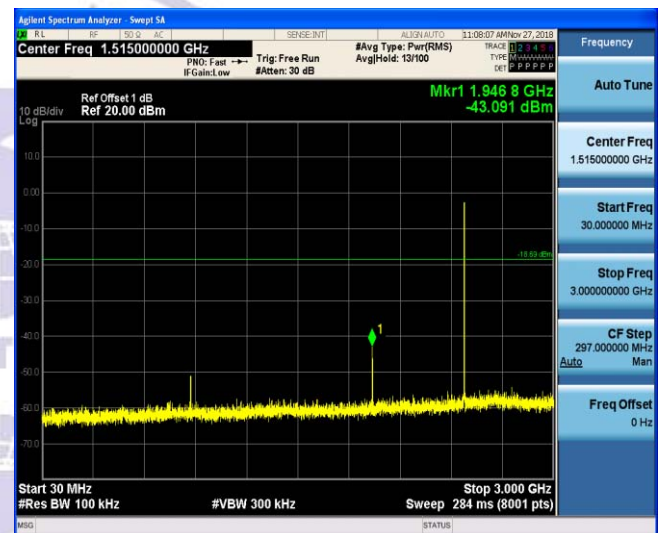

30MHz-3GHz



30MHz-3GHz



3GHz-25GHz

3GHz-25GHz


8DPSK CH00




8DPSK CH39




Reference

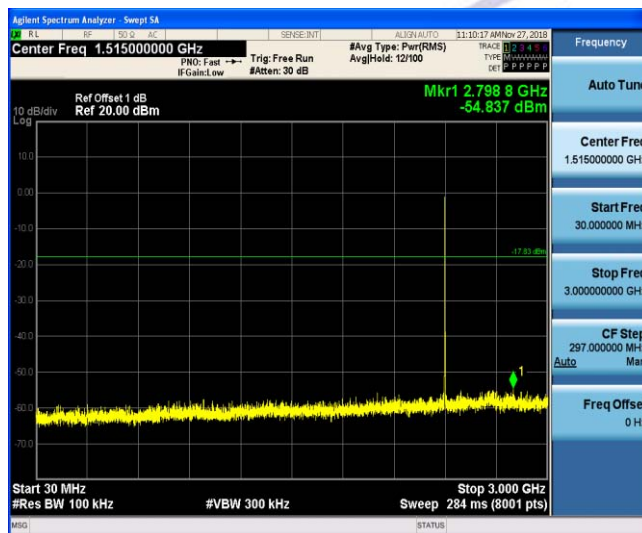

Reference

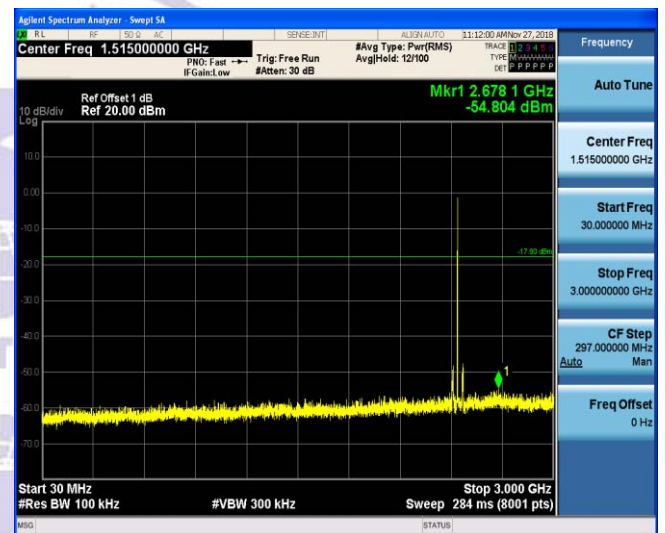

30MHz-3GHz

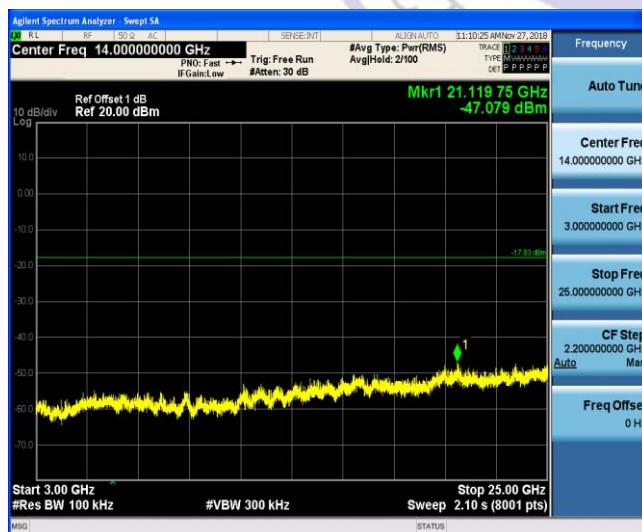


30MHz-3GHz





3GHz-25GHz

3GHz-25GHz

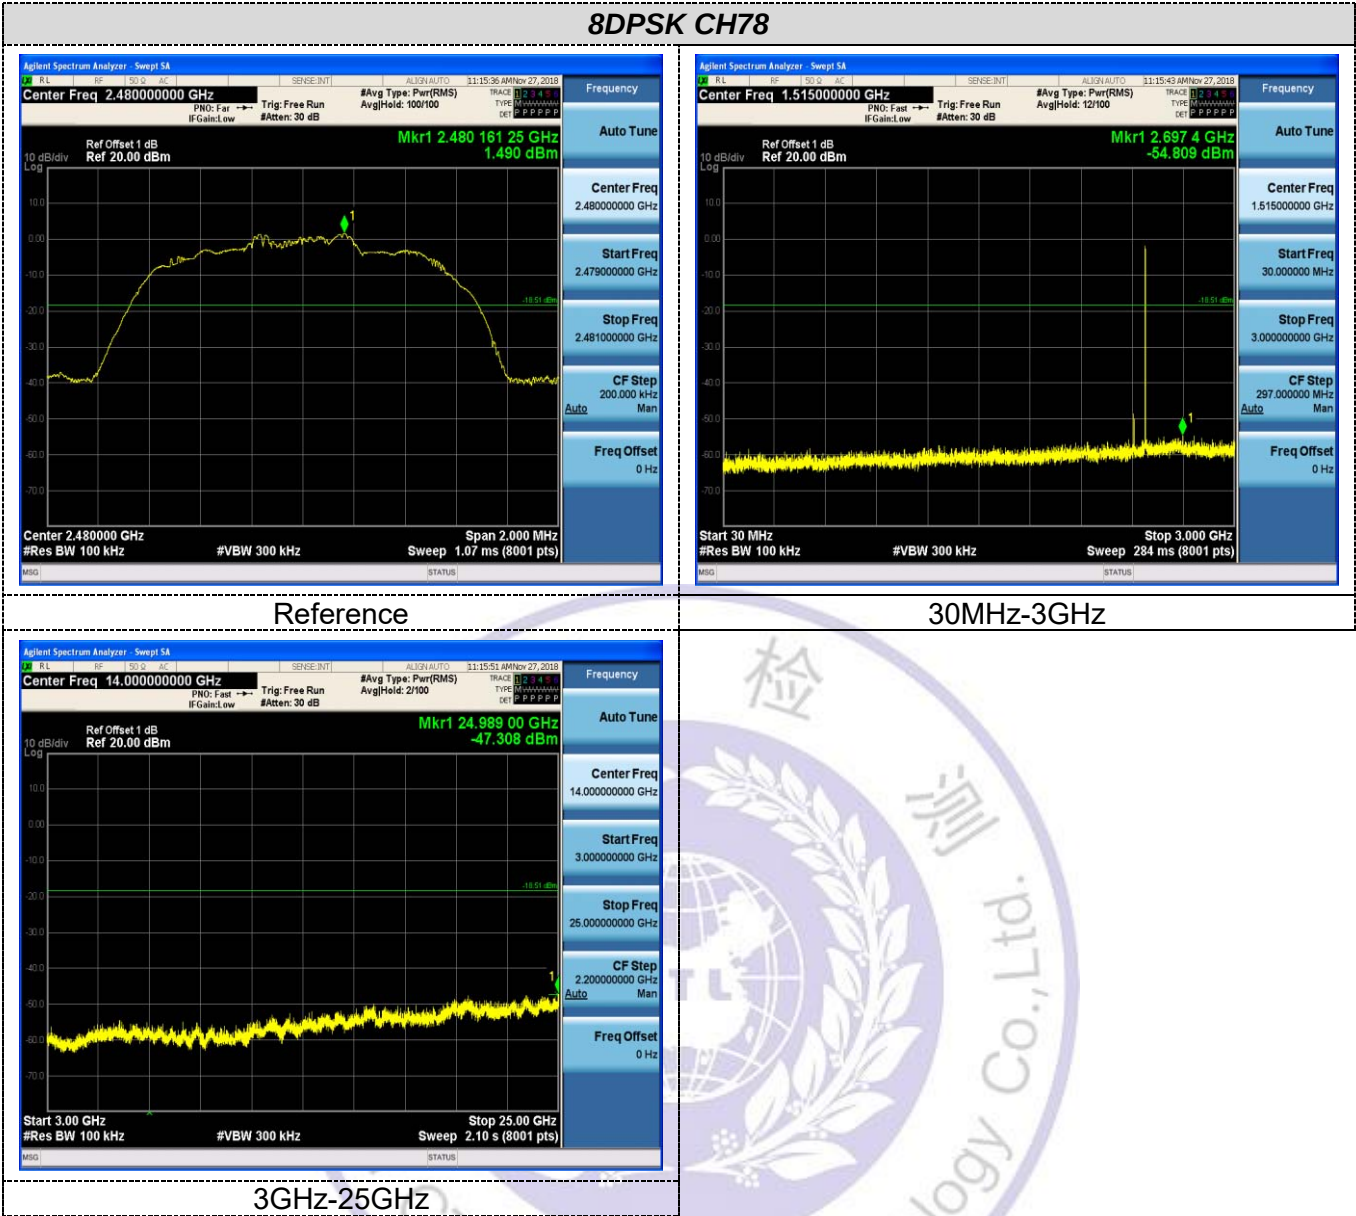



Band-edge Measurements for RF Conducted Emissions:

GFSK

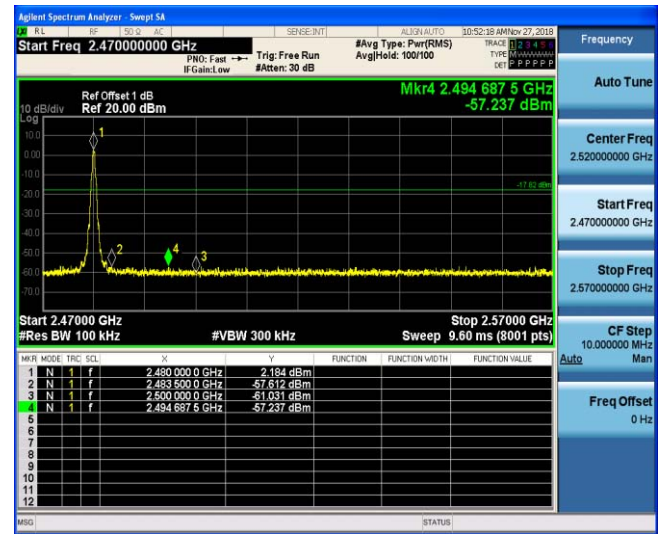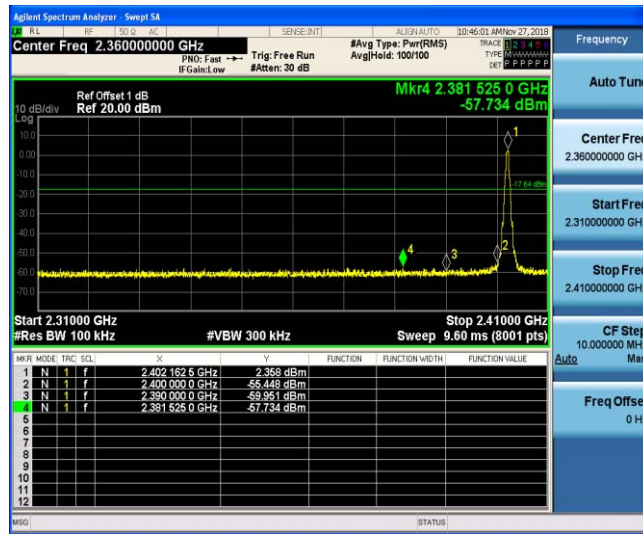

Left Band edge hopping off



Right Band edge hopping off

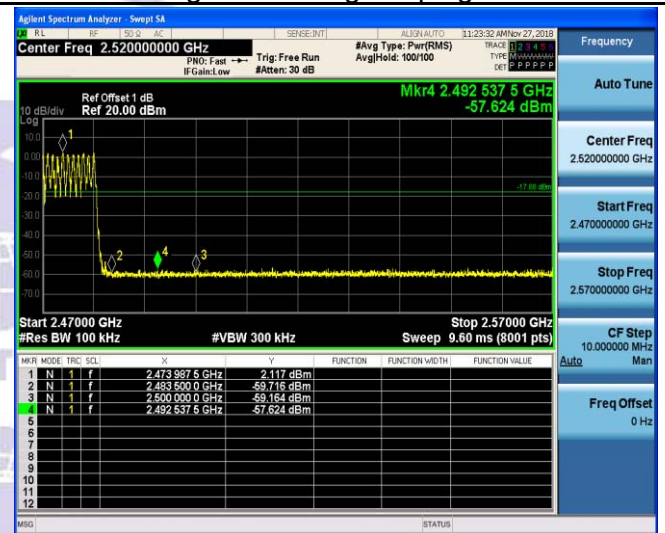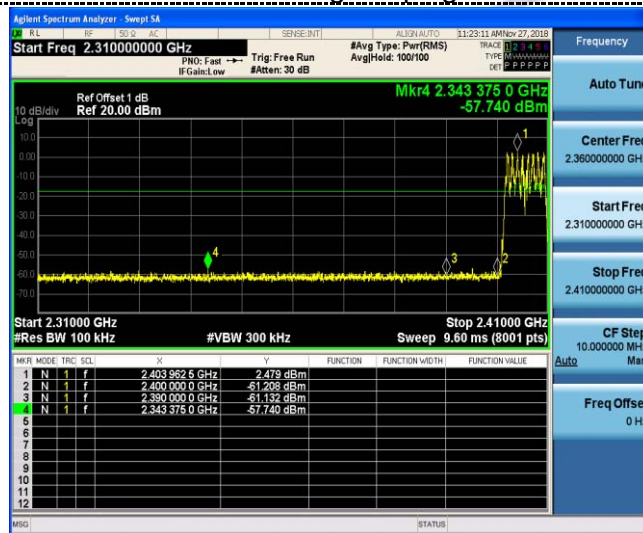

Left Band edge hopping on


Right Band edge hopping on

$\pi/4$ DQPSK

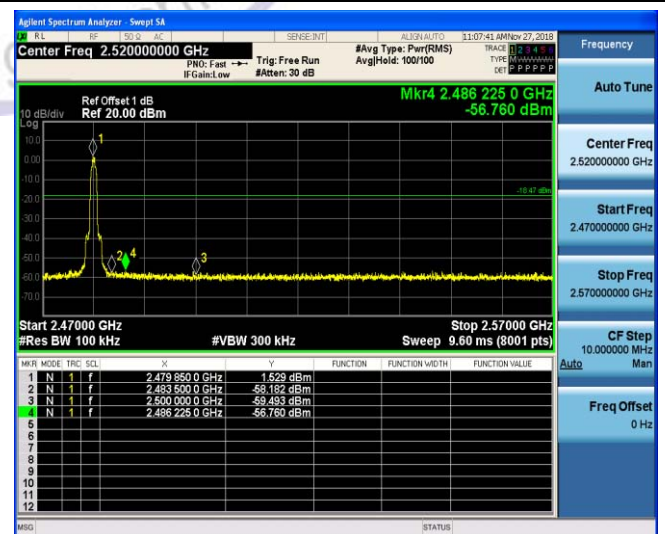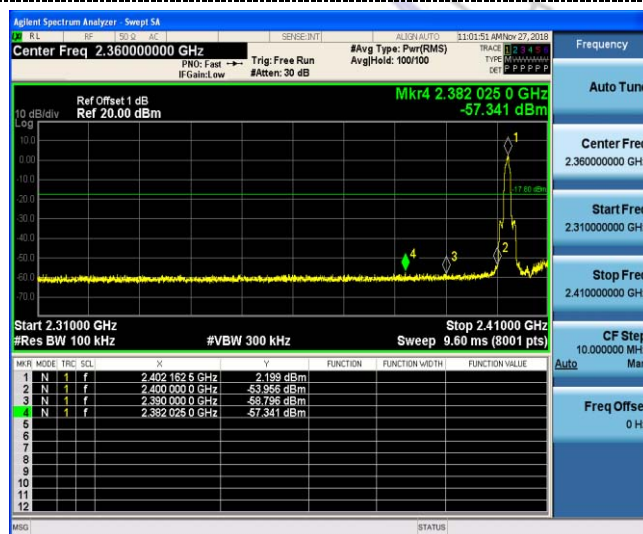


Left Band edge hopping off

Right Band edge hopping off

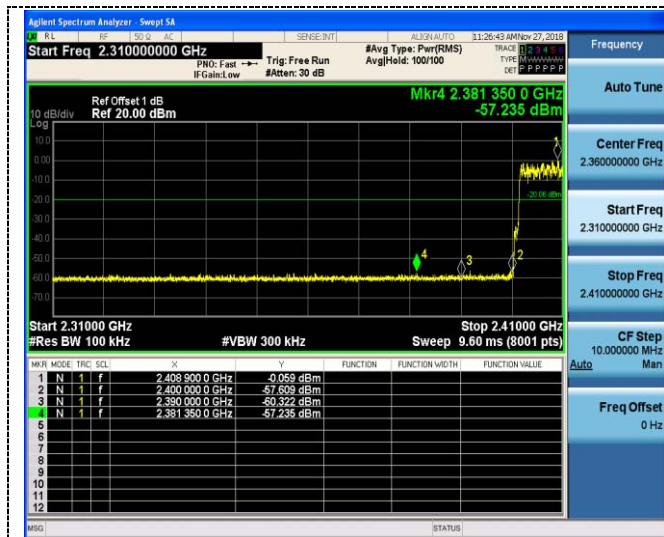


Left Band edge hopping on

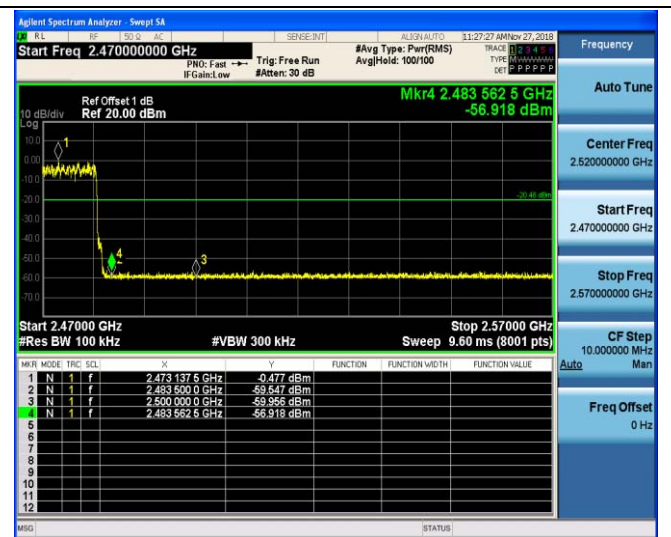


Right Band edge hopping on


8DPSK

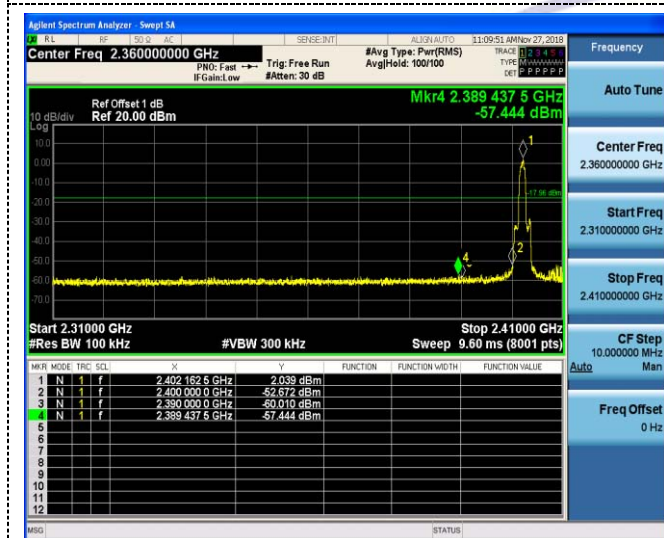


Left Band edge hopping off

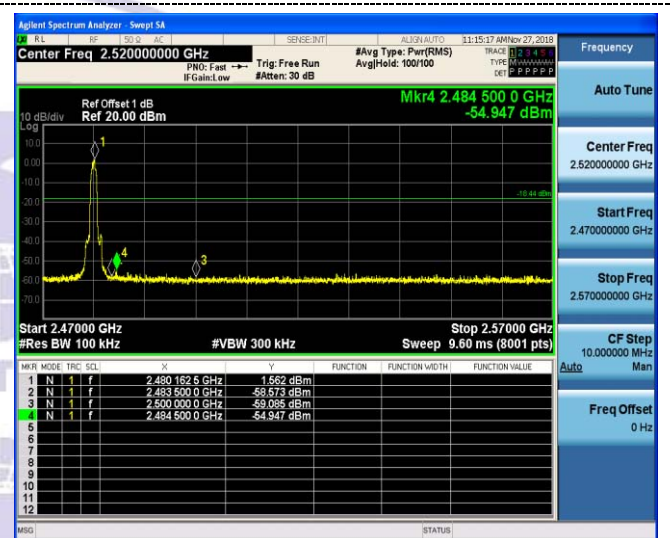

Right Band edge hopping off

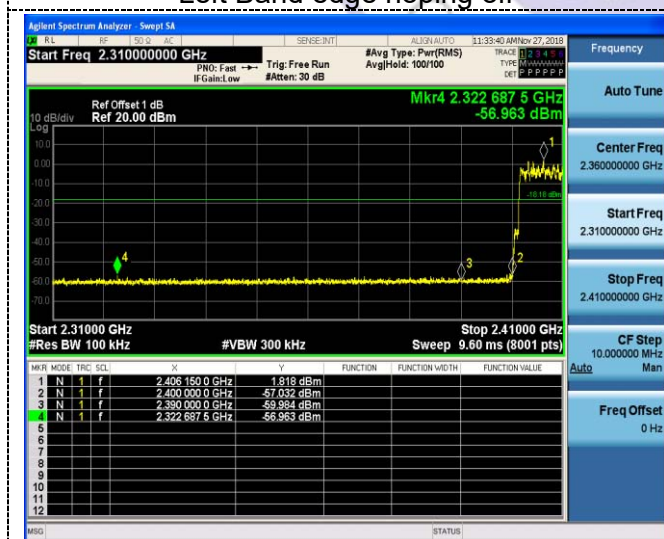

Left Band edge hopping on

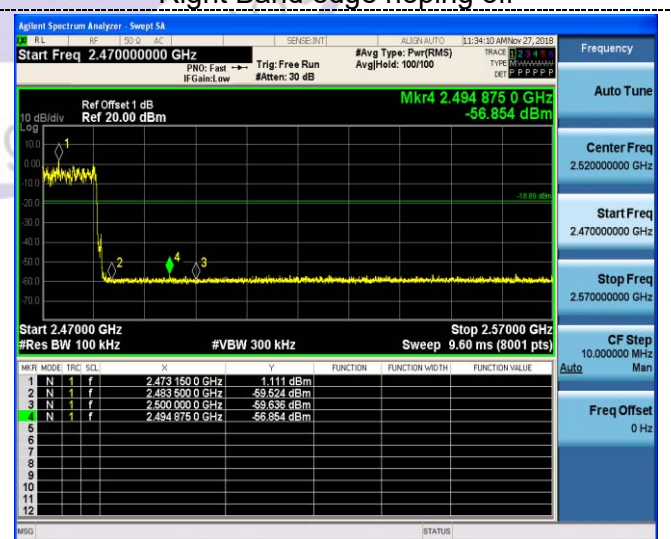

Right Band edge hopping on

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

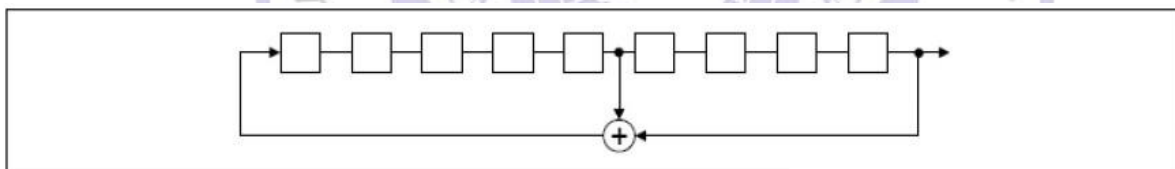

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

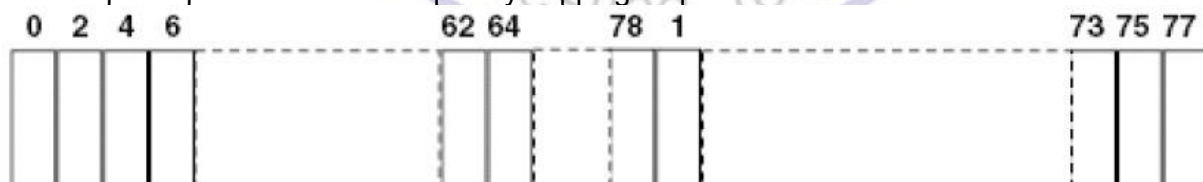

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was 1.0dBi.

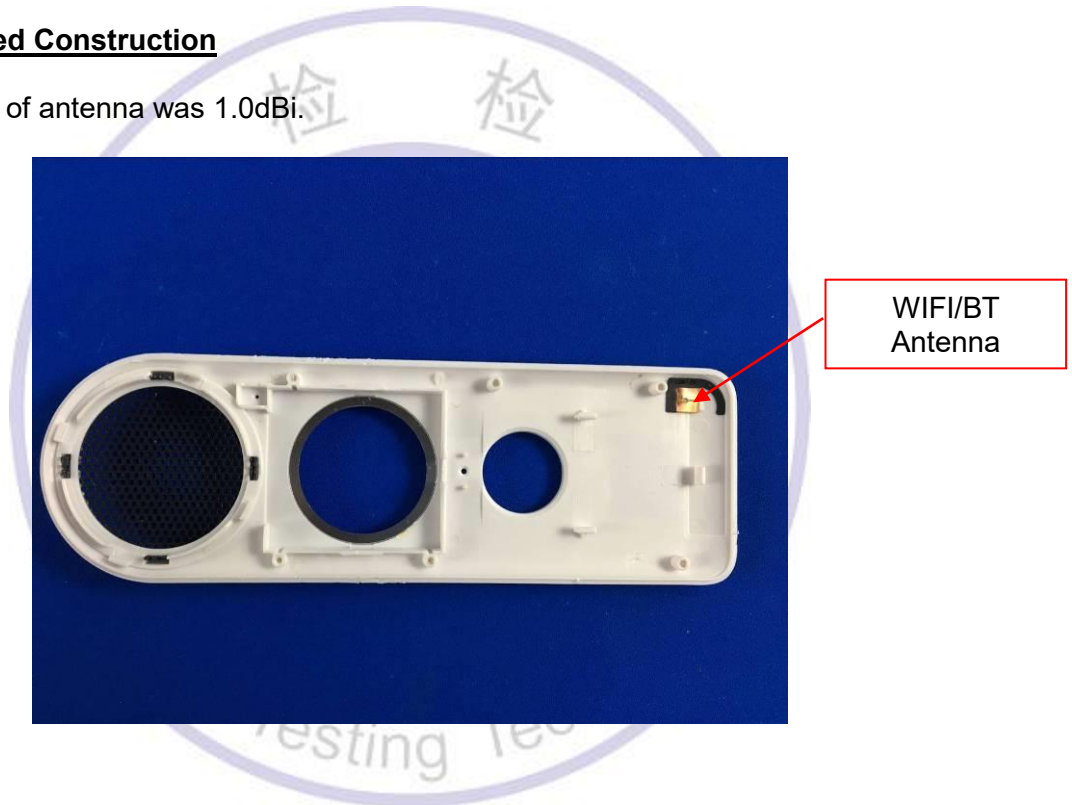



4. Test Setup Photos of the EUT





5. Photos of the EUT

External Photos of EUT




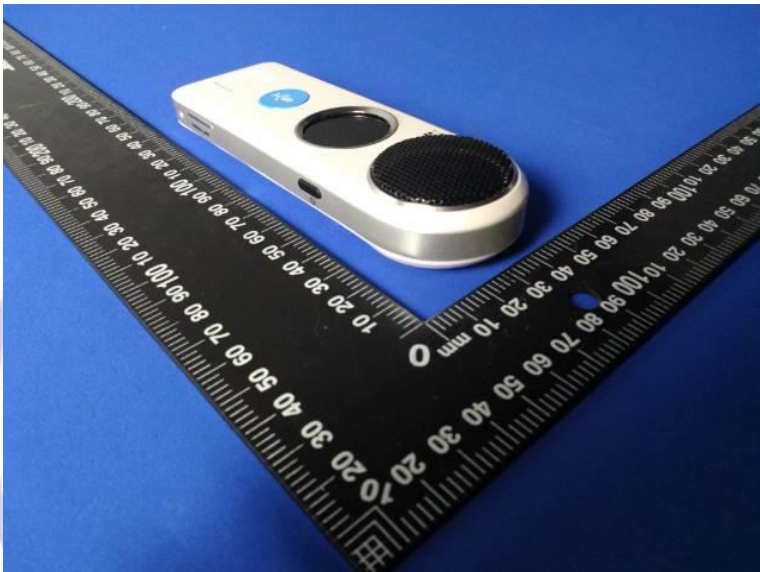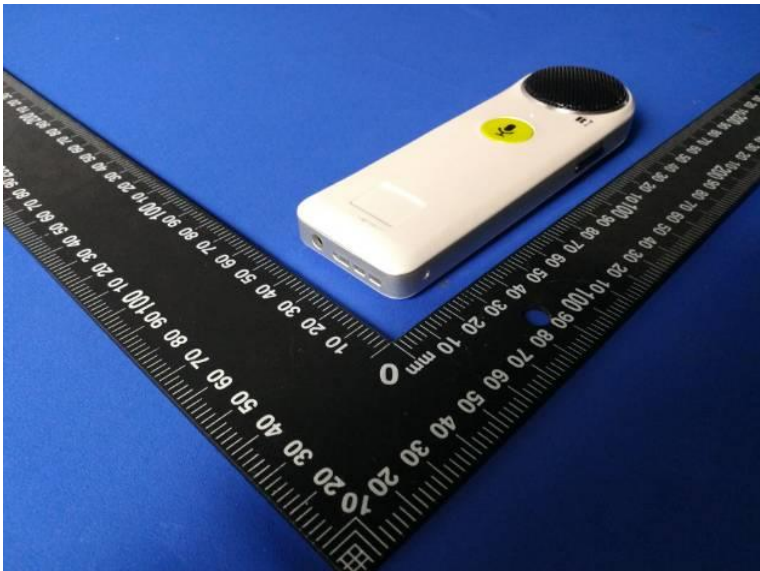



Internal Photos of EUT

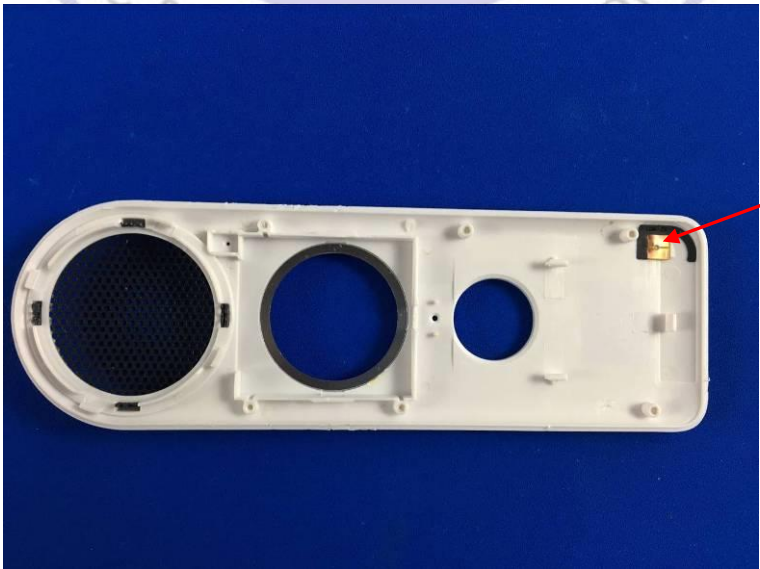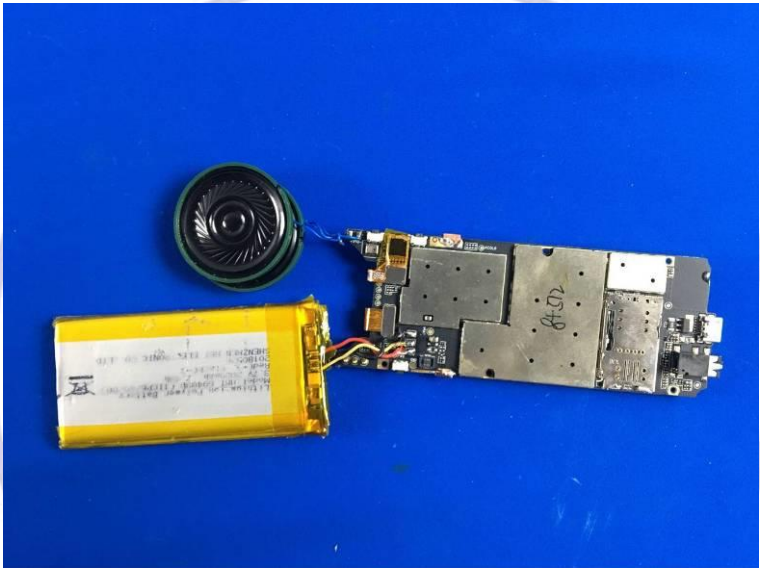


WIFI/BT antenna

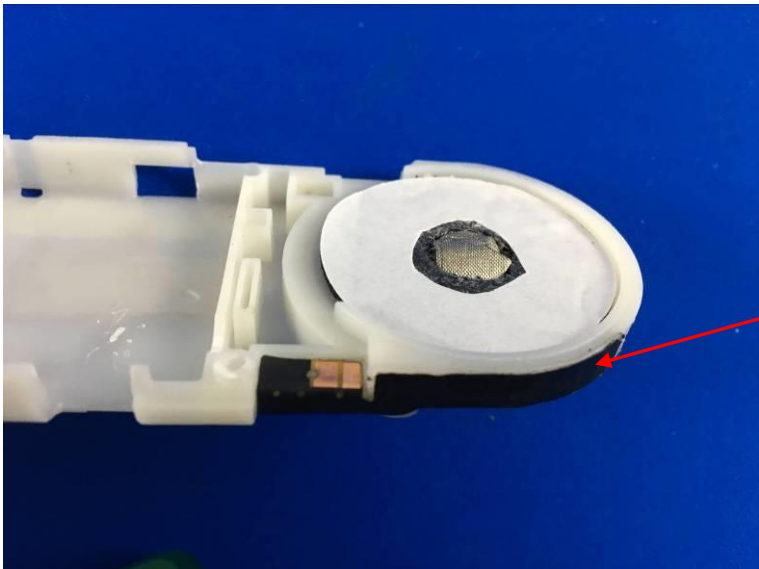

GSM, WCDMA antenna

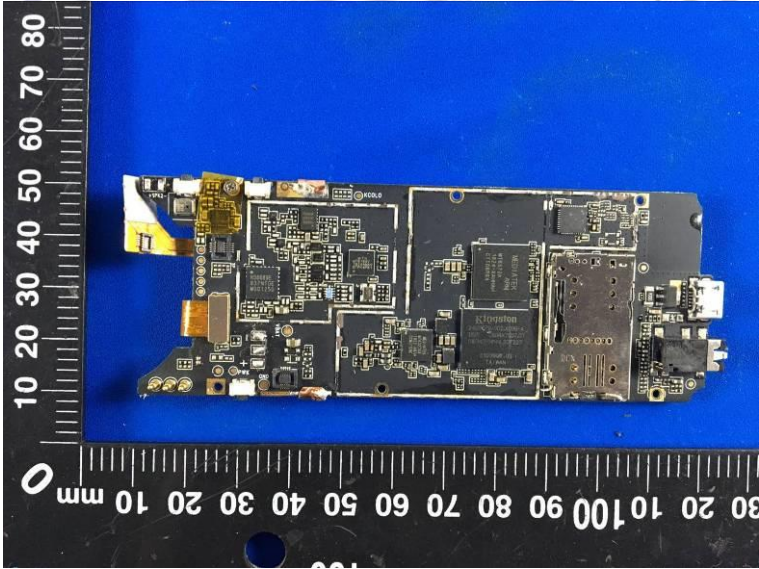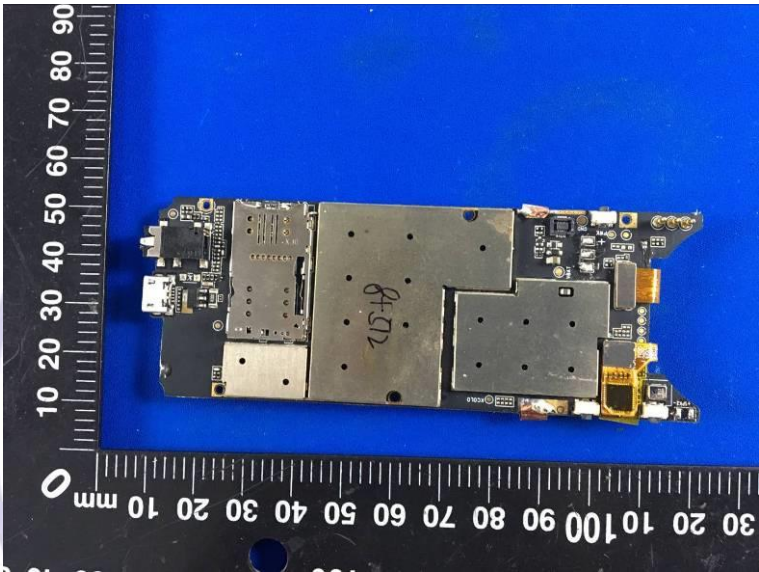

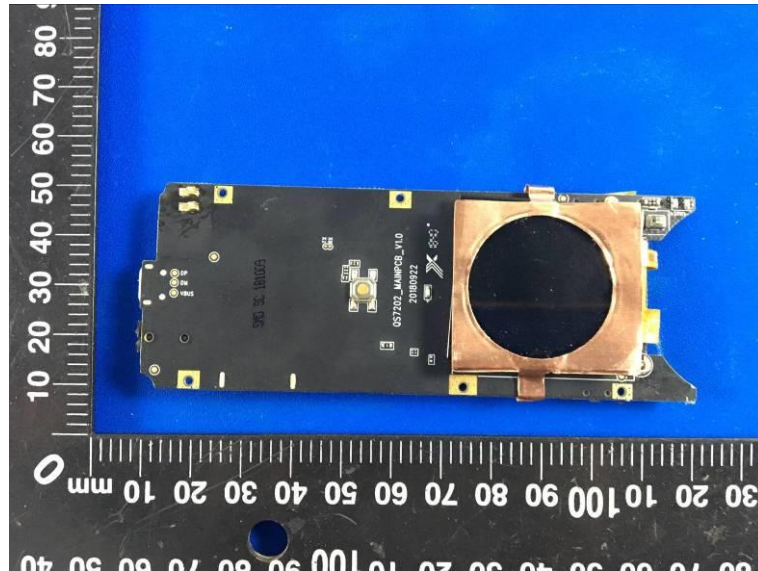

***** End of Report *****