



FCC TEST REPORT

**Test report
On Behalf of
Xunison Ltd
For
X-brain Smart gateway
Model No.: XUS100, XEU100**

FCC ID: 2AP2F-XUS100

Prepared for : **Xunison Ltd**
25th Kilcarbery Business Park, Upper Nangor Road, Dublin 22, Ireland

Prepared By : **Shenzhen HUAK Testing Technology Co., Ltd.**
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: **June 10, 2018~August 31, 2018**
Date of Report: **August 31, 2018**
Report Number: **HUAK180824890E3**



TEST RESULT CERTIFICATION

Applicant's name : **Xunison Ltd**

Address : 25th Kilcarbery Business Park, Upper Nangor Road, Dublin 22,
Ireland

Manufacture's Name : **Xunison Ltd**

Address : 25th Kilcarbery Business Park, Upper Nangor Road, Dublin 22,
Ireland

Product description

Trade Mark: Xunison

Product name : X-brain Smart gateway

Model and/or type reference : XUS100, XEU100

Standards : FCC Rules and Regulations Part 15 Subpart E Section 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : June 10, 2018~August 31, 2018

Date of Issue : August 31, 2018

Test Result : **Pass**

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



Revision History

Revision	Issue Date	Revisions	Revised By
000	August 31, 2018	Initial Issue	Jason Zhou



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. DESCRIPTION OF DEVICE (EUT)	5
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
1.3. EXTERNAL I/O PORT	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	7
2. TEST METHODOLOGY	8
2.1. EUT CONFIGURATION.....	8
2.2. EUT EXERCISE	8
2.3. GENERAL TEST PROCEDURES	8
3. SYSTEM TEST CONFIGURATION.....	9
3.1. JUSTIFICATION.....	9
3.2. EUT EXERCISE SOFTWARE.....	9
3.3. SPECIAL ACCESSORIES	9
3.4. BLOCK DIAGRAM/SCHEMATICS.....	9
3.5. EQUIPMENT MODIFICATIONS	9
3.6. TEST SETUP	9
4. SUMMARY OF TEST RESULTS.....	10
5. TEST RESULT	11
5.1. ON TIME AND DUTY CYCLE	11
5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	13
5.3. POWER SPECTRAL DENSITY MEASUREMENT	15
5.4. 6dB EMISSION BANDWIDTH MEASUREMENT.....	22
5.5. RADIATED EMISSIONS MEASUREMENT	29
5.6. POWER LINE CONDUCTED EMISSIONS	43
5.8. ANTENNA REQUIREMENTS.....	56
6. LIST OF MEASURING EQUIPMENTS	58



1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: X-brain Smart gateway
Model Number	: XUS100, XEU100
Model Declaration	: PCB board, structure and internal of these model(s) are the same, : Only models name is different for these models.
Test Model	: XUS100
Power Supply	: DC 12.0V by adapter
Hardware version	: V2
Software version	: 7.1.2

Z-Wave

Channel Number	: Channel 1: 908.4MHz / Channel 2: 916MHz
Modulation Technology	: FSK
Antenna Type And Gain	: Internal Antenna 0.5dBi[Antenna 0]

2.4G Band RF Function

Channel Number	: Channel 1: 2405MHz / Channel 2: 2413MHz : Channel 3: 2422MHz / Channel 4: 2430MHz : Channel 5: 2440MHz / Channel 6: 2450MHz : Channel 7: 2460MHz / Channel 8: 2470MHz
Modulation Technology	: GFSK
Antenna Type And Gain	: Internal Antenna 0.0dBi[Antenna 1]

Bluetooth

Bluetooth Version	: V4.1
Frequency Range	: 2402-2480MHz
Channel Number	: 79 Channels for Bluetooth V3.0(DSS) : 40 Channels for Bluetooth V4.1(DTS)
Modulation Technology	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V3.0(DSS) : GFSK for Bluetooth V4.1(DTS)
Data Rates	: Bluetooth V3.0(DSS): 1~3Mbps : Bluetooth V4.1(DTS): 1Mbps
Antenna Type And Gain	: Internal Antenna 0.0dBi[Antenna 2]

Wlan

WLAN	: Supported IEEE 802.11a/b/g/n/ac IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz / 5745-5825MHz
WLAN FCC Operation Frequency	: IEEE 802.11n HT40:2422-2452MHz / 5190-5230MHz / 5755-5795MHz IEEE 802.11a: 5180-5240MHz / 5745-5825MHz IEEE 802.11ac VHT20: 5180-5240MHz / 5745-5825MHz IEEE 802.11ac VHT40: 5190-5230MHz / 5755-5795MHz IEEE 802.11ac VHT80: 5210MHz / 5775MHz
WLAN Channel Number	: 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20)



WLAN Modulation Technology	7 Channels for 2422-2452MHz(IEEE 802.11n HT40)
	4 Channels for 5180-5240MHz (IEEE 802.11a/ac VHT20/n HT20)
	2 Channels for 5190-5230MHz (IEEE 802.11ac VHT40/n HT40)
	1 Channels for 5210MHz (IEEE 802.11ac VHT80)
	5 Channels for 5745-5825MHz(IEEE 802.11a/ac VHT20/n HT20)
Antenna Type And Gain	2 Channels for 5755-5795MHz(IEEE 802.11ac VHT40/n HT40)
	1 Channels for 5775MHz(IEEE 802.11ac VHT80)
	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
	IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Directional Gain	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
	Three Antennas:
	Internal Antenna 3 and Antenna 4:
	3.81dBi(Max.), for TX/RX (WLAN 2.4G Band),
Note: Antenna position refer to EUT Photos.	: Internal Antenna 5 and Antenna 6:
	4.03 dBi(Max.), for TX/RX (WLAN 5G Band)
	802.11n(2.4G Band) support 2T2R.[Antenna 3 and Antenna 4]
	802.11n/ac(5G Band) support 2T2R.[Antenna 5 and Antenna 6]
	6.81 dBi for MIMO(2.4G Band)
	: 7.03 dBi for MIMO(5G Band)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
SUNUN	Adapter	SA18H-120150U	A18-124	N/A

1.3. External I/O Port

I/O Port Description	Quantity	Cable
USB Port	2	1m, unshielded
HDMI Port	1	1.5m, unshielded
Lan Port	3	1.5m,shielded

1.4. Description of Test Facility

Designation Number: CN1229

Test Firm Registration Number: 616276

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the HUAKE quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.08dB	(1)
		30MHz~1000MHz	±4.42dB	(1)
		1GHz~40GHz	±4.06dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±2.23dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be IEEE 802.11a mode (High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11a mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11a Mode : 6 Mbps, OFDM.
 IEEE 802.11ac VHT20 Mode: MCS0
 IEEE 802.11n HT20 Mode: MCS0, OFDM.
 IEEE 802.11ac VHT40 Mode: MCS0, OFDM.
 IEEE 802.11n HT40 Mode: MCS0, OFDM.
 IEEE 802.11ac VHT80 Mode: MCS0, OFDM.

Antenna & Bandwidth

Antenna	Single (Port.1)			Two (Port.1 + Port.2)		
Bandwidth Mode	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz
IEEE 802.11a	☐	☐	☐	☒	☐	☐
IEEE 802.11n	☐	☐	☐	☒	☒	☐
IEEE 802.11ac	☐	☐	☐	☒	☒	☒



2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen HUAK Testing Technology Co., Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v02r01 and KDB 6622911 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software(QATest Application) provided by application.

3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	TV	AOC	280LM0000 3	JVVGJA0003 07	/	/	/
2	PC	ASUS	K43S	X16-96081	/	/	/

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen HUAK Testing Technology Co., Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.



4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart E		
FCC Rules	Description of Test	Result
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.407(e)	6dB Bandwidth	Compliant
§15.407(b)	Radiated Emissions	Compliant
§15.407(b)	Band edge Emissions	Compliant
§15.407(g)	Frequency Stability	Note
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§2.1093	RF Exposure	Compliant

Note: The customer declared frequency stability is better than 20ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None; for reporting purpose only.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

5.1.3. Test Procedures

1. Set the Centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=10MHz, VBW=10MHz, Sweep time=100ms;
3. Detector = peak;
4. Trace mode = Single hold.

5.1.4. Test Setup Layout



5.1.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test result


Mode	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW(KHz)
IEEE 802.11a	100	100	1	100	0	0.010
IEEE 802.11n HT20	100	100	1	100	0	0.010
IEEE 802.11ac VHT20	100	100	1	100	0	0.010
IEEE 802.11n HT40	100	100	1	100	0	0.010
IEEE 802.11ac VHT40	100	100	1	100	0	0.010
IEEE 802.11ac VHT80	100	100	1	100	0	0.010




On Time and Duty Cycle

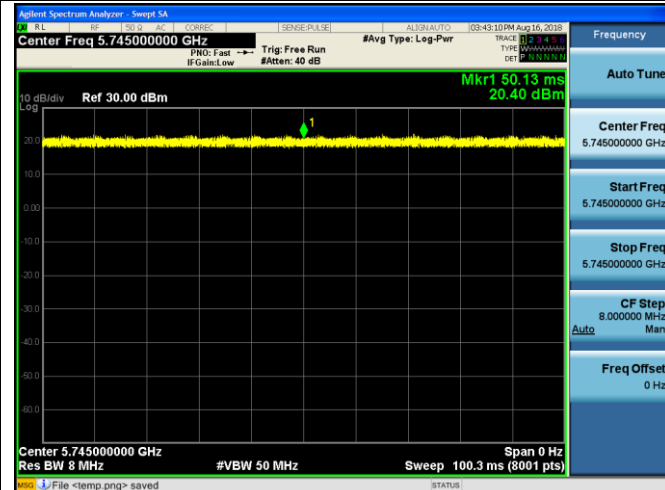


IEEE 802.11a

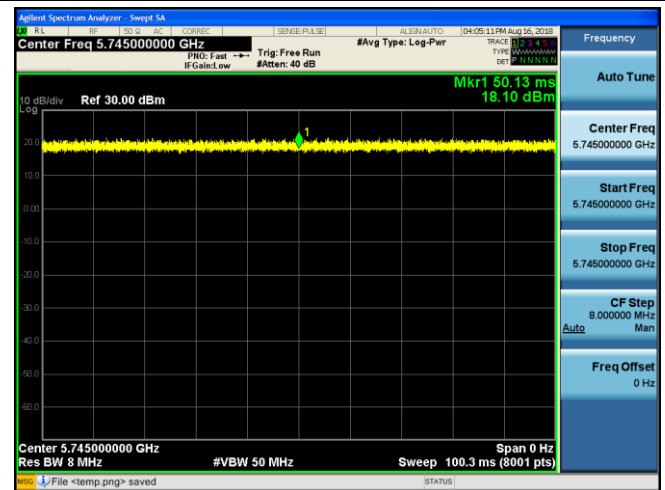


IEEE 802.11n HT20

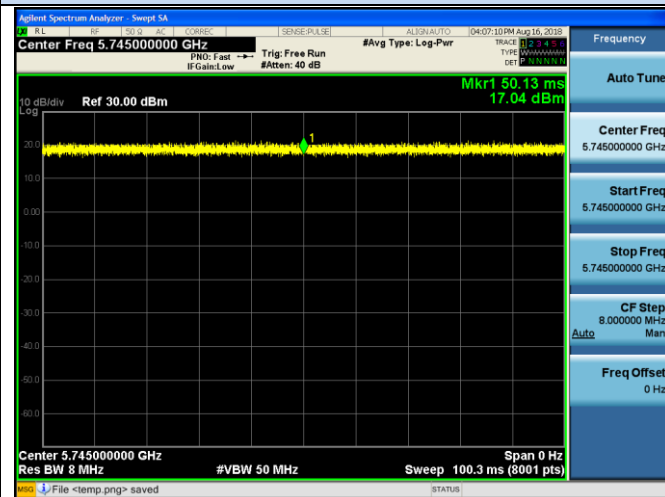


IEEE 802.11ac VHT20

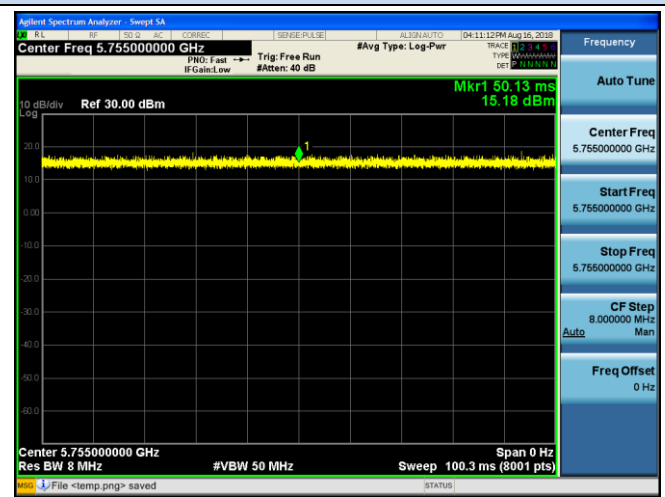

IEEE 802.11n HT40

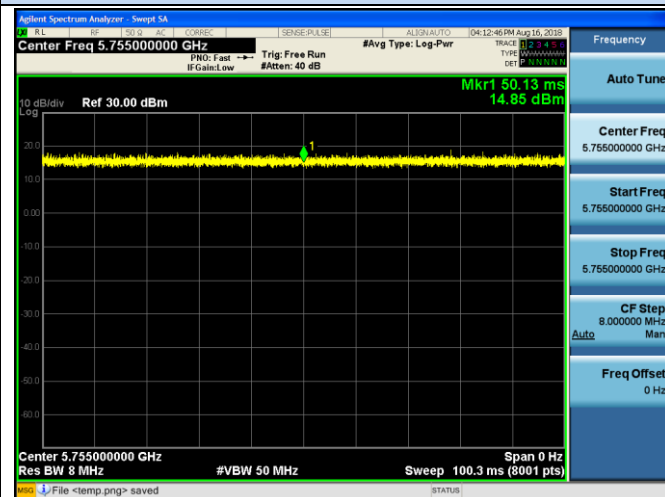

IEEE 802.11ac VHT40

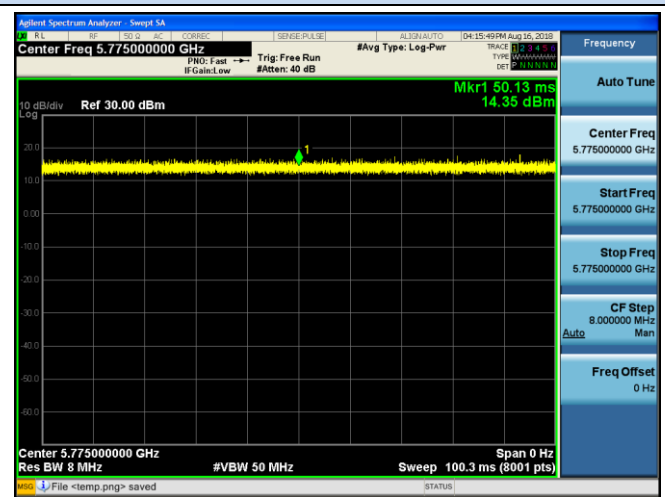

IEEE 802.11ac VHT80

5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

For 5725~5850MHz

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the power meter.


5.2.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

According to KDB 789033 D02 Section 3 (a) Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
 - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

5.2.4. Test Setup Layout

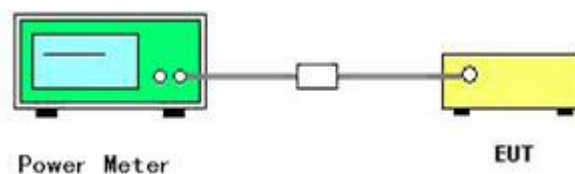



5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Maximum Conducted Output Power

Temperature	25.1℃	Humidity	52.4%
Test Engineer	Gary Qian	Configurations	IEEE 802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	Measured Conducted Average Power (dBm)			Duty Cycle factor (dB)	Report Conducted Average Power (dBm)			Limits (dBm)	Verdict
			Antenna 0	Antenna 1	Sum		Antenna 0	Antenna 1	Sum		
IEEE 802.11a	149	5745	16.19	13.61	/	0.00	16.19	13.61	/	30.00	PASS
	157	5785	17.00	13.38	/	0.00	17.00	13.38	/		
	165	5825	16.88	13.91	/	0.00	16.88	13.91	/		
IEEE 802.11n HT20	149	5745	15.36	15.13	18.25	0.00	15.36	15.13	18.25	28.97	PASS
	157	5785	16.07	15.82	18.96	0.00	16.07	15.82	18.96		
	165	5825	16.16	16.21	19.19	0.00	16.16	16.21	19.19		
IEEE 802.11ac VHT20	149	5745	14.98	15.02	18.01	0.00	14.98	15.02	18.01	28.97	PASS
	157	5785	16.11	15.20	18.69	0.00	16.11	15.20	18.69		
	165	5825	16.46	16.14	19.31	0.00	16.46	16.14	19.31		
IEEE 802.11n HT40	151	5755	14.88	15.14	18.02	0.00	14.88	15.14	18.02	28.97	PASS
	159	5795	15.84	15.68	18.77	0.00	15.84	15.68	18.77		
IEEE 802.11ac VHT40	151	5755	15.17	15.62	18.41	0.00	15.17	15.62	18.41	28.97	PASS
	159	5795	16.03	15.42	18.74	0.00	16.03	15.42	18.74		
IEEE 802.11ac VHT80	155	5775	15.59	15.18	18.40	0.00	15.59	15.18	18.40	28.97	PASS

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. For MIMO with CCD technology device:

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] \text{ dBi, where antenna gains given by } G1, G2, \dots, GN \text{ dBi, } N_{ANT} \text{ is the antennas total Number}$$
5. Report conducted average power = measured conducted average power + Duty Cycle factor;
6. Directional Gain = 7.03 dBi > 6dBi; Limits = 30 – (Directional gain-6) = 30 – (7.03-6) = 28.97 dBm for MIMO Mode.



5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

For 5725~5850MHz

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 1 MHz.
4. Set the VBW $\geq 3 \times \text{RBW}$
5. Span=Encompass the entire emissions bandwidth (EBW) of the signal
6. Detector = RMS.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
11. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
12. Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

5.3.4. Test Setup Layout

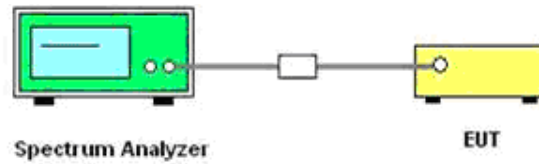

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Power Spectral Density

Temperature	25.1℃	Humidity	52.4%
Test Engineer	Gary Qian	Configurations	802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	Measured Conducted PSD (dBm/1MHz)			Duty Cycle factor (dB)	RBW factor (dB)	Report Conducted PSD (dBm/500KHz)			Limits (dBm/500KHz)	Verdict
			Antenna 0	Antenna 1	Sum			Antenna 0	Antenna 1	Sum		
IEEE 802.11a	149	5745	10.06	7.11	/	0.00	0.00	10.06	7.11	/	30	PASS
	157	5785	10.81	8.84	/	0.00	0.00	10.81	8.84	/		
	165	5825	10.85	8.19	/	0.00	0.00	10.85	8.19	/		
IEEE 802.11n HT20	149	5745	8.36	8.49	11.44	0.00	0.00	8.36	8.49	11.44	28.97	PASS
	157	5785	9.73	9.17	12.47	0.00	0.00	9.73	9.17	12.47		
	165	5825	9.58	9.89	12.75	0.00	0.00	9.58	9.89	12.75		
IEEE 802.11ac VHT20	149	5745	8.64	7.77	11.24	0.00	0.00	8.64	7.77	11.24	28.97	PASS
	157	5785	9.34	8.87	12.12	0.00	0.00	9.34	8.87	12.12		
	165	5825	9.74	9.64	12.70	0.00	0.00	9.74	9.64	12.70		
IEEE 802.11n HT40	151	5755	4.45	5.59	8.07	0.00	0.00	4.45	5.59	8.07	28.97	PASS
	159	5795	5.96	6.15	9.07	0.00	0.00	5.96	6.15	9.07		
IEEE 802.11ac VHT40	151	5755	4.86	5.36	8.13	0.00	0.00	4.86	5.36	8.13	28.97	PASS
	159	5795	6.01	5.44	8.74	0.00	0.00	6.01	5.44	8.74		
IEEE 802.11ac VHT80	155	5775	3.08	3.21	6.16	0.00	0.00	3.08	3.21	6.16	28.97	PASS

Remark:


1. Measured power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. For MIMO with CCD technology device
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi, where antenna gains given by G1, G2, ..., GN dBi, N_{ANT} is the antennas total Number.
5. Directional Gain = 7.03 dBi > 6dBi; Limits = 30 – (Directional gain-6) = 30 – (7.03-6) = 28.97 dBm for MIMO Mode.
6. Report conducted PSD = measured conducted PSD + Duty Cycle factor + RBW factor;
7. Please refer to following test plots;






Power Spectral Density IEEE 802.11n HT20


Antenna Chain 0

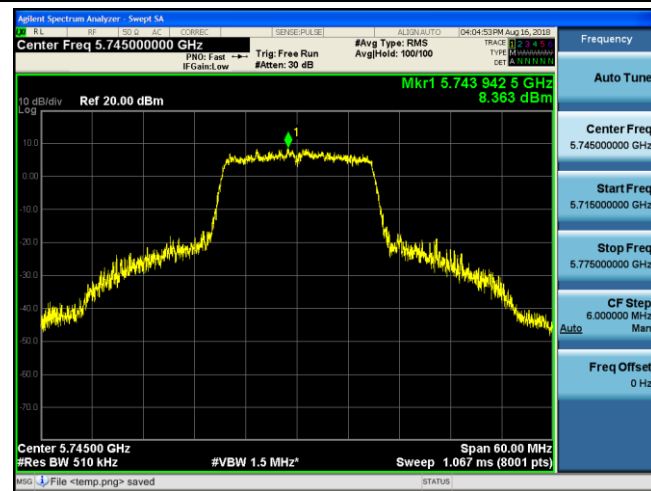


Antenna Chain 1

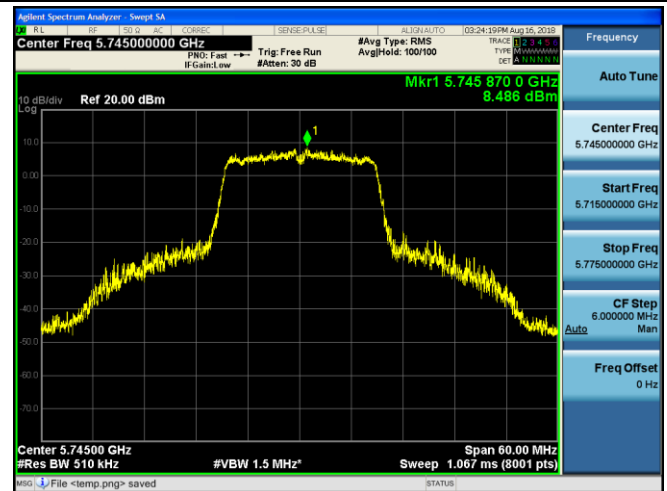


Channel 149 / 5745 MHz

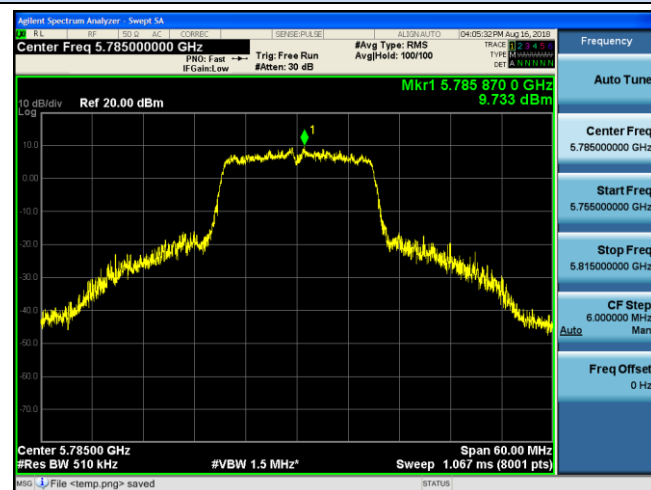


Channel 149 / 5745 MHz

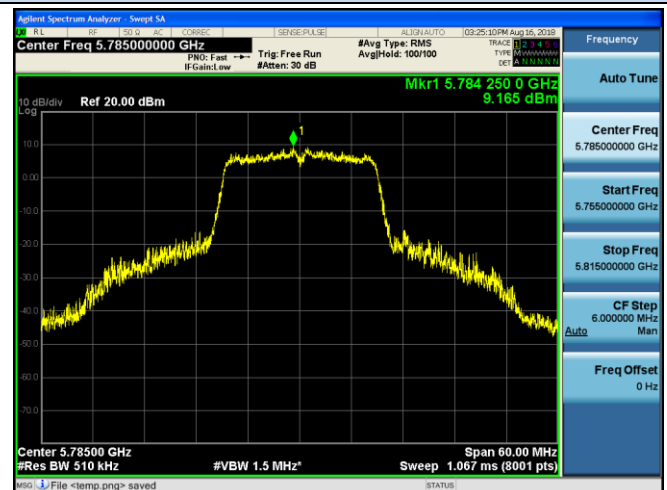

Channel 157 / 5785 MHz

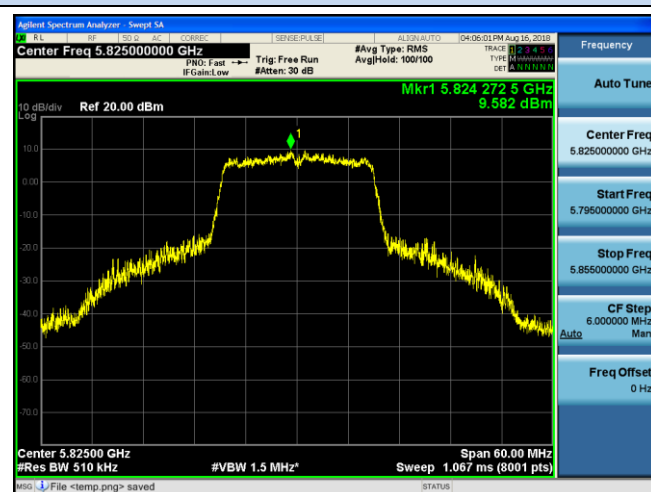

Channel 157 / 5785 MHz

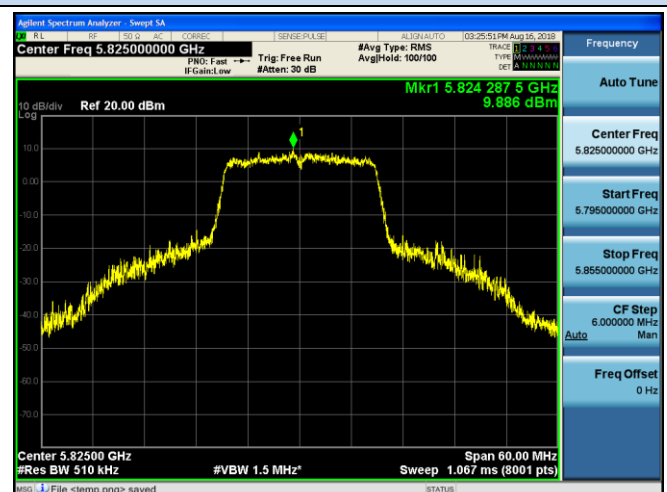


Channel 165 / 5825 MHz

Channel 165 / 5825 MHz




Power Spectral Density
IEEE 802.11ac VHT20


Antenna Chain 0

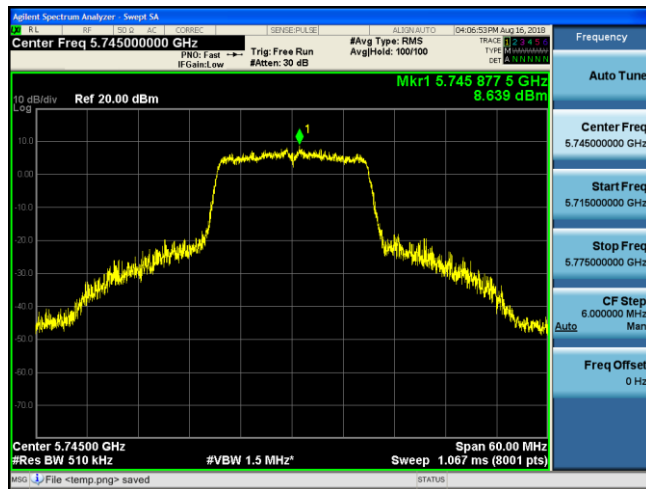


Antenna Chain 1

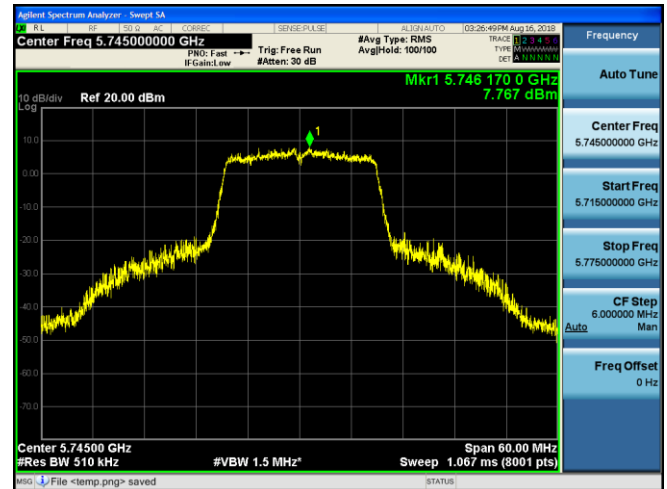


Channel 149 / 5745 MHz

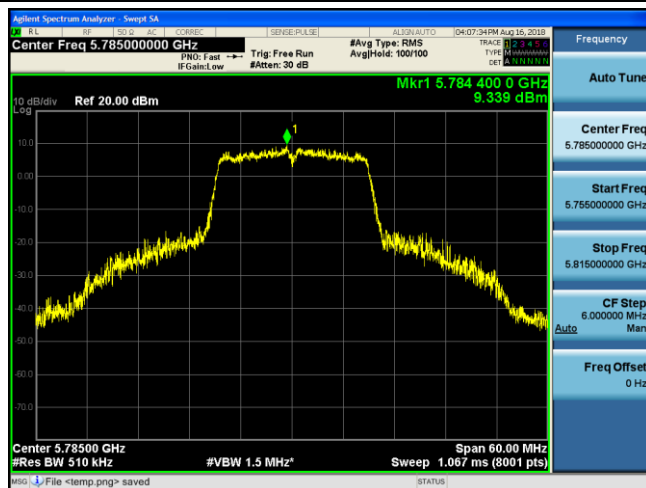


Channel 149 / 5745 MHz

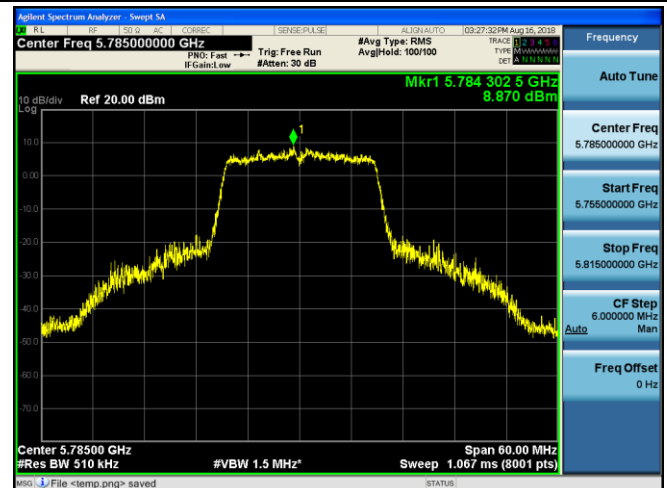

Channel 157 / 5785 MHz

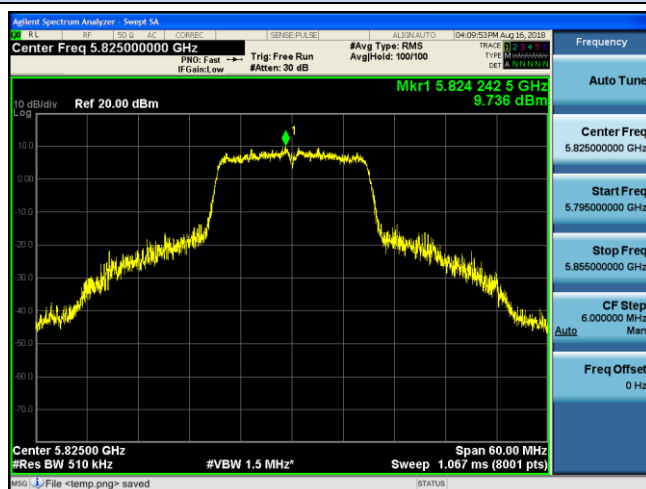

Channel 157 / 5785 MHz

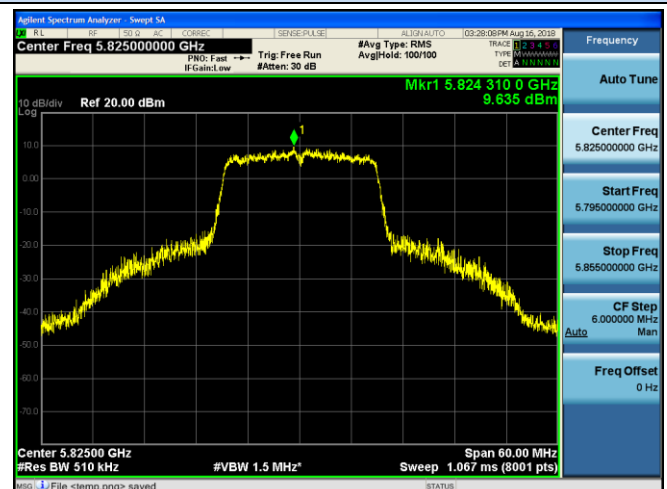


Channel 165 / 5825 MHz

Channel 165 / 5825 MHz




Power Spectral Density IEEE 802.11n HT40

Antenna Chain 0

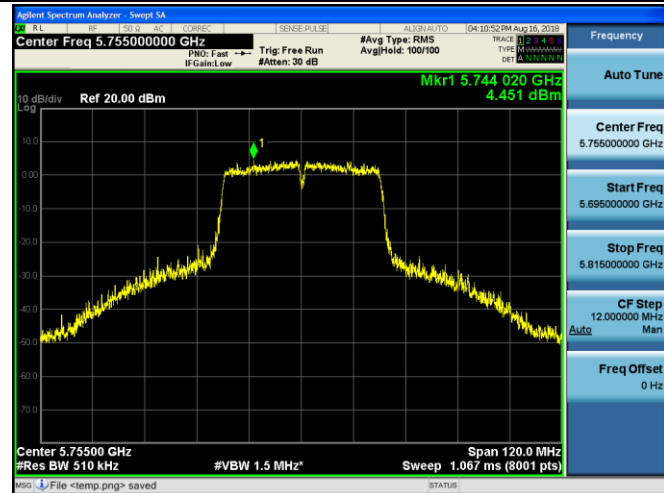


Antenna Chain 1

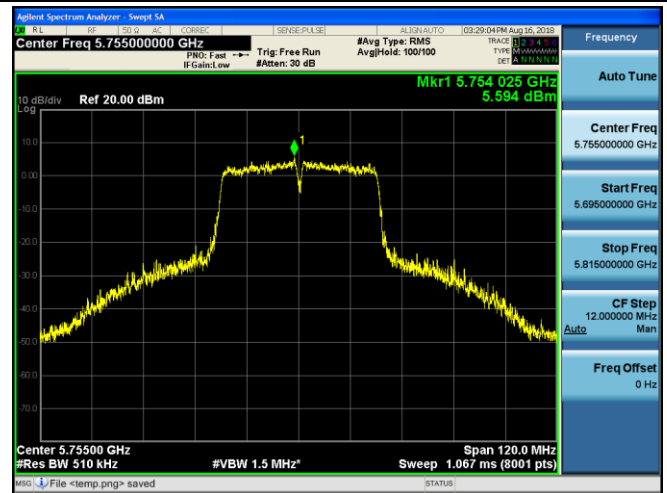


Channel 151 / 5755 MHz



Channel 151 / 5755 MHz

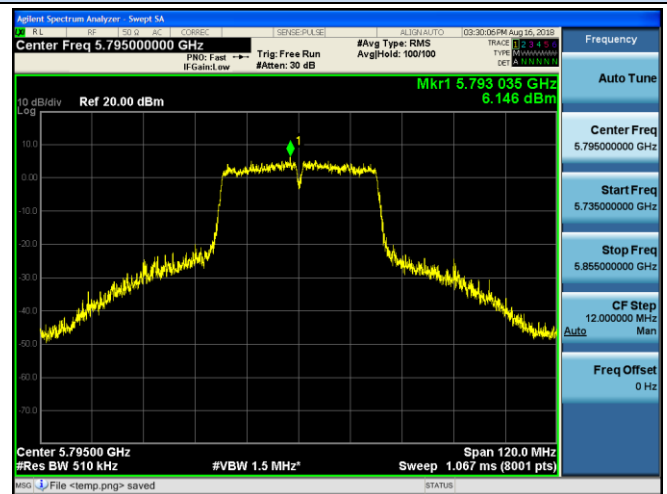

Channel 159 / 5795 MHz

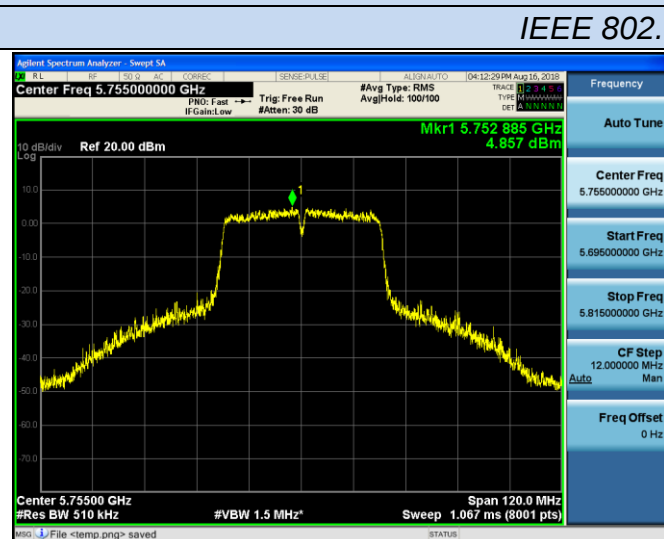

Channel 159 / 5795 MHz



IEEE 802.11ac VHT40


Channel 151 / 5755 MHz

Channel 151 / 5755 MHz




Power Spectral Density
IEEE 802.11ac VHT40

Antenna Chain 0

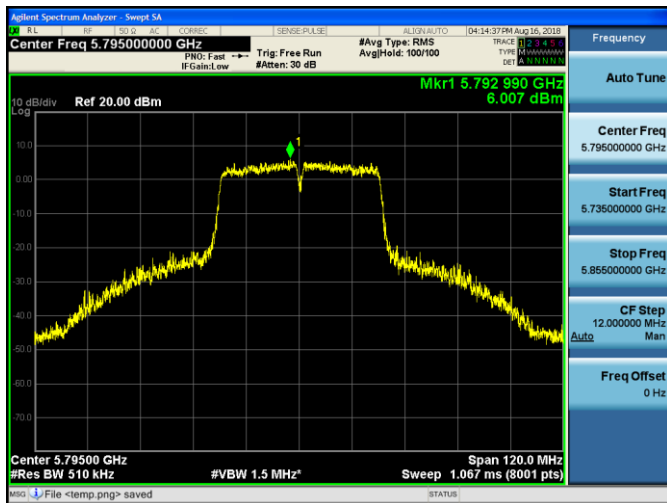


Channel 159 / 5795 MHz

Antenna Chain 1

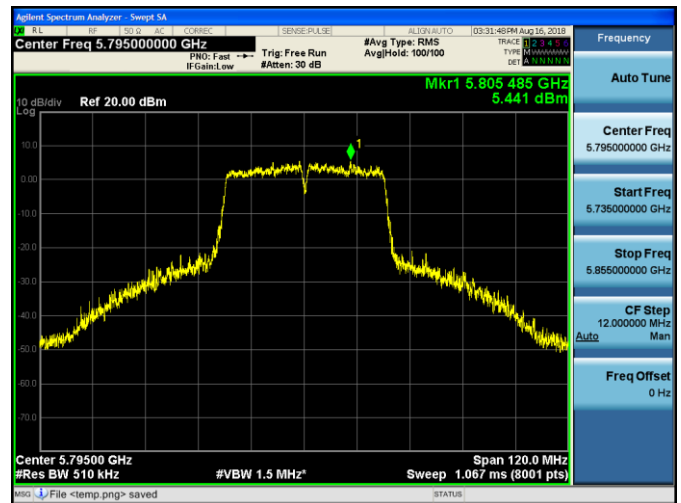


Channel 159 / 5795 MHz

IEEE 802.11ac VHT80

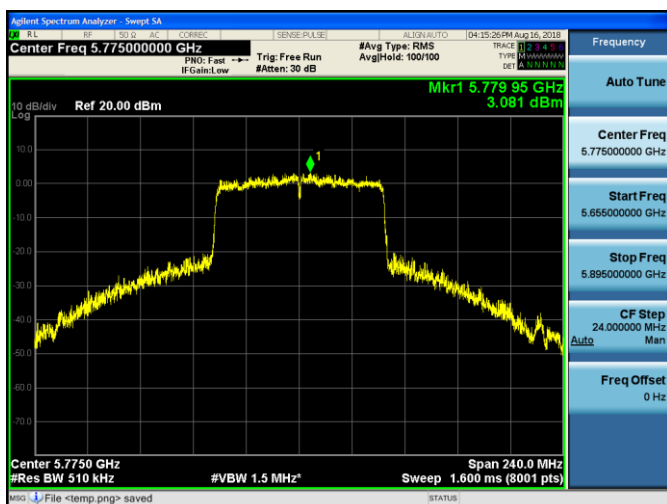

Channel 155 / 5775 MHz

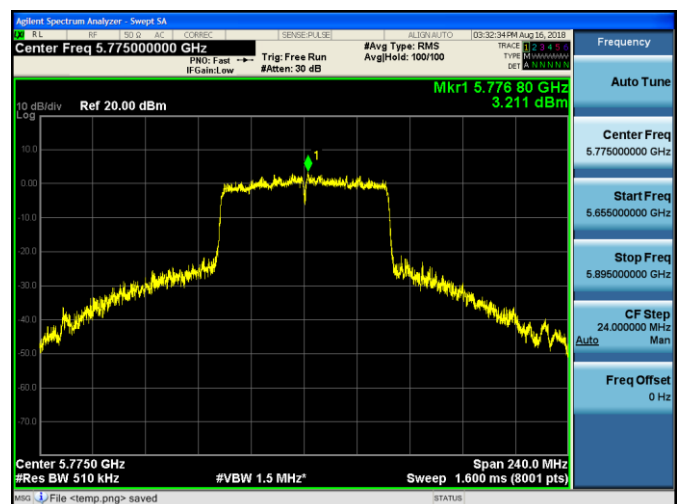

Channel 155 / 5775 MHz

5.4. 6dB Emission Bandwidth Measurement

5.4.1. Standard Applicable

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span	> 26dB Bandwidth
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Set the RBW = 100 KHz
3. Set the VBW > RBW
4. Measured the spectrum width with power higher than 6dB below carrier.

5.4.4. Test Setup Layout

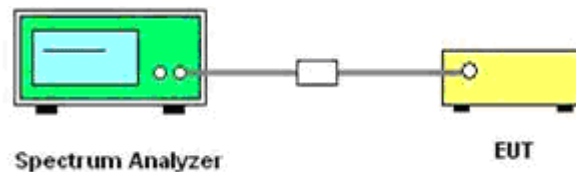

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 6dB Occupied Bandwidth

Temperature	25.1℃	Humidity	52.4%
Test Engineer	Gary Qian	Configurations	IEEE 802.11a/n/ac



Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limits (MHz)	Verdict
			Antenna 0	Antenna 1		
IEEE 802.11a	149	5745	16.50	16.46	≥0.500	PASS
	157	5785	16.49	16.49		
	163	5825	16.50	16.47		
IEEE 802.11n HT20	149	5745	17.73	17.74	≥0.500	PASS
	157	5785	17.73	17.72		
	163	5825	17.73	17.72		
IEEE 802.11ac VHT20	149	5745	17.74	17.73	≥0.500	PASS
	157	5785	17.72	17.72		
	163	5825	17.73	17.73		
IEEE 802.11n HT40	151	5755	36.42	36.44	≥0.500	PASS
	159	5795	36.45	36.45		
IEEE 802.11ac VHT40	151	5755	36.43	36.43	≥0.500	PASS
	159	5795	36.45	36.44		
IEEE 802.11ac VHT80	155	5775	75.53	75.86	≥0.500	PASS


Remark:

1. Measured 6dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;




6dB Bandwidth
IEEE 802.11a


Antenna Chain 0

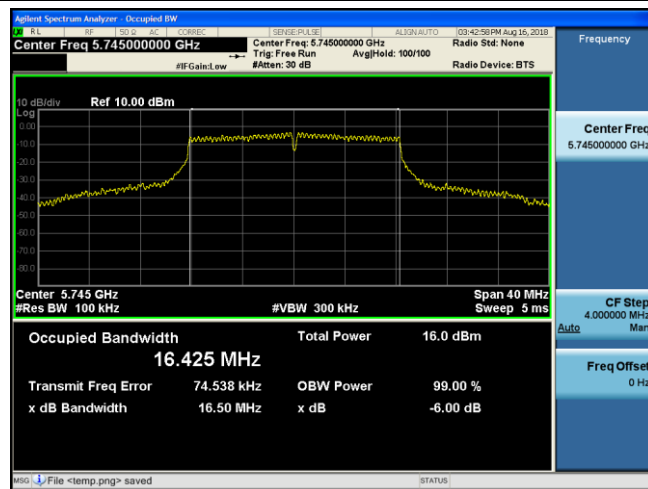


Antenna Chain 1

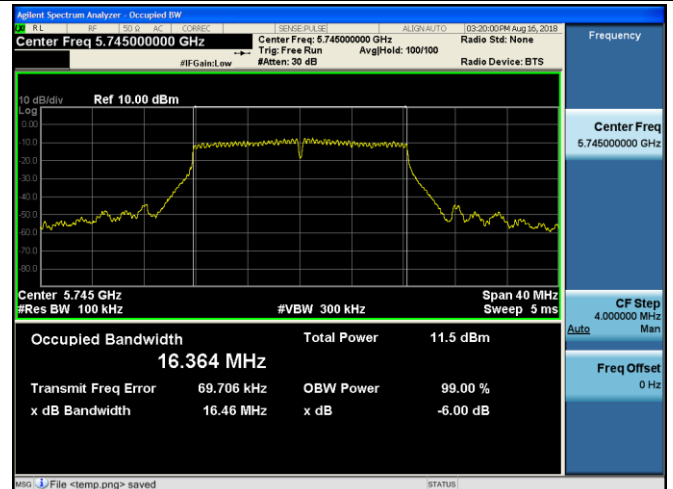


Channel 149 / 5745 MHz

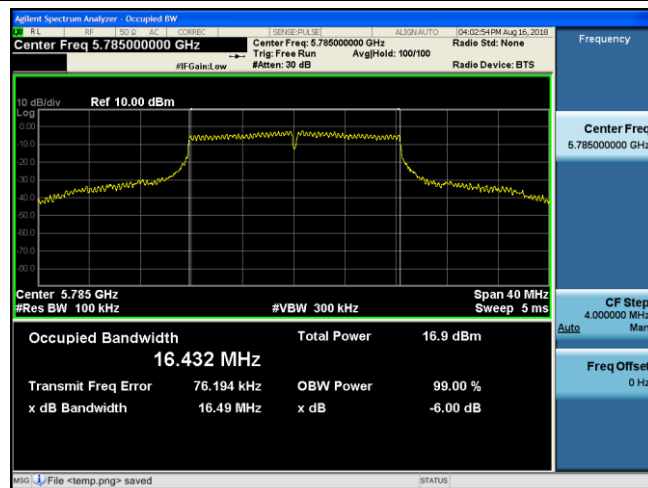


Channel 149 / 5745 MHz

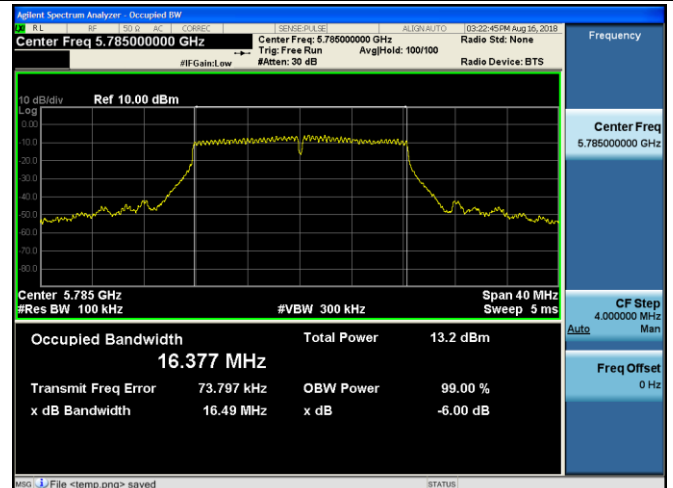

Channel 157 / 5785 MHz

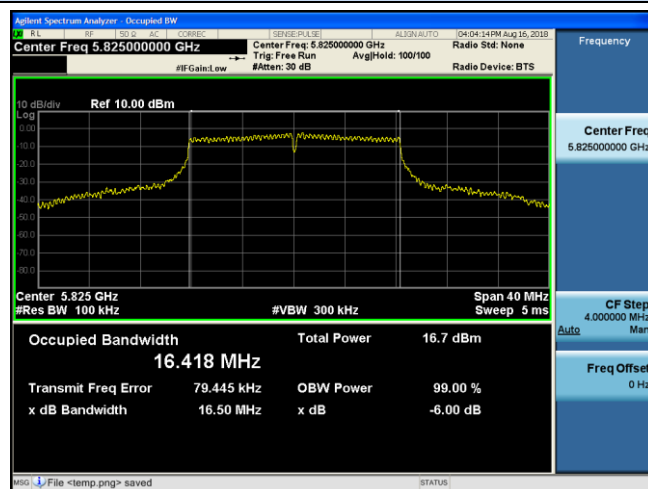

Channel 157 / 5785 MHz

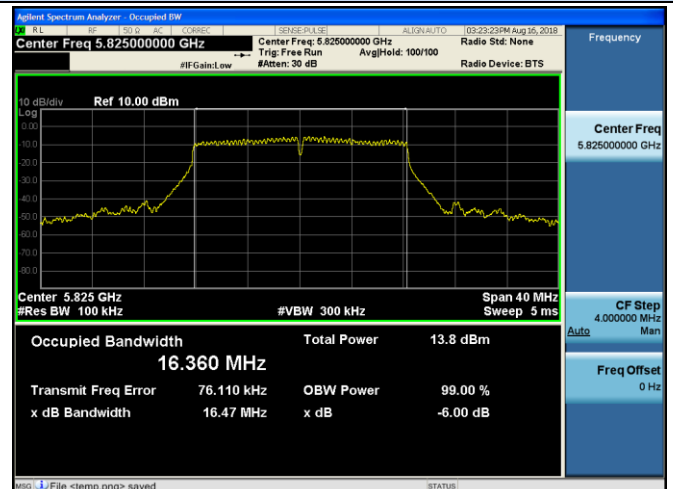


Channel 165 / 5825 MHz

Channel 165 / 5825 MHz




6dB Bandwidth IEEE 802.11n HT20


Antenna Chain 0

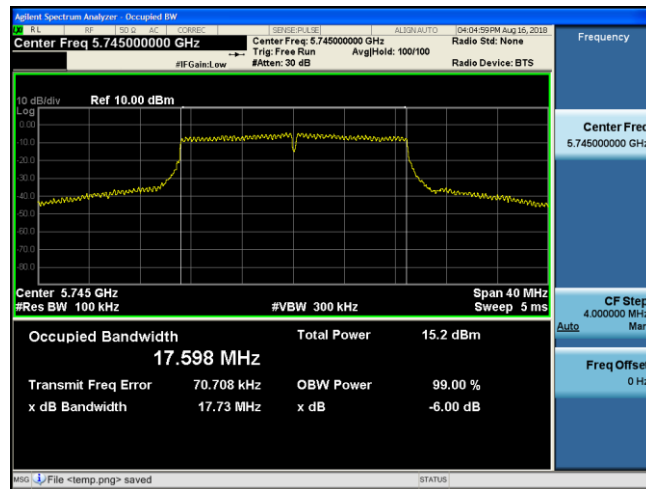


Antenna Chain 1

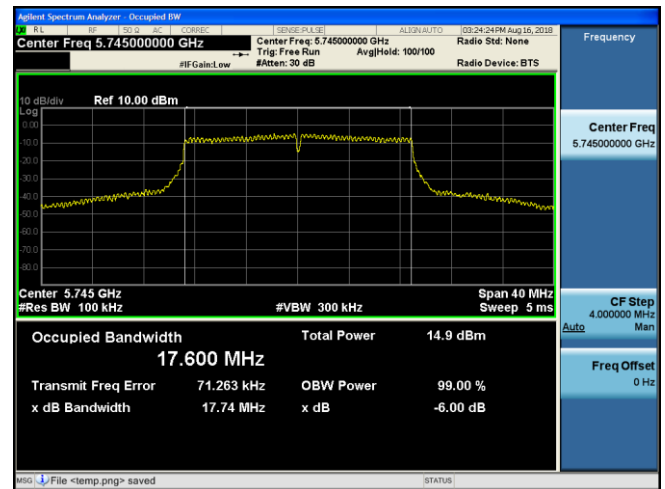


Channel 149 / 5745 MHz

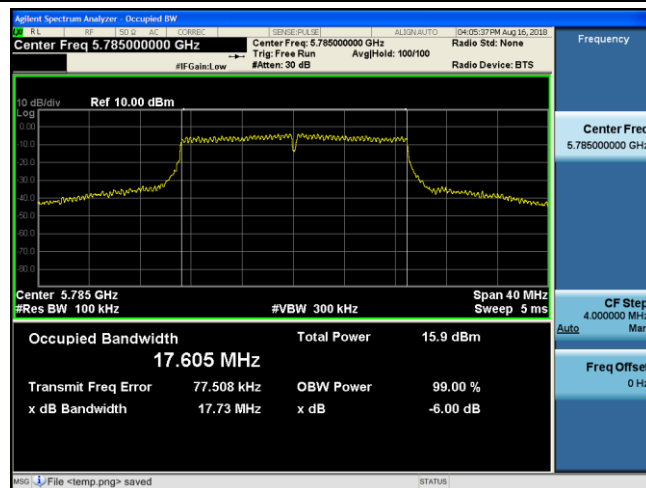


Channel 149 / 5745 MHz

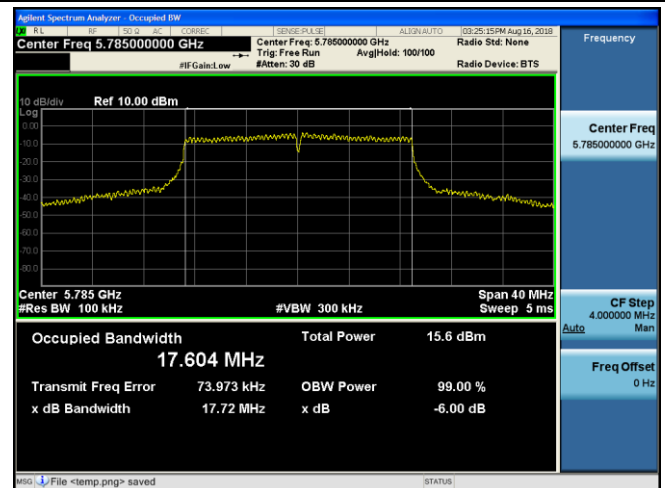

Channel 157 / 5785 MHz

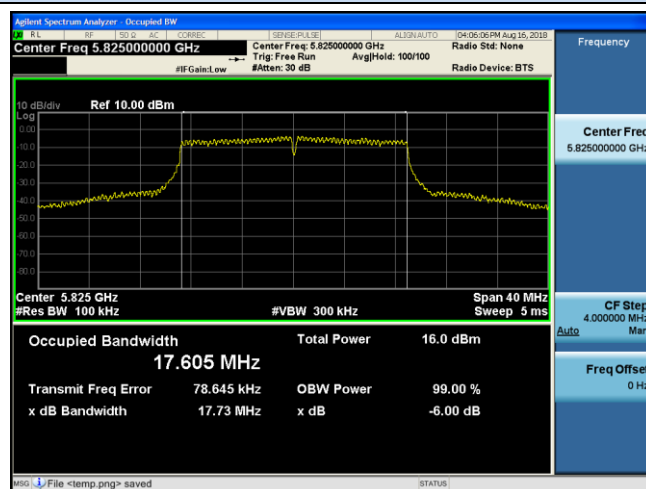

Channel 157 / 5785 MHz

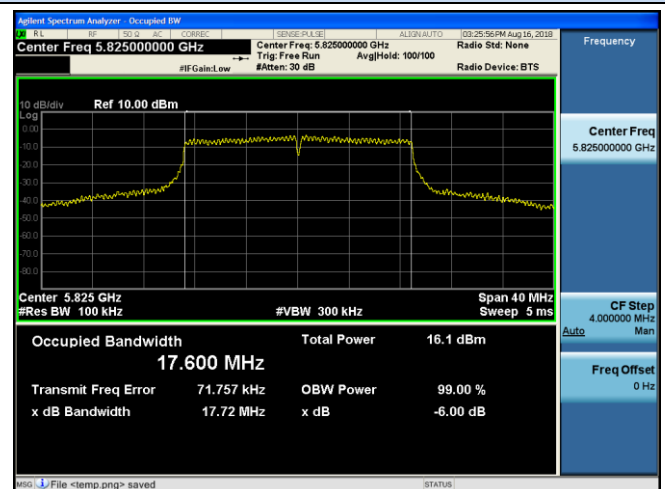


Channel 165 / 5825 MHz

Channel 165 / 5825 MHz




6dB Bandwidth
IEEE 802.11ac VHT20


Antenna Chain 0

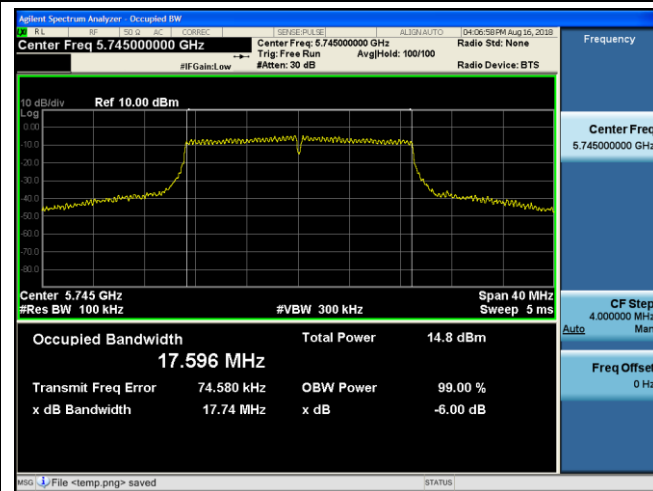


Antenna Chain 1

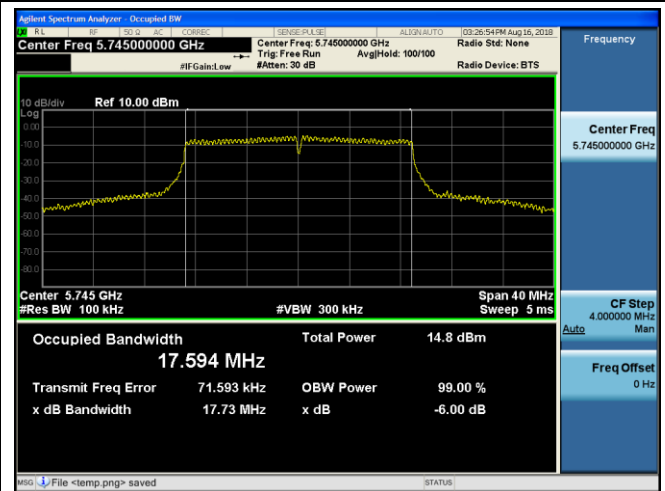


Channel 149 / 5745 MHz

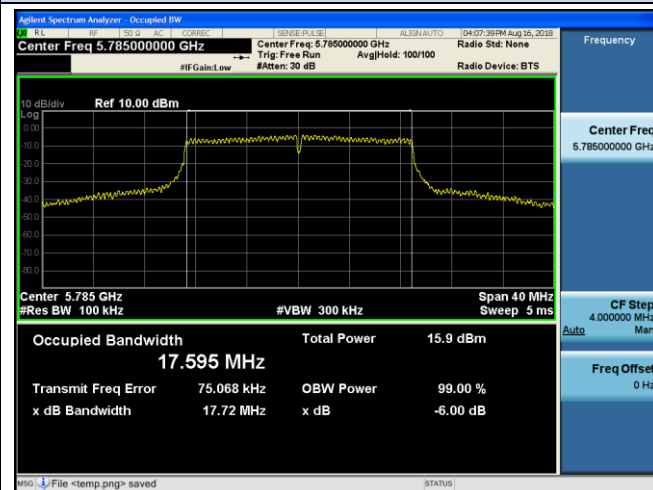


Channel 149 / 5745 MHz

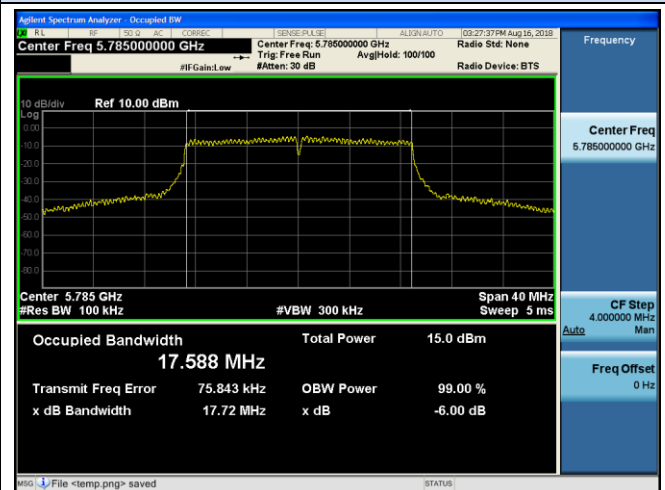

Channel 157 / 5785 MHz

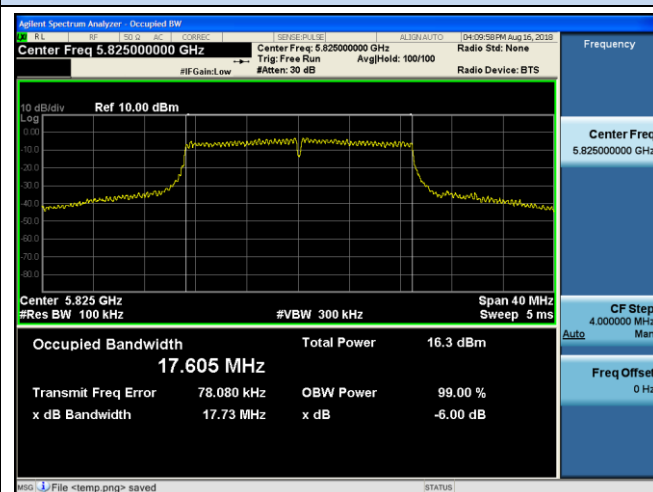

Channel 157 / 5785 MHz

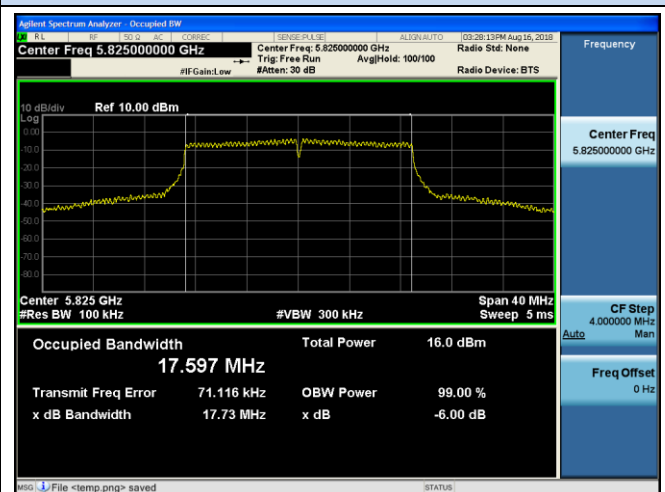


Channel 165 / 5825 MHz

Channel 165 / 5825 MHz




6dB Bandwidth
IEEE 802.11n HT40


Antenna Chain 0

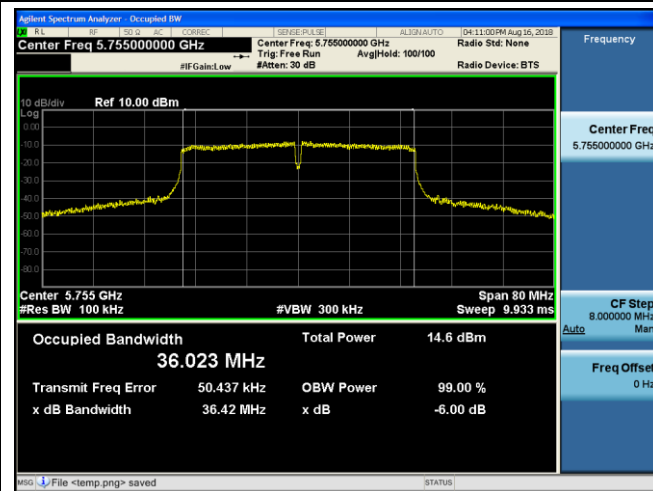


Antenna Chain 1

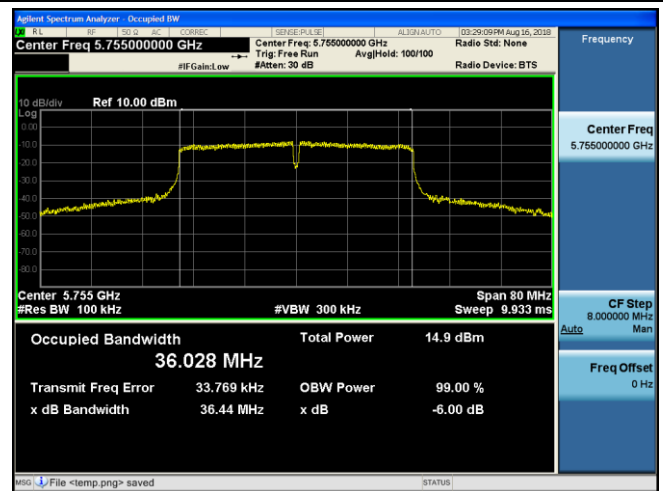


Channel 151 / 5755 MHz

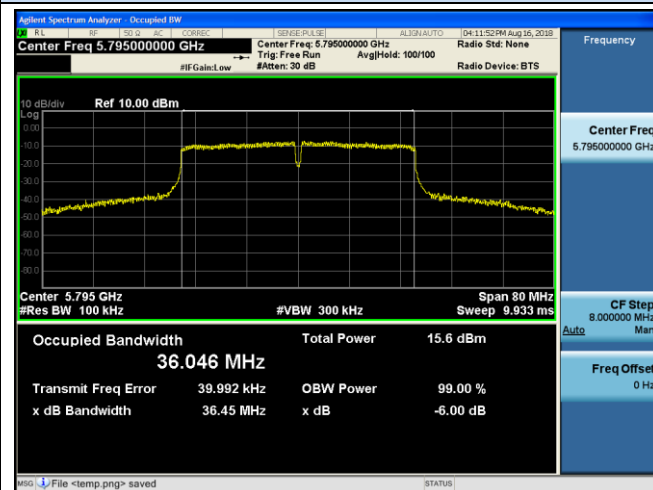


Channel 151 / 5755 MHz

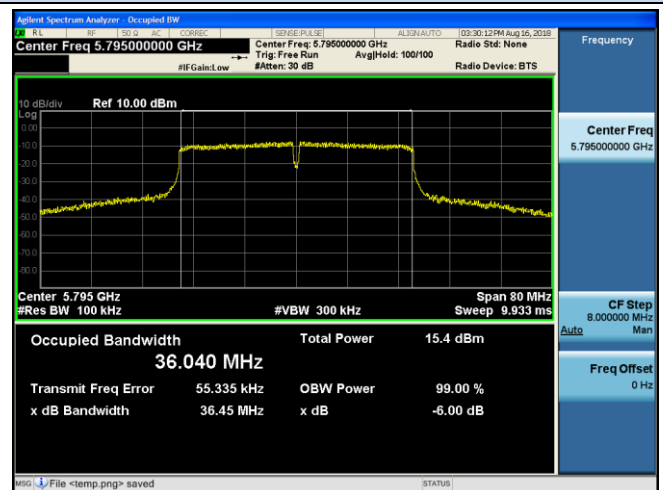

Channel 159 / 5795 MHz

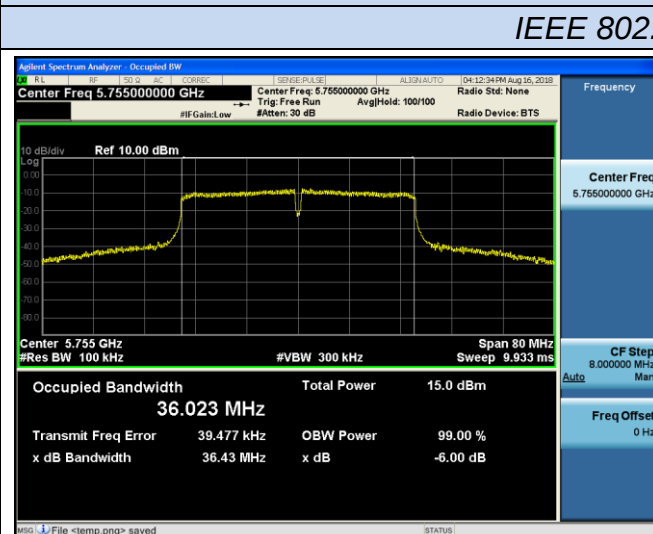

Channel 159 / 5795 MHz

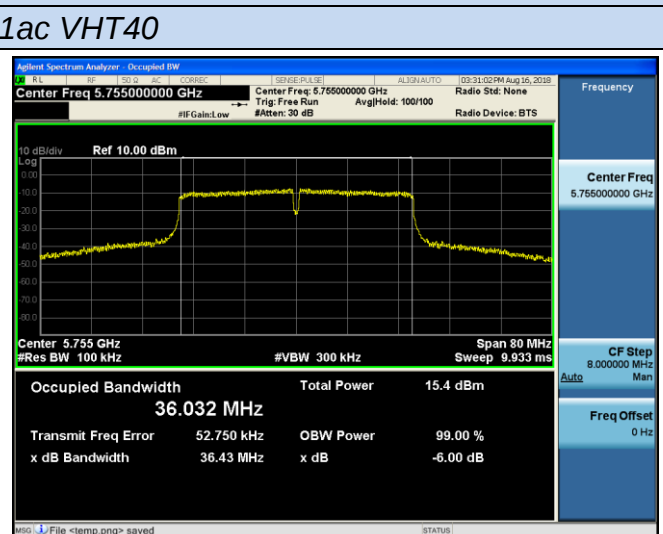

Channel 151 / 5755 MHz


Channel 151 / 5755 MHz




6dB Bandwidth

IEEE 802.11ac VHT40

Antenna Chain 0

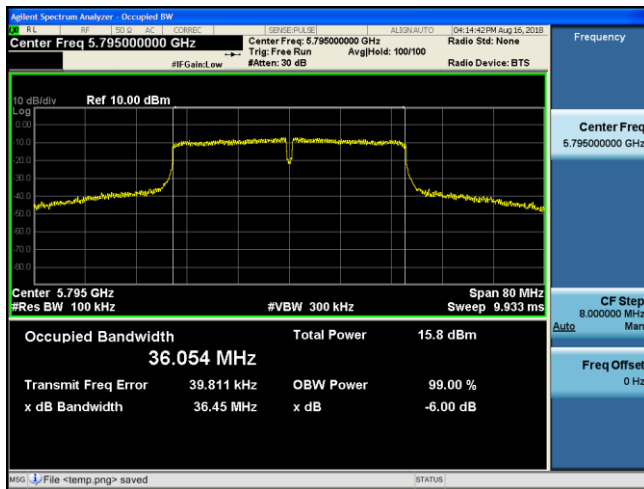



Antenna Chain 1

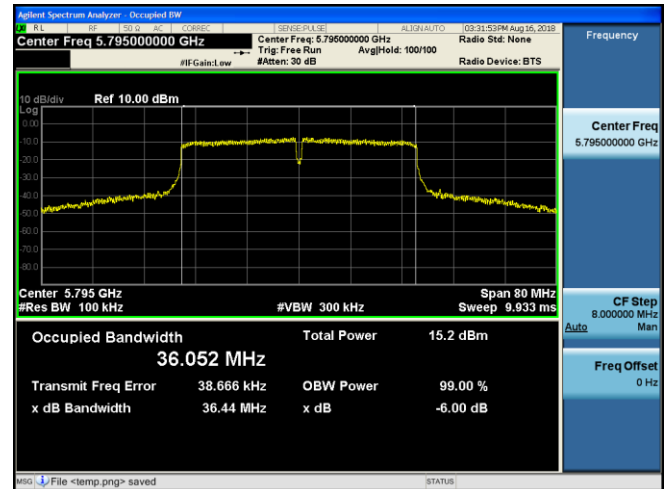

Channel 159 / 5795 MHz

Channel 159 / 5795 MHz

IEEE 802.11ac VHT80

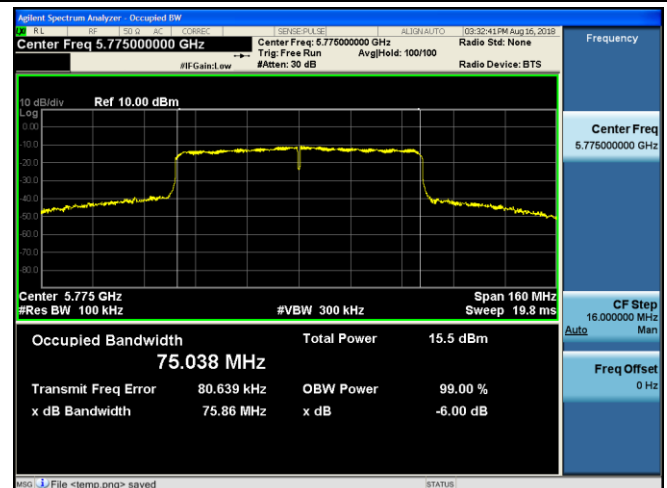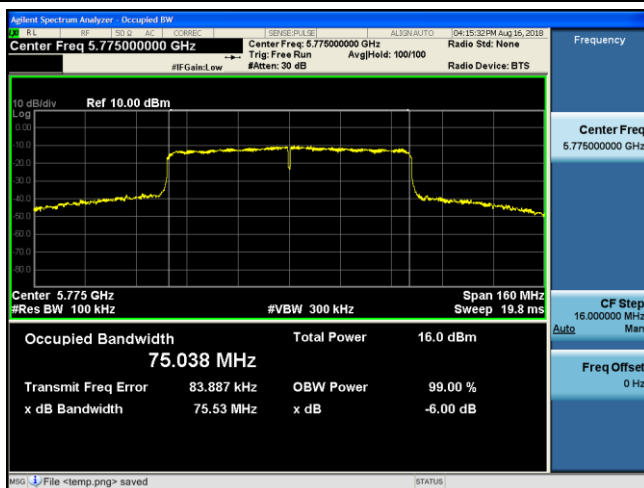

Channel 155 / 5775 MHz

Channel 155 / 5775 MHz