



# FCC TEST REPORT

**Test report  
On Behalf of  
Xunison Ltd  
For  
X-brain Smart gateway  
Model No.: XUS100, XEU100**

**FCC ID: 2AP2F-XUS100**

**Prepared for :** Xunison Ltd  
25th Kilcarbery Business Park, Upper Nangor Road, Dublin 22, Ireland

**Prepared By :** Shenzhen HUAK Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** June 10, 2018~August 31, 2018  
**Date of Report:** August 31, 2018  
**Report Number:** HUAK180824890E6



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : **Xunison Ltd**

Address ..... : 25th Kilcarbery Business Park, Upper Nangor Road, Dublin 22,  
Ireland

**Manufacture's Name** ..... : **Xunison Ltd**

Address ..... : 25th Kilcarbery Business Park, Upper Nangor Road, Dublin 22,  
Ireland

### Product description

Trade Mark: Xunison

Product name ..... : X-brain Smart gateway

Model and/or type reference : XUS100, XEU100

**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.249  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :

Date (s) of performance of tests ..... : June 10, 2018~August 31, 2018

Date of Issue ..... : August 31, 2018

Test Result ..... : **Pass**

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)

**Revision History**

Revision	Issue Date	Revisions	Revised By
00	August 31, 2018	Initial Issue	Jason Zhou



## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	5
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	6
1.3. EXTERNAL I/O CABLE .....	6
1.4. DESCRIPTION OF TEST FACILITY .....	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	6
1.6. MEASUREMENT UNCERTAINTY .....	7
1.7. DESCRIPTION OF TEST MODES .....	8
<b>2. TEST METHODOLOGY .....</b>	<b>9</b>
2.1. EUT CONFIGURATION.....	9
2.2. EUT EXERCISE .....	9
2.3. GENERAL TEST PROCEDURES .....	9
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>10</b>
3.1. JUSTIFICATION.....	10
3.2. EUT EXERCISE SOFTWARE.....	10
3.3. SPECIAL ACCESSORIES .....	10
3.4. BLOCK DIAGRAM/SCHEMATICS.....	10
3.5. EQUIPMENT MODIFICATIONS .....	10
3.6. TEST SETUP .....	10
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>5. TEST RESULT.....</b>	<b>12</b>
5.1. ON TIME AND DUTY CYCLE .....	12
5.2. RADIATED EMISSIONS MEASUREMENT.....	14
5.3. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS .....	26
5.4. POWER LINE CONDUCTED EMISSIONS .....	29
5.5. ANTENNA REQUIREMENTS.....	32
<b>6. LIST OF MEASURING EQUIPMENTS .....</b>	<b>33</b>
<b>7. TEST SETUP PHOTOGRAPHS OF EUT.....</b>	<b>34</b>
<b>8. EXTERIOR PHOTOGRAPHS OF THE EUT.....</b>	<b>34</b>
<b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>34</b>



## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	: X-brain Smart gateway
Model Number	: XUS100, XEU100
Model Declaration	: PCB board, structure and internal of these model(s) are the same, Only models name is different for these models.
Test Model	: XUS100
Power Supply	: DC 12.0V by adapter
Hardware version	: V2
Software version	: 7.1.2
Z-Wave	
Channel Number	: Channel 1: 908.4MHz / Channel 2: 916MHz
Modulation Technology	: FSK
Antenna Type And Gain	: Internal Antenna 0.5dBi[Antenna 0]
2.4G Band RF Function	
Channel Number	: Channel 1: 2405MHz / Channel 2: 2413MHz : Channel 3: 2422MHz / Channel 4: 2430MHz : Channel 5: 2440MHz / Channel 6: 2450MHz : Channel 7: 2460MHz / Channel 8: 2470MHz
Modulation Technology	: GFSK
Antenna Type And Gain	: Internal Antenna 0.0dBi[Antenna 1]
Bluetooth	
Bluetooth Version	: V4.1
Frequency Range	: 2402-2480MHz
Channel Number	: 79 Channels for Bluetooth V3.0(DSS) : 40 Channels for Bluetooth V4.1(DTS)
Modulation Technology	: GFSK, π/4-DQPSK, 8-DPSK for Bluetooth V3.0(DSS) : GFSK for Bluetooth V4.1(DTS)
Data Rates	: Bluetooth V3.0(DSS): 1~3Mbps : Bluetooth V4.1(DTS): 1Mbps
Antenna Type And Gain	: Internal Antenna 0.0dBi[Antenna 2]
Wlan	
WLAN	: Supported IEEE 802.11a/b/g/n/ac  IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz / 5745-5825MHz IEEE 802.11n HT40:2422-2452MHz / 5190-5230MHz / 5755-5795MHz IEEE 802.11a: 5180-5240MHz / 5745-5825MHz IEEE 802.11ac VHT20: 5180-5240MHz / 5745-5825MHz IEEE 802.11ac VHT40: 5190-5230MHz / 5755-5795MHz IEEE 802.11ac VHT80: 5210MHz / 5775MHz
WLAN FCC Operation Frequency	



## WLAN Channel Number

- 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20)
- 7 Channels for 2422-2452MHz(IEEE 802.11n HT40)
- 4 Channels for 5180-5240MHz (IEEE 802.11a/ac VHT20/n HT20)
- 2 Channels for 5190-5230MHz (IEEE 802.11ac VHT40/n HT40)
- 1 Channels for 5210MHz (IEEE 802.11ac VHT80)
- 5 Channels for 5745-5825MHz(IEEE 802.11a/ac VHT20/n HT20)
- 2 Channels for 5755-5795MHz(IEEE 802.11ac VHT40/n HT40)
- 1 Channels for 5775MHz(IEEE 802.11ac VHT80)

## WLAN Modulation Technology

- IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
- IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
- IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
- IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
- IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

## Three Antennas:

Internal Antenna 3 and Antenna 4:  
3.81dBi(Max.), for TX/RX (WLAN 2.4G Band),

- Internal Antenna 5 and Antenna 6:  
4.03 dBi(Max.), for TX/RX (WLAN 5G Band)
- 802.11n(2.4G Band) support 2T2R.[Antenna 3 and Antenna 4]
- 802.11n/ac(5G Band) support 2T2R.[Antenna 5 and Antenna 6]

## Antenna Type And Gain

- 6.81 dBi for MIMO(2.4G Band)
- 7.03 dBi for MIMO(5G Band)

*Note: Antenna position refer to EUT Photos.*

## 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
SUNUN	Adapter	SA18H-120150U	A18-124	N/A

## 1.3. External I/O Cable

I/O Port Description	Quantity	Cable
USB Port	2	1m, unshielded
HDMI Port	1	1.5m, unshielded
Lan Port	3	1.5m,shielded

## 1.4. Description of Test Facility

Designation Number: CN1229

Test Firm Registration Number: 616276

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the HUAK quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



## 1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.08dB	(1)
		30MHz~1000MHz	±4.42dB	(1)
		1GHz~40GHz	±4.06dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±2.23dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

All test modes were tested, only the result of the worst case was recorded in the report.

### Channel List & Frequency

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	908.4	2	916.0

### Test Channel

Channel	Transmitting Frequency (MHz)
1	908.4
2	916.0



## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen HUAK Testing Technology Co., Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by Press a button provided by application, the channels can switch from Low and High channel as described in section 1.7 of this report.

#### 3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	TV	AOC	280LM000 03	JVVGJA000307	/	/	/
2	PC	ASUS	K43S	X16-96081	/	/	/

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen HUAK Testing Technology Co., Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.



## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
/	Duty Cycle	Compliant
§15.249(a), §15.249(c), §15.249(e)	Field strength of fundamental	Compliant
§15.205, §15.249(d)	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of the spectrum analyzer.

#### 5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=100ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout

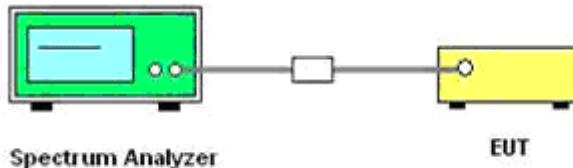


#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.6. Test result

Frequency(MHz)	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW(KHz)
908.4	100	100	1	100	0	0.010
916.0	100	100	1	100	0	0.010

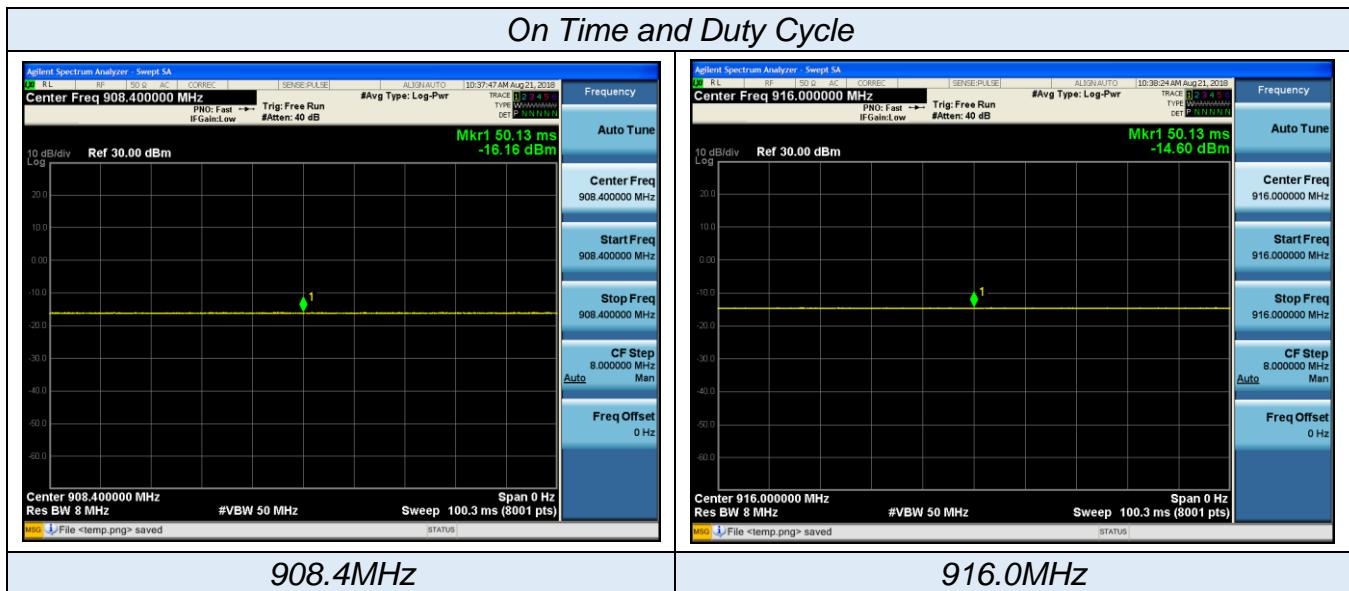



## 5.2. Radiated Emissions Measurement

### 5.2.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	\2\
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

According to §15.249 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	millivolts/meter	dBuV/m	microvolts/meter	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any



condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth

### 5.2.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1kHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 5.2.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



#### 4) Sequence of testing above 18 GHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### **Premeasurement:**


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### **Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.2.4. Test Setup Layout

For radiated emissions below 30MHz

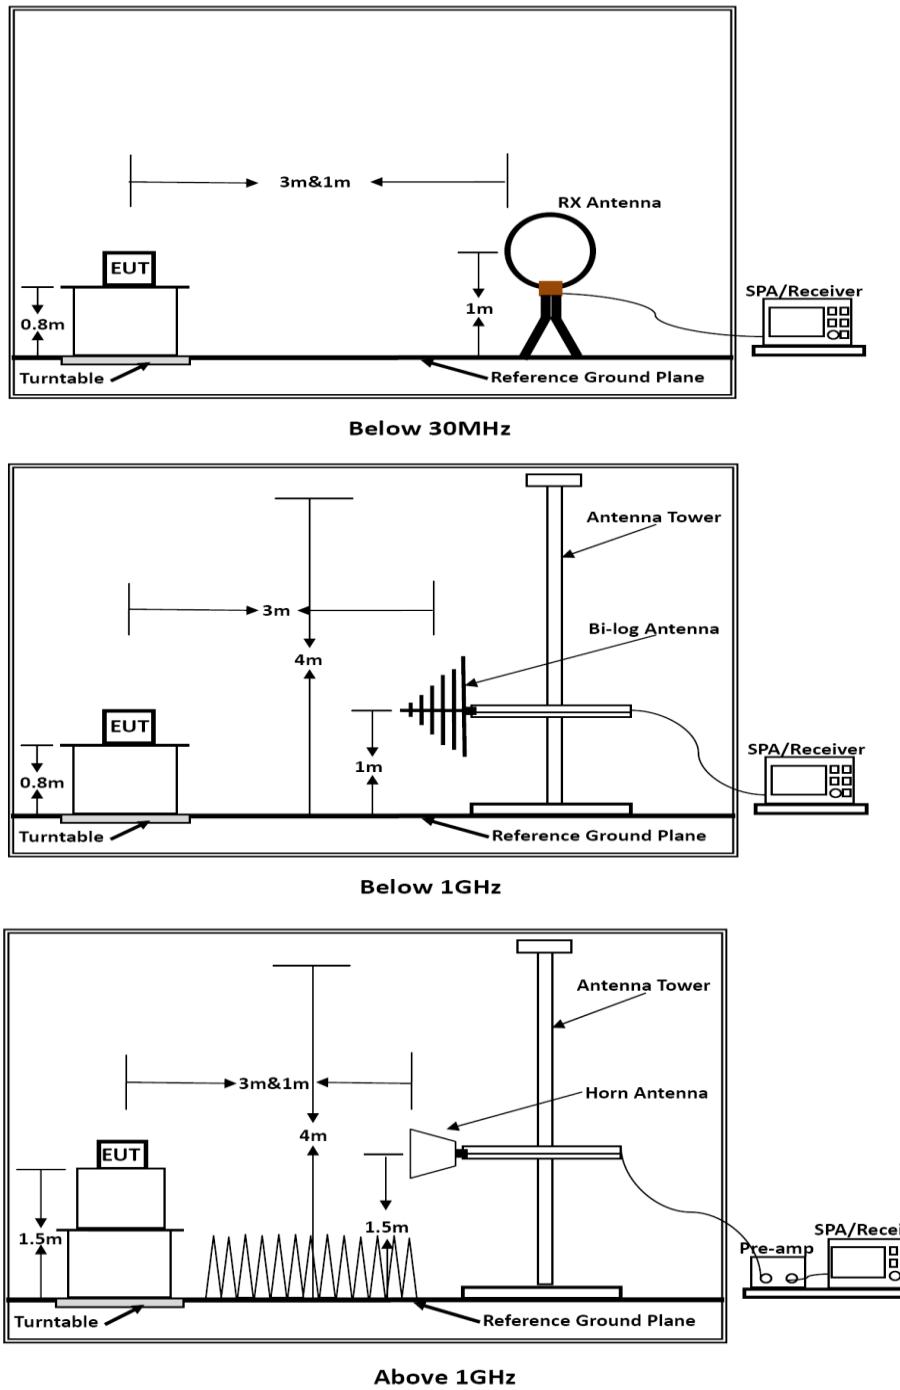

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 5.2.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	24.5 °C	Humidity	56.2%
Test Engineer	Gary Qian	Configurations	Low Channel/ High Channel
Test Date	August 15, 2018		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

## Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

## 5.2.7. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.5 °C	Humidity	56.2%
Test Engineer	Gary Qian		
Test Date	August 15, 2018	Configurations	Low Channel/ High Channel



Low Channel Mode:  
Vertical

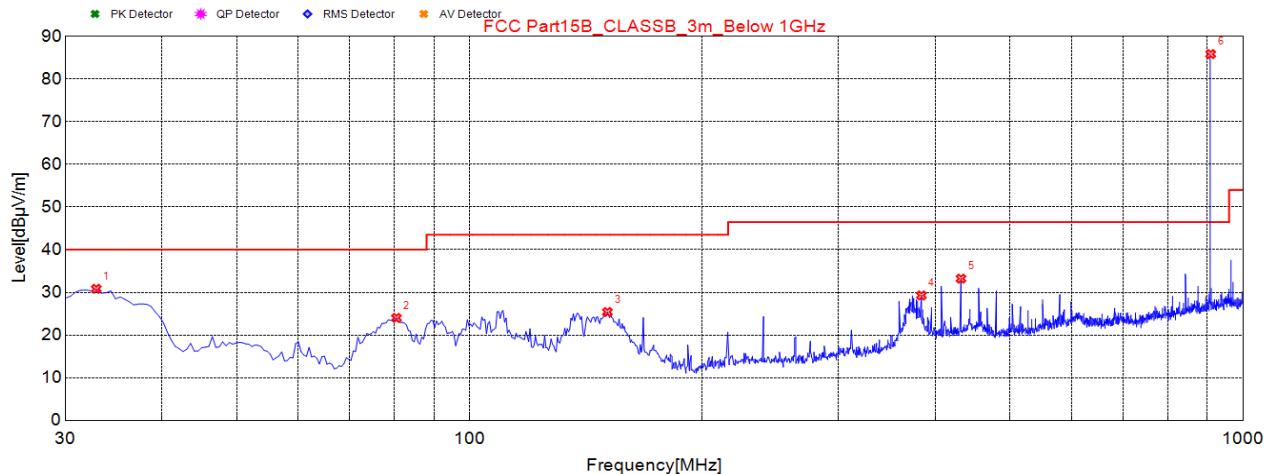

NO.	Freq. [MHz]	Result Level [dB $\mu$ V/m]	Factor [dB/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.910	30.84	-16.15	40.00	9.16	100	201	Vertical
2	80.440	24.01	-19.98	40.00	15.99	100	359	Vertical
3	150.765	25.4	-19.06	43.50	18.10	100	285	Vertical
4	384.050	29.28	-10.47	46.50	17.22	100	53	Vertical
5	432.065	33.21	-9.40	46.50	13.29	100	352	Vertical
6	908.820	85.87	-0.94	94.00	8.13	100	352	Vertical

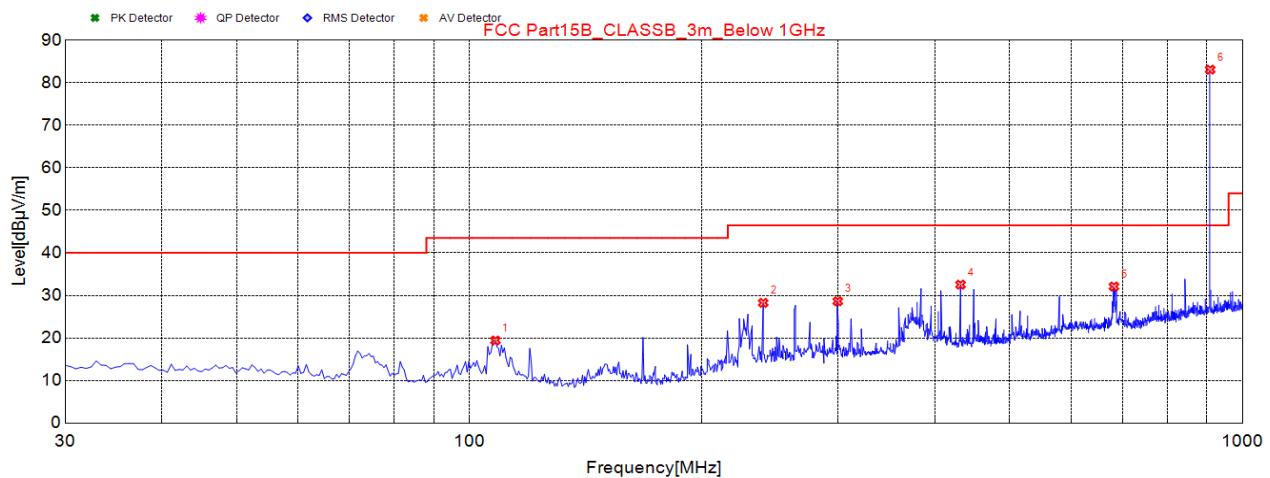
*Horizontal*

NO.	Freq. [MHz]	Result Level [dB $\mu$ V/m]	Factor [dB/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	108.085	19.39	-16.00	43.50	24.11	100	282	Horizontal
2	240.005	28.25	-14.18	46.50	18.25	100	262	Horizontal
3	299.660	28.62	-12.82	46.50	17.88	100	282	Horizontal
4	432.065	32.53	-9.40	46.50	13.97	100	271	Horizontal
5	682.325	32.09	-4.57	46.50	14.41	100	296	Horizontal
6	908.820	83.11	-0.94	94.00	10.89	100	341	Horizontal


**Max EIRP=85.87-95.2-2.15=-11.48 dBm**



High Channel Mode:  
Vertical

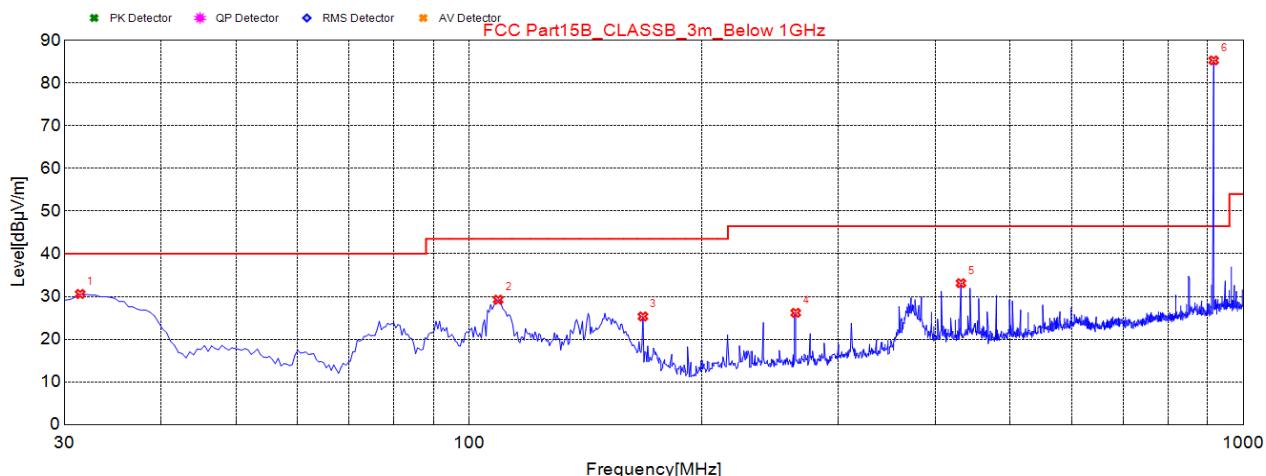

NO.	Freq. [MHz]	Result Level [dB $\mu$ V/m]	Factor [dB/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.455	30.59	-16.18	40.00	9.41	100	355	Vertical
2	109.055	29.24	-16.01	43.50	14.26	100	265	Vertical
3	167.740	25.32	-18.20	43.50	18.18	100	318	Vertical
4	264.255	26.17	-13.56	46.50	20.33	200	181	Vertical
5	432.065	33.12	-9.40	46.50	13.38	100	112	Vertical
6	916.095	85.32	-0.84	94.00	8.68	100	355	Vertical

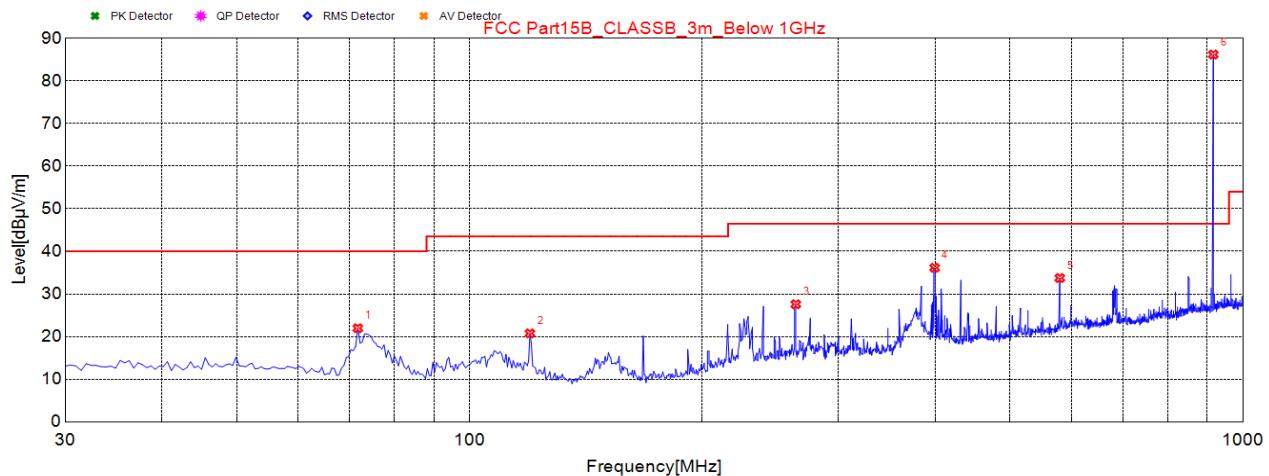**Horizontal**


NO.	Freq. [MHz]	Result Level [dB $\mu$ V/m]	Factor [dB/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	71.710	21.95	-18.52	40.00	18.05	300	35	Horizontal
2	119.725	20.75	-17.59	43.50	22.75	300	287	Horizontal
3	264.255	27.58	-13.56	46.50	18.92	100	257	Horizontal
4	399.570	36.15	-10.05	46.50	10.35	100	121	Horizontal
5	579.990	33.74	-6.09	46.50	12.76	100	143	Horizontal
6	916.095	86.21	-0.84	94.00	7.79	300	281	Horizontal

**Note:**

- 1). Pre-scan all modes and recorded the worst case results in this report (Channel 1/916MHz)
- 2). Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
- 3). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**Max EIRP=86.21-95.2-2.15=-11.14 dBm**



## 5.2.8. Results for Radiated Emissions (Above 1GHz)

## Channel 1 / 908.4 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1817.76	55.00	33.16	35.15	3.96	56.97	74.00	17.03	Peak	Horizontal
1817.05	41.68	33.16	35.15	3.96	43.65	54.00	10.35	Average	Horizontal
1816.82	55.53	33.16	35.15	3.96	57.50	74.00	16.50	Peak	Vertical
1817.40	41.25	33.16	35.15	3.96	43.22	54.00	10.78	Average	Vertical

## Channel 2 / 916.0 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1832.33	59.83	33.06	35.04	3.94	61.79	74.00	12.21	Peak	Horizontal
1832.81	41.92	33.06	35.04	3.94	43.88	54.00	10.12	Average	Horizontal
1832.24	56.68	33.06	35.04	3.94	58.64	74.00	15.36	Peak	Vertical
1832.79	42.54	33.06	35.04	3.94	44.50	54.00	9.50	Average	Vertical

**Notes:**

1. Measuring frequencies from 9 KHz - 10<sup>th</sup> harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz ~10<sup>th</sup> harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


### 5.3. Band-edge measurements for radiated emissions

#### 5.3.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 5.3.2 Test Setup Layout

##### For Radiated

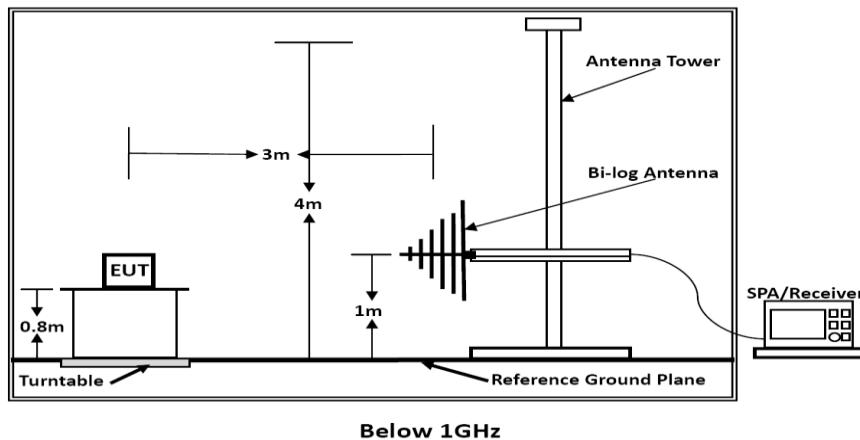

##### For Conducted

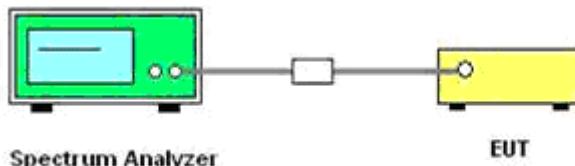

#### 5.3.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

#### 5.3.4. Test Procedures

##### Radiated Method:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:



Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

#### Conducted Method:

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq$  30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $>$  1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the result ant EIRP level to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20\log D + 104.77 = EIRP + 95.23$$

Where:

E = electric field strength in  $\text{dB}\mu\text{V/m}$ ,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Per KDB662911 D01 section b) In cases where a combination of conducted measurements and cabinet radiated measurements are permitted to demonstrate compliance with absolute radiated out-of-band and spurious limits (e.g., KDB Publications 558074 for DTS and 789033 for U-NII), the conducted measurements must be combined with directional gain to compute the radiated levels of the out-of-band and spurious emissions as described in this section.
13. Compare the resultant electric field strength level to the applicable regulatory limit.
14. Perform radiated spurious emission test duress until all measured frequencies were complete.



### 5.3.5 Test Results

According to 15.205, the restrict band is far from working frequency, it consider to compliance with 15.205(a) from radiated emission result in 5.2.7 of this report

## 5.4. Power line conducted emissions


### 5.4.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 5.4.2 Block Diagram of Test Setup

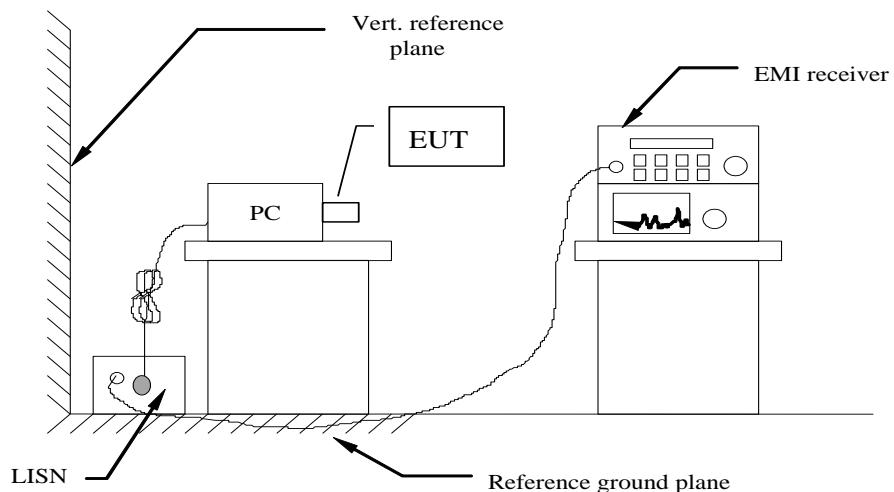


### 5.4.3 Test Results

Temperature	24.5°C	Humidity	56.2%
Test Engineer	Gary Qian		
Test Date	August 15, 2018	Configurations	High Channel(916.0MHz)

*The Worst Test result for High Channel(916.0MHz)*

**AC Conducted Emission of power adapter @ AC 120V/60Hz @ IEEE 802.11n HT40 (worst case)**

Line

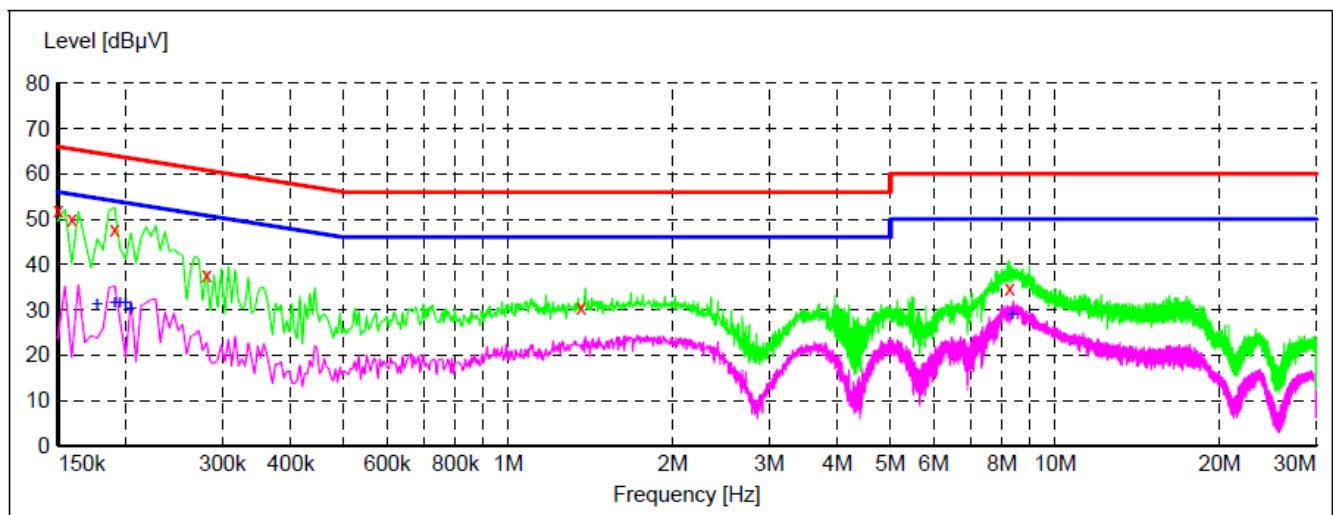


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
------------------	---------------------	--------------	---------------------	--------------	----------	------	----

0.150000	52.10	9.9	66	13.9	QP	L1	GND
0.159000	49.90	10.0	66	15.6	QP	L1	GND
0.190500	47.90	10.5	64	16.1	QP	L1	GND
0.280500	37.60	10.3	61	23.2	QP	L1	GND
1.356000	30.60	9.8	56	25.4	QP	L1	GND
8.263500	34.80	9.9	60	25.2	QP	L1	GND

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
------------------	---------------------	--------------	---------------------	--------------	----------	------	----

0.177000	31.20	10.3	55	23.4	AV	L1	GND
0.190500	31.40	10.5	54	22.6	AV	L1	GND
0.195000	31.60	10.6	54	22.2	AV	L1	GND
0.199500	31.50	10.7	54	22.1	AV	L1	GND
0.204000	30.20	10.7	53	23.2	AV	L1	GND
8.344500	28.90	9.9	50	21.1	AV	L1	GND

Neutral

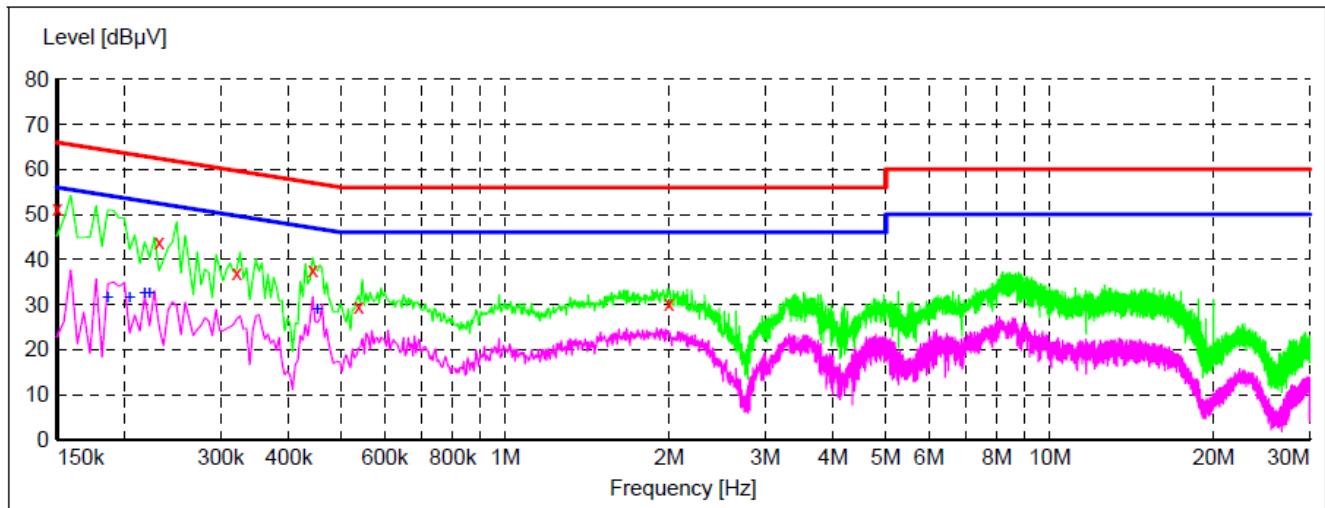

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
------------------	---------------------	--------------	---------------------	--------------	----------	------	----

0.150000	51.30	9.9	66	14.7	QP	N	GND
0.231000	43.90	10.6	62	18.5	QP	N	GND
0.321000	37.00	10.2	60	22.7	QP	N	GND
0.442500	37.50	10.0	57	19.5	QP	N	GND
0.537000	29.60	10.0	56	26.4	QP	N	GND
1.999500	30.30	9.8	56	25.7	QP	N	GND

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
------------------	---------------------	--------------	---------------------	--------------	----------	------	----

0.186000	31.60	10.5	54	22.6	AV	N	GND
0.204000	31.40	10.7	53	22.0	AV	N	GND
0.217500	32.40	10.6	53	20.5	AV	N	GND
0.222000	32.60	10.6	53	20.1	AV	N	GND
0.451500	28.80	10.0	47	18.0	AV	N	GND

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT40).



## 5.5. Antenna Requirements

### 5.5.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 5.5.2. Antenna Connected Construction

#### 5.5.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 5.5.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0.5dBi, and the antenna is a Internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 5.5.2.3. Results: Compliance.



## 6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schewarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Broadband Horn Antenna	Schewarzbeck	BBHA 9170	HKE-017	Dec. 28, 2017	1 Year
12.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
13.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
14.	EMI Test Software <u>EZ-EMC</u>	Tonscend	JS1120-B	HKE-083	Dec. 28, 2017	N/A
15.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2017	1 Year
16.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
17.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2017	1 Year
18.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2017	1 Year
19.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year
20.	RF Cable(below 1GHz)	HUBER+SUHNER	RG214	HKE-055	Dec. 28, 2017	1 Year
21.	RF Cable(above 1GHz)	HUBER+SUHNER	RG214	HKE-056	Dec. 28, 2017	1 Year



## 7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

## 9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----