



## 802.11 n40 CH06 (2437MHz)




## 802.11 n40 CH06 (2437MHz)

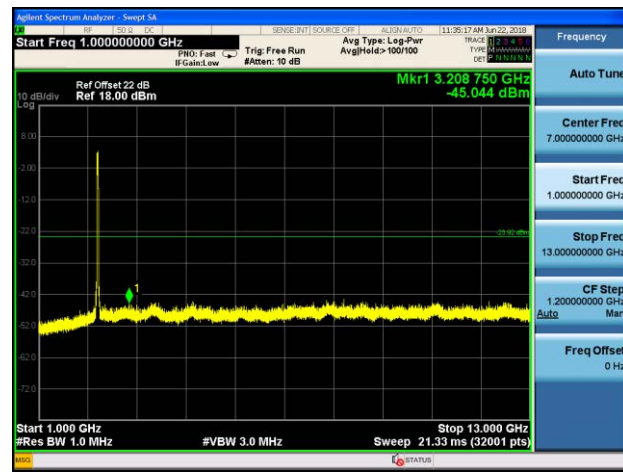


## 802.11 n40 CH09 (2452MHz)

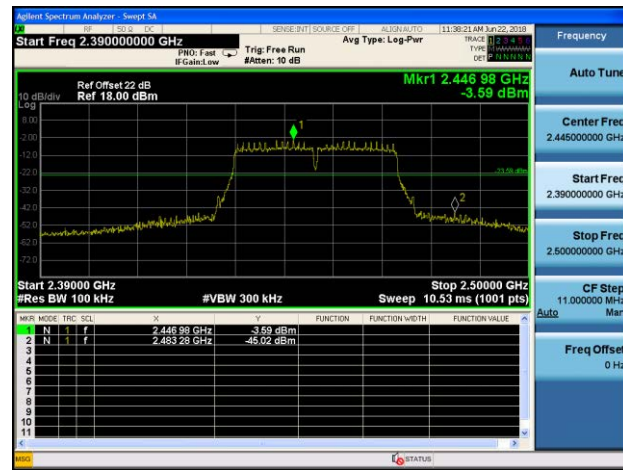


## 802.11 n40 CH09 (2452MHz)

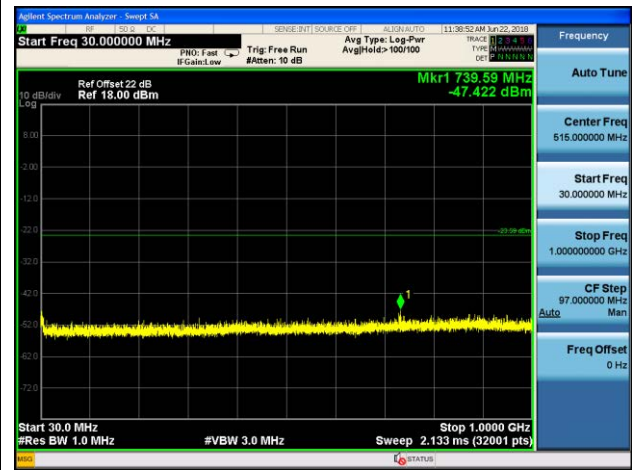

## 802.11 n40 CH09 (2452MHz)

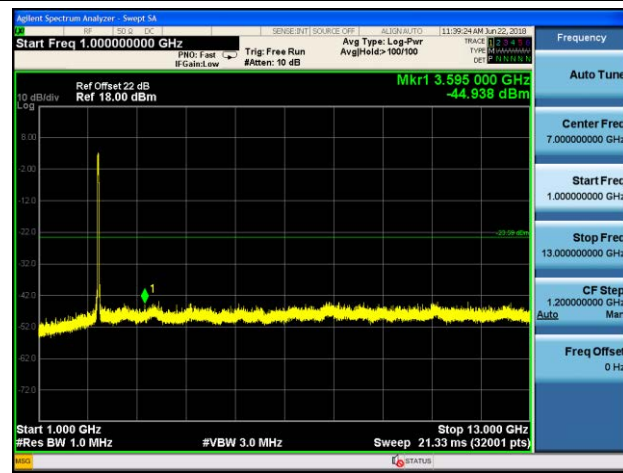


## 802.11 n40 CH09 (2452MHz)

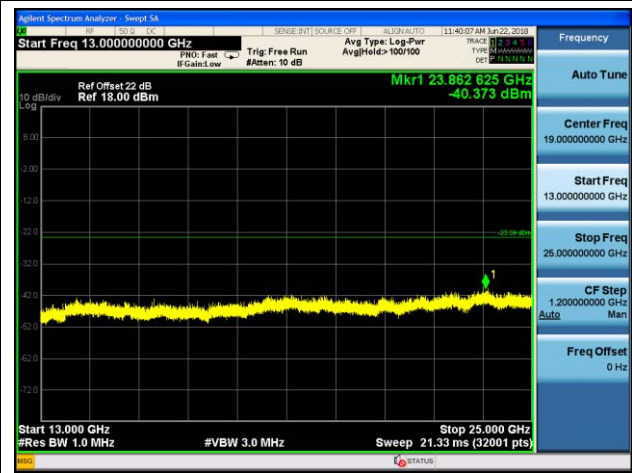


### Antenna 1


#### 802.11 n20 CH01 (2412MHz)

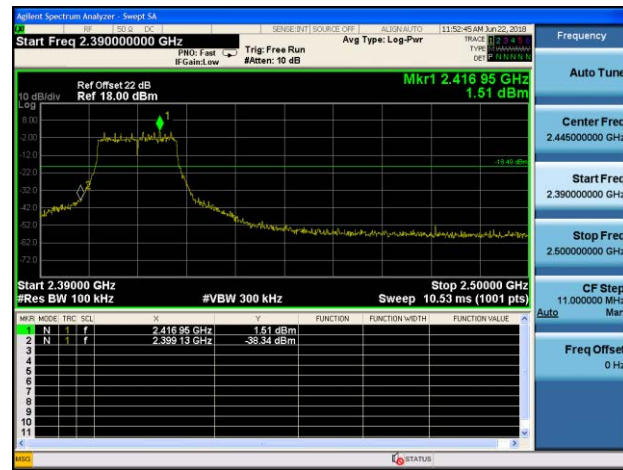

#### 802.11 n20 CH01 (2412MHz)

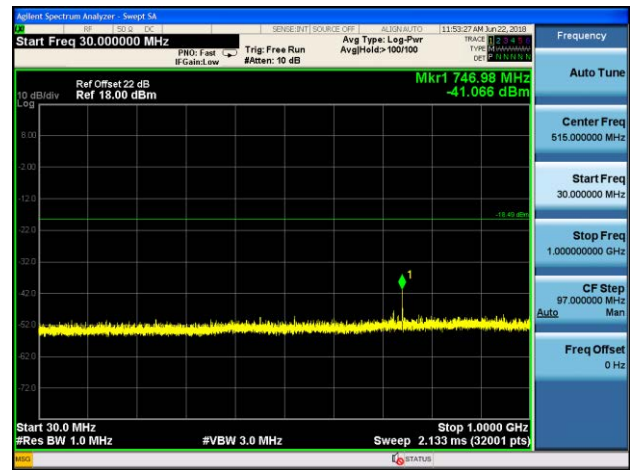


#### 802.11 n20 CH01 (2412MHz)

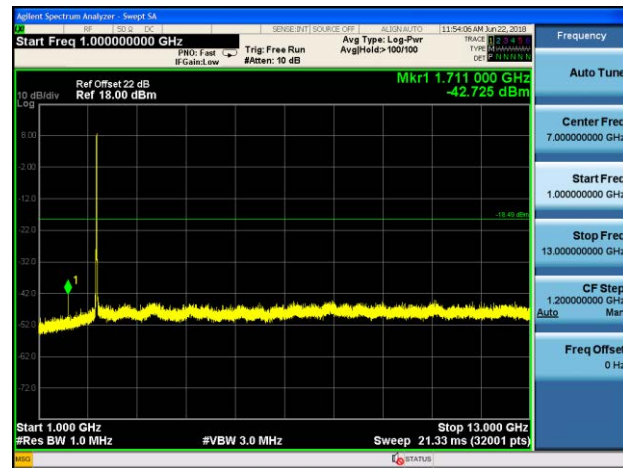


#### 802.11 n20 CH01 (2412MHz)




#### 802.11 n20 CH06 (2437MHz)

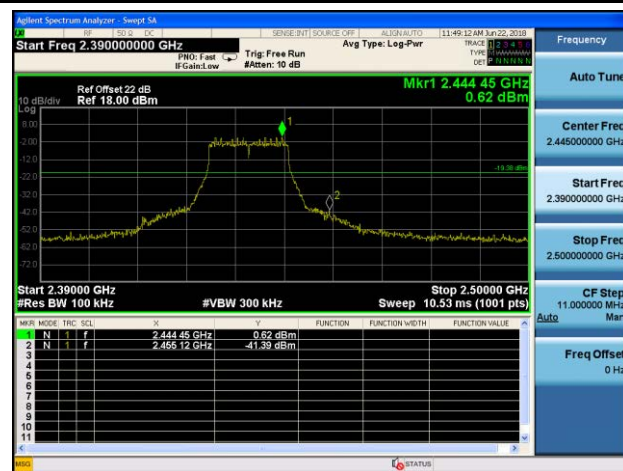

#### 802.11 n20 CH06 (2437MHz)

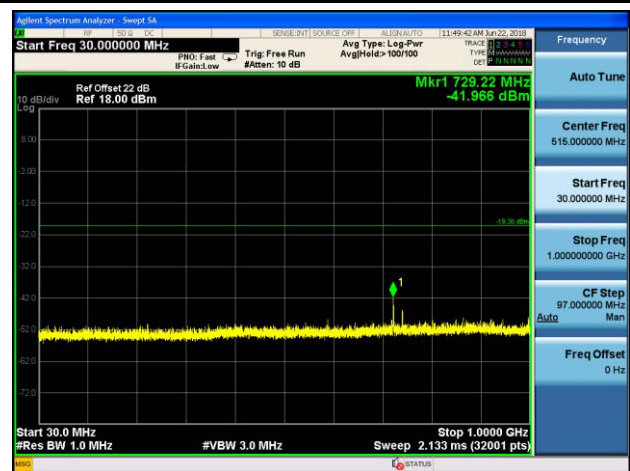


## 802.11 n20 CH06 (2437MHz)

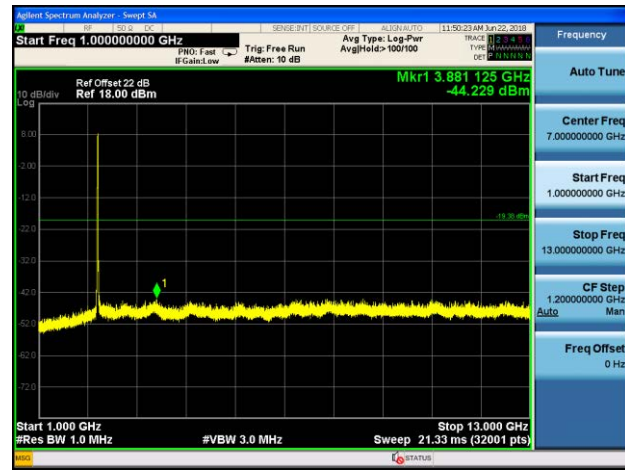


## 802.11 n20 CH06 (2437MHz)




## 802.11 n20 CH11 (2462MHz)

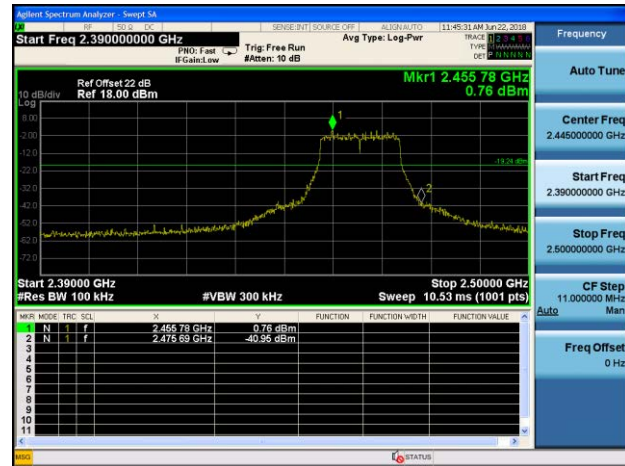

## 802.11 n20 CH11 (2462MHz)

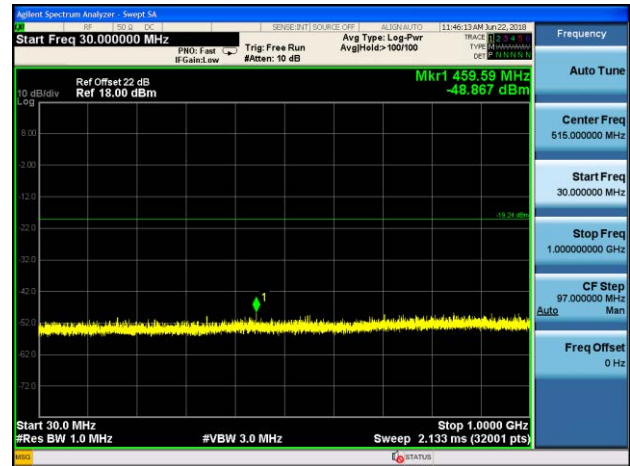

## 802.11 n20 CH11 (2462MHz)

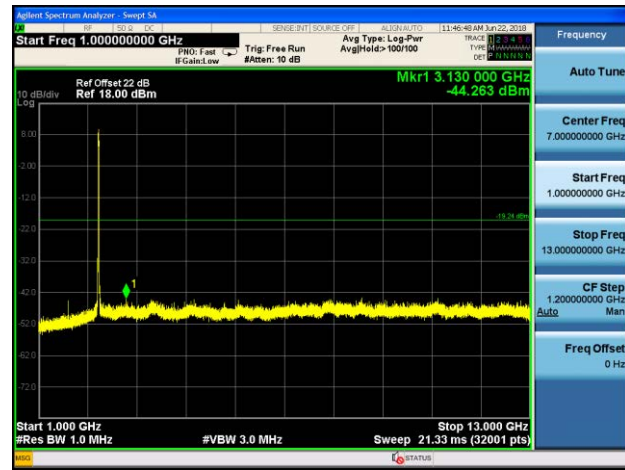


## 802.11 n20 CH11 (2462MHz)




## 802.11 n40 CH03 (2422MHz)




## 802.11 n40 CH03 (2422MHz)

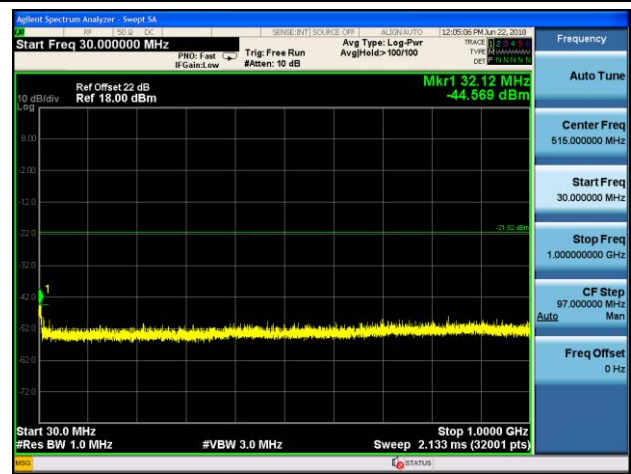


## 802.11 n40 CH03 (2422MHz)

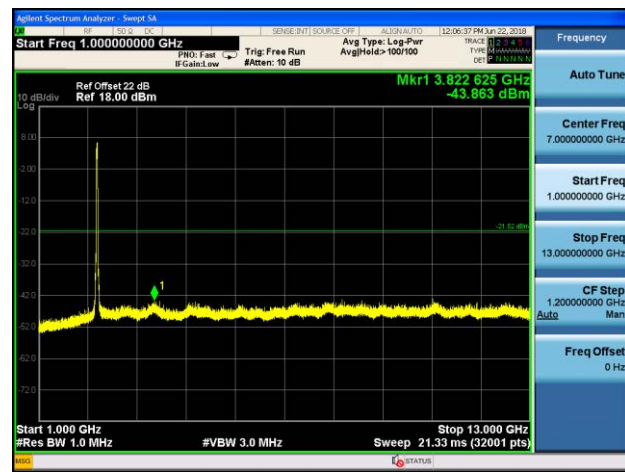


## 802.11 n40 CH03 (2422MHz)

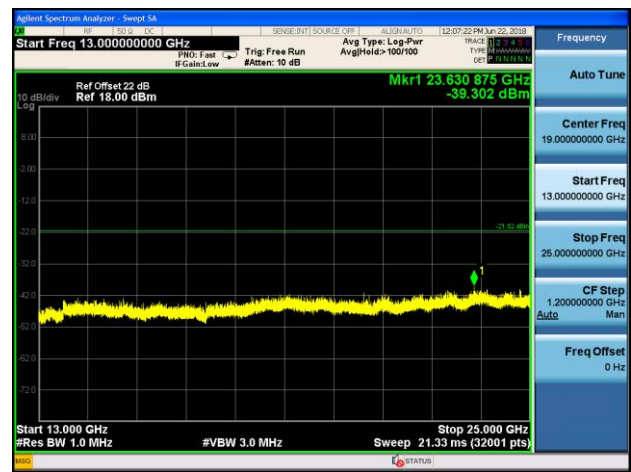


## 802.11 n40 CH06 (2437MHz)

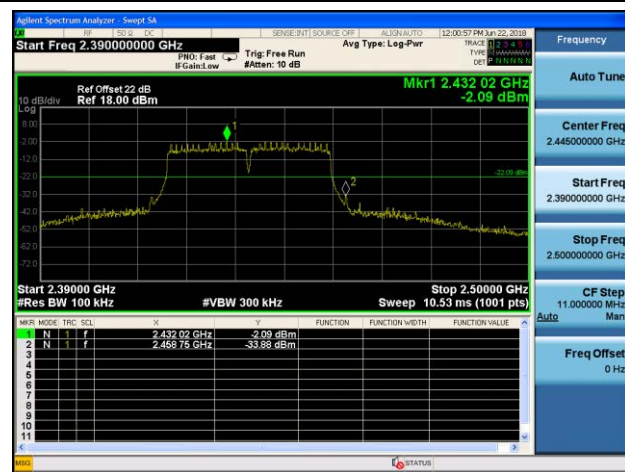

## 802.11 n40 CH06 (2437MHz)

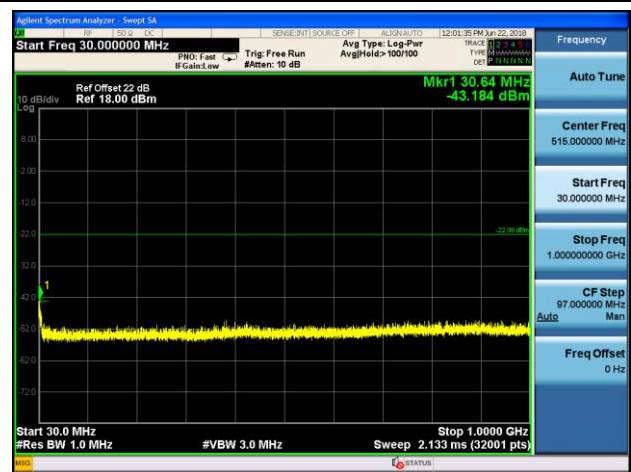

## 802.11 n40 CH06 (2437MHz)

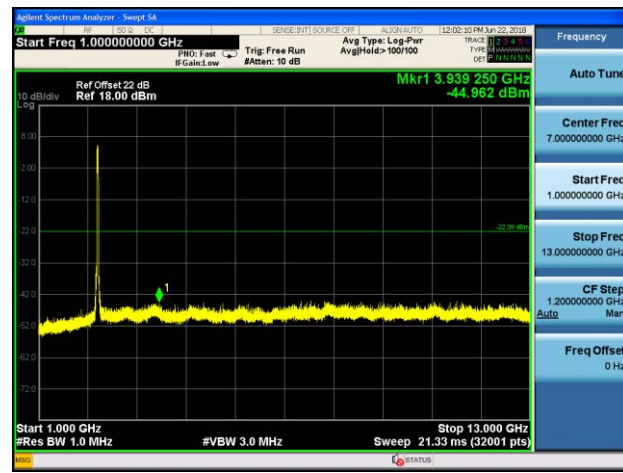


## 802.11 n40 CH06 (2437MHz)




## 802.11 n40 CH09 (2452MHz)



## 802.11 n40 CH09 (2452MHz)

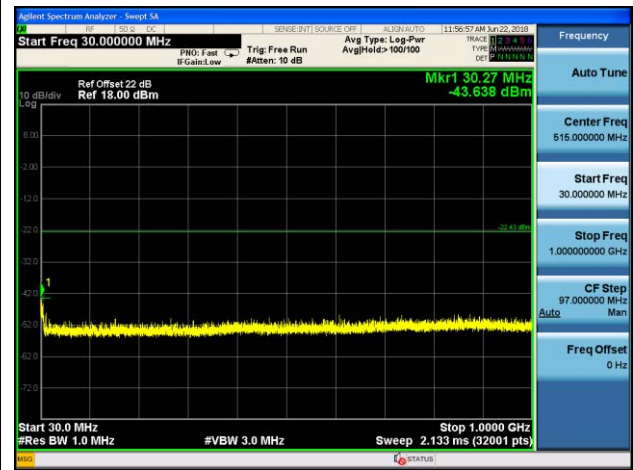

## 802.11 n40 CH09 (2452MHz)

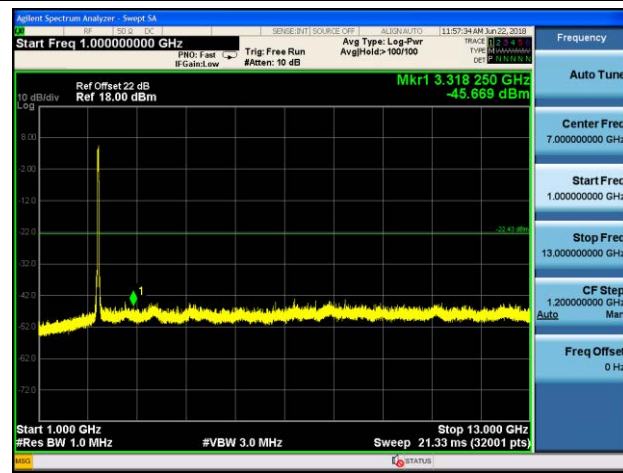

## 802.11 n40 CH09 (2452MHz)



## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                      |                            |
|----------------------------------------|----------------------|----------------------------|
| Frequency [MHz]                        | Field Strength [V/m] | Measured Distance [Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)         | 300                        |
| 0.490 - 1.705                          | 24000/F (kHz)        | 30                         |
| 1.705 - 30                             | 30                   | 30                         |
| 30 - 88                                | 100                  | 3                          |
| 88 - 216                               | 150                  | 3                          |
| 216 - 960                              | 200                  | 3                          |
| Above 960                              | 500                  | 3                          |

### 7.6.2. Test Procedure Used

KDB 558074 D01v04- Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v04- Section 12.2.4 (peak power measurements)

KDB 558074 D01v04- Section 12.2.5 (average power measurements)

### 7.6.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

#### **Average Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW  $\geq 1/T$

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold


8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.6.4. Test Setup


##### 9kHz ~ 30MHz Test Setup:

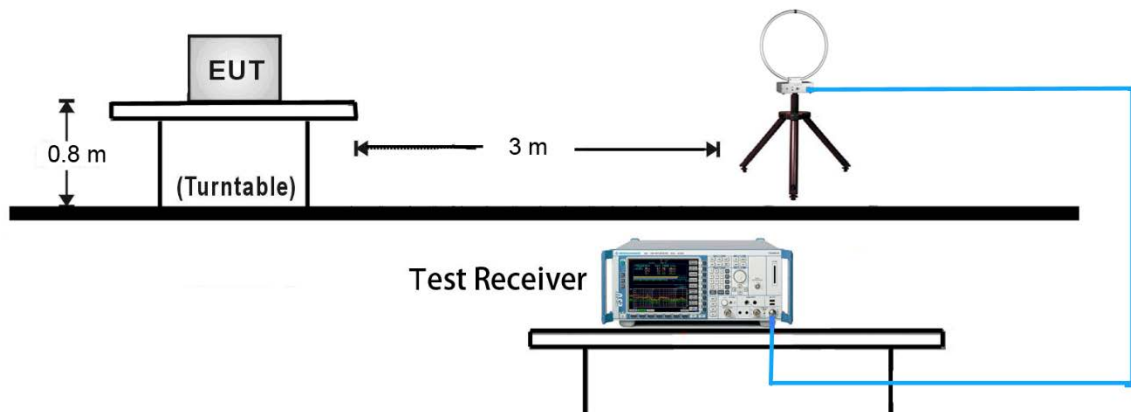


##### 30MHz ~ 1GHz Test Setup:

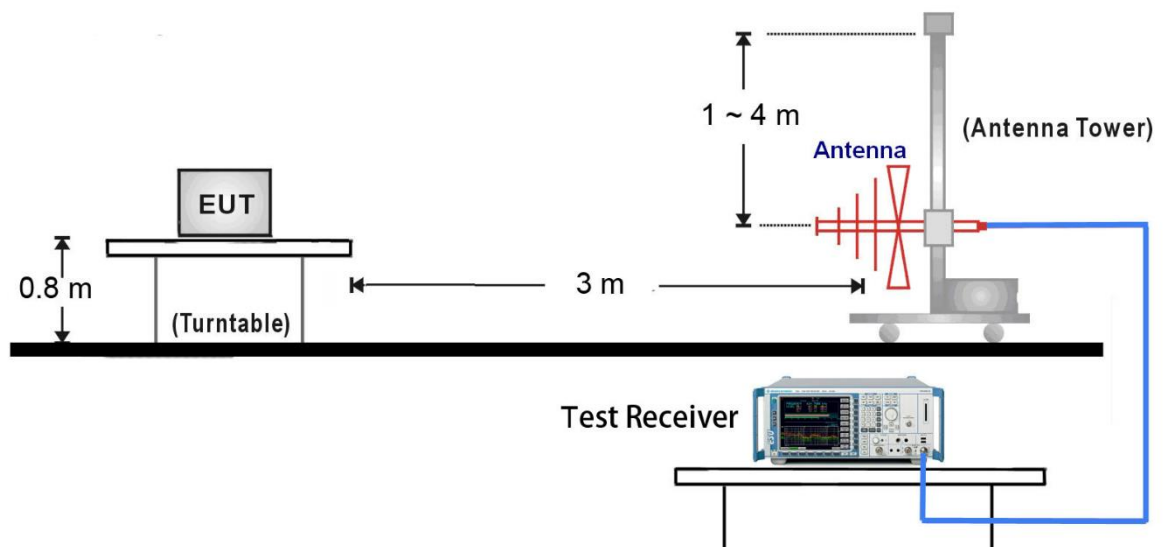

### 1GHz ~ 18GHz Test Setup:

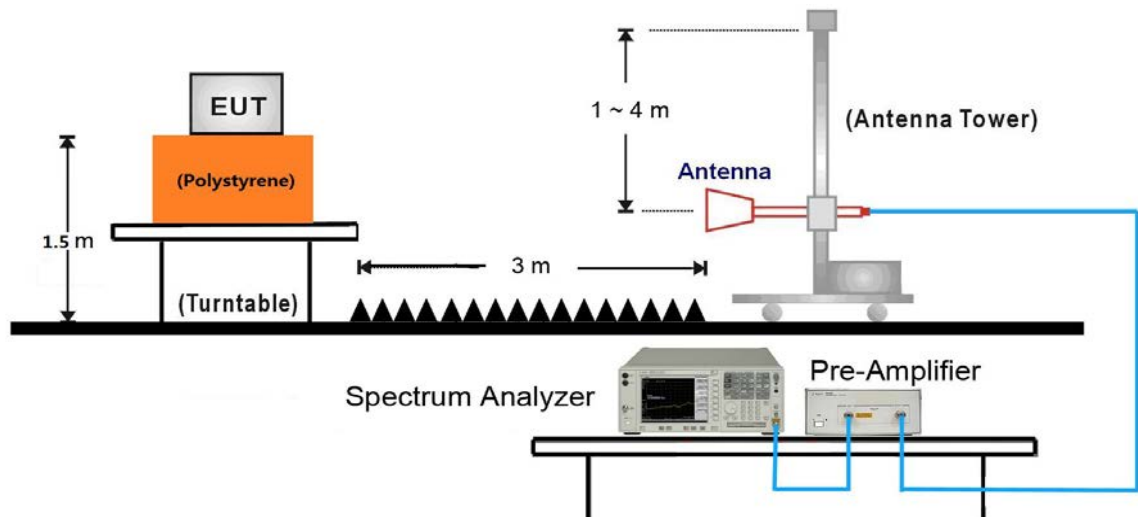


### 18GHz ~25GHz Test Setup:

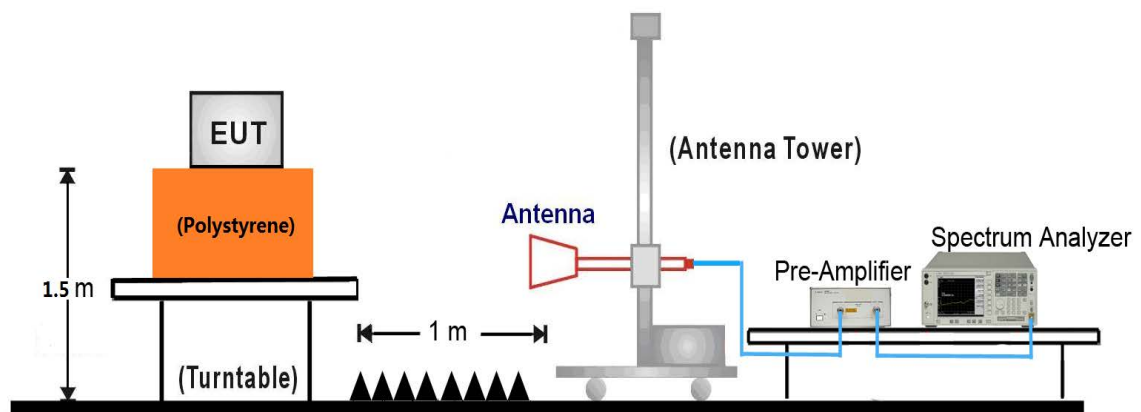

### 7.6.5. Test Result

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/5/31    |
| Factor    | VULB 9162 (30MHz~8GHz)    | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3                     | Test Voltage     | AC 120V/60Hz |

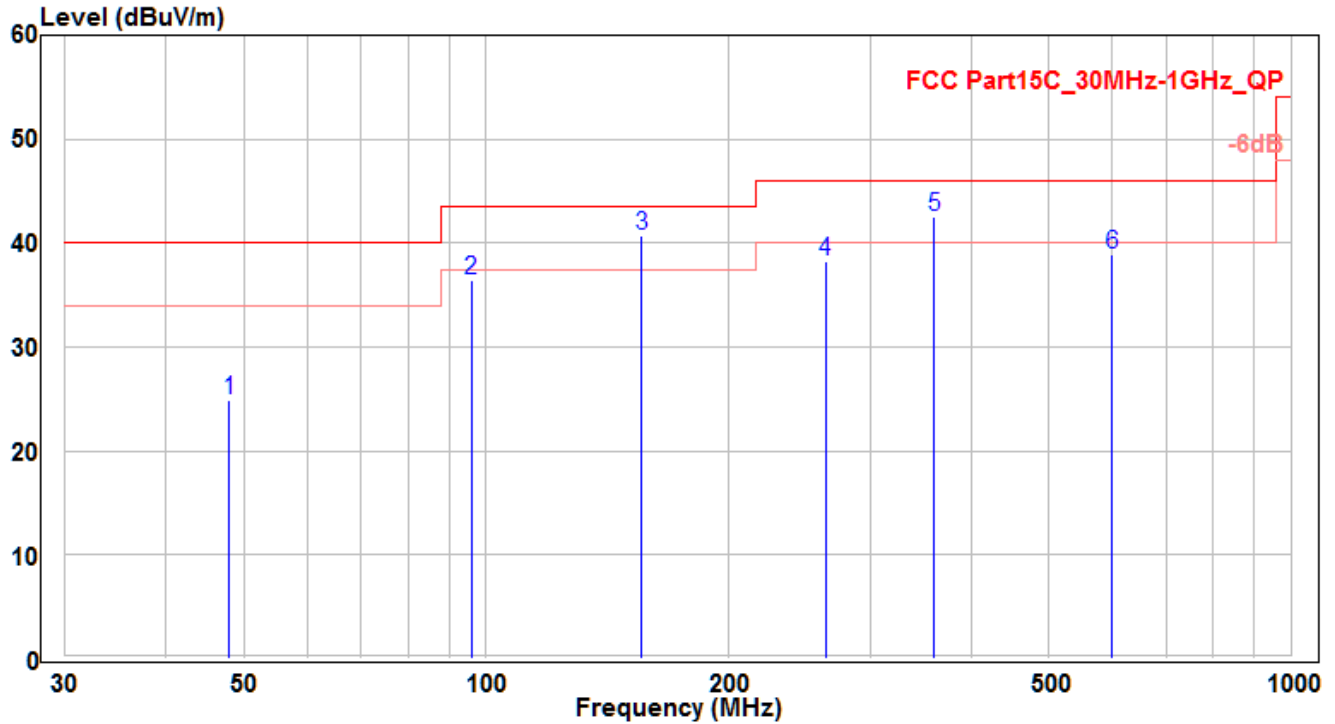


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 48.006          | 3.35           | 21.49    | 24.84                | -15.16      | 40             | 150         | 60          | QP                |
| 2  | 95.99           | 17.97          | 18.5     | 36.47                | -7.03       | 43.5           | 170         | 150         | QP                |
| 3  | * 156.009       | 24.71          | 16.08    | 40.79                | -2.71       | 43.5           | 115         | 200         | QP                |
| 4  | 263.982         | 17.69          | 20.62    | 38.31                | -7.69       | 46             | 160         | 360         | QP                |
| 5  | 359.982         | 18.8           | 23.66    | 42.46                | -3.54       | 46             | 190         | 350         | QP                |
| 6  | 599.996         | 11.18          | 27.7     | 38.88                | -7.12       | 46             | 185         | 400         | QP                |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/5/31    |
| Factor    | VULB 9162 (30MHz~8GHz)    | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3                     | Test Voltage     | AC 120V/60Hz |

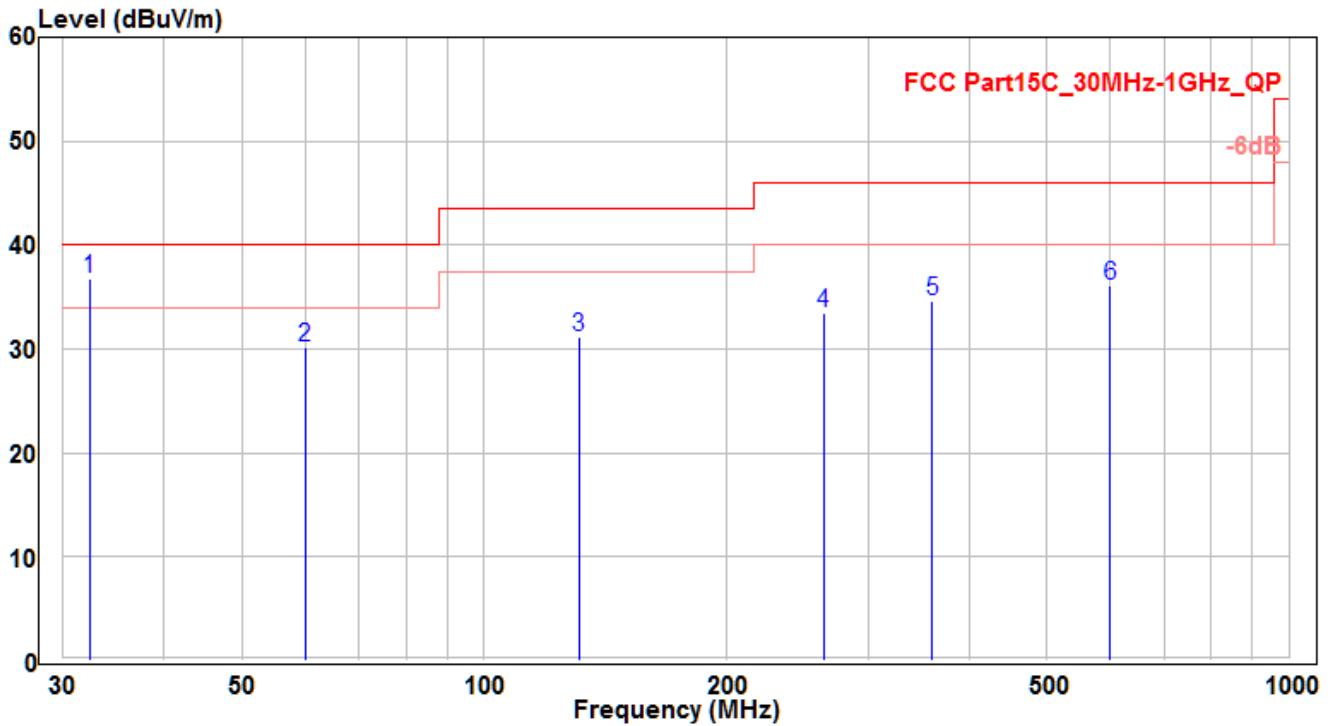


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 32.334          | 18.4           | 18.32    | 36.72                | -3.28       | 40             | 165         | 360         | QP                |
| 2  |   | 59.979          | 10.03          | 20.11    | 30.14                | -9.86       | 40             | 100         | 400         | QP                |
| 3  |   | 131.274         | 14.82          | 16.29    | 31.11                | -12.39      | 43.5           | 155         | 260         | QP                |
| 4  |   | 264.013         | 12.87          | 20.62    | 33.49                | -12.51      | 46             | 175         | 100         | QP                |
| 5  |   | 359.982         | 11.13          | 23.46    | 34.59                | -11.41      | 46             | 145         | -40         | QP                |
| 6  |   | 599.996         | 8.5            | 27.6     | 36.1                 | -9.9        | 46             | 120         | 240         | QP                |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/5/31    |
| Factor    | VULB 9162 (30MHz~8GHz)    | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7                     | Test Voltage     | AC 120V/60Hz |

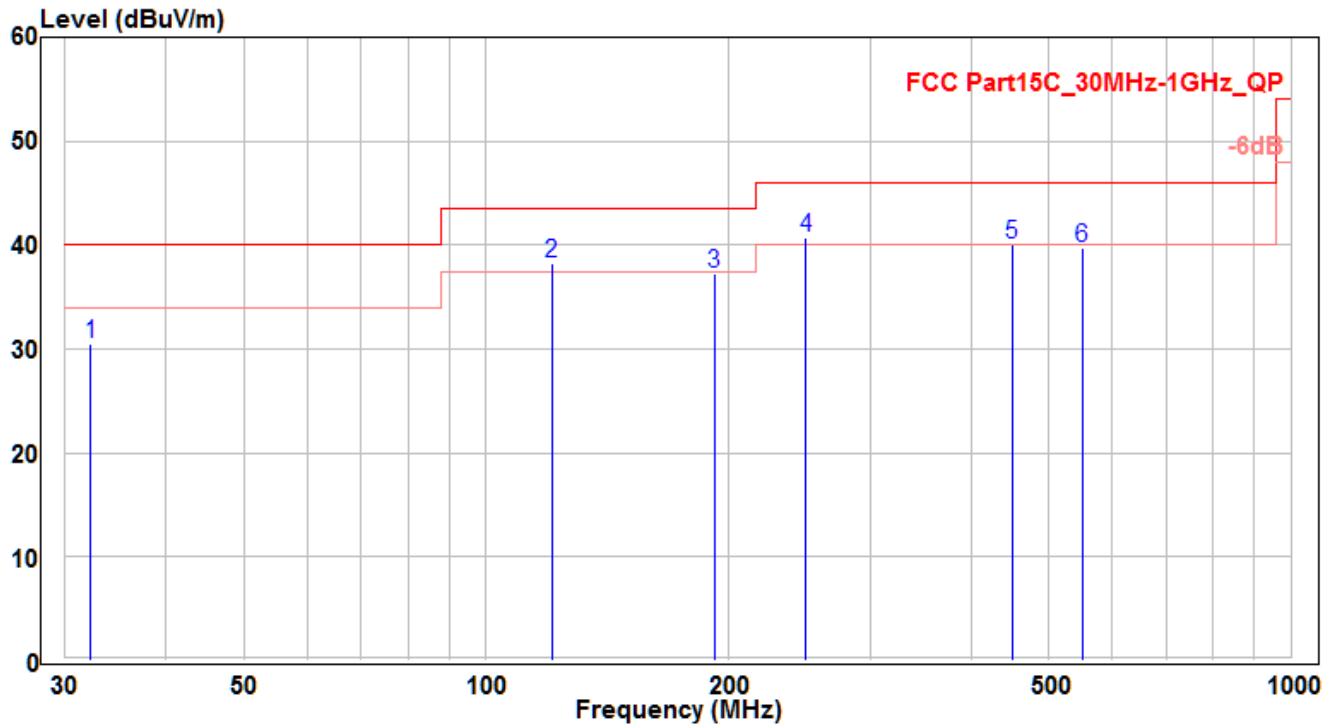


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 32.243          | 12.28          | 18.3     | 30.58                | -9.42       | 40             | 150         | 400         | QP                |
| 2  | 120.725         | 20.4           | 17.82    | 38.22                | -5.28       | 43.5           | 100         | 400         | QP                |
| 3  | 191.99          | 18.48          | 18.72    | 37.2                 | -6.3        | 43.5           | 115         | -40         | QP                |
| 4  | * 249.978       | 20.44          | 20.34    | 40.78                | -5.22       | 46             | 180         | 360         | QP                |
| 5  | 450.01          | 15.5           | 24.49    | 39.99                | -6.01       | 46             | 125         | 125         | QP                |
| 6  | 550.011         | 13.18          | 26.51    | 39.69                | -6.31       | 46             | 175         | 140         | QP                |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/5/31    |
| Factor    | VULB 9162 (30MHz~8GHz)    | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7                     | Test Voltage     | AC 120V/60Hz |

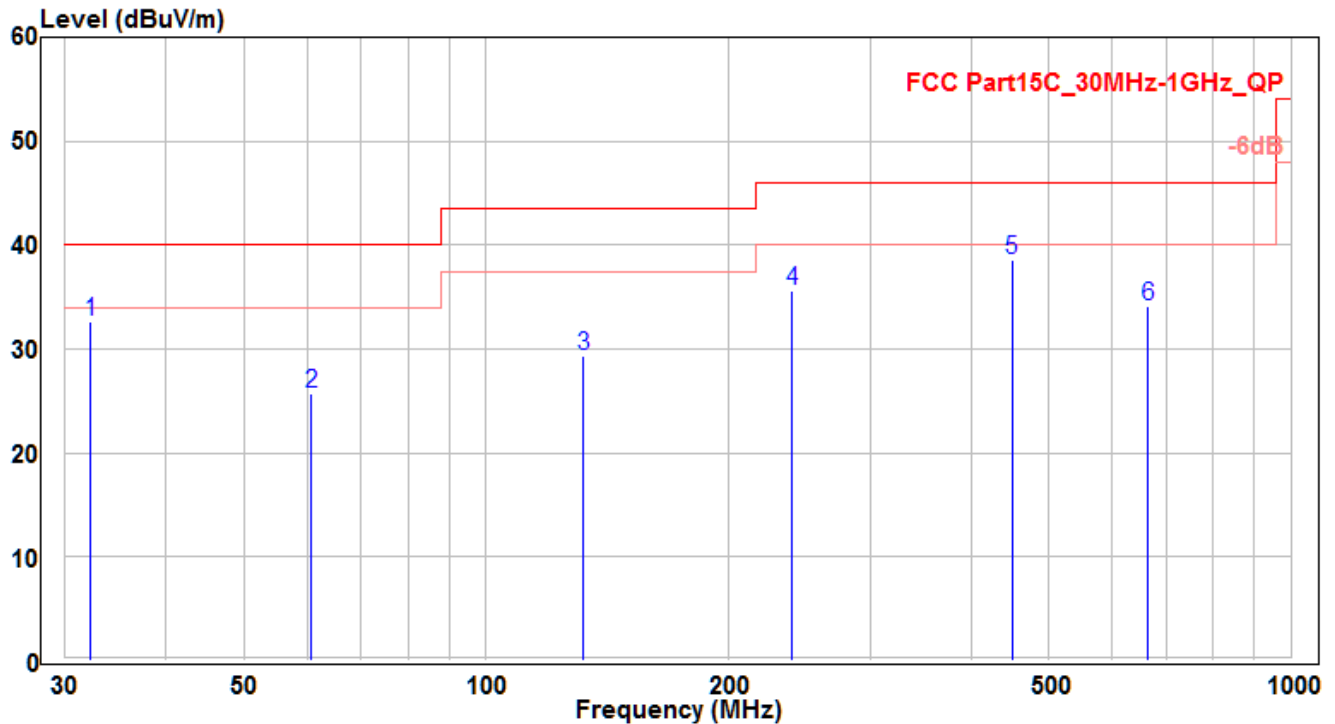


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 32.243          | 14.3           | 18.3     | 32.6                 | -7.4        | 40             | 170         | 400         | QP                |
| 2  |   | 60.737          | 5.98           | 19.78    | 25.76                | -14.24      | 40             | 100         | 400         | QP                |
| 3  |   | 132.062         | 13.19          | 16.23    | 29.42                | -14.08      | 43.5           | 150         | 360         | QP                |
| 4  |   | 240.005         | 15.69          | 19.9     | 35.59                | -10.41      | 46             | 120         | 250         | QP                |
| 5  | * | 450.01          | 14.14          | 24.49    | 38.63                | -7.37       | 46             | 190         | 280         | QP                |
| 6  |   | 665.289         | 5.5            | 28.65    | 34.15                | -11.85      | 46             | 160         | 250         | QP                |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1 -CH01_Ant 0         | Test Voltage     | AC 120V/60Hz |

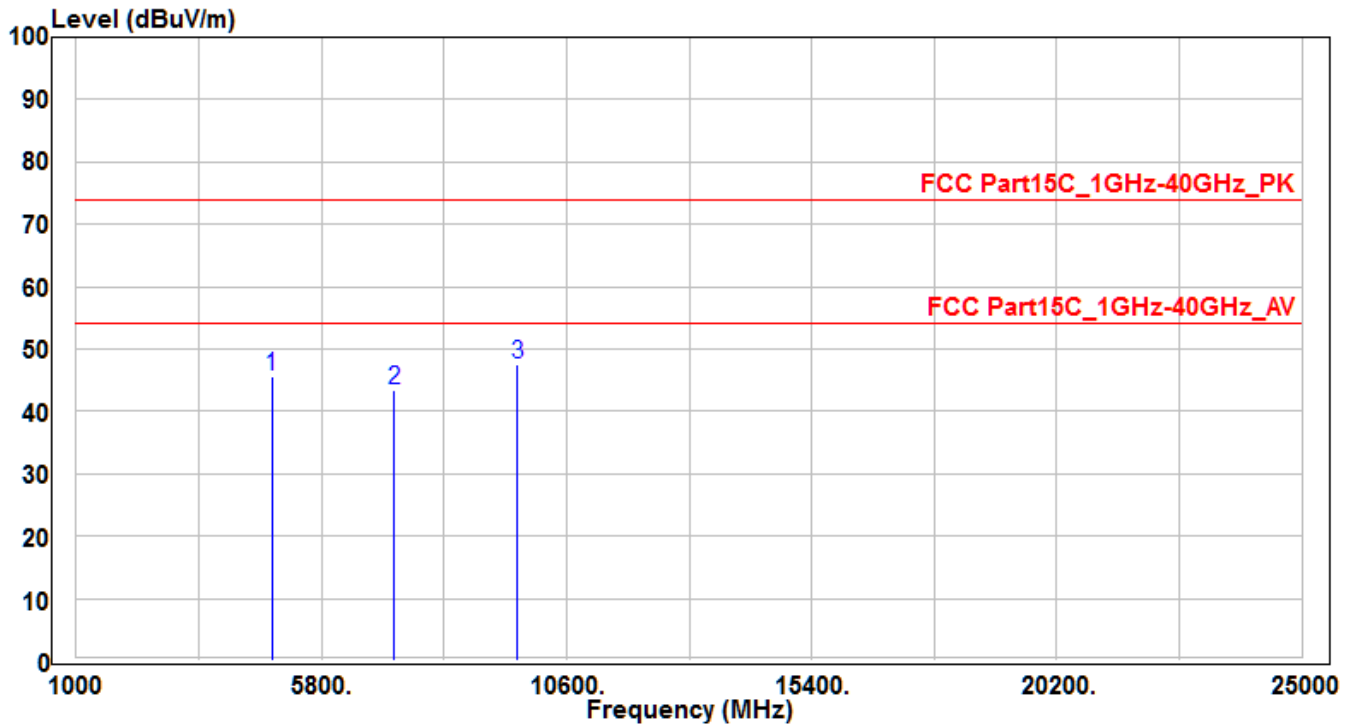


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 42.31          | 3.36     | 45.67                | -28.33      | 74             | 100         | 400         | Peak              |
| 2  | 7236            | 31.4           | 11.97    | 43.37                | -30.63      | 74             | 100         | 400         | Peak              |
| 3  | *               | 32.54          | 14.96    | 47.5                 | -26.5       | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1 -CH01_Ant 0         | Test Voltage     | AC 120V/60Hz |

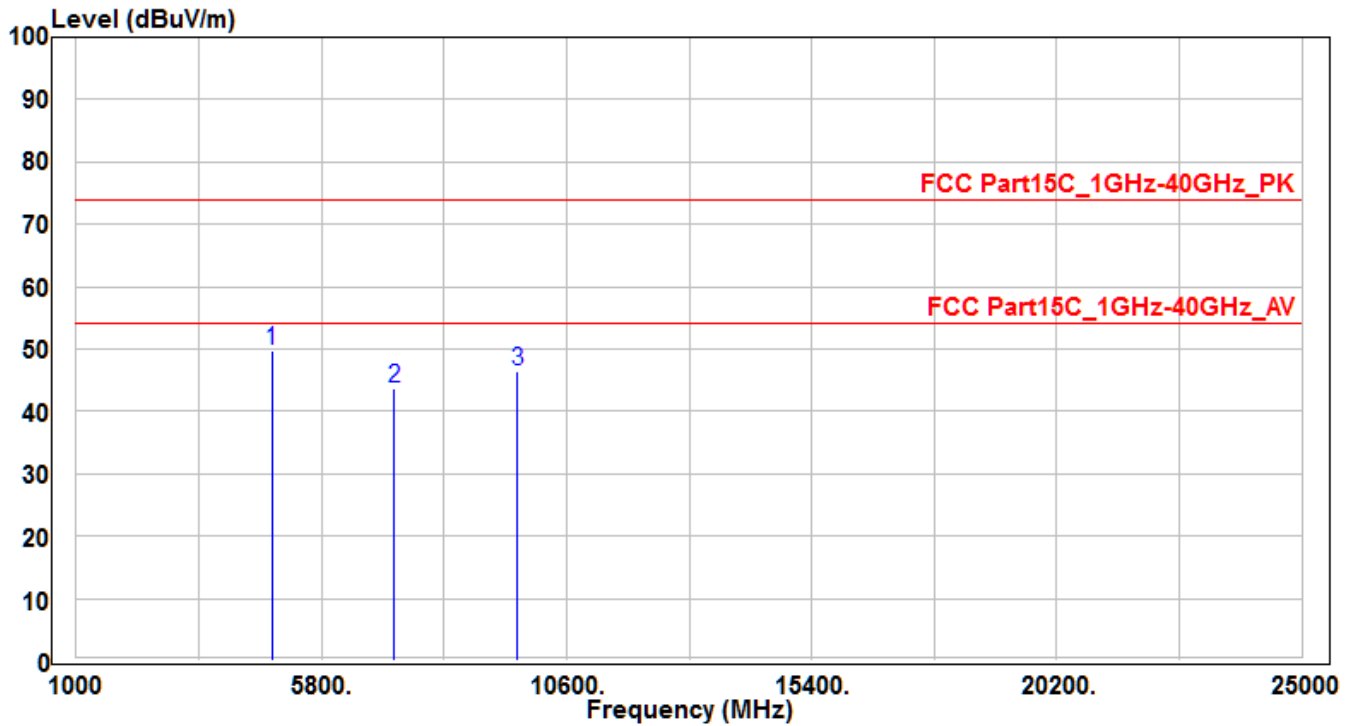


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4824            | 46.36          | 3.36     | 49.72                | -24.28      | 74             | 100         | 400         | Peak              |
| 2  |   | 7236            | 31.74          | 11.97    | 43.71                | -30.29      | 74             | 100         | 400         | Peak              |
| 3  |   | 9648            | 31.47          | 14.96    | 46.43                | -27.57      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1 -CH06_Ant 0         | Test Voltage     | AC 120V/60Hz |

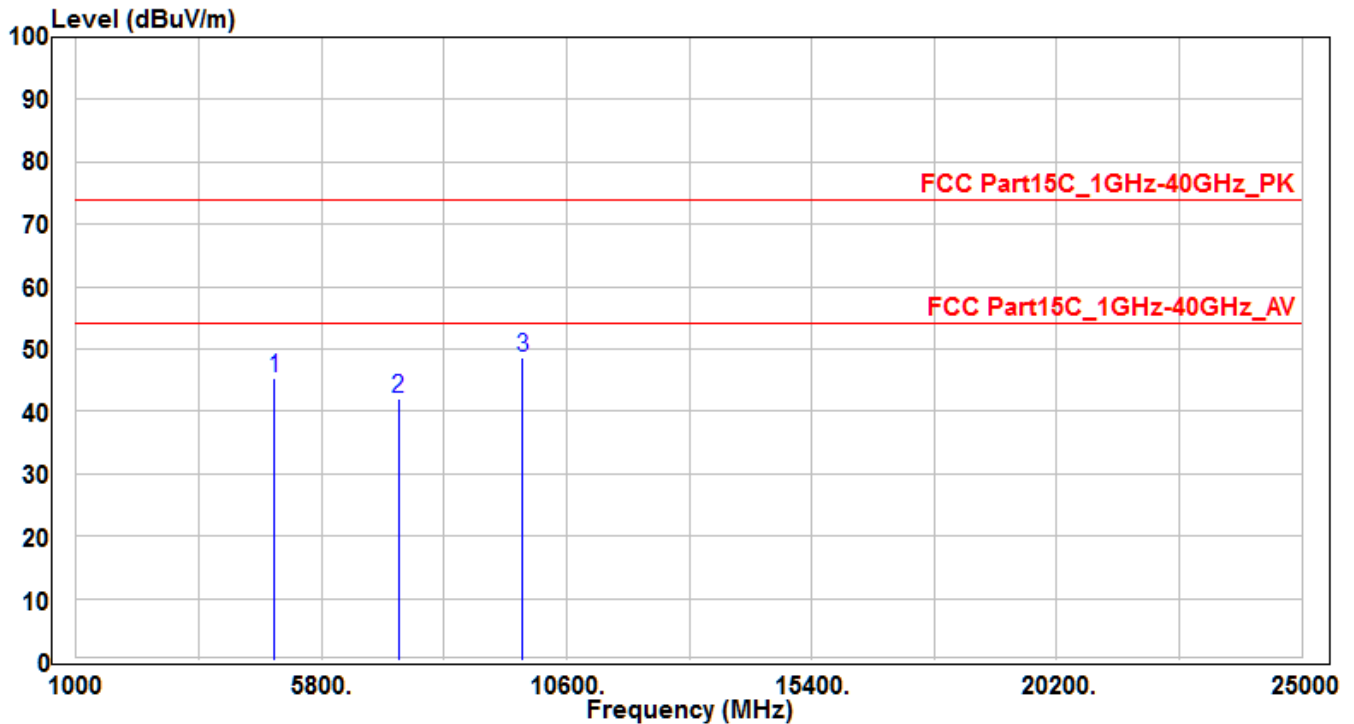


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874            | 41.87          | 3.47     | 45.34                | -28.66      | 74             | 100         | 400         | Peak              |
| 2  | 7311            | 29.81          | 12.18    | 41.99                | -32.01      | 74             | 100         | 400         | Peak              |
| 3  | *               | 9748           | 33.45    | 15.19                | 48.64       | -25.36         | 74          | 100         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1 -CH06_Ant 0         | Test Voltage     | AC 120V/60Hz |

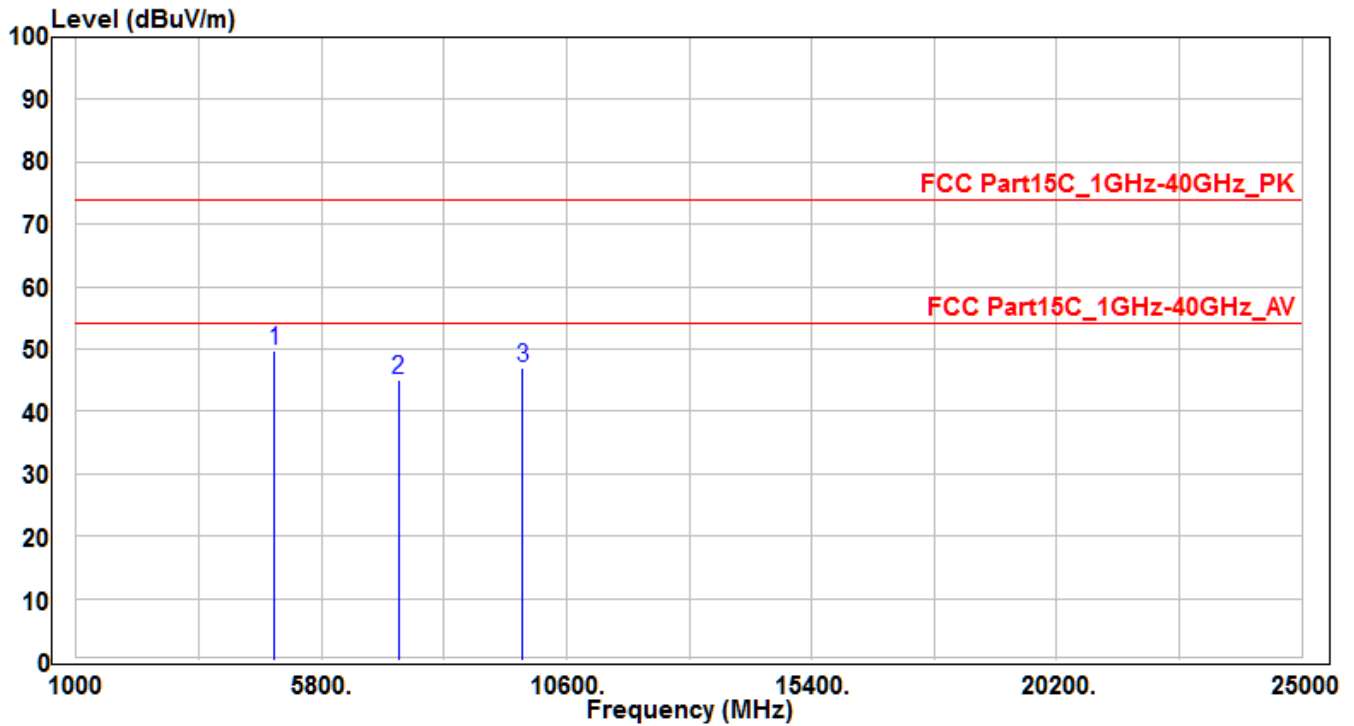


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4874            | 46.21          | 3.47     | 49.68                | -24.32      | 74             | 100         | 400         | Peak              |
| 2  |   | 7311            | 32.94          | 12.18    | 45.12                | -28.88      | 74             | 100         | 400         | Peak              |
| 3  |   | 9748            | 31.82          | 15.19    | 47.01                | -26.99      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1 -CH11_Ant 0         | Test Voltage     | AC 120V/60Hz |

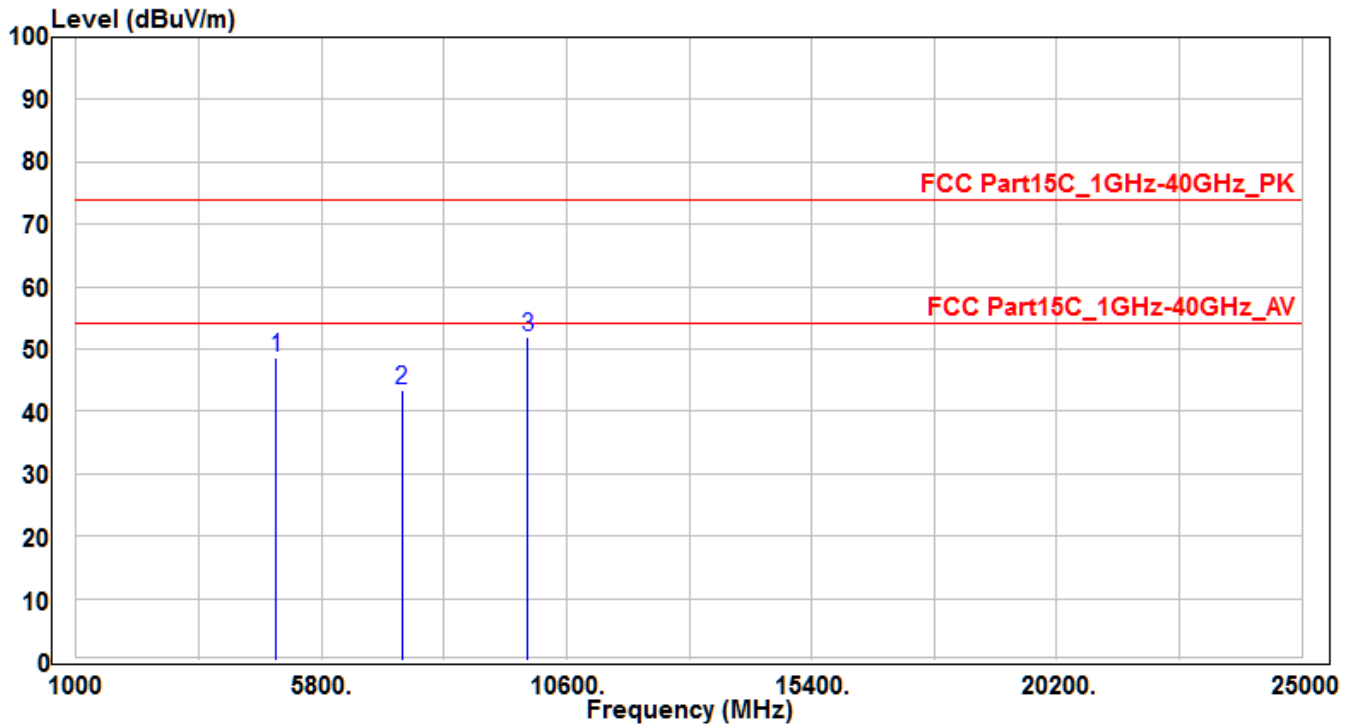


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 45.06          | 3.58     | 48.64                | -25.36      | 74             | 100         | 400         | Peak              |
| 2  | 7386            | 31.02          | 12.39    | 43.41                | -30.59      | 74             | 100         | 400         | Peak              |
| 3  | *               | 9848           | 36.44    | 51.86                | -22.14      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1 -CH11_Ant 0         | Test Voltage     | AC 120V/60Hz |

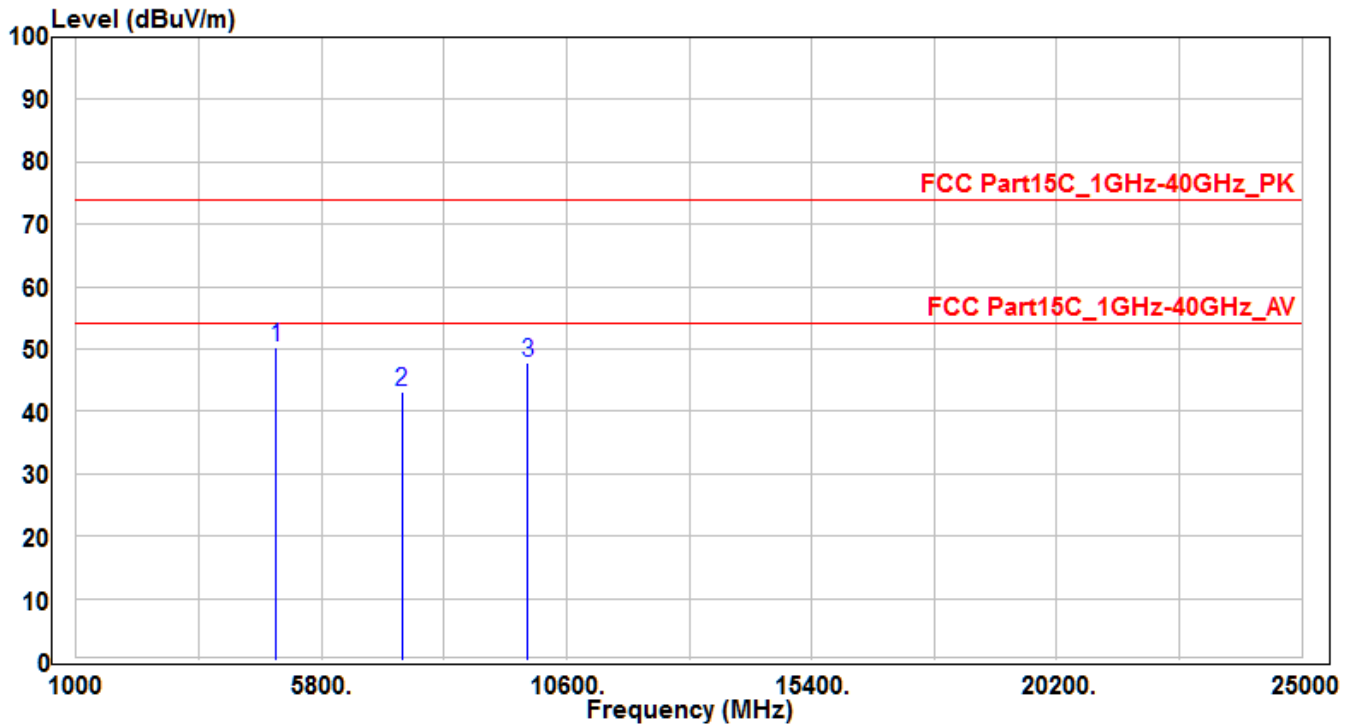


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4924            | 46.61          | 3.58     | 50.19                | -23.81      | 74             | 100         | 400         | Peak              |
| 2  |   | 7386            | 30.79          | 12.39    | 43.18                | -30.82      | 74             | 100         | 400         | Peak              |
| 3  |   | 9848            | 32.43          | 15.42    | 47.85                | -26.15      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

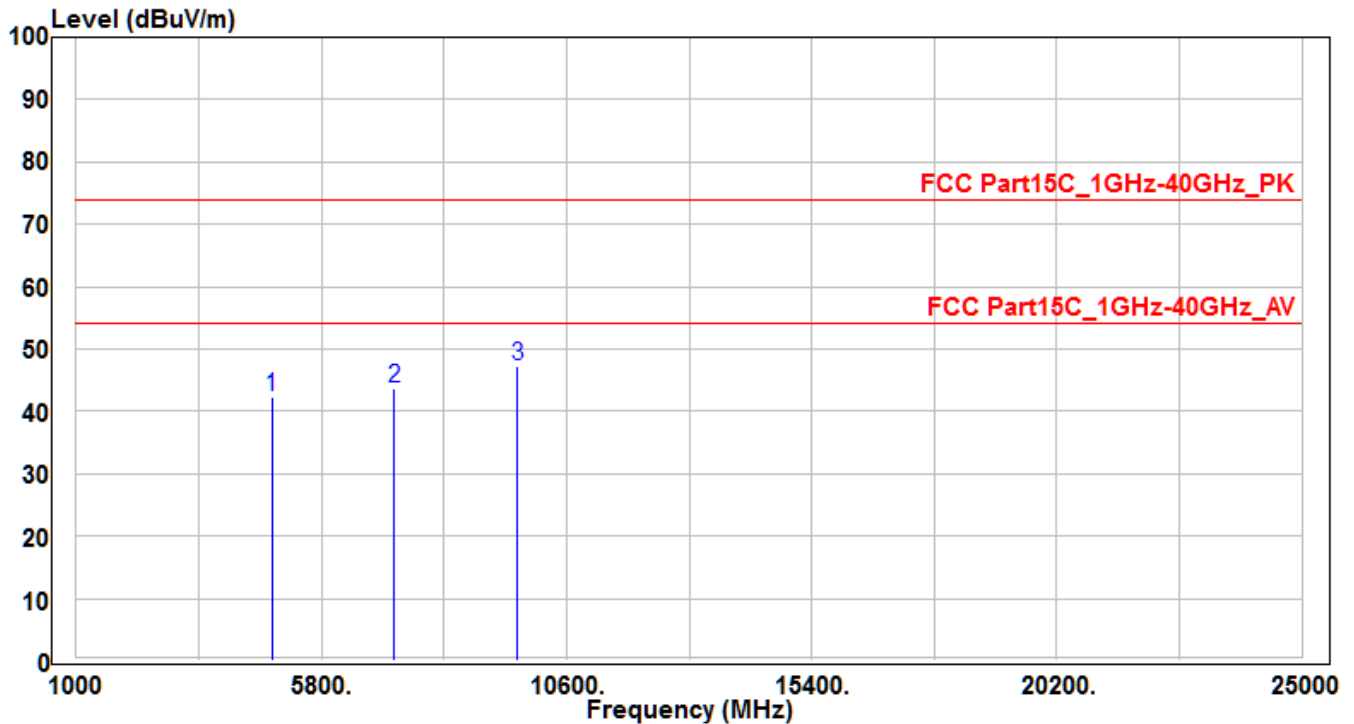


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 38.82          | 3.36     | 42.18                | -31.82      | 74             | 100         | 400         | Peak              |
| 2  | 7236            | 31.7           | 11.97    | 43.67                | -30.33      | 74             | 100         | 400         | Peak              |
| 3  | *               | 32.18          | 14.96    | 47.14                | -26.86      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

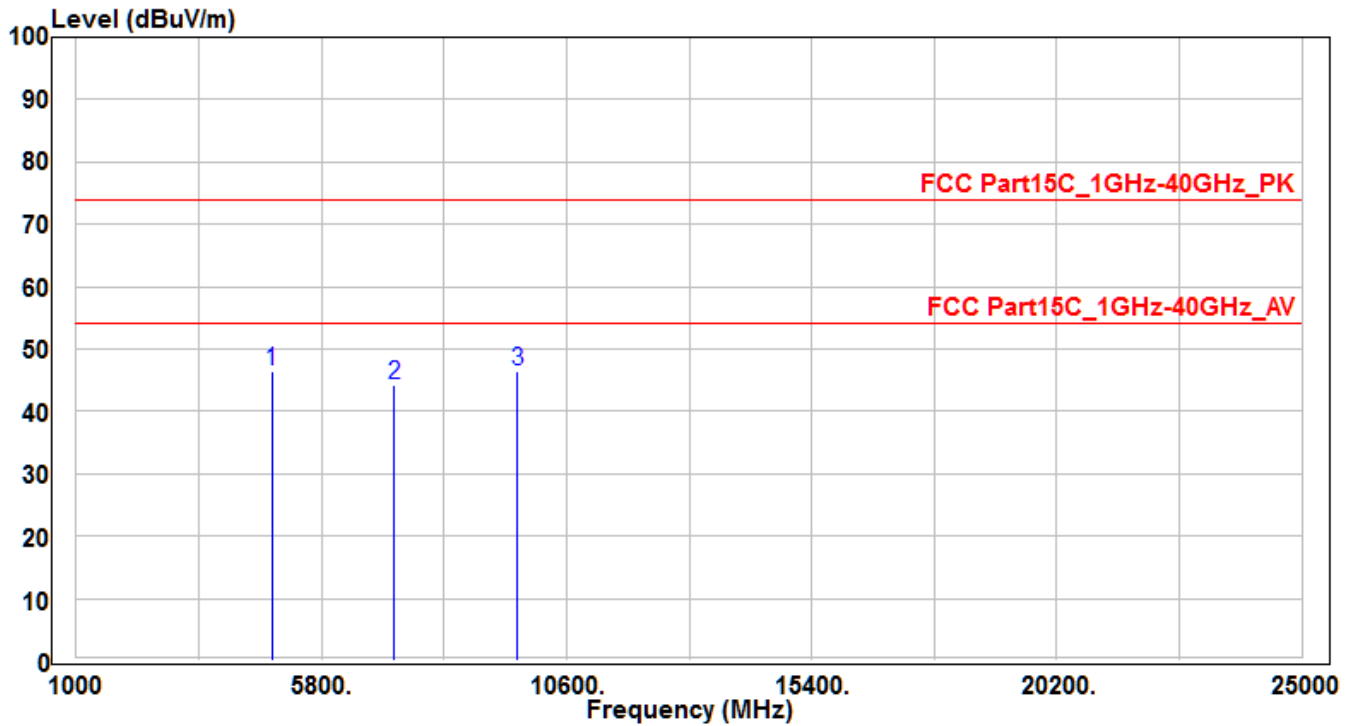


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4824            | 43.16          | 3.36     | 46.52                | -27.48      | 74             | 100         | 400         | Peak              |
| 2  |   | 7236            | 32.16          | 11.97    | 44.13                | -29.87      | 74             | 100         | 400         | Peak              |
| 3  |   | 9648            | 31.45          | 14.96    | 46.41                | -27.59      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH06_Ant 0          | Test Voltage     | AC 120V/60Hz |

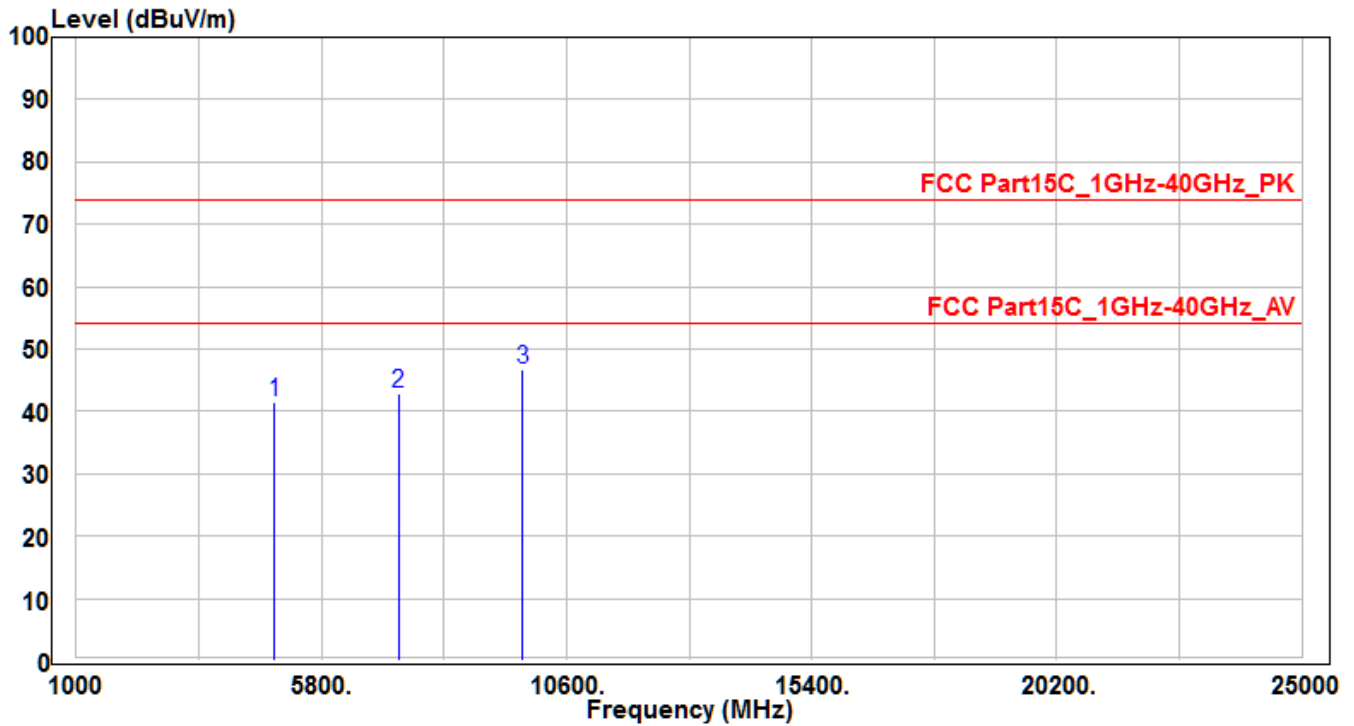


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 38.08             | 3.47        | 41.55                   | -32.45         | 74                | 100            | 400            | Peak                 |
| 2  |   | 7311               | 30.73             | 12.18       | 42.91                   | -31.09         | 74                | 100            | 400            | Peak                 |
| 3  | * | 9748               | 31.66             | 15.19       | 46.85                   | -27.15         | 74                | 100            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH06_Ant 0          | Test Voltage     | AC 120V/60Hz |

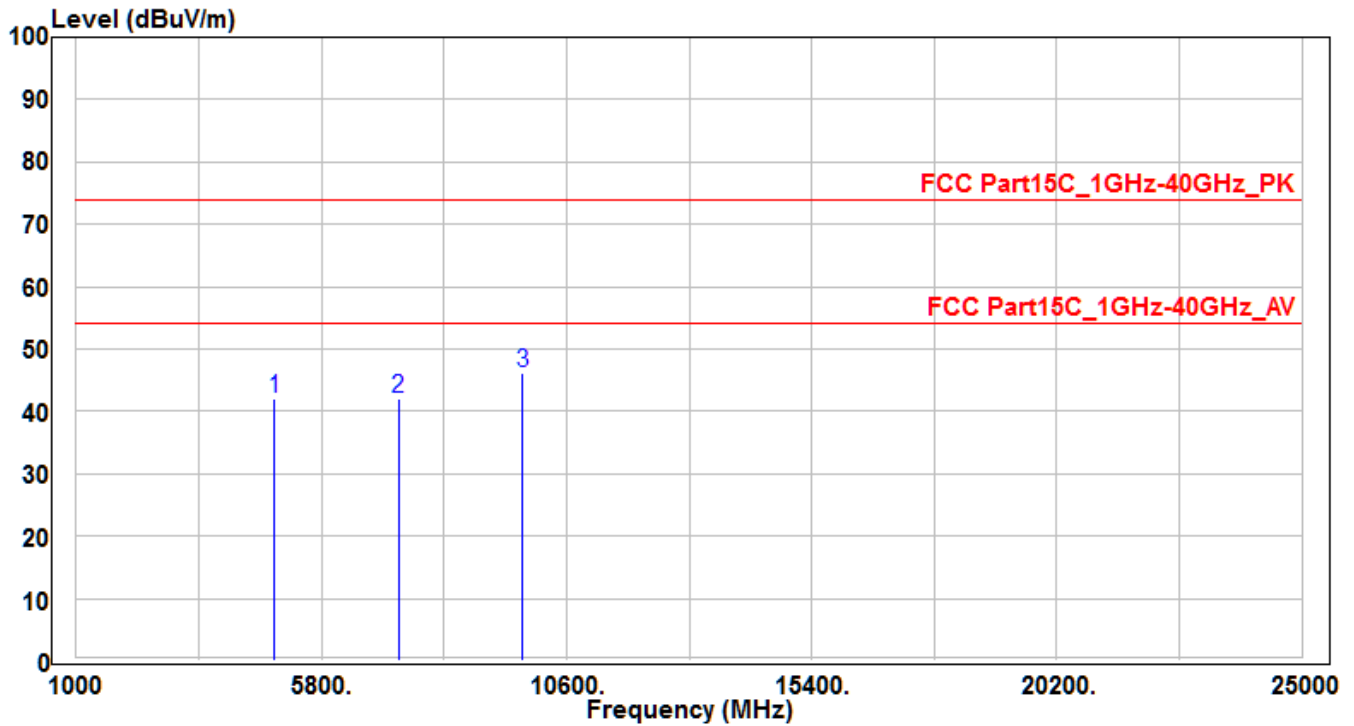


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 38.61             | 3.47        | 42.08                   | -31.92         | 74                | 100            | 400            | Peak                 |
| 2  |   | 7311               | 29.99             | 12.18       | 42.17                   | -31.83         | 74                | 100            | 400            | Peak                 |
| 3  | * | 9748               | 30.91             | 15.19       | 46.1                    | -27.9          | 74                | 100            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

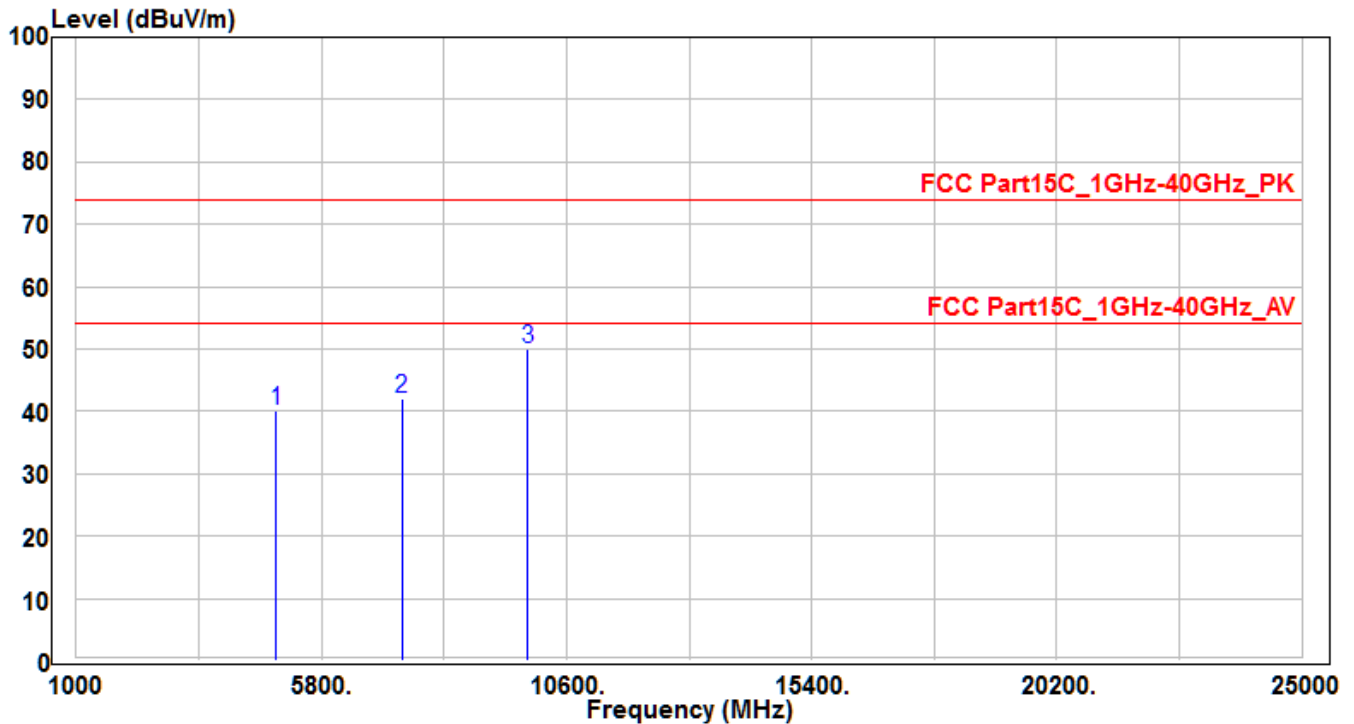


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4924               | 36.49             | 3.58        | 40.07                   | -33.93         | 74                | 100            | 400            | Peak                 |
| 2  |   | 7386               | 29.76             | 12.39       | 42.15                   | -31.85         | 74                | 100            | 400            | Peak                 |
| 3  | * | 9848               | 34.59             | 15.42       | 50.01                   | -23.99         | 74                | 100            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

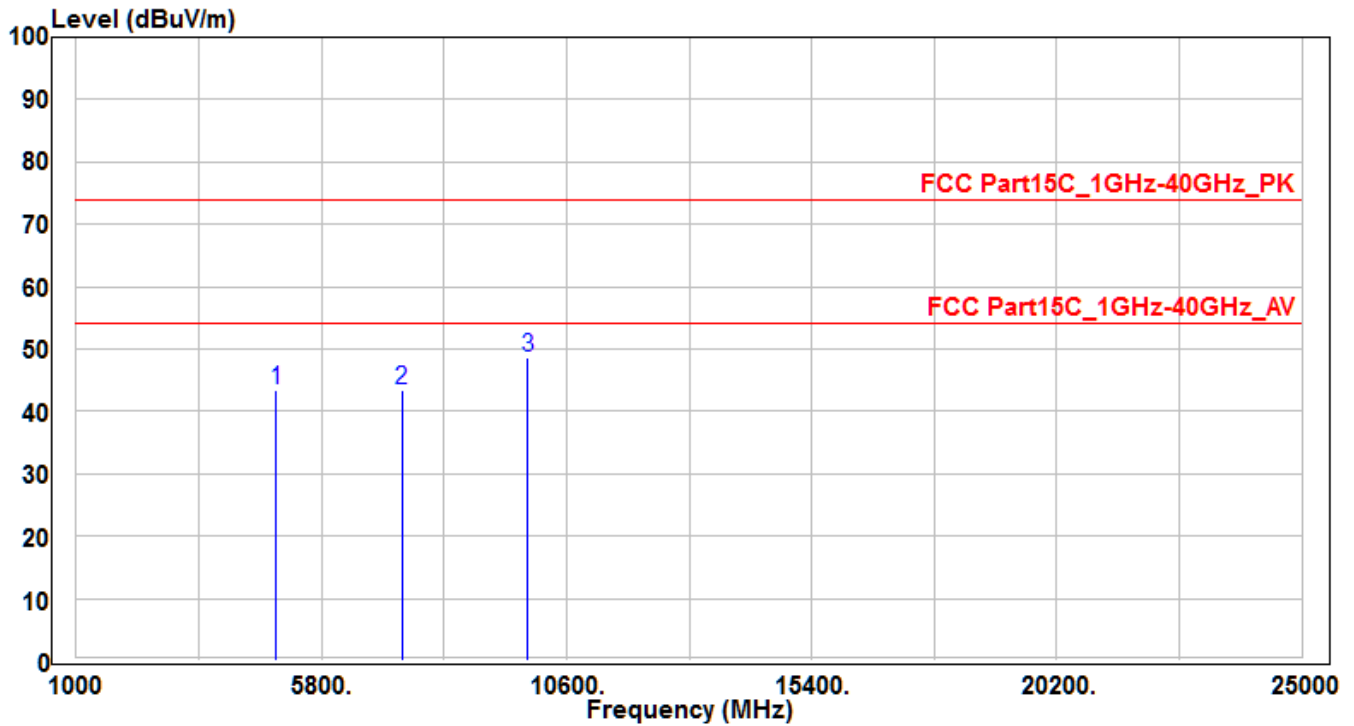


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 39.9           | 3.58     | 43.48                | -30.52      | 74             | 100         | 400         | Peak              |
| 2  | 7386            | 31.07          | 12.39    | 43.46                | -30.54      | 74             | 100         | 400         | Peak              |
| 3  | *               | 33.16          | 15.42    | 48.58                | -25.42      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

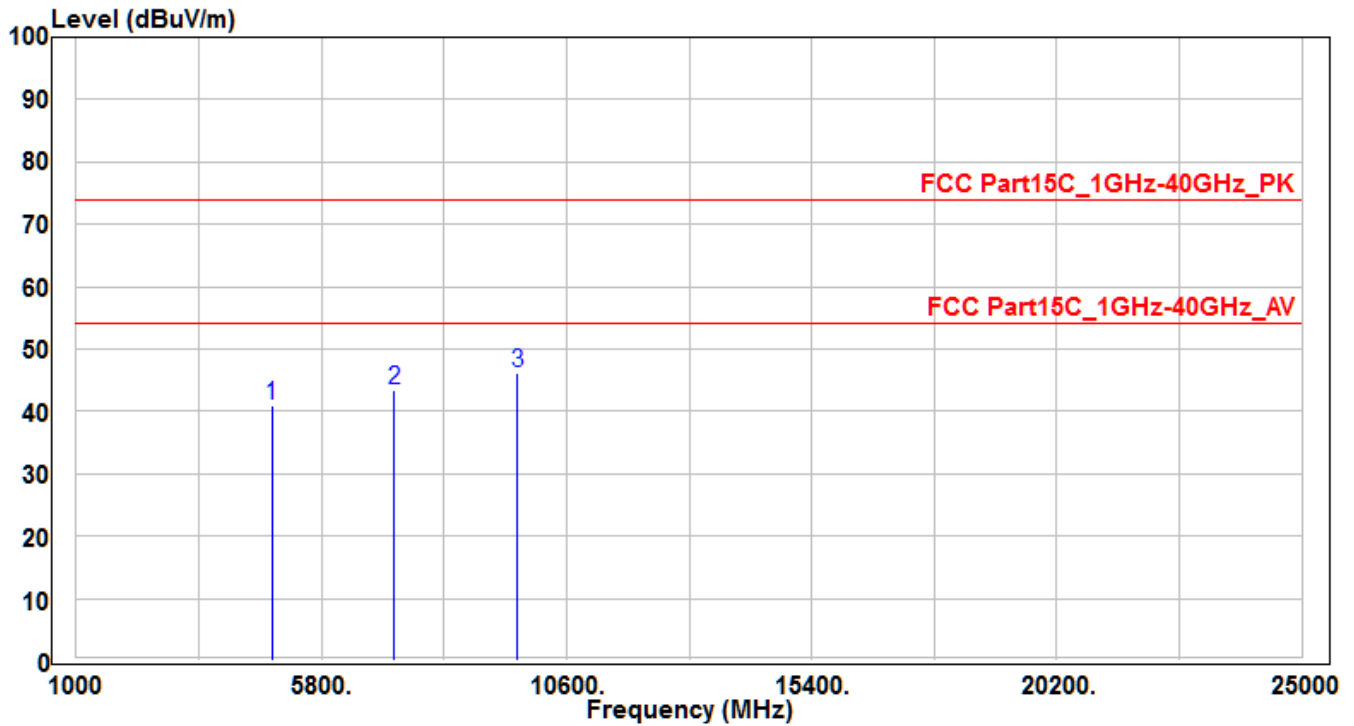


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 37.48          | 3.36     | 40.84                | -33.16      | 74             | 100         | 400         | Peak              |
| 2  | 7236            | 31.56          | 11.97    | 43.53                | -30.47      | 74             | 100         | 400         | Peak              |
| 3  | *               | 31.33          | 14.96    | 46.29                | -27.71      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

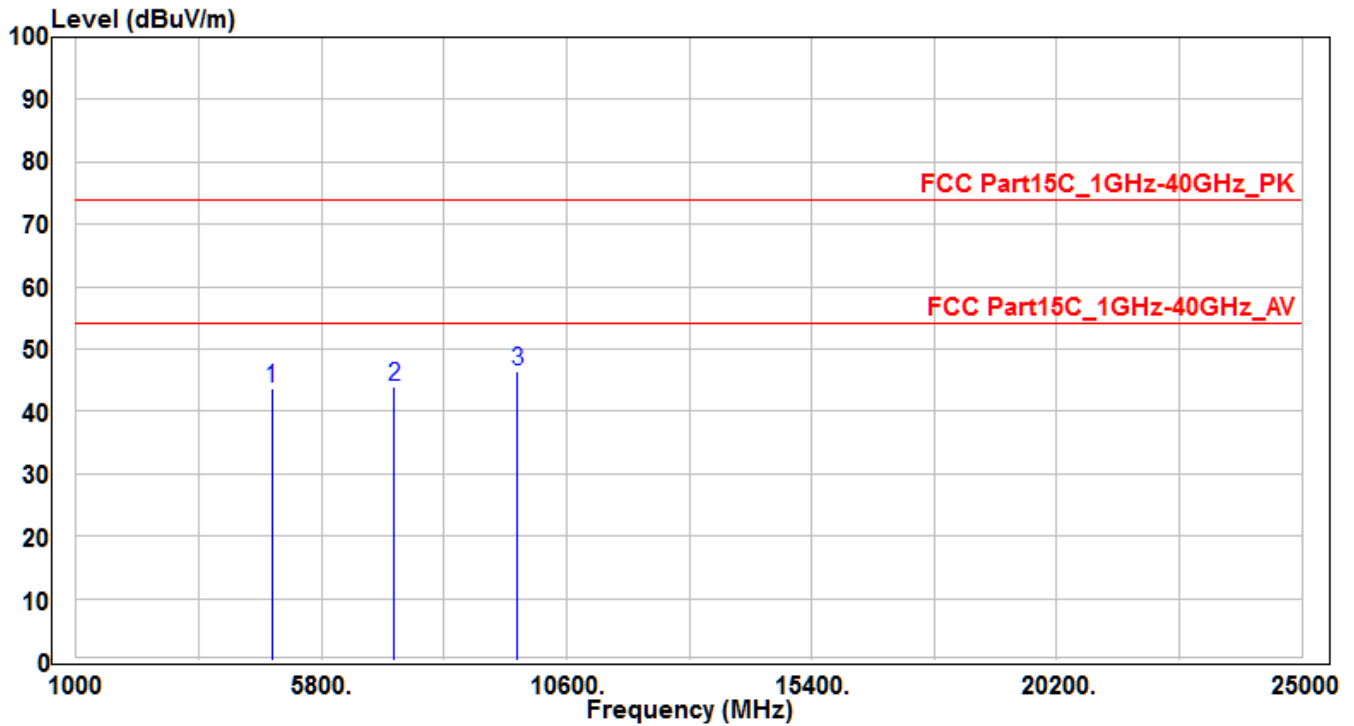


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 40.3           | 3.36     | 43.66                | -30.34      | 74             | 100         | 400         | Peak              |
| 2  | 7236            | 32.01          | 11.97    | 43.98                | -30.02      | 74             | 100         | 400         | Peak              |
| 3  | *               | 31.45          | 14.96    | 46.41                | -27.59      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

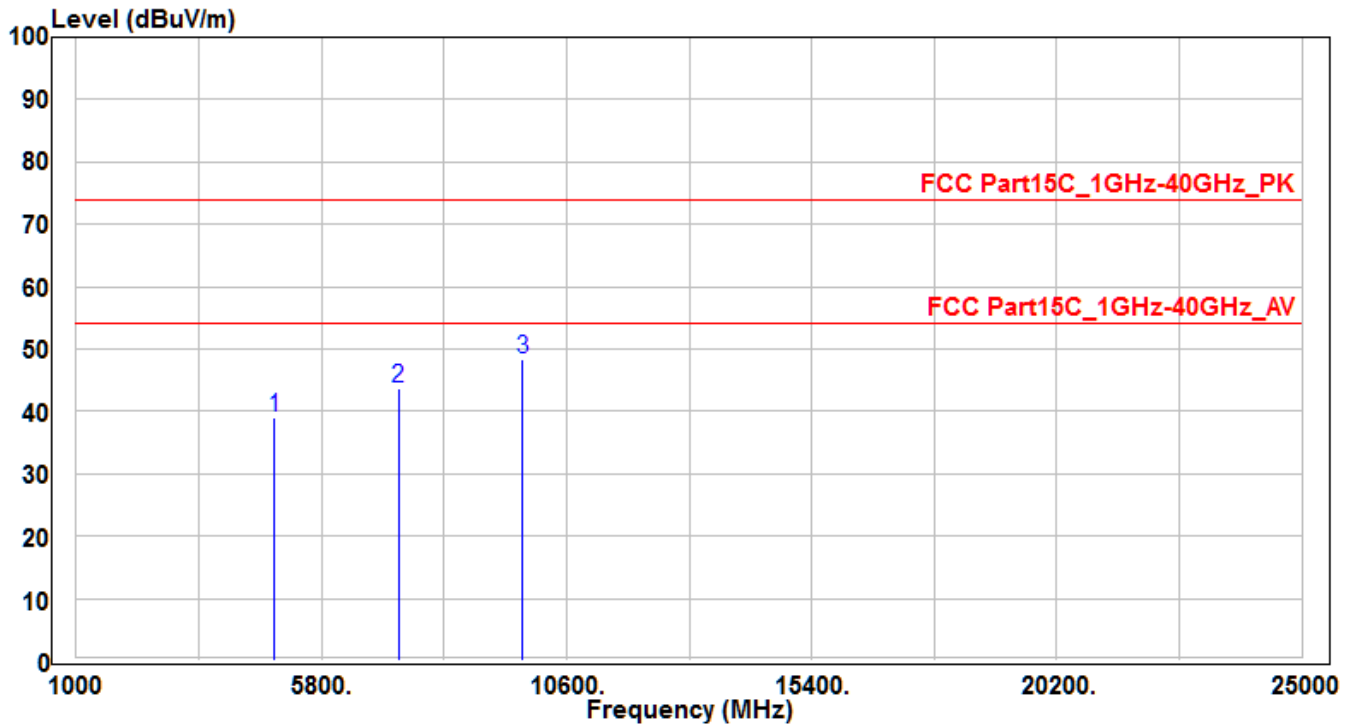


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874            | 35.66          | 3.47     | 39.13                | -34.87      | 74             | 100         | 400         | Peak              |
| 2  | 7311            | 31.4           | 12.18    | 43.58                | -30.42      | 74             | 100         | 400         | Peak              |
| 3  | *               | 33.14          | 15.19    | 48.33                | -25.67      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

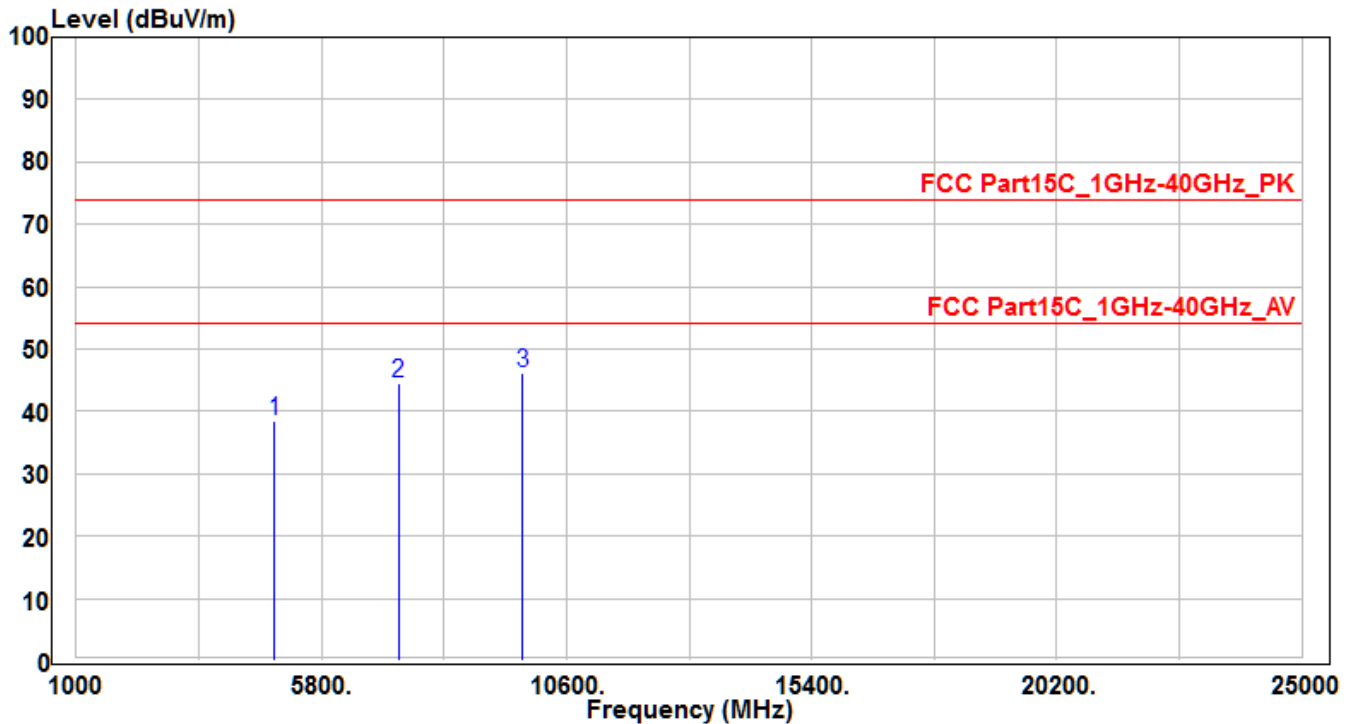


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874            | 34.98          | 3.47     | 38.45                | -35.55      | 74             | 100         | 400         | Peak              |
| 2  | 7311            | 32.36          | 12.18    | 44.54                | -29.46      | 74             | 100         | 400         | Peak              |
| 3  | *               | 31.02          | 15.19    | 46.21                | -27.79      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

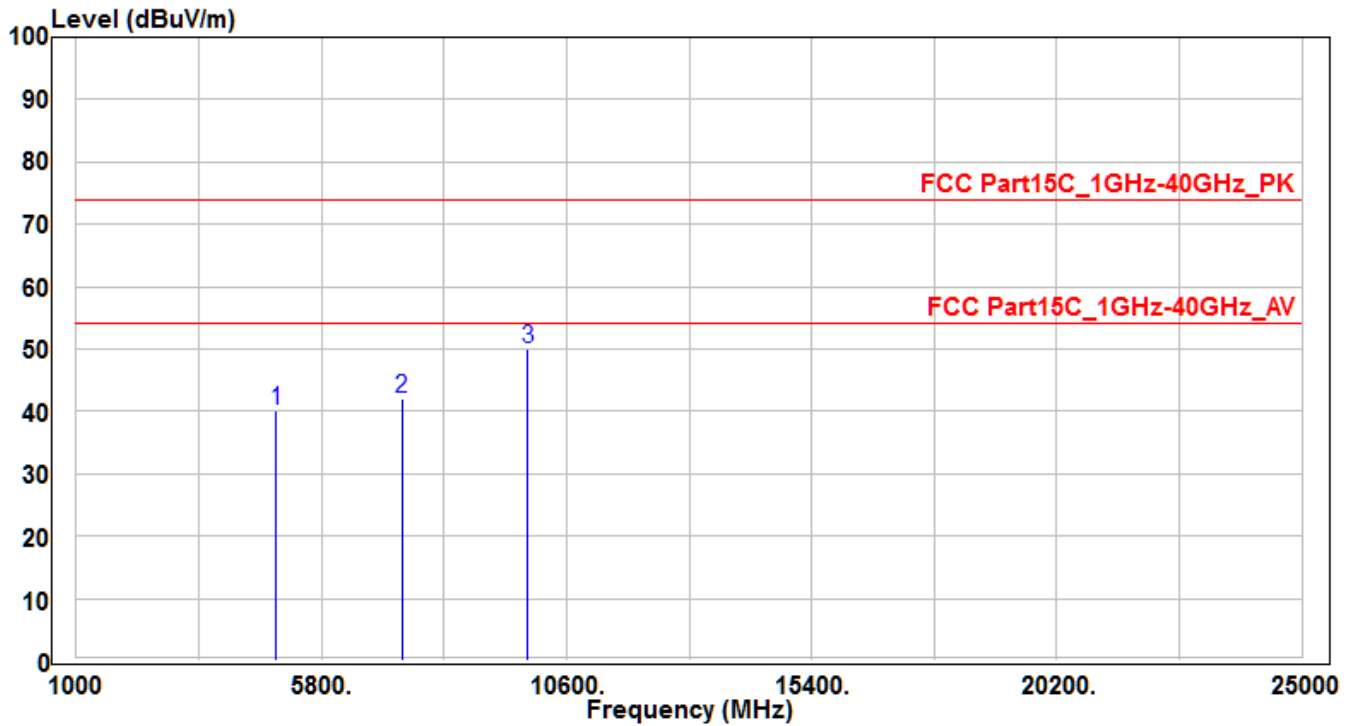


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 36.46          | 3.58     | 40.04                | -33.96      | 74             | 100         | 400         | Peak              |
| 2  | 7386            | 29.52          | 12.39    | 41.91                | -32.09      | 74             | 100         | 400         | Peak              |
| 3  | *               | 34.58          | 15.42    | 50                   | -24         | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

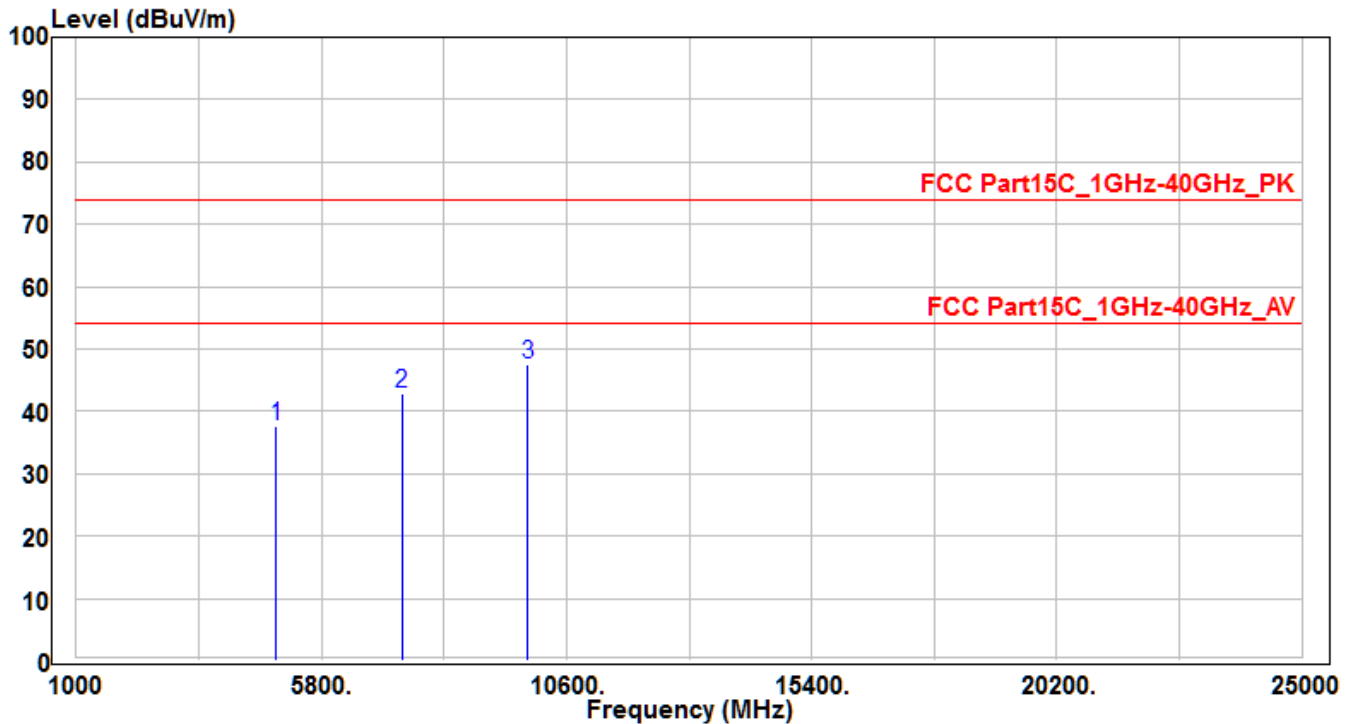


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 34.01          | 3.58     | 37.59                | -36.41      | 74             | 100         | 400         | Peak              |
| 2  | 7386            | 30.34          | 12.39    | 42.73                | -31.27      | 74             | 100         | 400         | Peak              |
| 3  | *               | 31.98          | 15.42    | 47.4                 | -26.6       | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

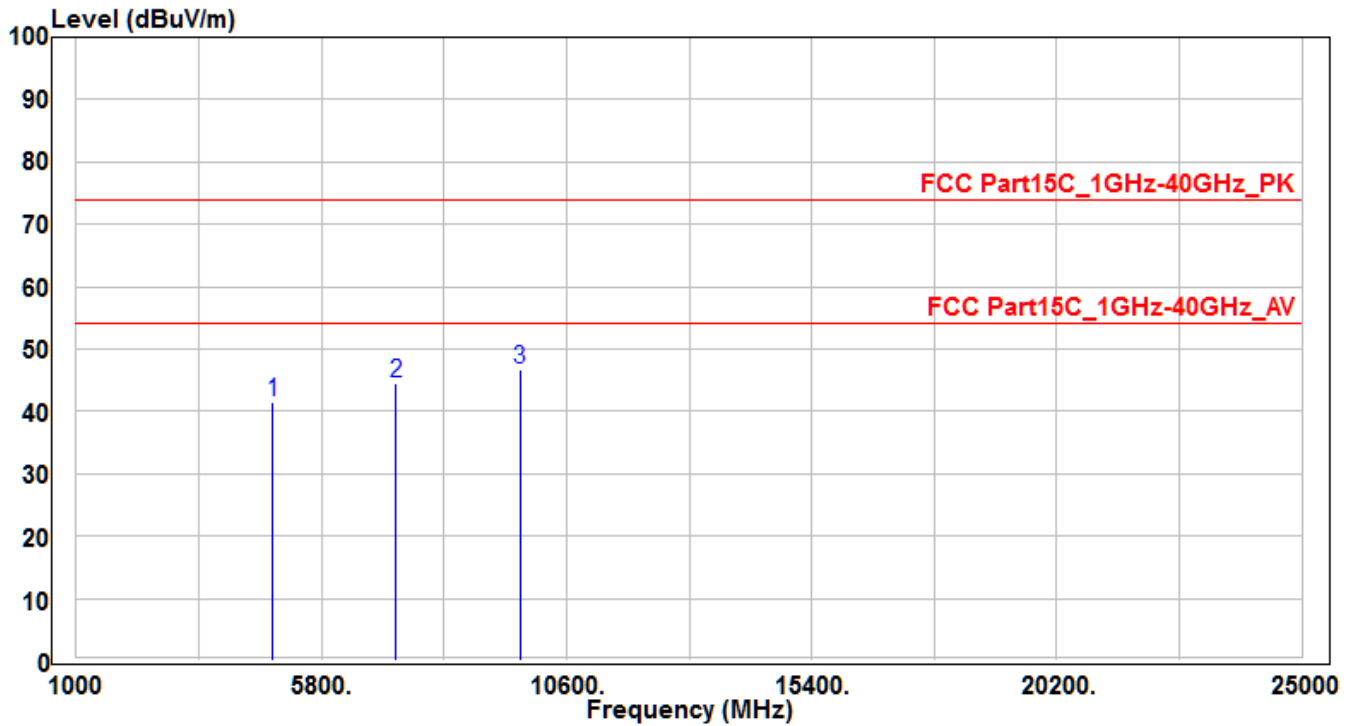


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4844               | 38.03             | 3.41        | 41.44                   | -32.56         | 74                | 100            | 400            | Peak                 |
| 2  |   | 7266               | 32.38             | 12.06       | 44.44                   | -29.56         | 74                | 100            | 400            | Peak                 |
| 3  | * | 9688               | 31.57             | 15.05       | 46.62                   | -27.38         | 74                | 100            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

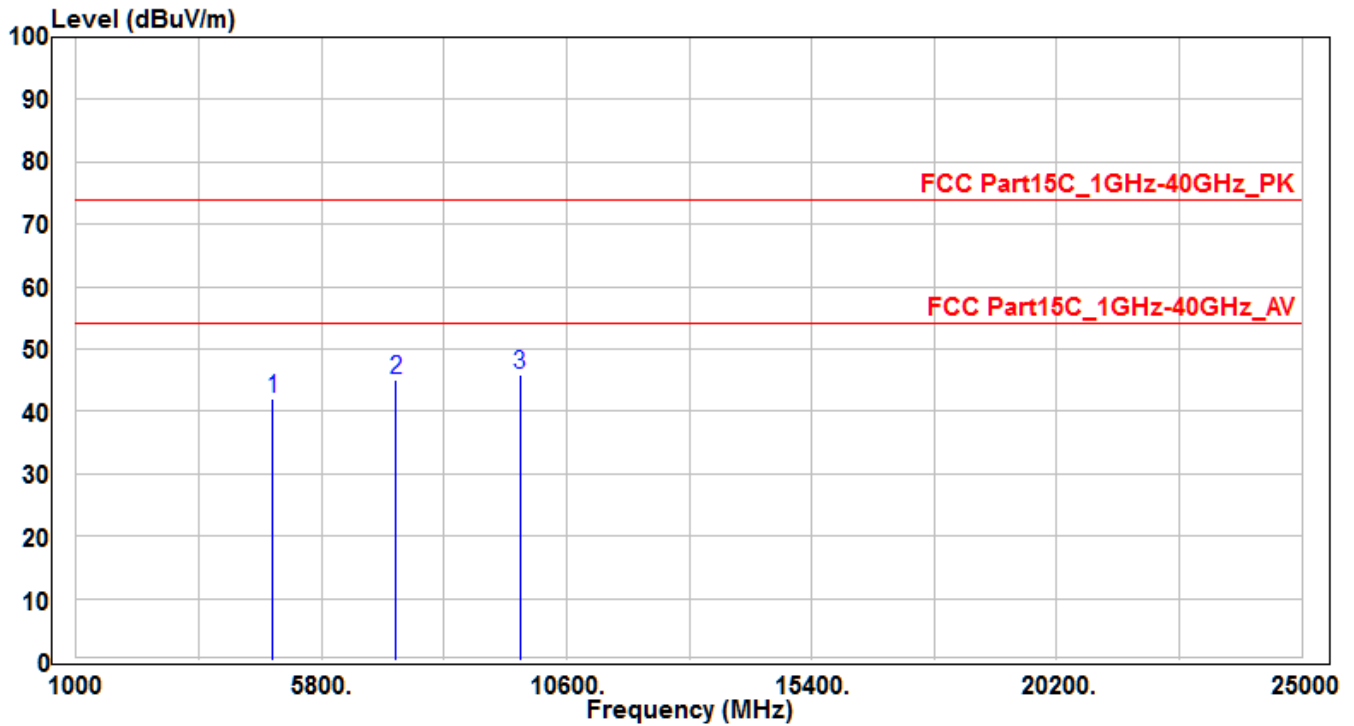


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4844            | 38.65          | 3.41     | 42.06                | -31.94      | 74             | 100         | 400         | Peak              |
| 2  | 7266            | 32.96          | 12.06    | 45.02                | -28.98      | 74             | 100         | 400         | Peak              |
| 3  | *               | 30.9           | 15.05    | 45.95                | -28.05      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

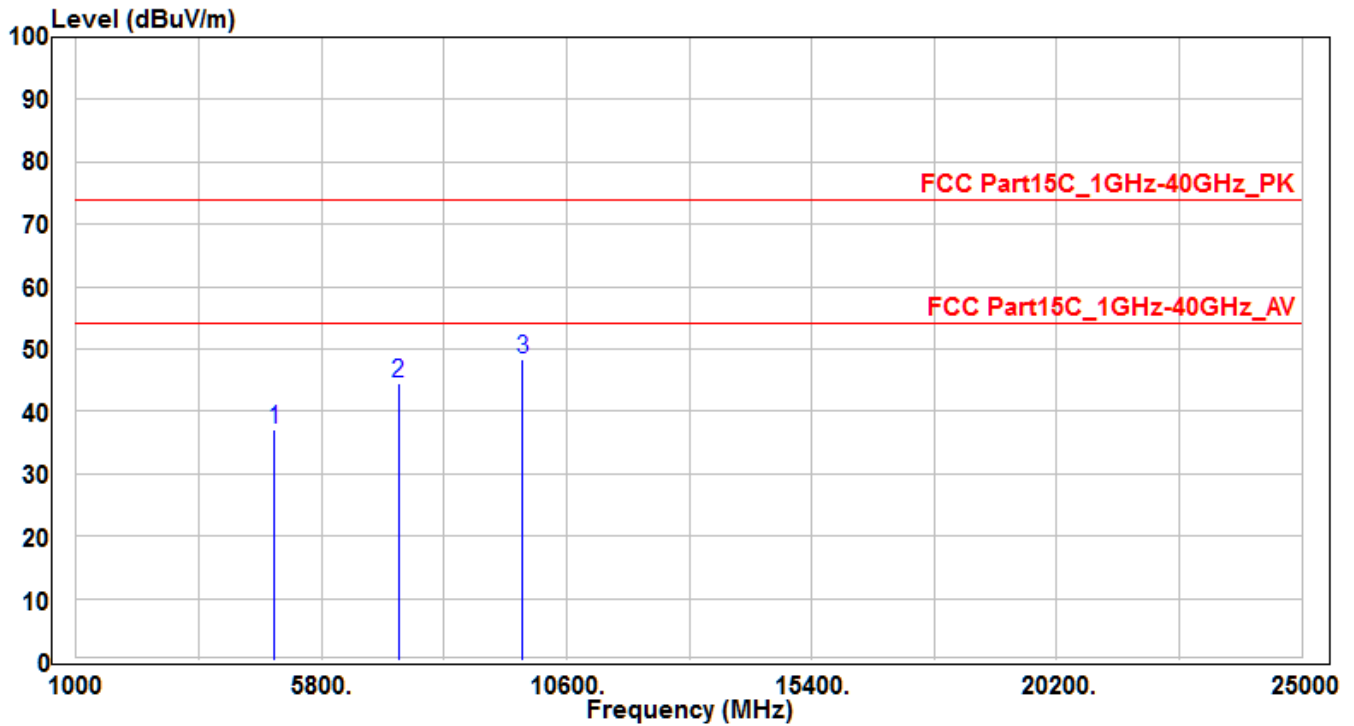


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 33.7              | 3.47        | 37.17                   | -36.83         | 74                | 100            | 400            | Peak                 |
| 2  |   | 7311               | 32.44             | 12.18       | 44.62                   | -29.38         | 74                | 100            | 400            | Peak                 |
| 3  | * | 9748               | 33.26             | 15.19       | 48.45                   | -25.55         | 74                | 100            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

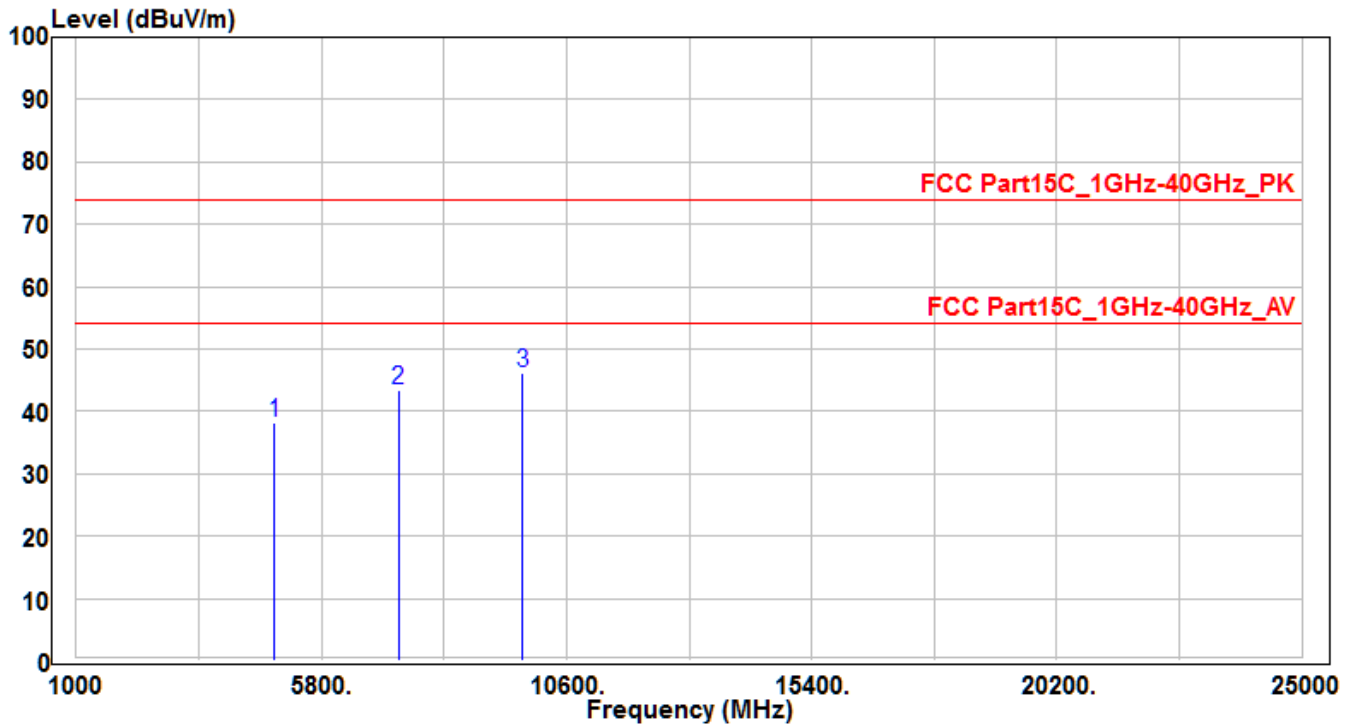


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874            | 34.74          | 3.47     | 38.21                | -35.79      | 74             | 100         | 400         | Peak              |
| 2  | 7311            | 31.25          | 12.18    | 43.43                | -30.57      | 74             | 100         | 400         | Peak              |
| 3  | *               | 30.86          | 15.19    | 46.05                | -27.95      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH09_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

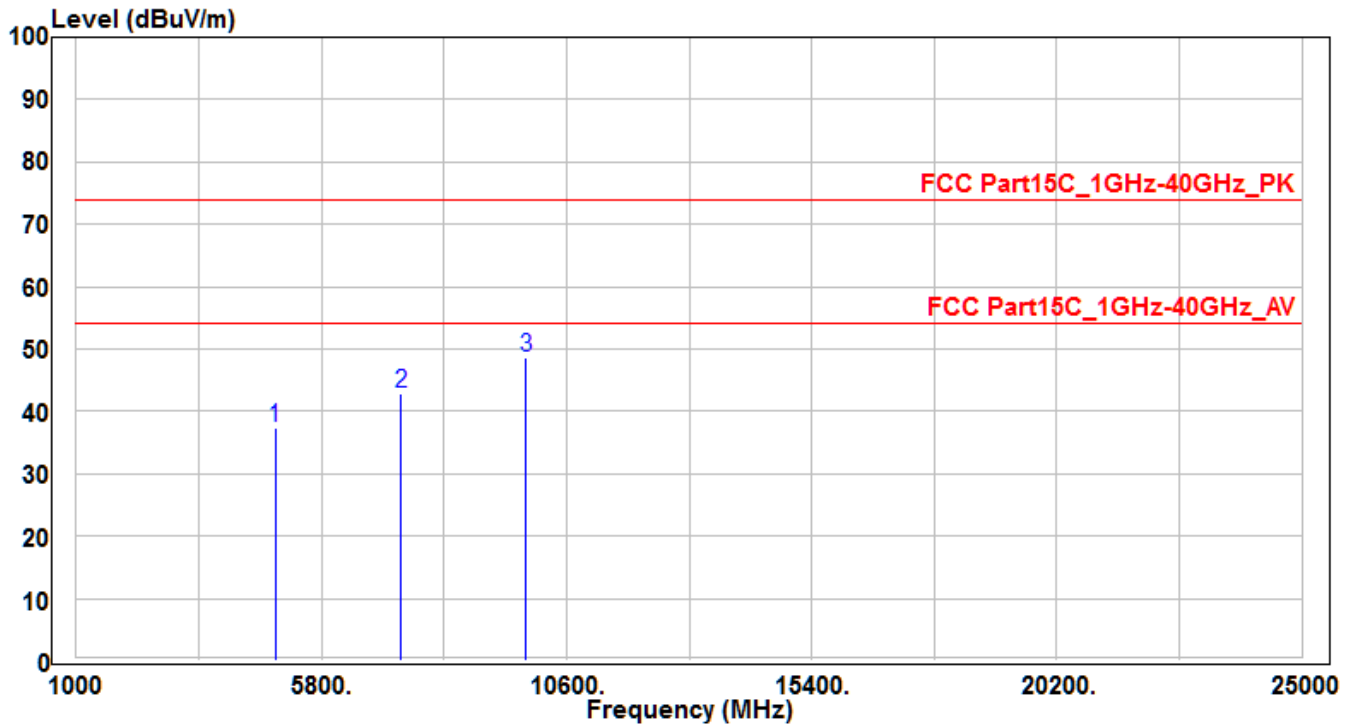


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4904            | 33.77          | 3.54     | 37.31                | -36.69      | 74             | 100         | 400         | Peak              |
| 2  | 7356            | 30.63          | 12.31    | 42.94                | -31.06      | 74             | 100         | 400         | Peak              |
| 3  | *               | 33.18          | 15.32    | 48.5                 | -25.5       | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH09_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

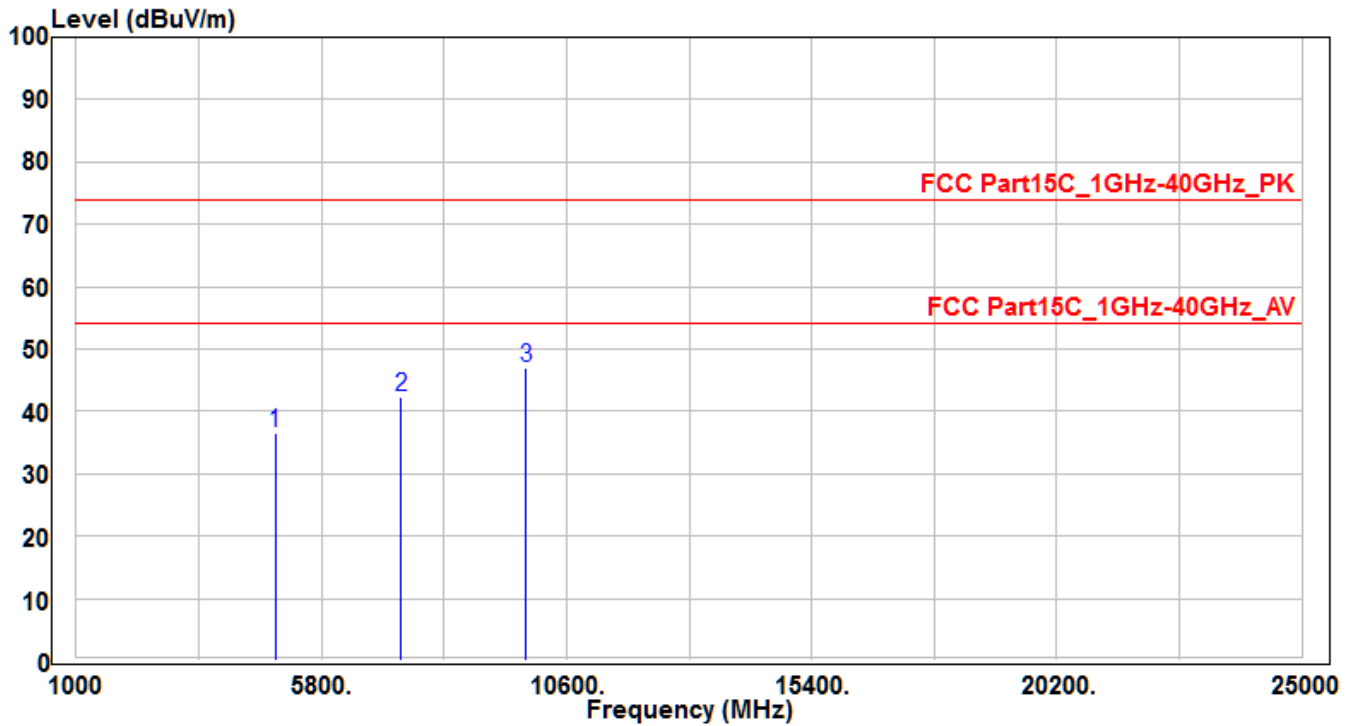


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4904            | 33.05          | 3.54     | 36.59                | -37.41      | 74             | 100         | 400         | Peak              |
| 2  | 7356            | 30.05          | 12.31    | 42.36                | -31.64      | 74             | 100         | 400         | Peak              |
| 3  | *               | 31.66          | 15.32    | 46.98                | -27.02      | 74             | 100         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE5 -CH01_Ant 0         | Test Voltage     | AC 120V/60Hz |

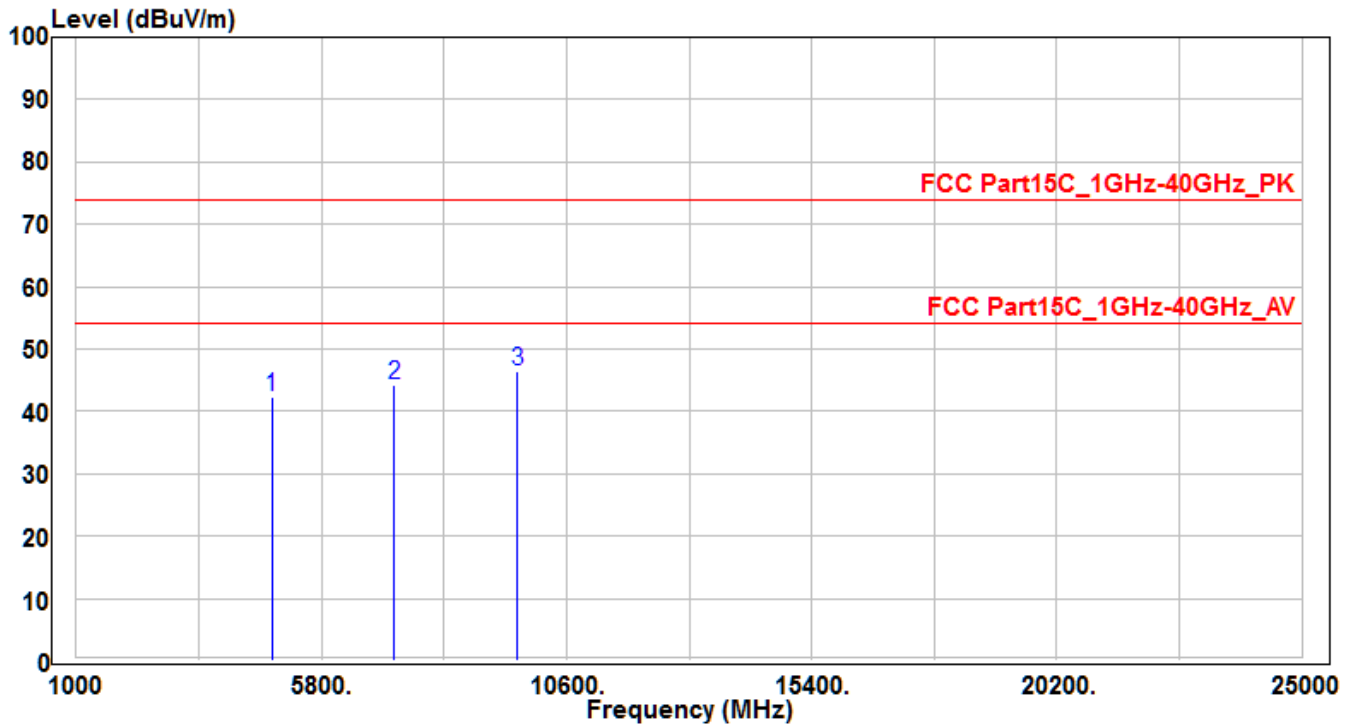


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 39.08          | 3.36     | 42.44                | -31.56      | 74             | 150         | 400         | Peak              |
| 2  | 7236            | 32.34          | 11.97    | 44.31                | -29.69      | 74             | 150         | 400         | Peak              |
| 3  | *               | 9648           | 31.37    | 46.33                | -27.67      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE5 -CH01_Ant 0         | Test Voltage     | AC 120V/60Hz |

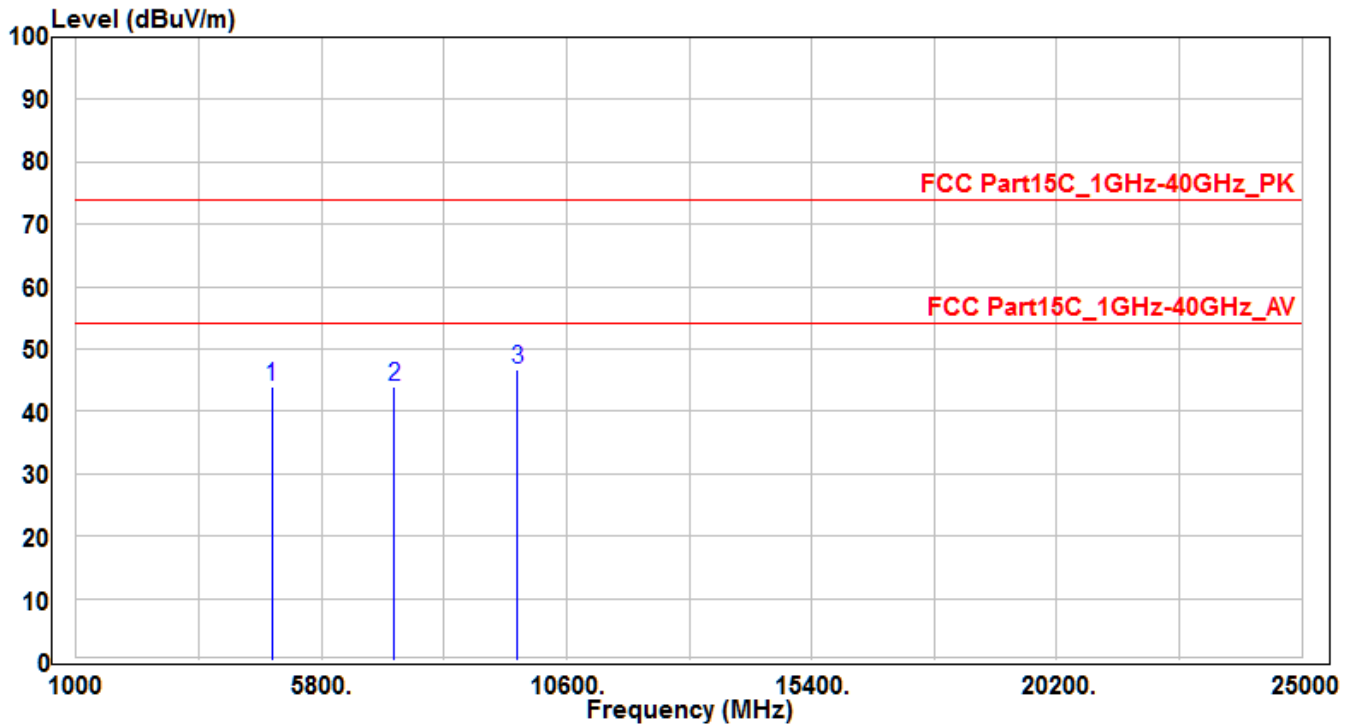


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4824               | 40.52             | 3.36        | 43.88                   | -30.12         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7236               | 31.93             | 11.97       | 43.9                    | -30.1          | 74                | 150            | 400            | Peak                 |
| 3  | * | 9648               | 31.76             | 14.96       | 46.72                   | -27.28         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE5 -CH06_Ant 0         | Test Voltage     | AC 120V/60Hz |

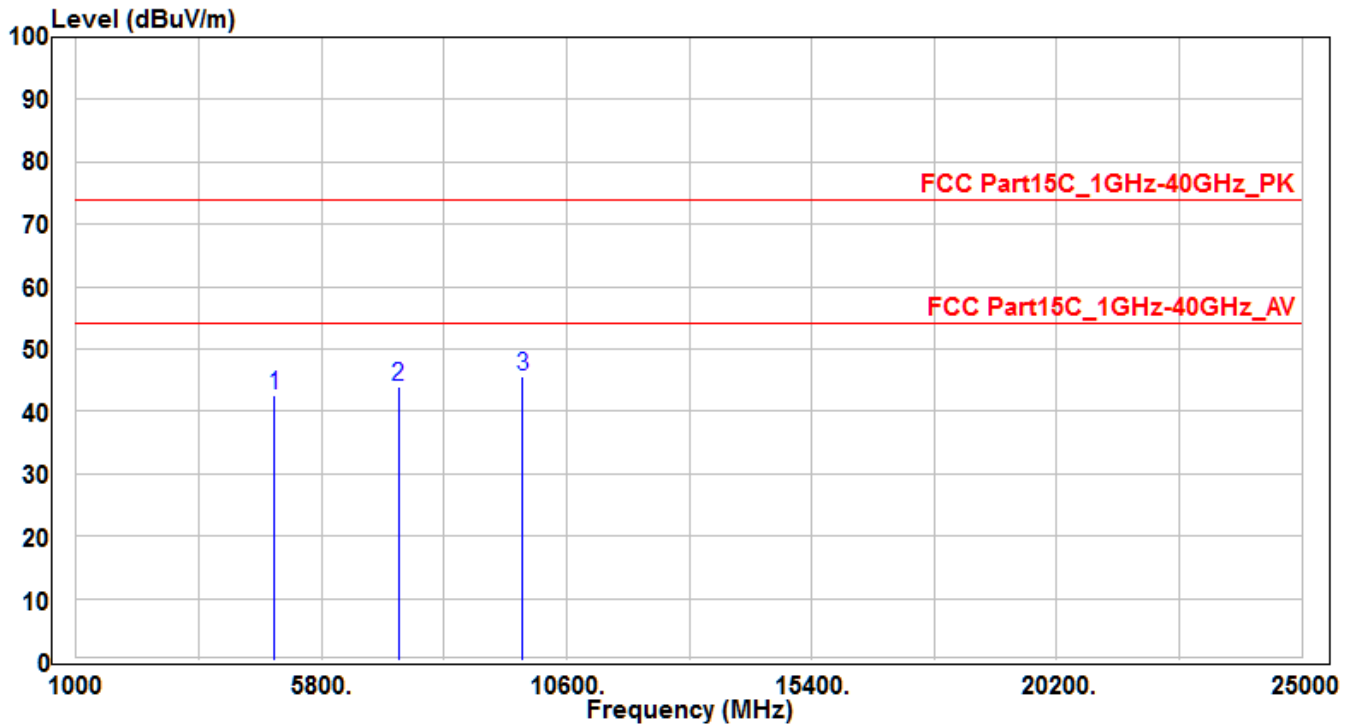


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4874            | 39.15          | 3.47     | 42.62                | -31.38      | 74             | 150         | 400         | Peak              |
| 2  |   | 7311            | 31.76          | 12.18    | 43.94                | -30.06      | 74             | 150         | 400         | Peak              |
| 3  | * | 9748            | 30.5           | 15.19    | 45.69                | -28.31      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE5 -CH06_Ant 0         | Test Voltage     | AC 120V/60Hz |

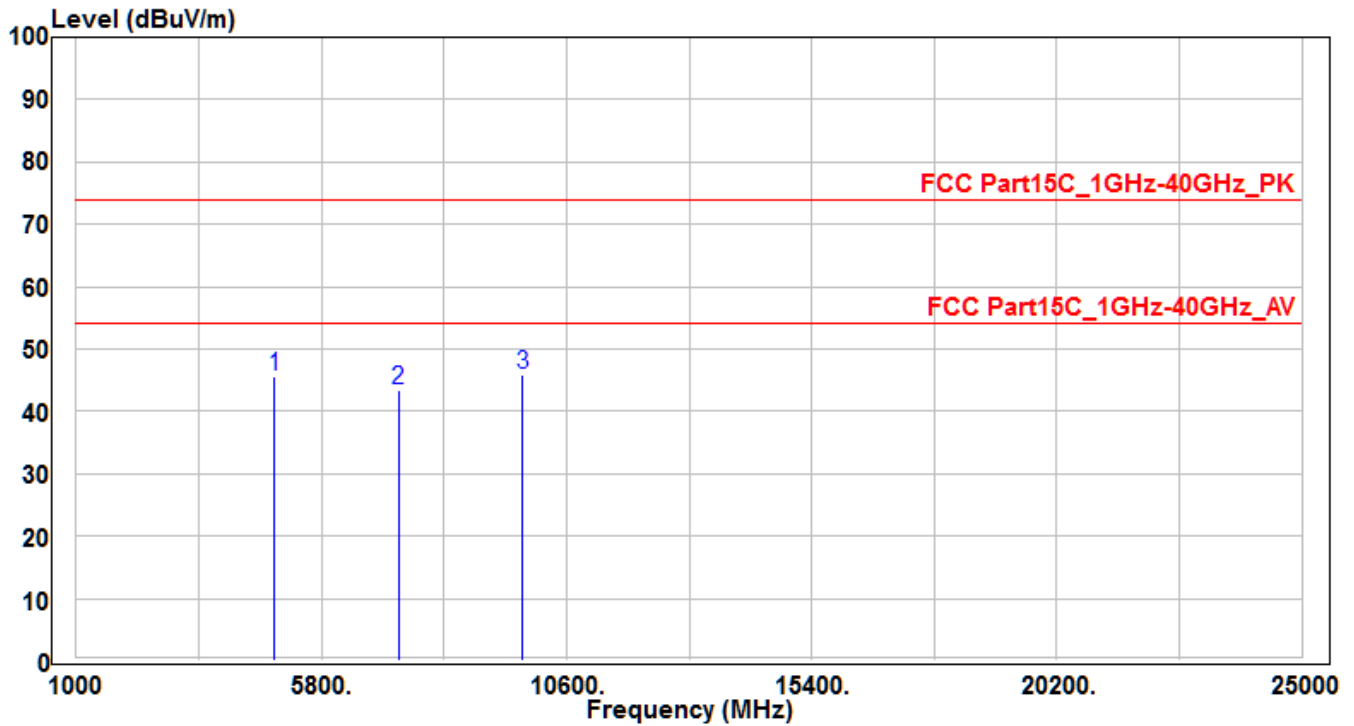


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 42.07             | 3.47        | 45.54                   | -28.46         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7311               | 31.21             | 12.18       | 43.39                   | -30.61         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9748               | 30.71             | 15.19       | 45.9                    | -28.1          | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE5 -CH11_Ant 0         | Test Voltage     | AC 120V/60Hz |

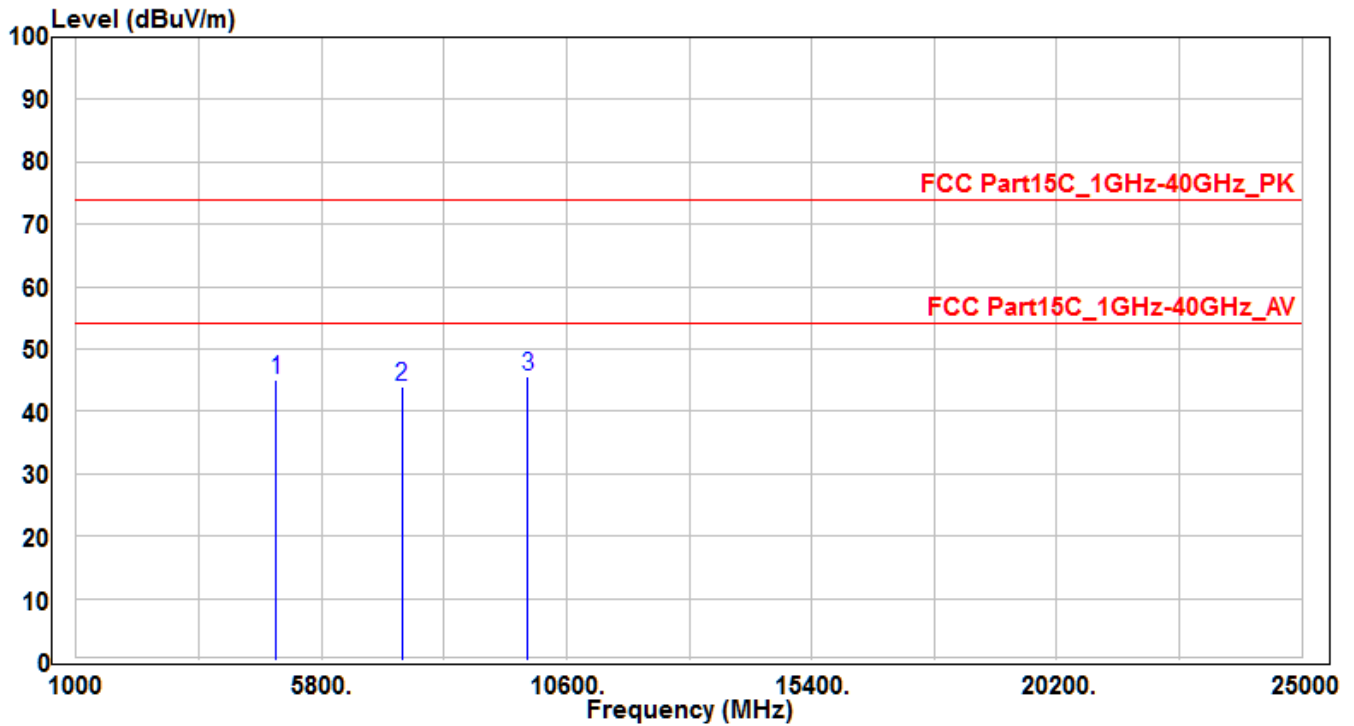


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 41.37          | 3.58     | 44.95                | -29.05      | 74             | 150         | 400         | Peak              |
| 2  | 7386            | 31.47          | 12.39    | 43.86                | -30.14      | 74             | 150         | 400         | Peak              |
| 3  | *               | 30.28          | 15.42    | 45.7                 | -28.3       | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE5 -CH11_Ant 0         | Test Voltage     | AC 120V/60Hz |

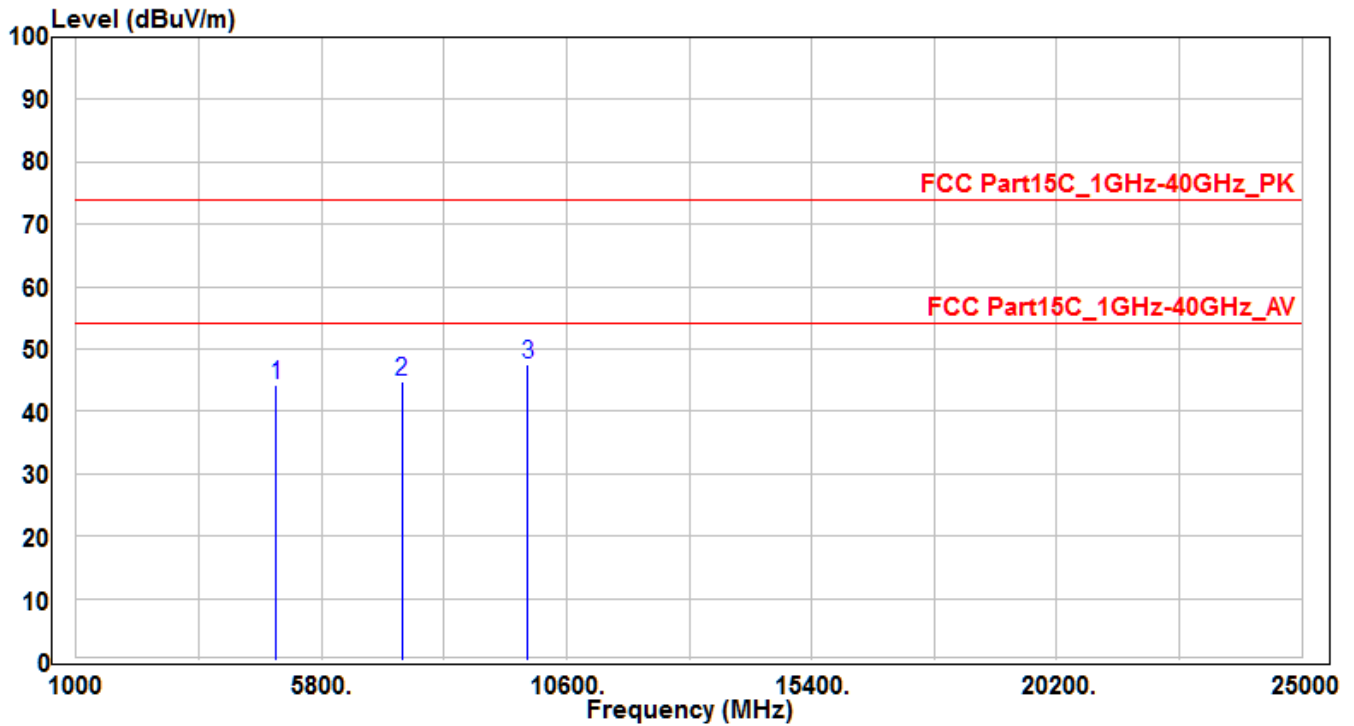


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4924               | 40.69             | 3.58        | 44.27                   | -29.73         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7386               | 32.32             | 12.39       | 44.71                   | -29.29         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9848               | 32.12             | 15.42       | 47.54                   | -26.46         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE6-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

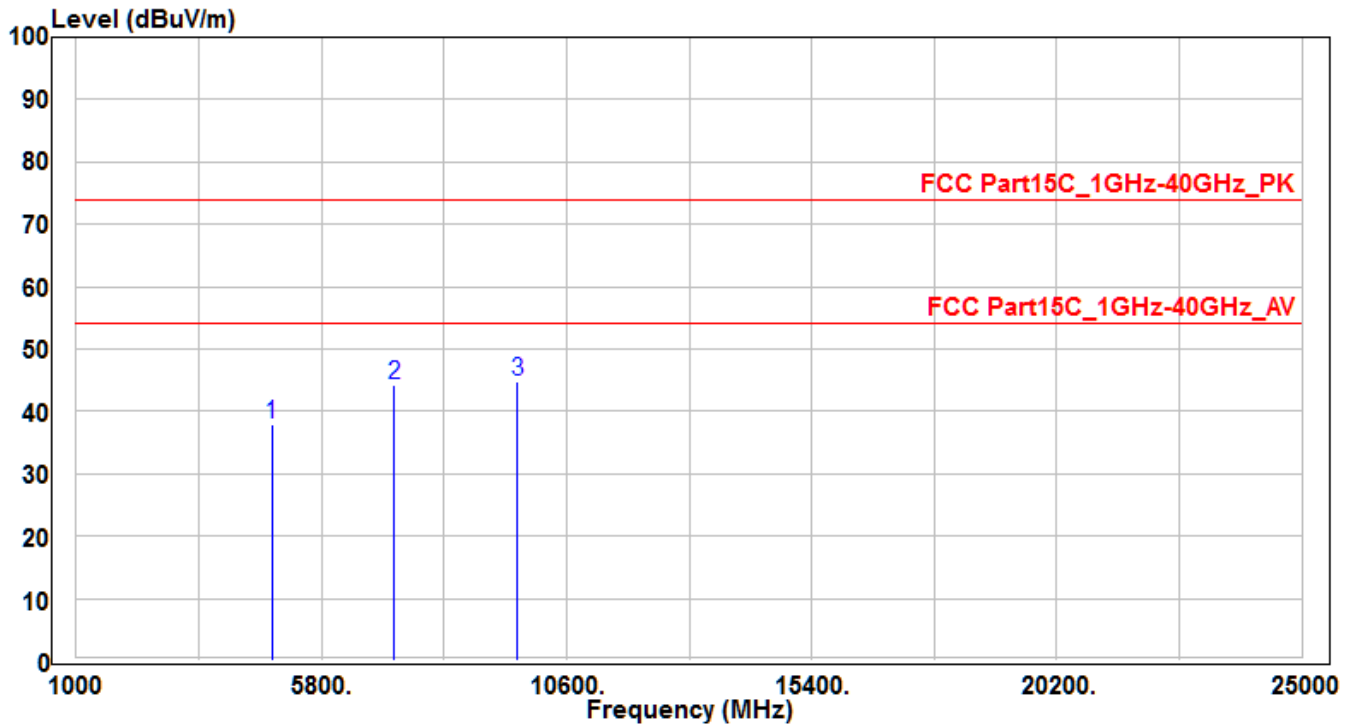


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 34.53          | 3.36     | 37.89                | -36.11      | 74             | 150         | 400         | Peak              |
| 2  | 7236            | 32.24          | 11.97    | 44.21                | -29.79      | 74             | 150         | 400         | Peak              |
| 3  | *               | 29.97          | 14.96    | 44.93                | -29.07      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE6-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

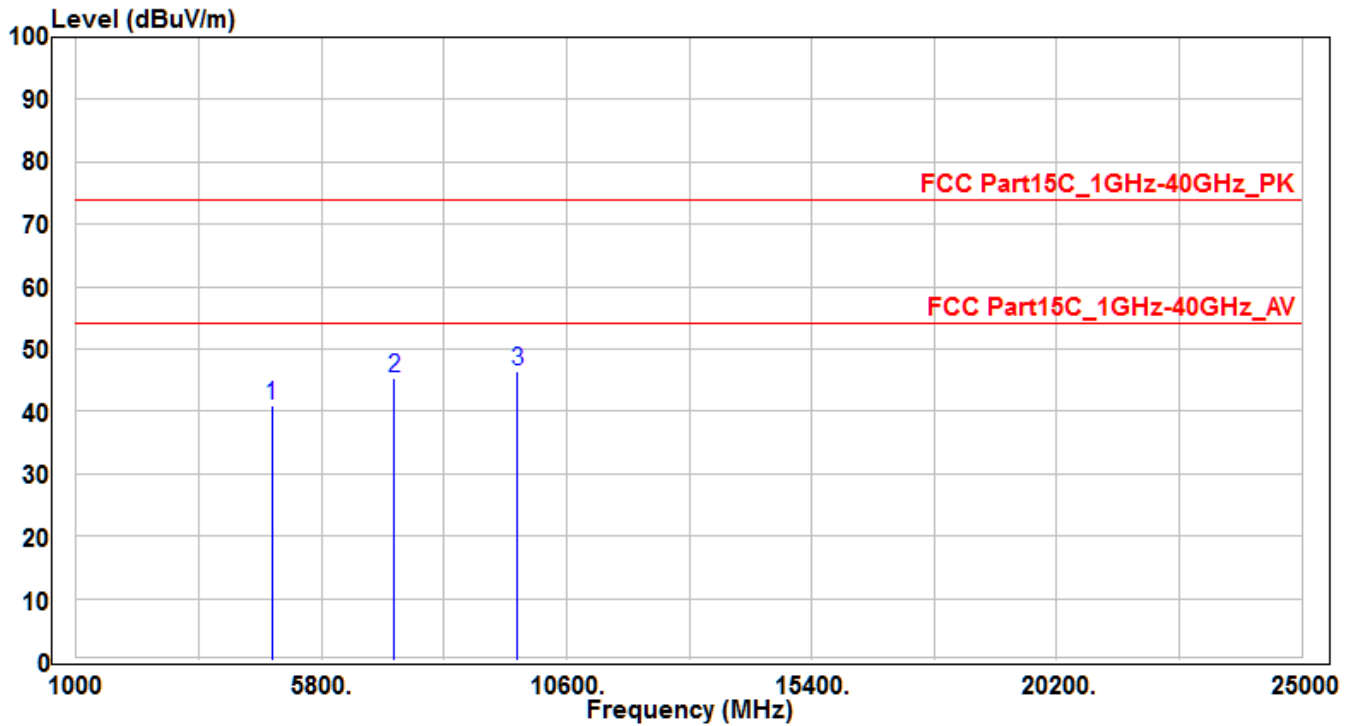


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4824               | 37.46             | 3.36        | 40.82                   | -33.18         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7236               | 33.48             | 11.97       | 45.45                   | -28.55         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9648               | 31.44             | 14.96       | 46.4                    | -27.6          | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE6-CH06_Ant 0          | Test Voltage     | AC 120V/60Hz |

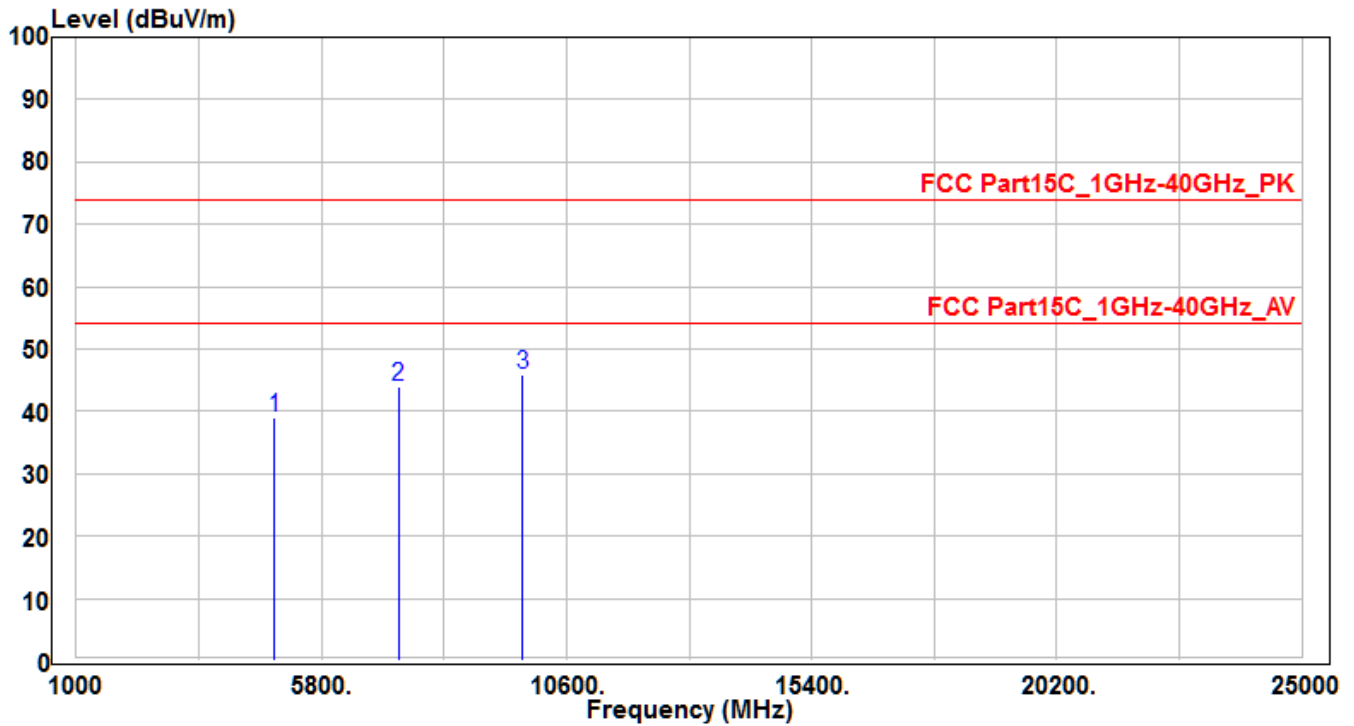


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 35.67             | 3.47        | 39.14                   | -34.86         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7311               | 31.73             | 12.18       | 43.91                   | -30.09         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9748               | 30.66             | 15.19       | 45.85                   | -28.15         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE6-CH06_Ant 0          | Test Voltage     | AC 120V/60Hz |

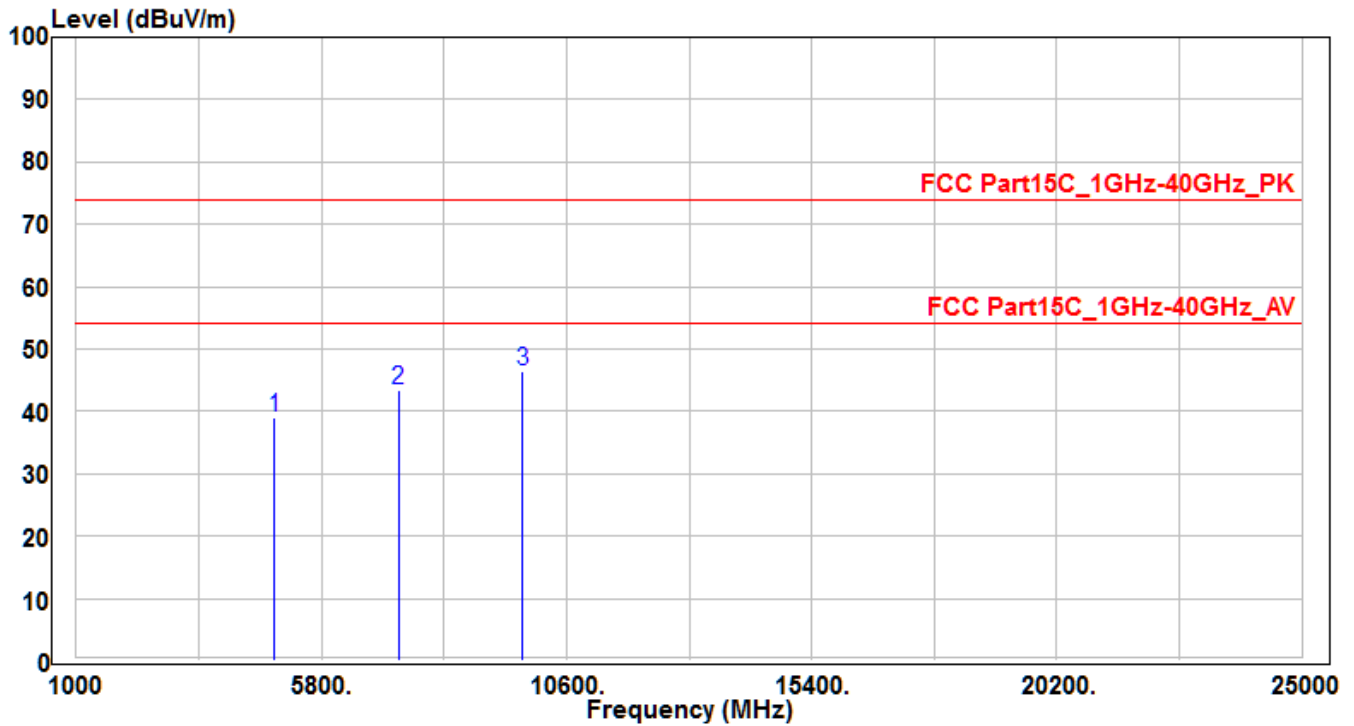


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 35.45             | 3.47        | 38.92                   | -35.08         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7311               | 31.34             | 12.18       | 43.52                   | -30.48         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9748               | 31.32             | 15.19       | 46.51                   | -27.49         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE6-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

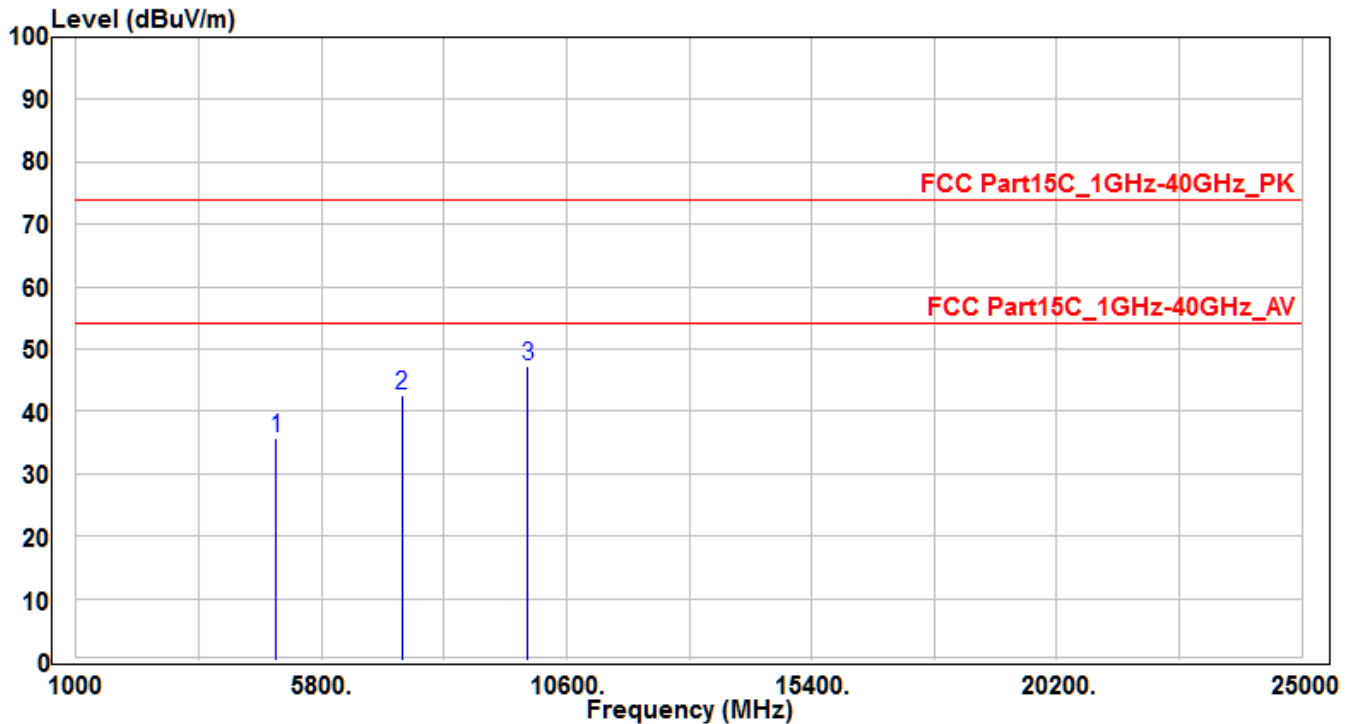


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 32.17          | 3.58     | 35.75                | -38.25      | 74             | 150         | 400         | Peak              |
| 2  | 7386            | 30.14          | 12.39    | 42.53                | -31.47      | 74             | 150         | 400         | Peak              |
| 3  | *               | 31.88          | 15.42    | 47.3                 | -26.7       | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE6-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

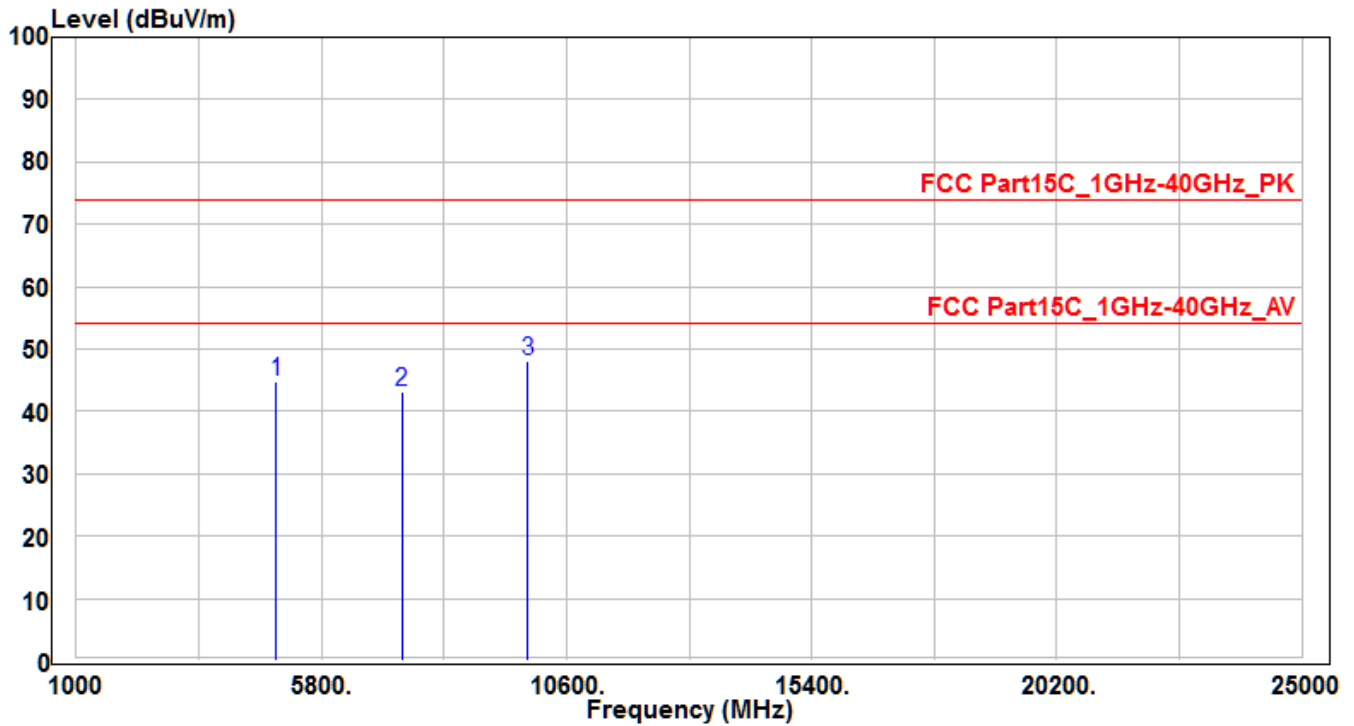


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 41.13          | 3.58     | 44.71                | -29.29      | 74             | 150         | 400         | Peak              |
| 2  | 7386            | 30.84          | 12.39    | 43.23                | -30.77      | 74             | 150         | 400         | Peak              |
| 3  | *               | 32.59          | 15.42    | 48.01                | -25.99      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

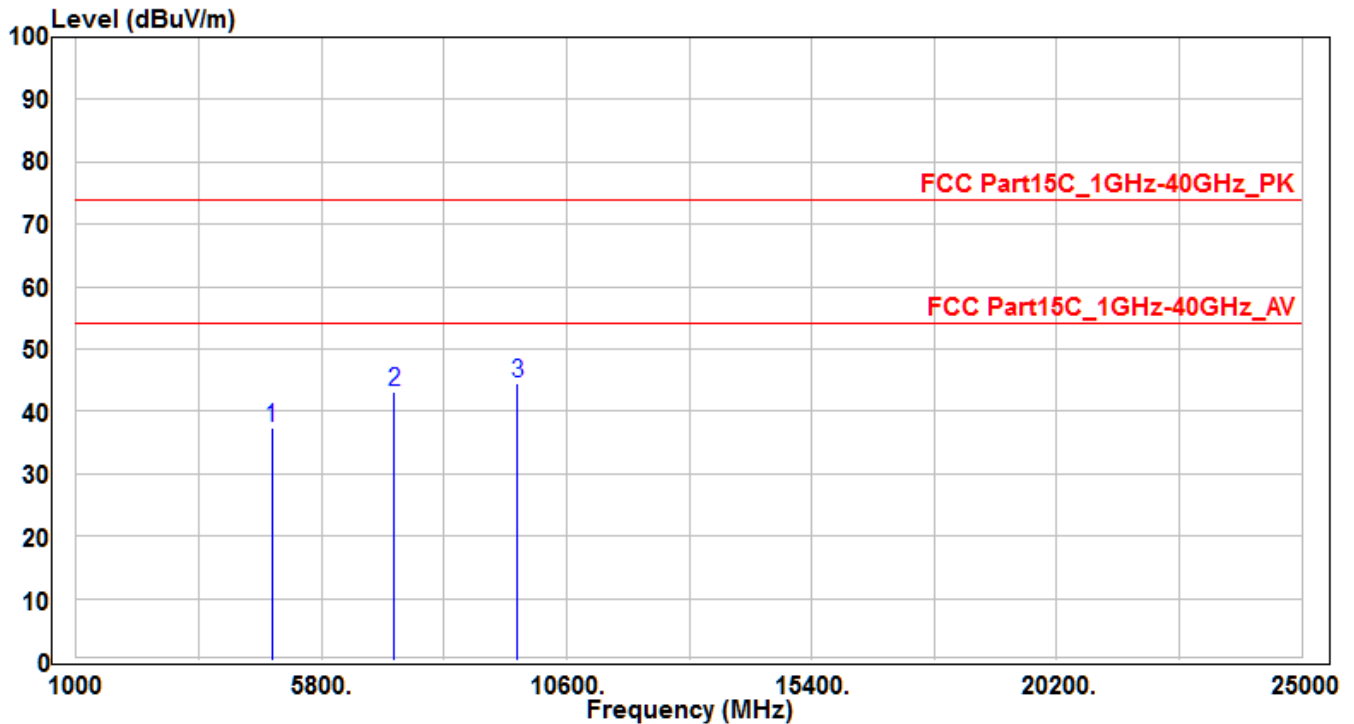


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 34.04          | 3.36     | 37.4                 | -36.6       | 74             | 150         | 400         | Peak              |
| 2  | 7236            | 31.18          | 11.97    | 43.15                | -30.85      | 74             | 150         | 400         | Peak              |
| 3  | *               | 29.51          | 14.96    | 44.47                | -29.53      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

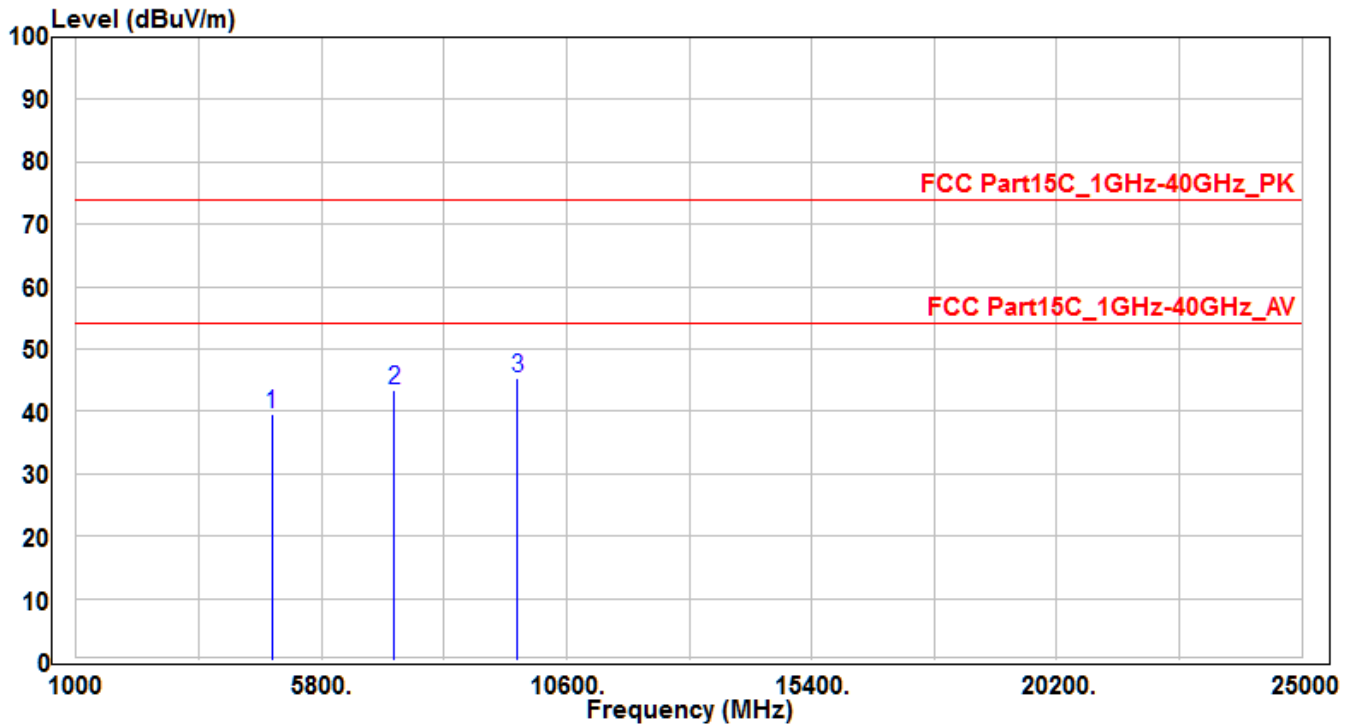


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824            | 36.1           | 3.36     | 39.46                | -34.54      | 74             | 150         | 400         | Peak              |
| 2  | 7236            | 31.4           | 11.97    | 43.37                | -30.63      | 74             | 150         | 400         | Peak              |
| 3  | *               | 30.26          | 14.96    | 45.22                | -28.78      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

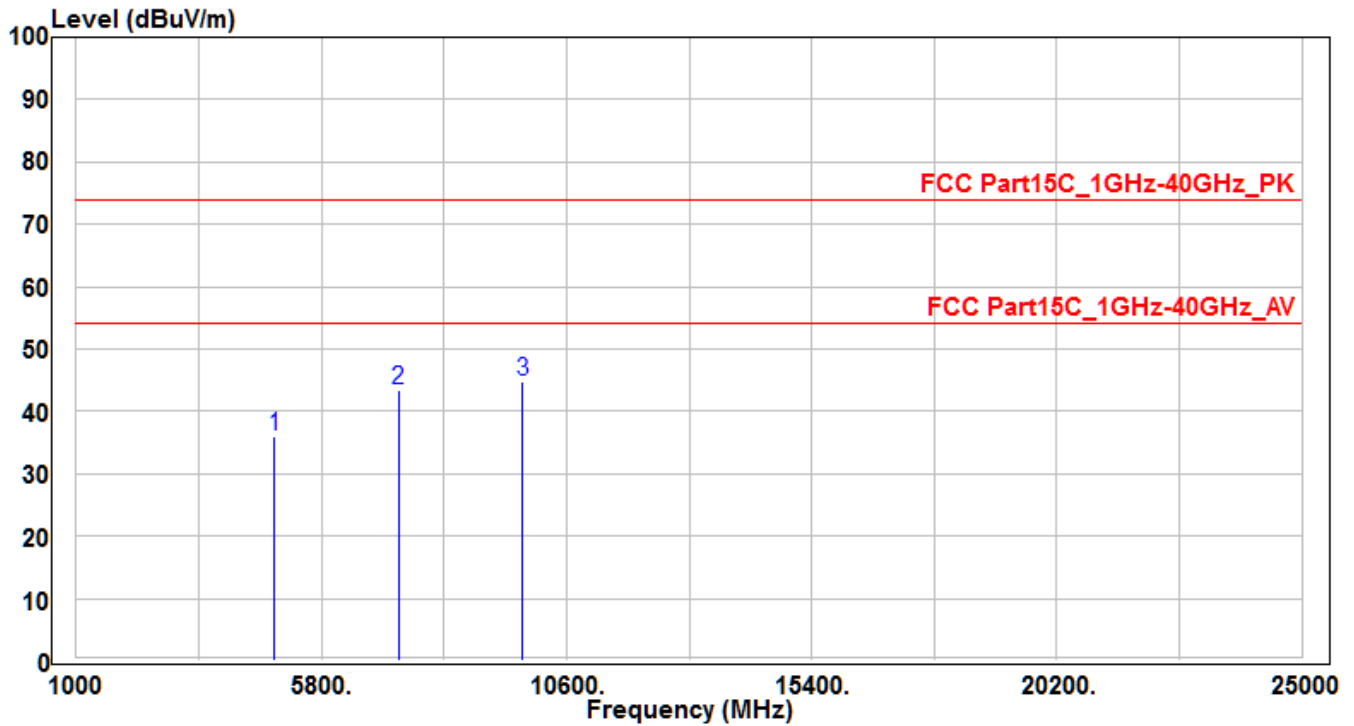


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874            | 32.56          | 3.47     | 36.03                | -37.97      | 74             | 150         | 400         | Peak              |
| 2  | 7311            | 31.2           | 12.18    | 43.38                | -30.62      | 74             | 150         | 400         | Peak              |
| 3  | * 9748          | 29.63          | 15.19    | 44.82                | -29.18      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

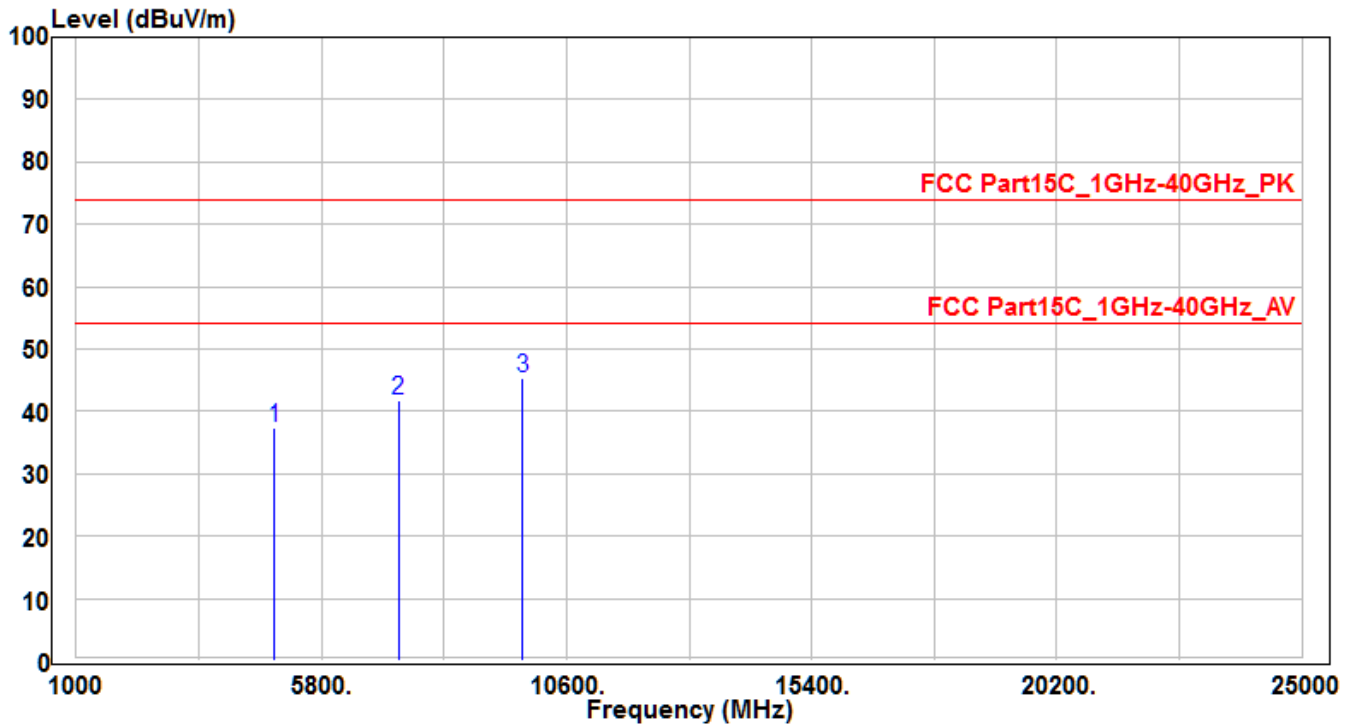


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874            | 33.78          | 3.47     | 37.25                | -36.75      | 74             | 150         | 400         | Peak              |
| 2  | 7311            | 29.5           | 12.18    | 41.68                | -32.32      | 74             | 150         | 400         | Peak              |
| 3  | *               | 30.08          | 15.19    | 45.27                | -28.73      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

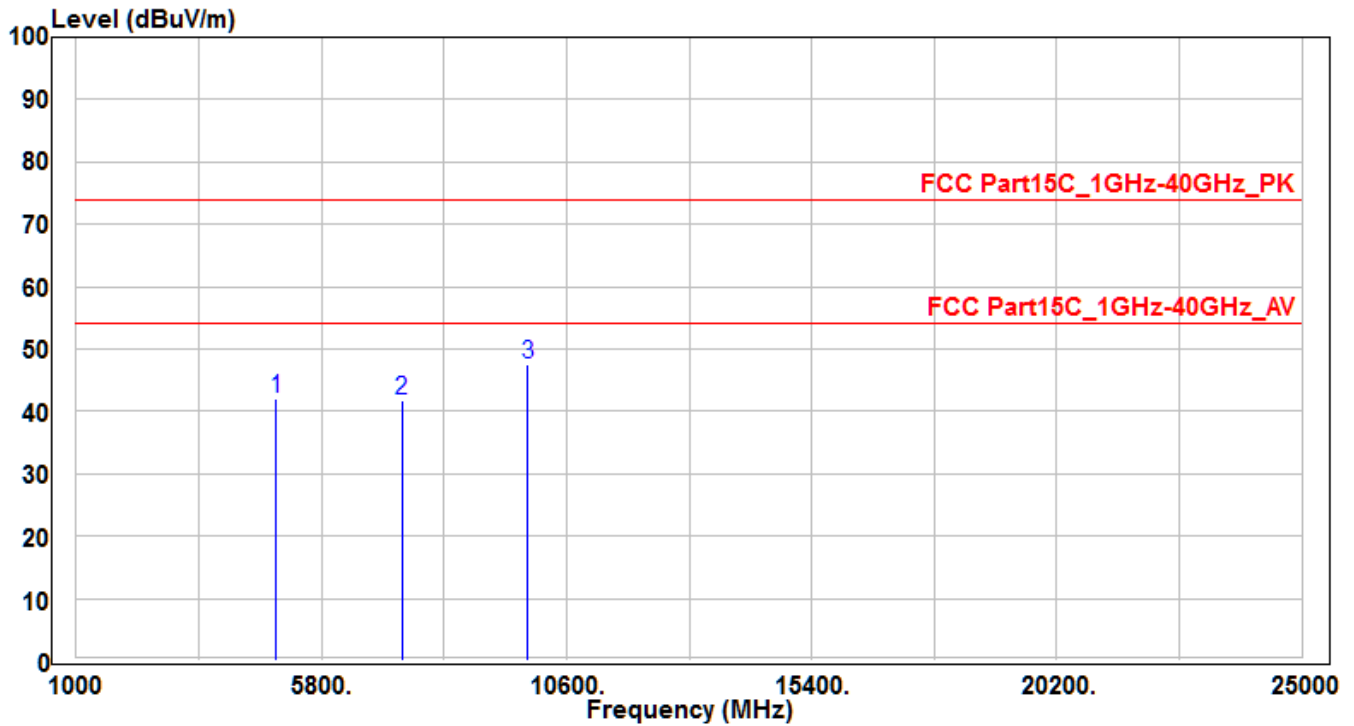


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 38.4           | 3.58     | 41.98                | -32.02      | 74             | 150         | 400         | Peak              |
| 2  | 7386            | 29.29          | 12.39    | 41.68                | -32.32      | 74             | 150         | 400         | Peak              |
| 3  | *               | 32.1           | 15.42    | 47.52                | -26.48      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE7-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

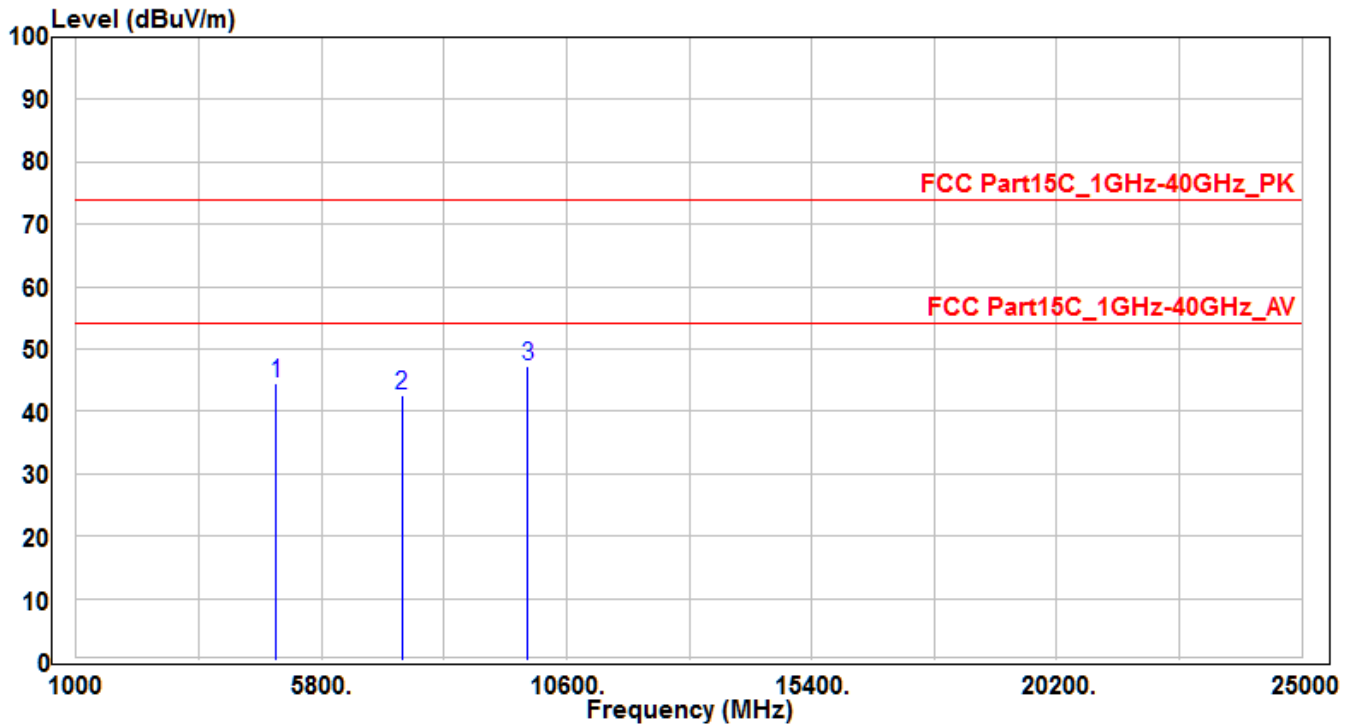


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924            | 41.01          | 3.58     | 44.59                | -29.41      | 74             | 150         | 400         | Peak              |
| 2  | 7386            | 30.1           | 12.39    | 42.49                | -31.51      | 74             | 150         | 400         | Peak              |
| 3  | *               | 31.8           | 15.42    | 47.22                | -26.78      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE8-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

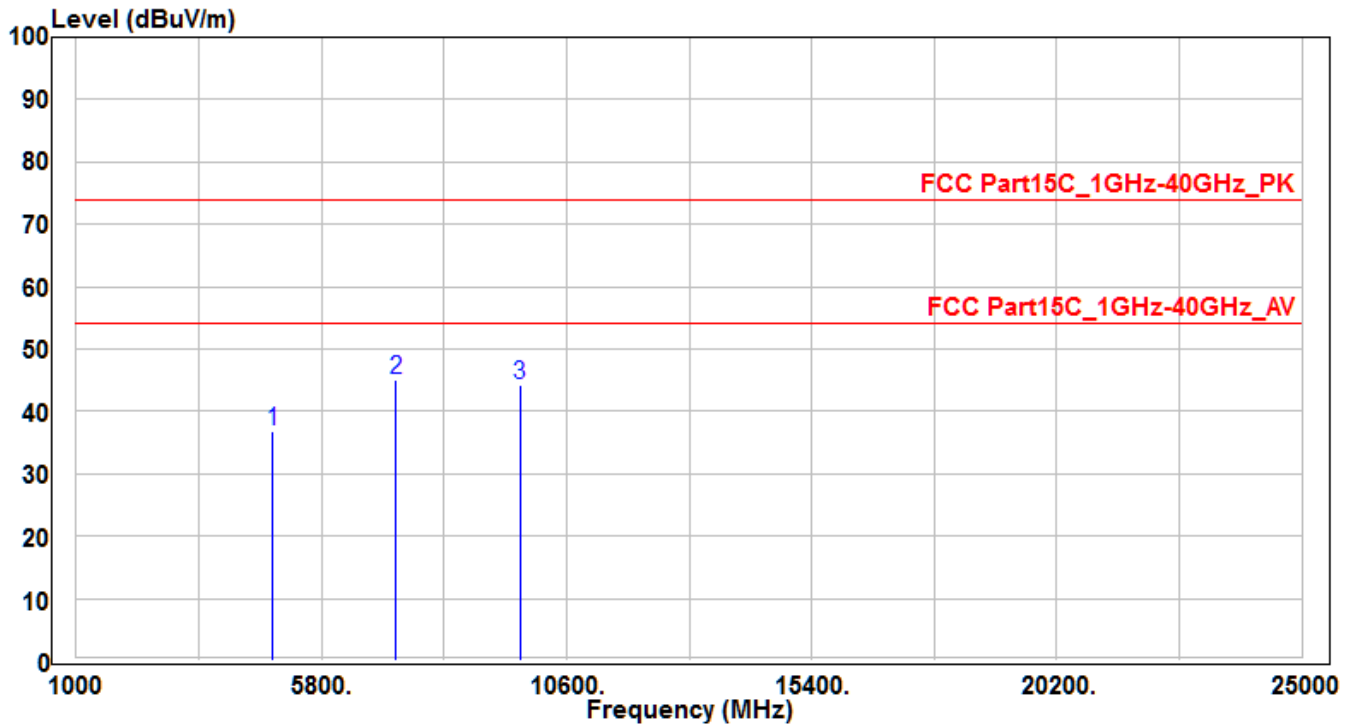


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4844            | 33.35          | 3.41     | 36.76                | -37.24      | 74             | 150         | 400         | Peak              |
| 2  | * | 7266            | 33.08          | 12.06    | 45.14                | -28.86      | 74             | 150         | 400         | Peak              |
| 3  |   | 9688            | 29.27          | 15.05    | 44.32                | -29.68      | 74             | 150         | 400         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE8-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

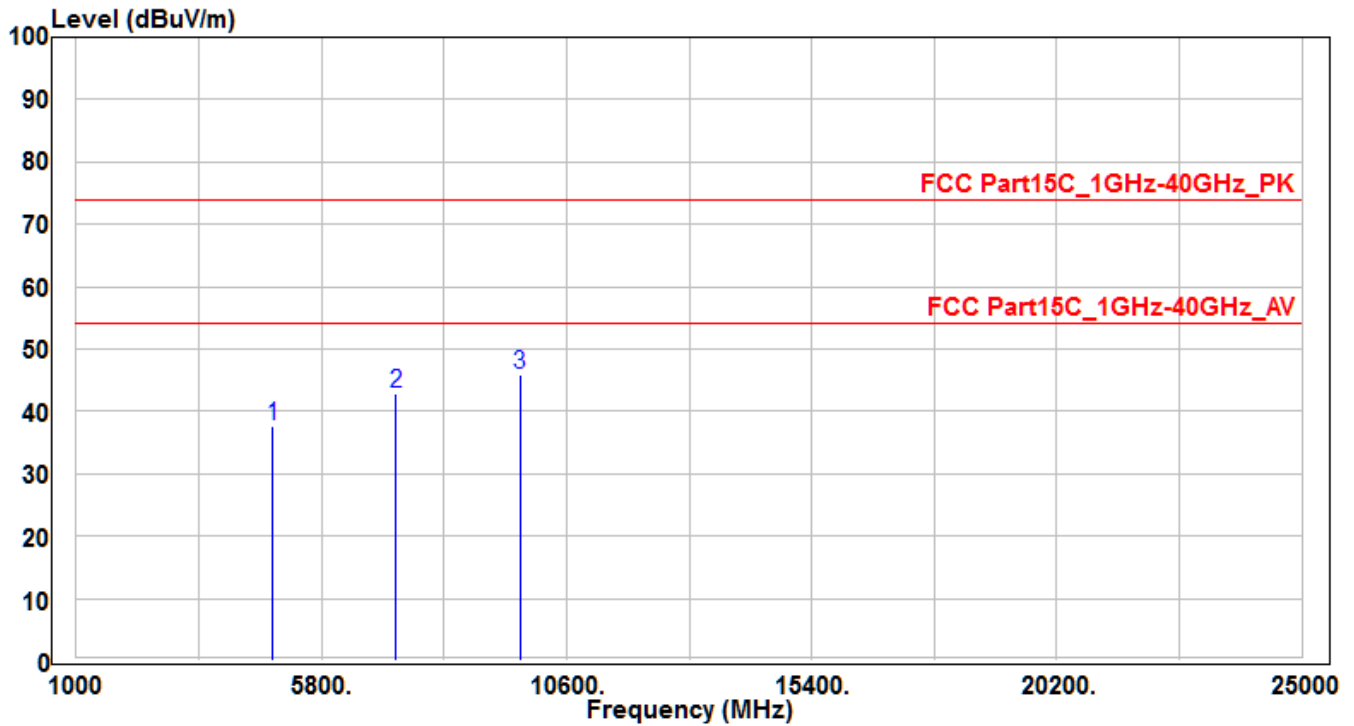


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4844               | 34.19             | 3.41        | 37.6                    | -36.4          | 74                | 150            | 400            | Peak                 |
| 2  |   | 7266               | 30.88             | 12.06       | 42.94                   | -31.06         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9688               | 30.91             | 15.05       | 45.96                   | -28.04         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE8-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

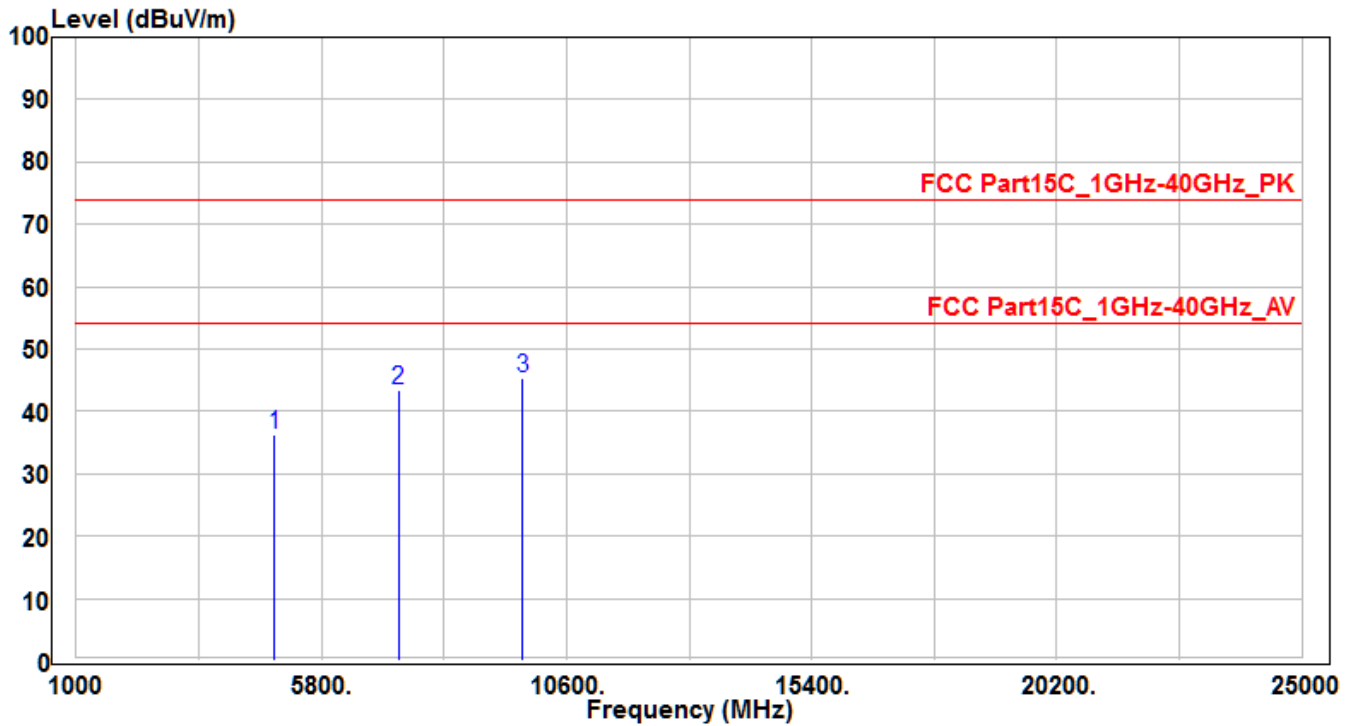


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 32.82             | 3.47        | 36.29                   | -37.71         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7311               | 31.16             | 12.18       | 43.34                   | -30.66         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9748               | 30.06             | 15.19       | 45.25                   | -28.75         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE8-CH06_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

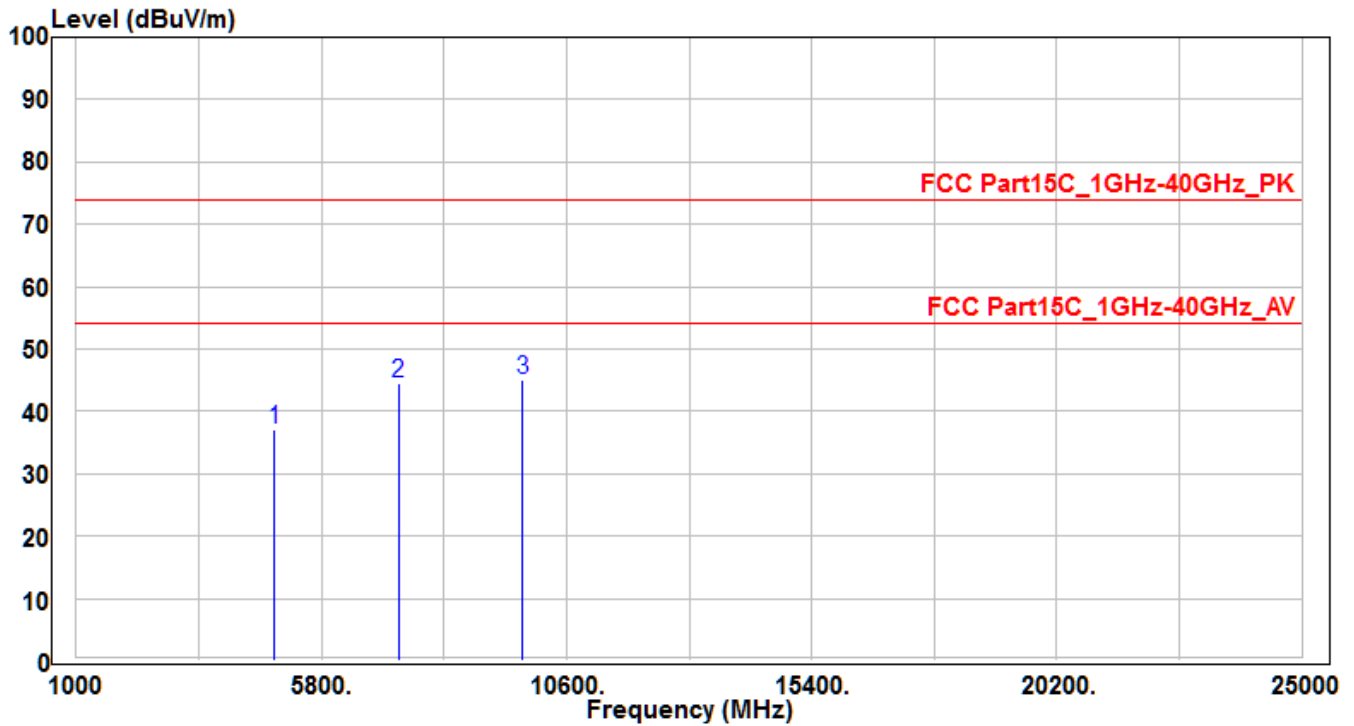


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4874               | 33.74             | 3.47        | 37.21                   | -36.79         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7311               | 32.47             | 12.18       | 44.65                   | -29.35         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9748               | 29.94             | 15.19       | 45.13                   | -28.87         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE8-CH09_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

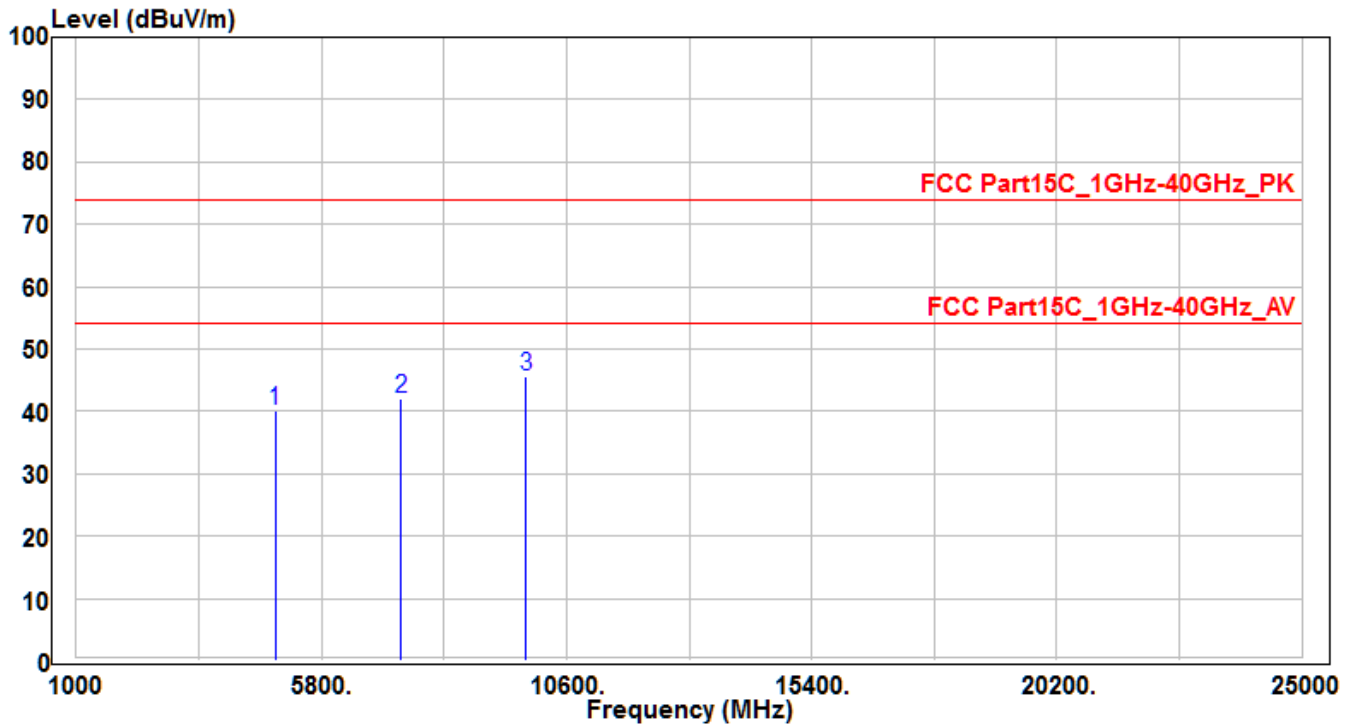


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4904               | 36.46             | 3.54        | 40                      | -34            | 74                | 150            | 400            | Peak                 |
| 2  |   | 7356               | 29.76             | 12.31       | 42.07                   | -31.93         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9808               | 30.35             | 15.32       | 45.67                   | -28.33         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (External Antenna) | Test Date        | 2018/6/14    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 25°C / 60%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE8-CH09_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

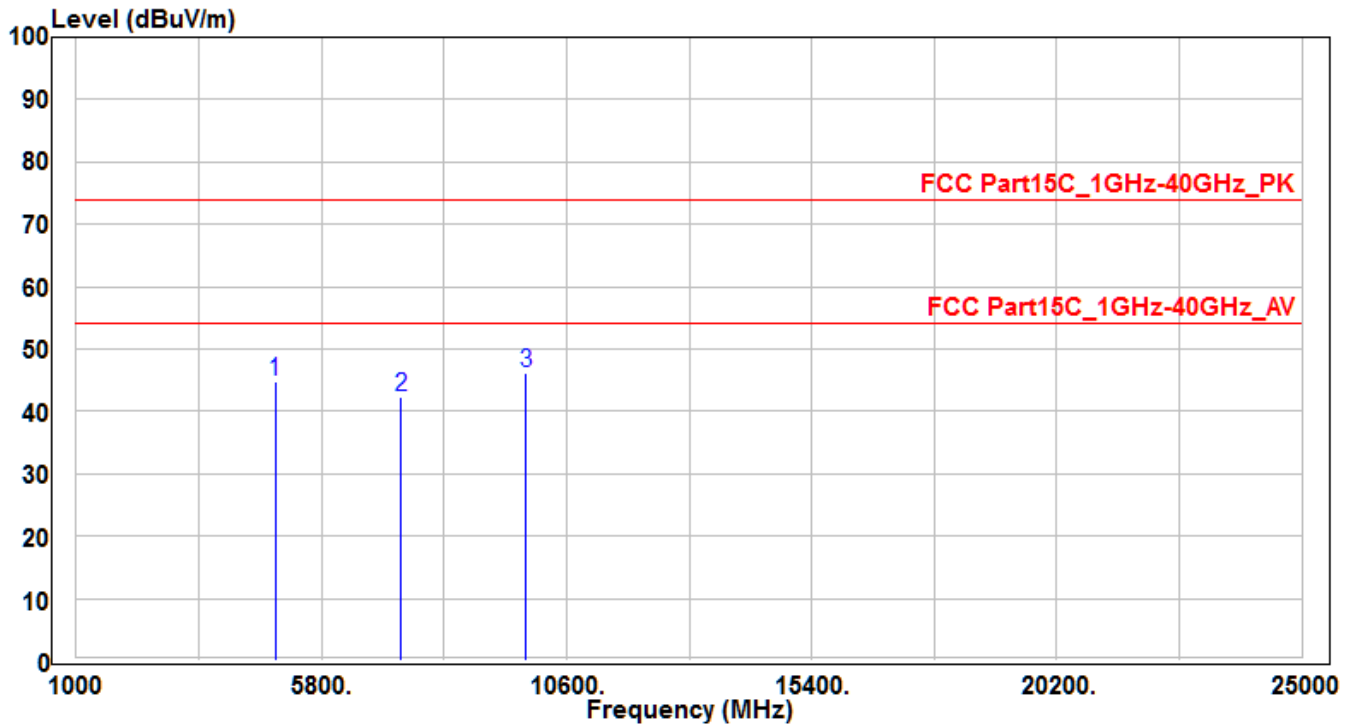

| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 4904               | 41.15             | 3.54        | 44.69                   | -29.31         | 74                | 150            | 400            | Peak                 |
| 2  |   | 7356               | 30.06             | 12.31       | 42.37                   | -31.63         | 74                | 150            | 400            | Peak                 |
| 3  | * | 9808               | 30.91             | 15.32       | 46.23                   | -27.77         | 74                | 150            | 400            | Peak                 |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                      |                            |
|----------------------------------------|----------------------|----------------------------|
| Frequency [MHz]                        | Field Strength [V/m] | Measured Distance [Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)         | 300                        |
| 0.490 - 1.705                          | 24000/F (kHz)        | 30                         |
| 1.705 – 30                             | 30                   | 30                         |
| 30 – 88                                | 100                  | 3                          |
| 88 – 216                               | 150                  | 3                          |
| 216 – 960                              | 200                  | 3                          |
| Above 960                              | 500                  | 3                          |

### 7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

### 7.7.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 \* RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

#### **Average Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.7.4. Test Setup

##### 1GHz ~ 18GHz Test Setup:

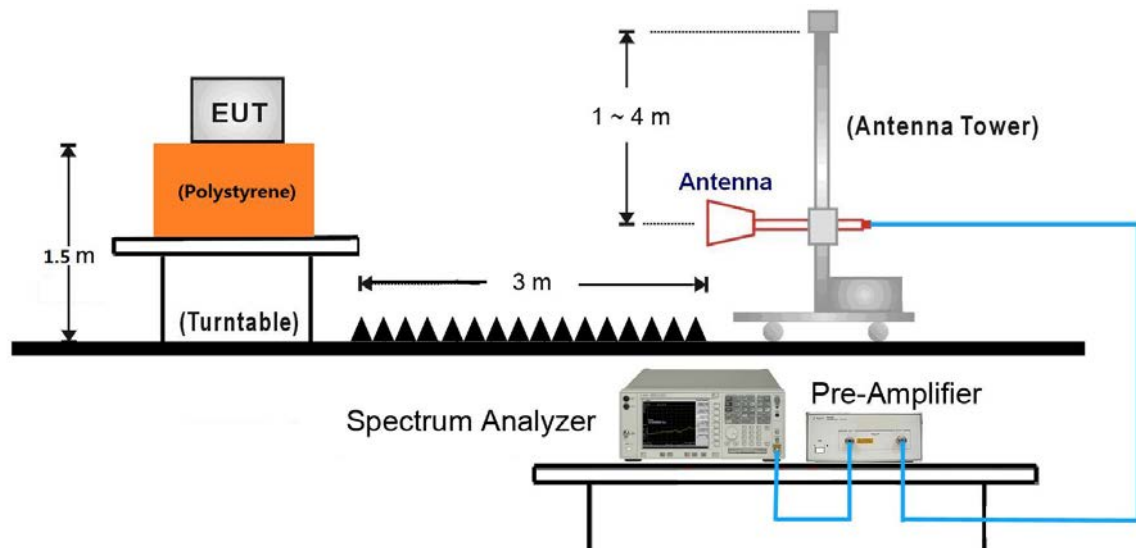


##### 18GHz ~40GHz Test Setup:

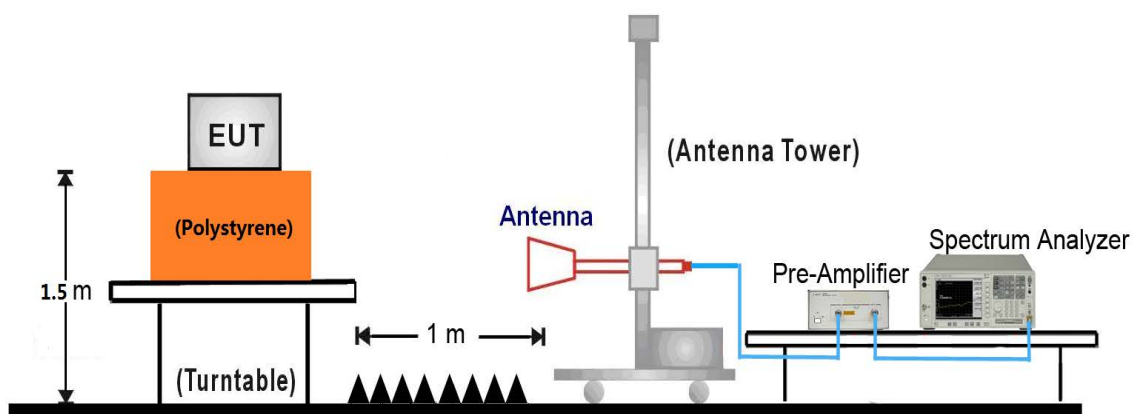

### 7.7.5. Test Result

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

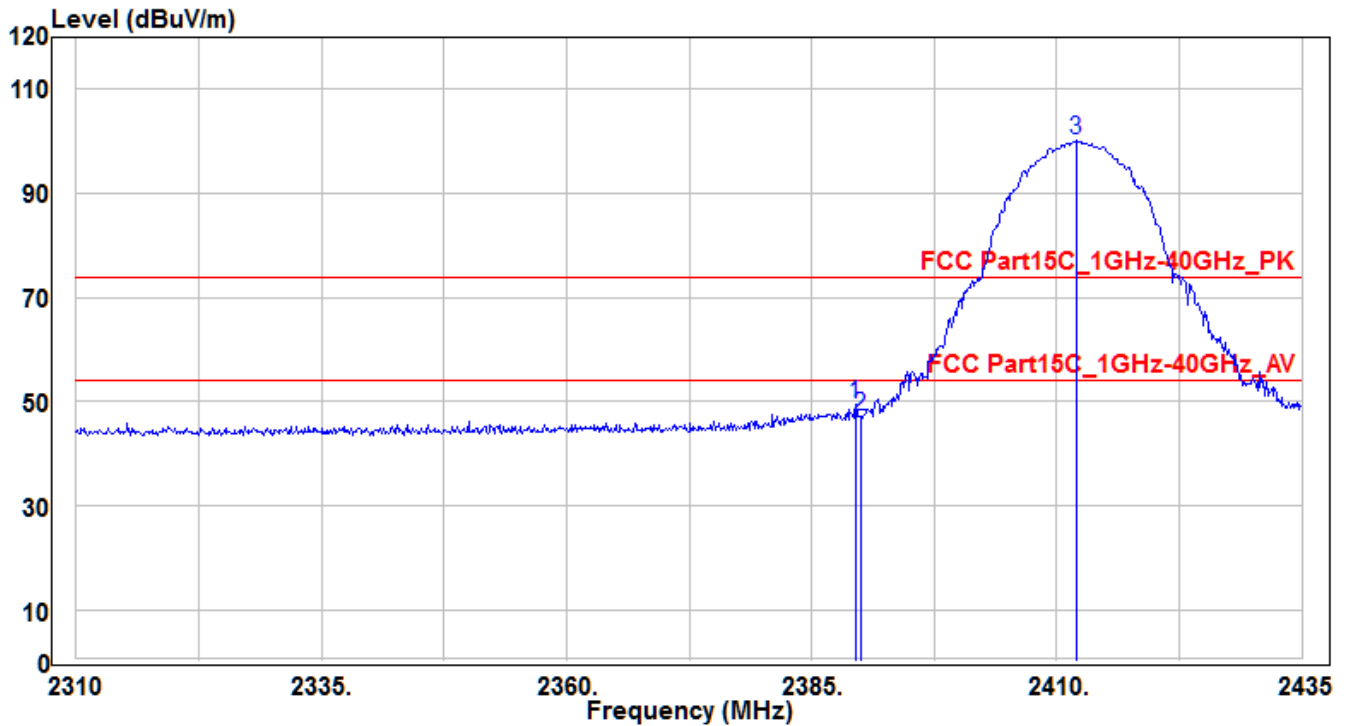


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2389.5          | 51.92          | -2.36    | 49.56                | -24.44      | 74             | 255         | 130         | Peak              |
| 2  |   | 2390            | 49.59          | -2.36    | 47.23                | -26.77      | 74             | 255         | 130         | Peak              |
| 3  |   | 2412            | 102.39         | -2.27    | 100.12               | 26.12       | 74             | 255         | 130         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

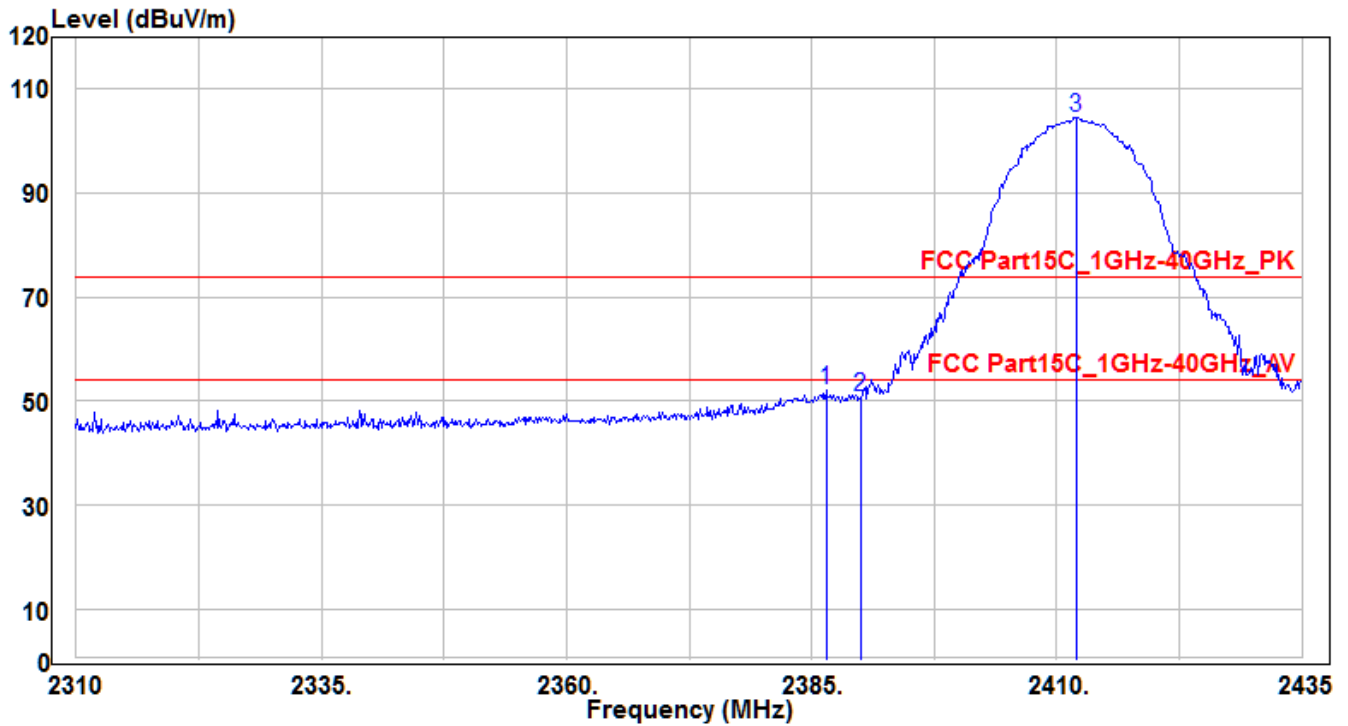


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.5          | 54.55          | -2.38    | 52.17                | -21.83      | 74             | 180         | 150         | Peak              |
| 2  |   | 2390            | 53.22          | -2.36    | 50.86                | -23.14      | 74             | 180         | 150         | Peak              |
| 3  |   | 2412            | 106.8          | -2.27    | 104.53               | 30.53       | 74             | 180         | 150         | Peak              |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

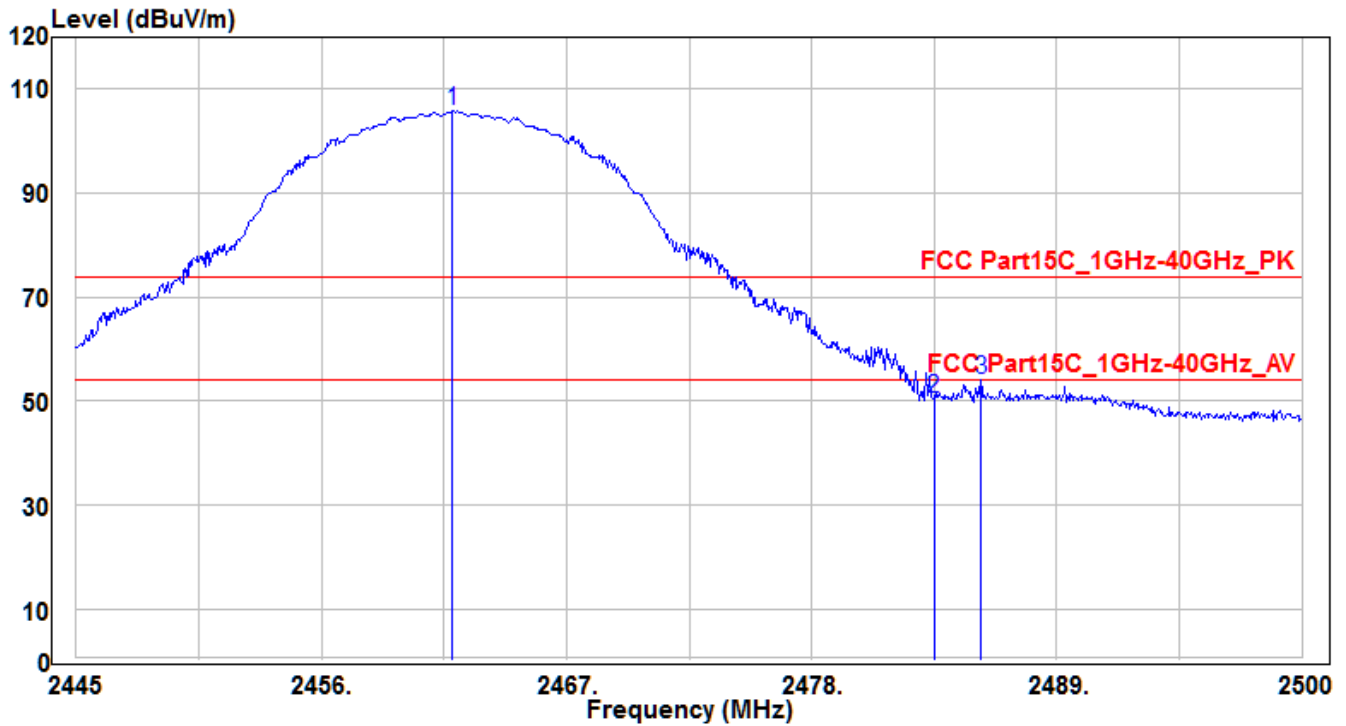


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2461.885        | 107.86         | -2.07    | 105.79               | 31.79       | 74             | 340         | 130         | Peak              |
| 2  | 2483.5          | 52.43          | -1.99    | 50.44                | -23.56      | 74             | 340         | 130         | Peak              |
| 3  | * 2485.59       | 56.09          | -1.98    | 54.11                | -19.89      | 74             | 340         | 130         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

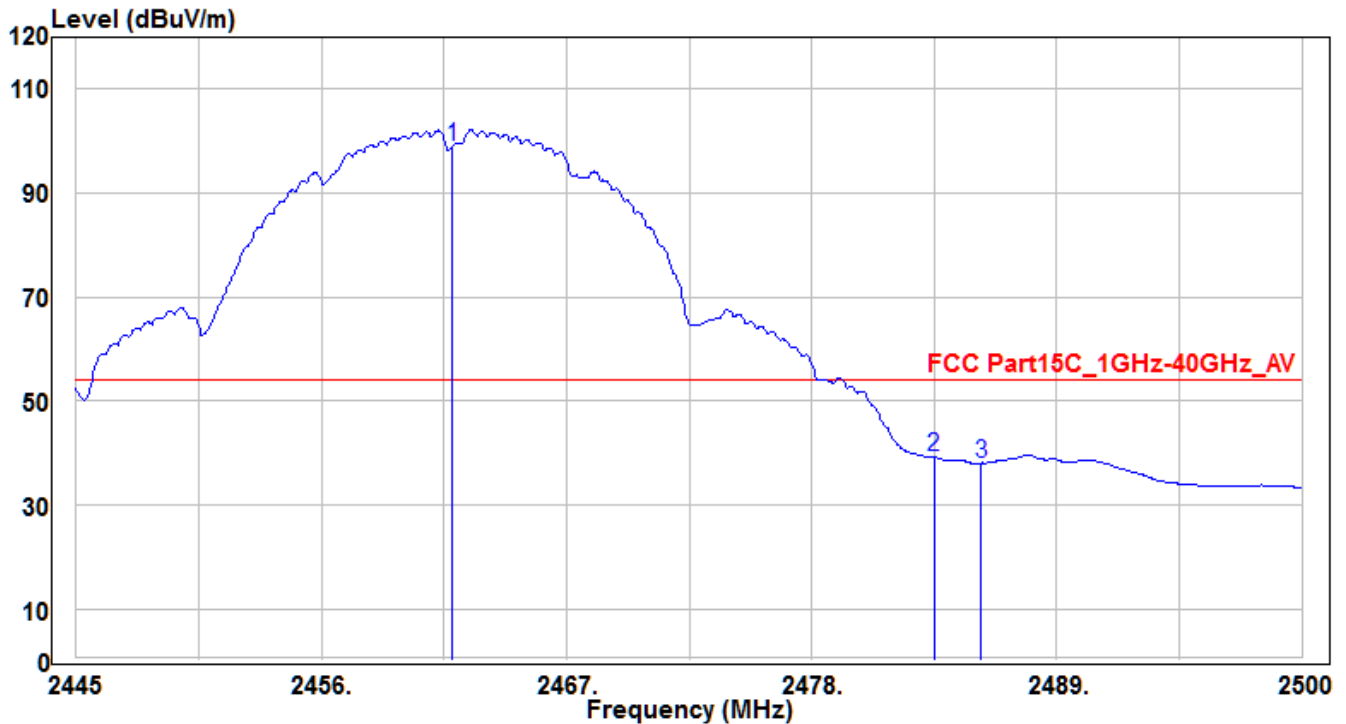


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2461.885        | 101.13         | -2.07    | 99.06                | 45.06       | 54             | 340         | 130         | Average           |
| 2  | * 2483.5        | 41.12          | -1.99    | 39.13                | -14.87      | 54             | 340         | 130         | Average           |
| 3  | 2485.59         | 40.04          | -1.98    | 38.06                | -15.94      | 54             | 340         | 130         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

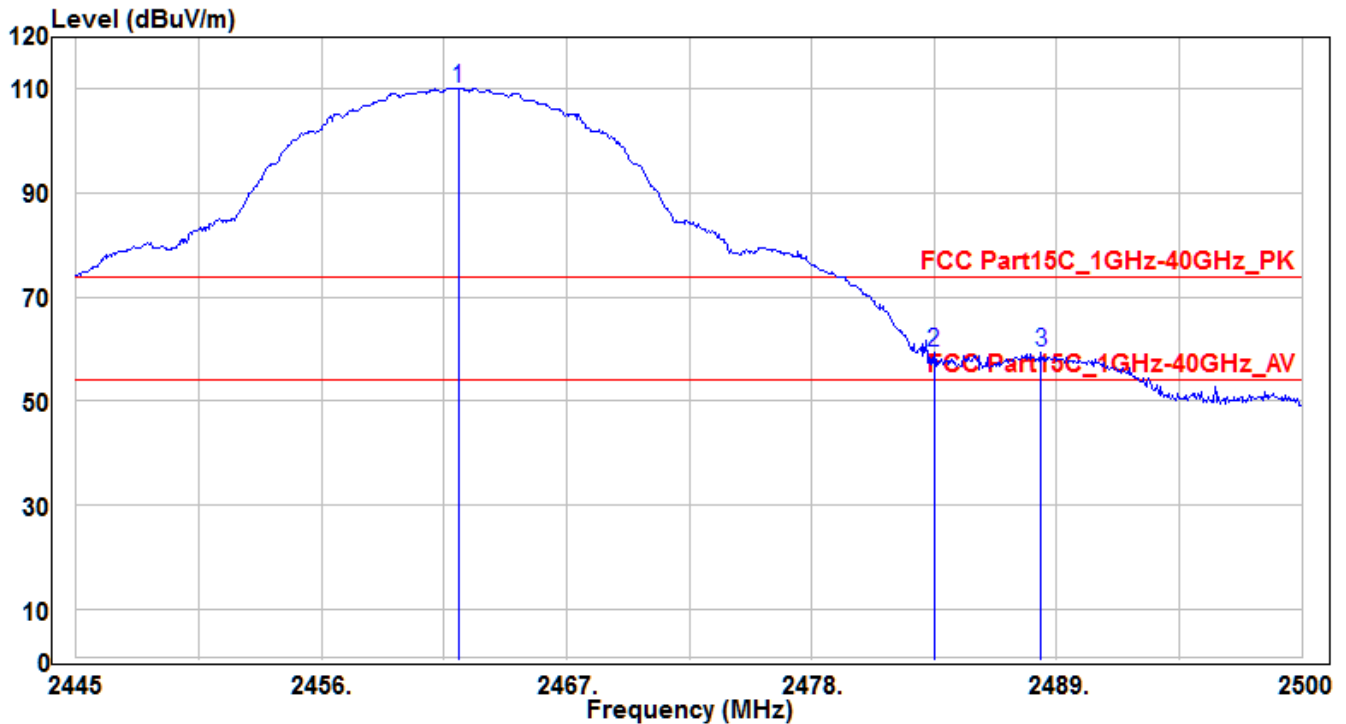


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2462.16         | 112.3          | -2.07    | 110.23               | 36.23       | 74             | 200         | 150         | Peak              |
| 2  | * 2483.5        | 61.34          | -1.99    | 59.35                | -14.65      | 74             | 200         | 150         | Peak              |
| 3  | 2488.285        | 61.21          | -1.97    | 59.24                | -14.76      | 74             | 200         | 150         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE1-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

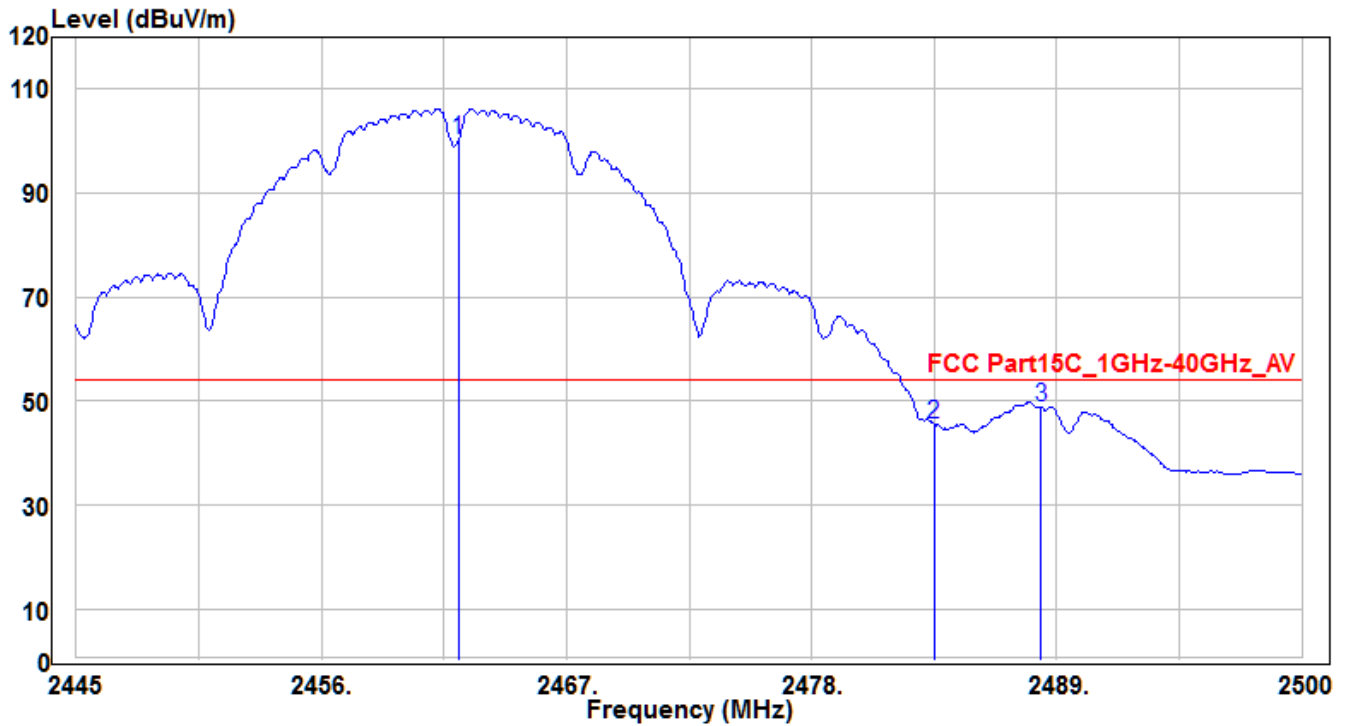


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2462.16         | 102.14         | -2.07    | 100.07               | 46.07       | 54             | 200         | 150         | Average           |
| 2  | 2483.5          | 47.59          | -1.99    | 45.6                 | -8.4        | 54             | 200         | 150         | Average           |
| 3  | * 2488.285      | 50.79          | -1.97    | 48.82                | -5.18       | 54             | 200         | 150         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

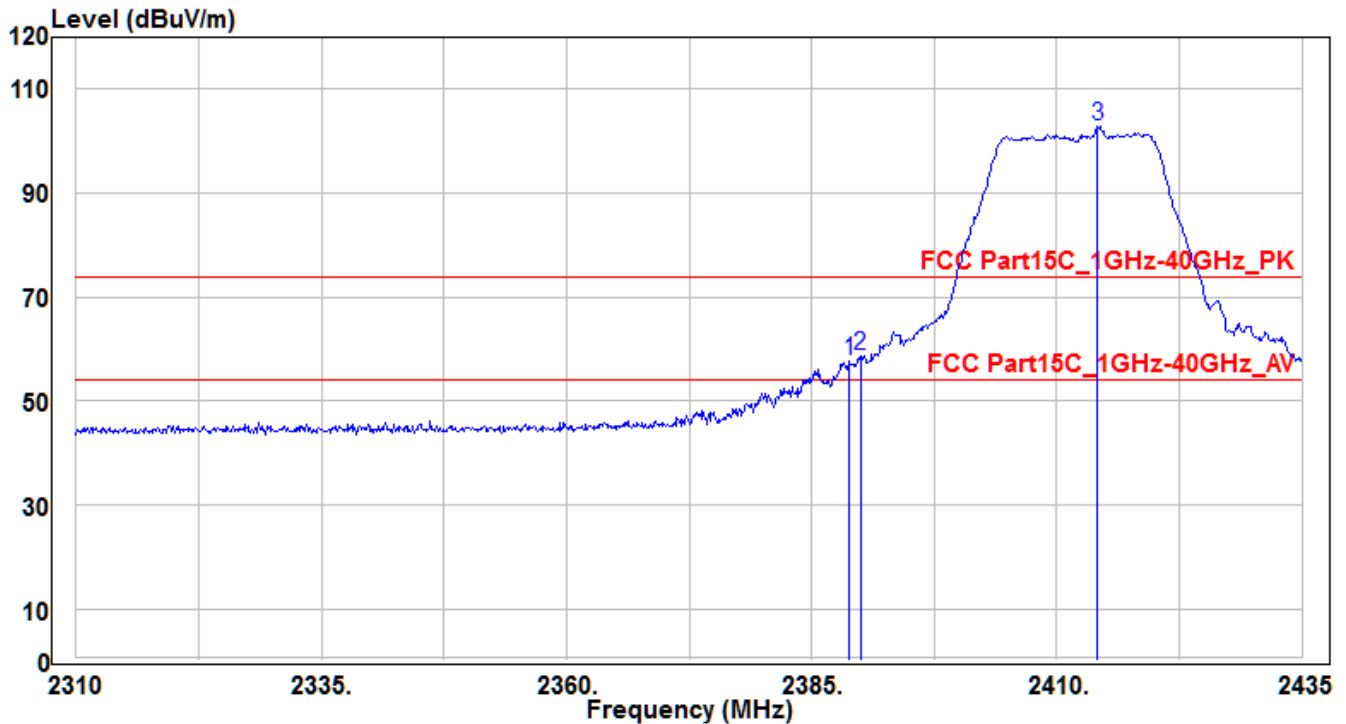


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.875        | 60.13          | -2.36    | 57.77                | -16.23      | 74             | 250         | 130         | Peak              |
| 2  | * 2390          | 61.15          | -2.36    | 58.79                | -15.21      | 74             | 250         | 130         | Peak              |
| 3  | 2414.125        | 105.06         | -2.26    | 102.8                | 28.8        | 74             | 250         | 130         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

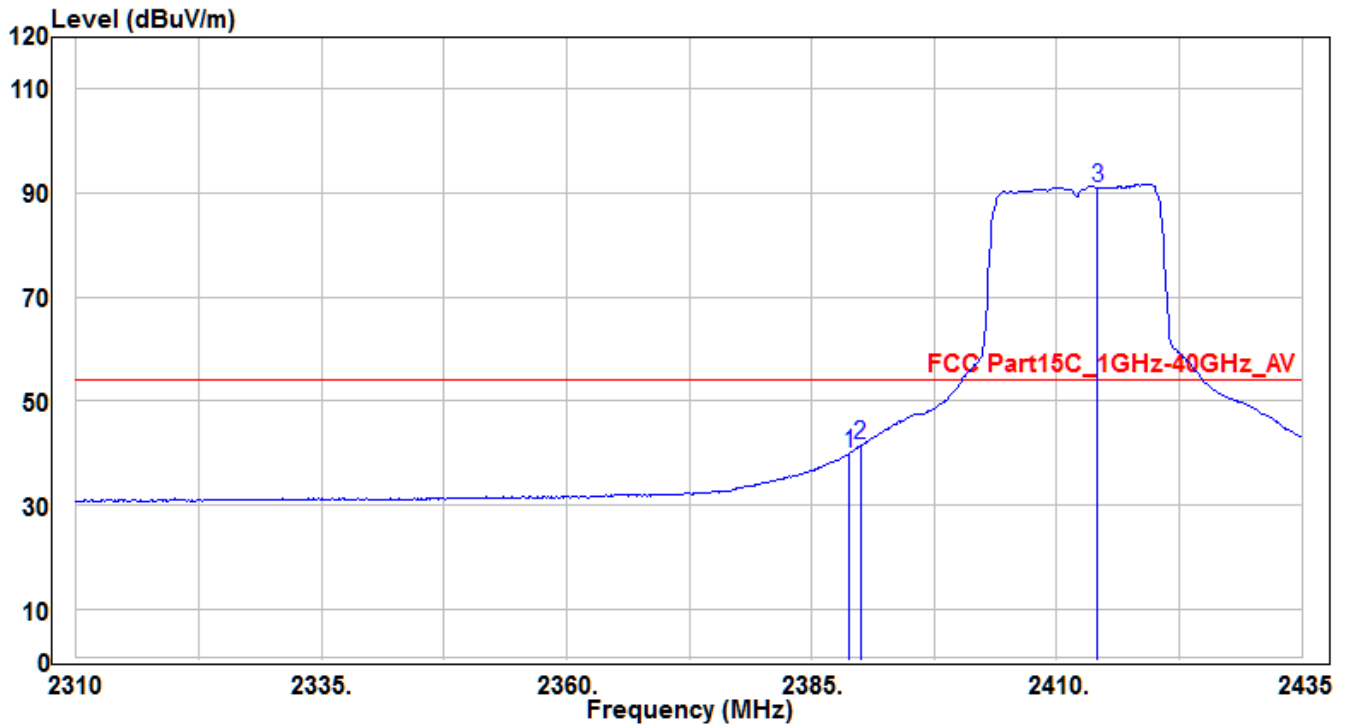


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.875        | 42.3           | -2.36    | 39.94                | -14.06      | 54             | 250         | 130         | Average           |
| 2  | * 2390          | 43.85          | -2.36    | 41.49                | -12.51      | 54             | 250         | 130         | Average           |
| 3  | 2414.125        | 93.12          | -2.26    | 90.86                | 36.86       | 54             | 250         | 130         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

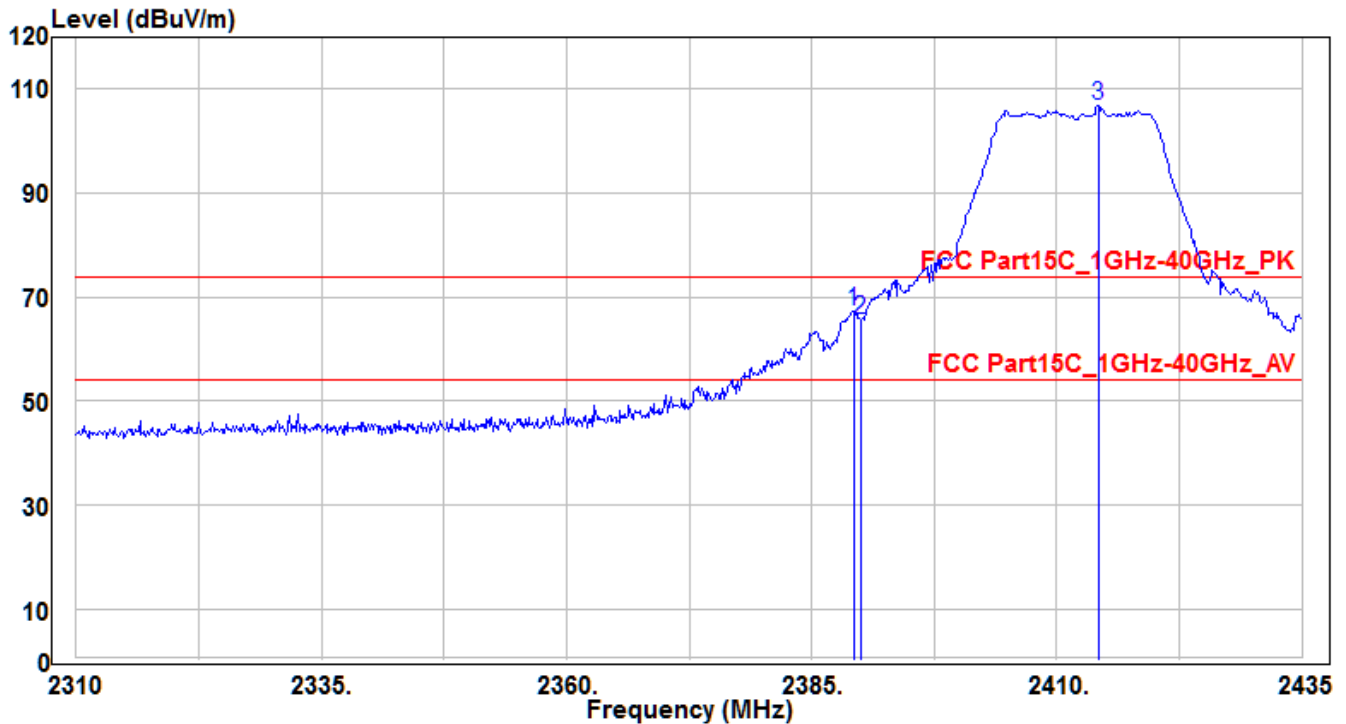


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2389.25         | 69.72          | -2.36    | 67.36                | -6.64       | 74             | 180         | 150         | Peak              |
| 2  |   | 2390            | 68.13          | -2.36    | 65.77                | -8.23       | 74             | 180         | 150         | Peak              |
| 3  |   | 2414.25         | 109.2          | -2.26    | 106.94               | 32.94       | 74             | 180         | 150         | Peak              |

Note: The EUT Power by Notebook PC

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH01_Ant 0          | Test Voltage     | AC 120V/60Hz |

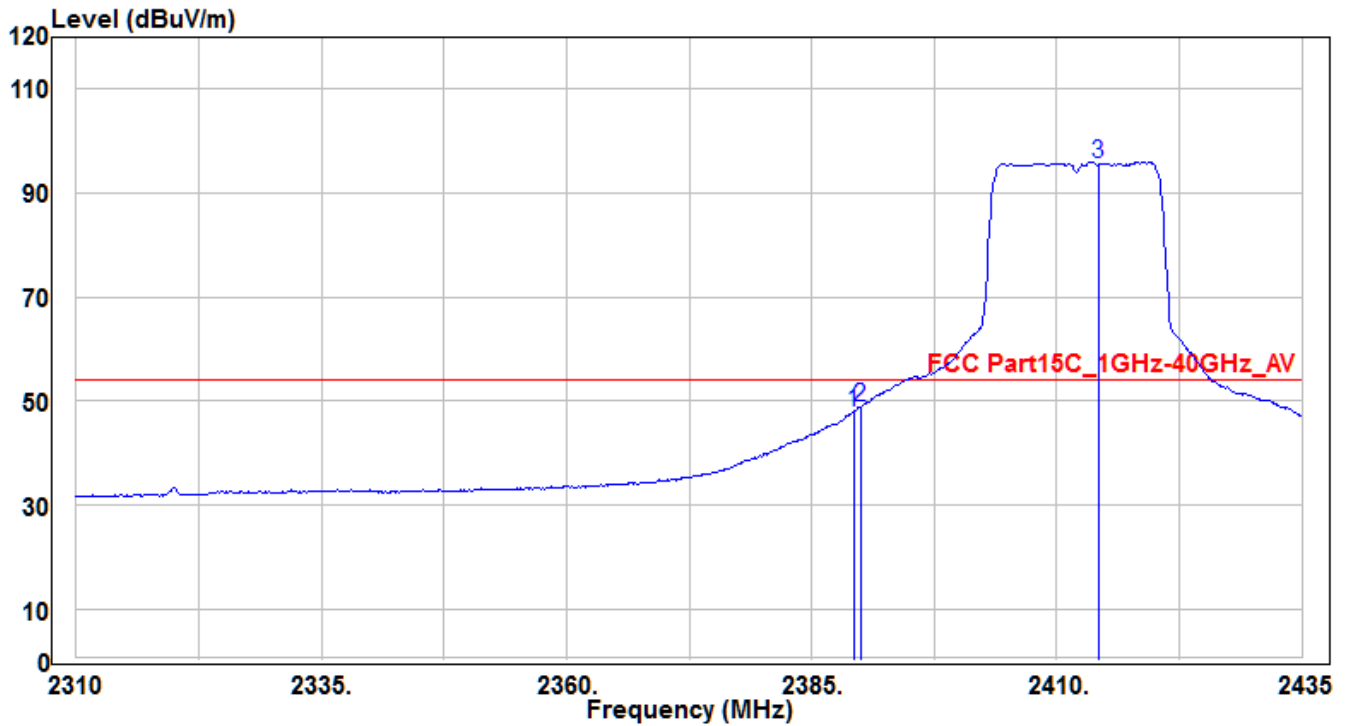


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2389.25         | 50.12          | -2.36    | 47.76                | -6.24       | 54             | 180         | 150         | Average           |
| 2  | * 2390          | 51.29          | -2.36    | 48.93                | -5.07       | 54             | 180         | 150         | Average           |
| 3  | 2414.25         | 97.77          | -2.26    | 95.51                | 41.51       | 54             | 180         | 150         | Average           |

Note: The EUT Power by Notebook PC

- " \* " means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

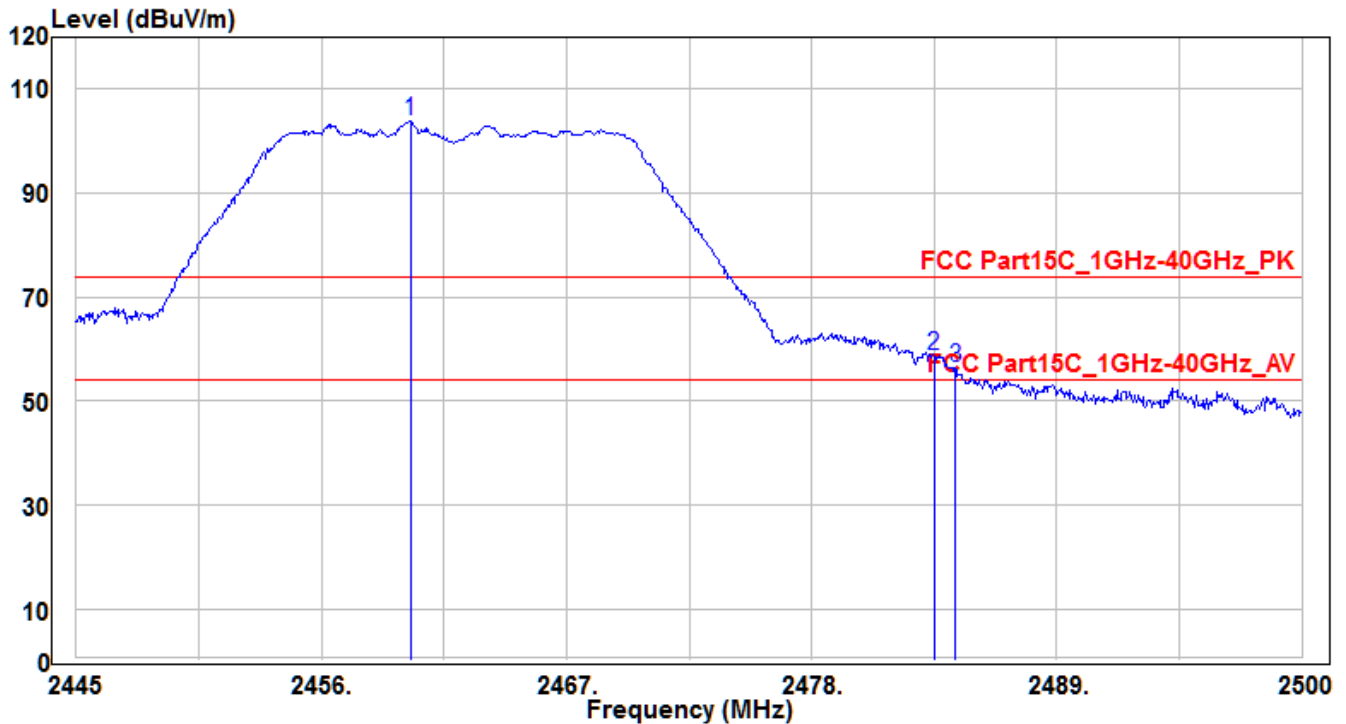


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.015        | 105.93         | -2.08    | 103.85               | 29.85       | 74             | 340         | 130         | Peak              |
| 2  | * 2483.5        | 60.72          | -1.99    | 58.73                | -15.27      | 74             | 340         | 130         | Peak              |
| 3  | 2484.435        | 58.51          | -1.99    | 56.52                | -17.48      | 74             | 340         | 130         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

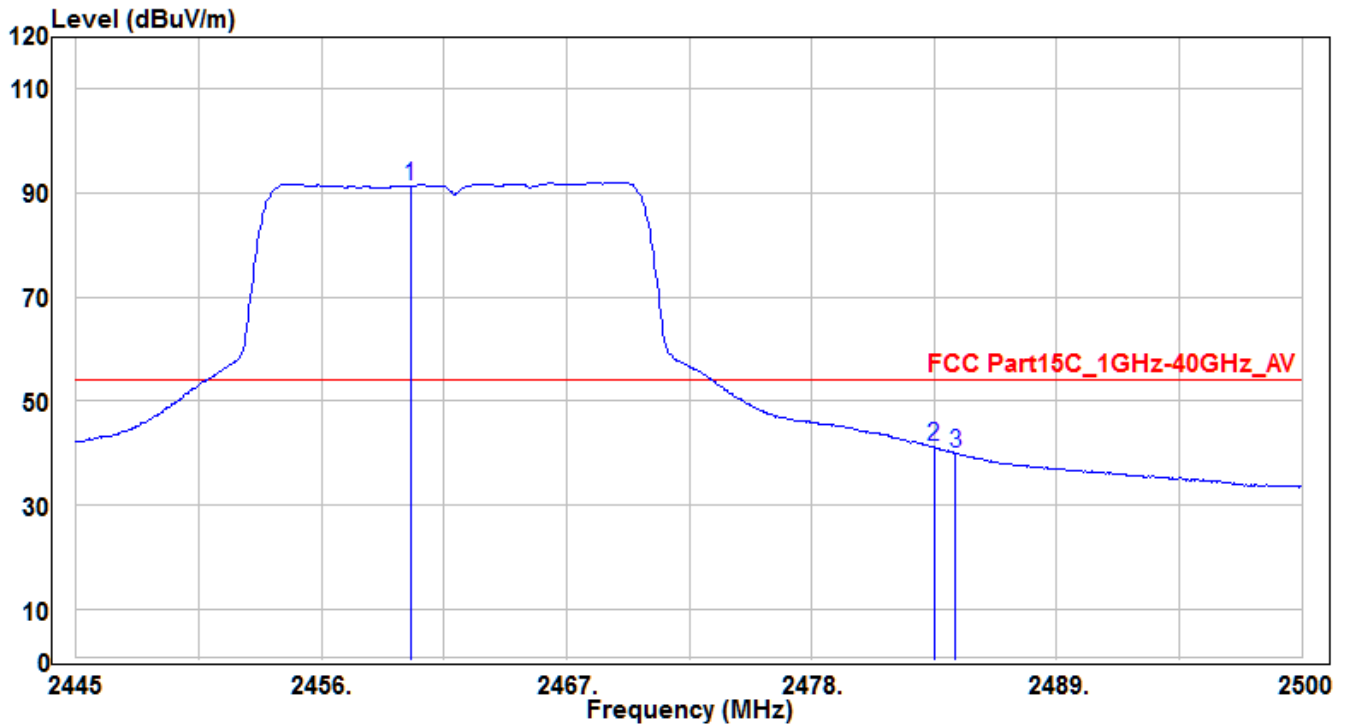


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.015        | 93.38          | -2.08    | 91.3                 | 37.3        | 54             | 340         | 130         | Average           |
| 2  | * 2483.5        | 43.18          | -1.99    | 41.19                | -12.81      | 54             | 340         | 130         | Average           |
| 3  | 2484.435        | 41.98          | -1.99    | 39.99                | -14.01      | 54             | 340         | 130         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

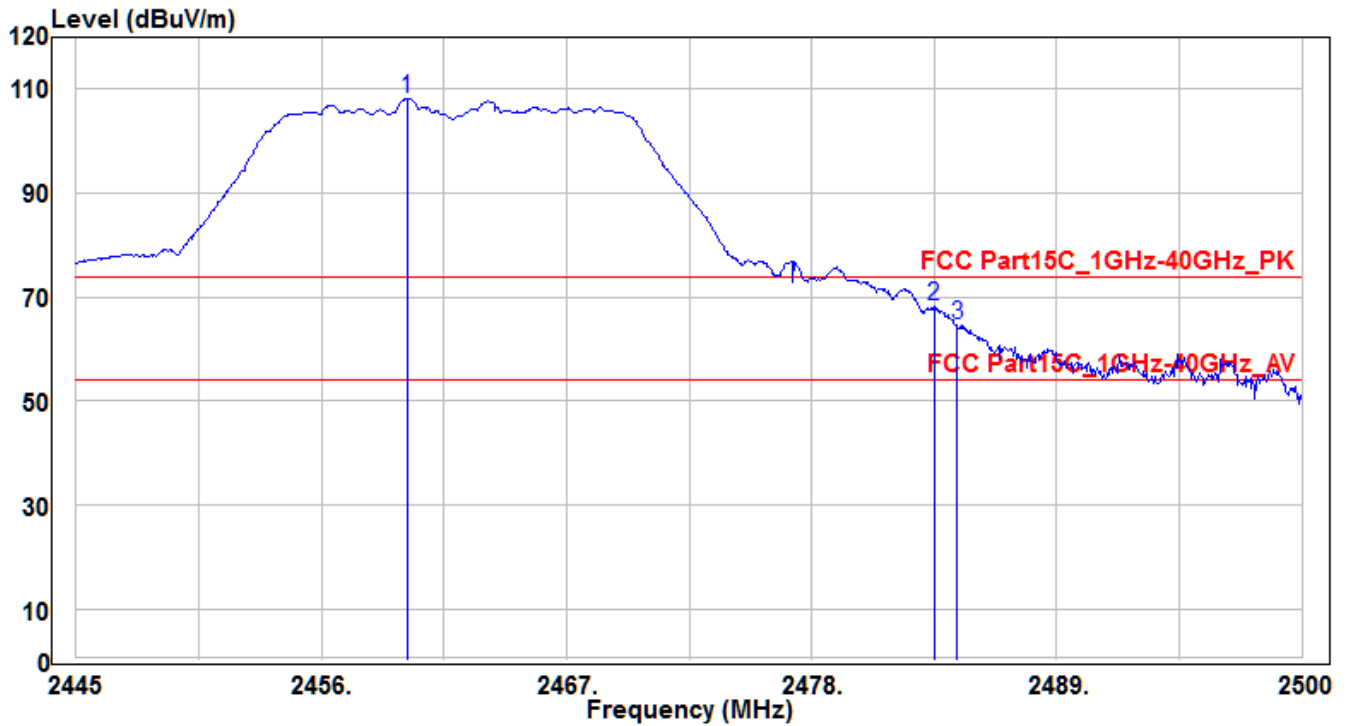


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2459.85         | 110.29         | -2.08    | 108.21               | 34.21       | 74             | 195         | 220         | Peak              |
| 2  | * 2483.5        | 70.15          | -1.99    | 68.16                | -5.84       | 74             | 195         | 220         | Peak              |
| 3  | 2484.545        | 66.71          | -1.99    | 64.72                | -9.28       | 74             | 195         | 220         | Peak              |

Note: The EUT Power by Notebook PC

- " \* " means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE2-CH11_Ant 0          | Test Voltage     | AC 120V/60Hz |

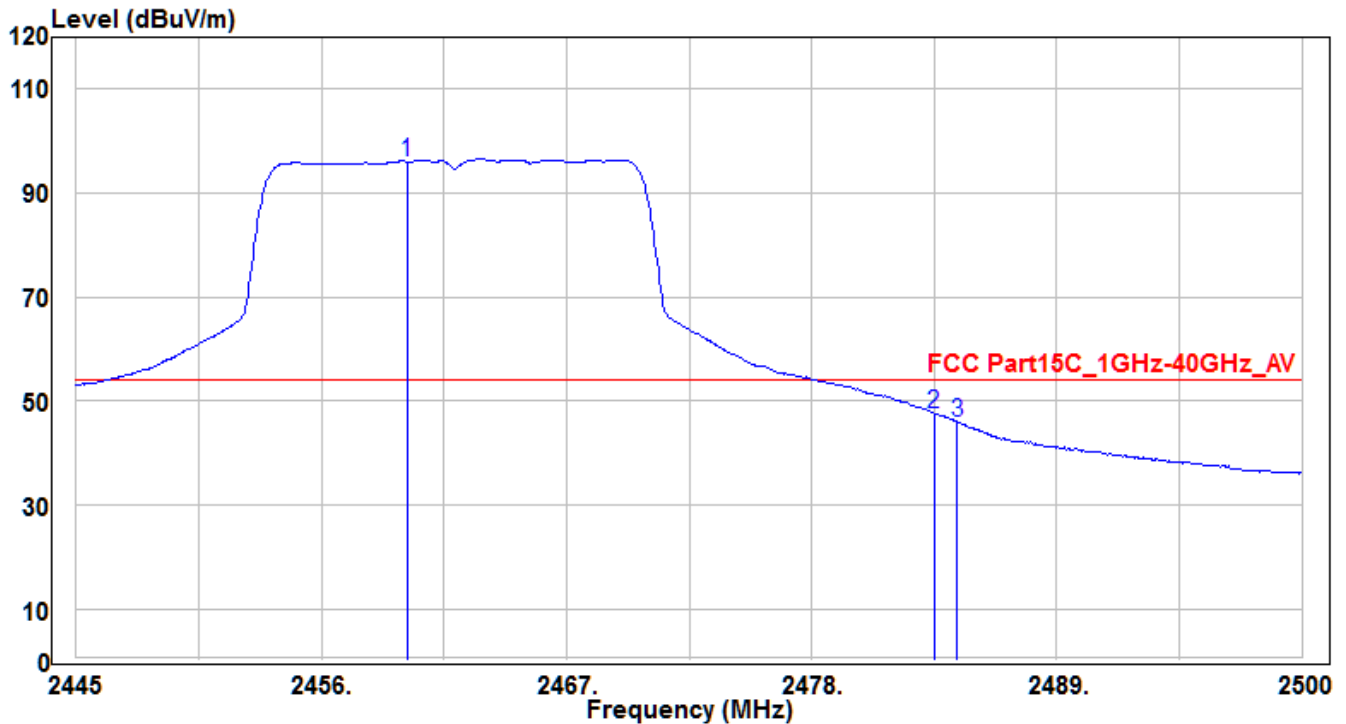


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2459.85         | 98.12          | -2.08    | 96.04                | 42.04       | 54             | 195         | 220         | Average           |
| 2  | * 2483.5        | 49.58          | -1.99    | 47.59                | -6.41       | 54             | 195         | 220         | Average           |
| 3  | 2484.545        | 47.97          | -1.99    | 45.98                | -8.02       | 54             | 195         | 220         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

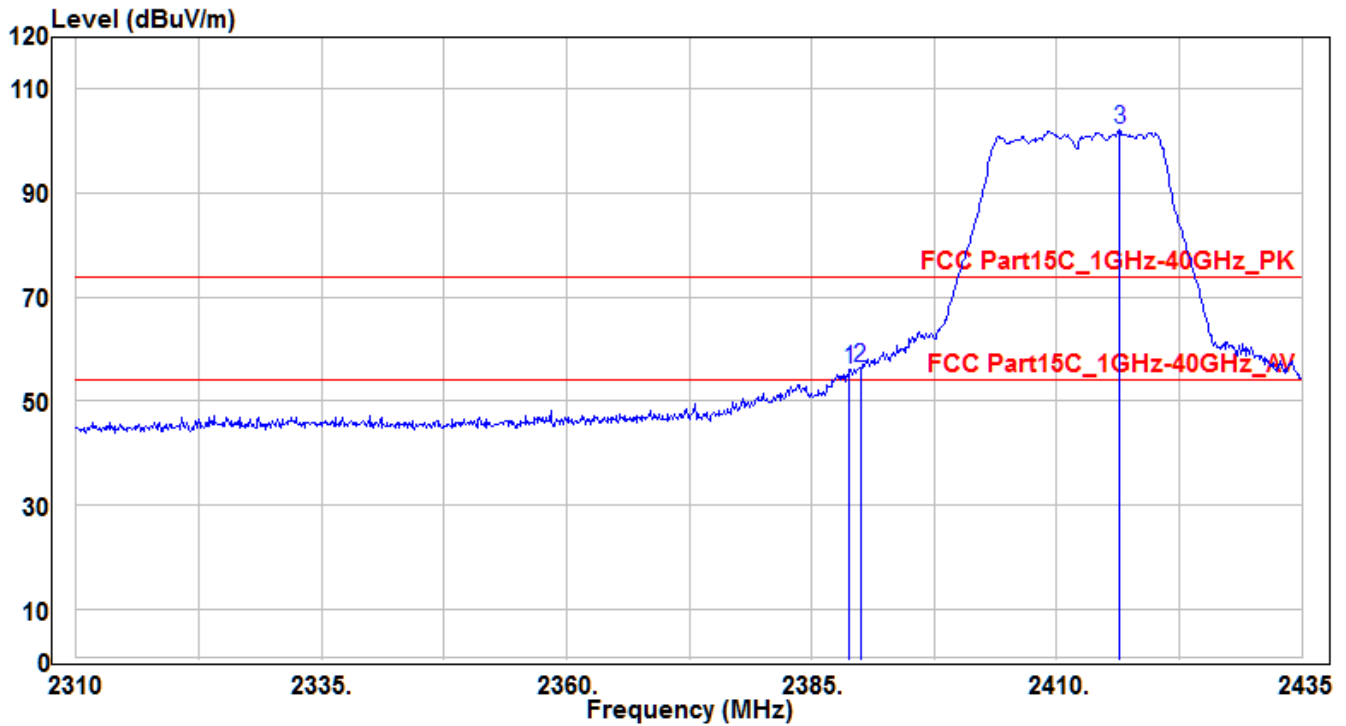


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.875        | 58.41          | -2.36    | 56.05                | -17.95      | 74             | 180         | 175         | Peak              |
| 2  | * 2390          | 58.86          | -2.36    | 56.5                 | -17.5       | 74             | 180         | 175         | Peak              |
| 3  | 2416.375        | 104.37         | -2.25    | 102.12               | 28.12       | 74             | 180         | 175         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

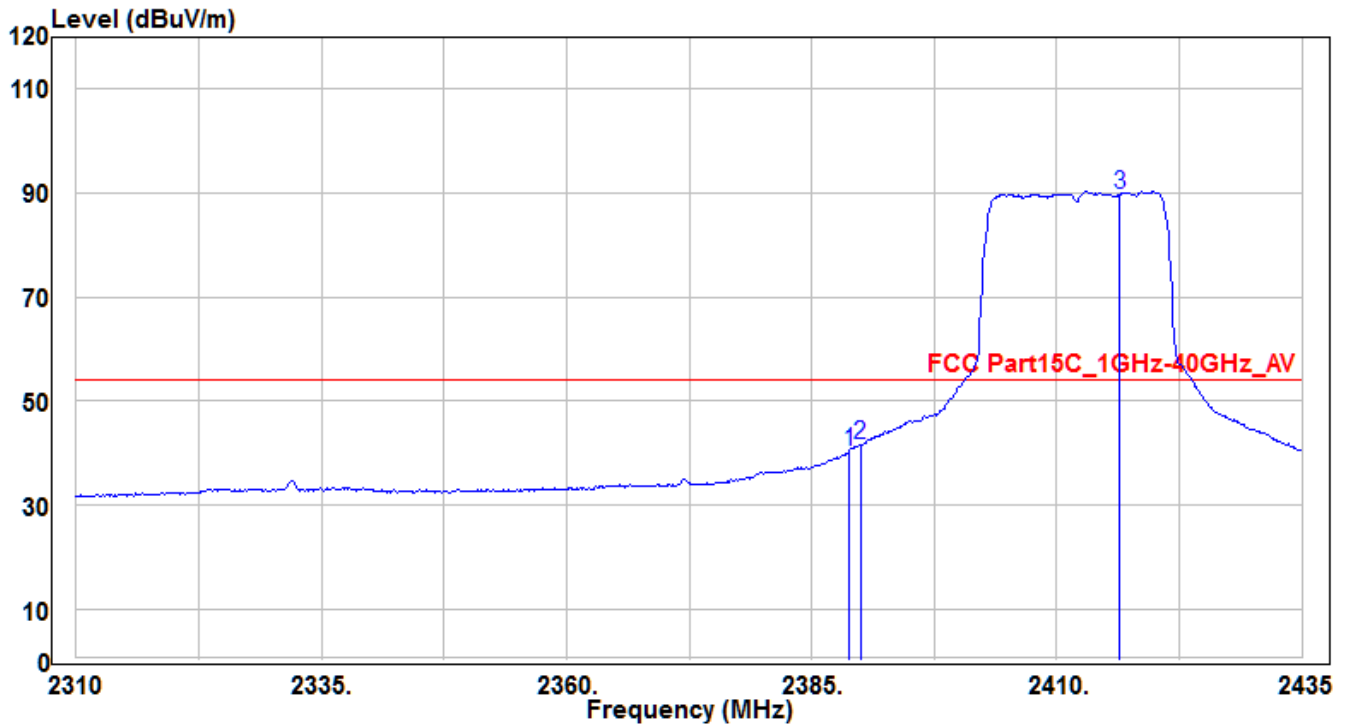


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.875        | 42.59          | -2.36    | 40.23                | -13.77      | 54             | 180         | 175         | Average           |
| 2  | * 2390          | 44.07          | -2.36    | 41.71                | -12.29      | 54             | 180         | 175         | Average           |
| 3  | 2416.375        | 91.87          | -2.25    | 89.62                | 35.62       | 54             | 180         | 175         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

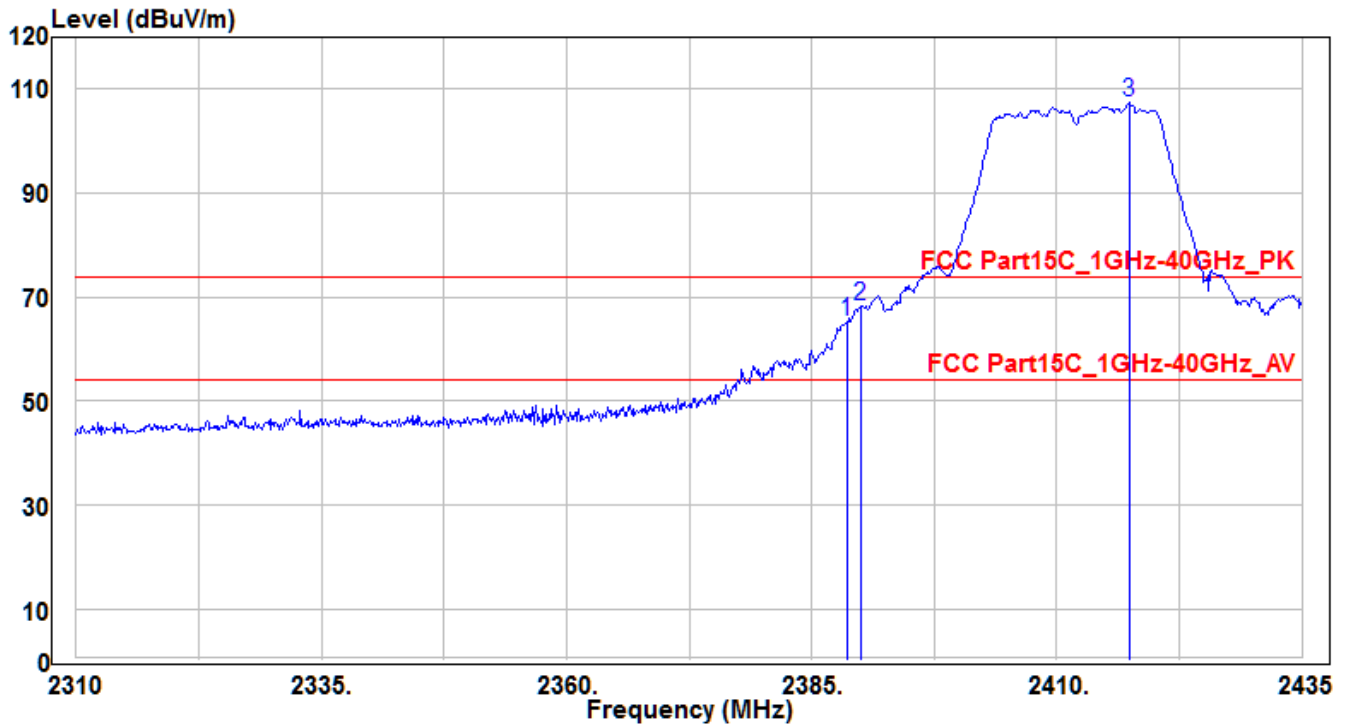


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.625        | 67.62          | -2.36    | 65.26                | -8.74       | 74             | 150         | 140         | Peak              |
| 2  | * 2390          | 70.56          | -2.36    | 68.2                 | -5.8        | 74             | 150         | 140         | Peak              |
| 3  | 2417.375        | 109.61         | -2.25    | 107.36               | 33.36       | 74             | 150         | 140         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH01_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

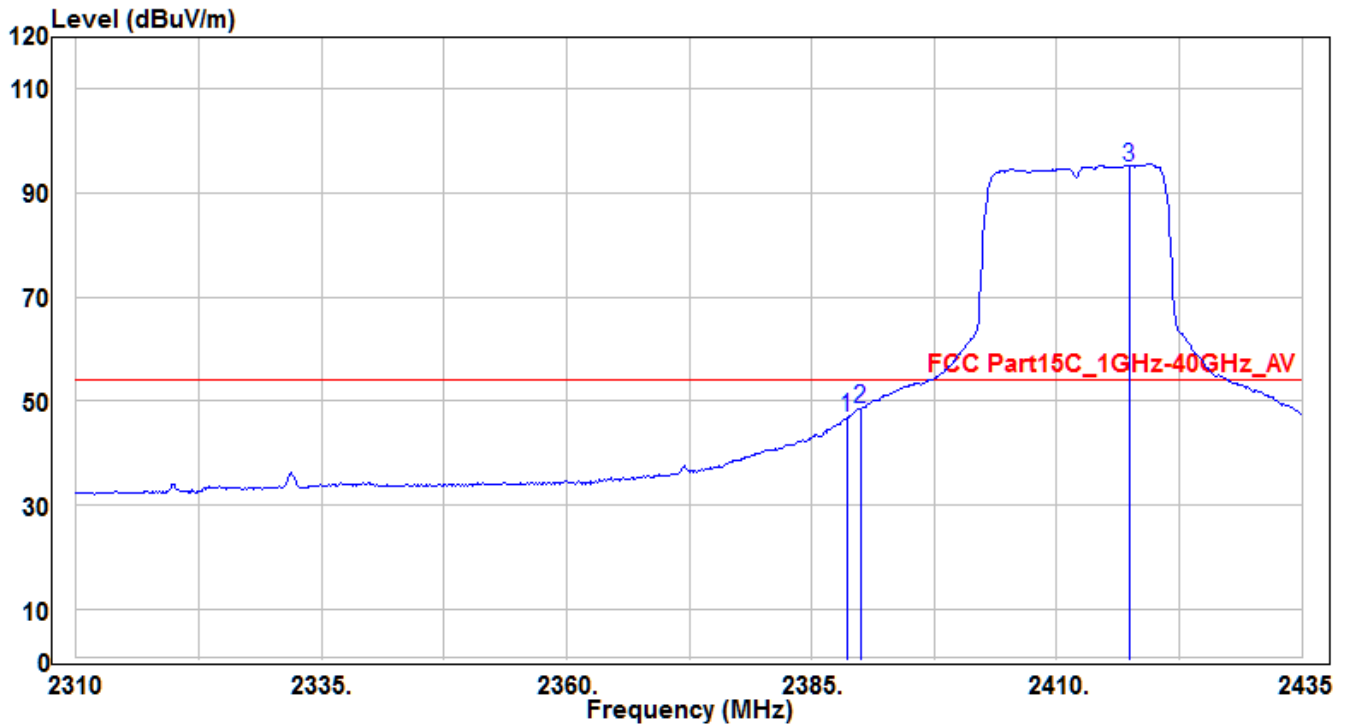


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.625        | 49.11          | -2.36    | 46.75                | -7.25       | 54             | 150         | 140         | Average           |
| 2  | * 2390          | 50.95          | -2.36    | 48.59                | -5.41       | 54             | 150         | 140         | Average           |
| 3  | 2417.375        | 97.29          | -2.25    | 95.04                | 41.04       | 54             | 150         | 140         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

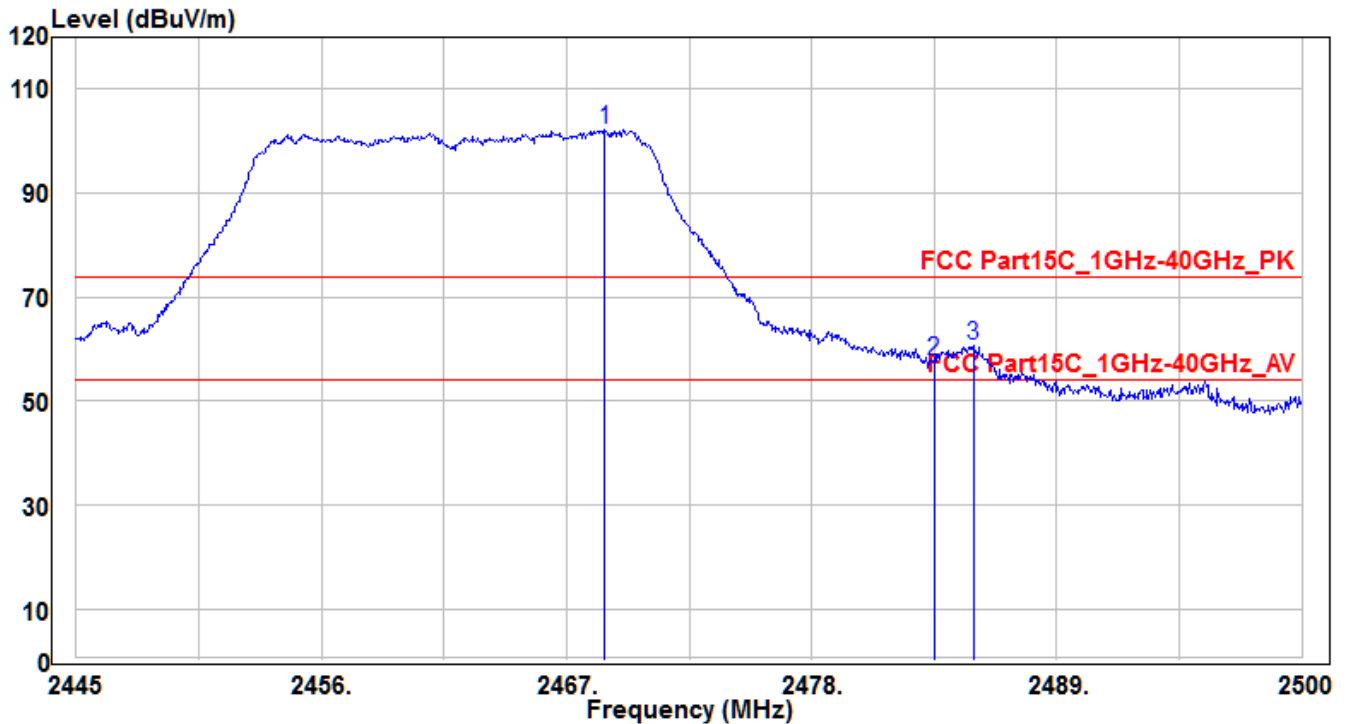


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2468.705        | 104.2          | -2.04    | 102.16               | 28.16       | 74             | 165         | 345         | Peak              |
| 2  | 2483.5          | 59.64          | -1.99    | 57.65                | -16.35      | 74             | 165         | 345         | Peak              |
| 3  | * 2485.26       | 62.73          | -1.98    | 60.75                | -13.25      | 74             | 165         | 345         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

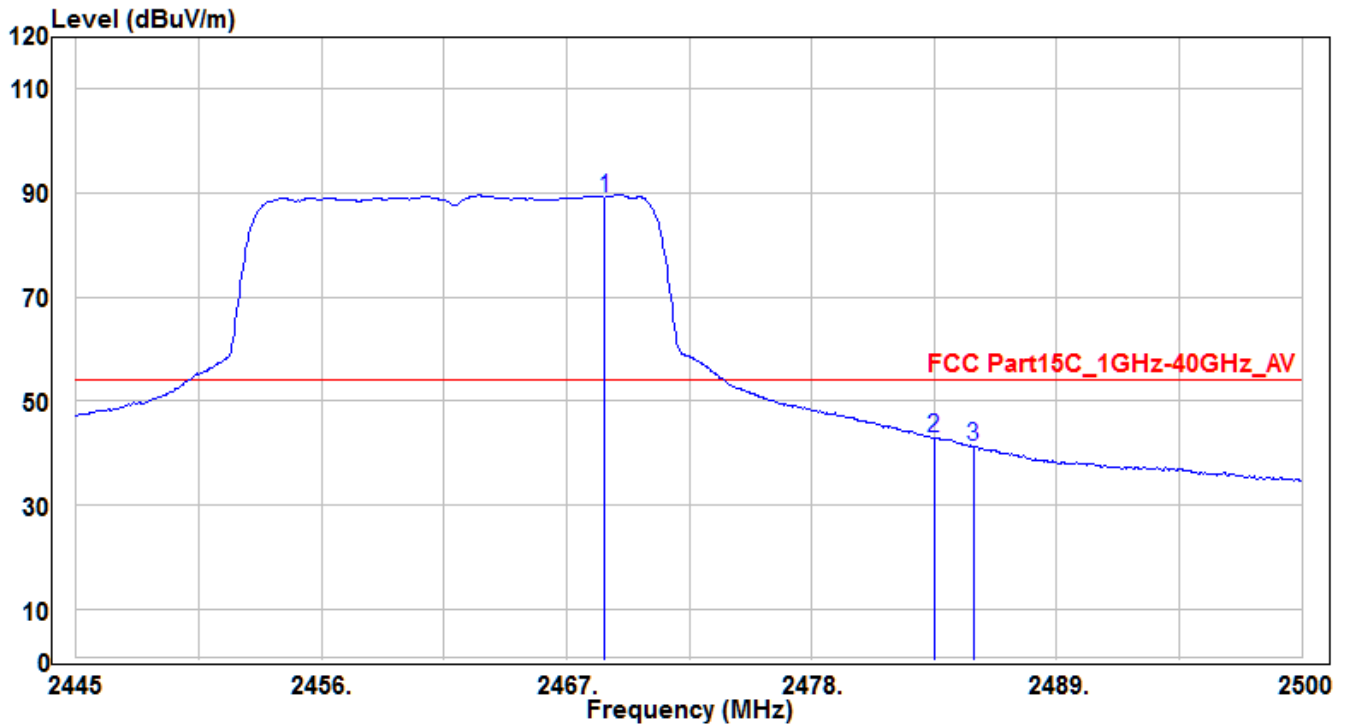


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2468.705        | 91.2           | -2.04    | 89.16                | 35.16       | 54             | 165         | 345         | Average           |
| 2  | * 2483.5        | 44.71          | -1.99    | 42.72                | -11.28      | 54             | 165         | 345         | Average           |
| 3  | 2485.26         | 43.25          | -1.98    | 41.27                | -12.73      | 54             | 165         | 345         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

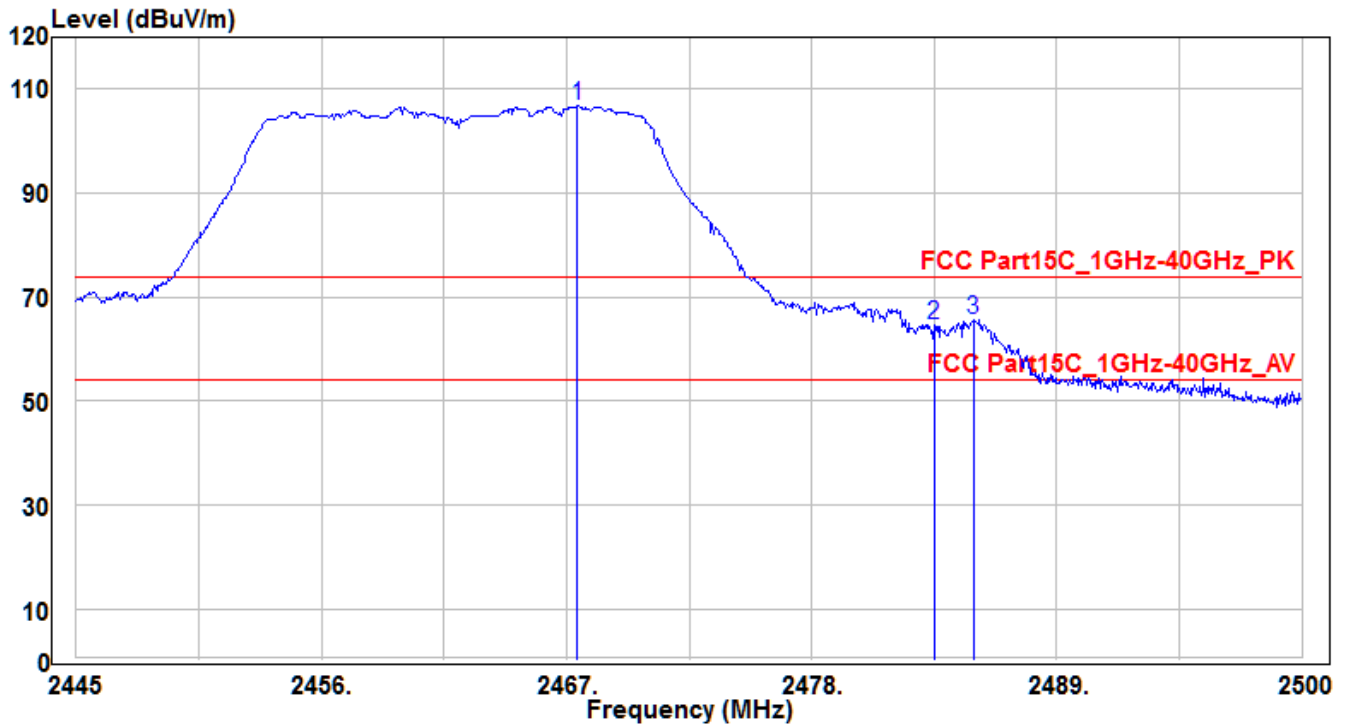


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2467.495        | 108.8          | -2.05    | 106.75               | 32.75       | 74             | 150         | 220         | Peak              |
| 2  | 2483.5          | 66.59          | -1.99    | 64.6                 | -9.4        | 74             | 150         | 220         | Peak              |
| 3  | * 2485.26       | 67.46          | -1.98    | 65.48                | -8.52       | 74             | 150         | 220         | Peak              |

Note: The EUT Power by Notebook PC

1. " \* " means the worst value in this measurement data .
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) .

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE3-CH11_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

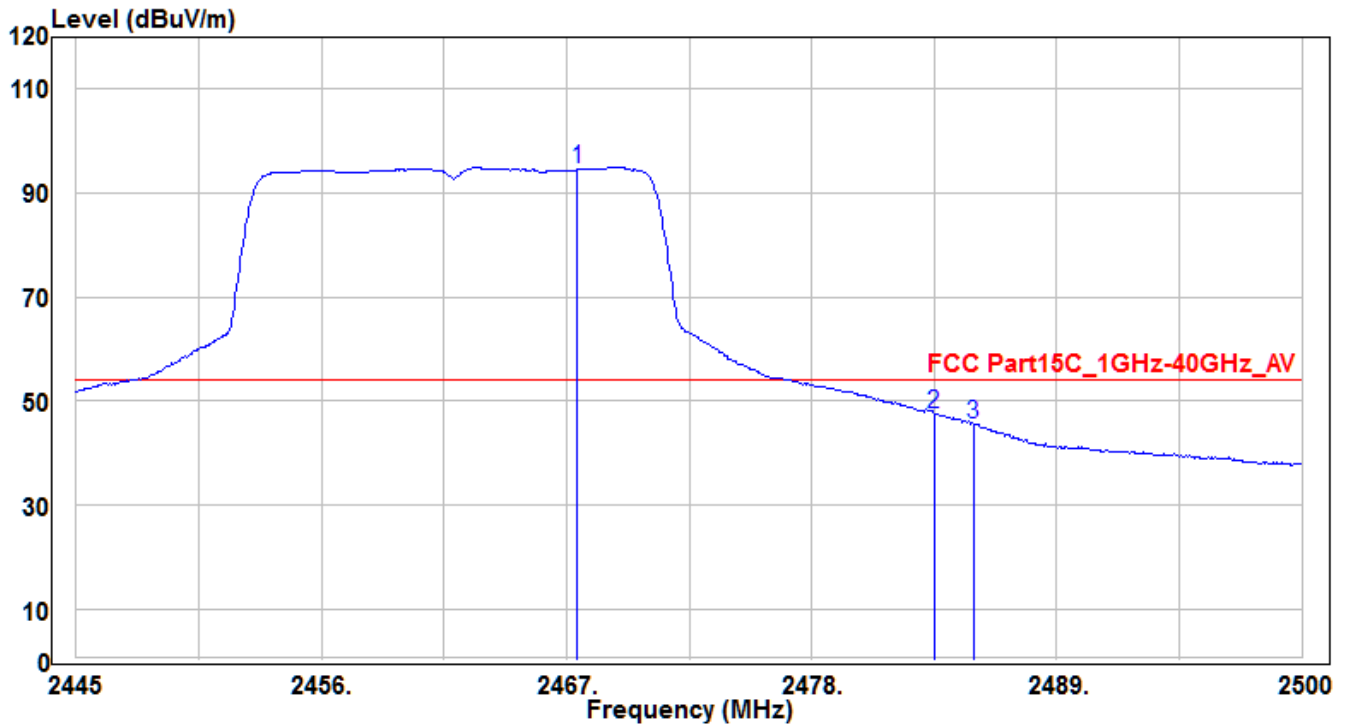


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2467.495        | 96.51          | -2.05    | 94.46                | 40.46       | 54             | 150         | 220         | Average           |
| 2  | * 2483.5        | 49.58          | -1.99    | 47.59                | -6.41       | 54             | 150         | 220         | Average           |
| 3  | 2485.26         | 47.48          | -1.98    | 45.5                 | -8.5        | 54             | 150         | 220         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

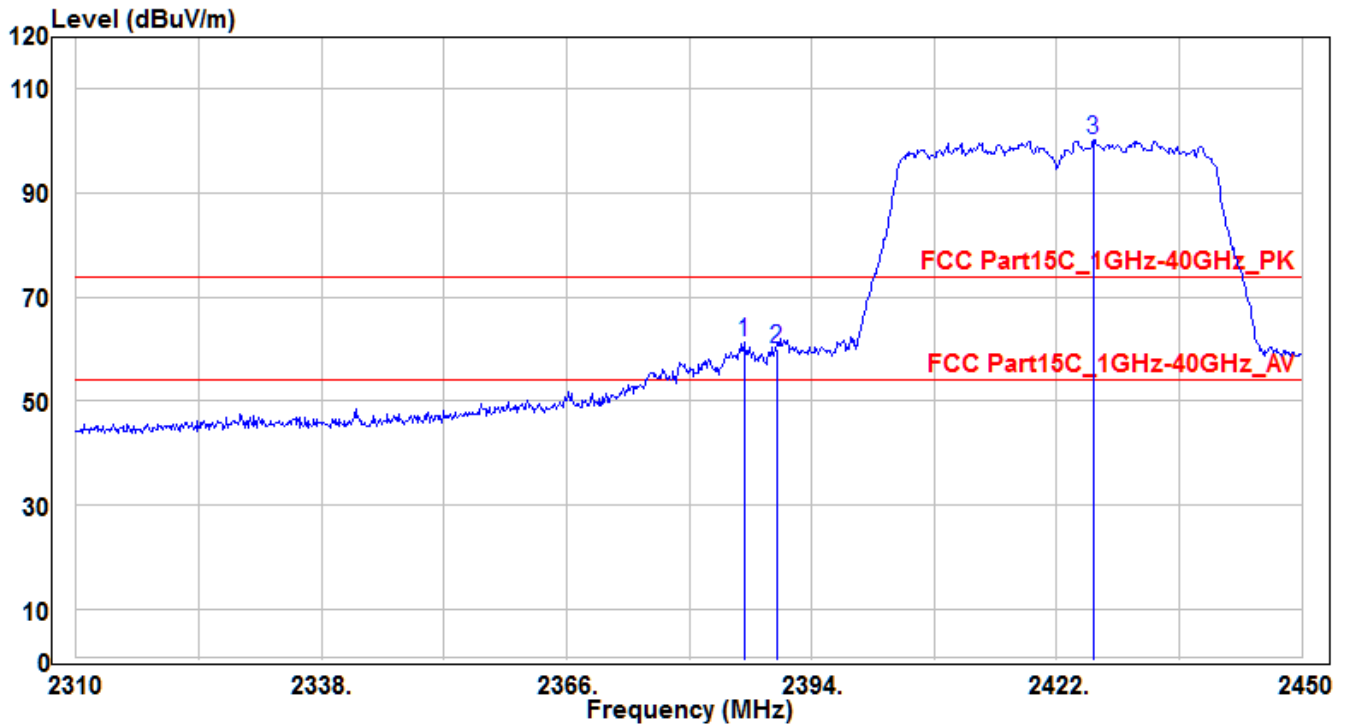


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.3          | 63.65          | -2.38    | 61.27                | -12.73      | 74             | 110         | 170         | Peak              |
| 2  |   | 2390            | 62.28          | -2.36    | 59.92                | -14.08      | 74             | 110         | 170         | Peak              |
| 3  |   | 2426.2          | 102.6          | -2.22    | 100.38               | 26.38       | 74             | 110         | 170         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Horizontal                | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

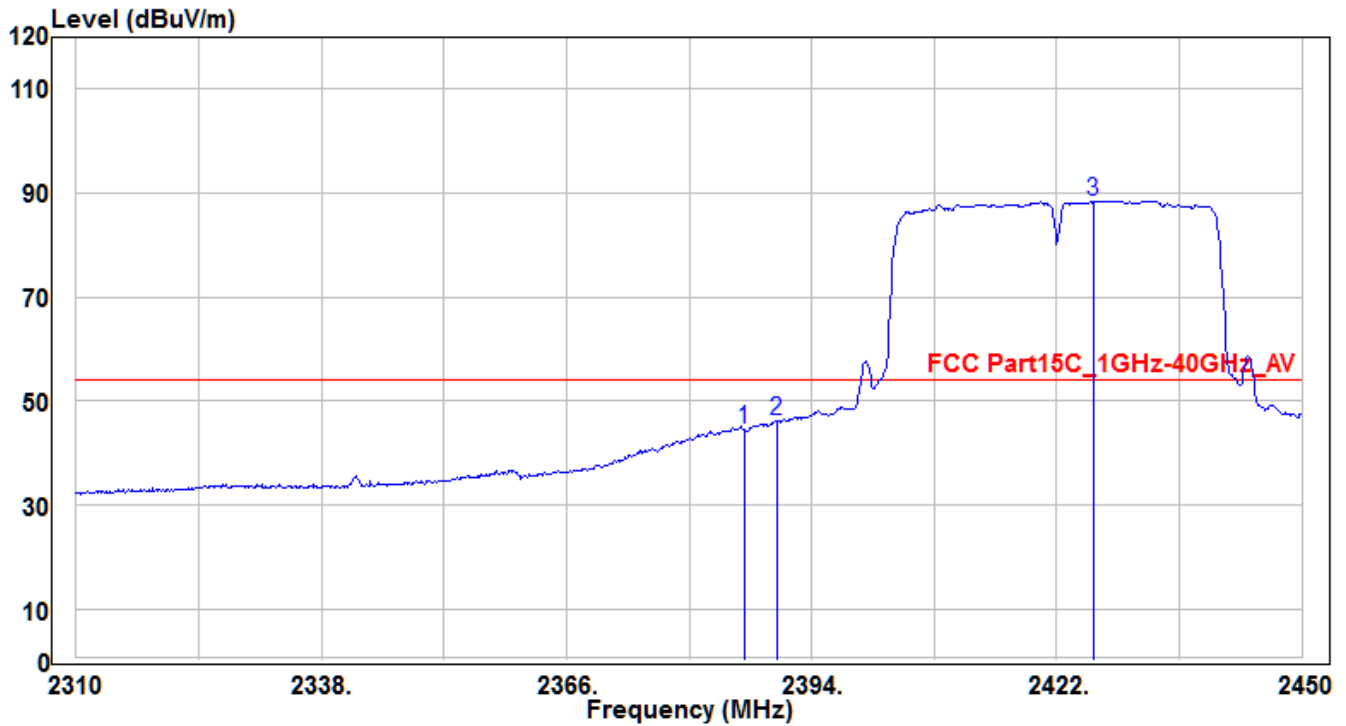


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2386.3          | 46.85          | -2.38    | 44.47                | -9.53       | 54             | 110         | 170         | Average           |
| 2  | * 2390          | 48.62          | -2.36    | 46.26                | -7.74       | 54             | 110         | 170         | Average           |
| 3  | 2426.2          | 90.7           | -2.22    | 88.48                | 34.48       | 54             | 110         | 170         | Average           |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

|           |                           |                  |              |
|-----------|---------------------------|------------------|--------------|
| EUT       | CT1200 (Internal Antenna) | Test Date        | 2018/6/13    |
| Factor    | BBHA 9120D (1GHz~18GHz)   | Temp. / Humidity | 21°C / 57%   |
| Polarity  | Vertical                  | Site / Engineer  | AC1 / Peter  |
| Test Mode | MODE4-CH03_Ant 0+1        | Test Voltage     | AC 120V/60Hz |

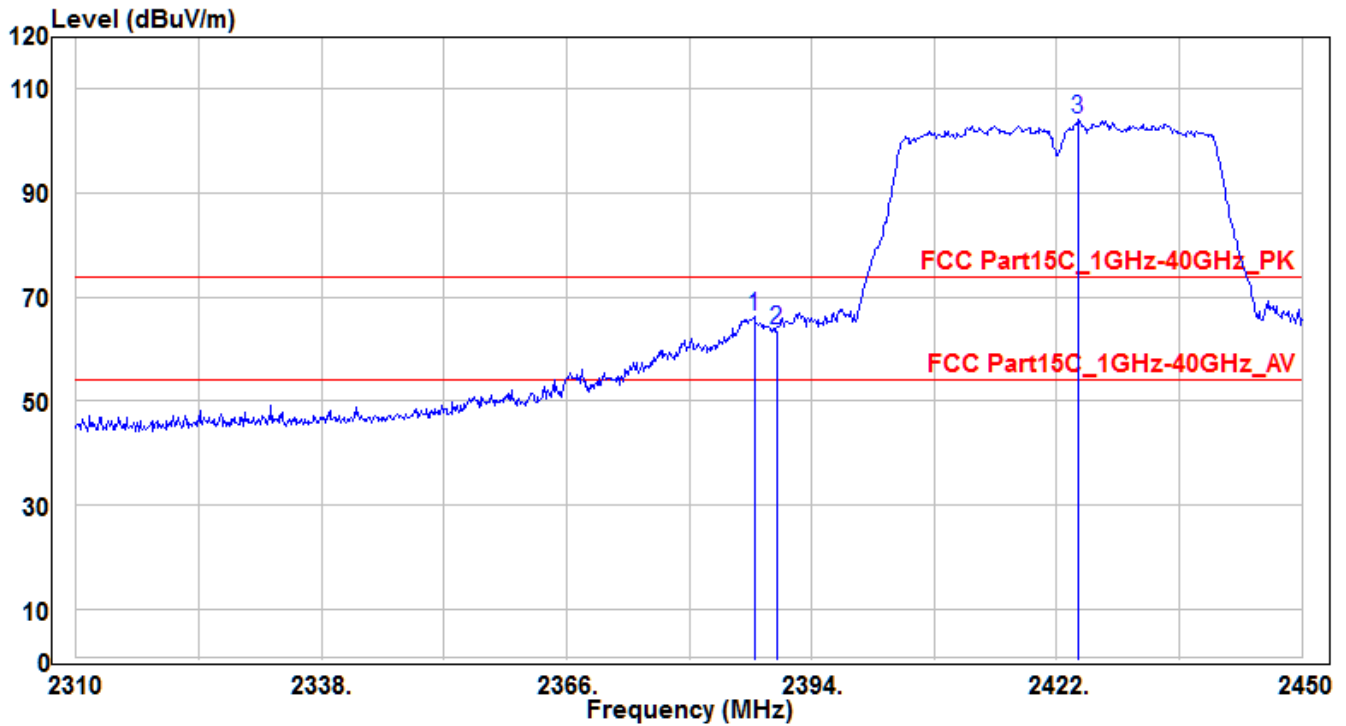

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2387.42         | 68.51          | -2.38    | 66.13                | -7.87       | 74             | 150         | 200         | Peak              |
| 2  |   | 2390            | 65.86          | -2.36    | 63.5                 | -10.5       | 74             | 150         | 200         | Peak              |
| 3  |   | 2424.38         | 106.54         | -2.22    | 104.32               | 30.32       | 74             | 150         | 200         | Peak              |

Note: The EUT Power by Notebook PC

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) - Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).